

FCC PART 15.249 MEASUREMENT AND TEST REPORT FOR

Guangzhou Walkera Technology CO., LTD

**Taishi Industrial Park, Yuwoto Town, Panyu District, 511475 Guangzhou,
China.**

FCC ID: S29WK-2801PRO

Report Concerns: Original Report	Equipment Type: RC Model plane
Model:	<u>WK-2801PRO</u>
Report No.:	<u>STR09078099I</u>
Test/Witness Engineer:	<i>Seven Song</i>
Test Date:	<u>2009-07-24 to 2009-08-05</u>
Issue Date:	<u>2009-08-06</u>
Prepared By:	<p style="text-align: center;">SEM.Test Compliance Service Co., Ltd. 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101)</p>
Approved & Authorized By:	<div style="text-align: center;">  <hr style="width: 20%; margin: 0 auto;"/> <p>Jandy So / PSQ Manager</p> </div>

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....3

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

1.2 TEST STANDARDS.....3

1.3 RELATED SUBMITTAL(S)/GRANT(S)3

1.4 TEST METHODOLOGY4

1.5 TEST FACILITY4

1.6 EUT EXERCISE SOFTWARE4

1.7 ACCESSORIES EQUIPMENT LIST AND DETAILS4

1.8 EUT CABLE LIST AND DETAILS4

2. SUMMARY OF TEST RESULTS5

3. §15.203 - ANTENNA REQUIREMENT.....6

3.1 STANDARD APPLICABLE.....6

3.2 TEST RESULT.....6

4. §15.205, §15.209, §15.249 (A)- RADIATED EMISSION.....7

4.1 MEASUREMENT UNCERTAINTY7

4.2 STANDARD APPLICABLE.....7

4.3 TEST EQUIPMENT LIST AND DETAILS8

4.4 TEST PROCEDURE.....8

4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....9

4.6 ENVIRONMENTAL CONDITIONS9

4.7 SUMMARY OF TEST RESULTS/PLOTS9

5. §15.249(B) OUT OF BAND EMISSIONS18

5.1 STANDARD APPLICABLE.....18

5.2 TEST EQUIPMENT LIST AND DETAILS18

5.3 TEST PROCEDURE.....18

5.4 ENVIRONMENTAL CONDITIONS18

5.5 SUMMARY OF TEST RESULTS/PLOTS19

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Guangzhou Walkera Technology CO., LTD
 Address of applicant: Taishi Industrial Park, Yuwoto Town, Panyu District, 511475
 Guangzhou, China.

Manufacturer: Guangzhou Walkera Technology CO., LTD
 Address of manufacturer: Taishi Industrial Park, Yuwoto Town, Panyu District, 511475
 Guangzhou, China.

General Description of E.U.T

Items	Description
EUT Description:	RC Model plane
Trade Name:	WALKERA
Model No.:	WK-2801PRO
Rated Voltage:	DC 12V
Output Power:	<100mW
Frequency Range:	2405~2480MHz
Antenna Type:	Integral Antenna
Size:	33.5X19.0X11.5cm
For more information refer to the circuit diagram form and the user's manual.	

The test data is gathered from a production sample, provided by the manufacturer.

1.2 Test Standards

The following report is prepared on behalf of the Guangzhou Walkera Technology CO., LTD in accordance with FCC Part 15, Subpart B, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.107,15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the Operating Instructions and let the EUT keep transmitting.

1.5 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

1.6 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components. The test software is started while the whole system is on.

1.7 Accessories Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

1.8 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§15.207 (a)	Conducted Emission	N/A
§15.205	Restricted Band of Operation	Compliant
§15.209	Radiated Emission	Compliant
§15.249(a)	Field Strength	Compliant
§15.249(d)	Out of Band Emission	Compliant

3. §15.203 - ANTENNA REQUIREMENT

3.1 Standard Applicable

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has an integral antenna, fulfill the requirement of this section.

4. §15.205, §15.209, §15.249 (a)- RADIATED EMISSION

4.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 3.0 dB.

4.2 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of fundamental (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 20 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209,WHICHEVER IS THE LESSER ATTENUATION.

Emissions that fall in the restricted bands (15.205) must be less than 54dBuV/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

4.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEA20	DE25181	2009-07-08	2010-07-07
Positioning Controller	C&C	CC-C-1F	N/A	2009-07-08	2010-07-07
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2009-07-08	2010-07-07
Horn Antenna	SCHWARZBECK	BBHX 9120	9120-426	2009-07-08	2010-07-07
RF Switch	EM	EMSW18	SW060023	2009-07-08	2010-07-07
Amplifier	Agilent	8447F	3113A06717	2009-07-08	2010-07-07
Coaxial Cable	SCHWARZBECK	AK9513	9513-10	2009-07-08	2010-07-07
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	25498514	2009-07-08	2010-07-07


Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

4.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

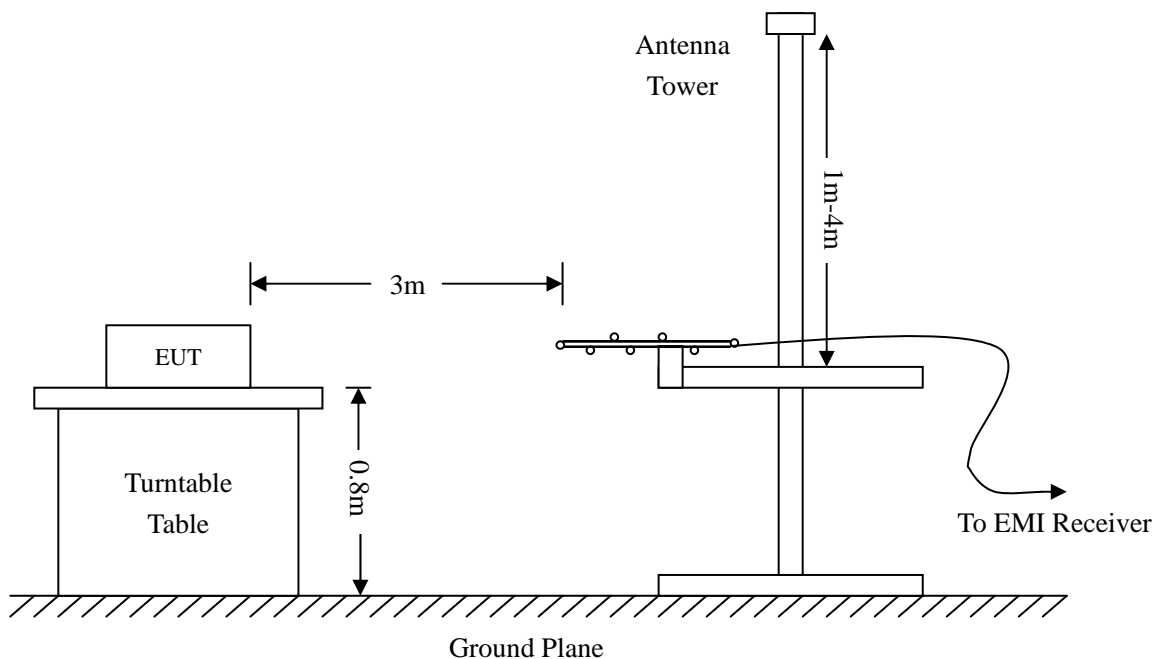

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

4.6 Environmental Conditions

Temperature:	26° C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

4.7 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.249 standards, and had the worst margin of:

-3.47 dB μ V at 4810 MHz in the Vertical polarization Low Channel, 30 MHz to 25 GHz, 3Meters

-3.33 dB μ V at 4882 MHz in the Vertical polarization Middle Channel, 30 MHz to 25 GHz, 3Meters

-3.99 dB μ V at 4960 MHz in the Horizontal polarization High Channel, 30 MHz to 25 GHz, 3Meters

Plot of Radiation Emissions Test

Radiated Disturbance

EUT: RC Model Plane


M/N: WK-2801PRO

Operating Condition: Transmitting below 1GHz

Test Specification: Horizontal & Vertical


Low Channel

Horizontal:

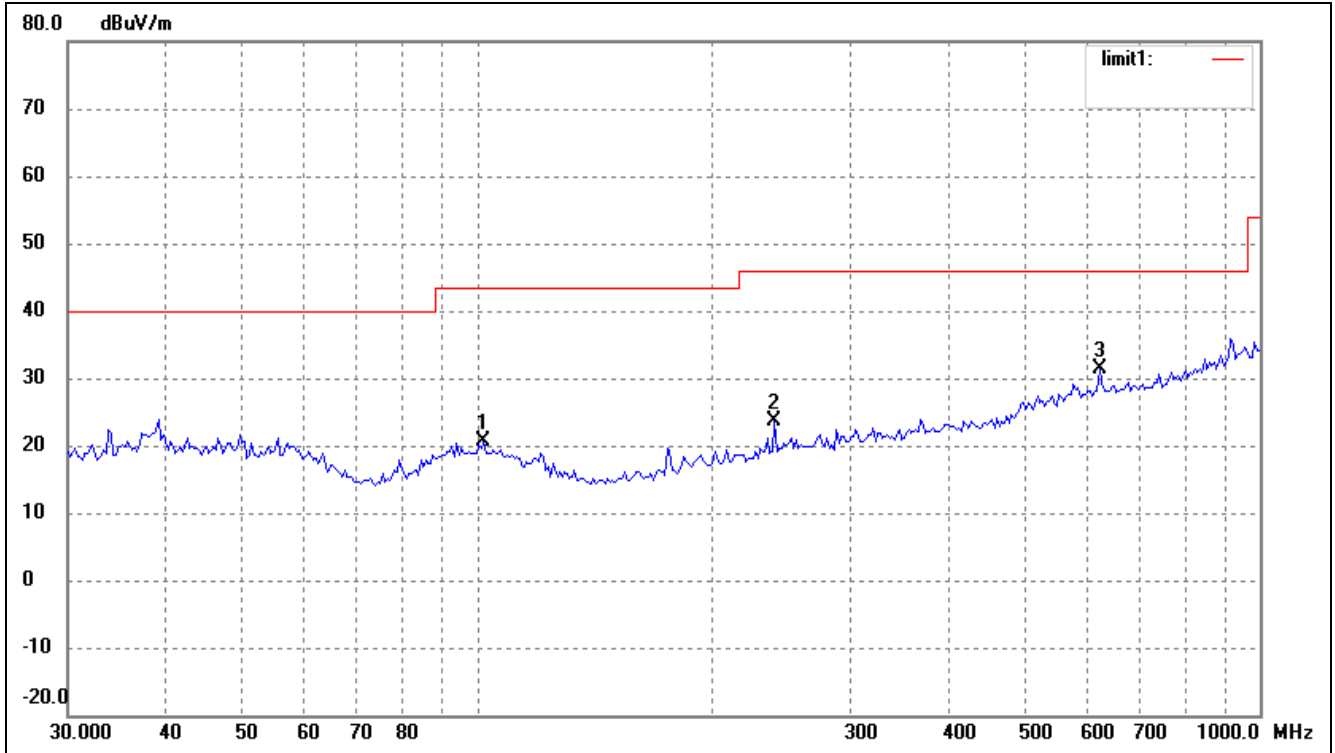

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	101.8932	13.08	7.65	20.73	43.50	-22.77	118	100	peak
2	240.1442	16.18	7.44	23.62	46.00	-22.38	220	200	peak
3	624.4897	16.11	15.19	31.30	46.00	-14.70	301	100	peak


Vertical:

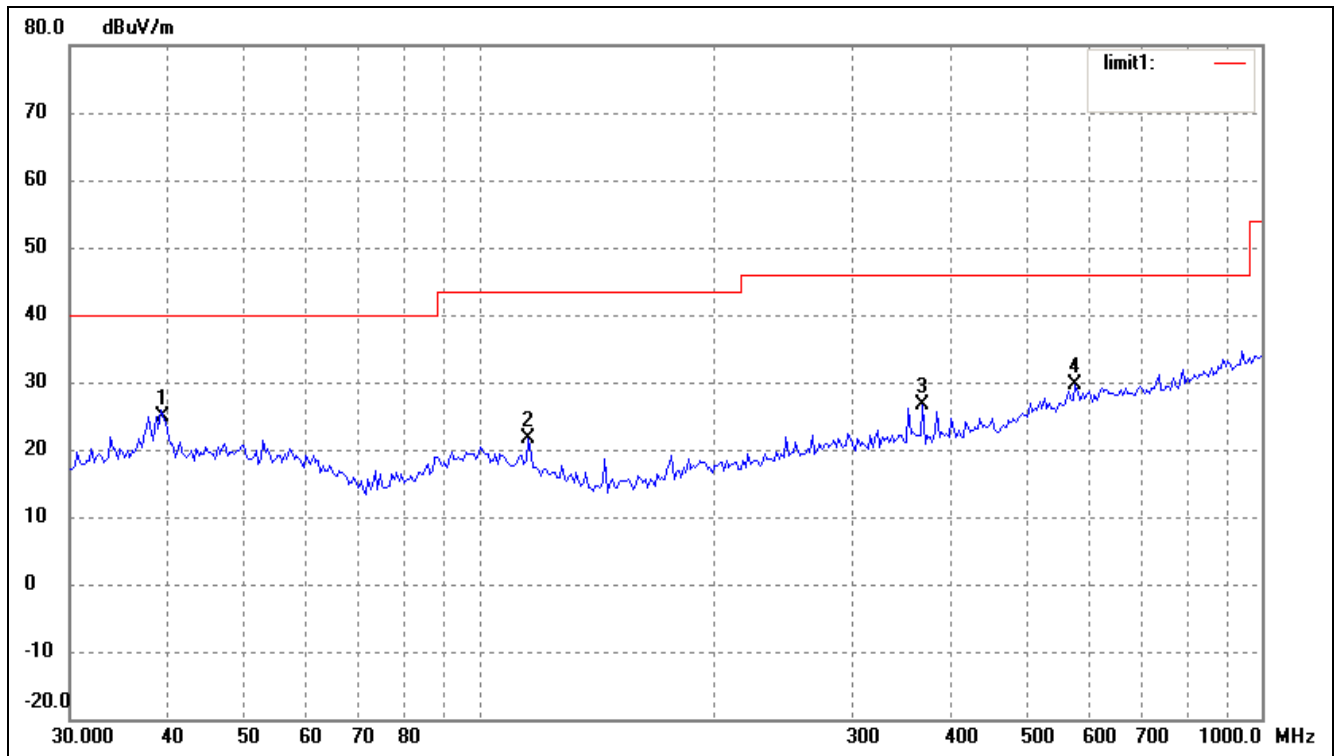

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.4588	17.16	7.78	24.94	40.00	-15.06	231	100	peak
2	115.6322	15.60	6.00	21.60	43.50	-21.90	22	100	peak
3	368.6682	16.98	9.76	26.74	46.00	-19.26	287	100	peak
4	578.0359	15.09	14.57	29.66	46.00	-16.34	291	200	peak


Middle Channel

Horizontal:

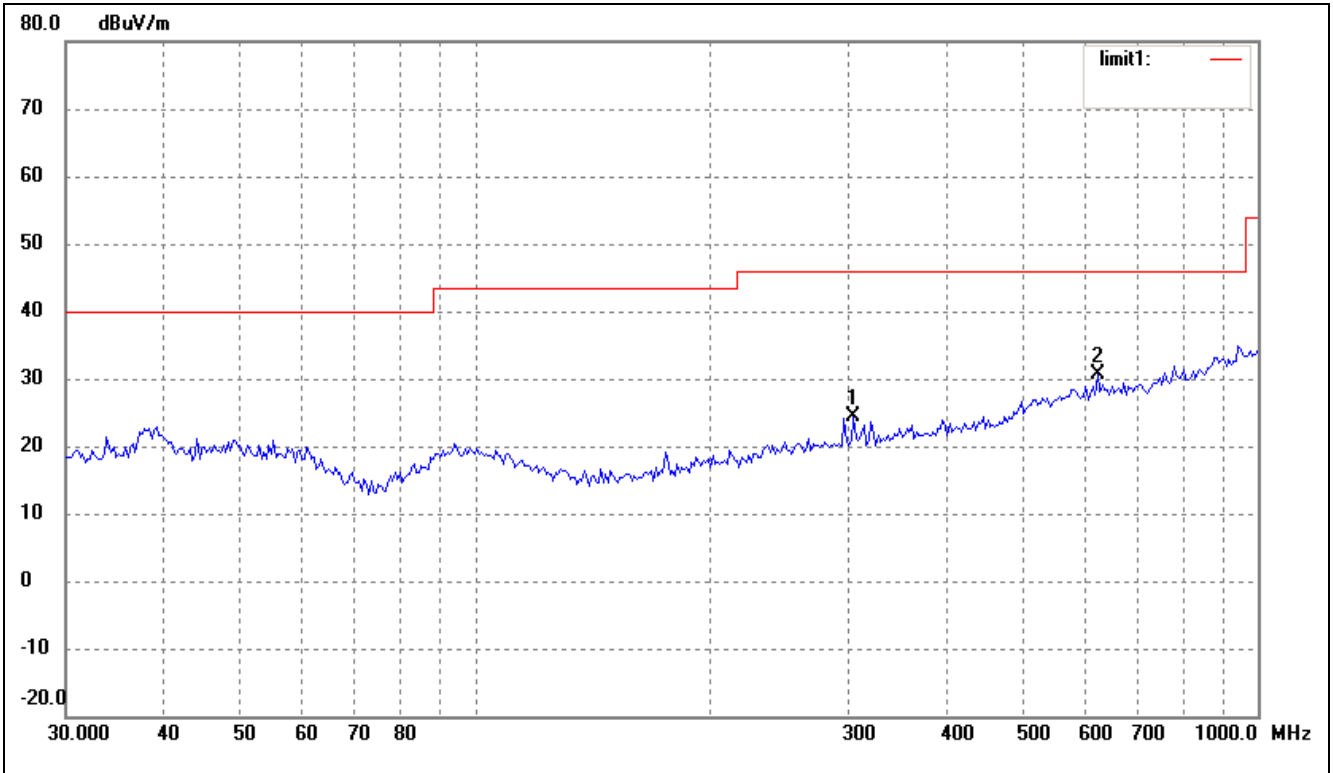


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	304.9548	15.68	8.70	24.38	46.00	-21.62	199	100	peak
2	624.4897	15.33	15.19	30.52	46.00	-15.48	267	100	peak

Vertical:

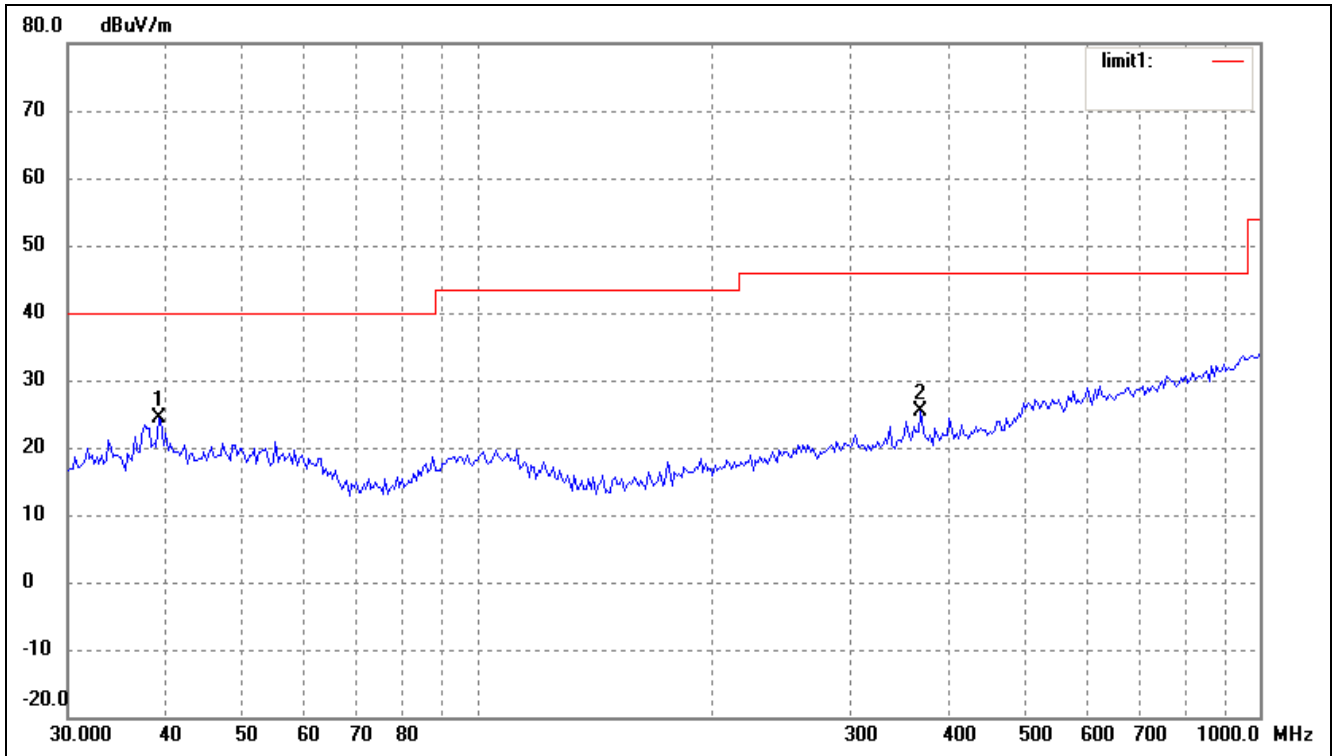


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.1825	16.73	7.71	24.44	40.00	-15.56	76	100	peak
2	368.6682	15.69	9.76	25.45	46.00	-20.55	246	100	peak

High Channel
Horizontal

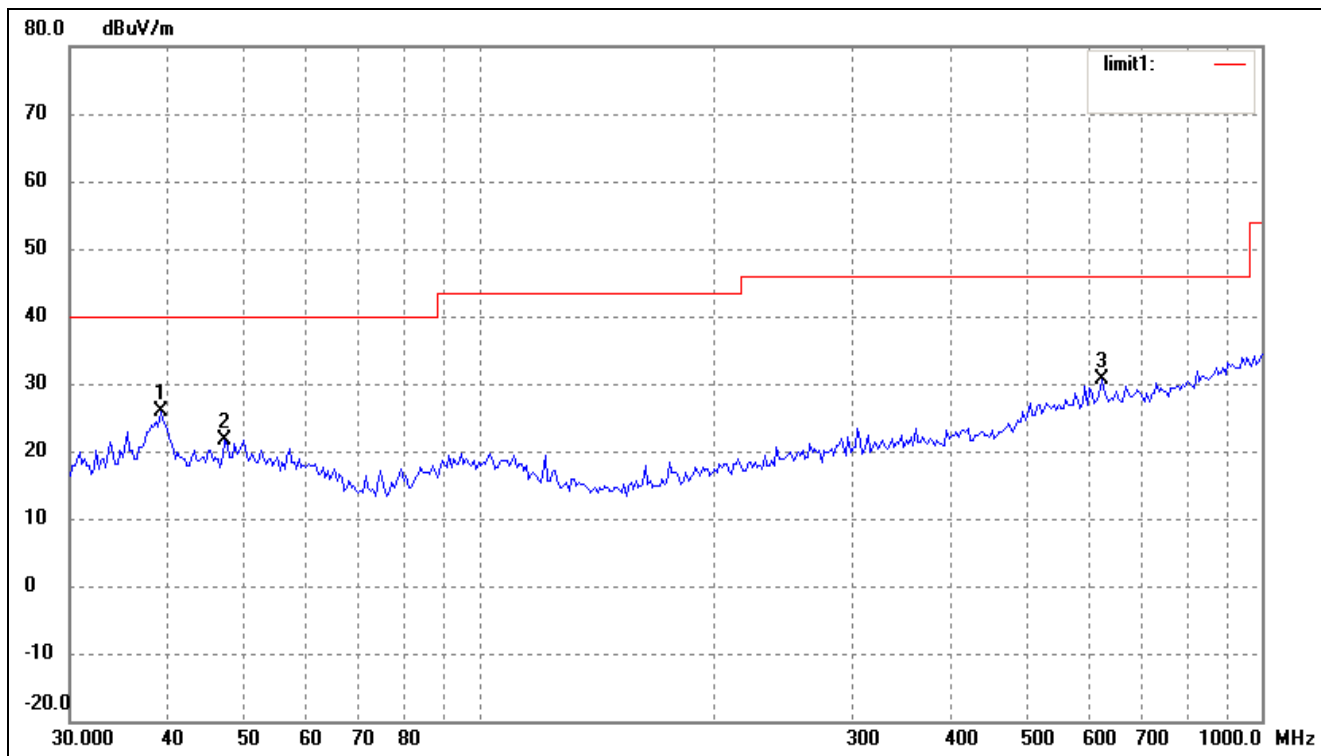

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.1825	18.05	7.71	25.76	40.00	-14.24	221	100	peak
2	47.3688	13.78	7.85	21.63	40.00	-18.37	54	200	peak
3	624.4897	15.51	15.19	30.70	46.00	-15.30	184	200	peak

Vertical

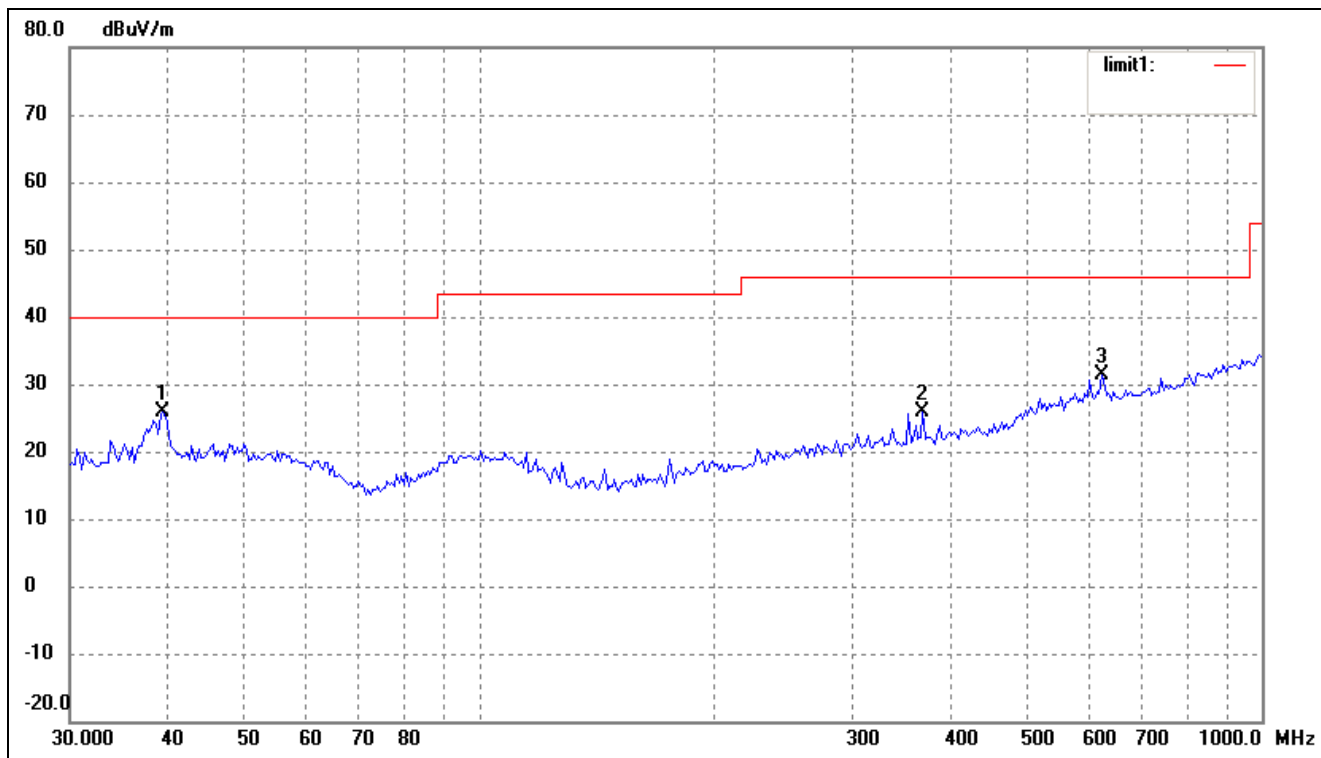

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.4588	18.11	7.78	25.89	40.00	-14.11	92	100	peak
2	368.6682	16.19	9.76	25.95	46.00	-20.05	167	100	peak
3	624.4897	16.19	15.19	31.38	46.00	-14.62	210	100	peak

Spurious Emission Above 1GHz

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4810	AV	44.23	360	V	34.1	5.2	33.0	50.53	54	-3.47
4810	AV	43.71	360	H	34.1	5.2	33.0	50.01	54	-3.99
7215	AV	39.24	45	V	37.4	6.1	33.5	49.24	54	-4.76
7215	AV	37.62	36	H	37.4	6.1	33.5	47.62	54	-6.38
4810	PK	60.92	360	H	34.1	5.2	33.0	67.22	74	-6.78
4810	PK	59.37	360	V	34.1	5.2	33.0	65.67	74	-8.33
7215	PK	53.22	350	V	37.4	6.1	33.5	63.22	74	-10.78
7215	PK	52.37	360	H	37.4	6.1	33.5	62.37	74	-11.63
2405	PK	107.76	44	V	29.1	3.7	34.0	106.56	114	-7.44
2405	PK	106.74	63	H	29.1	3.7	34.0	105.54	114	-8.46
2405	AV	75.44	20	V	29.1	3.7	34.0	74.24	94	-19.76
2405	AV	73.32	35	H	29.1	3.7	34.0	72.12	94	-21.88
Middle Channel (1G to 25GHz)										
4882	AV	44.37	265	V	34.1	5.2	33.0	50.67	54	-3.33
4882	AV	43.91	352	H	34.1	5.2	33.0	50.21	54	-3.79
7323	AV	39.64	352	V	37.4	6.1	33.5	49.64	54	-4.36
7323	AV	38.42	257	H	37.4	6.1	33.5	48.42	54	-5.58
4882	PK	61.92	67	H	34.1	5.2	33.0	68.22	74	-5.78
4882	PK	61.37	350	V	34.1	5.2	33.0	67.67	74	-6.33
7323	PK	55.12	49	V	37.4	6.1	33.5	65.12	74	-8.88
7323	PK	54.34	68	H	37.4	6.1	33.5	64.34	74	-9.66
2441	PK	107.46	56	V	29.1	3.7	34.0	106.26	114	-7.74
2441	PK	106.12	42	H	29.1	3.7	34.0	104.92	114	-9.16
2441	AV	74.78	54	V	29.1	3.7	34.0	73.58	94	-20.42
2441	AV	73.84	69	H	29.1	3.7	34.0	72.64	94	-21.36

High Channel (1G to 25GHz)										
4960	AV	43.71	56	H	34.1	5.2	33.0	50.01	54	-3.99
4960	AV	43.63	98	V	34.1	5.2	33.0	49.93	54	-4.07
7440	AV	38.24	69	V	37.4	6.1	33.5	48.24	54	-5.76
7440	AV	36.57	72	H	37.4	6.1	33.5	46.57	54	-7.43
7440	PK	54.73	64	V	37.4	6.1	33.5	64.73	74	-9.27
4960	PK	57.37	44	V	34.1	5.2	33.0	63.67	74	-10.33
7440	PK	52.42	69	H	37.4	6.1	33.5	62.42	74	-11.58
4960	PK	55.92	45	H	34.1	5.2	33.0	62.22	74	-11.78
2480	PK	107.85	12	V	29.1	3.7	34.0	106.65	114	-7.35
2480	PK	106.94	15	H	29.1	3.7	34.0	105.74	114	-8.26
2480	AV	76.85	55	V	29.1	3.7	34.0	75.65	94	-18.35
2480	AV	74.62	51	H	29.1	3.7	34.0	73.42	94	-20.58

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4. Emissions 20dB lower than the limit are not reported.

5. §15.249(b) OUT OF BAND EMISSIONS

5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEA20	DE25181	2009-07-08	2010-07-07
Positioning Controller	C&C	CC-C-1F	N/A	2009-07-08	2010-07-07
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2009-07-08	2010-07-07
Horn Antenna	SCHWARZBECK	BBHX 9120	9120-426	2009-07-08	2010-07-07
RF Switch	EM	EMSW18	SW060023	2009-07-08	2010-07-07
Amplifier	Agilent	8447F	3113A06717	2009-07-08	2010-07-07
Coaxial Cable	SCHWARZBECK	AK9513	9513-10	2009-07-08	2010-07-07
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	25498514	2009-07-08	2010-07-07
Agilent	Spectrum Analyzer	E4402B	US41192821	2009-07-08	2010-07-07

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

5.3 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2438.5MHz, than mark the higher-level emission for comparing with the FCC rules.

5.4 Environmental Conditions


Temperature:	22° C
Relative Humidity:	54%
ATM Pressure:	1012 mbar

5.5 Summary of Test Results/Plots

Frequency MHz	Limit dBuv	Result
Low Edge	<54	Pass
High Edge	<54	Pass


The edge emissions are below the FCC 15.209 Limits. Please refer to the test plots below.

Lowest Bandedge

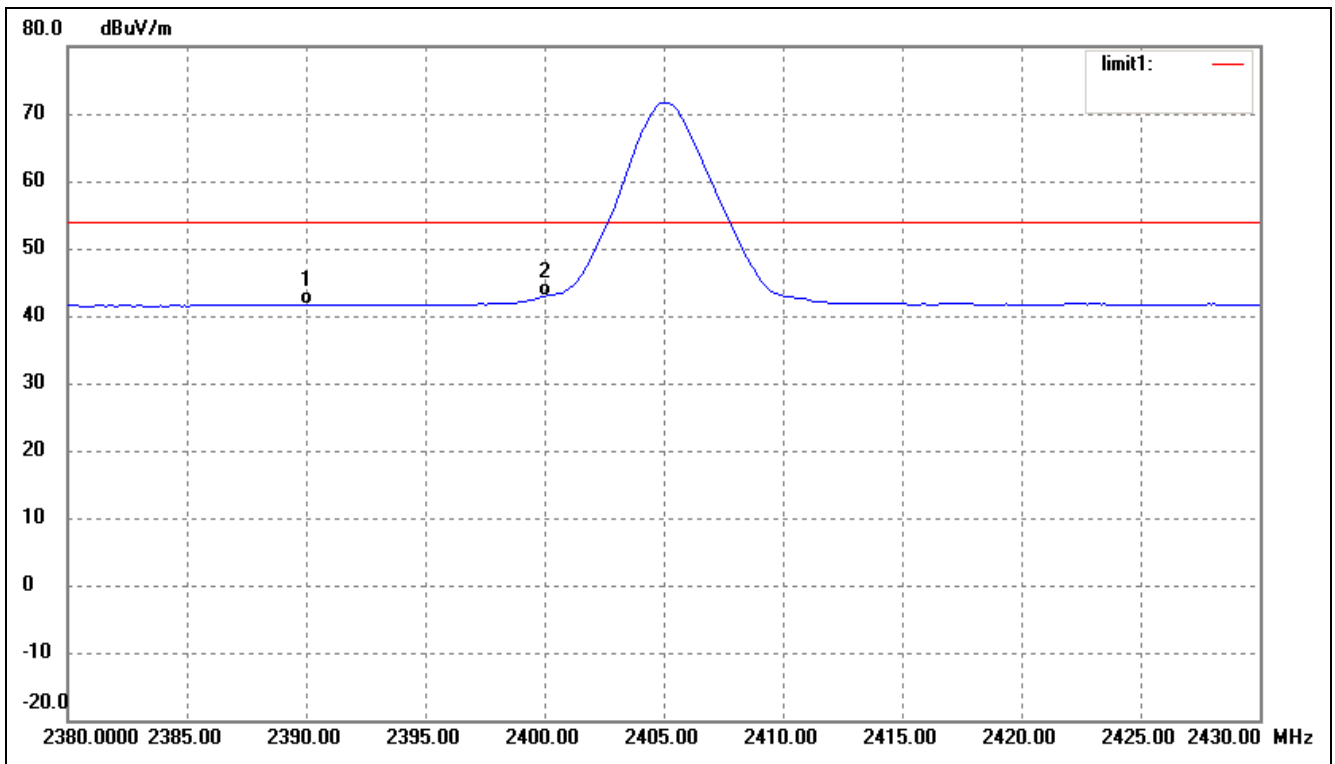

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	6.02	35.59	41.61	54.00	-12.39	Average Detector
	2390.000	28.73	35.59	64.32	74.00	-9.68	Peak Detector
2	2400.000	7.26	35.68	42.94	54.00	-11.06	Average Detector
	2400.000	29.73	35.68	65.41	74.00	-8.59	Peak Detector

Highest Bandedge

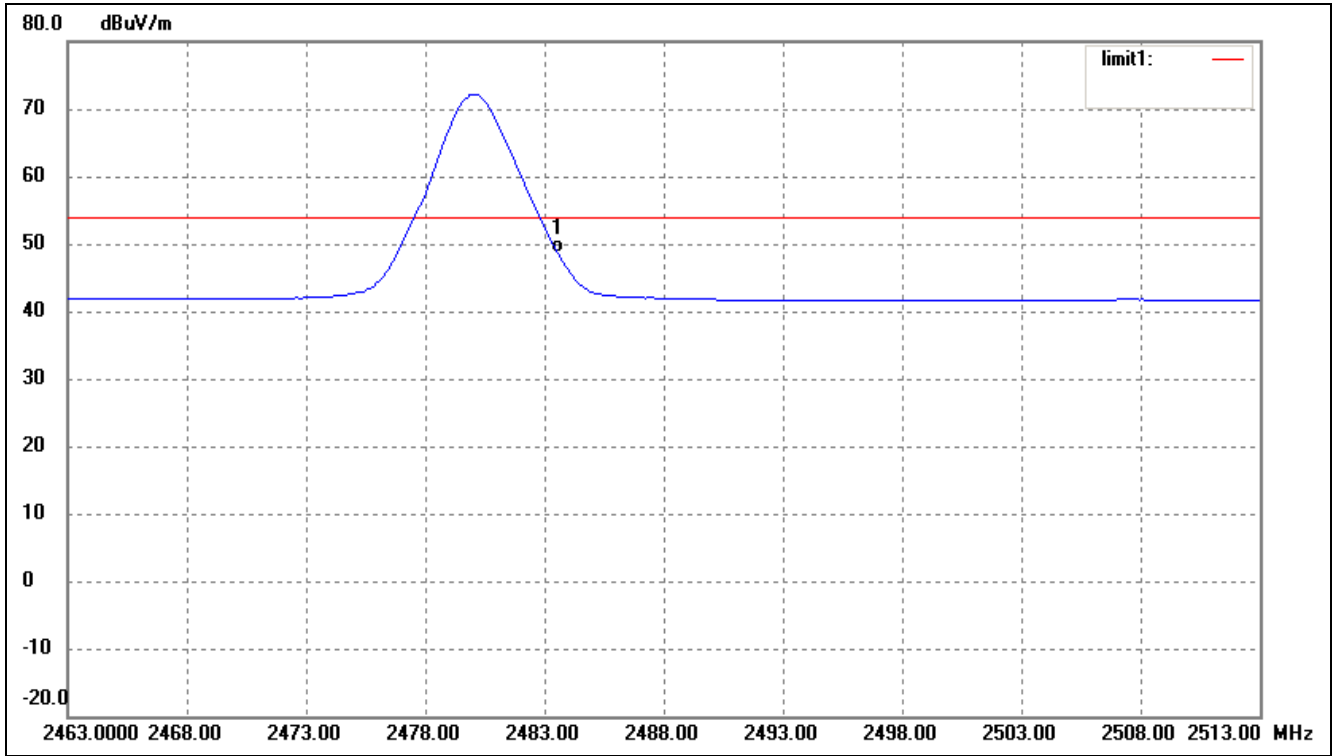

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	12.68	35.97	48.65	54.00	-5.35	Average Detector
	2483.500	30.19	35.97	66.16	74.00	-7.84	Peak Detector

***** END OF REPORT *****