

FCC 47 CFR PART 15 SUBPART C
CERTIFICATION TEST REPORT for BLE

For

Tablet PC

Model No.: Lenovo ideapad MIIX 310-10ICR, 80SG, Lenovo ideapad MIIX 310-10ICR xxxxxx, 80SG xxxxxx(the dots"x" in the model name can be 0 to 9, A to Z, a to z, "-" or blank, for marketing use)

FCC ID: S7JMIIX310

Trademark:Lenovo

REPORT NO.: ES160114019E2

ISSUE DATE: February 23, 2016

Prepared for

SHENZHEN YIFANG DIGITAL TECHNOLOGY CO., LTD.

Building NO.22,23, Fifth Region, Baiwangxin Industrial Park, Songbai Rd.,
Nanshan, Shenzhen518108, China

Prepared by

EMTEK(SHENZHEN) CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,
Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282

Table of Contents

1	TEST RESULT CERTIFICATION.....	3
2	EUT TECHNICAL DESCRIPTION.....	4
3	SUMMARY OF TEST RESULT	8
4	TEST METHODOLOGY	9
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	9
4.2	MEASUREMENT EQUIPMENT USED	9
4.3	DESCRIPTION OF TEST MODES.....	10
5	FACILITIES AND ACCREDITATIONS	11
5.1	FACILITIES	11
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	11
6	TEST SYSTEM UNCERTAINTY	12
7	SETUP OF EQUIPMENT UNDER TEST	13
7.1	RADIO FREQUENCY TEST SETUP 1.....	13
7.2	RADIO FREQUENCY TEST SETUP 2.....	13
7.3	CONDUCTED EMISSION TEST SETUP.....	14
7.4	SUPPORT EQUIPMENT	15
8	TEST REQUIREMENTS	16
8.1	DTS (6DB) BANDWIDTH.....	16
8.2	MAXIMUM PEAK CONDUCTED OUTPUT POWER	19
8.3	MAXIMUM POWER SPECTRAL DENSITY	22
8.4	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	25
8.5	RADIATED SPURIOUS EMISSION.....	30
8.6	CONDUCTED EMISSIONS TEST	43
8.7	ANTENNA APPLICATION.....	48
8.8	APPENDIX (PHOTOS OF EUT).....	49

1 TEST RESULT CERTIFICATION


Applicant:	SHENZHEN YIFANG DIGITAL TECHNOLOGY CO., LTD. Building NO.22,23, Fifth Region, Baiwangxin Industrial Park, Songbai Rd., Nanshan, Shenzhen518108, China
Manufacturer:	Lenovo PC HK Limited 23/F, Lincoln House, Taikoo Place, 979 King's Road, Quarry Bay, Hong Kong
Factory 1:	Lenovo(Shanghai) Electronics Technology Co., Ltd. NO.68 BUILDING, 199 FENJU RD, China (Shanghai) Pilot Free Trade Zone, 200131, CHINA
Factory 2:	Lenovo (India) Private Limited 19/1A,2A Edayarpalayam Village Cuddalore Main Road, Thavalakuppam Pondicherry – 605007 INDIA
Factory 3:	SOLETRON INDUSTRIAL, COMERCIAL, SERVIÇOS E EXPORTADORA DO BRASIL LTDA. Solectron Industrial , Comercial, Servicos Exportadora do Brasil Ltda Rodovia Campinas Mogi Mirim km 133 - Bairro Roseira - Jaguariuna, Sao Paulo, Brasil CEP13820-000
Factory 4:	Lenovo(Shanghai) Electronics Technology Co., Ltd.branch company NO.2 Building,955 Shangfeng Road,Pu Dong New District Shanghai,China
Factory 5:	Lenovo Tecnologia (Brasil) Ltda. Rodovia Senador José Ermirio de Moraes, km 11, Bairro Varejão - ITÚ - SP
Factory 6:	SHENZHEN YIFANG DIGITAL TECHNOLOGY CO.,LTD. Building NO.22,23,Fifth Region, Baiwangxin Industrial Park ,Songbai Rd., Nanshan, Shenzhen 518108,China

Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J:2015 FCC 47 CFR Part 15, Subpart C:2015	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247
The test results of this report relate only to the tested sample identified in this report

Date of Test : January 29, 2016 to February 17, 2016

Prepared by : 
Yaping Shen/Editor

Reviewer : 
Joe Xia/Supervisor

Approve & Authorized Signer : 
Lisa Wang/Manager

2 EUT TECHNICAL DESCRIPTION

Product	Tablet PC
Model Number:	Lenovo ideapad MIIX 310-10ICR, 80SG, Lenovo ideapad MIIX 310-10ICR xxxxxx, 80SG xxxxxx (the dots "x" in the model name can be 0 to 9, A to Z, a to z, "-" or blank, for marketing use) (Note: These models are identical in circuitry and electrical, mechanical and physical construction; the only difference is the model no. for trading purpose. We prepare "Lenovo ideapad MIIX 310-10ICR" for test, and the worst result recorded in the report.)
Data Rate :	Wifi: 802.11 b: 1, 2, 5.5, 11Mbps; 802.11 g: 6, 9, 12, 18, 24, 36, 48, 54Mbps; 802.11n(HT20): MCS0-MCS7; 802.11n(HT40): MCS0-MCS7; Bluetooth: 1Mbps for GFSK modulation 2Mbps for pi/4-DQPSK modulation 3Mbps for 8DPSK modulation
Modulation:	Wifi: OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n, DSSS with DBPSK/DQPSK/CCK for 802.11b Bluetooth DTS: GFSK Bluetooth DSS: GFSK, $\pi/4$ -DQPSK, 8DPSK
Operating Frequency Range:	Wifi: 2412-2462MHz for 802.11b/g; 2412-2462MHz for 802.11n(HT20); 2422-2452MHz for 802.11n(HT40); Bluetooth: 2402-2480MHz
Number of Channels:	Wifi: 11 channels for 802.11b/g; 11 channels for 802.11n(HT20); 7 channels for 802.11n(HT40); Bluetooth: 79 Channels for Bluetooth DSS; 40 Channels for Bluetooth DTS;
Transmit Power Max:	Wifi: 14.31 dBm for 802.11b; 13.55 dBm for 802.11g; 12.94 dBm for 802.11n(HT20); 11.58 dBm for 802.11n(HT40); BT DSS: 3.70 dBm BT DTS: -0.455 dBm
Antenna Type:	FPC antenna
Antenna Gain:	3.02 dBi for WIFI antenna 1.72 dBi for BT antenna
Power supply:	<input checked="" type="checkbox"/> 3.7V internal rechargeable lithium battery <input checked="" type="checkbox"/> DC 5V from USB adapter <input type="checkbox"/> DC 5V from PC
	<input checked="" type="checkbox"/> Adapter: Model: ADS-25SGP-06 05020E Input: 100-240~ 50/60Hz 0.7A MAX Output: DC 5V 4A

Temperature Range:	-10°C ~ +50°C
Product Software Version:	Windows 10 Home
Product Hardware Version:	M1029CWP_MB_V1.2
Radio Software Version:	802.11b/g/n, Bluetooth
Radio Hardware Version:	Realtek RTL8723BS Combo Module
RF power setting in TEST SW:	Maximum power

Note: for more details, please refer to the User's manual of the EUT.

The devices can be installed inside the EUT are listed below:

Component	Vendor	Description
Main board		M1029CWP_MB_V1.2
CPU	Intel Atom	Intel Atom x5-Z8300 1.44GHZ up to 1.84GHZ (Intel Z8350 Optional)
Memory	Samsung SK hynix Micron Micron(Elpida)	2GB(4GB Optional)
eMMC	Samsung, Hyrix, Sandisk (TLC) Ramaxe	32GB(64GB Optional)
Battery	SUNWODA	Model:LENM1029CWP
Switching AC Adapter	Lenovo	Model: ADS-25SGP-06 05020E Input: 100-240~ 50/60Hz 0.7A MAX Output: DC 5V 4A
Wireless Module	Realtek	Realtek RTL8723BS Combo Module

The I/O ports of EUT are listed below:

I/O Port Type	Quantity
Docking Connector	one
Mini HDMI Connector	one
Micro USB 2.0 Port	one
Micro SD Card Slot	one
USB 2.0 Port(dock)	two

All the devices listed below are chosen by the applicant to be the representative configuration for testing in this report.

Configuration	1
CPU	Intel Atom x5-Z8300 1.44GHZ
Memory	Samsung 2GB
eMMC	Samsung 32GB
Battery	Model:LENM1029CWP
Switching AC Adapter	Model: ADS-25SGP-06 05020E Input: 100-240~ 50/60Hz 0.7A MAX Output: DC 5V 4A
Wireless Module	Realtek RTL8723BS Combo Module
Power Supply	Lenovo (Model: ADS-25SGP-06 05020E) 2pin Lenovo (Model: ADS-25SGP-06 05020E) 3pin
Resolution	Display 1280x800 60Hz

Modified Information

Version.	Summary	Date of Rev.	Report No.
Ver.1.0	Original Report	/	ES160114019E2

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	PASS	
NOTE1: N/A (Not Applicable)			
NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: S7JMIIX310 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 DTS Meas Guidance v03r04

FCC KDB 662911 D01 Multiple Transmitter Output v01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE.CAL
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/16/2015	05/15/2016
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/16/2015	05/15/2016
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A	N/A

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE.CAL
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/16/2015	05/15/2016
Pre-Amplifier	HP	8447D	2944A07999	05/16/2015	05/15/2016
Bilog Antenna	Schwarzbeck	VULB9163	142	05/16/2015	05/15/2016
Loop Antenna	ARA	PLA-1030/B	1029	05/16/2015	05/15/2016
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/16/2015	05/15/2016
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/16/2015	05/15/2016
Cable	Schwarzbeck	AK9513	ACRX1	05/16/2015	05/15/2016
Cable	Rosenberger	N/A	FP2RX2	05/16/2015	05/15/2016
Cable	Schwarzbeck	AK9513	CRPX1	05/16/2015	05/15/2016
Cable	Schwarzbeck	AK9513	CRRX2	05/16/2015	05/15/2016
Pre-Amplifier	A.H.	PAM-0126	1415261	05/16/2015	05/15/2016

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE.CAL
Spectrum Analyzer	Agilent	E4407B	88156318	05/16/2015	05/15/2016
Power meter	Anritsu	ML2495A	0824006	05/16/2015	05/15/2016
Power sensor	Anritsu	MA2411B	0738172	05/16/2015	05/15/2016
Signal Analyzer	Agilent	N9010A	My53470879	05/16/2015	05/15/2016

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (Bluetooth V4.0:1Mbps) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.

Frequency and Channel list for Bluetooth V4.0:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	19	2440
1	2404	20	2442	37	2476
2	2406	21	2444	38	2478
...	39	2480

Note: $f_c=2402\text{MHz}+k\times 1\text{MHz}$ $k=0$ to 39

Test Frequency and channel for Bluetooth V4.0:

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	19	2440	39	2480

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: Accredited by CNAS, 2013.10.29

The certificate is valid until 2016.10.28

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2015.4

The Laboratory has been assessed according to the requirements ISO/IEC 17025.

Accredited by FCC, April 17, 2013

The Certificate Registration Number is 709623.

Accredited by FCC, July 24, 2013

The Certificate Registration Number is 406365.

Accredited by Industry Canada, November 29, 2012

The Certificate Registration Number is 4480A.

Name of Firm

: EMTEK(SHENZHEN) CO., LTD.

Site Location

: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	± 0.5
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth 4.0 DTS component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

Below 30MHz :

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz :

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz :

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

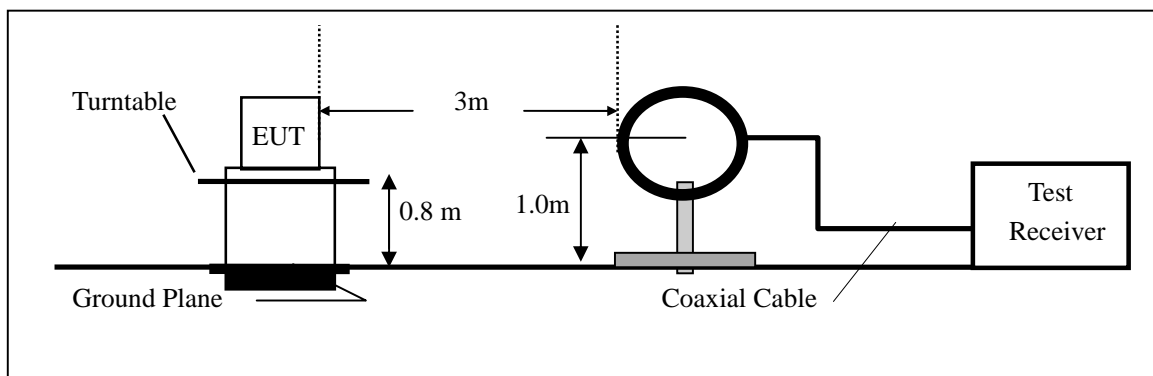

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

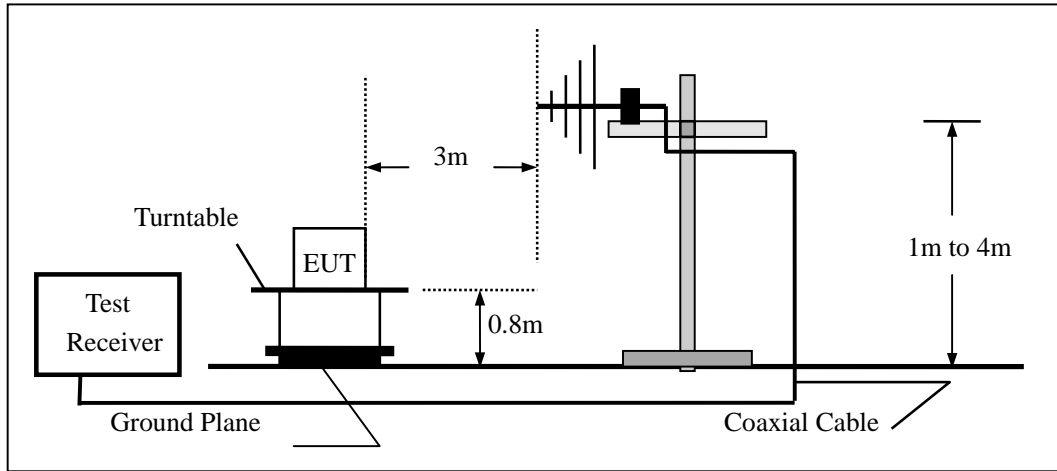

(b) Radiated Emission Test Set-Up, Frequency above 1000MHz

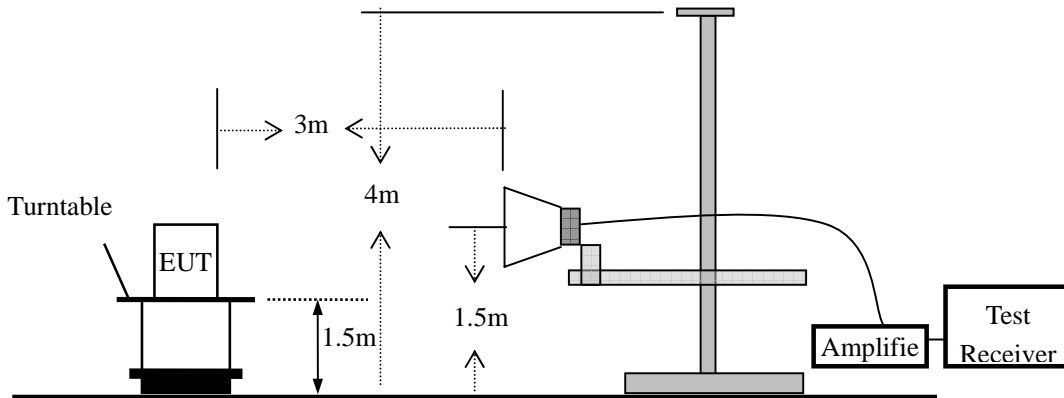


7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Tablet PC) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

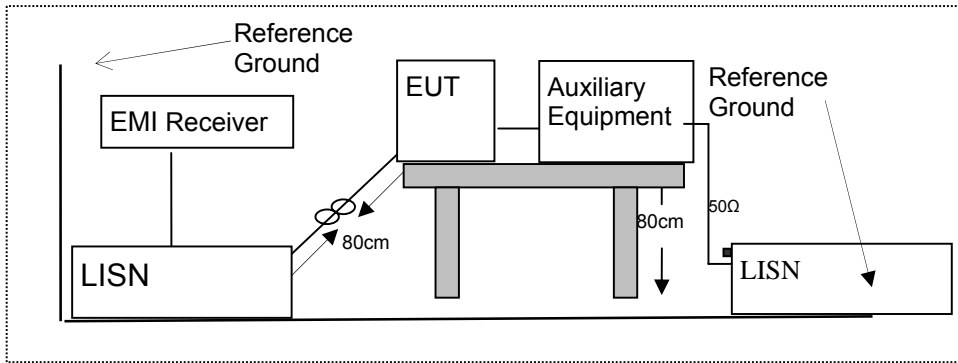

7.4 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
N/A	N/A	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 DTS (6DB) BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v03r04

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in Bluetooth 4.0 DTS mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300 kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.

Test Results

Temperature :	24	Test Date :	January 30, 2016
Humidity :	53 %	Test By:	KING KONG

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (kHz)	Limit (kHz)	Verdict
Bluetooth 4.0 DTS	0	2402	533.5	>500	PASS
	19	2440	531.3	>500	PASS
	39	2480	530.4	>500	PASS

Test Model	DTS (6dB) Bandwidth	
	Bluetooth4.0 DTS	
	Channel 0: 2402MHz	GFSK modulation



Test Model	DTS (6dB) Bandwidth	
	Bluetooth4.0 DTS	
	Channel 19: 2440MHz	GFSK modulation



Test Model	DTS (6dB) Bandwidth	
	Bluetooth4.0 DTS	
	Channel 39: 2480MHz	GFSK modulation



8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 DTS 01 Meas. Guidance v03r04

8.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.4 Test Procedure

■ According to FCC Part 15.247(b)(3)

As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. For smart system, Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Set the RBW DTS bandwidth (about 1MHz).

Set VBW = 3*RBW (about 3MHz)

Set the span 3*RBW

Set Sweep time = auto couple.

Set Detector = peak.

Set Trace mode = max hold.

Allow trace to fully stabilize. Use peak marker function to determine the peak amplitude level.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Results

Temperature:	24	Test Date:	January 30, 2016
Humidity:	53 %	Test By:	KING KONG

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
Bluetooth 4.0 DTS	0	2402	-0.455	30	PASS
	19	2440	-0.459	30	PASS
	39	2480	-1.129	30	PASS

Test Model	Maximum Conducted Output Power	
	Bluetooth4.0 DTS	
	Channel 0: 2402MHz	GFSK modulation



Test Model	Maximum Conducted Output Power	
	Bluetooth4.0DTS	
	Channel 19: 2440MHz	GFSK modulation



Test Model	Maximum Conducted Output Power	
	Bluetooth4.0 DTS	
	Channel 39: 2480MHz	GFSK modulation



8.3 MAXIMUM POWER SPECTRAL DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v03r04

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

8.3.5 Test Results

Temperature: 24
Humidity: 53 %

Test Date: January 30, 2016
Test By: KING KONG

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Bluetooth 4.0 DTS	0	2402	-18.090	8	PASS
	19	2440	-18.142	8	PASS
	39	2480	-18.856	8	PASS
Note: N/A					

Test Model	Power Spectral Density	
	Bluetooth 4.0 DTS	
	Channel 0: 2402MHz	GFSK modulation



Test Model	Power Spectral Density	
	Bluetooth 4.0 DTS	
	Channel 19: 2440MHz	GFSK modulation



Test Model	Power Spectral Density	
	Bluetooth 4.0 DTS	
	Channel 39: 2480MHz	GFSK modulation



8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v03r04

8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to = 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

8.4.5 Test Results

Test Model	PSD(Power Spectral Density) RBW=100kHz	
	Bluetooth 4.0 DTS	
	Channel 0: 2402MHz	GFSK modulation



Test Model	Unwanted Emissions in non-restricted frequency bands	
	Bluetooth 4.0 DTS	
	Channel 0: 2402MHz	GFSK modulation



Test Model	Band edge	
	Bluetooth 4.0 DTS	
	Channel 0: 2402MHz	GFSK modulation



Test Model	PSD(Power Spectral Density) RBW=100kHz	
	Bluetooth 4.0 DTS	
	Channel 19: 2440MHz	GFSK modulation



Test Model	Unwanted Emissions In Non-Restricted Frequency Bands	
	Bluetooth 4.0 DTS	
	Channel 19: 2440MHz	GFSK modulation



Test Model	PSD(Power Spectral Density) RBW=100kHz	
	Bluetooth 4.0 DTS	
	Channel 39: 2480MHz	GFSK modulation



Test Model	Unwanted Emissions In Non-Restricted Frequency Bands	
	Bluetooth 4.0 DTS	
	Channel 39: 2480MHz	GFSK modulation



Test Model	Band edge	
	Bluetooth 4.0 DTS	
	Channel 39: 2480MHz	GFSK modulation



8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 DTS 01 Meas. Guidance v03r02

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	2400/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW ≥ RBW for peak measurement

VBW = 10Hz for Average measurement

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.5.5 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	24	Test Date:	January 30, 2016
Humidity:	53 %	Test By:	KING KONG
Test mode:	TX Mode		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/ \text{test distance})$ (dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

Bluetooth 4.0 DTS mode have been tested, and the worst result was report as below:

Temperature: 24 Test Date: January 30, 2016
 Humidity: 53 % Test By: KING KONG
 Test mode: Bluetooth 4.0 DTS Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
7596	V	46.82	30.1	74.00	54.00	-27.18	-23.9
8939	V	49.02	33.4	74.00	54.00	-24.98	-20.6
9806	V	49.98	34.6	74.00	54.00	-24.02	-19.4
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
5590	H	44.03	30.7	74.00	54.00	-29.97	-23.3
7256	H	47.31	32.8	74.00	54.00	-26.69	-21.2
8990	H	48.75	33.9	74.00	54.00	-25.25	-20.1

Temperature: 24 Test Date: January 30, 2016
 Humidity: 53 % Test By: KING KONG
 Test mode: Bluetooth 4.0 DTS Frequency: Channel 19: 2440MHz


Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
6457	V	46.01	31.4	74.00	54.00	-27.99	-22.6
9925	V	49.53	33.2	74.00	54.00	-24.47	-20.8
10894	V	50.84	35.6	74.00	54.00	-23.16	-18.4
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
7273	H	46.10	31.2	74.00	54.00	-27.90	-22.8
9585	H	48.62	32.5	74.00	54.00	-25.38	-21.5
10928	H	49.46	34.3	74.00	54.00	-24.54	-19.7

Temperature: 24 Test Date: January 30, 2016
 Humidity: 53 % Test By: KING KONG
 Test mode: Bluetooth 4.0 DTS Frequency: Channel 39: 2480MHz


Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
8310	V	46.43	31.4	74.00	54.00	-27.57	-22.6
10571	V	48.84	33.5	74.00	54.00	-25.16	-20.5
11013	V	49.22	34.2	74.00	54.00	-24.78	-19.8
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
7715	H	46.15	31.9	74.00	54.00	-27.85	-22.1
8956	H	49.09	34.7	74.00	54.00	-24.91	-19.3
10435	H	49.07	33.6	74.00	54.00	-24.93	-20.4

- Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz
All the modulation modes were tested, the data of the worst mode are described in the following table.

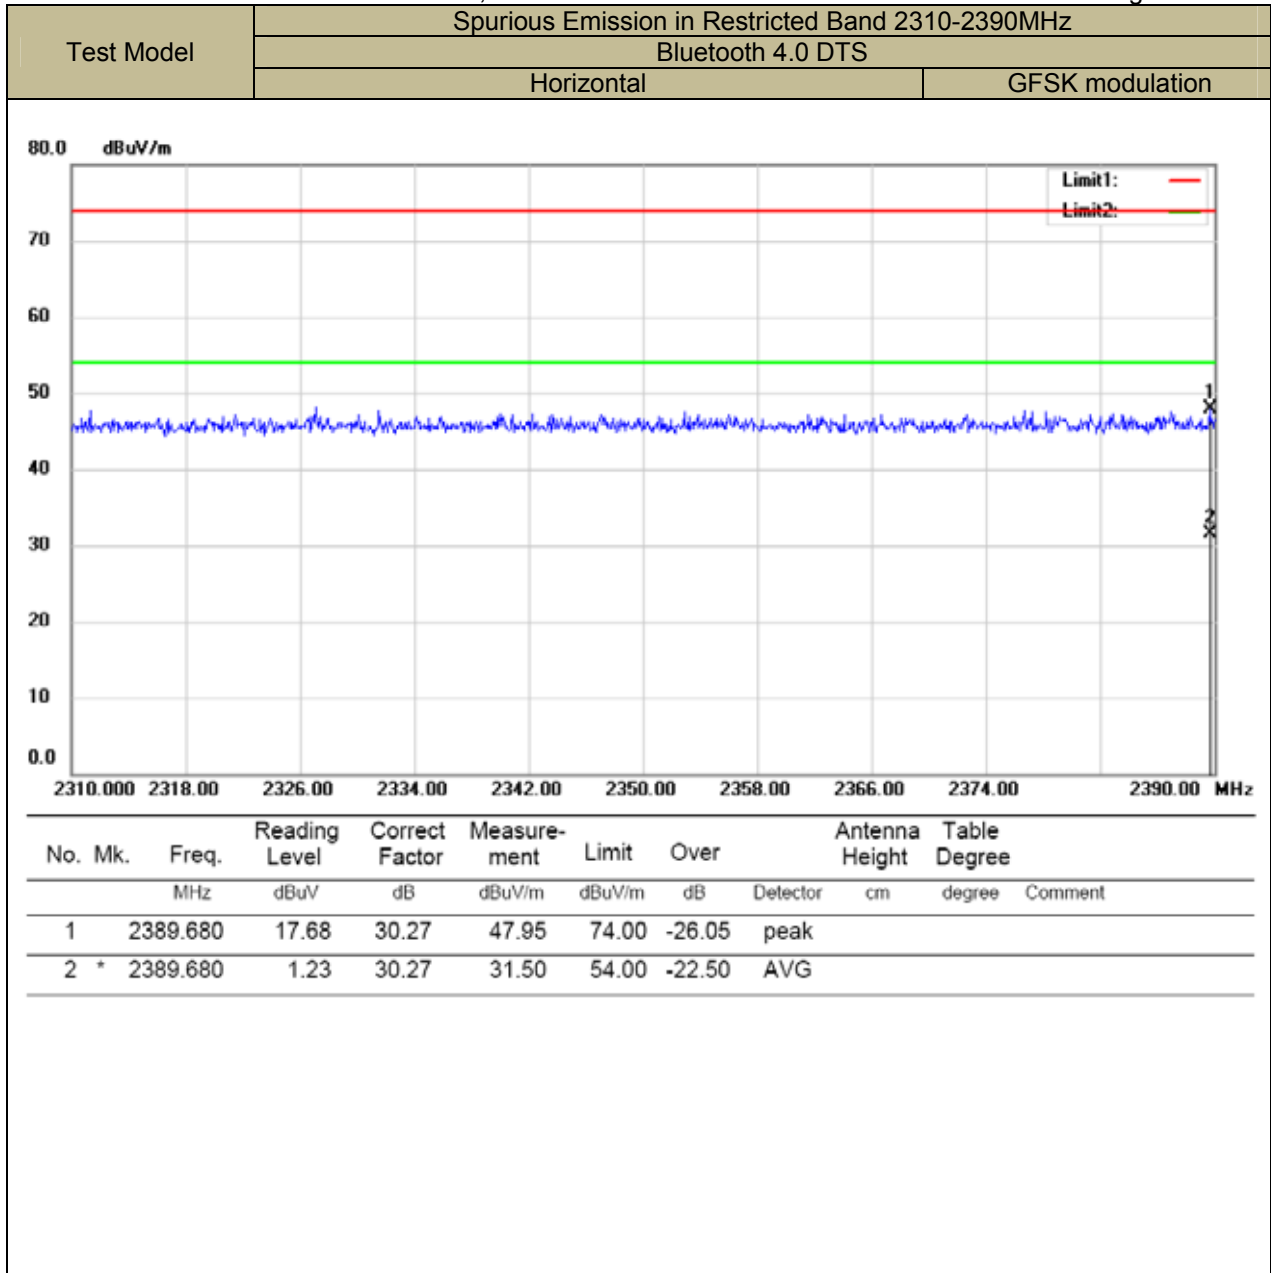


Test Model	Spurious Emission in Restricted Band 2310-2390MHz	
	Bluetooth 4.0 DTS	
	Vertical	GFSK modulation

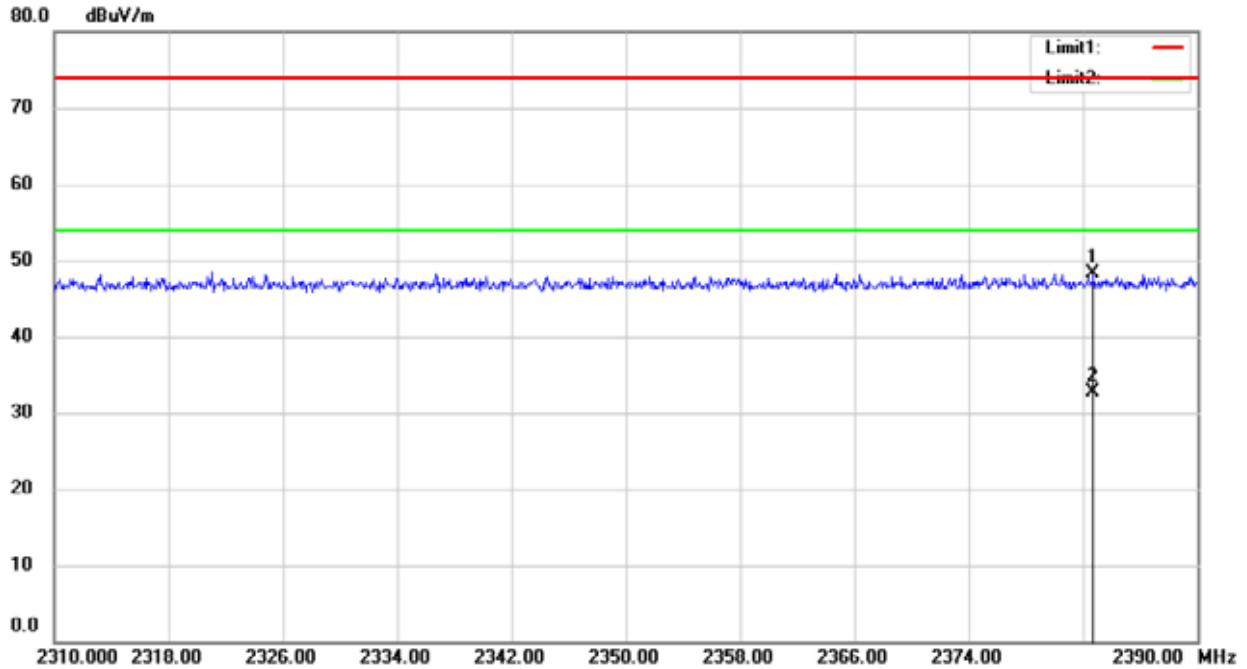


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		2382.720	18.10	30.24	48.34	74.00	-25.66	peak		
2	*	2382.720	2.46	30.24	32.70	54.00	-21.30	AVG		

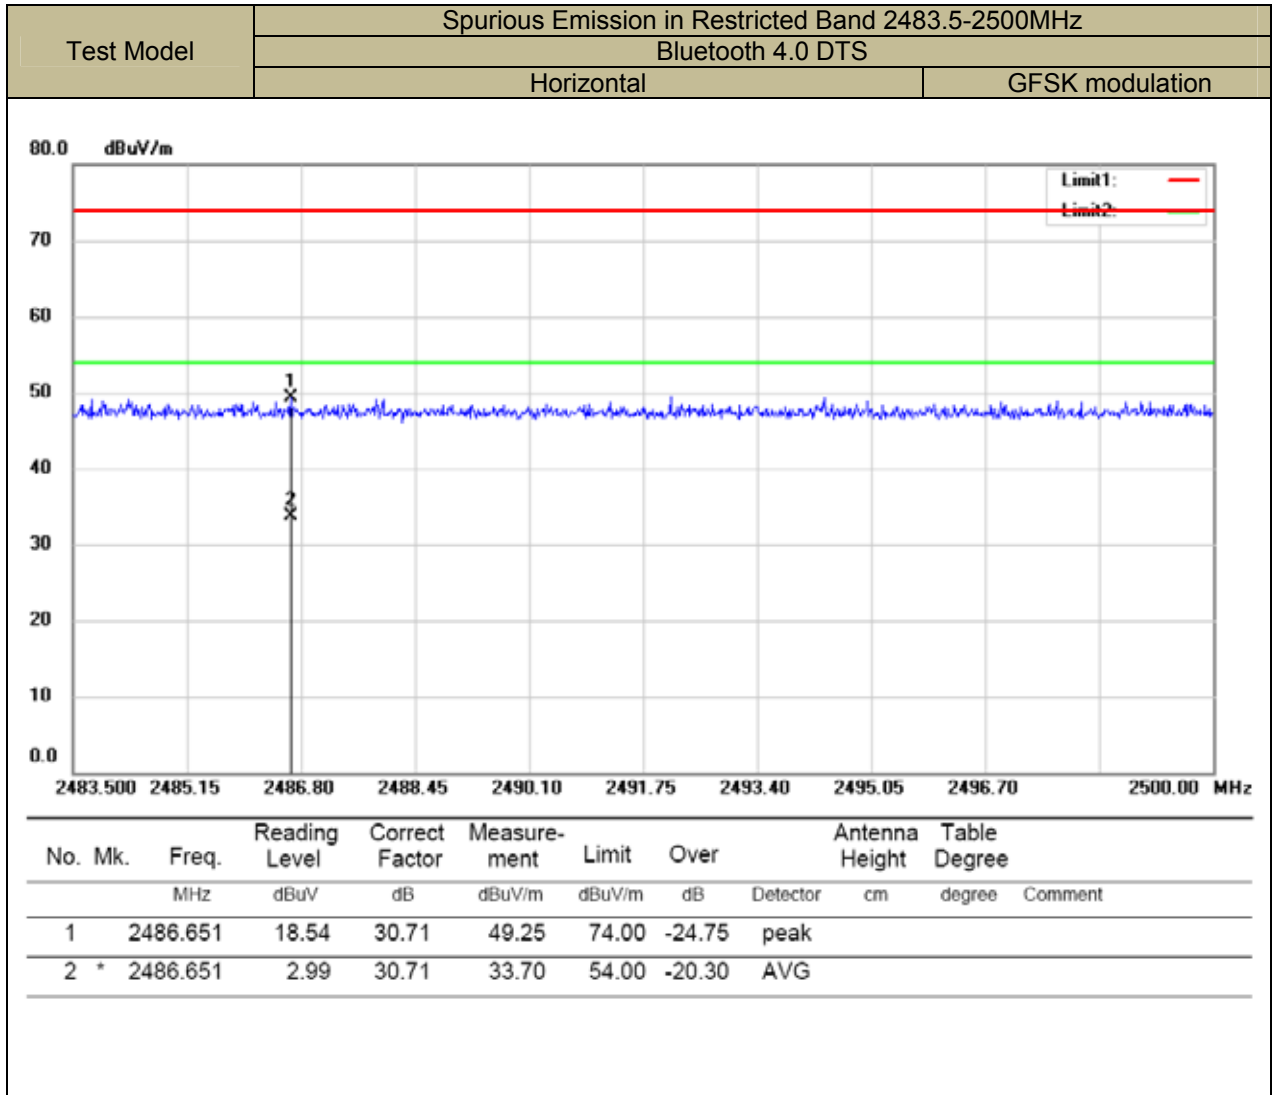

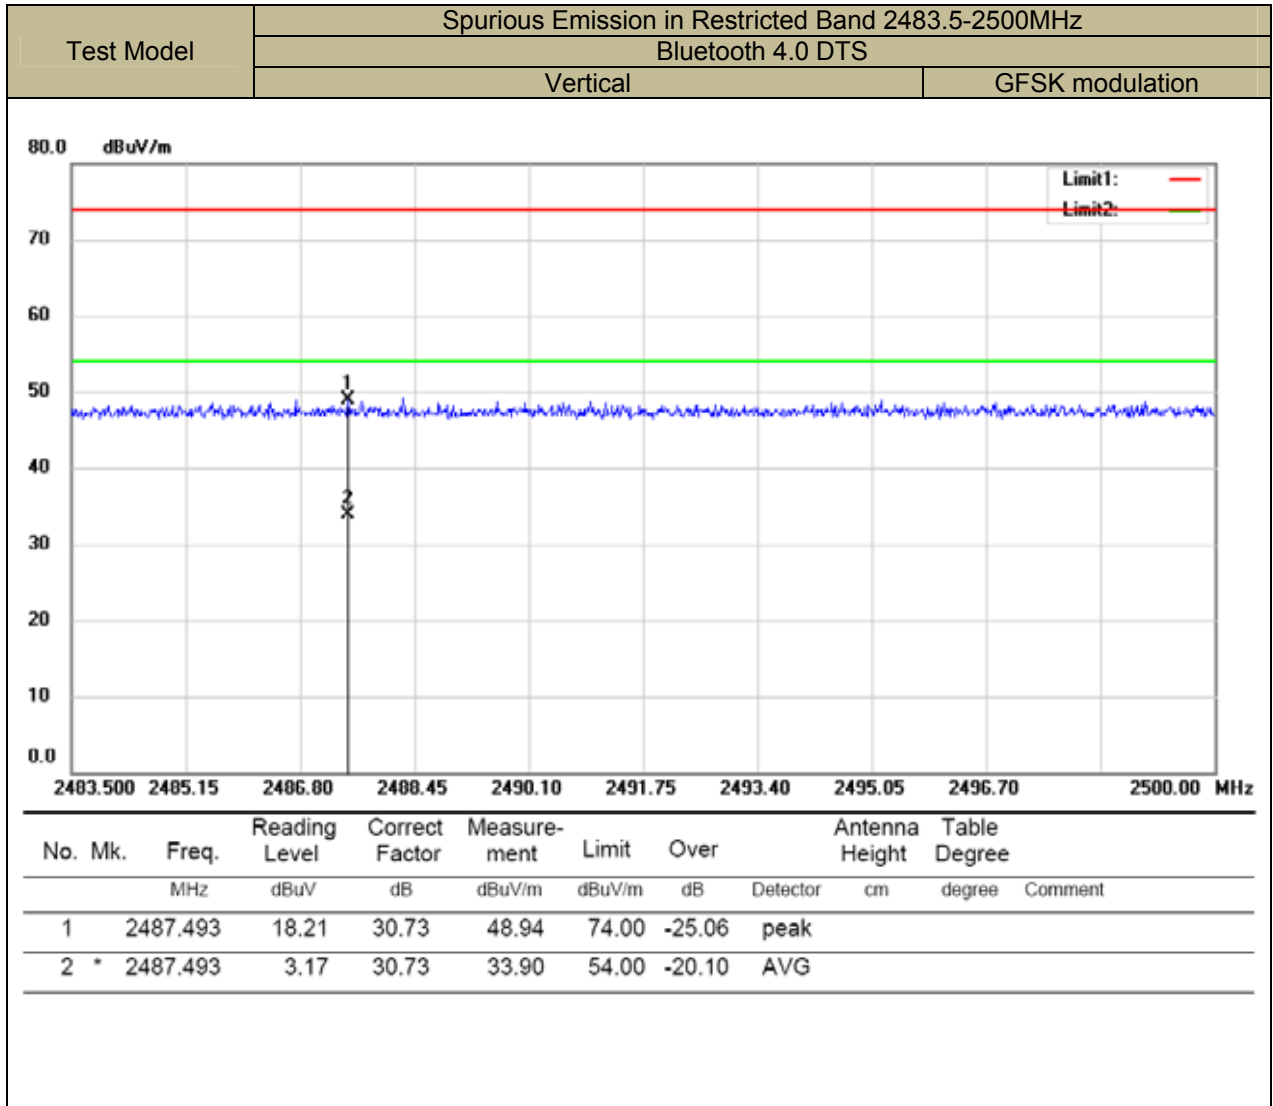

■ Spurious Emission below 1GHz (30MHz to 1GHz)
Bluetooth 4.0 DTS mode&120V&240V have been tested, and the worst result was report as below:

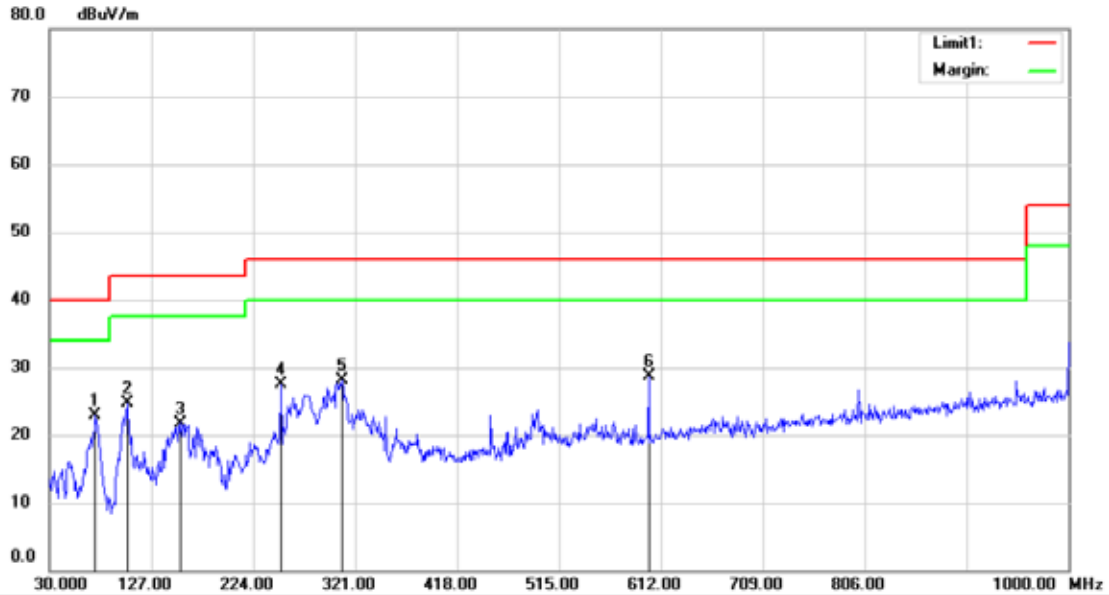


Site 3m Chamber #3
Limit: (RE)FCC PART 15 C
Mode:TX BT 4.0 LOW Channel
Note:
Polarization: *Horizontal*
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	73.6500	41.51	-18.62	22.89	40.00	-17.11			QP	
2		103.7200	39.94	-15.30	24.64	43.50	-18.86			QP	
3		154.1600	40.45	-18.65	21.80	43.50	-21.70			QP	
4		250.1900	41.02	-13.46	27.56	46.00	-18.44			QP	
5		308.3900	39.59	-11.49	28.10	46.00	-17.90			QP	
6		600.3600	34.60	-5.85	28.75	46.00	-17.25			QP	

*:Maximum data x:Over limit !:over margin

Operator: KK

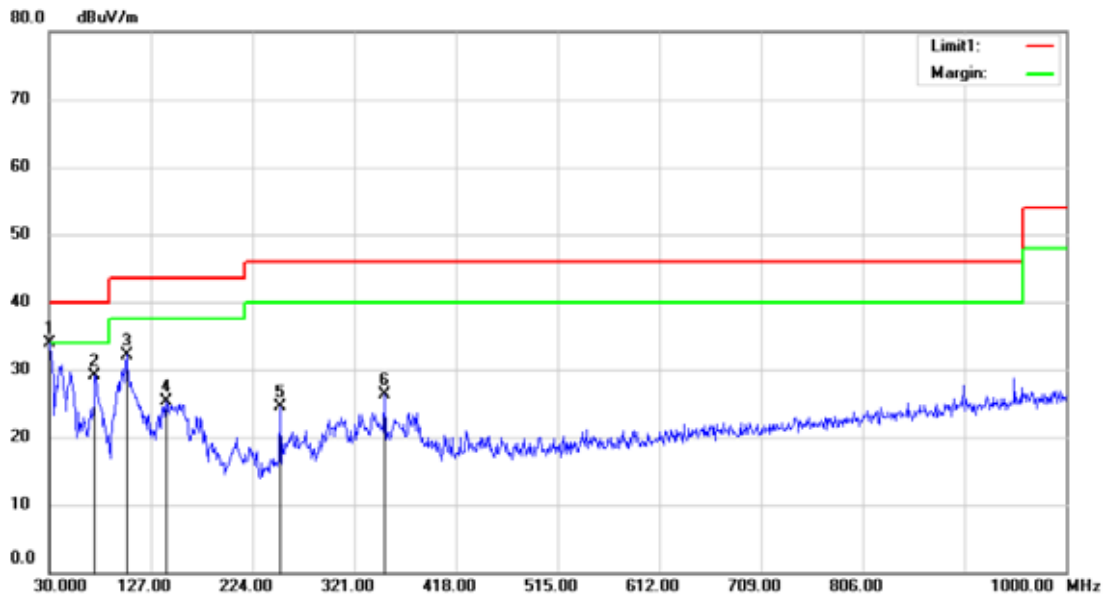


Site: 3m Chamber #3 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 Mode: TX BT 4.0 LOW Channel
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	30.0000	51.36	-17.48	33.88	40.00	-6.12	QP		
2		73.6500	47.70	-18.62	29.08	40.00	-10.92	QP		
3		103.7200	47.50	-15.30	32.20	43.50	-11.30	QP		
4		141.5500	44.42	-19.07	25.35	43.50	-18.15	QP		
5		250.1900	37.97	-13.46	24.51	46.00	-21.49	QP		
6		350.1000	36.71	-10.45	26.26	46.00	-19.74	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

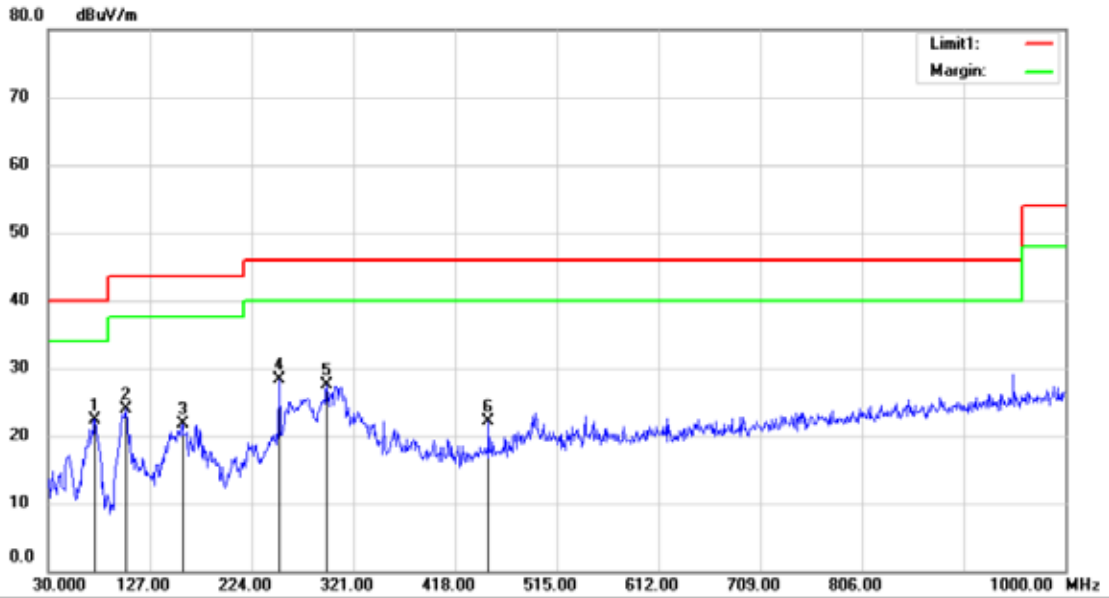


Site 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 Mode:TX BT 4.0 MID Channel
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	74.6200	41.14	-18.80	22.34	40.00	-17.66	QP	
2		104.6900	39.26	-15.32	23.94	43.50	-19.56	QP	
3		158.0400	40.15	-18.47	21.68	43.50	-21.82	QP	
4		250.1900	41.80	-13.46	28.34	46.00	-17.66	QP	
5		295.7800	39.23	-11.78	27.45	46.00	-18.55	QP	
6		450.0100	30.83	-8.78	22.05	46.00	-23.95	QP	

*:Maximum data x:Over limit !:over margin

Operator: KK

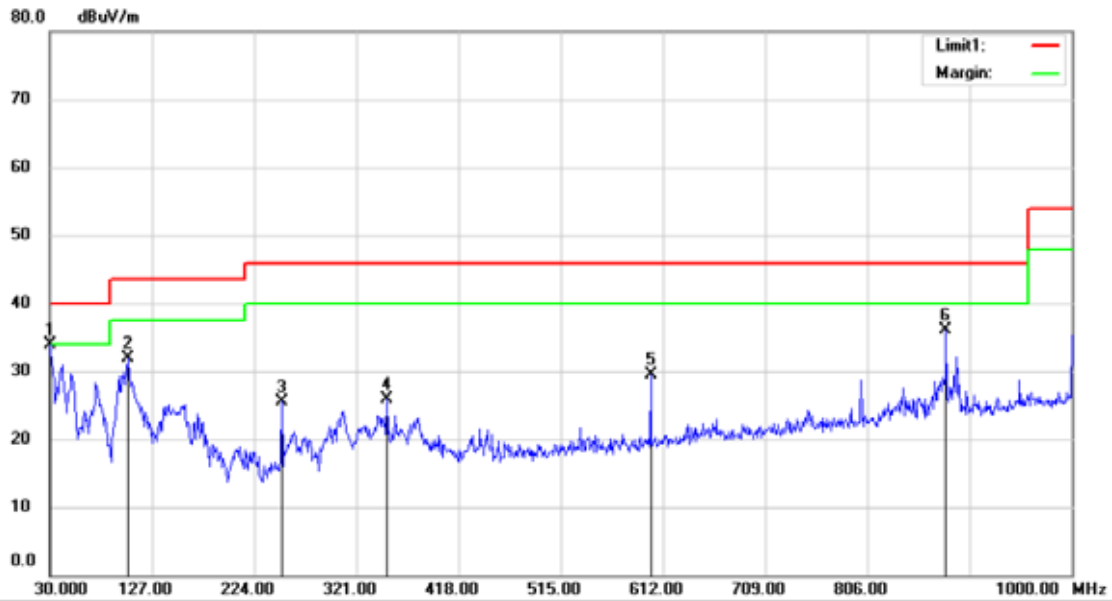


Site: 3m Chamber #3
 Limit: (RE)FCC PART 15 C
 Mode: TX BT 4.0 MID Channel
 Note:

Polarization: *Vertical*
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	51.40	-17.48	33.92	40.00	-6.08	QP		
2		104.6900	47.24	-15.32	31.92	43.50	-11.58	QP		
3		250.1900	38.88	-13.46	25.42	46.00	-20.58	QP		
4		350.1000	36.42	-10.45	25.97	46.00	-20.03	QP		
5		600.3600	35.34	-5.85	29.49	46.00	-16.51	QP		
6		880.6900	37.93	-1.80	36.13	46.00	-9.87	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

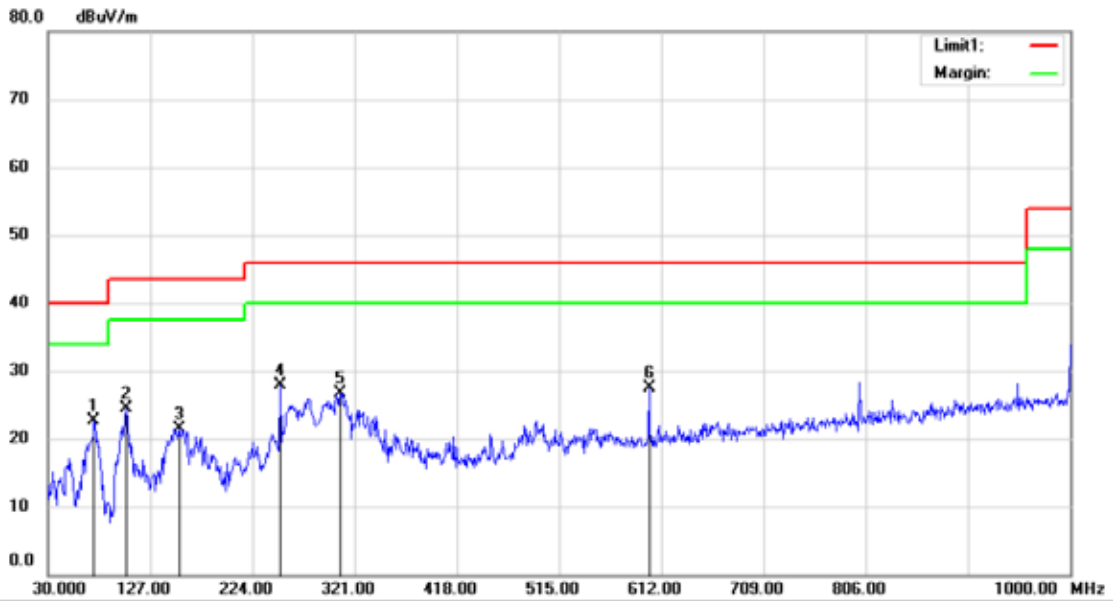


Site 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 Mode:TX BT 4.0 HIGH Channel
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Table	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	73.6500	41.25	-18.62	22.63	40.00	-17.37	QP		
2		104.6900	39.84	-15.32	24.52	43.50	-18.98	QP		
3		154.1600	40.24	-18.65	21.59	43.50	-21.91	QP		
4		250.1900	41.28	-13.46	27.82	46.00	-18.18	QP		
5		307.4200	38.15	-11.51	26.64	46.00	-19.36	QP		
6		600.3600	33.29	-5.85	27.44	46.00	-18.56	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

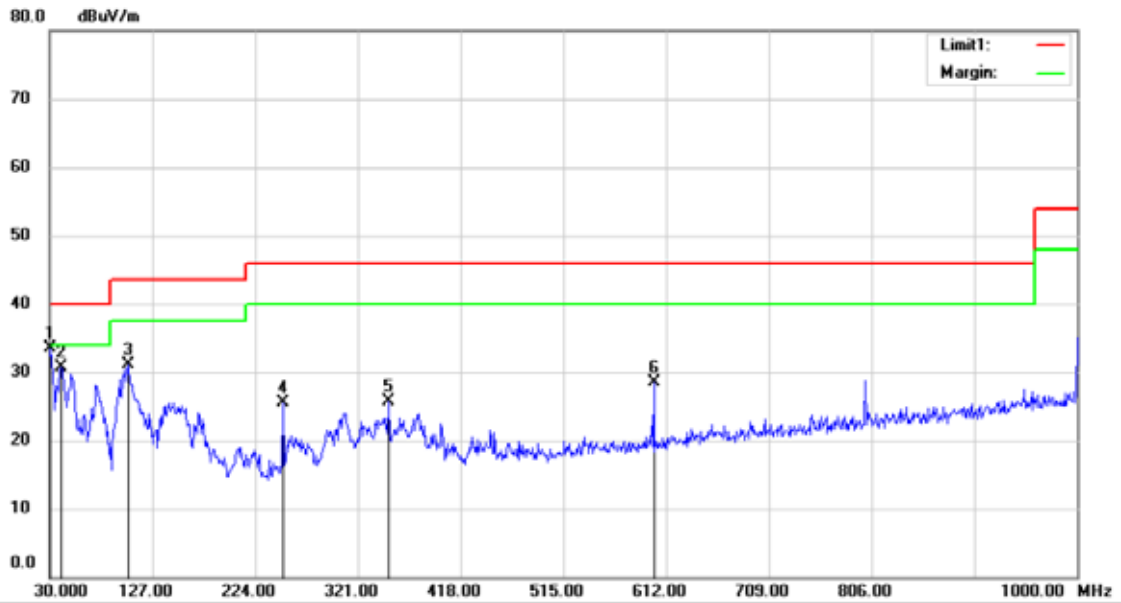

Site 3m Chamber #3 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 Mode:TX BT 4.0 HIGH Channel
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	51.01	-17.48	33.53	40.00	-6.47	QP		
2		40.6700	46.06	-15.34	30.72	40.00	-9.28	QP		
3		103.7200	46.44	-15.30	31.14	43.50	-12.36	QP		
4		250.1900	38.93	-13.46	25.47	46.00	-20.53	QP		
5		350.1000	36.16	-10.45	25.71	46.00	-20.29	QP		
6		600.3600	34.27	-5.85	28.42	46.00	-17.58	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

8.6 CONDUCTED EMISSIONS TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration


Test according to clause 7.3 conducted emission test setup

8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.
 Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

PASS.

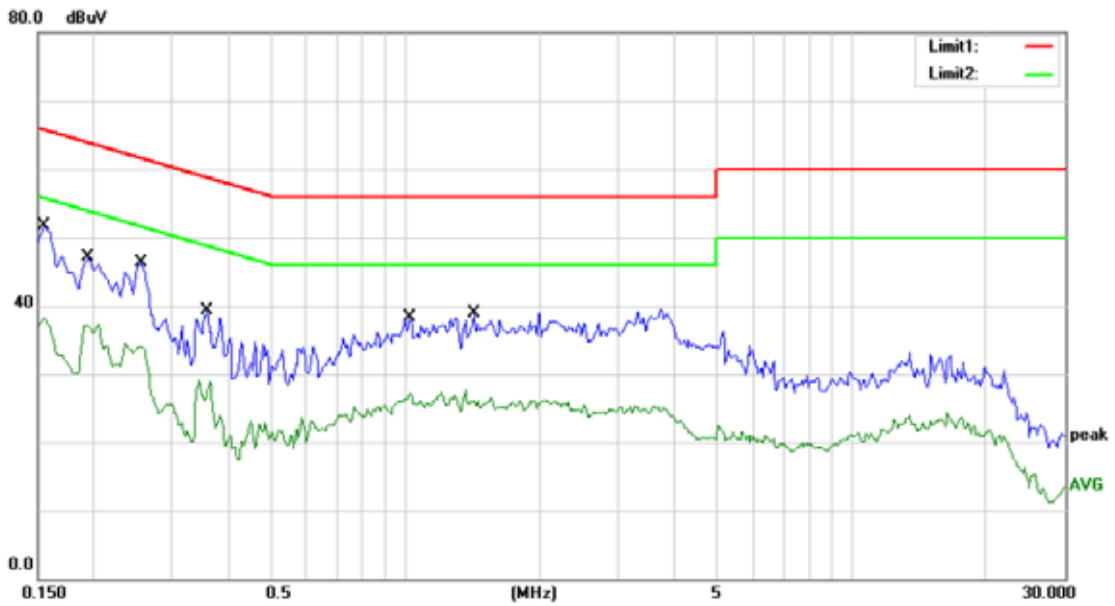


Site Conduction #1
 Limit: (CE)FCC PART15 C
 Mode: WIFI+BT ON
 Note:

Phase: **L1**
 Power: AC 120V/60Hz

Temperature: 26
 Humidity: 60 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1550	51.63	0.00	51.63	65.73	-14.10	QP	
2		0.1550	38.29	0.00	38.29	55.73	-17.44	AVG	
3		0.1950	47.17	0.00	47.17	63.82	-16.65	QP	
4		0.1950	37.40	0.00	37.40	53.82	-16.42	AVG	
5		0.2550	46.21	0.00	46.21	61.59	-15.38	QP	
6		0.2550	34.41	0.00	34.41	51.59	-17.18	AVG	
7		0.3600	39.29	0.00	39.29	58.73	-19.44	QP	
8		0.3600	29.05	0.00	29.05	48.73	-19.68	AVG	
9		1.0250	38.29	0.00	38.29	56.00	-17.71	QP	
10		1.0250	27.16	0.00	27.16	46.00	-18.84	AVG	
11		1.4250	38.96	0.00	38.96	56.00	-17.04	QP	
12		1.4250	27.70	0.00	27.70	46.00	-18.30	AVG	

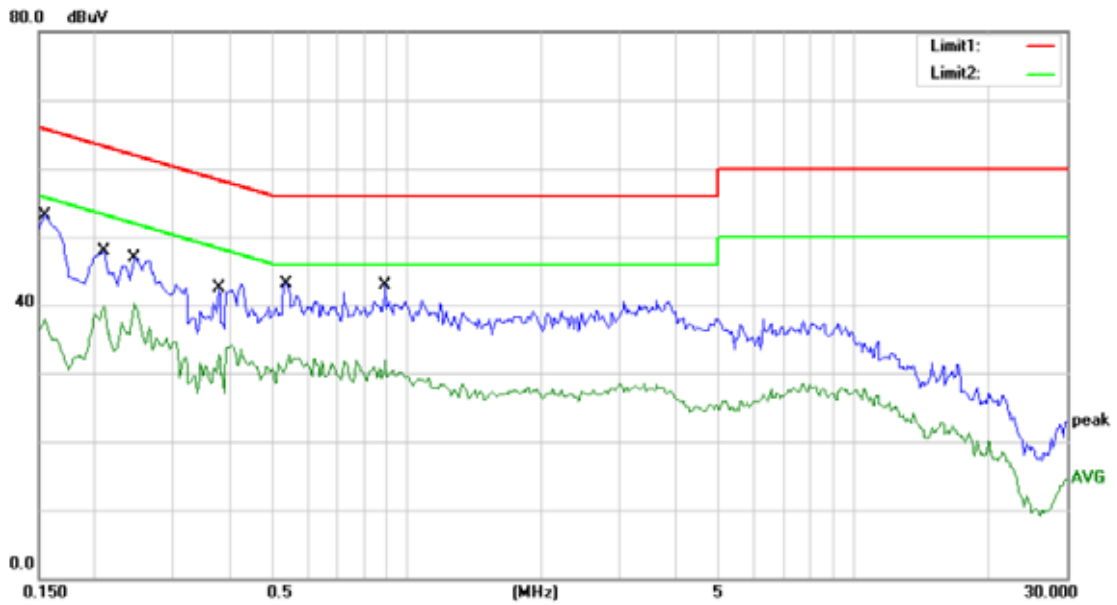

Site Conduction #1

Phase: **N**

Temperature: 26

Limit: (CE)FCC PART15 C


Power: AC 120V/60Hz

Humidity: 60 %

Mode: WIFI+BT ON


Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1550	53.20	0.00	53.20	65.73	-12.53	QP	
2		0.1550	37.81	0.00	37.81	55.73	-17.92	AVG	
3		0.2100	47.91	0.00	47.91	63.21	-15.30	QP	
4		0.2100	39.87	0.00	39.87	53.21	-13.34	AVG	
5		0.2450	46.92	0.00	46.92	61.92	-15.00	QP	
6	*	0.2450	40.33	0.00	40.33	51.92	-11.59	AVG	
7		0.3800	42.42	0.00	42.42	58.28	-15.86	QP	
8		0.3800	34.01	0.00	34.01	48.28	-14.27	AVG	
9		0.5400	43.13	0.00	43.13	56.00	-12.87	QP	
10		0.5450	32.67	0.00	32.67	46.00	-13.33	AVG	
11		0.8950	42.82	0.00	42.82	56.00	-13.18	QP	
12		0.8950	31.81	0.00	31.81	46.00	-14.19	AVG	

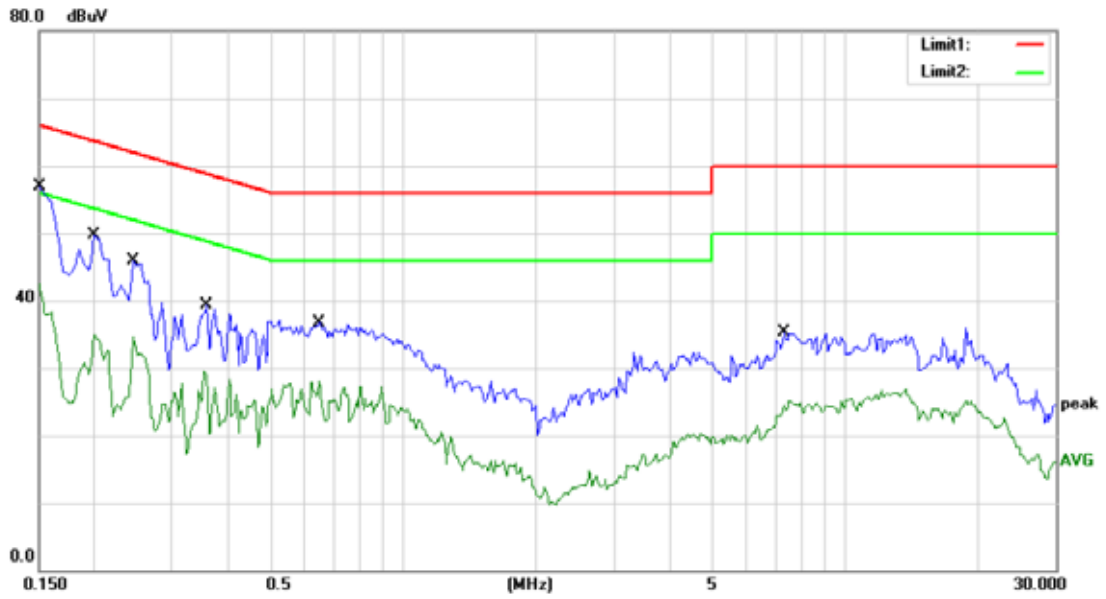

Site Conduction #1 Phase: **L1** Temperature: 26
 Limit: (CE)FCC part 15 C Power: AC 240V/50Hz Humidity: 60 %
 Mode: WIFI+BT ON
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	56.87	0.00	56.87	66.00	-9.13	QP	
2		0.1500	42.59	0.00	42.59	56.00	-13.41	AVG	
3		0.2000	49.68	0.00	49.68	63.61	-13.93	QP	
4		0.2000	34.93	0.00	34.93	53.61	-18.68	AVG	
5		0.2450	45.87	0.00	45.87	61.92	-16.05	QP	
6		0.2450	34.75	0.00	34.75	51.92	-17.17	AVG	
7		0.3600	39.23	0.00	39.23	58.73	-19.50	QP	
8		0.3600	29.43	0.00	29.43	48.73	-19.30	AVG	
9		0.6450	36.77	0.00	36.77	56.00	-19.23	QP	
10		0.6450	28.13	0.00	28.13	46.00	-17.87	AVG	
11		7.2700	35.30	0.00	35.30	60.00	-24.70	QP	
12		7.2700	25.09	0.00	25.09	50.00	-24.91	AVG	

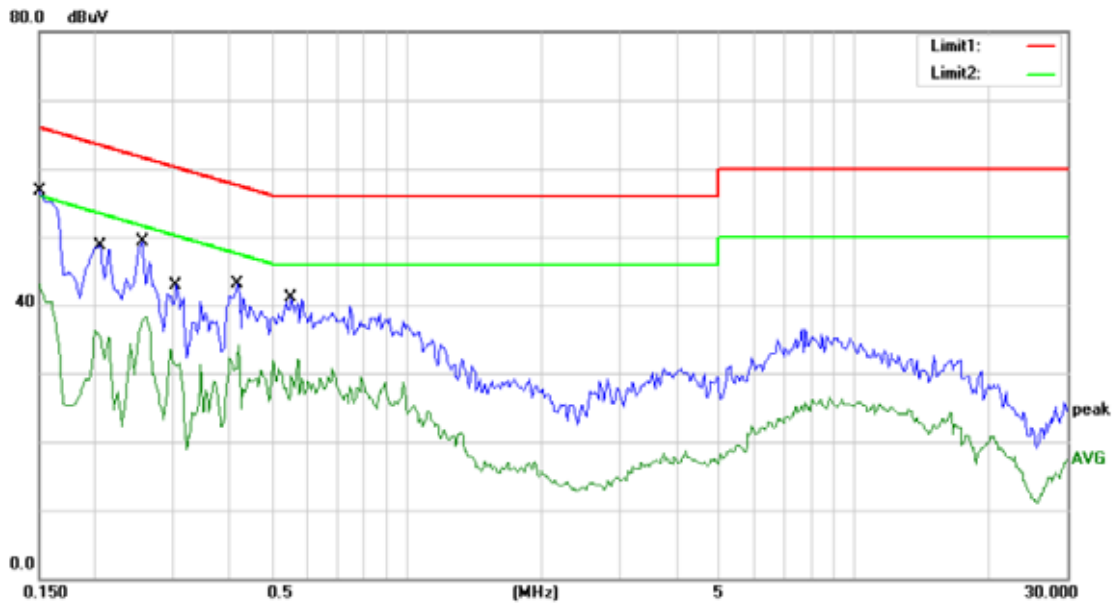

Site Conduction #1 Phase: **N** Temperature: 26
 Limit: (CE)FCC part 15 C Power: AC 240V/50Hz Humidity: 60 %
 Mode: WIFI+BT ON
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	56.64	0.00	56.64	66.00	-9.36	QP	
2		0.1500	43.18	0.00	43.18	56.00	-12.82	AVG	
3		0.2050	48.72	0.00	48.72	63.41	-14.69	QP	
4		0.2050	36.25	0.00	36.25	53.41	-17.16	AVG	
5		0.2550	49.31	0.00	49.31	61.59	-12.28	QP	
6		0.2550	38.39	0.00	38.39	51.59	-13.20	AVG	
7		0.3050	42.92	0.00	42.92	60.11	-17.19	QP	
8		0.3050	33.54	0.00	33.54	50.11	-16.57	AVG	
9		0.4150	43.11	0.00	43.11	57.55	-14.44	QP	
10		0.4150	34.18	0.00	34.18	47.55	-13.37	AVG	
11		0.5500	41.10	0.00	41.10	56.00	-14.90	QP	
12		0.5500	32.05	0.00	32.05	46.00	-13.95	AVG	

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

There are two antennas for the product:



- a. BT antenna: FPC antenna/1.72dBi
- b. WIFI antenna: FPC antenna/3.02dBi


The two antennas can't be replaced by the user, which in accordance to section 15.203, please refer to the internal photos.


8.8 APPENDIX (PHOTOS OF EUT)








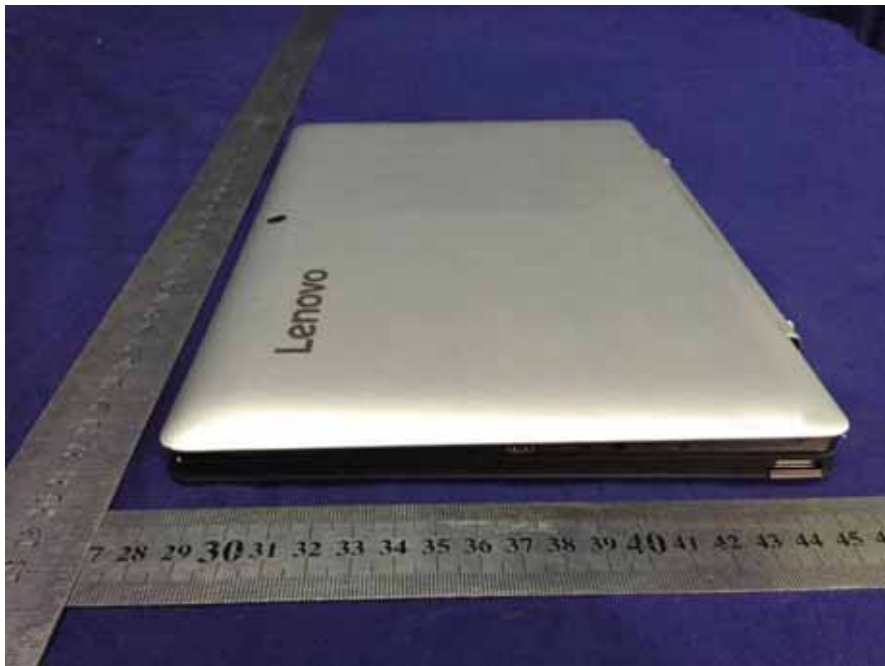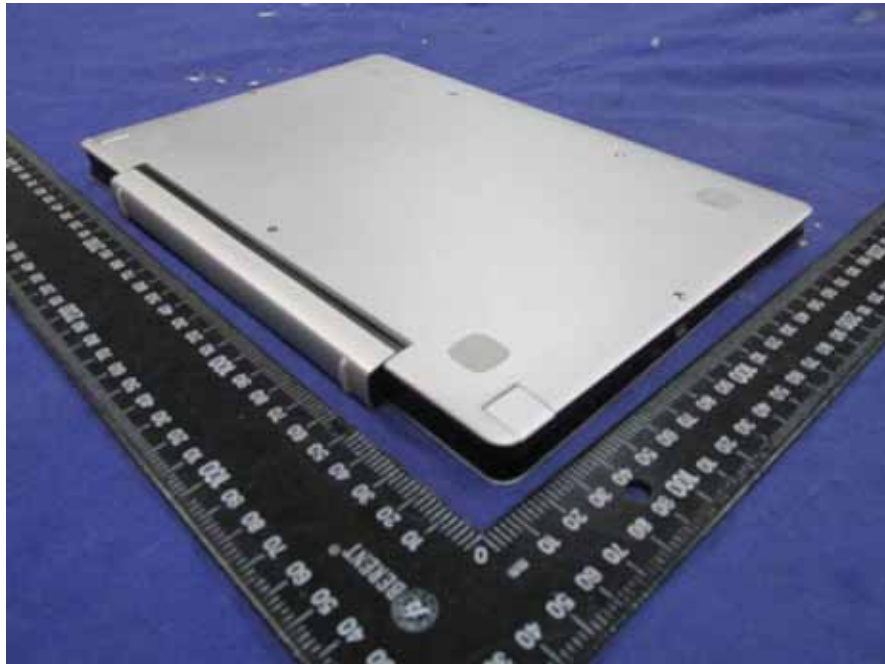


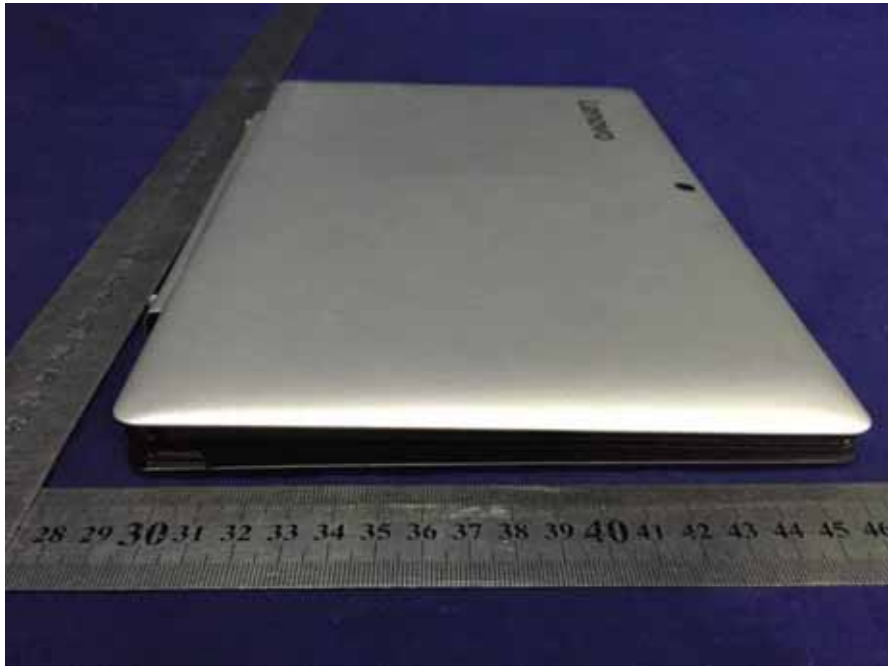

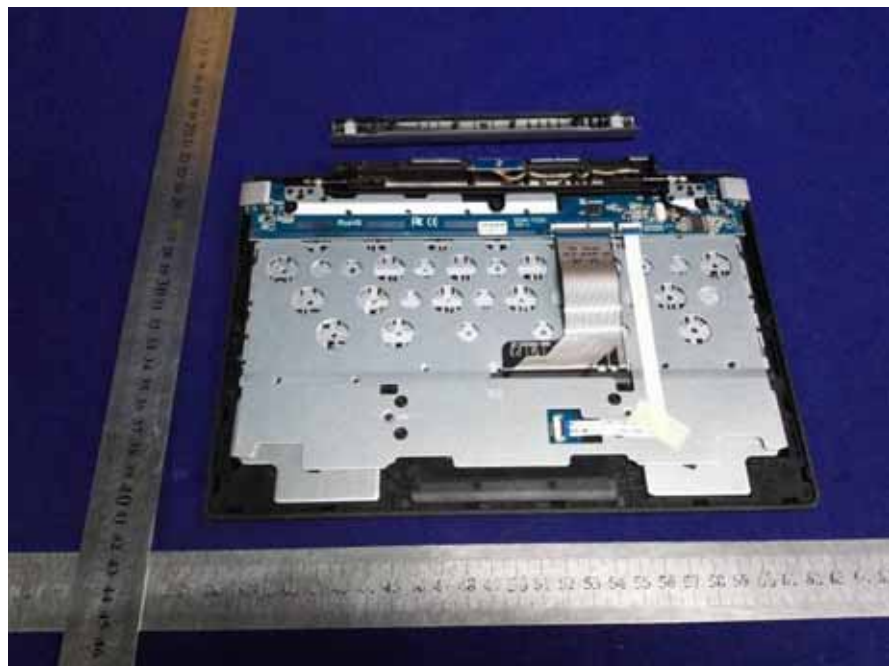

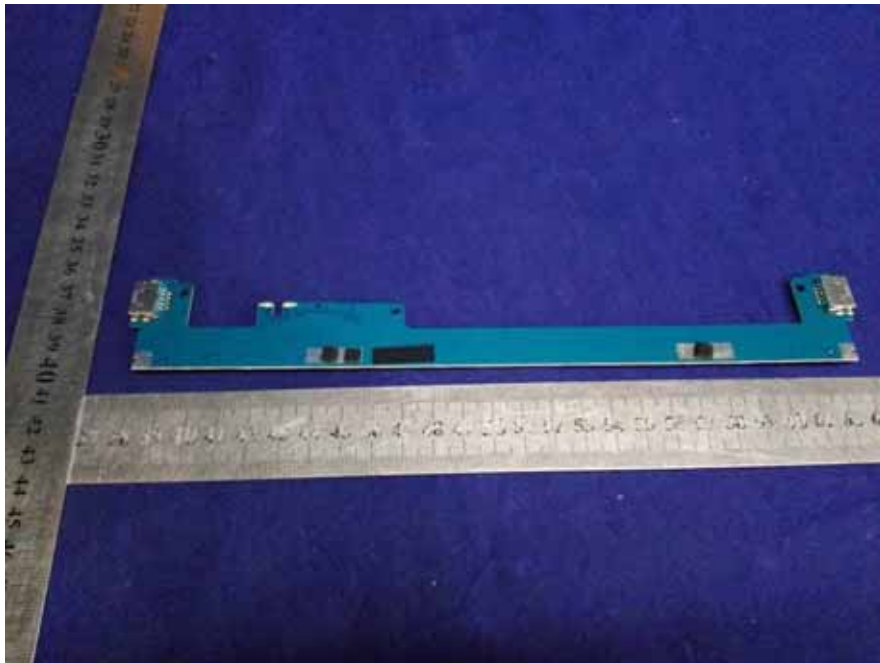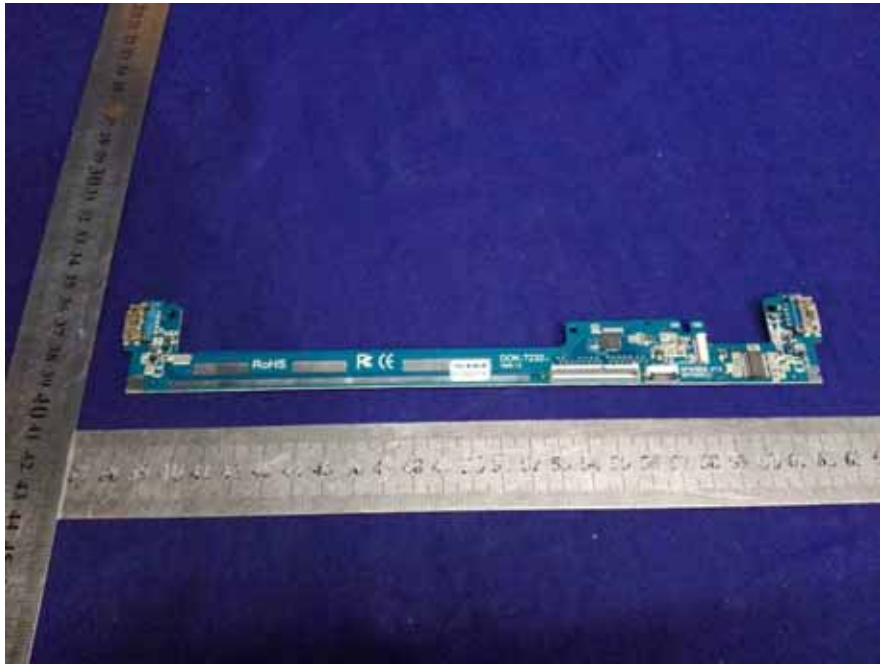


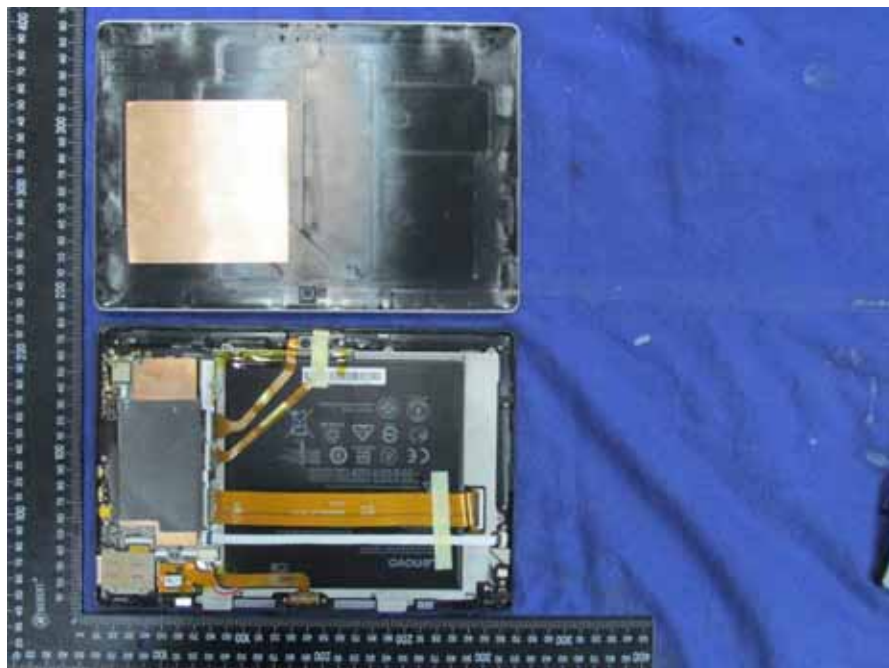


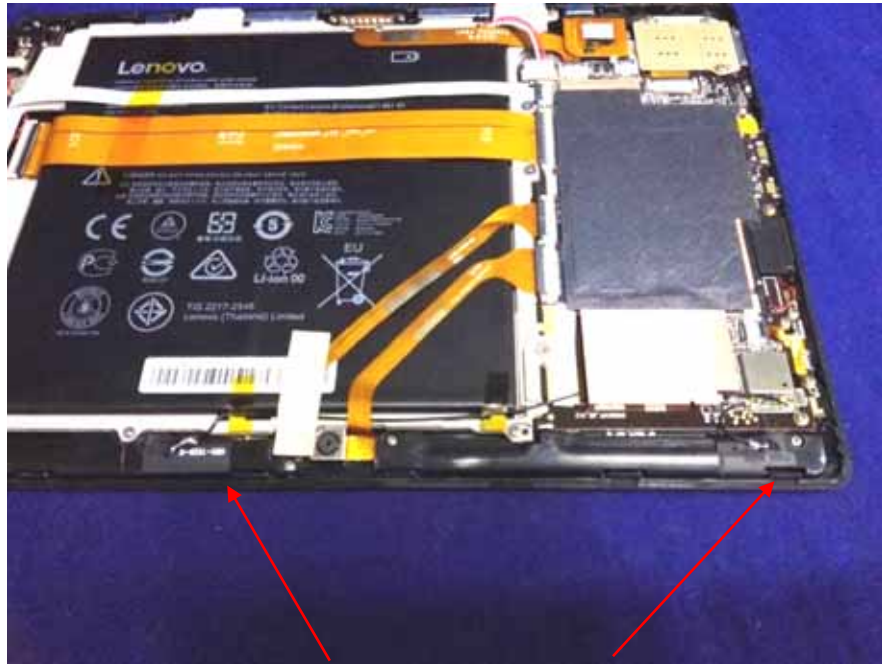


WIFI ANTENNA


BT ANTENNA



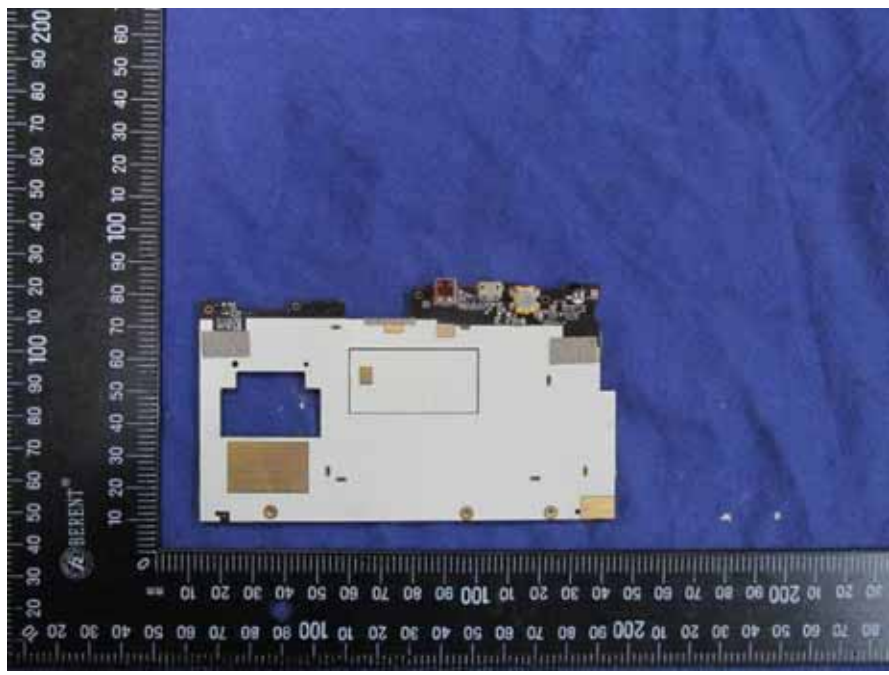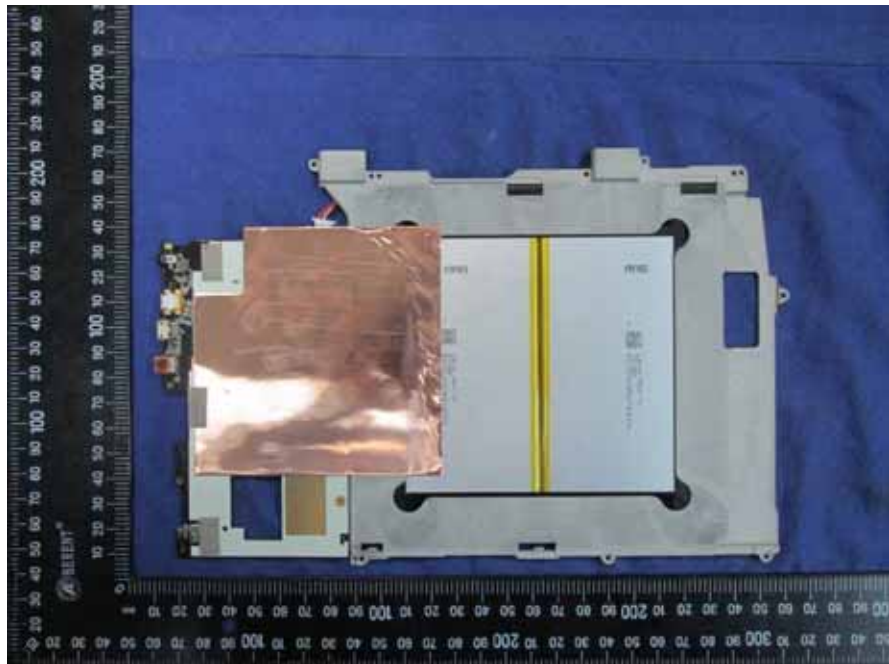

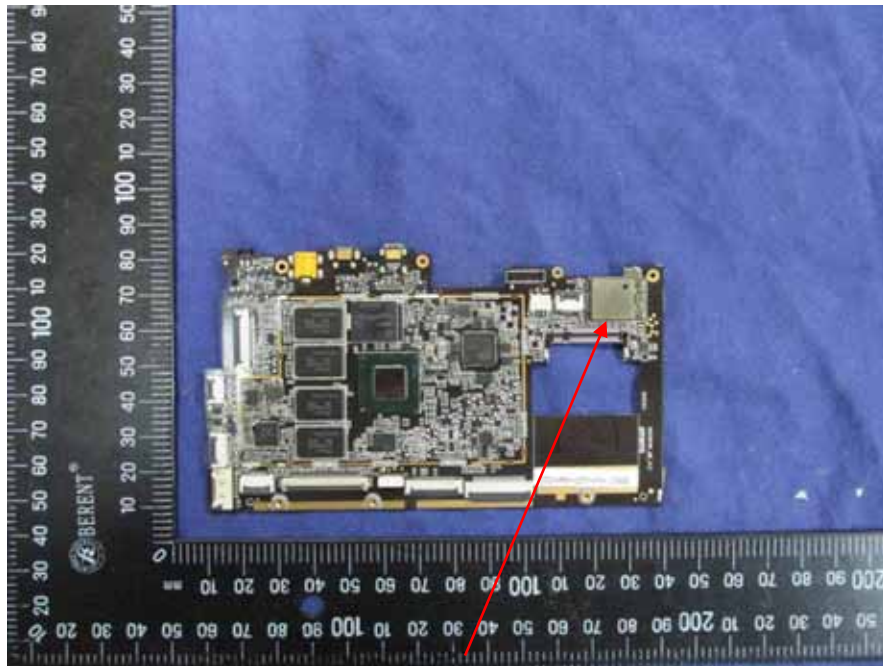

WIFI+BT Module

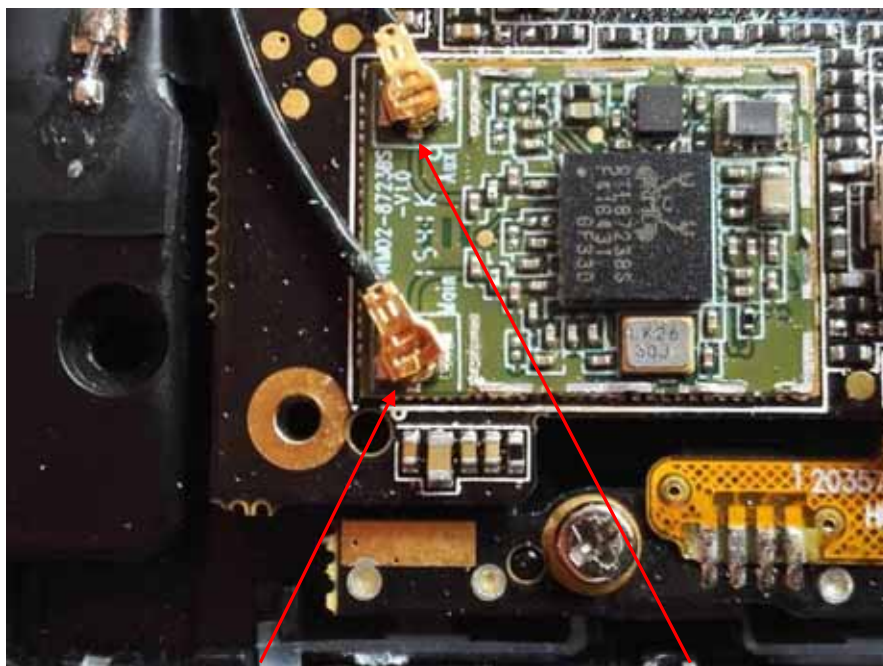

WIFI antenna port

BT antenna port



BT Antenna



WIFI Antenna

END OF REPORT