

**FCC 47 CFR PART 15 SUBPART C**

**CERTIFICATION TEST REPORT**

*For*

nextbook

Model No.: NXA101LTE116

FCC ID: S7JNXA101LTE116

Trademark: N/A

REPORT NO.: ES150110114E3

ISSUE DATE: March 13, 2015

*Prepared for*

SHENZHEN YIFANG DIGITAL TECHNOLOGY CO., LTD.

Building NO.22,23, Fifth Region, Baiwangxin Industrial Park, Songbai Rd., Nanshan,  
Shenzhen518108, China

*Prepared by*

SHENZHEN EMTEK CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,  
Guangdong, China

TEL: 86-755-26954280

FAX: 86-755-26954282

**TABLE OF CONTENTS**

**1 TEST RESULT CERTIFICATION .....3**

**2 EUT TECHNICAL DESCRIPTION .....4**

**3 SUMMARY OF TEST RESULT .....6**

**4 TEST METHODOLOGY .....7**

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS .....7

4.2 MEASUREMENT EQUIPMENT USED .....7

4.3 DESCRIPTION OF TEST MODES .....8

**5 FACILITIES AND ACCREDITATIONS .....9**

5.1 FACILITIES .....9

5.2 LABORATORY ACCREDITATIONS AND LISTINGS .....9

**6 TEST SYSTEM UNCERTAINTY .....10**

**7 SETUP OF EQUIPMENT UNDER TEST .....11**

7.1 RADIO FREQUENCY TEST SETUP 1 .....11

7.2 RADIO FREQUENCY TEST SETUP 2 .....11

7.3 CONDUCTED EMISSION TEST SETUP .....12

7.4 SUPPORT EQUIPMENT .....12

**8 TEST REQUIREMENTS .....13**

8.1 DTS (6DB) BANDWIDTH .....13

8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER .....20

8.3 MAXIMUM POWER SPECTRAL DENSITY .....21

8.4 UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS .....28

8.5 RADIATED SPURIOUS EMISSION .....33

8.6 CONDUCTED EMISSION TEST .....58

**1 TEST RESULT CERTIFICATION**

Applicant: SHENZHEN YIFANG DIGITAL TECHNOLOGY CO., LTD.  
Building NO.22,23, Fifth Region, Baiwangxin Industrial Park, Songbai Rd., Nanshan, Shenzhen518108, China

Manufacturer: SHENZHEN YIFANG DIGITAL TECHNOLOGY CO., LTD.  
Building NO.22,23, Fifth Region, Baiwangxin Industrial Park, Songbai Rd., Nanshan, Shenzhen518108, China

Product Description: nextbook

Model Number: NXA101LTE116

File Number: ES150210114E3

Date of Test: February 11, 2015 to March 13, 2015

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2014) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Date of Test : February 11, 2015 to March 13, 2015

*Jack Li*

Prepared by : \_\_\_\_\_

Jack Li /Editor

*Joe Xia*

Reviewer : \_\_\_\_\_

Joe Xia/Supervisor

*[Signature]*

Approve & Authorized Signer : \_\_\_\_\_

Lisa Wang/Manager

## 2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
IEEE 802.11 WLAN Mode Supported:	<input checked="" type="checkbox"/> 802.11b(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11g(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(40MHz channel bandwidth)
Data Rate:	802.11 b:1,2,5.5,11Mbps; 802.11 g:6,9,12,18,24,36,48,54Mbps; 802.11n(HT20):MCS0-MCS7; 802.11n(HT40):MCS0-MCS7;
Modulation:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Operating Frequency Range:	2412-2462MHz for 802.11b/g; 2412-2462MHz for 802.11n(HT20); 2422-2452MHz for 802.11n(HT40);
Number of Channels:	11 channels for 802.11b/g; 11 channels for 802.11n(HT20); 7 channels for 802.11n(HT40);
Transmit Power Max:	8.8dBm for 802.11b; 5.5dBm for 802.11g; 5.4dBm for 802.11n(HT20); 5.3dBm for 802.11n(HT40);
Antenna Type:	PCB Antenna
Antenna Gain:	2dBi
Power supply:	<input checked="" type="checkbox"/> DC supply: DC 3.7V internal rechargeable lithium battery or DC 5V from AC Adapter
	<input checked="" type="checkbox"/> Adapter1 supply: Model: PS18C050K2500UD Input: 100-240V, 50-60Hz, 0.5A Output: DC 5V, 2500mA
	<input checked="" type="checkbox"/> Adapter2 supply: Model: HB13-0502504SPA Input: 100-240V, 50-60Hz, 0.4A Output: DC 5V, 2500mA
Temperature Range:	0°C ~ +40°C

*Note: for more details, please refer to the User's manual of the EUT.*



### 3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	N/A	
NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

## 4 TEST METHODOLOGY

### 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 DTS Meas Guidance v03r02

FCC KDB 662911 D01 Multiple Transmitter Output v01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

### 4.2 MEASUREMENT EQUIPMENT USED

#### 4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/17/2014
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/17/2014
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/17/2014
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/17/2014
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/17/2014

#### 4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/17/2014
Pre-Amplifier	HP	8447D	2944A07999	05/17/2014
Bilog Antenna	Schwarzbeck	VULB9163	142	05/17/2014
Loop Antenna	ARA	PLA-1030/B	1029	05/17/2014
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/17/2014
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/17/2014
Cable	Schwarzbeck	AK9513	ACRX1	05/17/2014
Cable	Rosenberger	N/A	FP2RX2	05/17/2014
Cable	Schwarzbeck	AK9513	CRPX1	05/17/2014
Cable	Schwarzbeck	AK9513	CRRX2	05/17/2014

#### 4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014
Power meter	Anritsu	ML2495A	0824006	05/17/2014
Power sensor	Anritsu	MA2411B	0738172	05/17/2014

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### 4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11b/g/n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Frequency and Channel list for 802.11n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	8	2447
4	2427	6	2437	9	2452
		7	2442		

Test Frequency and Channel for 802.11b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

Test Frequency and channel for 802.11n (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452



## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

- EMC Lab.
- : Accredited by CNAS, 2013.10.29  
The certificate is valid until 2016.10.28  
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)  
The Certificate Registration Number is L2291
  - : Accredited by TUV Rheinland Shenzhen, 2010.5.25  
The Laboratory has been assessed according to the requirements ISO/IEC 17025.
  - : Accredited by FCC, October 28, 2010  
The Certificate Registration Number is 406365.
  - : Accredited by FCC, February 28, 2013  
The Certificate Registration Number is 709623.
  - : Accredited by Industry Canada, May 24, 2008  
The Certificate Registration Number is 4480A-2

## 6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

## 7 SETUP OF EQUIPMENT UNDER TEST

### 7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.




### 7.2 RADIO FREQUENCY TEST SETUP 2


The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.4-2014 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

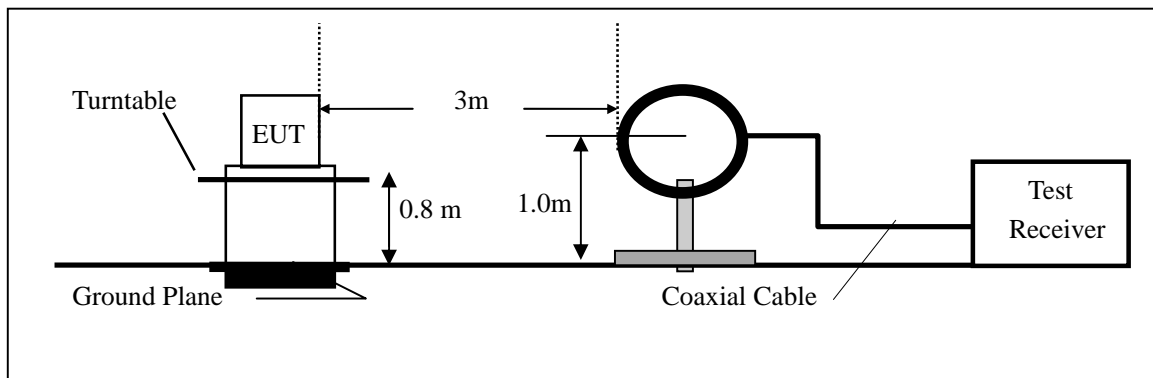

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

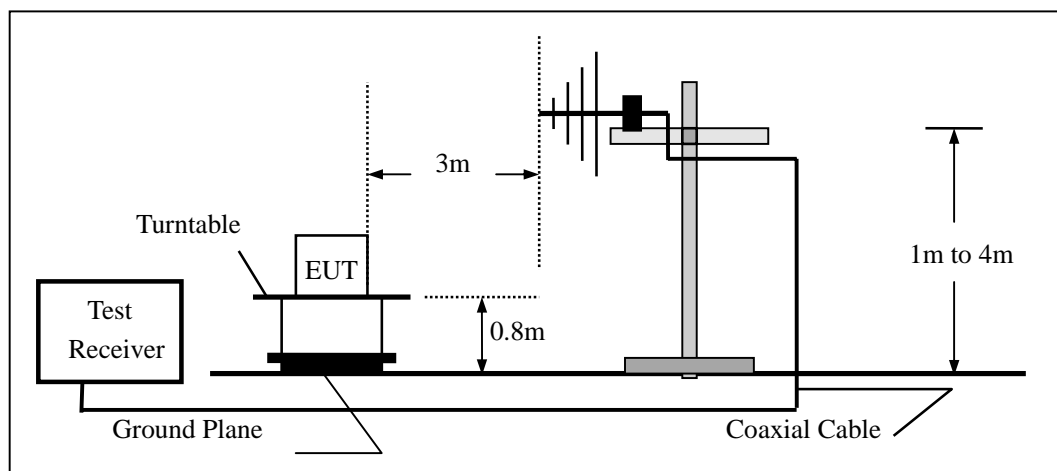

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

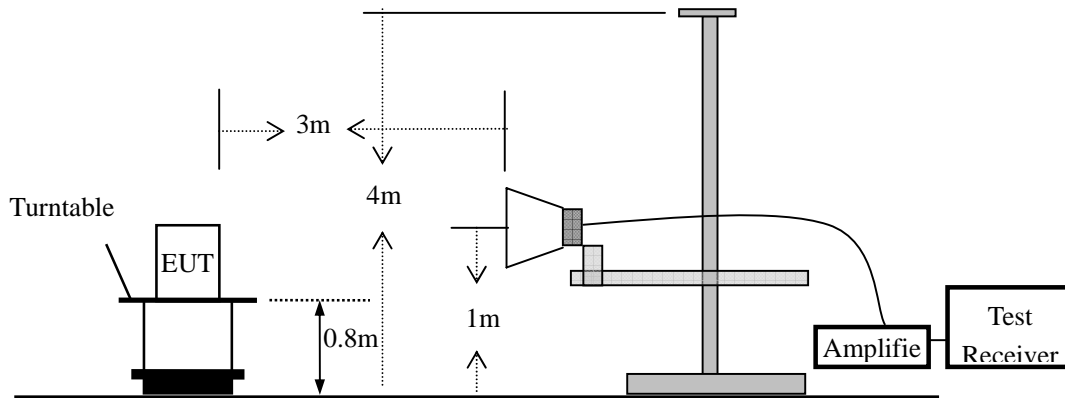


**7.3 CONDUCTED EMISSION TEST SETUP**

The mains cable of the EUT (nextbook) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

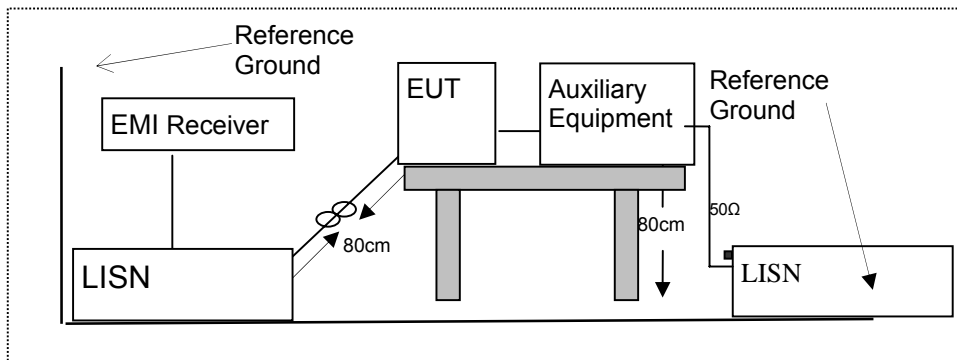

**7.4 SUPPORT EQUIPMENT**

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 8 TEST REQUIREMENTS

### 8.1 DTS (6DB) BANDWIDTH

#### 8.1.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v03r02

#### 8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

#### 8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

#### 8.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300 kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.


#### 8.1.5 Test Results

Temperature: 24°C  
Humidity: 53 %

Test Date: February 13, 2015  
Test By: KING KONG

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)	Limit (kHz)	Verdict
802.11b	1	2412	10.071	500	PASS
	6	2437	10.044	500	PASS
	11	2462	10.038	500	PASS
802.11g	1	2412	16.585	500	PASS
	6	2437	16.524	500	PASS
	11	2462	16.588	500	PASS
802.11n (HT20)	1	2412	17.845	500	PASS
	6	2437	17.848	500	PASS
	11	2462	17.800	500	PASS
802.11n (HT40)	3	2422	36.595	500	PASS
	6	2437	36.591	500	PASS
	9	2452	36.573	500	PASS


Test Model	DTS (6dB) Bandwidth
	802.11b
	Channel 1: 2412MHz

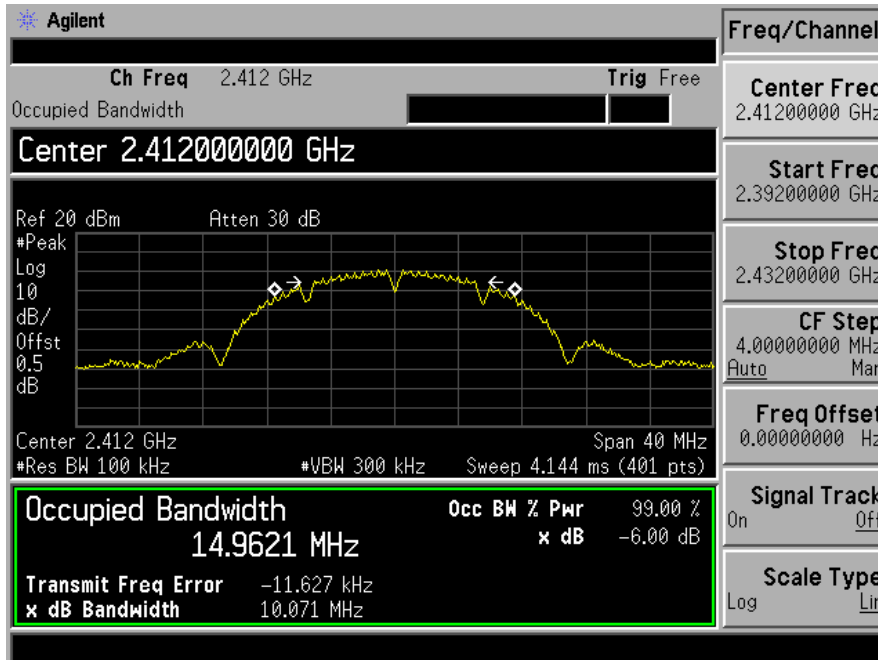


Test Model	DTS (6dB) Bandwidth
	802.11b
	Channel 6: 2437MHz




Test Model	DTS (6dB) Bandwidth
	802.11b
	Channel 11: 2462MHz

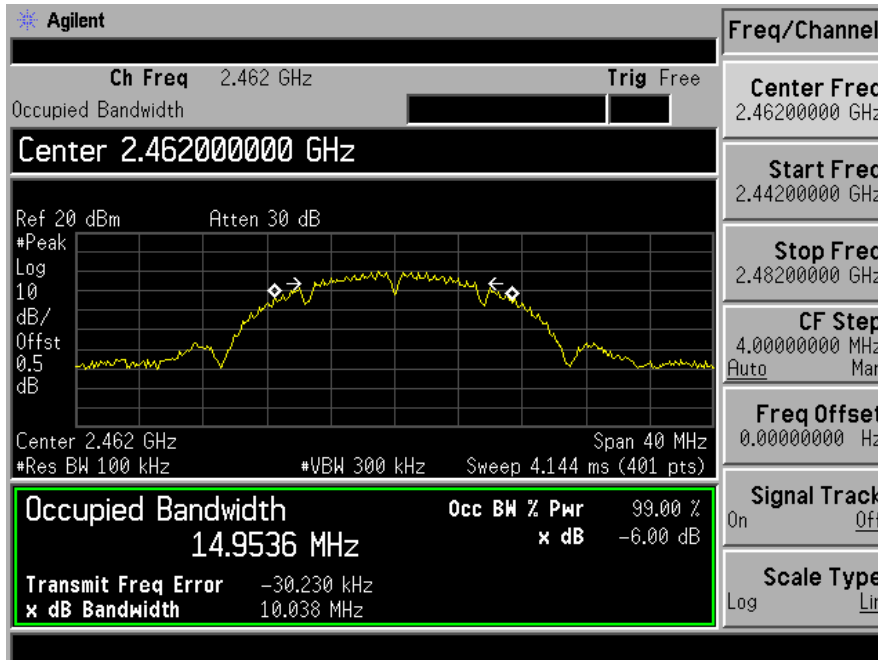


Test Model	DTS (6dB) Bandwidth
	802.11g
	Channel 1: 2412MHz

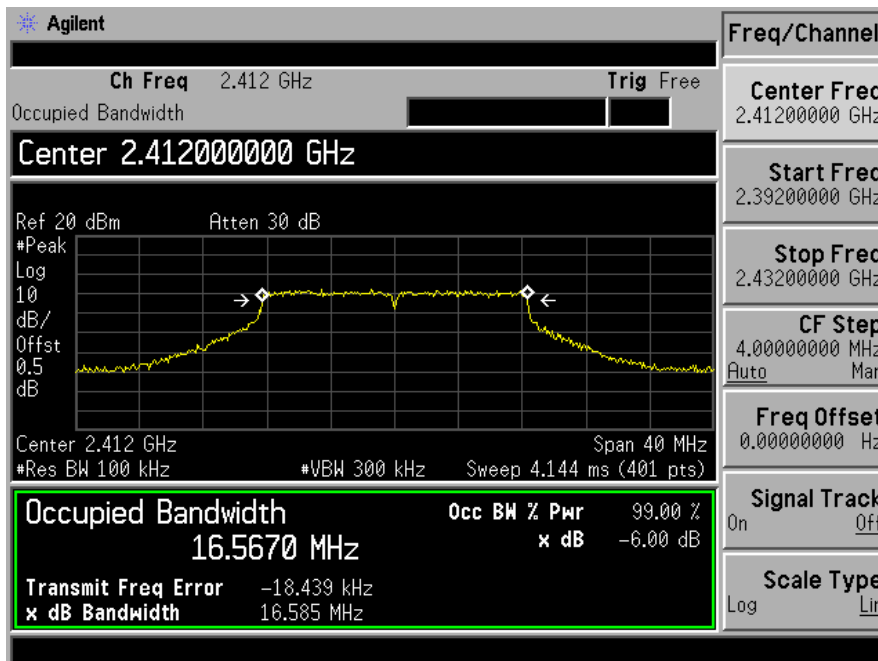

Test Model	DTS (6dB) Bandwidth
	802.11g
	Channel 6: 2437MHz

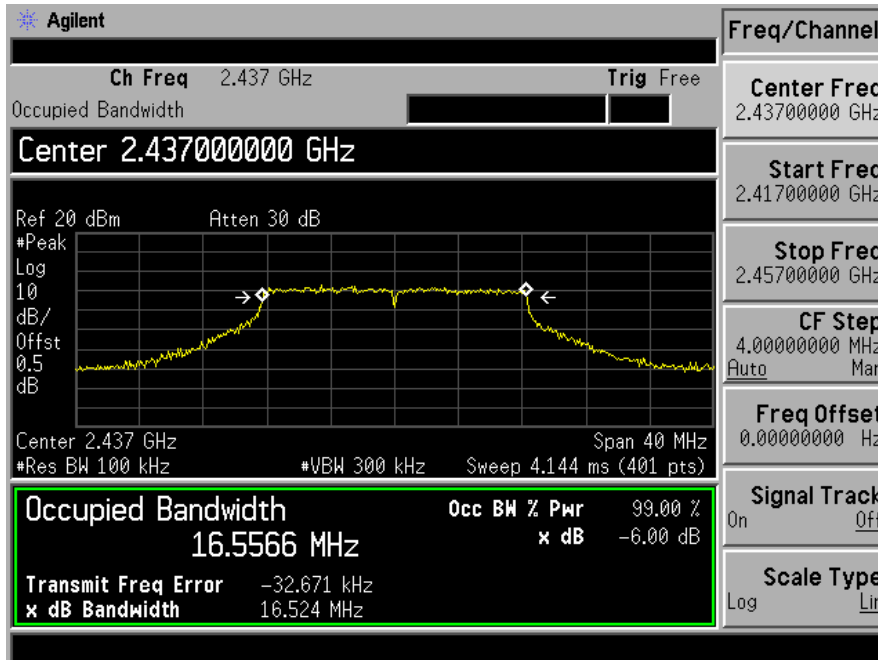


Test Model	DTS (6dB) Bandwidth
	802.11g
	Channel 11: 2462MHz

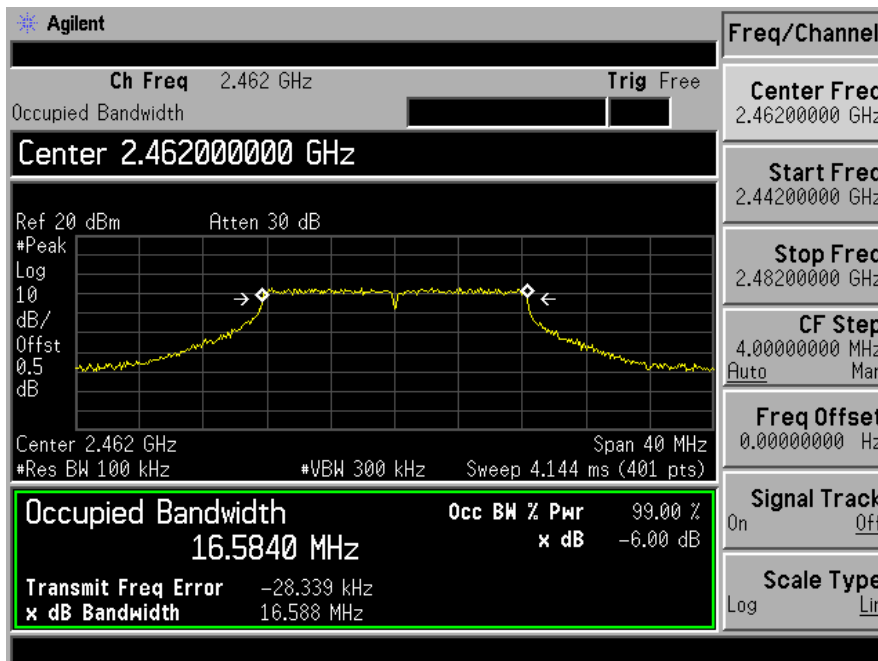





Test Model	DTS (6dB) Bandwidth
	802.11n (HT20)
	Channel 1: 2412MHz

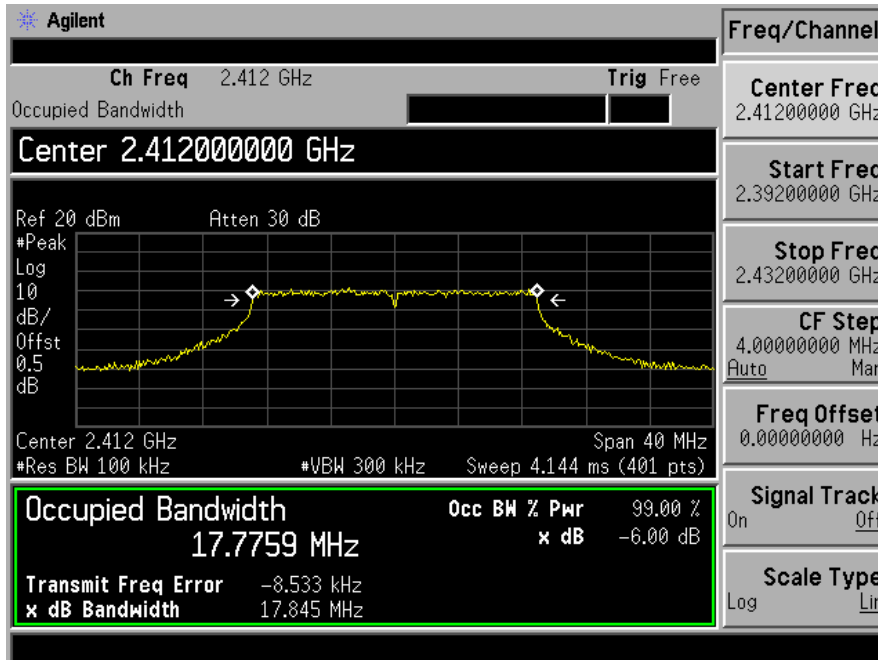


Test Model	DTS (6dB) Bandwidth
	802.11n (HT20)
	Channel 6: 2437MHz

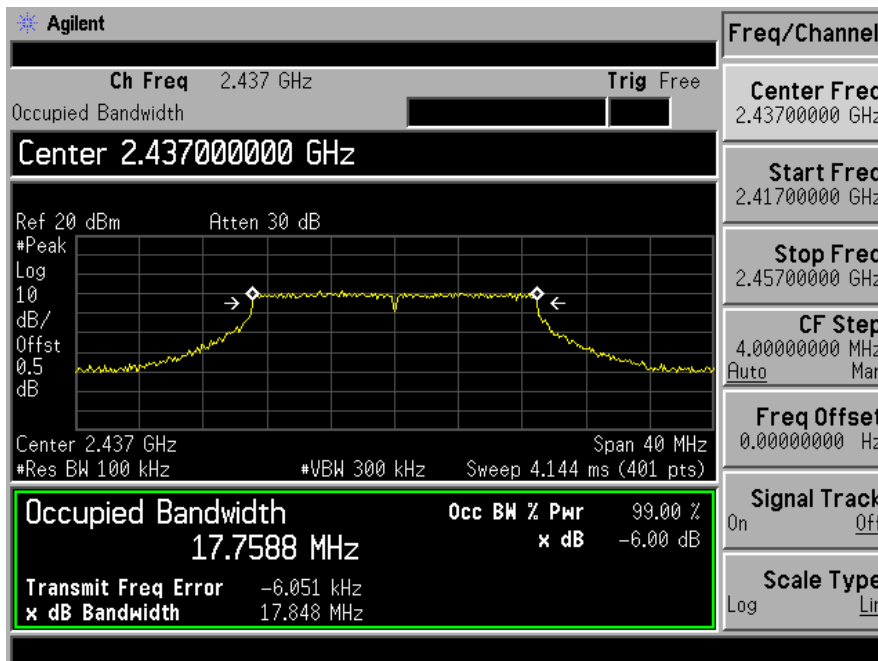


Test Model	DTS (6dB) Bandwidth
	802.11n (HT20)
	Channel 11: 2462MHz

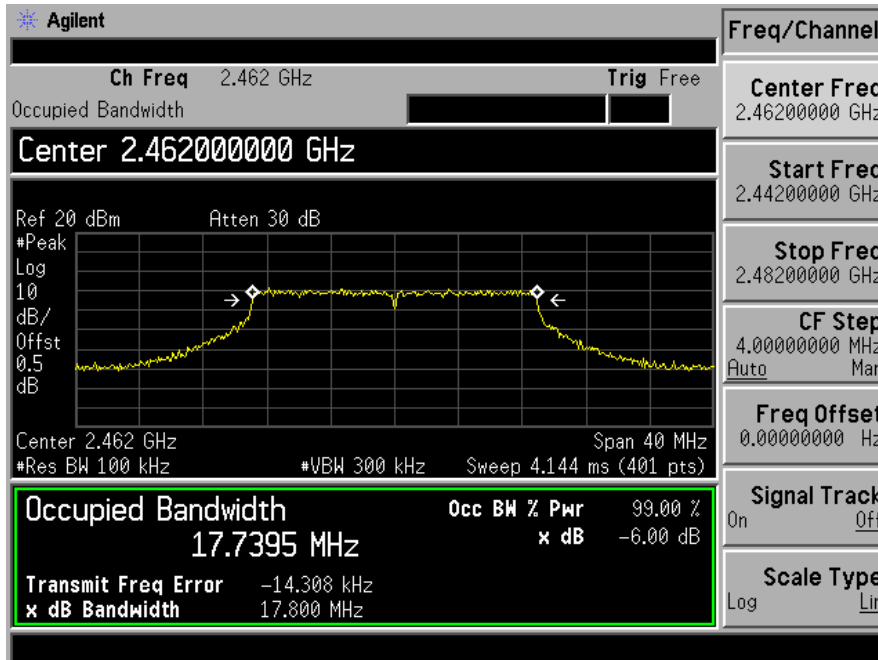


Test Model	DTS (6dB) Bandwidth
	802.11n (HT40)
	Channel 3: 2422MHz

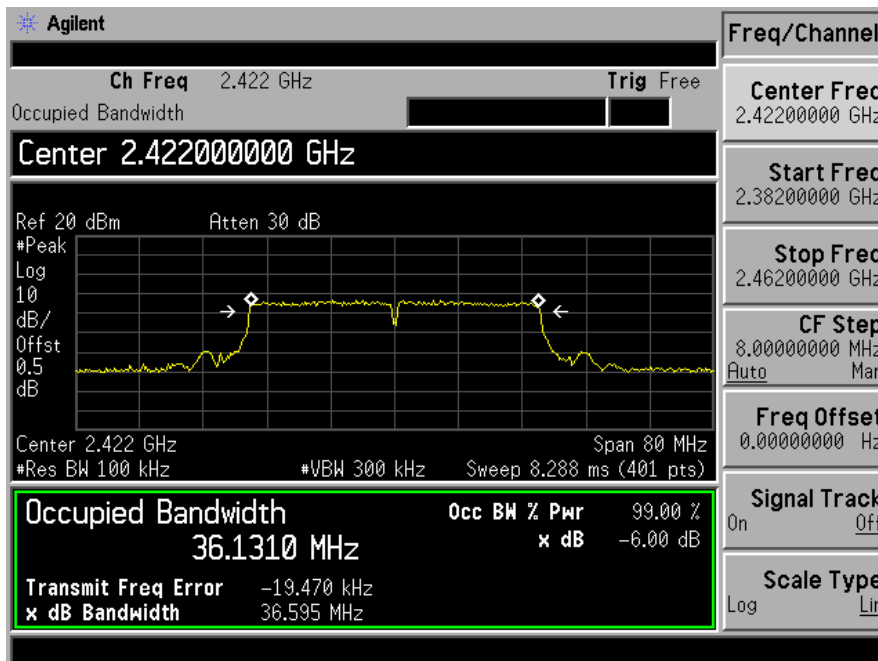

Test Model	DTS (6dB) Bandwidth
	802.11n (HT40)
	Channel 6: 2437MHz

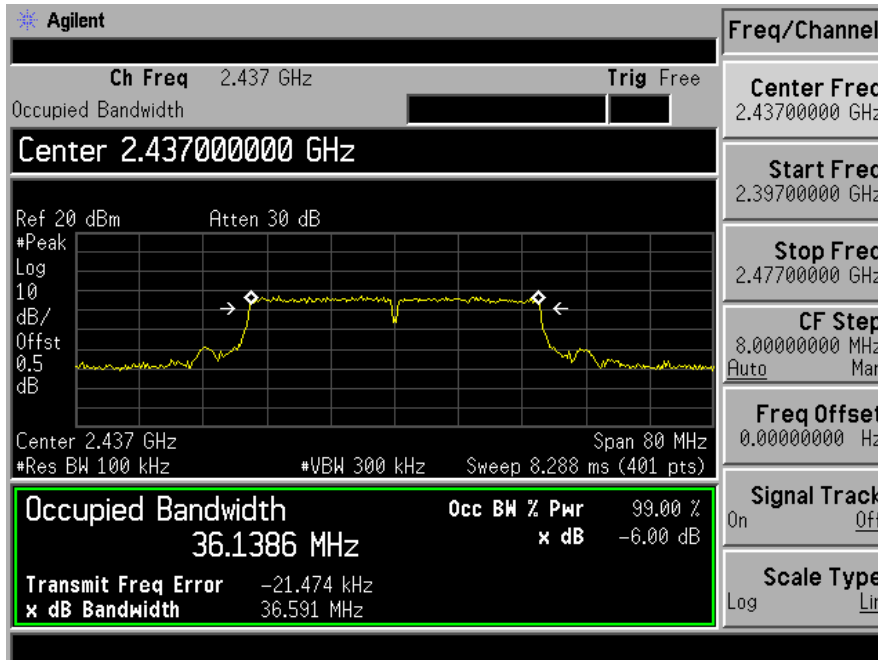

Test Model	DTS (6dB) Bandwidth
	802.11n (HT40)
	Channel 9: 2452MHz

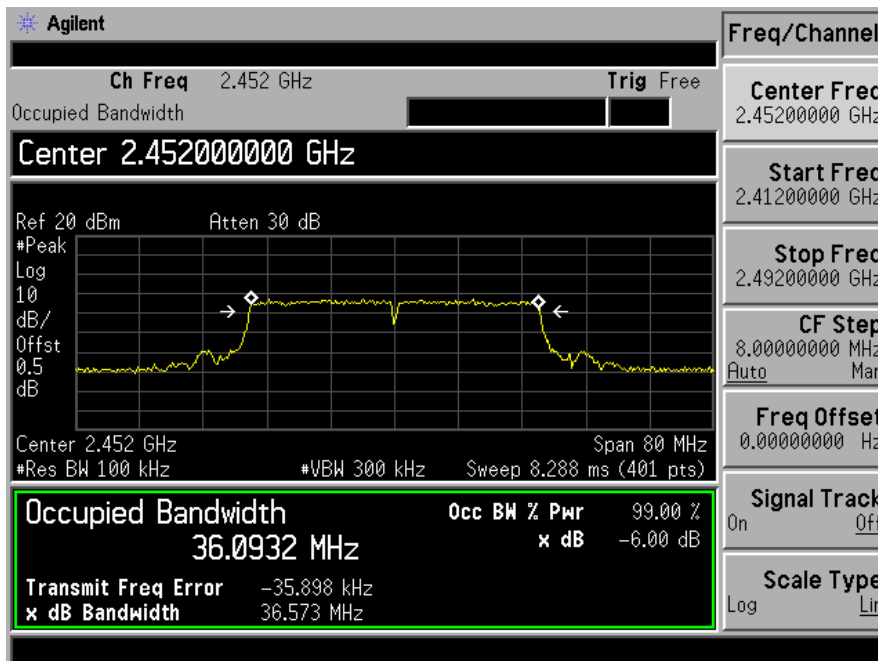



**8.3 MAXIMUM POWER SPECTRAL DENSITY**

8.3.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v03r02

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.


8.3.5 Test Results

Temperature: 24°C  
Humidity: 53 %


Test Date: February 13, 2015  
Test By: KING KONG

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	1	2412	-19.070	8	PASS
	6	2437	-20.000	8	PASS
	11	2462	-19.300	8	PASS
802.11g	1	2412	-22.470	8	PASS
	6	2437	-22.810	8	PASS
	11	2462	-22.160	8	PASS
802.11n (HT20)	1	2412	-23.280	8	PASS
	6	2437	-22.740	8	PASS
	11	2462	-23.050	8	PASS
802.11n (HT40)	3	2422	-24.670	8	PASS
	6	2437	-25.890	8	PASS
	9	2452	-25.360	8	PASS
Note: N/A					


Test Model	Power Spectral Density
	802.11b
	Channel 1: 2412MHz

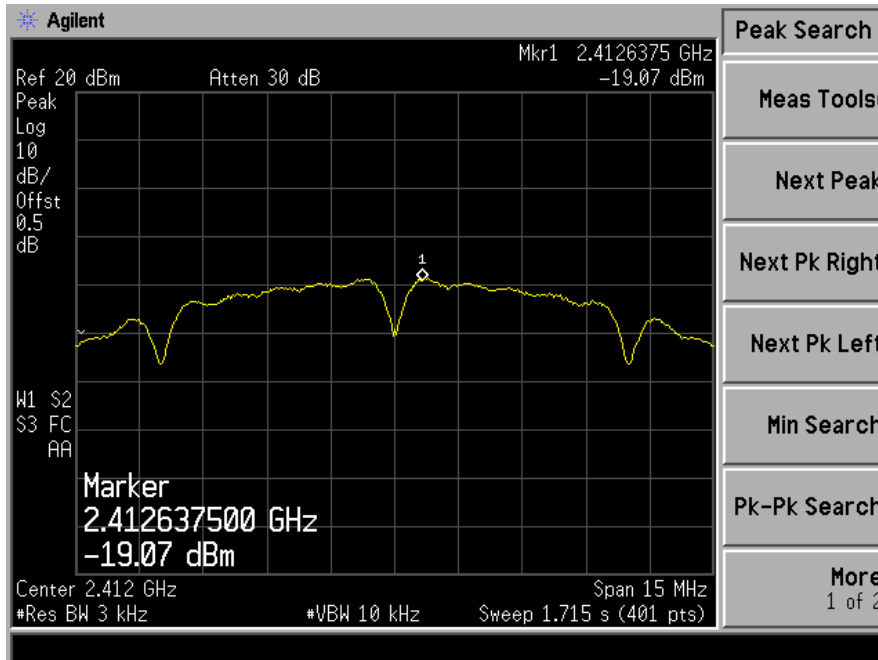


Test Model	Power Spectral Density
	802.11b
	Channel 6: 2437MHz

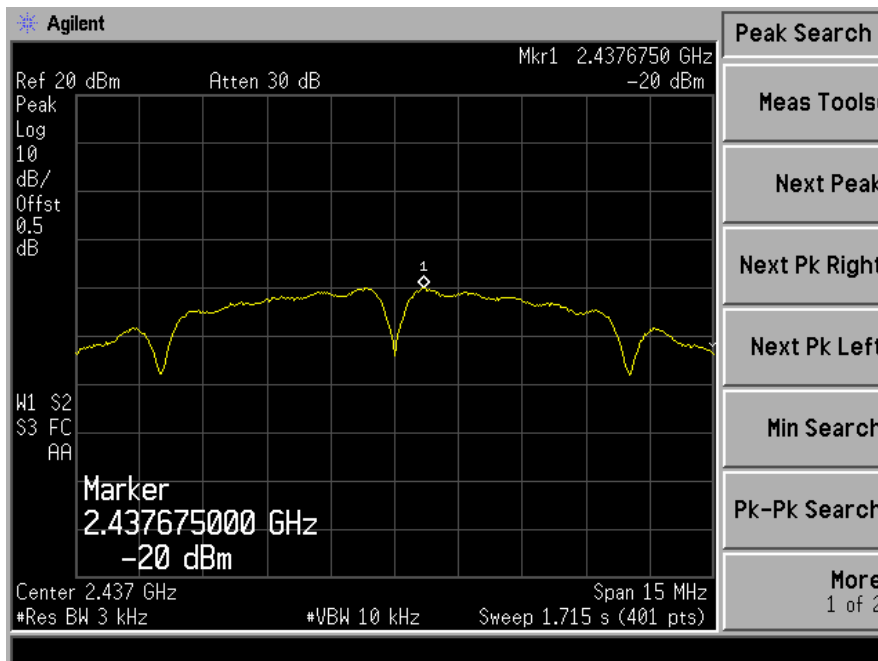


Test Model	Power Spectral Density
	802.11b
	Channel 11: 2462MHz

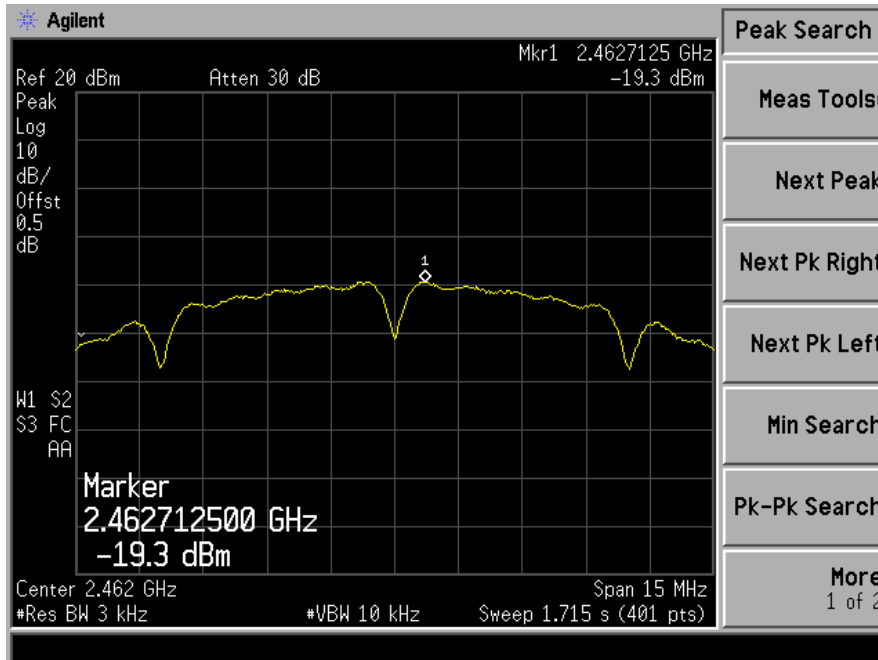


Test Model	Power Spectral Density
	802.11g
	Channel 1: 2412MHz

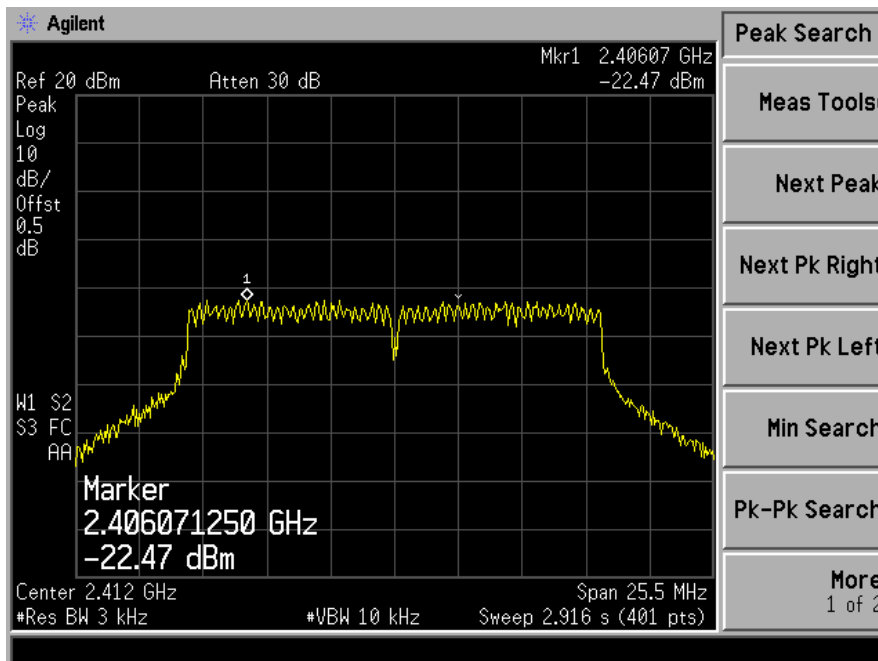

Test Model	Power Spectral Density
	802.11g
	Channel 6: 2437MHz

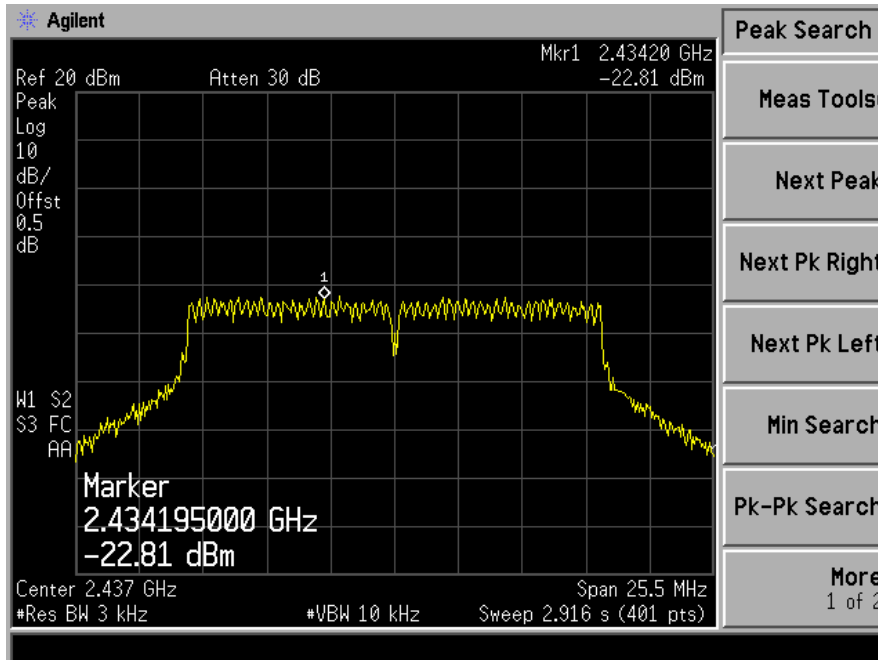


Test Model	Power Spectral Density
	802.11g
	Channel 11: 2462MHz

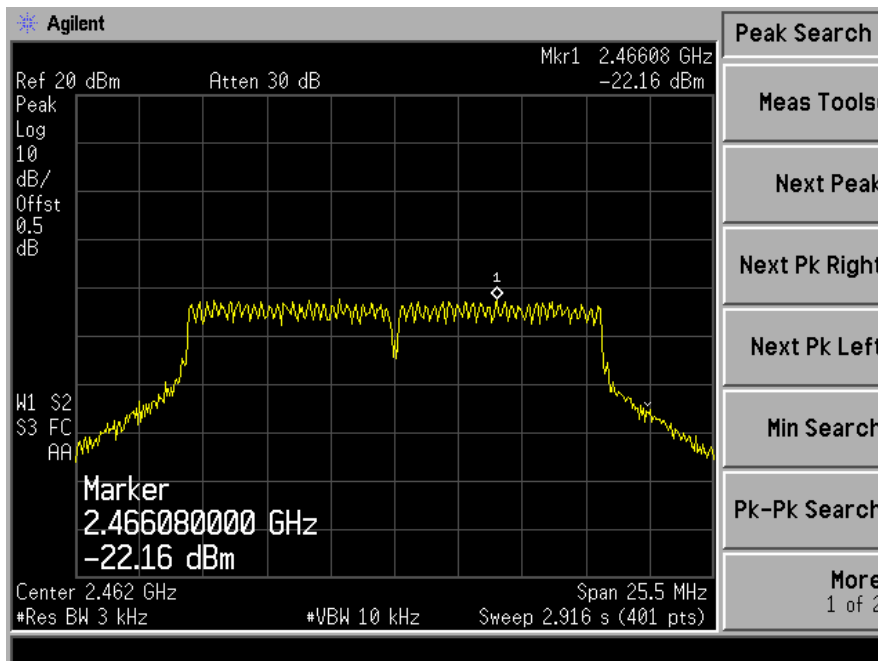





Test Model	Power Spectral Density
	802.11n (HT20)
	Channel 1: 2412MHz

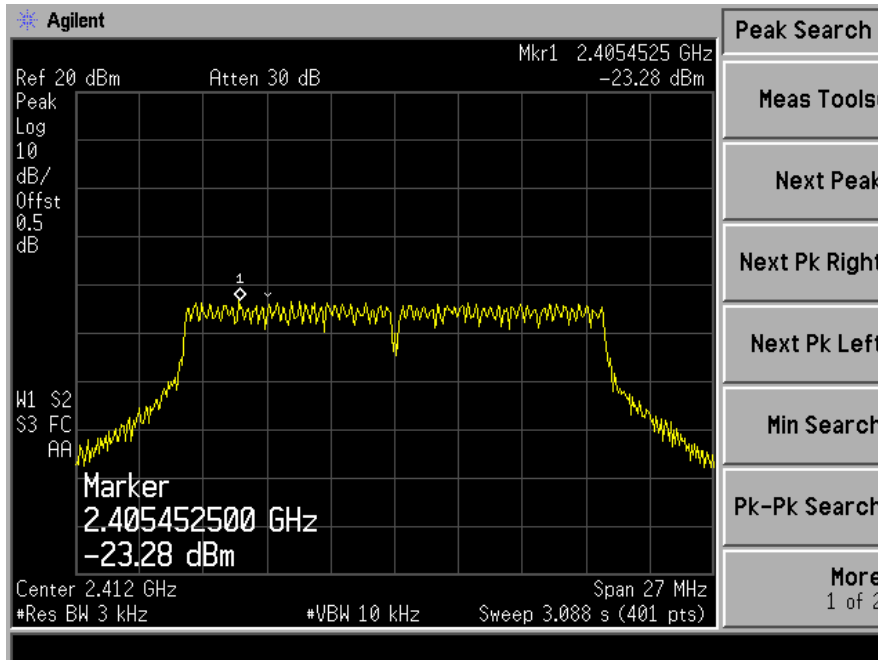


Test Model	Power Spectral Density
	802.11n (HT20)
	Channel 6: 2437MHz

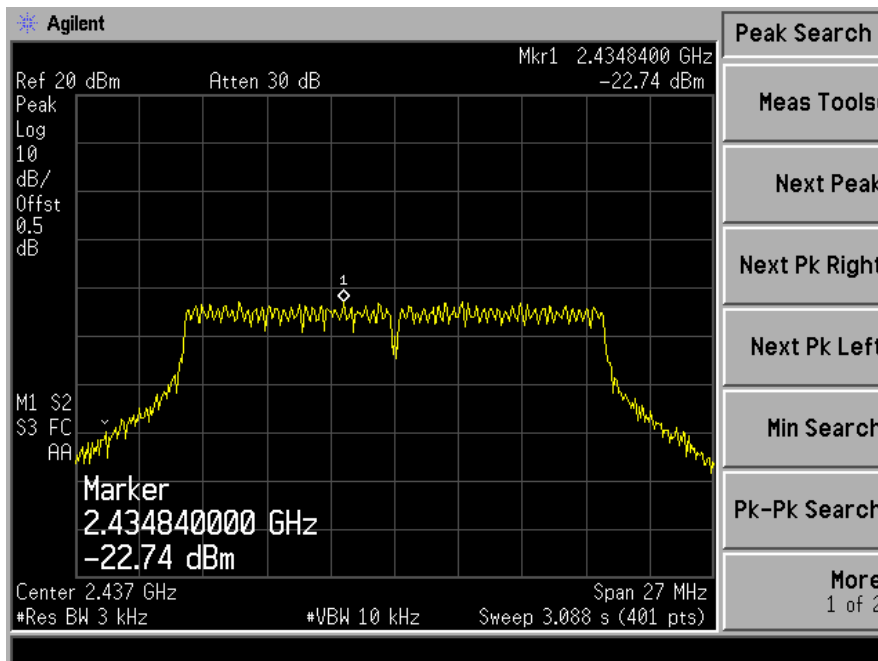


Test Model	Power Spectral Density
	802.11n (HT20)
	Channel 11: 2462MHz

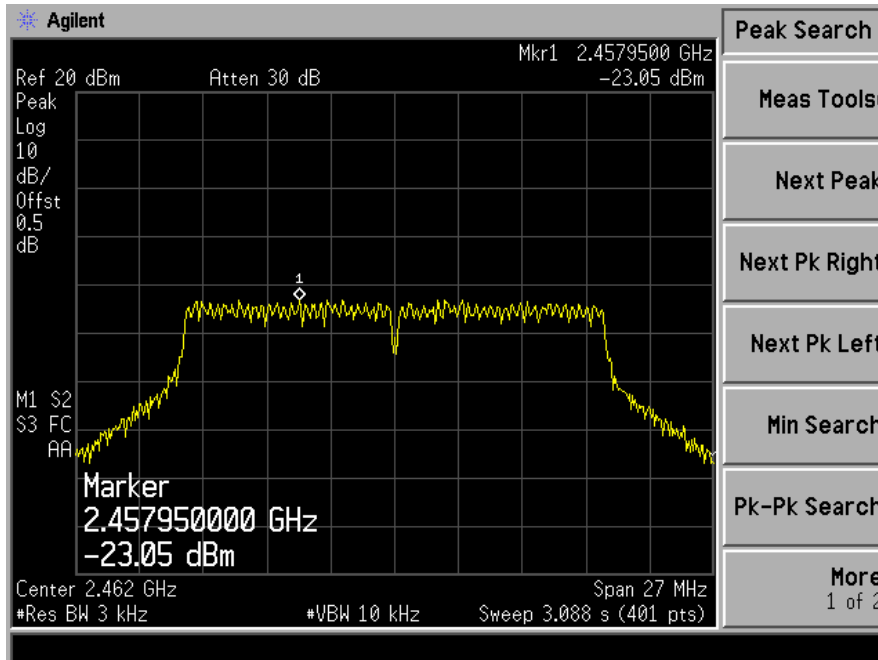


Test Model	Power Spectral Density
	802.11n (HT40)
	Channel 3: 2422MHz

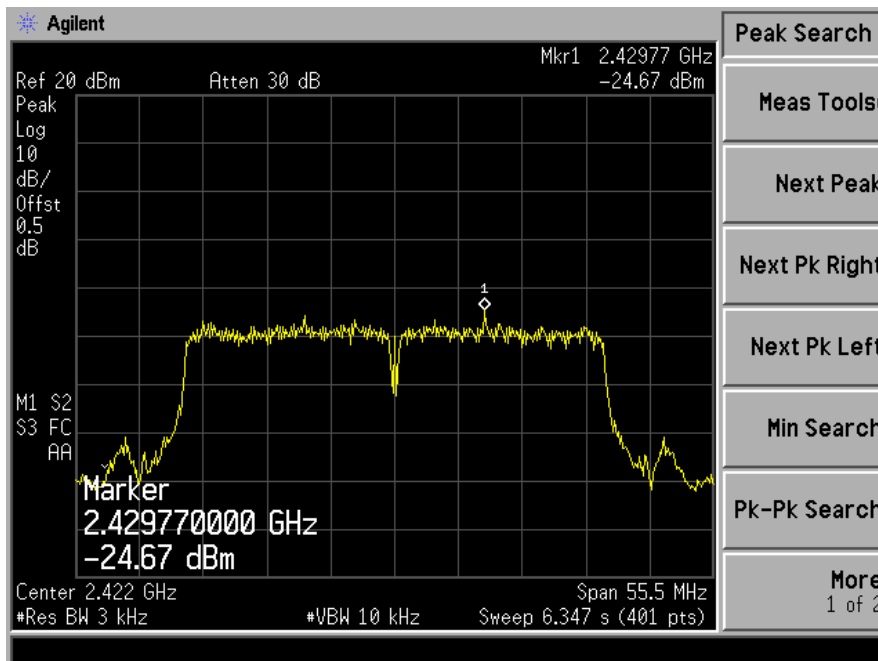

Test Model	Power Spectral Density
	802.11n (HT40)
	Channel 6: 2437MHz

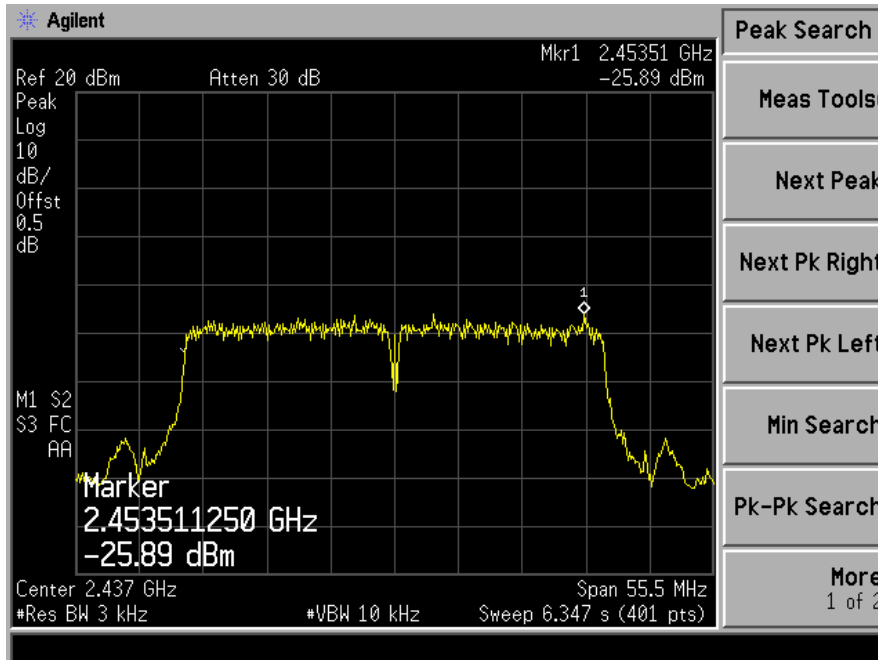

Test Model	Power Spectral Density
	802.11n (HT40)
	Channel 9: 2452MHz

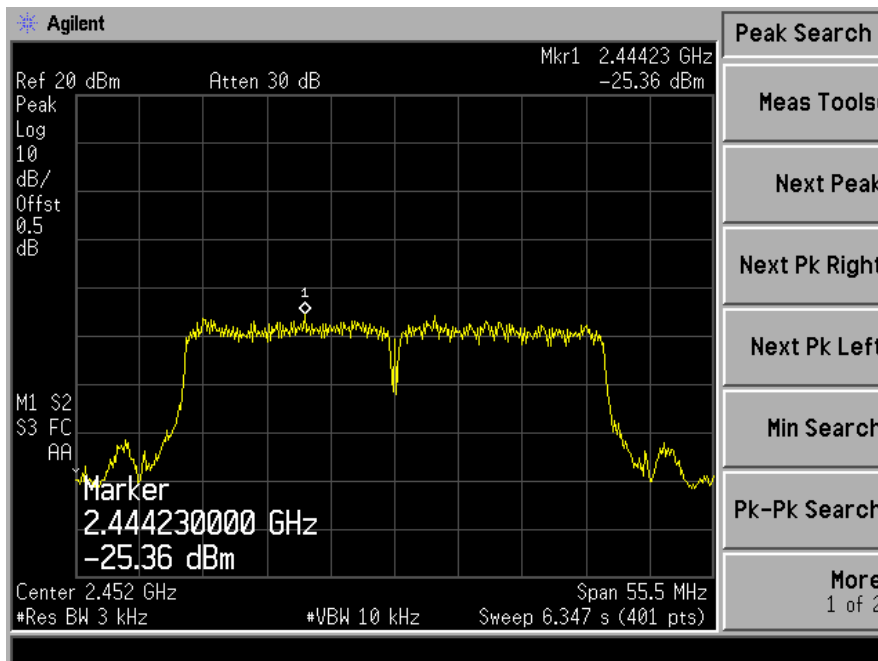

## 8.4 UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS

### 8.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v03r02

### 8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

#### ■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to  $\geq 1.5$  times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

#### ■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.



Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.



### 8.4.5 Test Results

All the modulation modes were tested, the data of the worst mode(802.11b) are described in the following table



Test Model	Unwanted Emissions in non-restricted frequency bands
	802.11b
	Channel 1: 2412MHz

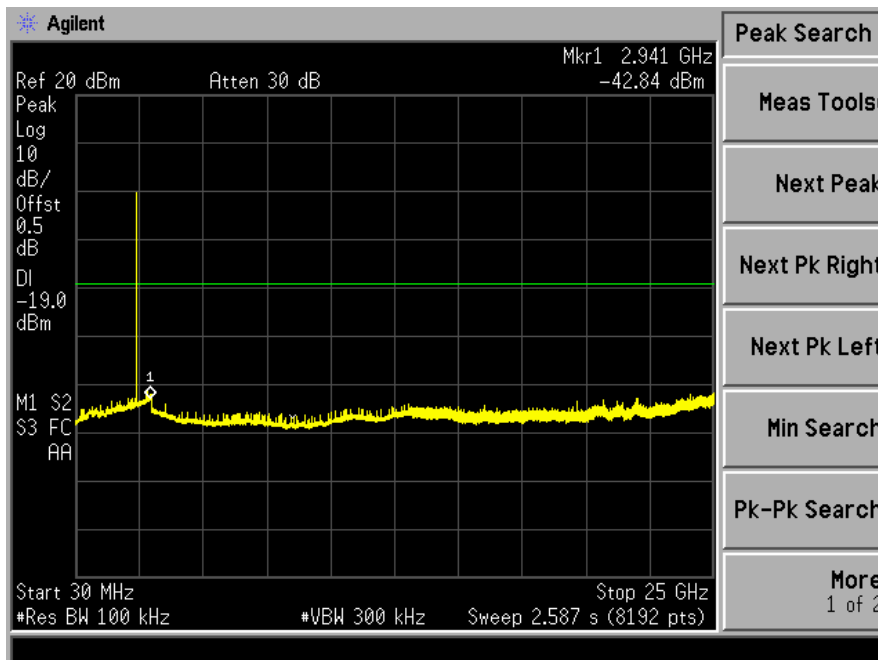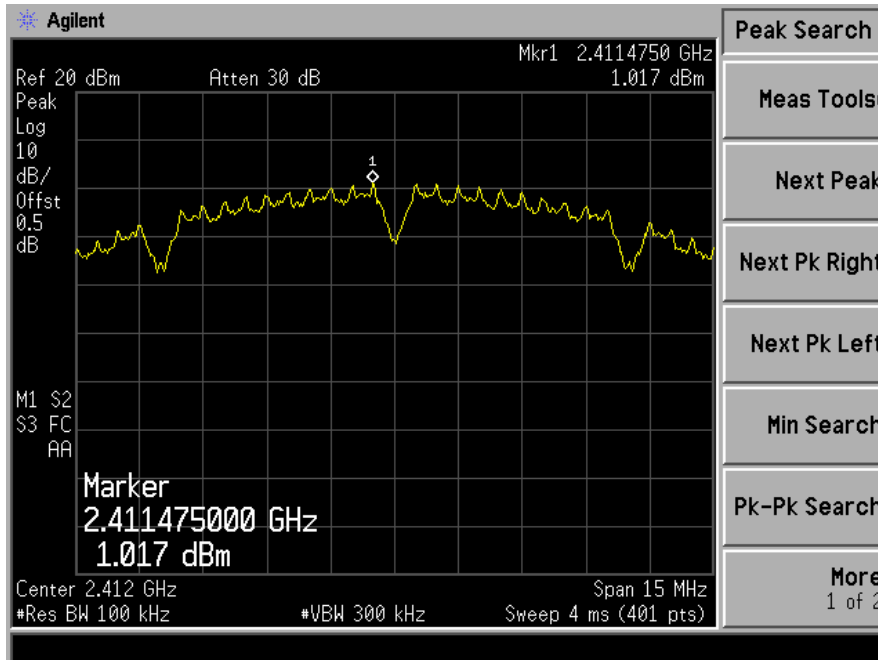


Test Model	Unwanted Emissions in non-restricted frequency bands
	802.11b
	Channel 6: 2437MHz

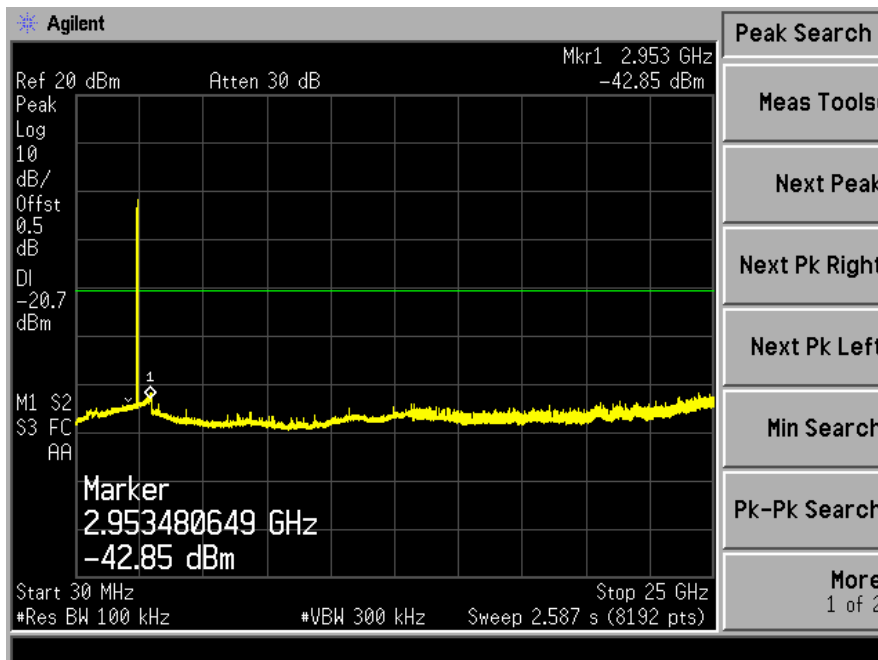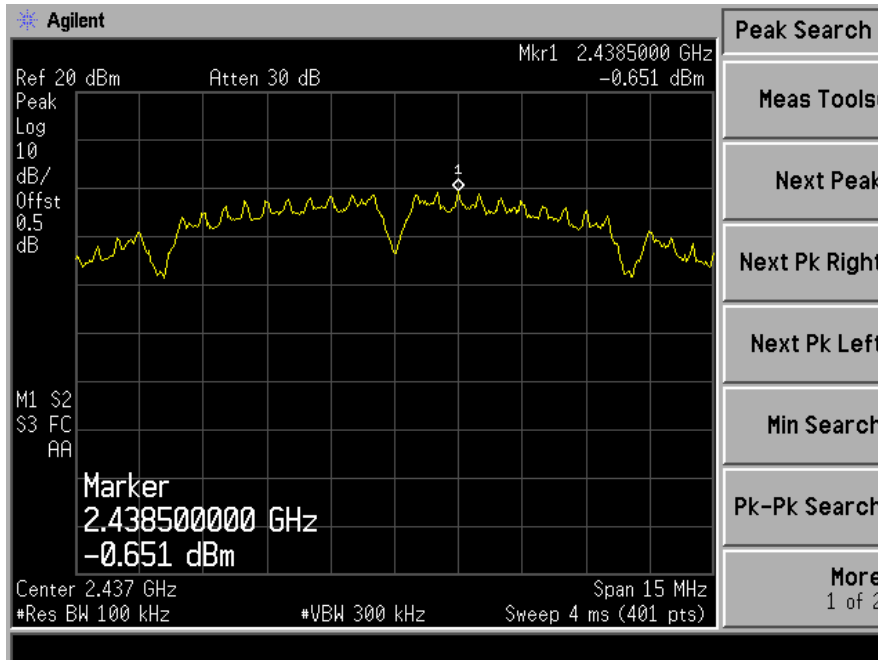


Test Model	Unwanted Emissions in non-restricted frequency bands
	802.11b
	Channel 9: 2462MHz

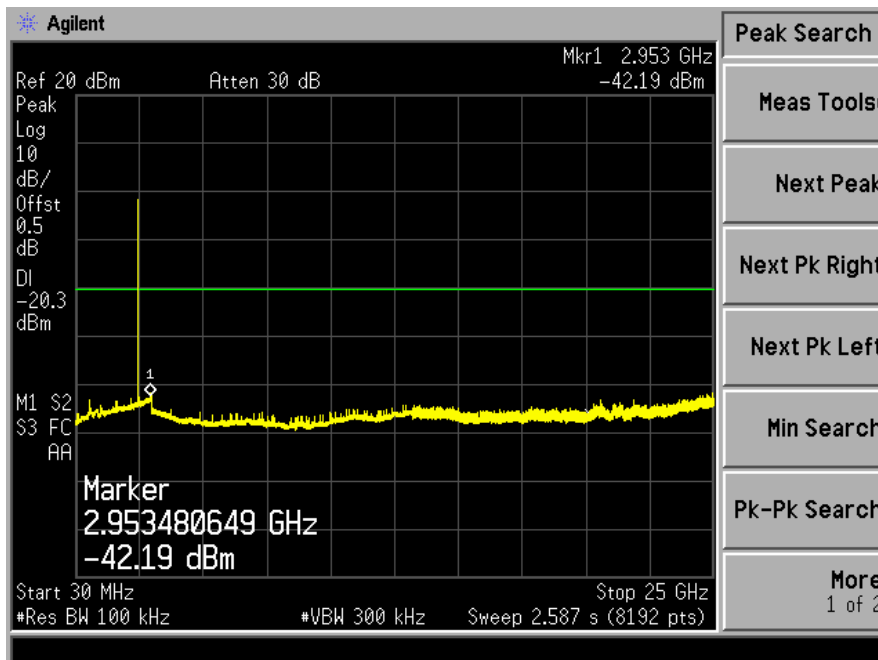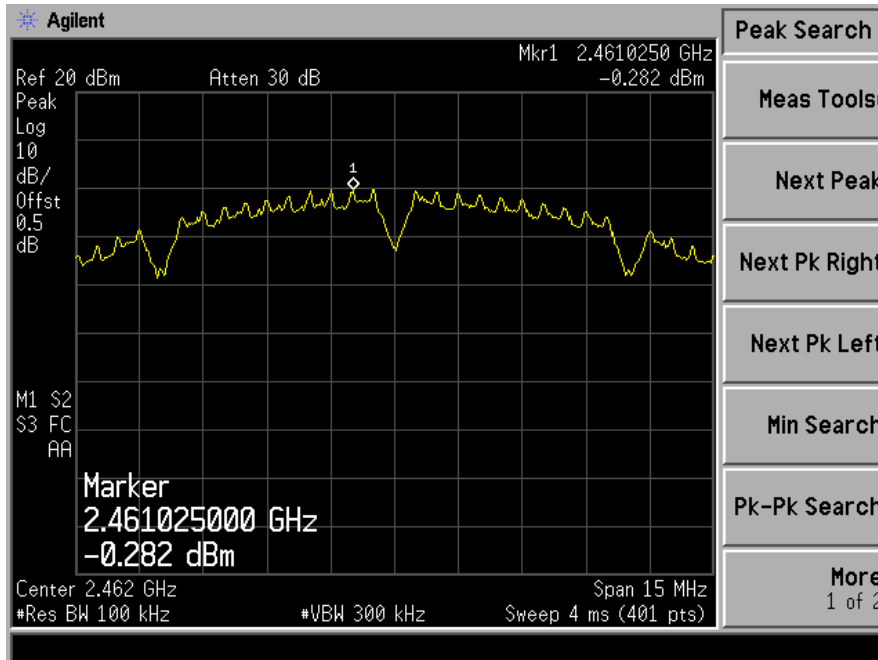

Test Model	Band edge
	802.11b
	Channel 1: 2412MHz

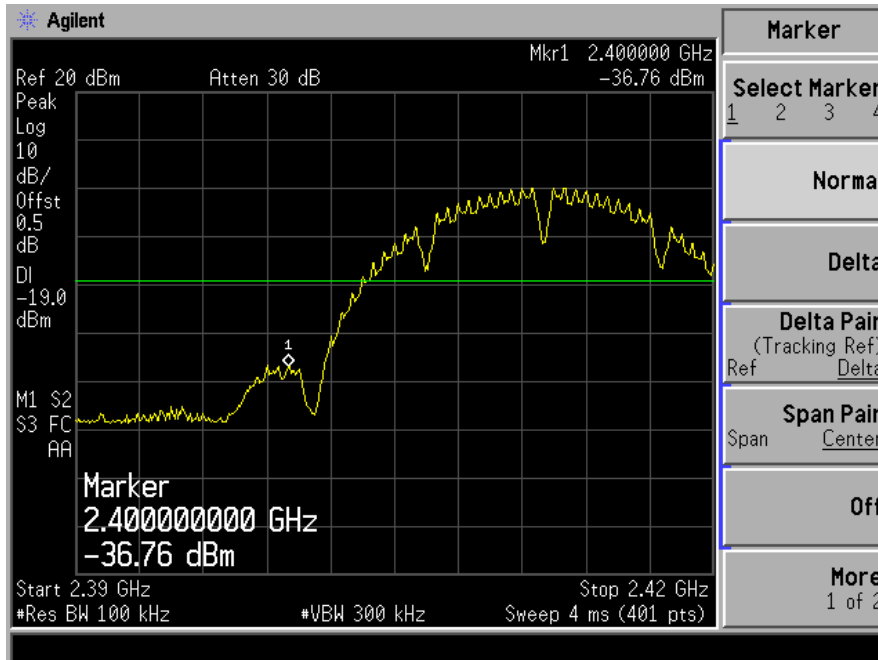

Test Model	Band edge
	802.11b
	Channel 11: 2462MHz

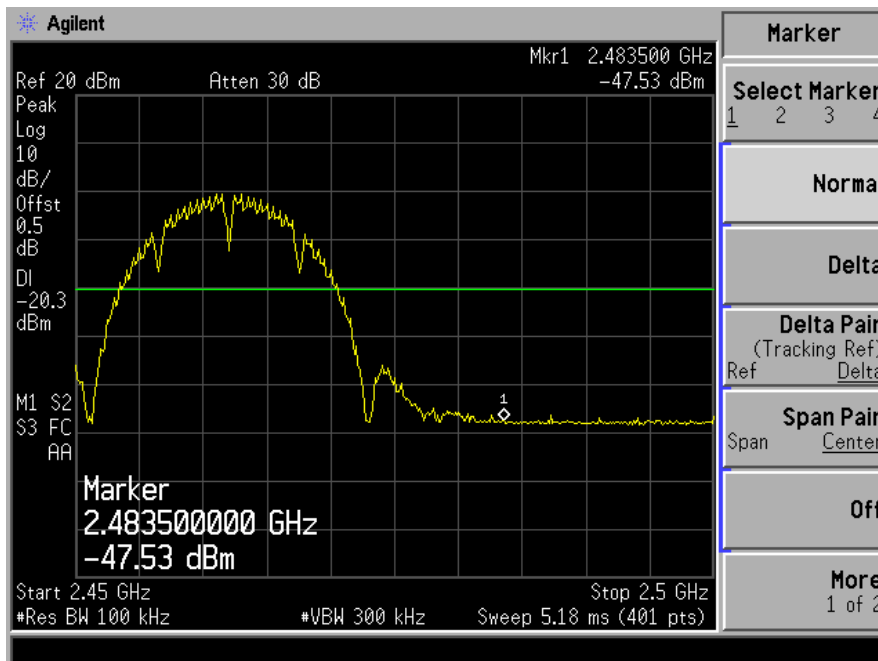



## 8.5 RADIATED SPURIOUS EMISSION

### 8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 DTS 01 Meas. Guidance v03r02

### 8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ )	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log ( $\mu\text{V}/\text{m}$ )	300
0.490~1.705	2400/F(KHz)	20 log ( $\mu\text{V}/\text{m}$ )	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Remark: 1. Emission level in  $\text{dB}\mu\text{V}/\text{m} = 20 \log (\mu\text{V}/\text{m})$

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =  $40 \log (\text{Specific distance} / \text{test distance})$  (dB);

Limit line = Specific limits (dB $\mu\text{V}$ ) + distance extrapolation factor.

for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $\text{RBWCF} [\text{dB}] = 10 \cdot \lg (100 [\text{kHz}] / \text{narrower RBW} [\text{kHz}])$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz(1GHz to 25GHz), 100 kHz for  $f < 1$  GHz(30MHz to 1GHz)

VBW  $\geq$  RBW for peak measurement

VBW = 10Hz for average measurement

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.4-1992 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.


8.5.5 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

Test mode: TX Mode

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--



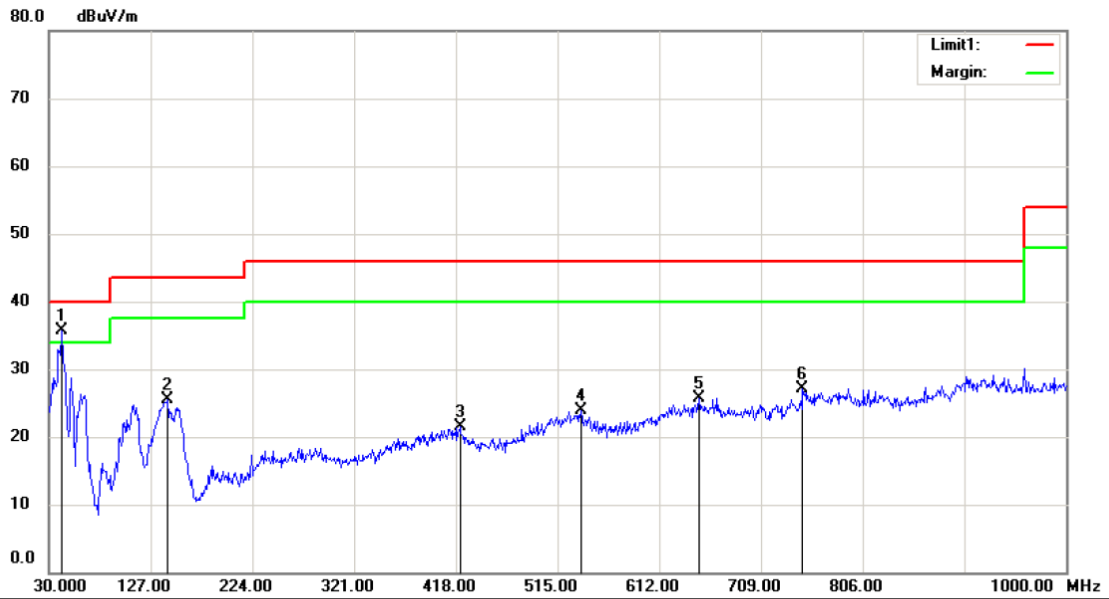


Site 3m Chamber #1      Polarization: *Vertical*      Temperature: 24 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 53 %  
 Mode:802.11b TX CH1  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	42.6100	47.21	-11.57	35.64	40.00	-4.36			QP
2		143.4900	42.61	-17.19	25.42	43.50	-18.08			QP
3		421.8800	29.93	-8.40	21.53	46.00	-24.47			QP
4		537.3100	30.45	-6.57	23.88	46.00	-22.12			QP
5		649.8300	30.64	-4.95	25.69	46.00	-20.31			QP
6		748.7700	30.99	-3.89	27.10	46.00	-18.90			QP

\*:Maximum data    x:Over limit    !:over margin

Operator: CSL

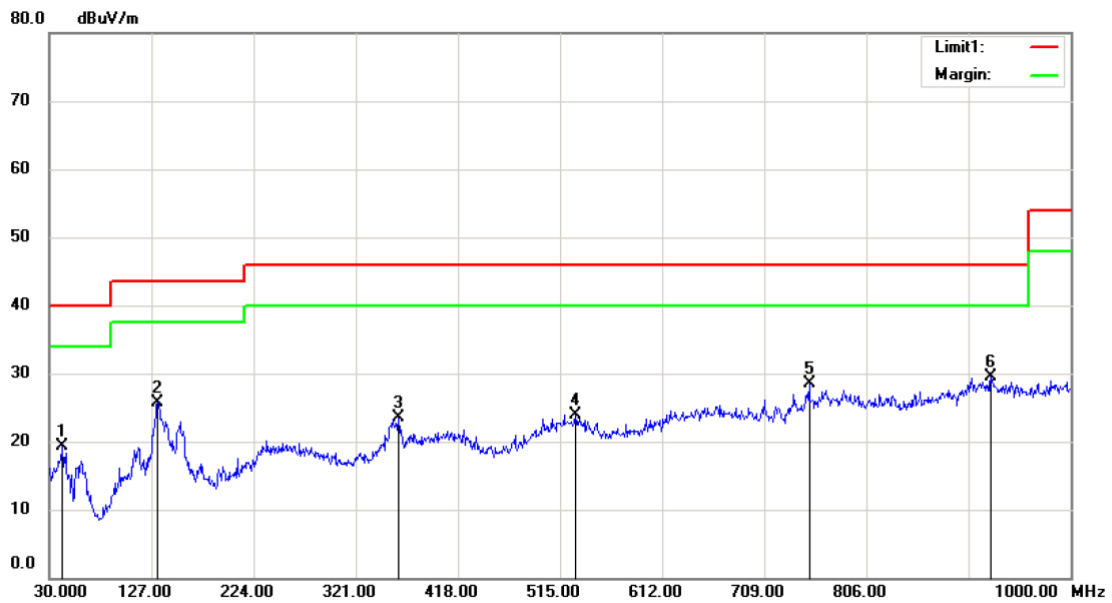


Site 3m Chamber #1      Polarization: *Horizontal*      Temperature: 24 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 53 %  
 Mode:802.11b TX CH6  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		42.6100	31.49	-12.26	19.23	40.00	-20.77	QP			
2		132.8200	42.17	-16.46	25.71	43.50	-17.79	QP			
3		361.7400	32.77	-9.34	23.43	46.00	-22.57	QP			
4		529.5500	29.85	-5.93	23.92	46.00	-22.08	QP			
5		751.6800	32.20	-3.75	28.45	46.00	-17.55	QP			
6	*	924.3400	30.47	-1.01	29.46	46.00	-16.54	QP			

\*:Maximum data    x:Over limit    !:over margin

Operator: CSL

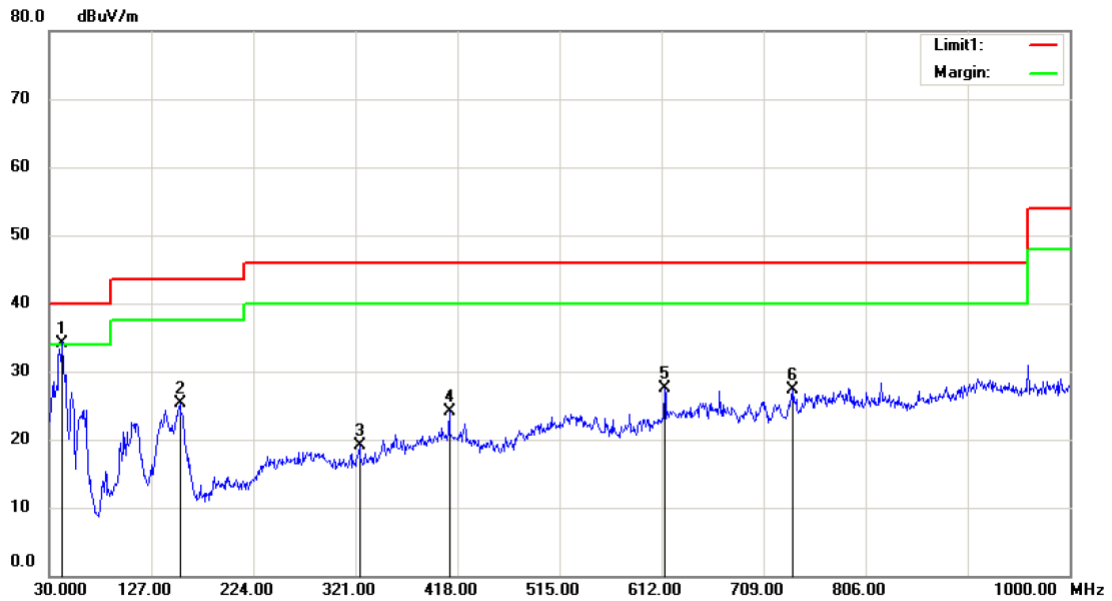


Site 3m Chamber #1      Polarization: **Vertical**      Temperature: 24 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 53 %  
 Mode:802.11b TX CH6  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	42.6100	45.77	-11.57	34.20	40.00	-5.80	QP			
2		154.1600	42.86	-17.59	25.27	43.50	-18.23	QP			
3		324.8800	30.45	-11.40	19.05	46.00	-26.95	QP			
4		410.2400	32.13	-7.95	24.18	46.00	-21.82	QP			
5		614.9100	33.59	-6.02	27.57	46.00	-18.43	QP			
6		737.1300	32.21	-4.91	27.30	46.00	-18.70	QP			

\*:Maximum data    x:Over limit    !:over margin

Operator: CSL

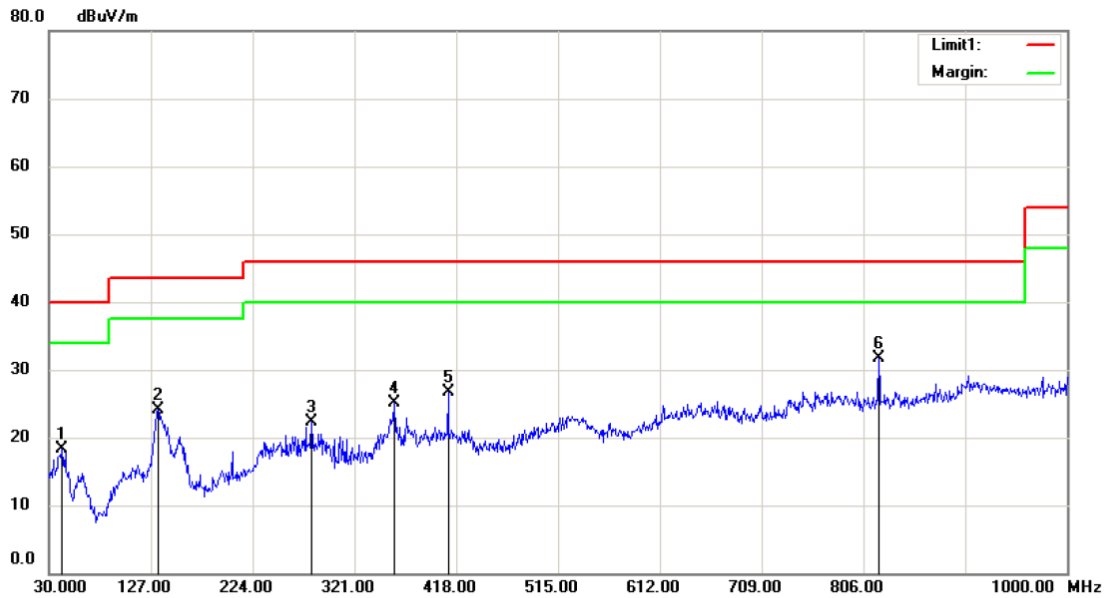


Site 3m Chamber #1      Polarization: *Horizontal*      Temperature: 24 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 53 %  
 Mode:802.11b TX CH11  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		42.6100	30.64	-12.26	18.38	40.00	-21.62	QP			
2		133.7900	40.56	-16.50	24.06	43.50	-19.44	QP			
3		280.2600	33.16	-10.87	22.29	46.00	-23.71	QP			
4		358.8300	34.46	-9.39	25.07	46.00	-20.93	QP			
5		410.2400	34.68	-7.95	26.73	46.00	-19.27	QP			
6	*	820.5500	34.72	-3.10	31.62	46.00	-14.38	QP			

\*:Maximum data    x:Over limit    !:over margin

Operator: CSL

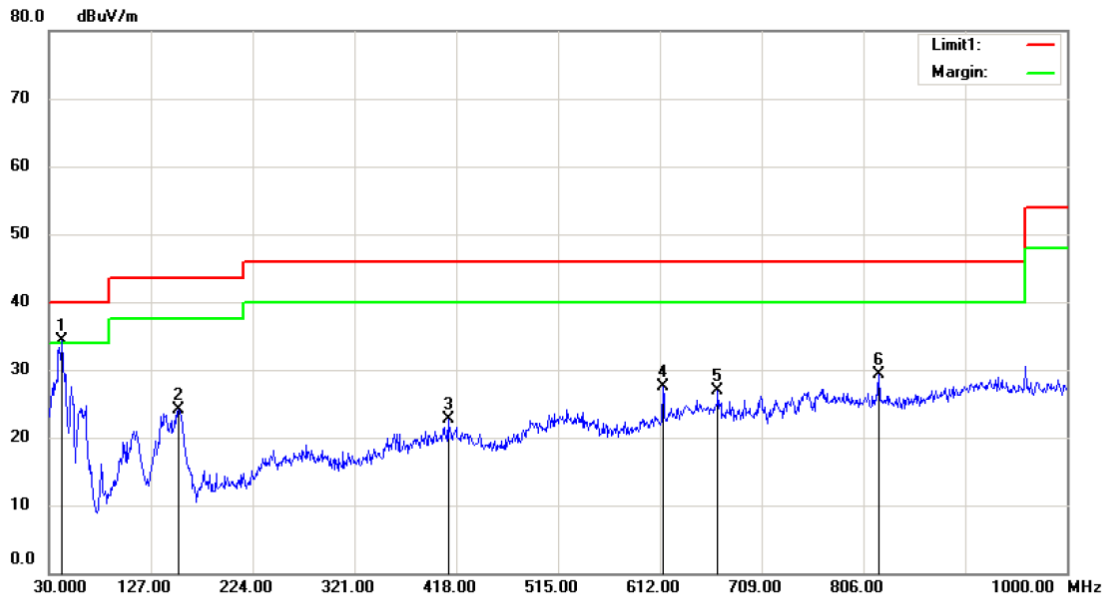

Site 3m Chamber #1      Polarization: **Vertical**      Temperature: 24 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 53 %  
 Mode:802.11b TX CH11  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	42.6100	45.95	-11.57	34.38	40.00	-5.62			QP
2		153.1900	41.63	-17.58	24.05	43.50	-19.45			QP
3		410.2400	30.72	-7.95	22.77	46.00	-23.23			QP
4		614.9100	33.57	-6.02	27.55	46.00	-18.45			QP
5		667.2900	31.85	-5.02	26.83	46.00	-19.17			QP
6		820.5500	32.36	-3.10	29.26	46.00	-16.74			QP

\*:Maximum data    x:Over limit    !:over margin

Operator: CSL



■ Spurious Emission Above 1GHz (1GHz to 25GHz)

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Temperature: 24°C                      Test Date: February 13, 2015  
 Humidity: 53 %                         Test By: KING KONG  
 Test mode: 802.11b                     Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4519.00	V	46.73	30.40	74.00	54.00	-27.27	-23.60
9466.00	V	50.44	32.60	74.00	54.00	-23.56	-21.40
14158.00	V	51.12	35.70	74.00	54.00	-22.88	-18.30
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
3992.00	H	47.33	30.30	74.00	54.00	-26.67	-23.70
9619.00	H	49.76	32.80	74.00	54.00	-24.24	-21.20
14974.00	H	51.92	35.90	74.00	54.00	-22.08	-18.10

Test mode: 802.11b                      Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4570.00	V	46.32	29.80	74.00	54.00	-27.68	-24.20
9636.00	V	48.60	32.20	74.00	54.00	-25.40	-21.80
13784.00	V	49.93	35.20	74.00	54.00	-24.07	-18.80
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
3992.27	H	45.48	29.30	74.00	54.00	-28.52	-24.70
9721.00	H	46.99	32.40	74.00	54.00	-27.01	-21.60
15654.00	H	51.02	35.90	74.00	54.00	-22.98	-18.10

Test mode: 802.11b                      Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4571.33	V	48.57	30.40	74.00	54.00	-25.43	-23.60
9568.00	V	50.37	32.40	74.00	54.00	-23.63	-21.60
12203.00	V	50.35	35.20	74.00	54.00	-23.65	-18.80
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
4995.00	H	46.91	30.40	74.00	54.00	-27.09	-23.60
9653.00	H	49.23	32.90	74.00	54.00	-24.77	-21.10
12186.00	H	50.20	35.60	74.00	54.00	-23.80	-18.40

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.














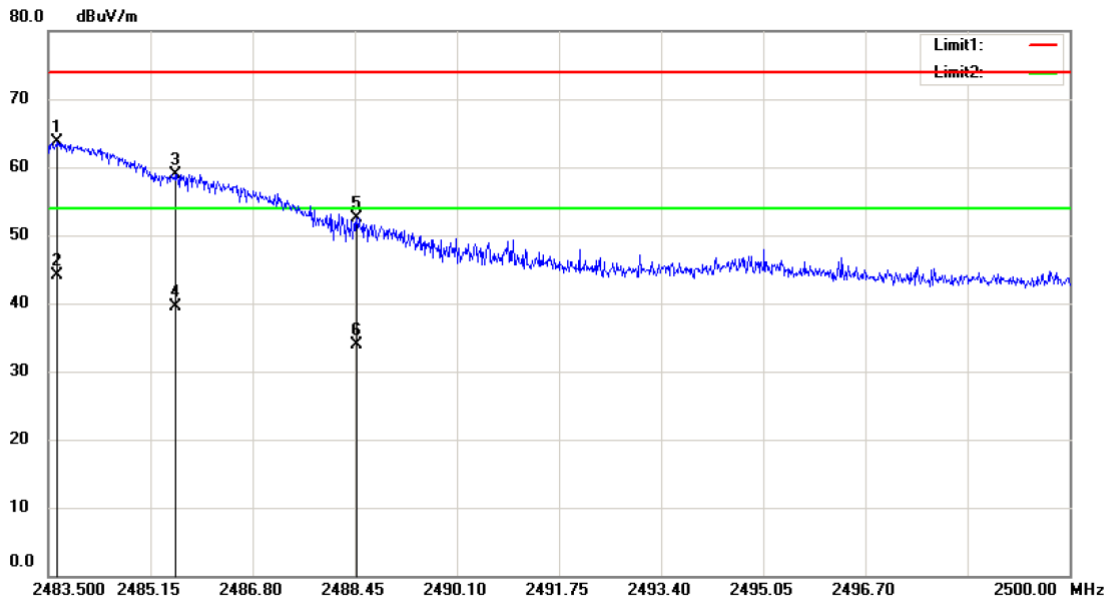


Site: 3m Chamber #1      Polarization: *Horizontal*      Temperature: 24 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 53 %  
 Mode:802.11g TX CH11  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.632	71.54	-7.89	63.65	74.00	-10.35			peak
2	*	2483.632	52.09	-7.89	44.20	54.00	-9.80			AVG
3		2485.563	66.87	-7.88	58.99	74.00	-15.01			peak
4		2485.563	47.48	-7.88	39.60	54.00	-14.40			AVG
5		2488.483	60.45	-7.86	52.59	74.00	-21.41			peak
6		2488.483	41.86	-7.86	34.00	54.00	-20.00			AVG

\*:Maximum data    x:Over limit    !:over margin

Operator: CSL



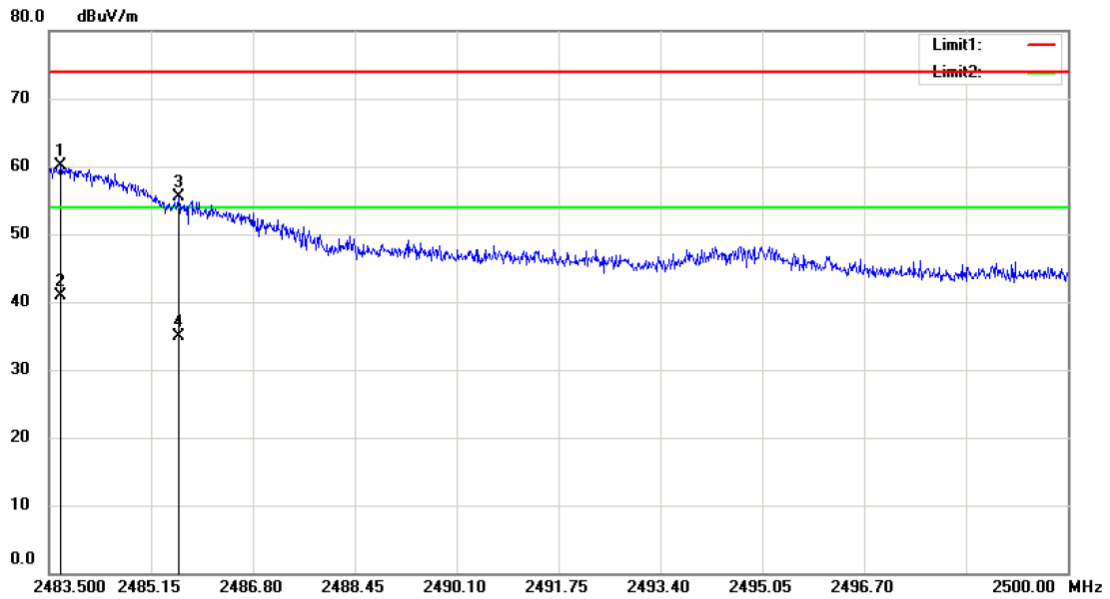

Site 3m Chamber #1 Polarization: *Vertical* Temperature: 24 C  
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %  
 Mode:802.11g TX CH11  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.682	67.94	-7.89	60.05	74.00	-13.95			peak
2	*	2483.682	48.89	-7.89	41.00	54.00	-13.00			AVG
3		2485.595	63.31	-7.88	55.43	74.00	-18.57			peak
4		2485.595	42.78	-7.88	34.90	54.00	-19.10			AVG

\*:Maximum data x:Over limit !:over margin


Operator: CSL









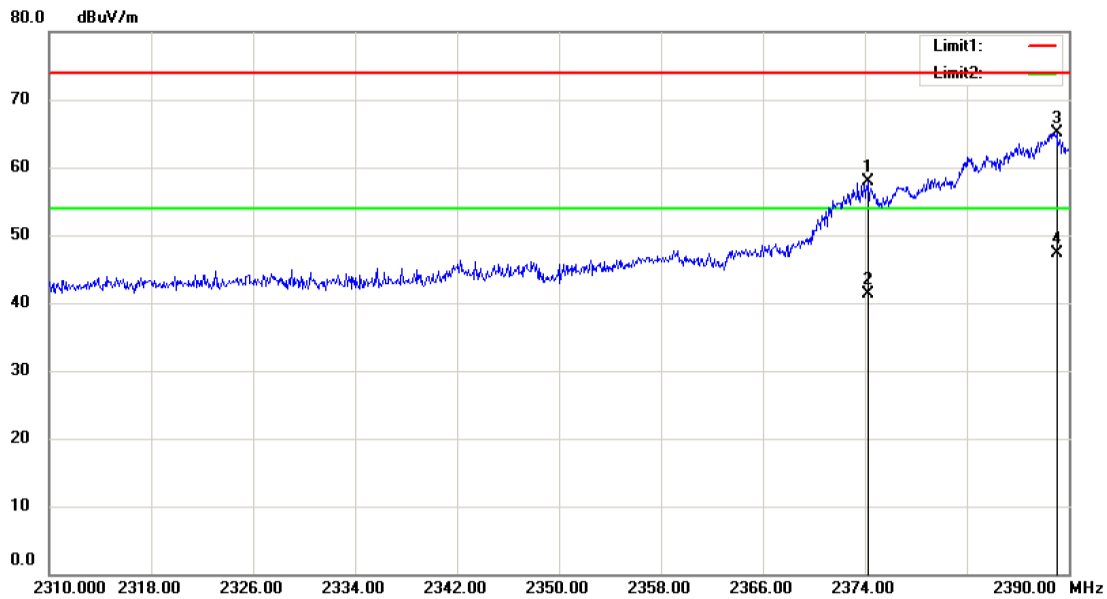

Site 3m Chamber #1      Polarization: *Horizontal*      Temperature: 24 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 53 %  
 Mode:802.11n HT40 TX CH3  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2374.240	66.16	-8.34	57.82	74.00	-16.18			peak
2		2374.240	49.64	-8.34	41.30	54.00	-12.70			AVG
3		2389.040	73.38	-8.27	65.11	74.00	-8.89			peak
4	*	2389.040	55.57	-8.27	47.30	54.00	-6.70			AVG


\*:Maximum data    x:Over limit    !:over margin

Operator: CSL







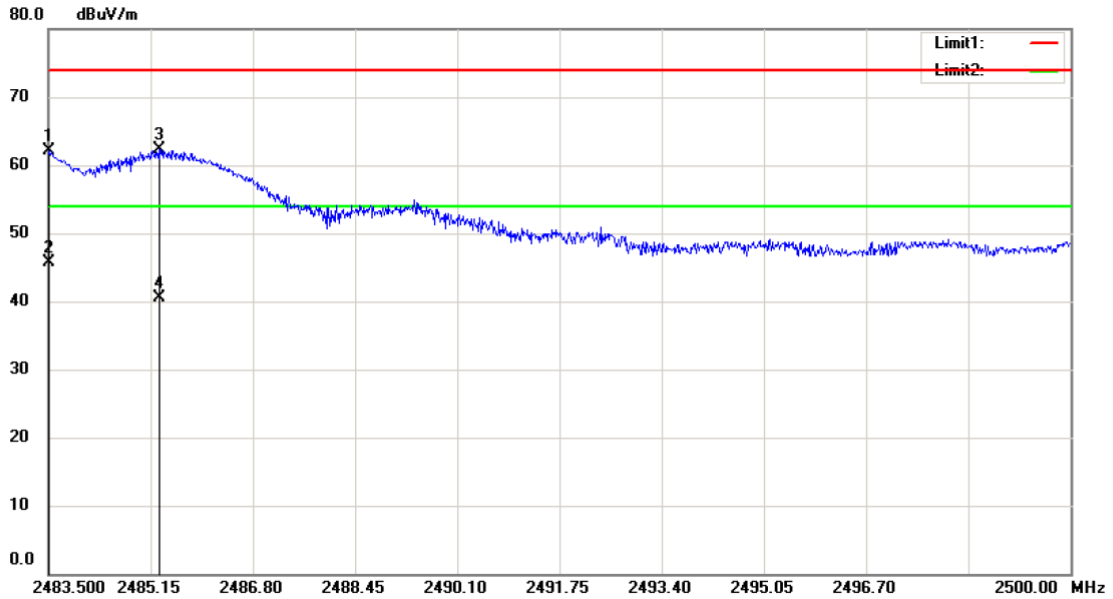

Site 3m Chamber #1      Polarization: *Vertical*      Temperature: 24 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 53 %  
 Mode:802.11n HT40 TX CH9  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2483.517	69.91	-7.89	62.02	74.00	-11.98	peak			
2	*	2483.517	53.59	-7.89	45.70	54.00	-8.30	AVG			
3		2485.282	70.20	-7.88	62.32	74.00	-11.68	peak			
4		2485.282	48.48	-7.88	40.60	54.00	-13.40	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: CSL

## 8.6 CONDUCTED EMISSION TEST

### 8.6.1 Applicable Standard

According to FCC Part 15.207(a)

### 8.6.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 8.6.3 Test Configuration

Test according to clause 7.3 conducted emission test setup


### 8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.  
Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
Repeat above procedures until all frequency measured were complete.

### 8.6.5 Test Results

PASS.


Adapter 1:

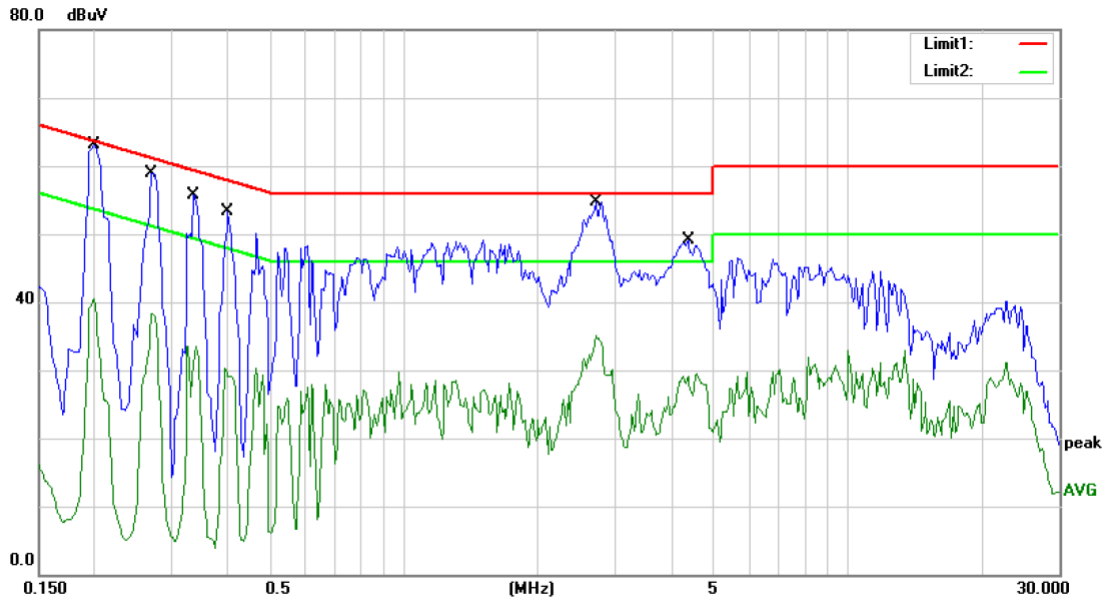

Site Conduction #1 Phase: **L1** Temperature: 24  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 120V/60Hz Humidity: 53 %  
 Mode: ON  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2000	55.00	0.00	55.00	63.61	-8.61	QP	
2		0.2000	40.56	0.00	40.56	53.61	-13.05	AVG	
3		0.2700	50.00	0.00	50.00	61.12	-11.12	QP	
4		0.2700	38.29	0.00	38.29	51.12	-12.83	AVG	
5		0.3350	46.00	0.00	46.00	59.33	-13.33	QP	
6		0.3350	33.59	0.00	33.59	49.33	-15.74	AVG	
7		0.4000	53.25	0.00	53.25	57.85	-4.60	QP	
8		0.4000	30.26	0.00	30.26	47.85	-17.59	AVG	
9	*	2.7200	52.73	0.00	52.73	56.00	-3.27	QP	
10		2.7200	35.10	0.00	35.10	46.00	-10.90	AVG	
11		4.3650	49.06	0.00	49.06	56.00	-6.94	QP	
12		4.3650	29.44	0.00	29.44	46.00	-16.56	AVG	


\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: XY

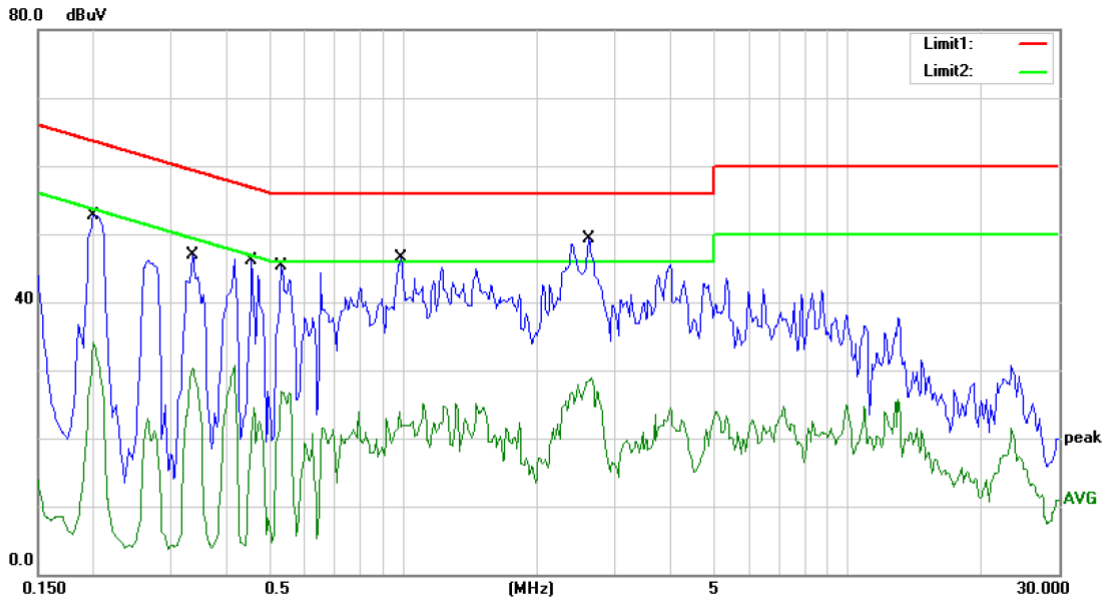

Site Conduction #1 Phase: **N** Temperature: 24  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 120V/60Hz Humidity: 53 %  
 Mode: ON  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2000	52.78	0.00	52.78	63.61	-10.83	QP	
2		0.2000	34.13	0.00	34.13	53.61	-19.48	AVG	
3		0.3350	46.85	0.00	46.85	59.33	-12.48	QP	
4		0.3350	30.35	0.00	30.35	49.33	-18.98	AVG	
5		0.4550	46.09	0.00	46.09	56.78	-10.69	QP	
6		0.4550	30.75	0.00	30.75	46.78	-16.03	AVG	
7		0.5300	45.38	0.00	45.38	56.00	-10.62	QP	
8		0.5300	26.91	0.00	26.91	46.00	-19.09	AVG	
9		0.9850	46.46	0.00	46.46	56.00	-9.54	QP	
10		0.9850	25.08	0.00	25.08	46.00	-20.92	AVG	
11	*	2.6100	49.23	0.00	49.23	56.00	-6.77	QP	
12		2.6100	28.80	0.00	28.80	46.00	-17.20	AVG	


\*:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator: XY

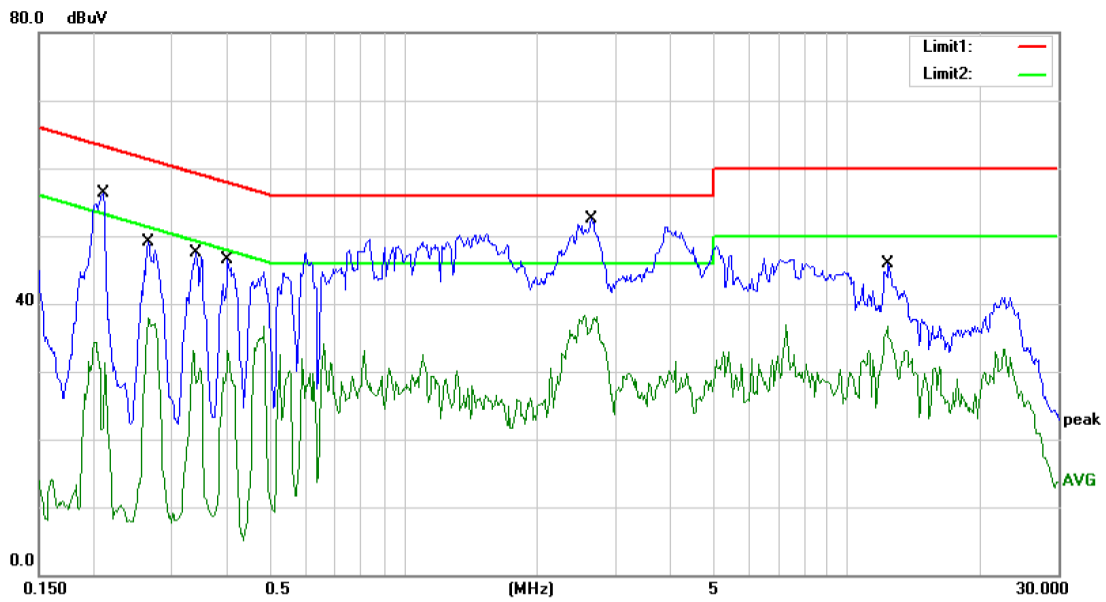

Site Conduction #1 Phase: **L1** Temperature: 24  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 240V/50Hz Humidity: 53 %  
 Mode: ON  
 Note: Adapter 1

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2100	56.25	0.00	56.25	63.21	-6.96	QP	
2		0.2100	34.39	0.00	34.39	53.21	-18.82	AVG	
3		0.2650	49.13	0.00	49.13	61.27	-12.14	QP	
4		0.2650	37.93	0.00	37.93	51.27	-13.34	AVG	
5		0.3400	47.56	0.00	47.56	59.20	-11.64	QP	
6		0.3400	33.06	0.00	33.06	49.20	-16.14	AVG	
7		0.4000	46.47	0.00	46.47	57.85	-11.38	QP	
8		0.4000	33.01	0.00	33.01	47.85	-14.84	AVG	
9	*	2.6500	52.55	0.00	52.55	56.00	-3.45	QP	
10		2.6500	38.32	0.00	38.32	46.00	-7.68	AVG	
11		12.4000	45.90	0.00	45.90	60.00	-14.10	QP	
12		12.4000	36.73	0.00	36.73	50.00	-13.27	AVG	

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: XY

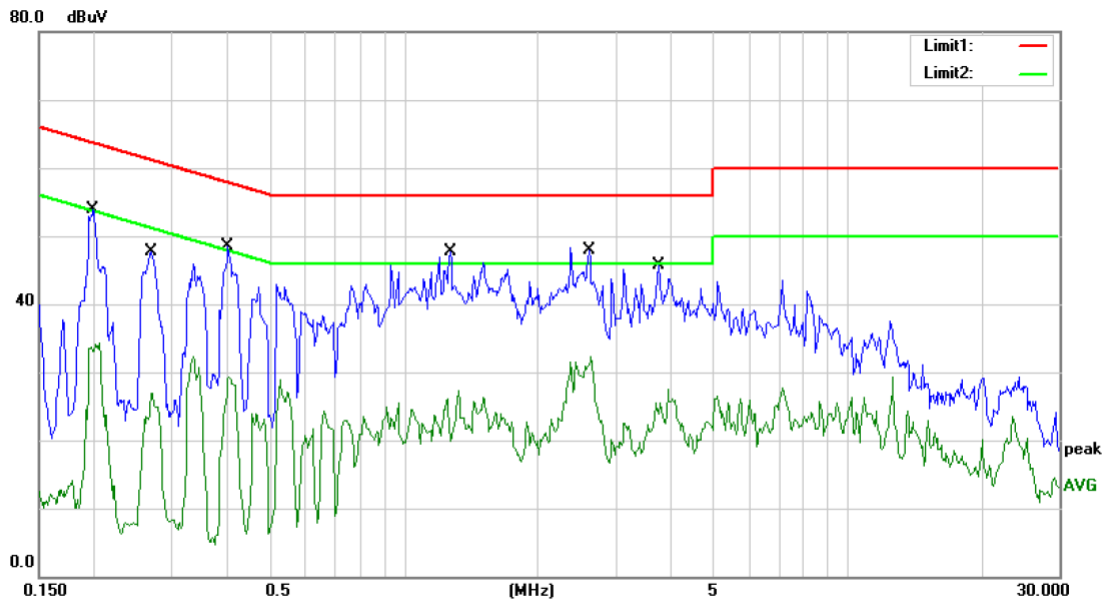


Site Conduction #1 Phase: **N** Temperature: 24  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 240V/50Hz Humidity: 53 %  
 Mode: ON  
 Note: Adapter 1

No.	Mk.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dB		
1		0.1985	53.94	0.00	53.94	63.67	-9.73	QP
2		0.1985	34.31	0.00	34.31	53.67	-19.36	AVG
3		0.2700	47.62	0.00	47.62	61.12	-13.50	QP
4		0.2700	26.99	0.00	26.99	51.12	-24.13	AVG
5		0.4000	48.47	0.00	48.47	57.85	-9.38	QP
6		0.4000	29.40	0.00	29.40	47.85	-18.45	AVG
7		1.2700	47.65	0.00	47.65	56.00	-8.35	QP
8		1.2700	27.30	0.00	27.30	46.00	-18.70	AVG
9	*	2.6150	47.94	0.00	47.94	56.00	-8.06	QP
10		2.6150	32.39	0.00	32.39	46.00	-13.61	AVG
11		3.7400	45.69	0.00	45.69	56.00	-10.31	QP
12		3.7400	27.47	0.00	27.47	46.00	-18.53	AVG

\*:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator: XY


Adapter 2:

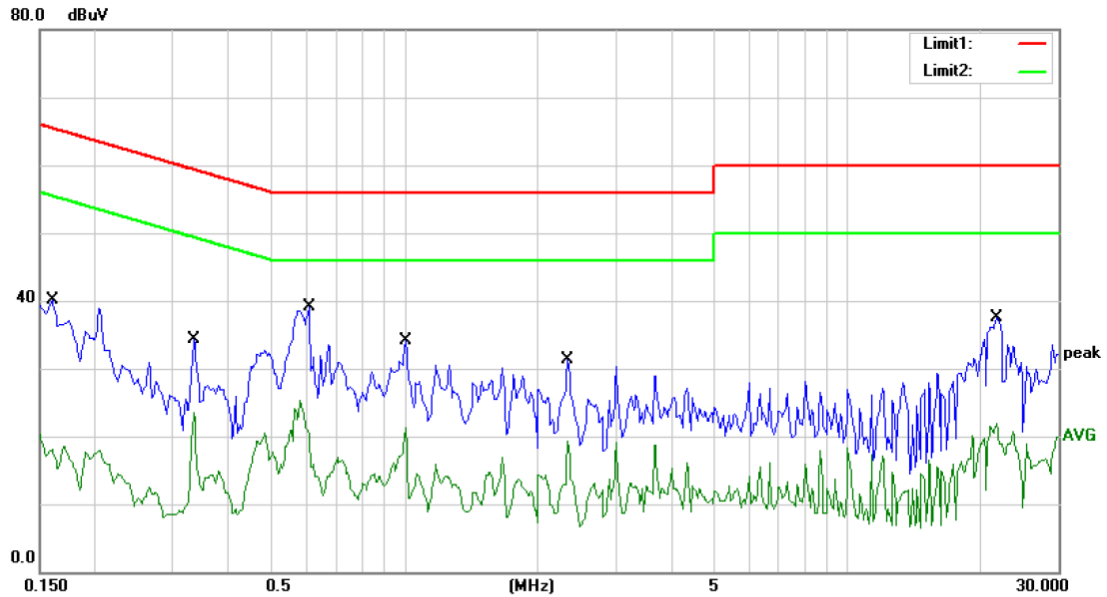

Site Conduction #2 Phase: **L1** Temperature: 26  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 120V/60Hz Humidity: 55 %  
 Mode: ON  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1600	40.10	0.00	40.10	65.46	-25.36	QP	
2		0.1600	20.22	0.00	20.22	55.46	-35.24	AVG	
3		0.3350	34.33	0.00	34.33	59.33	-25.00	QP	
4		0.3350	23.46	0.00	23.46	49.33	-25.87	AVG	
5	*	0.6100	39.03	0.00	39.03	56.00	-16.97	QP	
6		0.6100	25.27	0.00	25.27	46.00	-20.73	AVG	
7		1.0050	34.07	0.00	34.07	56.00	-21.93	QP	
8		1.0050	21.24	0.00	21.24	46.00	-24.76	AVG	
9		2.3400	31.35	0.00	31.35	56.00	-24.65	QP	
10		2.3400	19.39	0.00	19.39	46.00	-26.61	AVG	
11		21.7250	37.43	0.00	37.43	60.00	-22.57	QP	
12		21.7250	21.93	0.00	21.93	50.00	-28.07	AVG	

\*:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator: KK

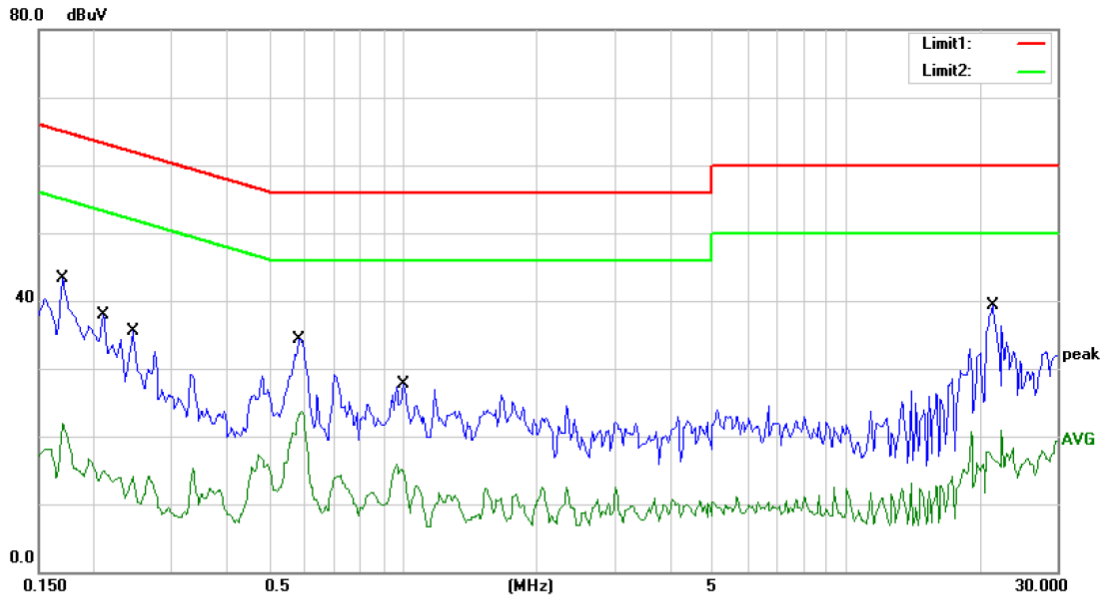


Site Conduction #2 Phase: **N** Temperature: 26  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 120V/60Hz Humidity: 55 %  
 Mode: ON  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1700	43.23	0.00	43.23	64.96	-21.73	QP	
2		0.1700	21.85	0.00	21.85	54.96	-33.11	AVG	
3		0.2100	37.95	0.00	37.95	63.21	-25.26	QP	
4		0.2100	14.94	0.00	14.94	53.21	-38.27	AVG	
5		0.2450	35.48	0.00	35.48	61.92	-26.44	QP	
6		0.2450	14.03	0.00	14.03	51.92	-37.89	AVG	
7		0.5800	34.33	0.00	34.33	56.00	-21.67	QP	
8		0.5800	23.68	0.00	23.68	46.00	-22.32	AVG	
9		1.0000	27.68	0.00	27.68	56.00	-28.32	QP	
10		1.0000	15.80	0.00	15.80	46.00	-30.20	AVG	
11	*	21.4000	39.39	0.00	39.39	60.00	-20.61	QP	
12		21.4000	20.83	0.00	20.83	50.00	-29.17	AVG	

\*:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator: KK




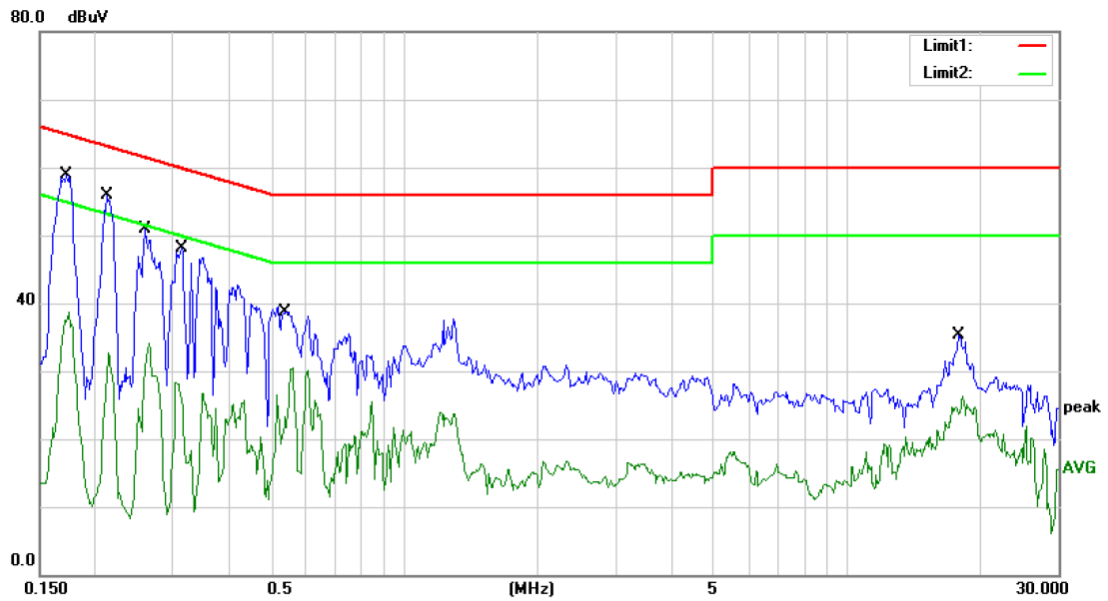

Site Conduction #1 Phase: **L1** Temperature: 24  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 240V/50Hz Humidity: 53 %  
 Mode: ON  
 Note: Adapter 2

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1720	58.80	0.00	58.80	64.86	-6.06	QP	
2		0.1720	38.69	0.00	38.69	54.86	-16.17	AVG	
3		0.2127	55.83	0.00	55.83	63.10	-7.27	QP	
4		0.2127	32.70	0.00	32.70	53.10	-20.40	AVG	
5		0.2600	50.85	0.00	50.85	61.43	-10.58	QP	
6		0.2600	34.08	0.00	34.08	51.43	-17.35	AVG	
7		0.3133	48.14	0.00	48.14	59.88	-11.74	QP	
8		0.3133	28.23	0.00	28.23	49.88	-21.65	AVG	
9		0.5400	38.74	0.00	38.74	56.00	-17.26	QP	
10		0.5400	30.51	0.00	30.51	46.00	-15.49	AVG	
11		17.9250	35.29	0.00	35.29	60.00	-24.71	QP	
12		17.9250	26.21	0.00	26.21	50.00	-23.79	AVG	

\*:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator: XY

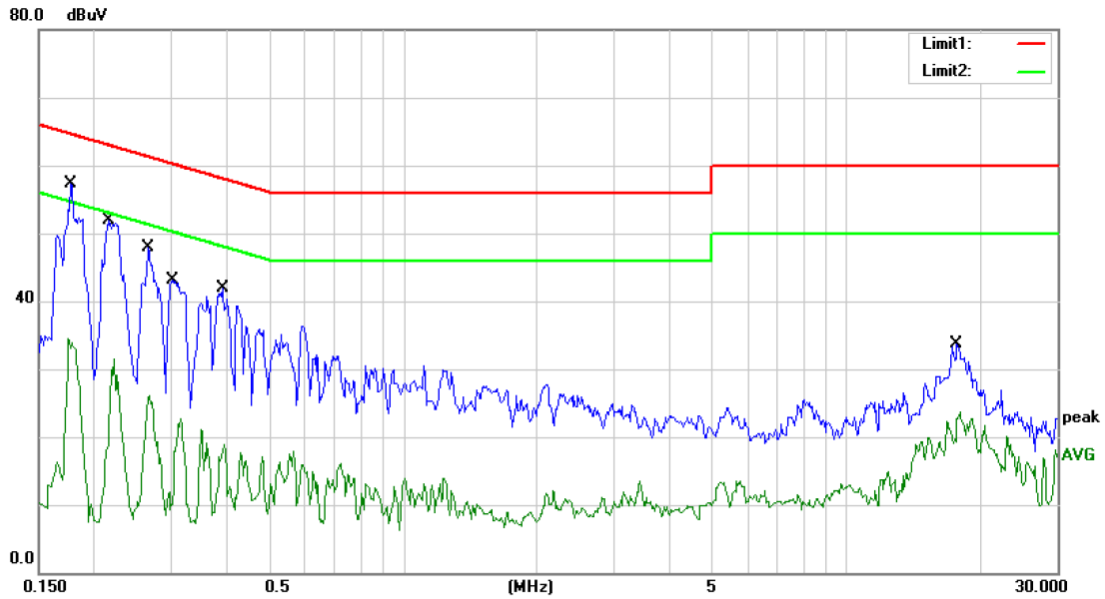

Site Conduction #1 Phase: **N** Temperature: 24  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 240V/50Hz Humidity: 53 %  
 Mode: ON  
 Note: Adapter 2

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1768	57.28	0.00	57.28	64.63	-7.35	QP	
2		0.1768	34.46	0.00	34.46	54.63	-20.17	AVG	
3		0.2162	51.85	0.00	51.85	62.96	-11.11	QP	
4		0.2162	31.45	0.00	31.45	52.96	-21.51	AVG	
5		0.2650	47.97	0.00	47.97	61.27	-13.30	QP	
6		0.2650	26.13	0.00	26.13	51.27	-25.14	AVG	
7		0.3003	43.17	0.00	43.17	60.23	-17.06	QP	
8		0.3003	22.77	0.00	22.77	50.23	-27.46	AVG	
9		0.3900	41.81	0.00	41.81	58.06	-16.25	QP	
10		0.3900	21.12	0.00	21.12	48.06	-26.94	AVG	
11		17.8250	33.64	0.00	33.64	60.00	-26.36	QP	
12		17.8250	23.64	0.00	23.64	50.00	-26.36	AVG	

\*:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator: XY

## 8.7 ANTENNA APPLICATION

### 8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### 8.7.2 Result

The EUT'S antenna is PCB antenna, and the antenna can't be replaced by the user, which in accordance to section 15.203, please refer to the internal photos. The antenna's gain is 2dBi and meets the requirement.

END OF REPORT