



# RADIO TESTREPORT

Report No:STS1904148W02


Issued for

Shenzhen Yifang Digital Technology Co., Ltd.

YIFANG Building, No. 315, Shuang Ming Avenue, Guang  
Ming Street, Guang Ming District, Shenzhen, Guangdong,  
China

<b>Product Name:</b>	WiFi Temperature&humidity sensor
<b>Brand Name:</b>	EFUN
<b>Model Name:</b>	SW83
<b>Series Model:</b>	SW83*("*"for 0-9,A-Z,-,or blank)
<b>FCC ID:</b>	S7JSW83
<b>Test Standard:</b>	FCC Part 15.247

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.





### TEST RESULT CERTIFICATION

**Applicant's Name** ..... : Shenzhen Yifang Digital Technology Co., Ltd.  
**Address** ..... : YIFANG Building, No. 315, Shuang Ming Avenue, Guang Ming Street, Guang Ming District, Shenzhen, Guangdong, China  
**Manufacture's Name** ..... : Shenzhen Yifang Digital Technology Co., Ltd.  
**Address** ..... : YIFANG Building, No. 315, Shuang Ming Avenue, Guang Ming Street, Guang Ming District, Shenzhen, Guangdong, China


#### Product Description


**Product Name** ..... : WiFi Temperature&humidity sensor  
**Brand Name** ..... : EFUN  
**Model Name** ..... : SW83  
**Series Model** ..... : SW83\* ("\*"for 0-9,A-Z,-,or blank)  
**Test Standards** ..... : FCC Part15.247  
**Test Procedure** ..... : ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

**Date of Test** ..... :  
**Date (s) of performance of tests** ..... : 10 Apr. 2019 ~ 24 Apr. 2019  
**Date of Issue** ..... : 06 May 2019  
**Test Result** ..... : **Pass**

Testing Engineer :   
 \_\_\_\_\_  
 (Chris Chen)

Technical Manager :   
 \_\_\_\_\_  
 (Sunday Hu)

Authorized Signatory :   
 \_\_\_\_\_  
 (Vita Li)

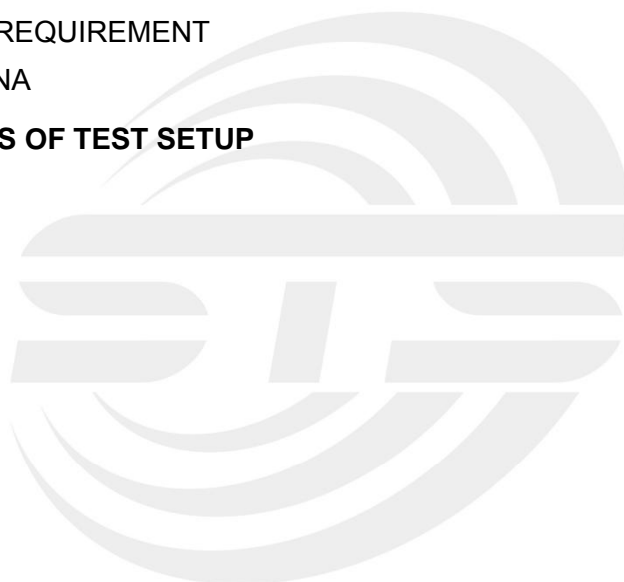




Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2. GENERAL INFORMATION</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	10
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.6 EQUIPMENTS LISTS	12
<b>3. EMC EMISSION TEST</b>	<b>13</b>
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 RADIATED EMISSION MEASUREMENT	15
<b>4.CONDUCTED SPURIOUS &amp; BAND EDGE EMISSION</b>	<b>27</b>
4.1 LIMIT	27
4.2 TEST PROCEDURE	27
4.3 DEVIATION FROM STANDARD	27
4.4 TEST SETUP	27
4.5 EUT OPERATION CONDITIONS	27
4.6 TEST RESULTS	28
<b>5. POWER SPECTRAL DENSITY TEST</b>	<b>37</b>
5.1 LIMIT	37
5.2 TEST PROCEDURE	37
5.3 DEVIATION FROM STANDARD	37
5.4 TEST SETUP	37
5.5 EUT OPERATION CONDITIONS	37
5.6 TEST RESULTS	38
<b>6. BANDWIDTH TEST</b>	<b>44</b>
6.1 LIMIT	44
6.2 TEST PROCEDURE	44
6.3 DEVIATION FROM STANDARD	44
6.4 TEST SETUP	44
6.5 EUT OPERATION CONDITIONS	44



Table of Contents	Page
6.6 TEST RESULTS	45
<b>7. PEAK OUTPUT POWER TEST</b>	<b>51</b>
7.1 LIMIT	51
7.2 TEST PROCEDURE	51
7.3 DEVIATION FROM STANDARD	51
7.4 TEST SETUP	51
7.5 EUT OPERATION CONDITIONS	51
7.6 TEST RESULTS	52
<b>8. ANTENNA REQUIREMENT</b>	<b>53</b>
8.1 STANDARD REQUIREMENT	53
8.2 EUT ANTENNA	53
<b>APPENDIX-PHOTOS OF TEST SETUP</b>	<b>54</b>





**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	06 May 2019	STS1904148W02	ALL	Initial Issue





## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:  
KDB 558074 D01 15.247 Meas Guidance v05r02

FCC Part 15.247,Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.247 (c)	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

### NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) all tests are according to ANSI C63.10-2013 .



### 1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,  
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

FCC test Firm Registration Number: 625569

A2LA Certificate No.: 4338.01;

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.71\text{dB}$
2	Unwanted Emissions, conducted	$\pm 0.63\text{dB}$
3	All emissions, radiated 30-200MHz	$\pm 3.43\text{dB}$
4	All emissions, radiated 200MHz-1GHz	$\pm 3.57\text{dB}$
5	All emissions, radiated >1G	$\pm 4.13\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 3.18\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 2.70\text{dB}$



## 2. GENERAL INFORMATION

## 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	WiFi Temperature&humidity sensor														
Trade Name	EFUN														
Model Name	SW83														
Series Model	SW83*("*"for 0-9,A-Z,-,or blank)														
Model Difference	Different model name used in different sales markets and colors.														
Product Description	<p>The EUT is a WiFi Temperature&amp;humidity sensor</p> <table border="1"> <tr> <td>Operation Frequency:</td> <td>802.11b/g/n 20: 2412~2462 MHz</td> </tr> <tr> <td>Modulation Type:</td> <td>802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM</td> </tr> <tr> <td>Bit Rate of Transmitter:</td> <td>802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz): 65/58.5/52/39/26/19.5/13/6.5Mbps</td> </tr> <tr> <td>Number of Channel:</td> <td>802.11b/g/n20: 11CH</td> </tr> <tr> <td>Antenna Designation:</td> <td>Please see Note 3.</td> </tr> <tr> <td>AntennaGain (dBi):</td> <td>3 dBi</td> </tr> <tr> <td>Duty Cycle:</td> <td>&gt;98%</td> </tr> </table>	Operation Frequency:	802.11b/g/n 20: 2412~2462 MHz	Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM	Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz): 65/58.5/52/39/26/19.5/13/6.5Mbps	Number of Channel:	802.11b/g/n20: 11CH	Antenna Designation:	Please see Note 3.	AntennaGain (dBi):	3 dBi	Duty Cycle:	>98%
Operation Frequency:	802.11b/g/n 20: 2412~2462 MHz														
Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM														
Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz): 65/58.5/52/39/26/19.5/13/6.5Mbps														
Number of Channel:	802.11b/g/n20: 11CH														
Antenna Designation:	Please see Note 3.														
AntennaGain (dBi):	3 dBi														
Duty Cycle:	>98%														
Channel List	Please refer to the Note 2.														
Power Rating	Input: DC 6V from battery														
Hardware version number	V1.1														
Software versionnumber	V1.0.2														
Connecting I/O Port(s)	Please refer to the User's Manual														

## Note:

- 1 For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.





2

Operation Frequency of channel	
802.11b/g/n(20MHz)	
Channel	Frequency
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

3 Note:  
 In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:  
 Carrier Frequency Channel

2.4GHz Test Frequency:

For 802.11b/g/n (HT20)	
Channel	Freq.(MHz)
01	2412
06	2437
11	2462

3

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	EFUN	SW83	PCB	N/A	3 dBi	WLAN Antenna



## 2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1 Mbps
Mode 2	TX IEEE 802.11b CH6	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH1	6 Mbps
Mode 5	TX IEEE 802.11g CH6	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n HT20 CH1	MCS 0
Mode 8	TX IEEE 802.11n HT20 CH6	MCS 0
Mode 9	TX IEEE 802.11n HT20 CH11	MCS 0

Note:

The measurements are performed at all Bit Rate of Transmitter, the worst data was reported


## 2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode Or Modulation type	Ant Gain(dBi)	Power Class	Software For Testing
WIFI(2.4G)	2.4G WIFI	802.11b	3	16	ESP Series Modules FCC & CE Test Tool
		802.11g		16	
		802.11n(HT20)		16	

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiation Test Set



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	Notebook	DELL	VOSTRO.3800	N/A	N/A
C-1	USB Cable	N/A	100cm	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



## 2.6 EQUIPMENTS LISTS

## Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2018.10.13	2019.10.12
Signal Analyzer	Agilent	N9020A	MY51110105	2019.03.02	2020.03.01
Active loop Antenna	ZHINAN	ZN30900C	16035	2018.03.11	2021.03.10
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.1
Horn Antenna	SCHWARZBECK	BBHA 9120D(1201)	9120D-1343	2018.10.19	2021.10.18
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2021.03.10
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2018.10.13	2019.10.12
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK201808090 1	2018.10.13	2019.10.12
Pre-Amplifier (18G-40GHz)	SKET	LNPA-1840-50	SK201810180 1	2018.10.13	2019.10.12
Temperature & Humidity	HH660	Mieo	N/A	2018.10.11	2019.10.10
turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A

## RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2018.10.13	2019.10.12
Signal Analyzer	Agilent	N9020A	MY49100060	2018.10.13	2019.10.12
Temperature & Humidity	HH660	Mieo	N/A	2018.10.11	2019.10.10



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

operating frequency band. In case the emission fall within the restricted band specified on Part 15.207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.1.2 TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

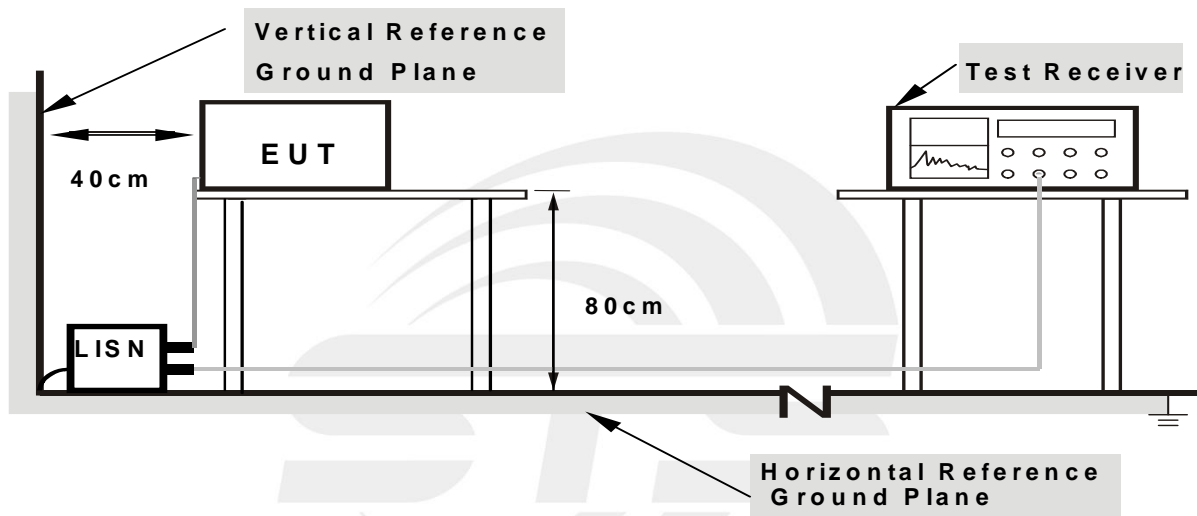

- Note: 1. Support units were connected to second LISN.**  
**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

### 3.1.4 TEST RESULT

Temperature:	24.4°C	Relative Humidity:	65%
Test Voltage:	N/A	Phase:	L/N
Test Mode:	N/A		

Note: EUT is only power by battery, So it is not applicable for this test.



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS

in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Band edge

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2300 to 2412 MHz Upper Band Edge: 2462to 2500 MHz
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz
- The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note:

Both horizontal and vertical antenna polarities were tested and performed test to three orthogonal axis. The worst case emissions were reported




### 3.2.3 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

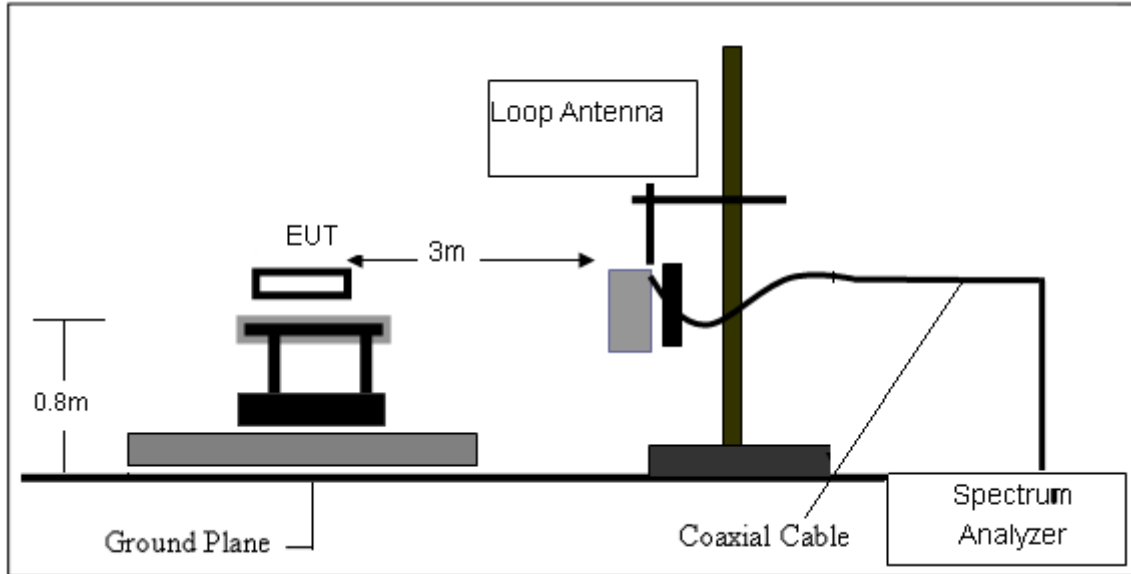

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

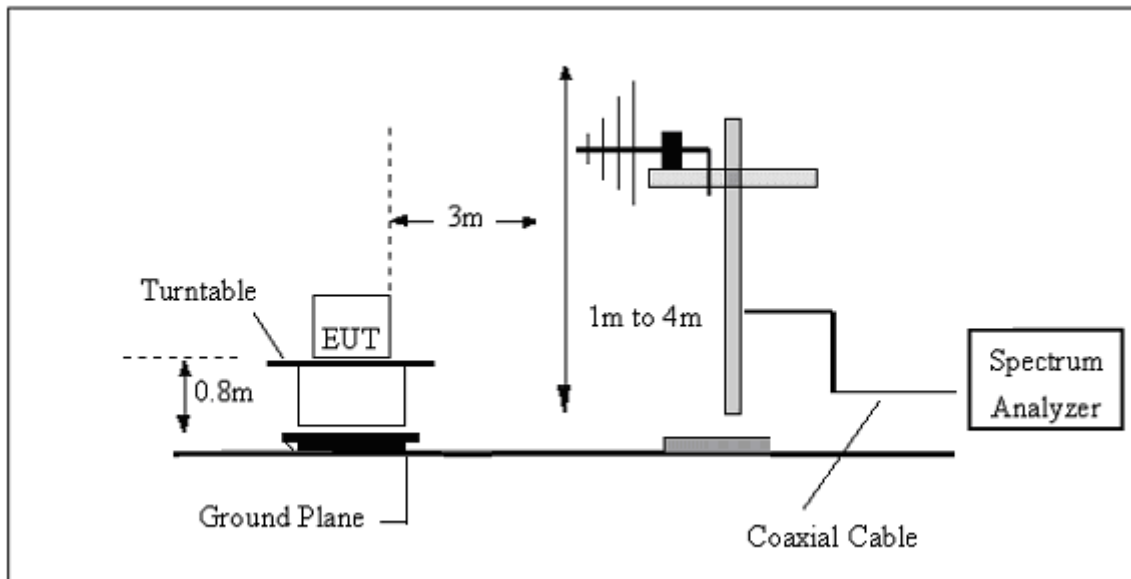

## (C) Radiated Emission Test-Up Frequency Above 1GHz

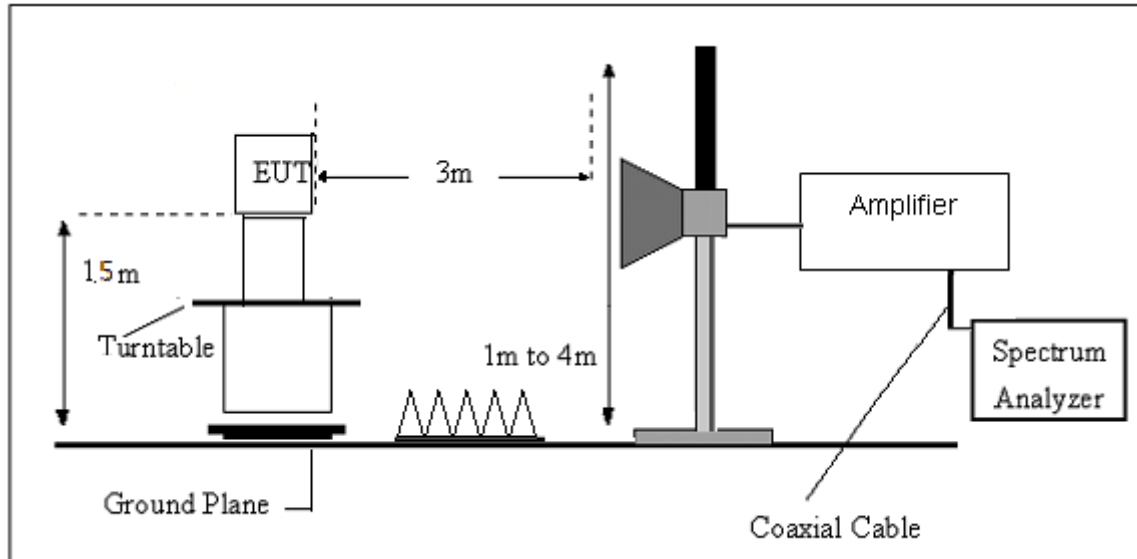

### 3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$





## 3.2.6 TEST RESULT

9KHz-30MHz

Temperature:	24.4℃	Relative Humidity:	65%
Test Voltage:	DC 6V	Polarization:	--
Test Mode:	TX Mode		


Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

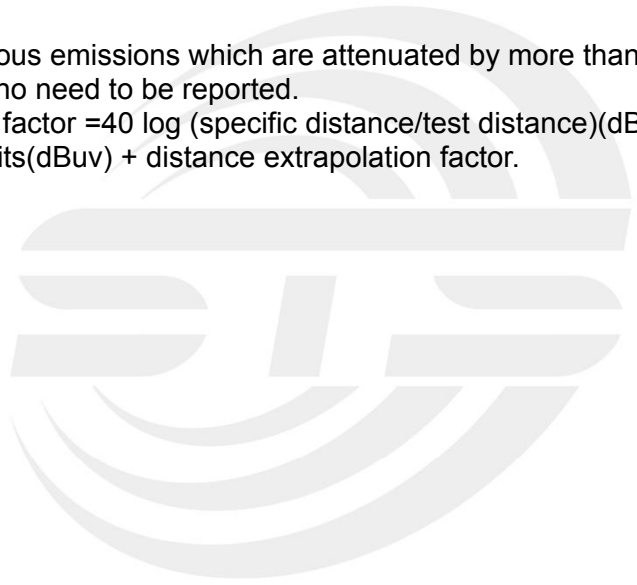



(30MHz - 1000MHz)


Temperature:	24.4°C	Relative Humidity:	65%
Test Voltage:	DC 6V	Polarization:	Horizontal
Test Mode:	Mode 1/2/3/4/5/6/7/8/9 (Mode 3 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.2991	36.05	-15.96	20.09	40.00	-19.91	QP
2	54.4515	41.55	-22.75	18.80	40.00	-21.20	QP
3	112.9196	36.61	-18.15	18.46	43.50	-25.04	QP
4	171.9944	38.11	-19.35	18.76	43.50	-24.74	QP
5	274.1938	34.34	-15.61	18.73	46.00	-27.27	QP
6	734.4913	31.06	-3.83	27.23	46.00	-18.77	QP

Remark:

1. Margin = Result (Result = Reading + Factor) - Limit

80.0 dBuV/m

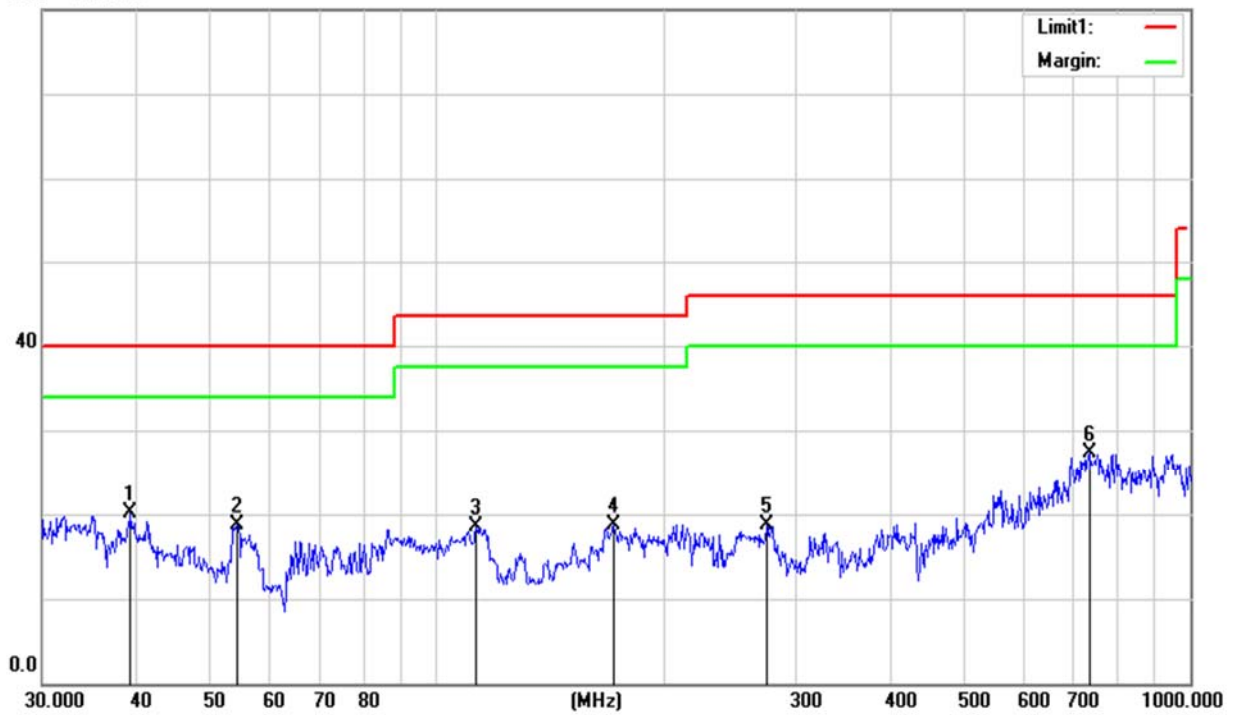




Temperature:	24.4 °C	Relative Humidity:	65%
Test Voltage:	DC 6V	Polarization:	Vertical
Test Mode:	Mode 1/2/3/4/5/6/7/8/9 (Mode 3 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.5623	35.15	-13.02	22.13	40.00	-17.87	QP
2	79.2425	43.26	-22.80	20.46	40.00	-19.54	QP
3	106.0126	37.07	-18.68	18.39	43.50	-25.11	QP
4	266.6090	32.29	-15.33	16.96	46.00	-29.04	QP
5	584.7894	28.15	-6.82	21.33	46.00	-24.67	QP
6	952.0937	27.31	-0.36	26.95	46.00	-19.05	

Remark:.

1. Margin = Result (Result = Reading + Factor) – Limit

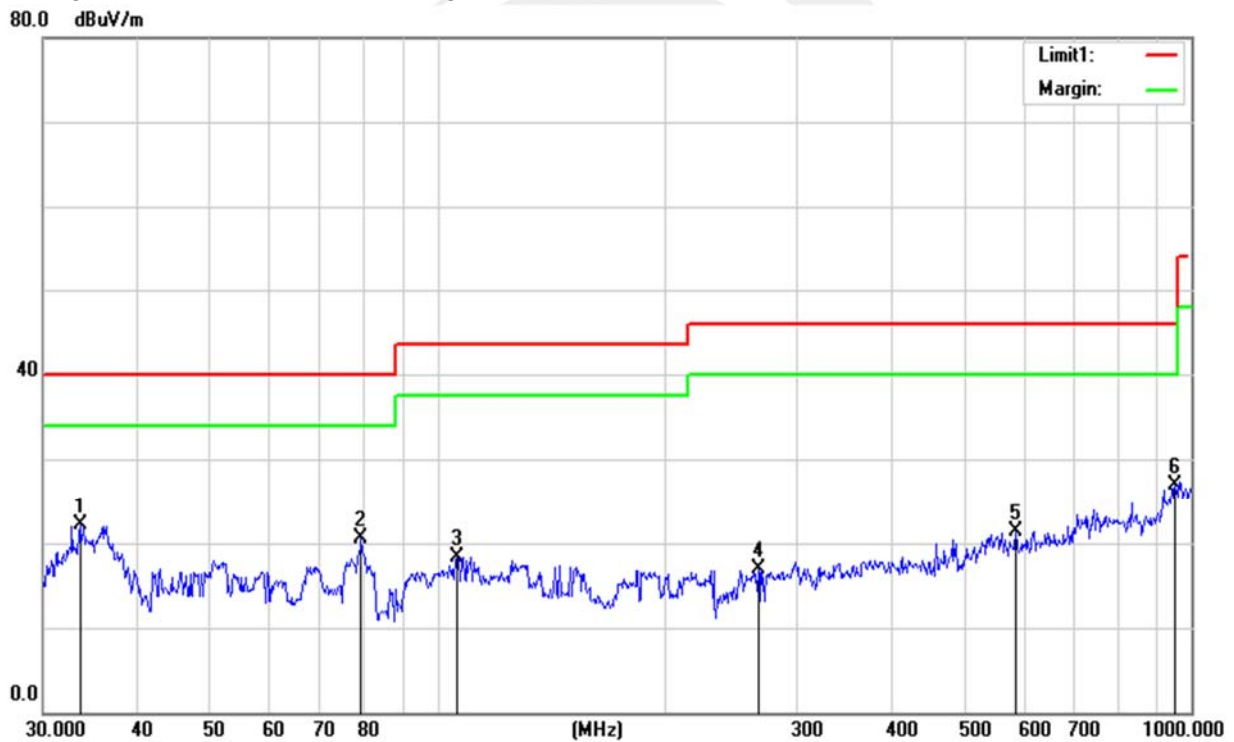



(1000MHz-25GHz) Restricted band and Spurious emission Requirements

802.11g

Frequency (MHz)	Meter Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (2412 MHz)										
3264.61	61.50	44.70	6.70	28.20	-9.80	51.70	74.00	-22.30	PK	Vertical
3264.61	50.68	44.70	6.70	28.20	-9.80	40.88	54.00	-13.12	AV	Vertical
3264.62	61.55	44.70	6.70	28.20	-9.80	51.75	74.00	-22.25	PK	Horizontal
3264.62	49.96	44.70	6.70	28.20	-9.80	40.16	54.00	-13.84	AV	Horizontal
4824.54	59.13	44.20	9.04	31.60	-3.56	55.57	74.00	-18.43	PK	Vertical
4824.54	49.37	44.20	9.04	31.60	-3.56	45.81	54.00	-8.19	AV	Vertical
4824.61	58.89	44.20	9.04	31.60	-3.56	55.33	74.00	-18.67	PK	Horizontal
4824.61	50.00	44.20	9.04	31.60	-3.56	46.44	54.00	-7.56	AV	Horizontal
5359.63	48.27	44.20	9.86	32.00	-2.34	45.93	74.00	-28.07	PK	Vertical
5359.63	39.61	44.20	9.86	32.00	-2.34	37.27	54.00	-16.73	AV	Vertical
5359.85	48.40	44.20	9.86	32.00	-2.34	46.06	74.00	-27.94	PK	Horizontal
5359.85	39.24	44.20	9.86	32.00	-2.34	36.90	54.00	-17.10	AV	Horizontal
7235.88	54.17	43.50	11.40	35.50	3.40	57.57	74.00	-16.43	PK	Vertical
7235.88	44.32	43.50	11.40	35.50	3.40	47.72	54.00	-6.28	AV	Vertical
7235.79	54.28	43.50	11.40	35.50	3.40	57.68	74.00	-16.32	PK	Horizontal
7235.82	44.66	43.50	11.40	35.50	3.40	48.06	54.00	-5.94	AV	Vertical
Middle Channel (2437 MHz)										
3264.79	61.68	44.70	6.70	28.20	-9.80	51.88	74.00	-22.12	PK	Vertical
3264.79	50.53	44.70	6.70	28.20	-9.80	40.73	54.00	-13.27	AV	Vertical
3264.59	61.39	44.70	6.70	28.20	-9.80	51.59	74.00	-22.41	PK	Horizontal
3264.59	50.21	44.70	6.70	28.20	-9.80	40.41	54.00	-13.59	AV	Horizontal
4874.41	58.65	44.20	9.04	31.60	-3.56	55.09	74.00	-18.91	PK	Vertical
4874.41	49.15	44.20	9.04	31.60	-3.56	45.59	54.00	-8.41	AV	Vertical
4874.52	58.53	44.20	9.04	31.60	-3.56	54.97	74.00	-19.03	PK	Horizontal
4874.52	50.35	44.20	9.04	31.60	-3.56	46.79	54.00	-7.21	AV	Horizontal
5359.82	48.42	44.20	9.86	32.00	-2.34	46.08	74.00	-27.92	PK	Vertical
5359.82	39.69	44.20	9.86	32.00	-2.34	37.35	54.00	-16.65	AV	Vertical
5359.67	48.53	44.20	9.86	32.00	-2.34	46.19	74.00	-27.81	PK	Horizontal
5359.67	39.10	44.20	9.86	32.00	-2.34	36.76	54.00	-17.24	AV	Horizontal
7310.89	55.01	43.50	11.40	35.50	3.40	58.41	74.00	-15.59	PK	Vertical
7310.89	43.91	43.50	11.40	35.50	3.40	47.31	54.00	-6.69	AV	Vertical
7310.92	54.03	43.50	11.40	35.50	3.40	57.43	74.00	-16.57	PK	Horizontal
7310.92	43.75	43.50	11.40	35.50	3.40	47.15	54.00	-6.85	AV	Horizontal



High Channel (2462 MHz)										
3264.89	61.96	44.70	6.70	28.20	-9.80	52.16	74.00	-21.84	PK	Vertical
3264.89	51.11	44.70	6.70	28.20	-9.80	41.31	54.00	-12.69	AV	Vertical
3264.69	61.27	44.70	6.70	28.20	-9.80	51.47	74.00	-22.53	PK	Horizontal
3264.69	51.08	44.70	6.70	28.20	-9.80	41.28	54.00	-12.72	AV	Horizontal
4924.45	59.52	44.20	9.04	31.60	-3.56	55.96	74.00	-18.04	PK	Vertical
4924.45	49.83	44.20	9.04	31.60	-3.56	46.27	54.00	-7.73	AV	Vertical
4924.37	59.48	44.20	9.04	31.60	-3.56	55.92	74.00	-18.08	PK	Horizontal
4924.37	49.97	44.20	9.04	31.60	-3.56	46.41	54.00	-7.59	AV	Horizontal
5359.85	48.11	44.20	9.86	32.00	-2.34	45.77	74.00	-28.23	PK	Vertical
5359.85	39.69	44.20	9.86	32.00	-2.34	37.35	54.00	-16.65	AV	Vertical
5359.73	48.05	44.20	9.86	32.00	-2.34	45.71	74.00	-28.29	PK	Horizontal
5359.73	38.17	44.20	9.86	32.00	-2.34	35.83	54.00	-18.17	AV	Horizontal
7385.87	54.54	43.50	11.40	35.50	3.40	57.94	74.00	-16.06	PK	Vertical
7385.87	44.11	43.50	11.40	35.50	3.40	47.51	54.00	-6.49	AV	Vertical
7385.96	54.05	43.50	11.40	35.50	3.40	57.45	74.00	-16.55	PK	Horizontal
7385.96	44.33	43.50	11.40	35.50	3.40	47.73	54.00	-6.27	AV	Horizontal

## Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Scan with 802.11b, 802.11g, 802.11n (HT-20), the worst case is 802.11g.  
Emission Level = Reading + Factor  
Margin = Limit - Emission Level
- The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.






3.2.6 TEST RESULTS(Band edge Requirements)


802.11g-Low

Horizontal

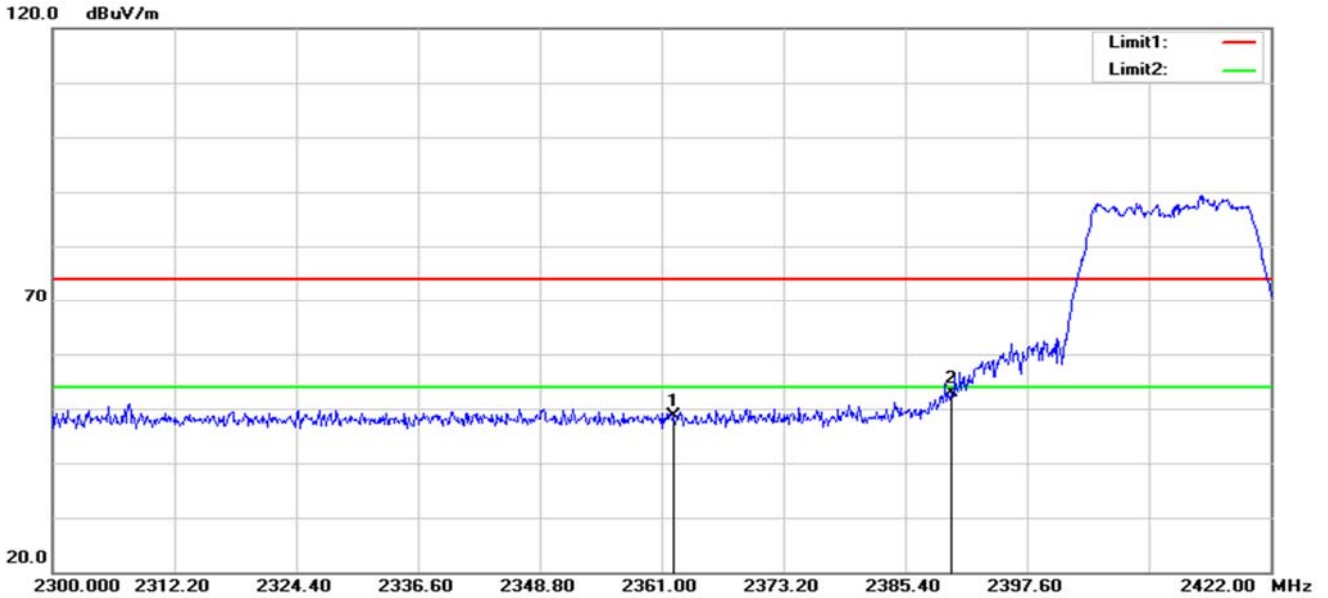

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2362.220	59.27	-10.67	48.60	74.00	-25.40	peak
2	2390.000	63.37	-10.48	52.89	74.00	-21.11	peak


Vertical

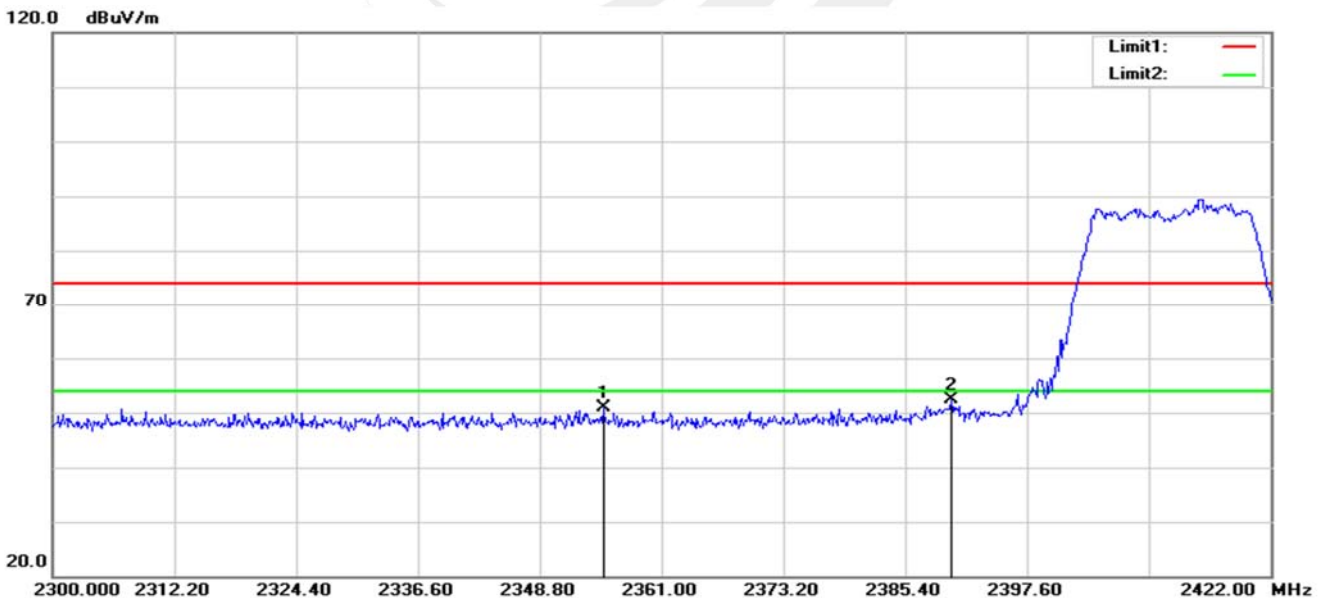

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2355.144	61.49	-10.71	50.78	74.00	-23.22	peak
2	2390.000	62.80	-10.48	52.32	74.00	-21.68	peak




802.11g-High  
Horizontal

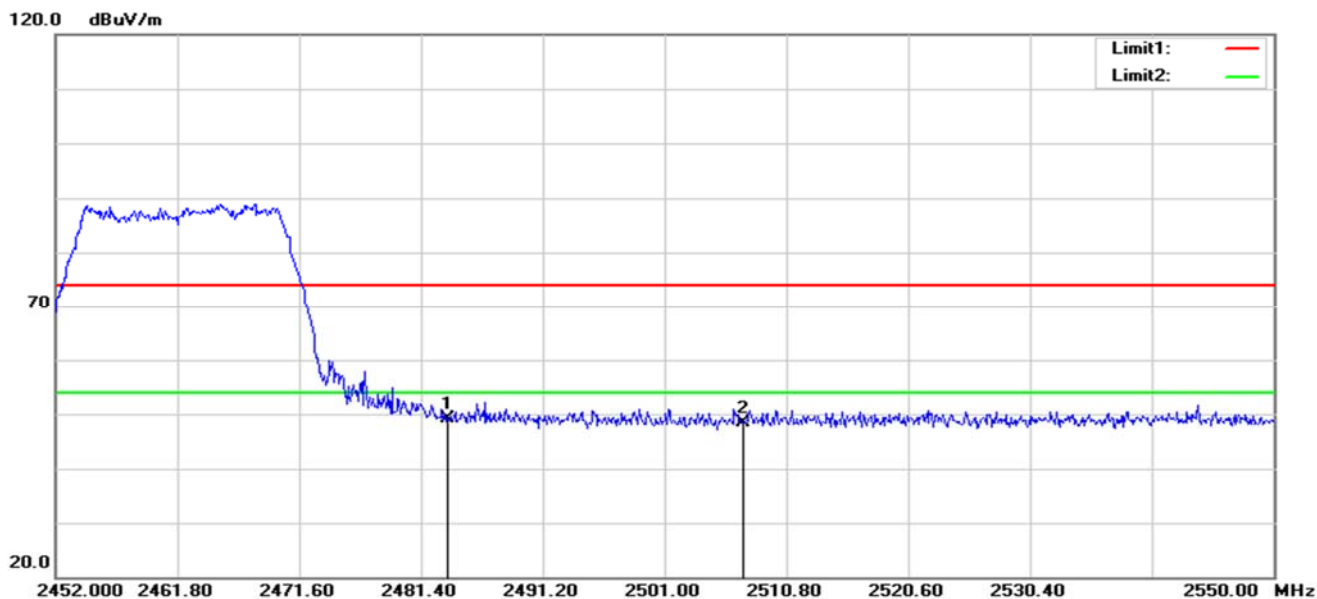

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	59.21	-9.99	49.22	74.00	-24.78	peak
2	2507.370	58.20	-9.89	48.31	74.00	-25.69	peak

Vertical

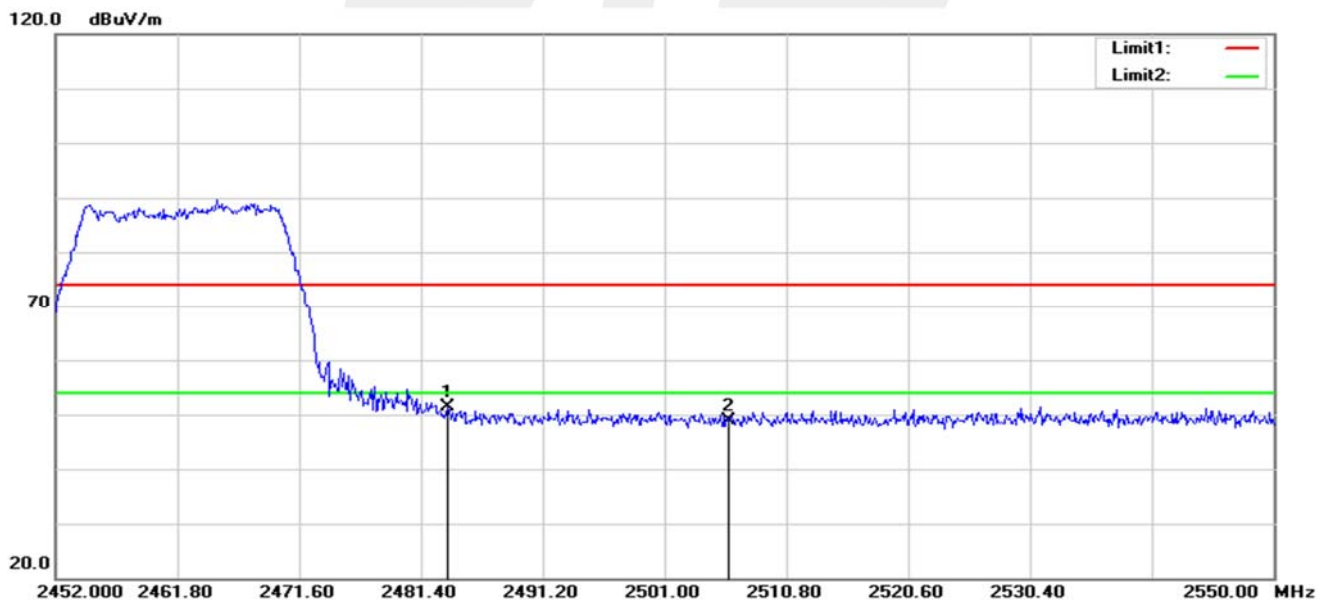

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.32	-9.99	51.33	74.00	-22.67	peak
2	2506.194	58.73	-9.89	48.84	74.00	-25.16	peak

Note: 802.11b, 802.11g, 802.11n (HT-20) mode all have been tested, the worst case is 802.11g, only show the worst case.

#### 4.CONDUCTED SPURIOUS & BAND EDGE EMISSION

##### 4.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

##### 4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2412 MHz Upper Band Edge: 2462to 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

##### 4.3 DEVIATION FROM STANDARD

No deviation.

##### 4.4 TEST SETUP



The EUT which is powered by the Battery, is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

##### 4.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




4.6 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 6V	Test Mode:	TX b Mode /CH01, CH06, CH11

CH 01

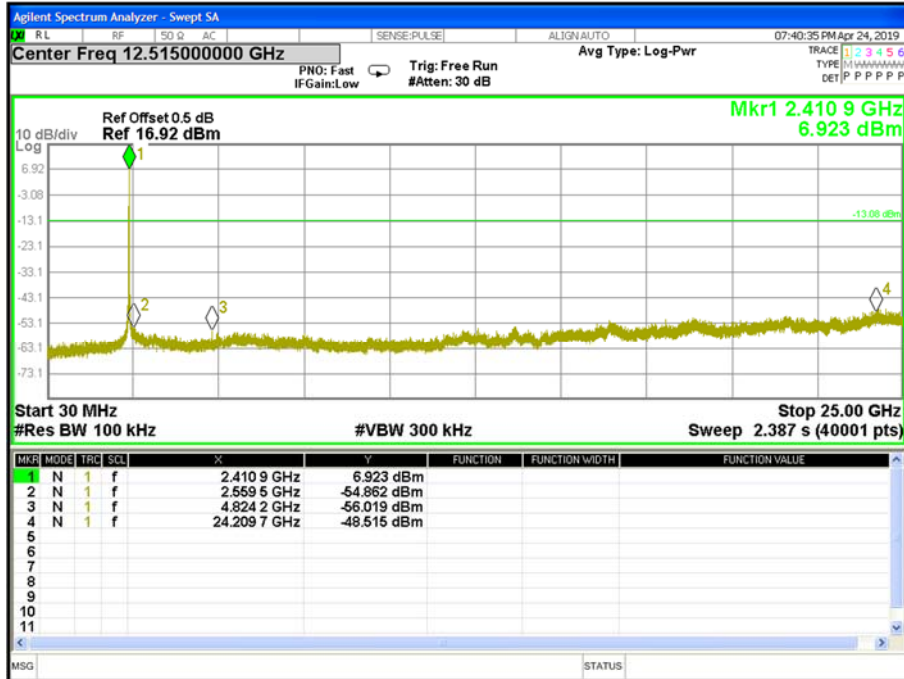


CH 06

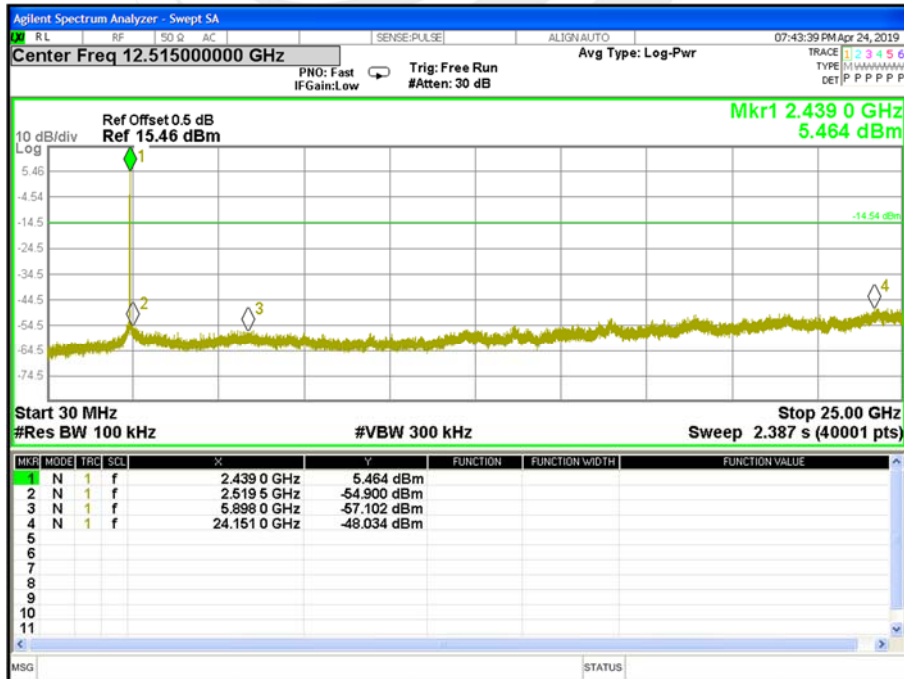




CH 11

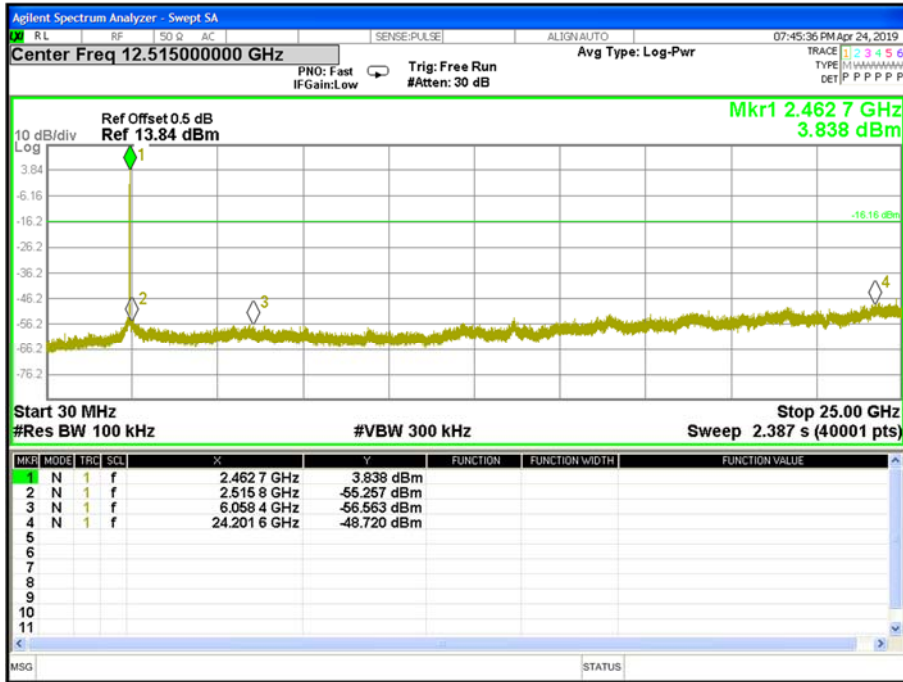




Band edge

CH 01

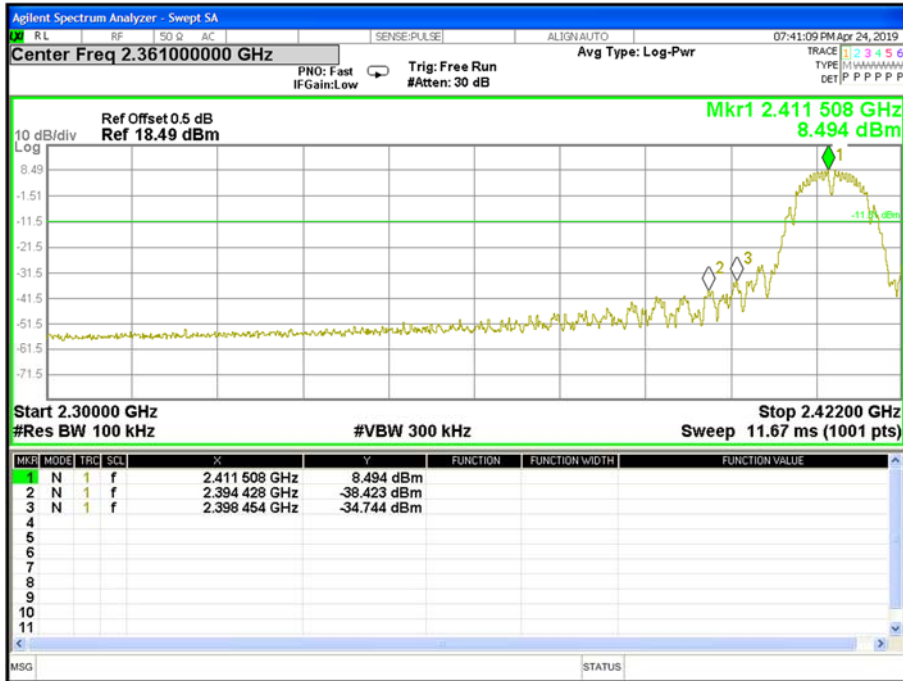

CH 11

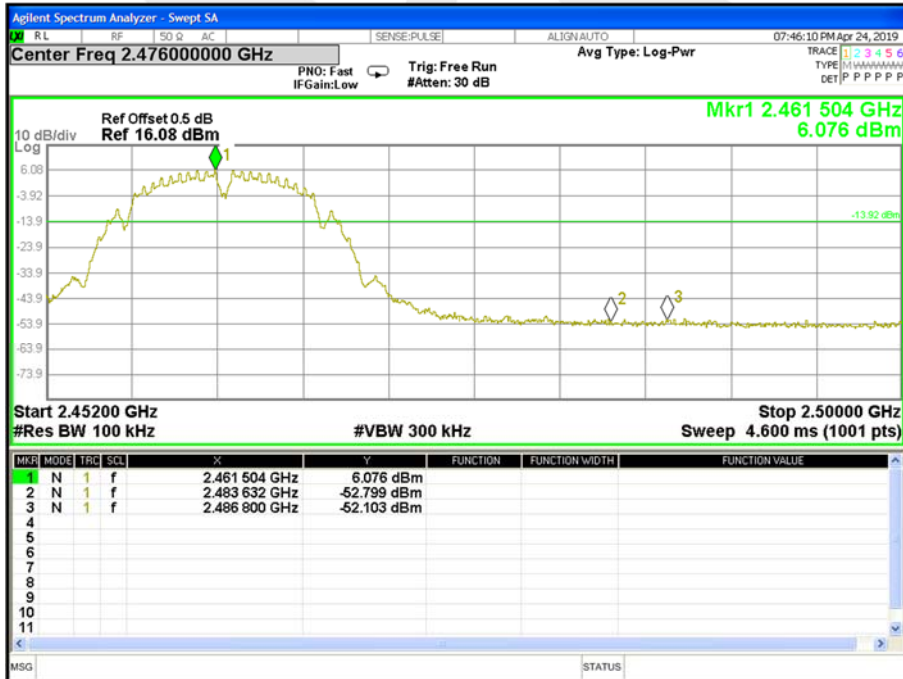







Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 6V	Test Mode:	TX g Mode /CH01, CH06, CH11

CH 01

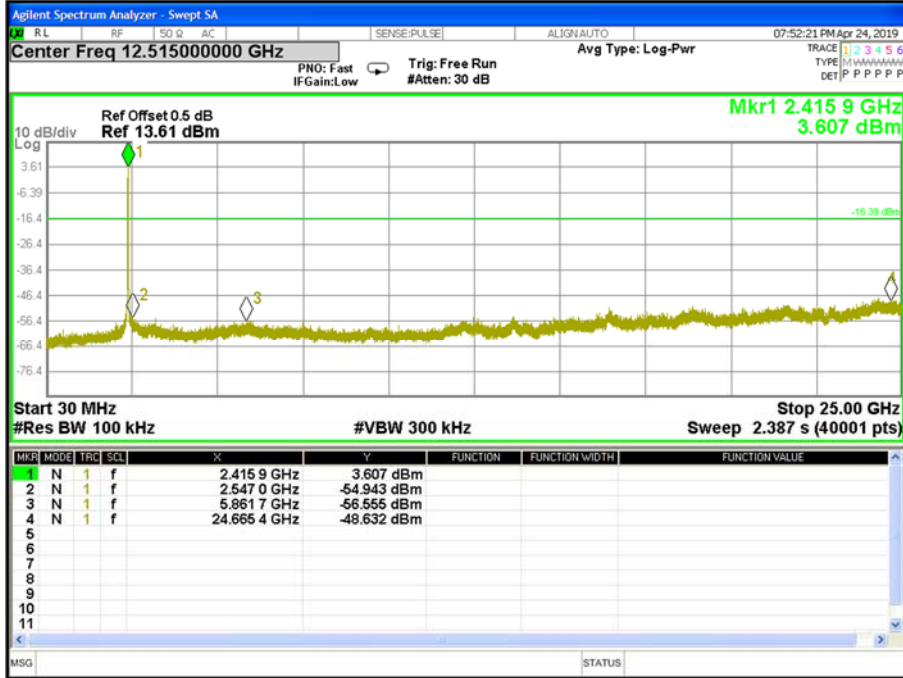


CH06

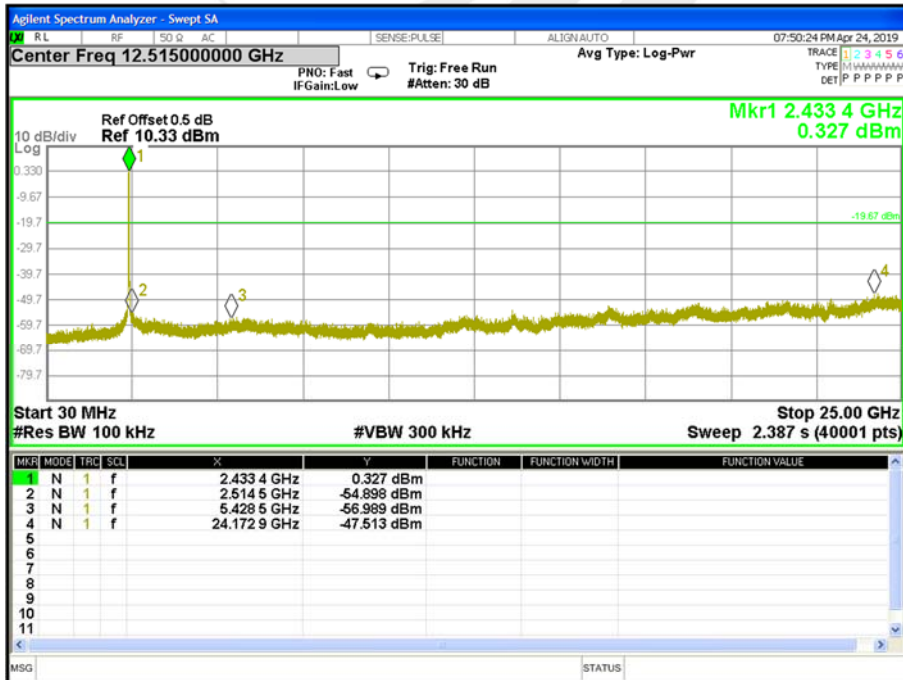



CH 11

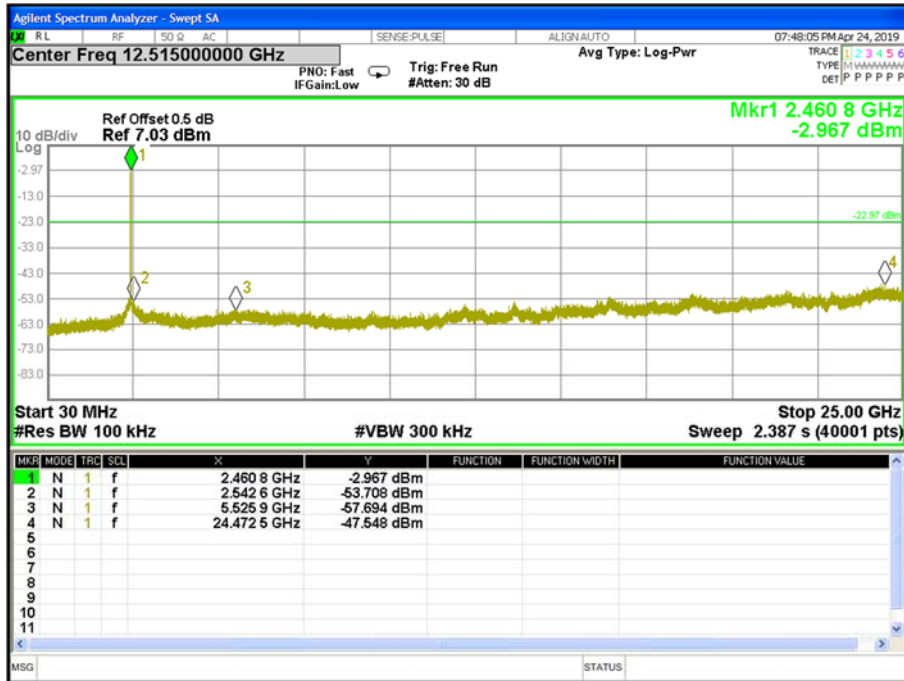







Band edge

CH 01

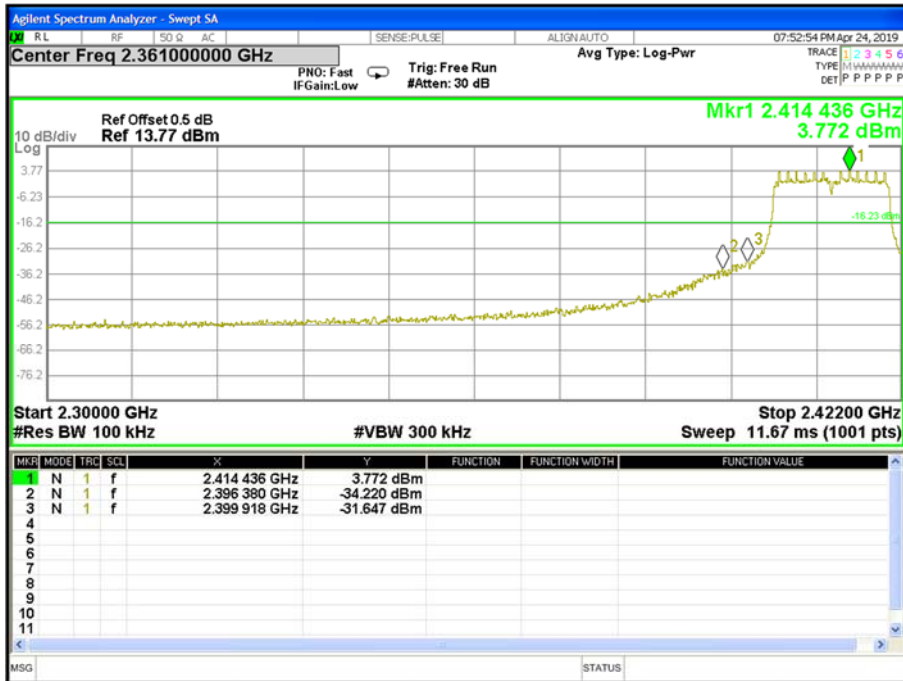


CH11

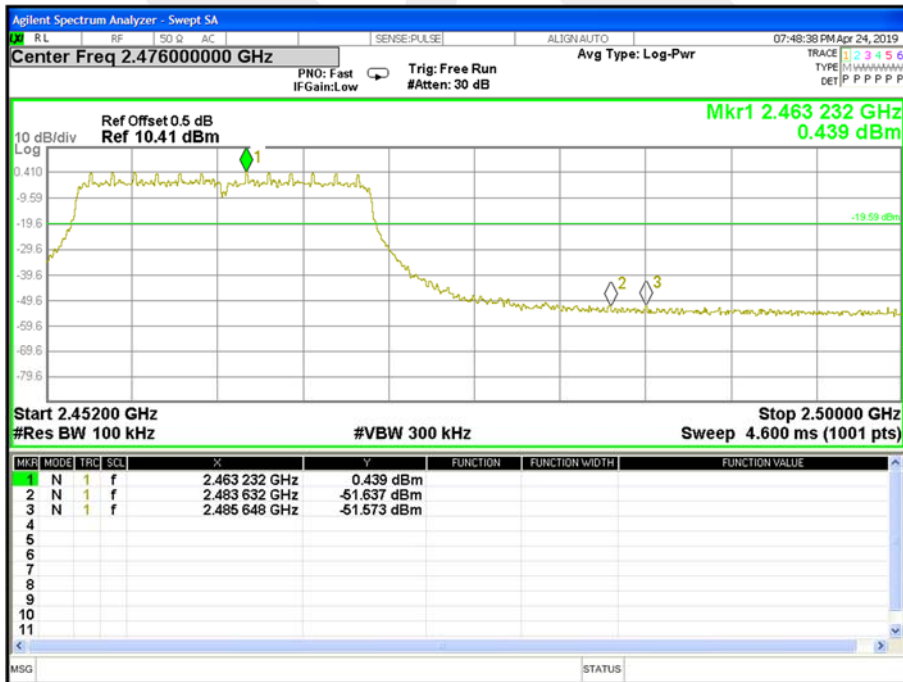




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 6V	Test Mode:	TX n Mode(20M) /CH01, CH06, CH11

CH 01

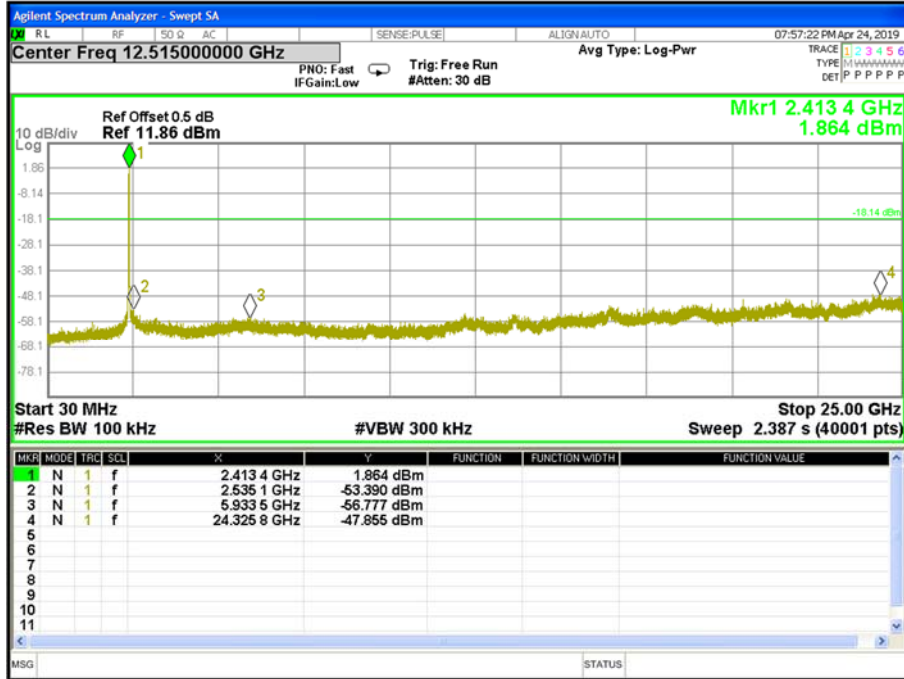


CH 06

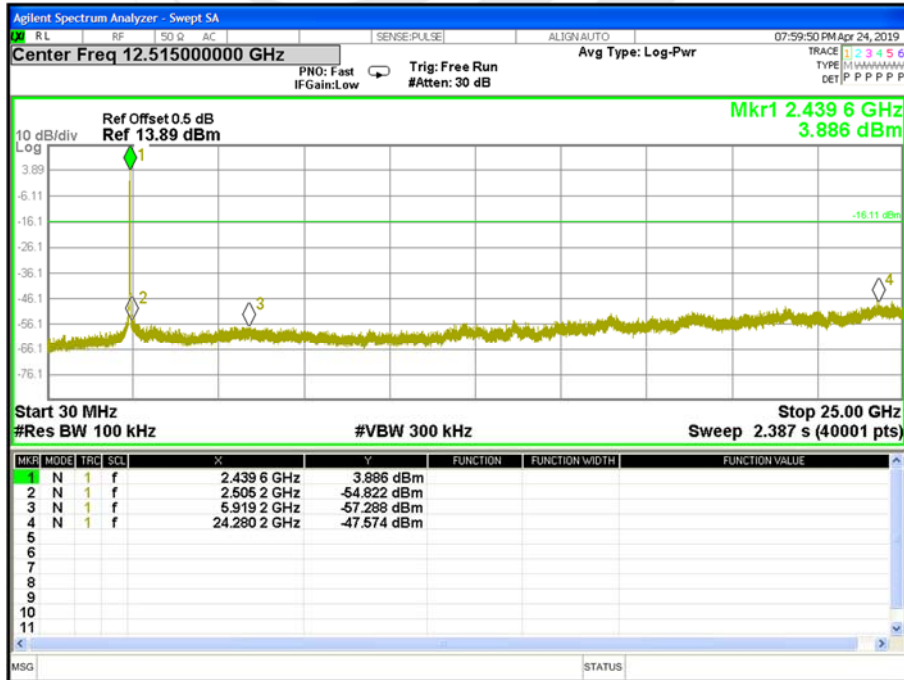




CH 11

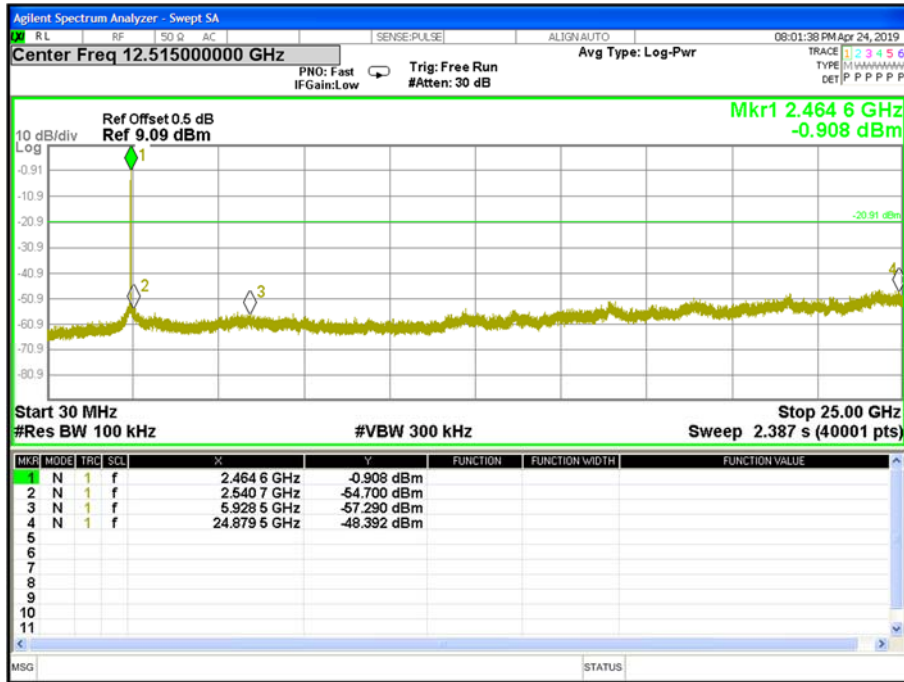




Band edge

CH 01

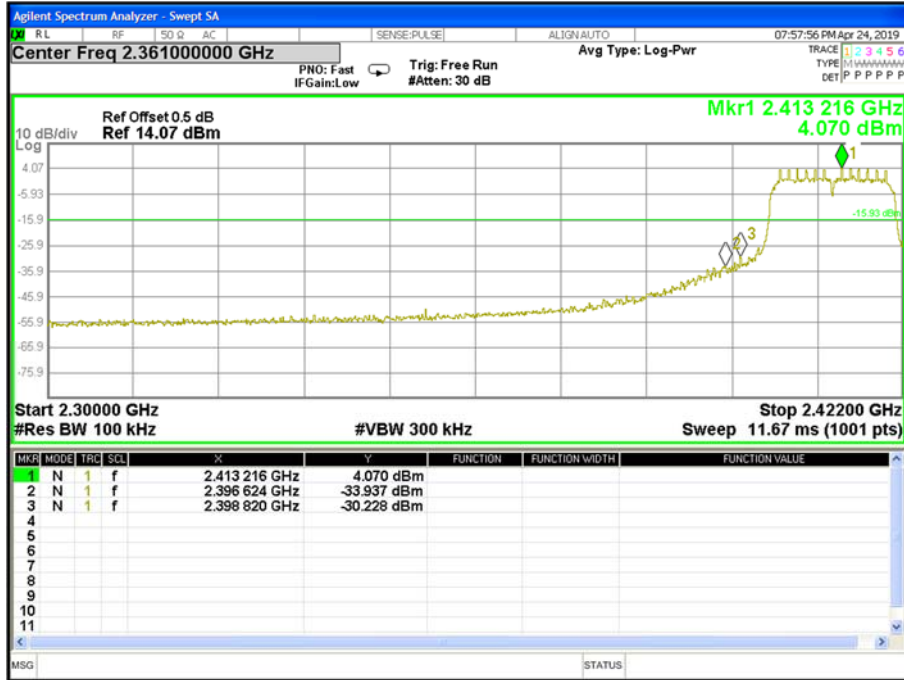

CH 11

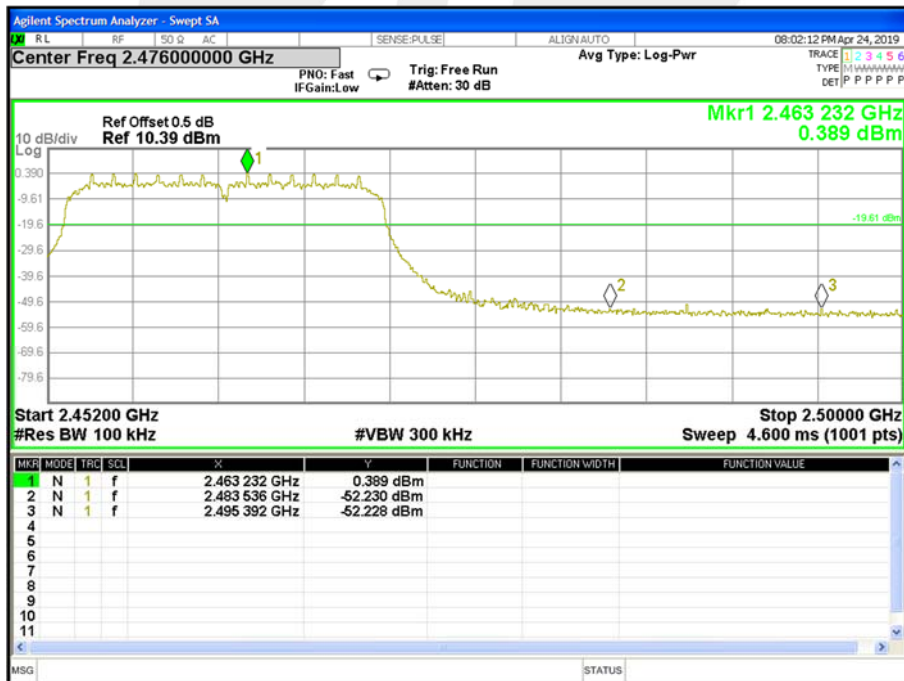



## 5. POWER SPECTRAL DENSITY TEST

### 5.1 LIMIT

FCC Part15.247 , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	$\leq 8$ dBm (RBW $\geq 3$ KHz)	2400-2483.5	PASS

### 5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the  $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$ .
4. Set the  $\text{VBW} \geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.3 DEVIATION FROM STANDARD

No deviation.

### 5.4 TEST SETUP



### 5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




5.6 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 6V	Test Mode:	TX b Mode /CH01, CH06, CH11


Frequency	Power Density	Limit (dBm/3KHz)	Result
	(dBm/3kHz)		
2412 MHz	-7.14	≤8	PASS
2437 MHz	-7.322	≤8	PASS
2462 MHz	-9.326	≤8	PASS

TX CH01

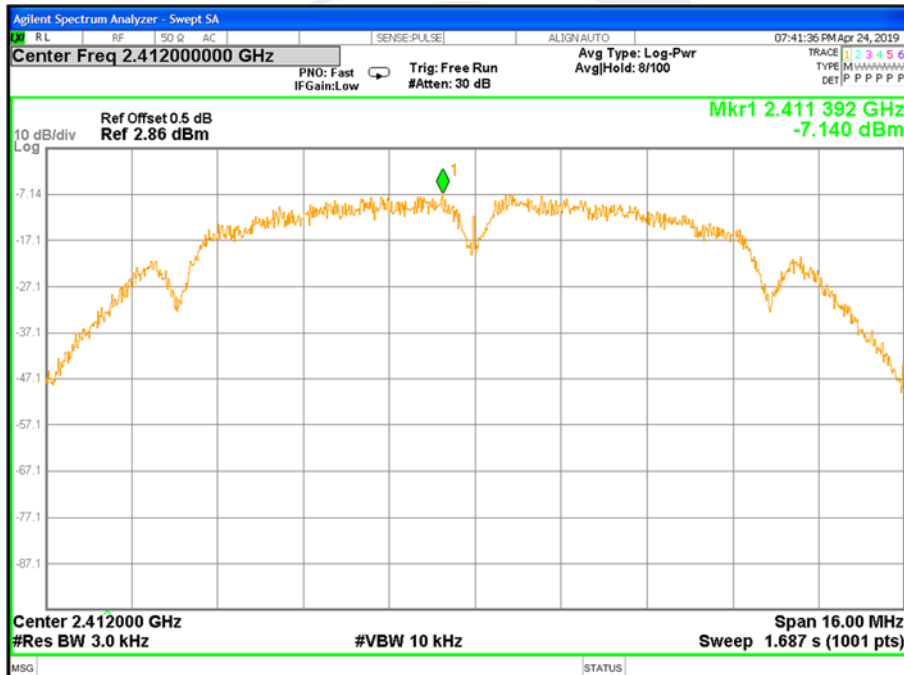




### TX CH06

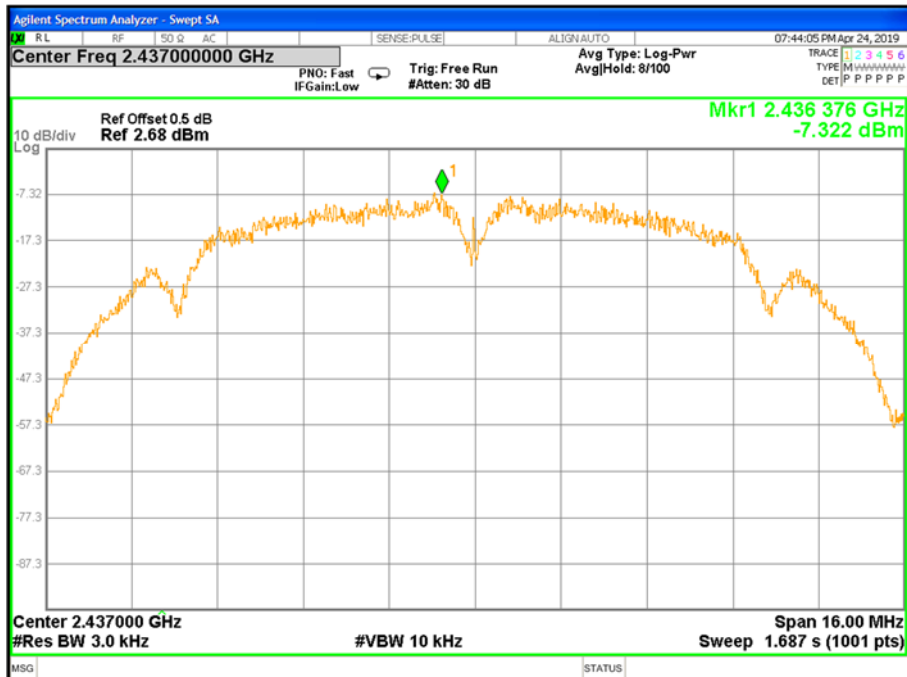

### TX CH11

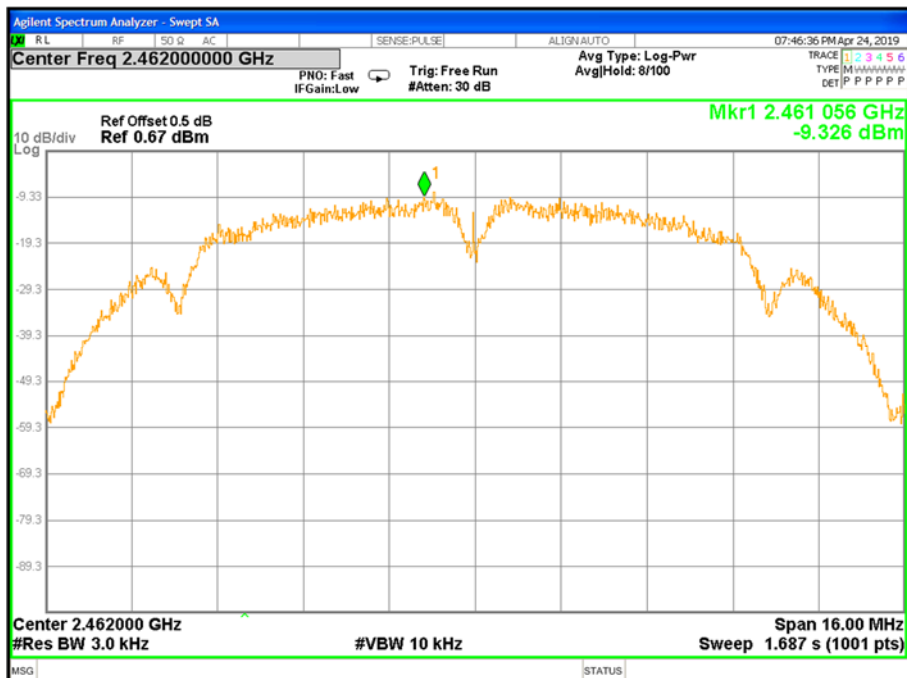




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 6V	Test Mode:	TX g Mode /CH01, CH06, CH11

Frequency	Power Density	Limit (dBm/3KHz)	Result
	(dBm/3kHz)		
2412 MHz	-11.1	≤8	PASS
2437 MHz	-10.337	≤8	PASS
2462 MHz	-13.166	≤8	PASS


**TX CH01**

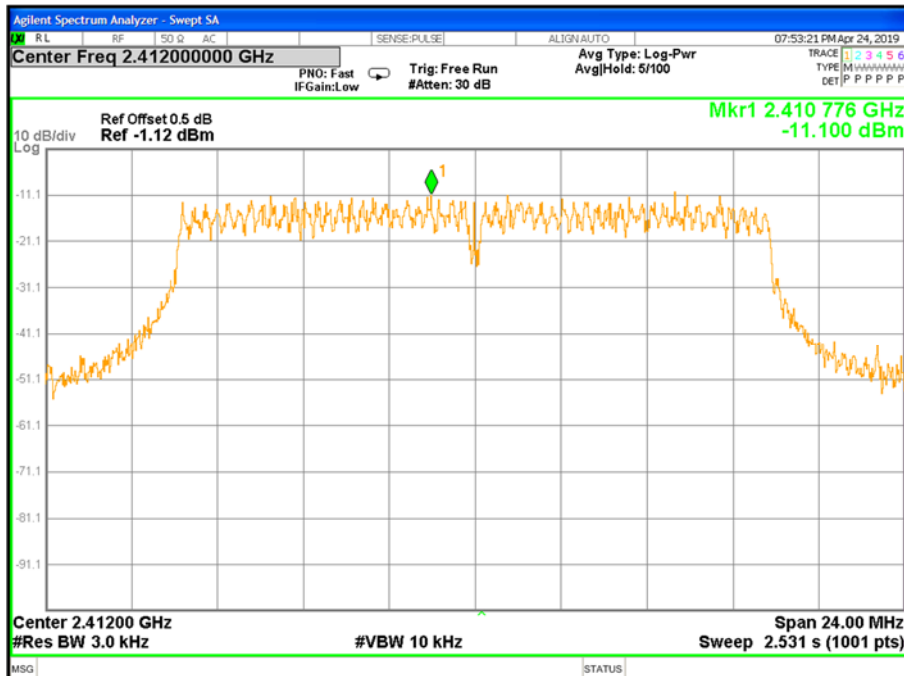






### TX CH06

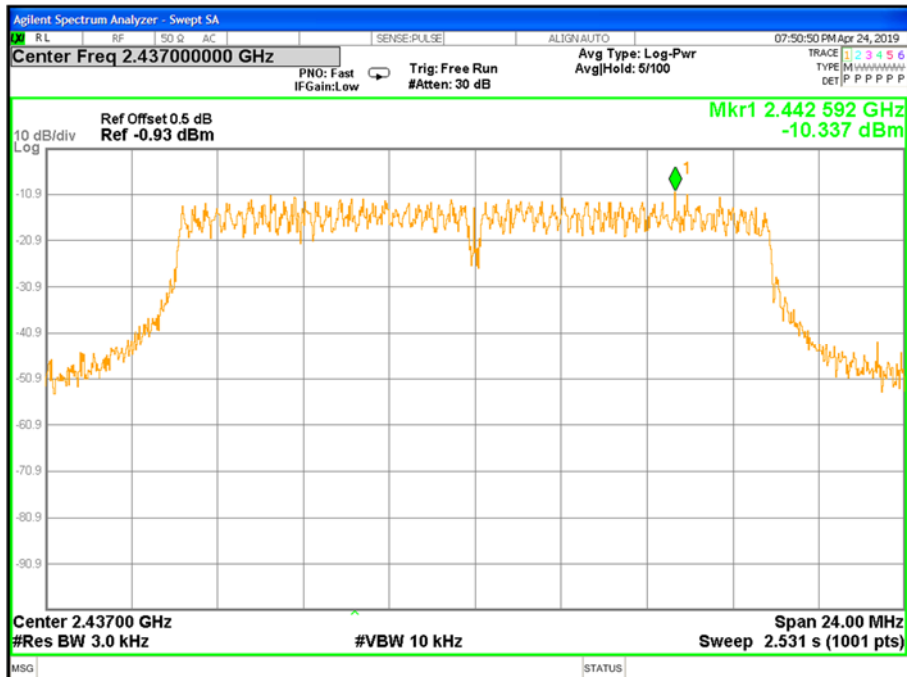

### TX CH11

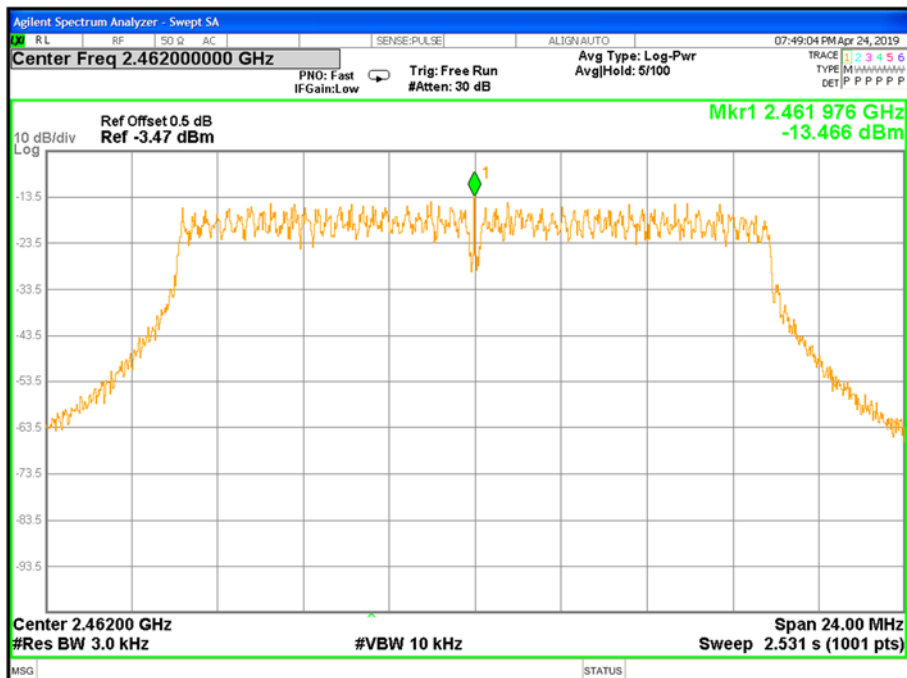




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 6V	Test Mode:	TX n Mode(20M) /CH01, CH06, CH11


Frequency	Power Density	Limit (dBm/3KHz)	Result
	(dBm/3kHz)		
2412 MHz	-11.032	≤8	PASS
2437 MHz	-10.777	≤8	PASS
2462 MHz	-14.014	≤8	PASS

**TX CH01**

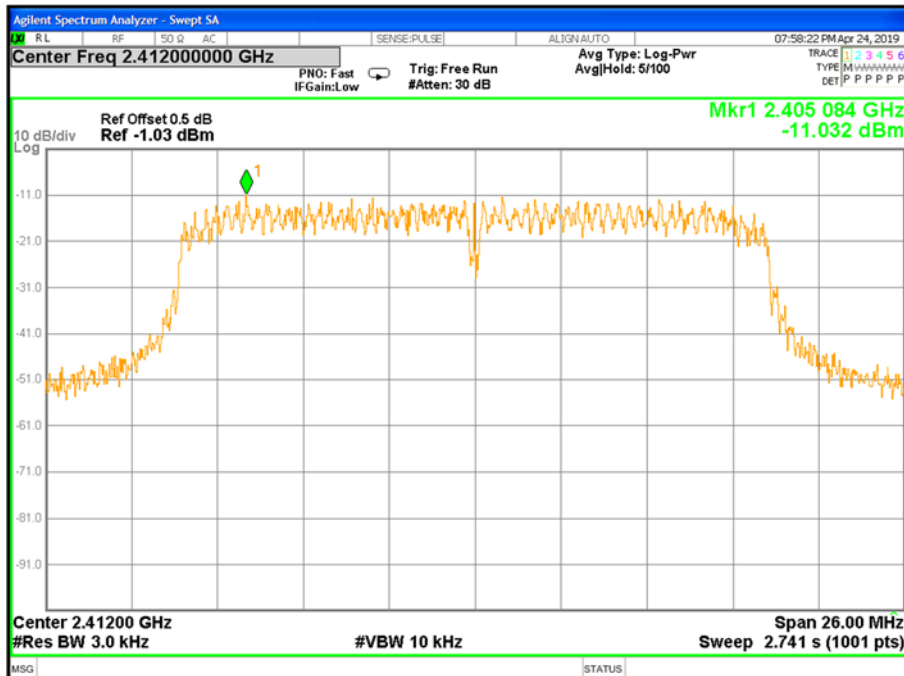




### TX CH06

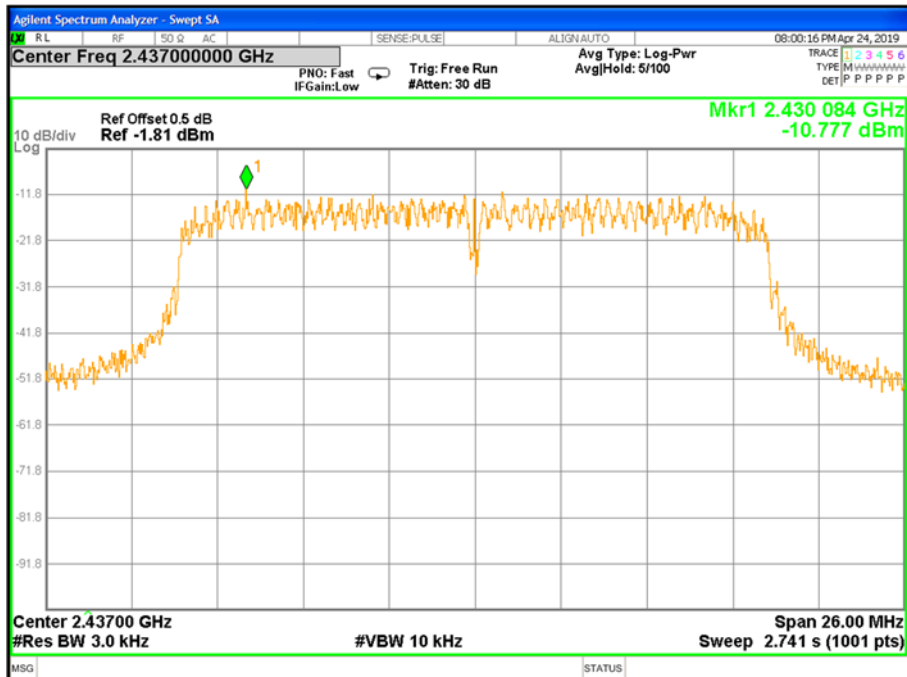

### TX CH11

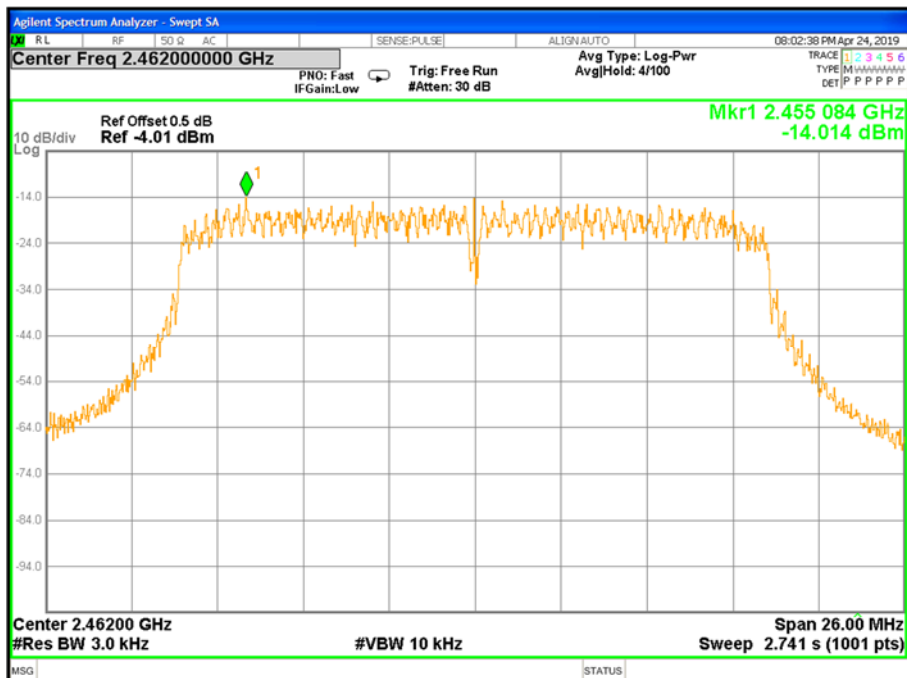



## 6. BANDWIDTH TEST

### 6.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

### 6.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




6.6 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 6V	Test Mode:	TX b Mode /CH01, CH06, CH11

Remark: PEAK DETECTOR IS USED


Frequency	6dB Bandwidth	6dB Bandwidth Limit	Result
	(MHz)	(KHz)	
2412 MHz	9.013	≥500KHz	PASS
2437 MHz	8.073	≥500KHz	PASS
2462 MHz	8.070	≥500KHz	PASS

TX CH 01

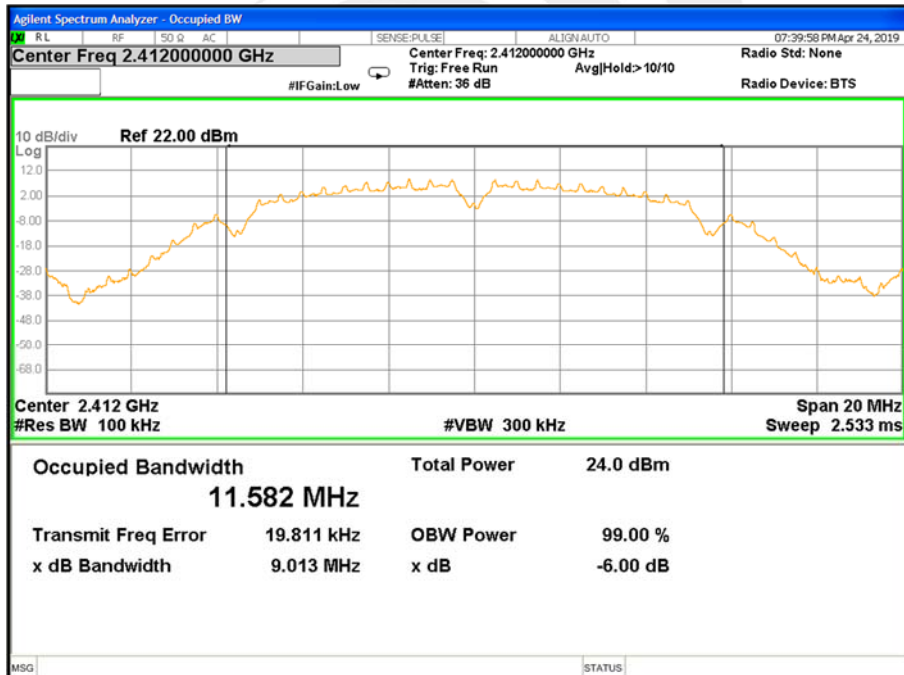




### TX CH 06

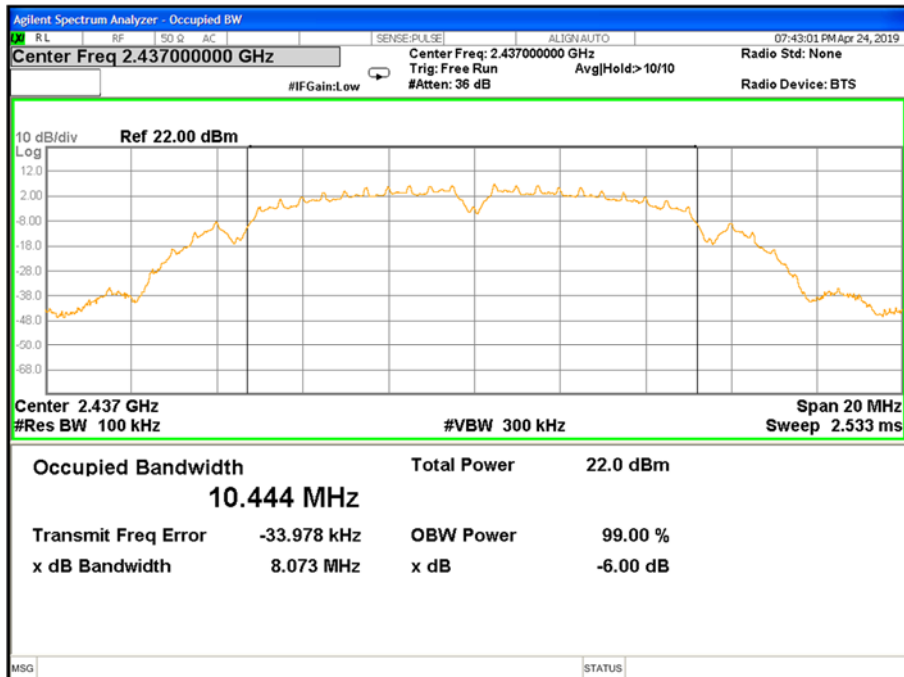

### TX CH 11

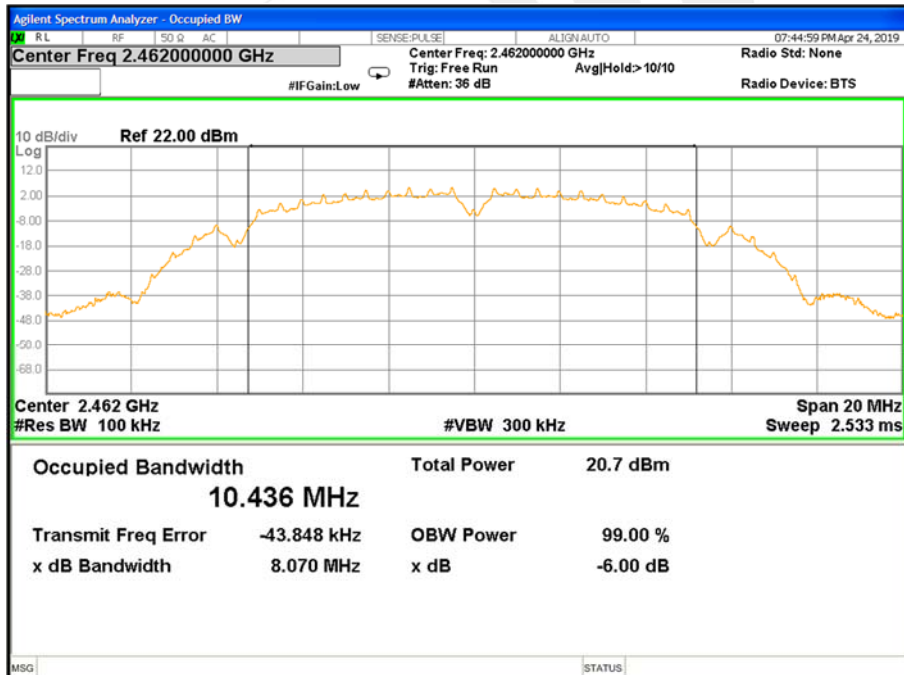




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 6V	Test Mode:	TX g Mode /CH01, CH06, CH11


Frequency	6dB Bandwidth	6dB Bandwidth Limit	Result
	(MHz)	(KHz)	
2412 MHz	16.04	≥500KHz	PASS
2437 MHz	16.04	≥500KHz	PASS
2462 MHz	16.28	≥500KHz	PASS

TX CH 01

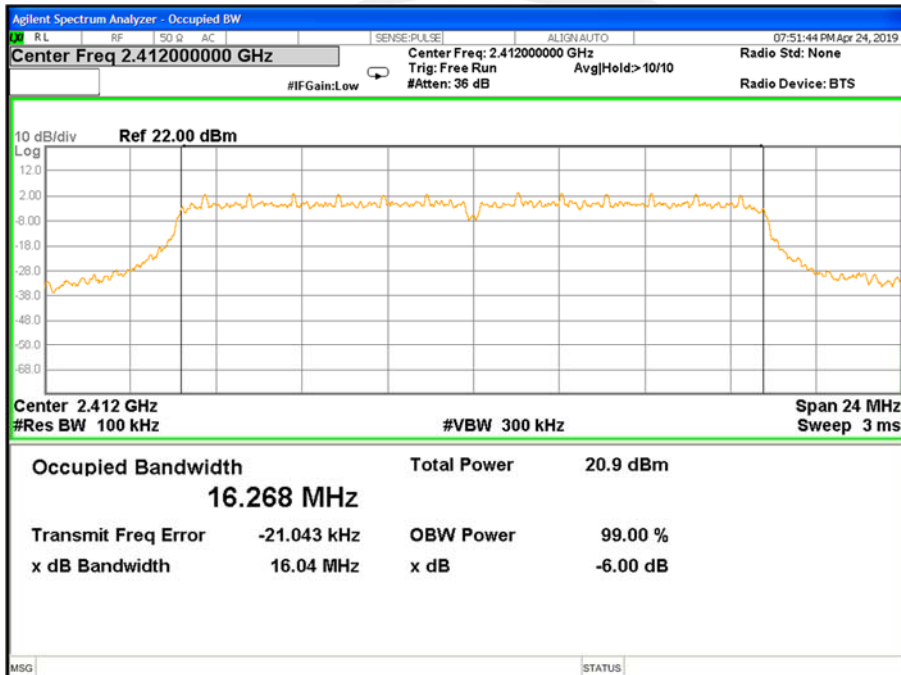




### TX CH 06

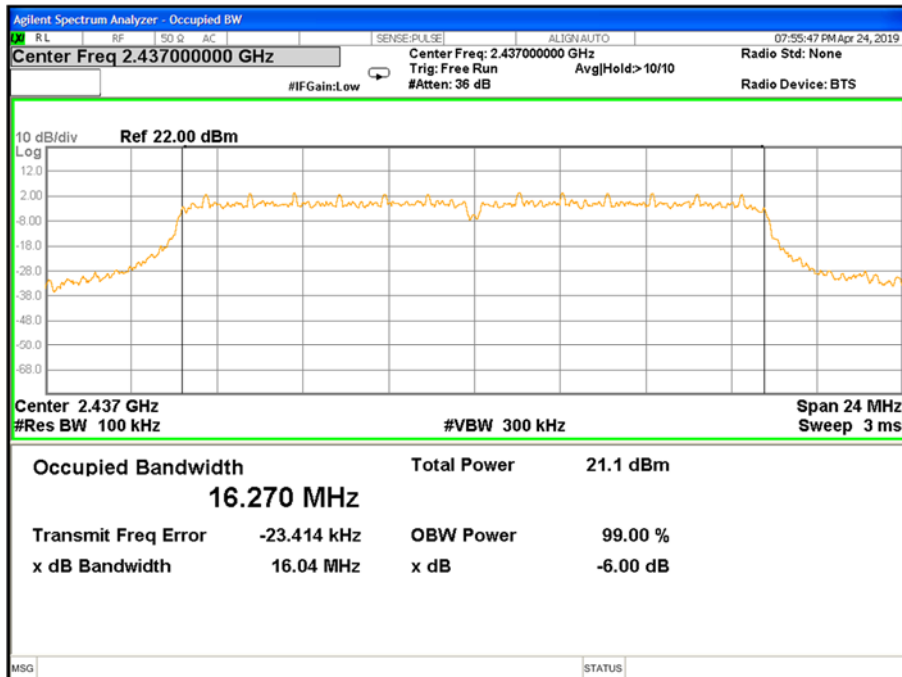

### TX CH 11

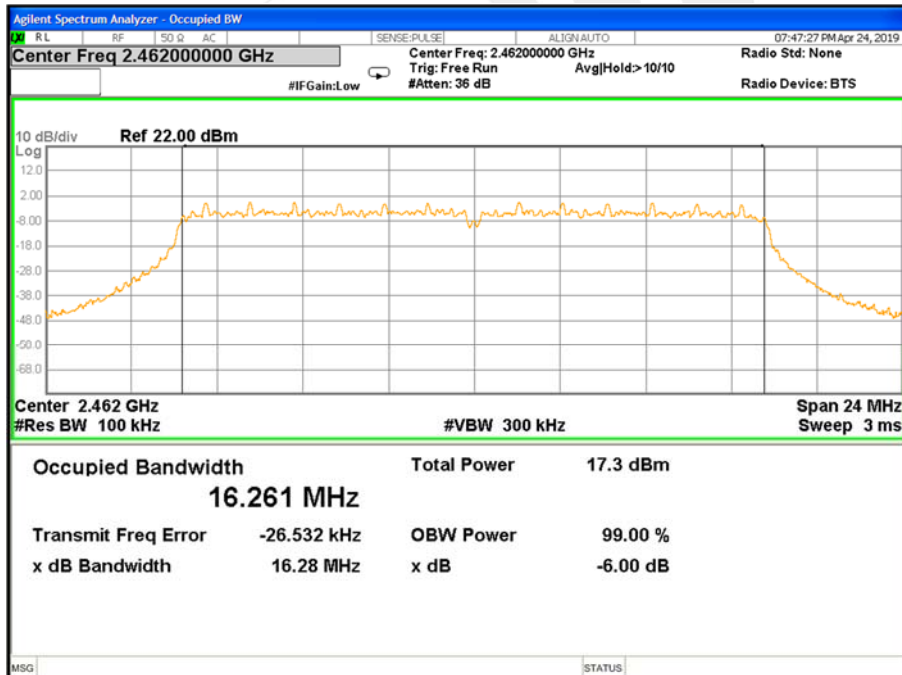






Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 6V	Test Mode:	TX n Mode(20M) /CH01, CH06, CH11


Frequency	6dB Bandwidth	6dB Bandwidth Limit	Result
	(MHz)	(KHz)	
2412 MHz	16.03	≥500KHz	PASS
2437 MHz	16.02	≥500KHz	PASS
2462 MHz	16.03	≥500KHz	PASS

TX CH 01

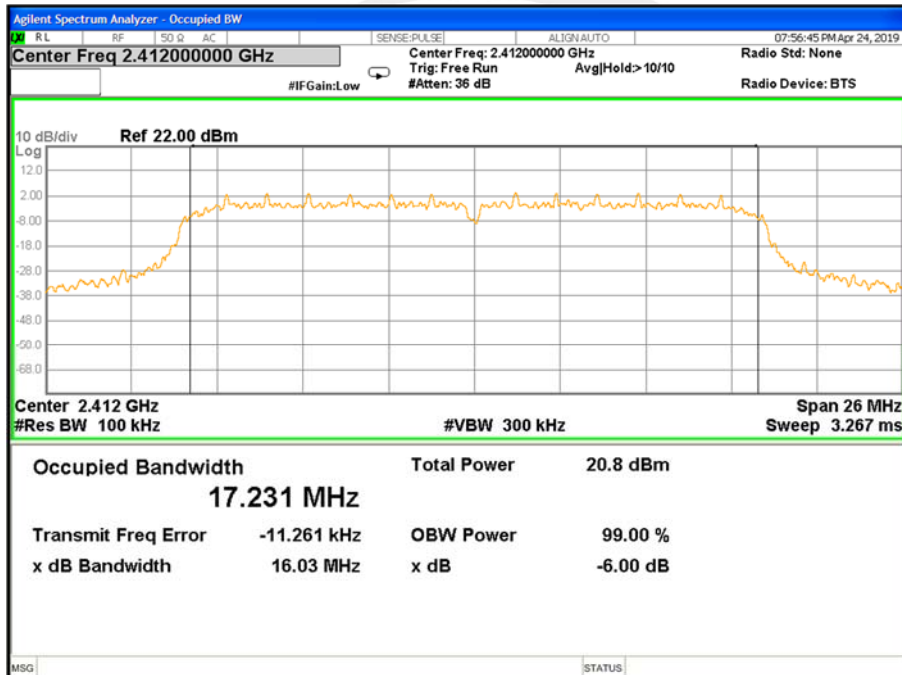




### TX CH 06

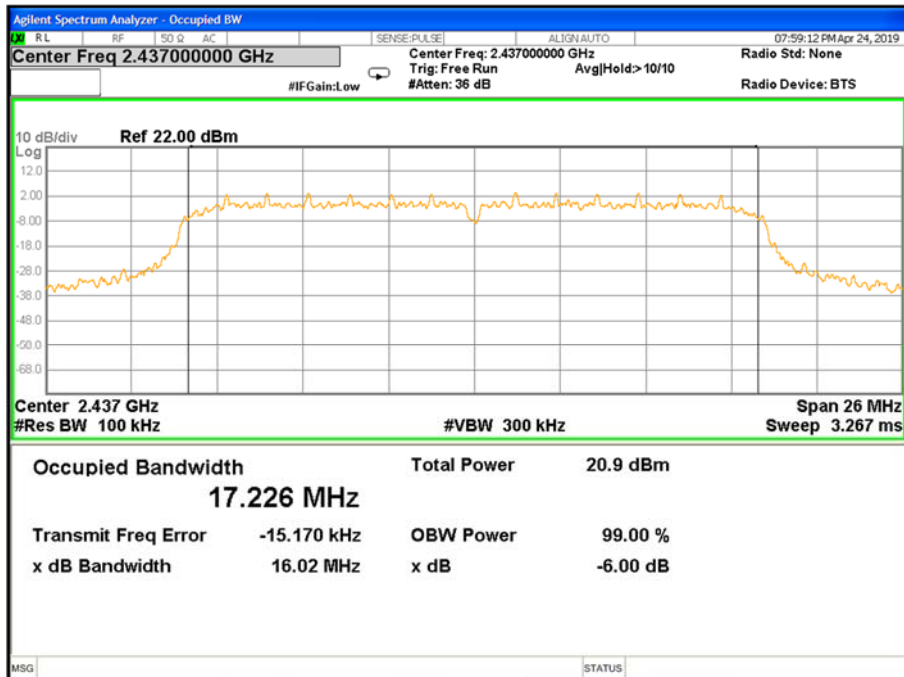

### TX CH 11

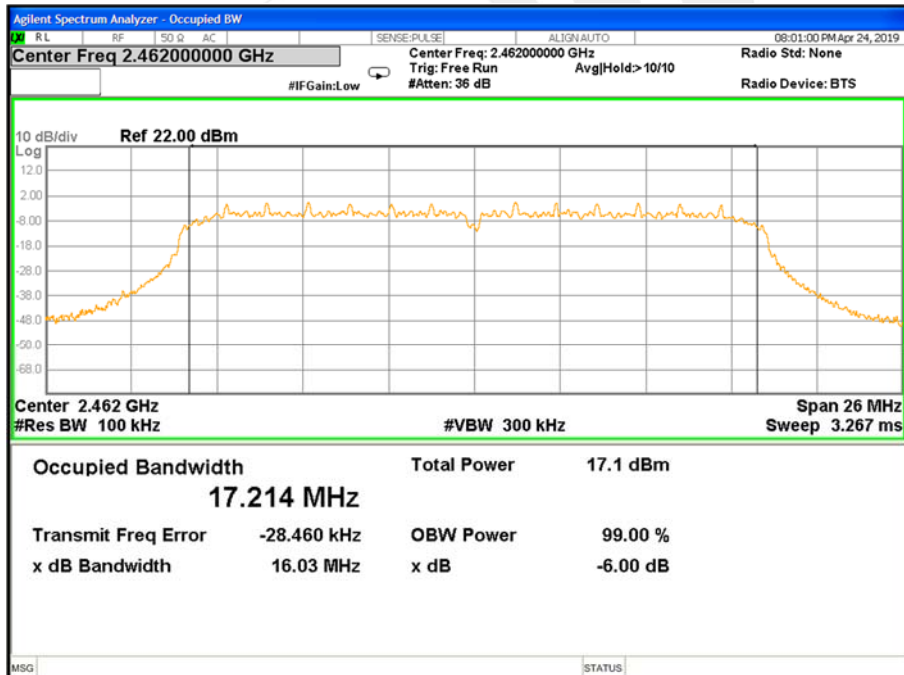



## 7. PEAK OUTPUT POWER TEST

### 7.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 7.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power Sensor&PC

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



## 7.6 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 6V		

TX 802.11b Mode				
Test Channe	Frequency	Peak Conducted Output Power	Average Conducted Output Power	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
CH01	2412	20.13	16.42	30
CH06	2437	19.32	15.35	30
CH11	2462	19.88	14.85	30

TX 802.11g Mode				
Test Channe	Frequency	Peak Conducted Output Power	Average Conducted Output Power	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
CH01	2412	20.11	12.36	30
CH06	2437	20.26	12.26	30
CH11	2462	20.34	12.16	30

TX 802.11n20 Mode				
Test Channe	Frequency	Peak Conducted Output Power	Average Conducted Output Power	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
CH01	2412	20.28	12.38	30
CH06	2437	20.26	12.29	30
CH11	2462	20.11	12.23	30



## 8. ANTENNA REQUIREMENT

### 8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 8.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It comply with the standard requirement.





## APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*

