

SPECIFICATION FOR APPROVAL

CUSTOMER: 系統電子

CUSTOMER P/N : 354-0000641

MODEL NAME: Birdwing-AUX ANT HF






AWAN P/N: ALL00-000015

Date: 2024-10-31

Customer Approval


R&D Manager

AWAN Approved

					王昕霞
&D Manager / Dongyan.Jin	Mechanical Manager / Dongyan.Jin	Q&R Manager / Fish Tong	Project Engineer / Jake.Zhu	Product Manager Qing.Tang	Authorized Strength/ Xinxia.Wang





No.925, Hua-Yuan Road,Zhang- Pu Town,
Kun -Shan City, Jiang -Su Prov.,P.R.C.
TEL : 86-512-5744-6168
FAX : 86-512-5744-9168
Http : //www.awan-ant.com

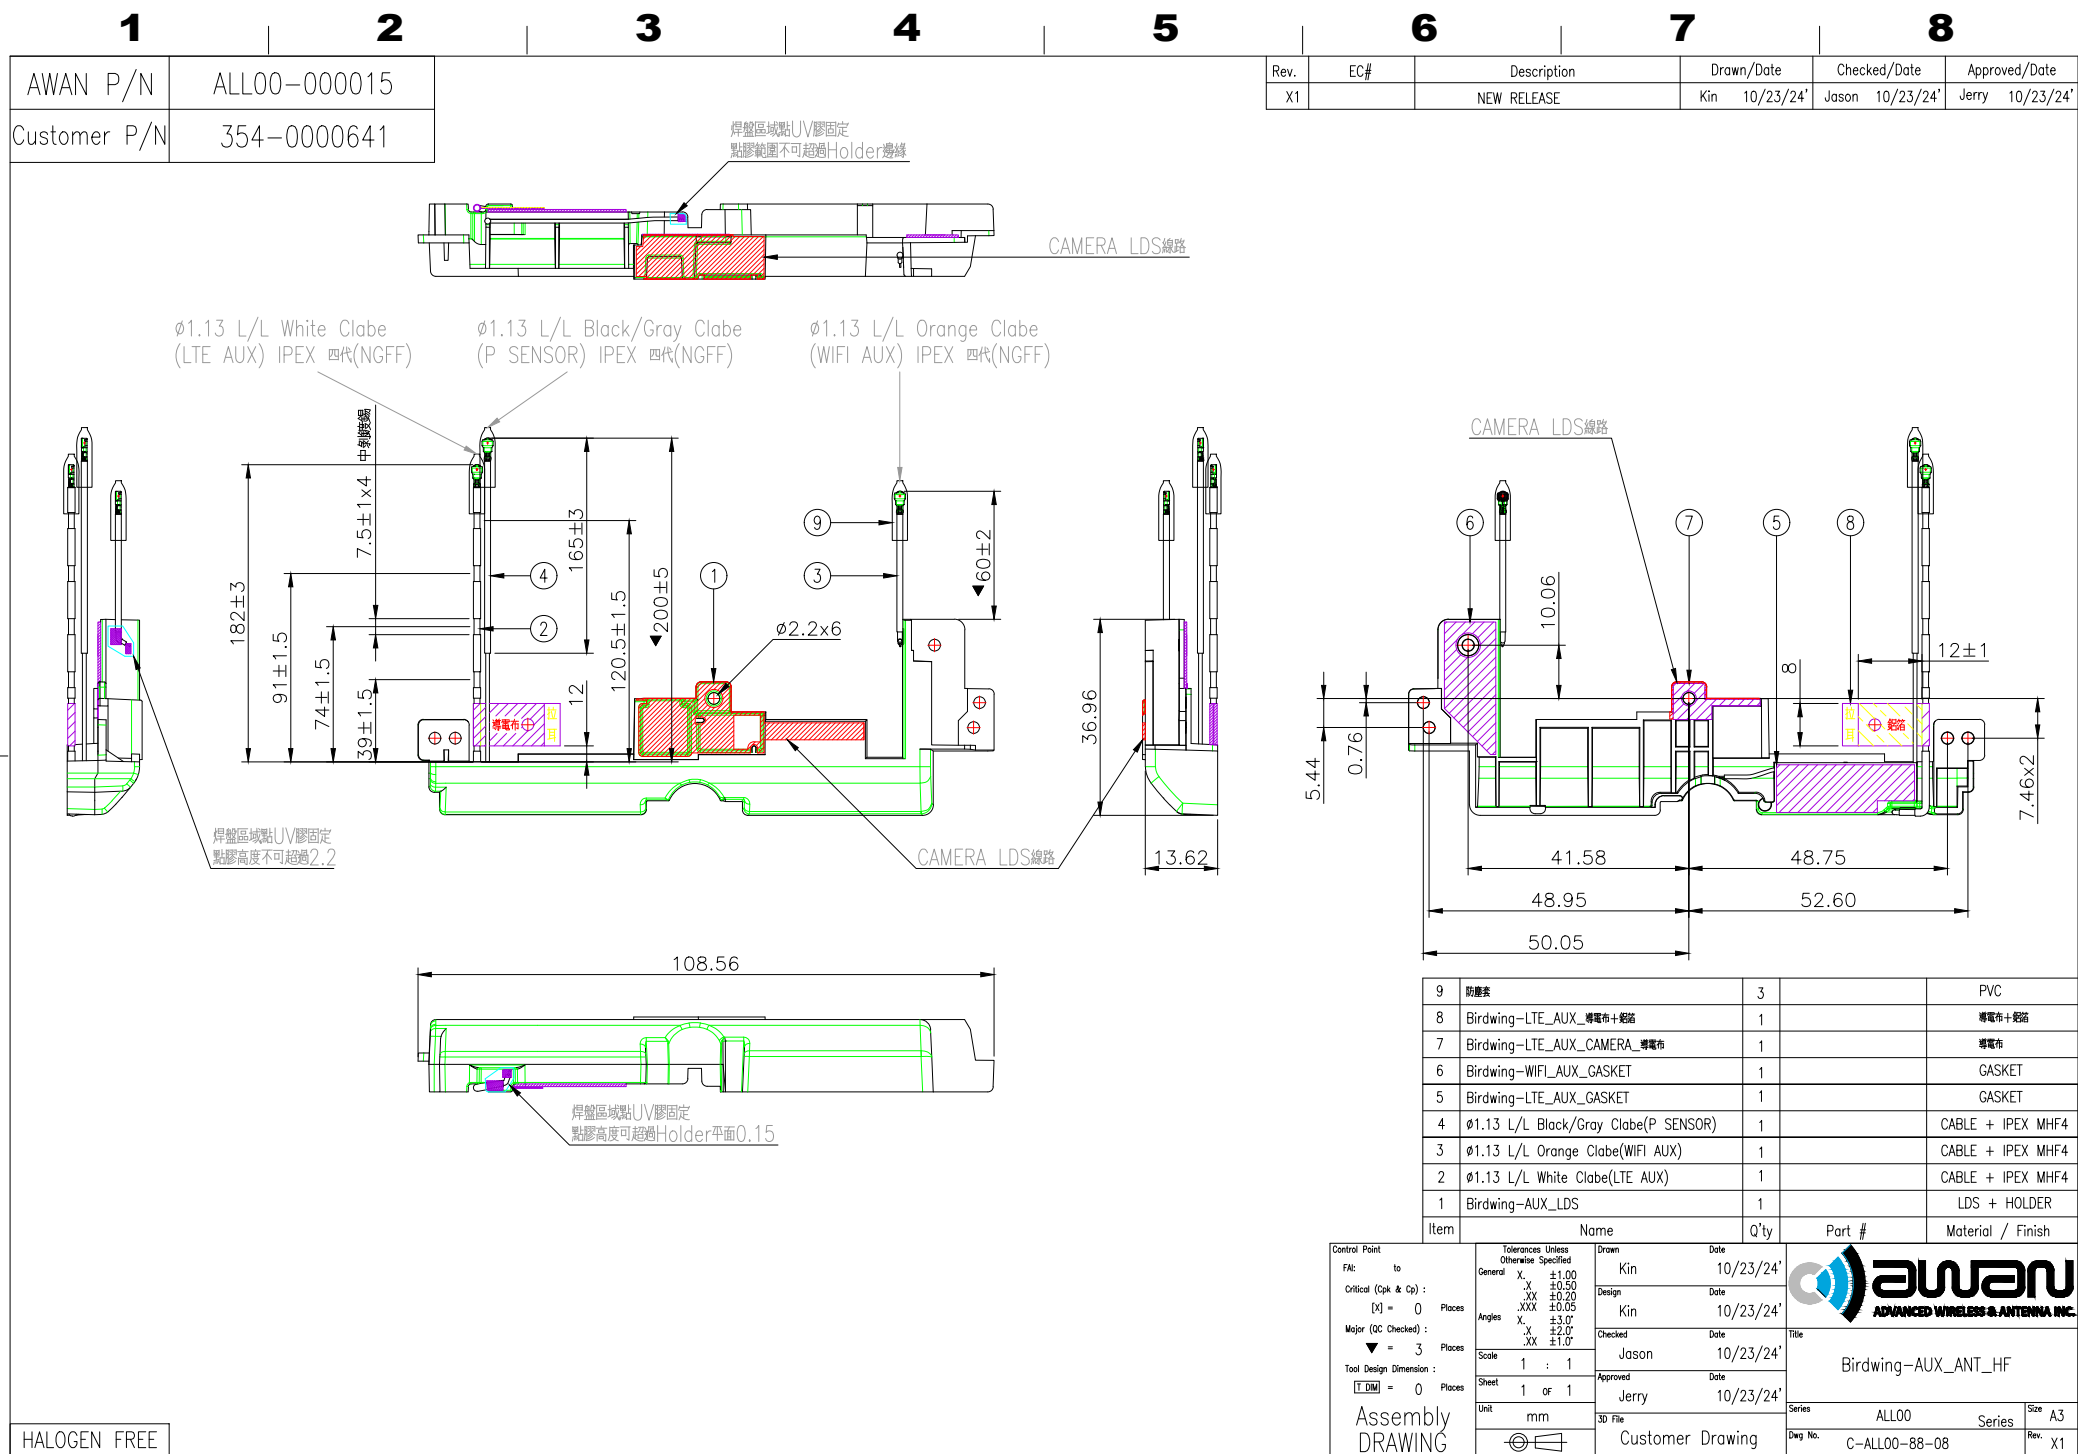


1 2 3 4 5 6 7 8

Rev.	EC#	Description	Drawn/Date	Checked/Date	Approved/Date
X1		NEW RELEASE	Kin 10/23/24'	Jason 10/23/24'	Jerry 10/23/24'

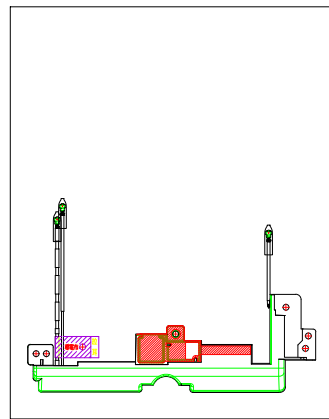

1PCS/PE袋




20 PCS/Square



Card Board

150 PCS/Layer

Card Board A



Card Board

P-SE-CD307 :5層版,6插槽x3插槽_隔板組(485x377)

Notes:

1.0

1. Packaging P/N see Table A


2. Packaging quantity & N.W & G.W refer Table B

TABLE A :

PART NAME	P/N	PCS
OUTER BOX		1
6插槽_5層 337*113*7T		6
3插槽_5層 485*113*7T		12
Card Board		2
Card Board A		1
PE袋		300

Table B :

Part Number	Pcs/PE袋	PCS/Square	PCS/Layer	Pcs/Carton	N.W(kgs)	G.W(kgs)
ALL00-000015	1	15	150	300		

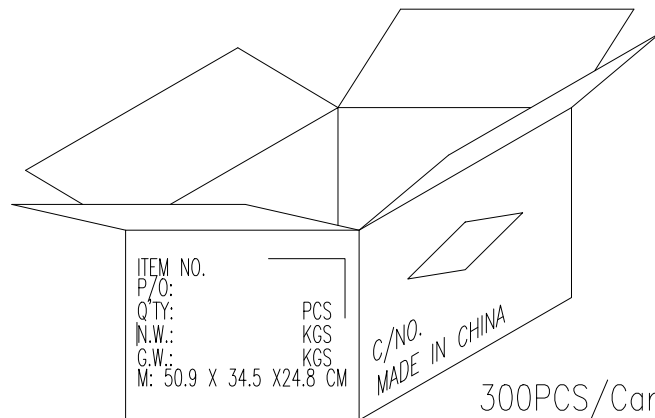

ITEM NO.
P/O:
QTY:
N.W.:
G.W.:
M: 50.9 X 34.5 X24.8 CM

PCS
KGS
KGS

C/NO.
MADE IN CHINA

300PCS/Carton

HALOGEN FREE

This document and information contained herein are the property of AWAN, copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission

HSF相關均質拆分及測試點選擇參照
<HSF均質物質拆分作業圖示表>

Tolerances Unless Otherwise Specified	Drawn	Date	 Birdwing-AUX_ANT-包裝圖	Series	Size
	Kin	10/23/24'			
	Design	Date			
	Kin	10/23/24'			
Scale	1 : 1	Checked	Date	Dwg No.	Rev.
	1 : 1	Jason	10/23/24'		
	1 OF 1	Approved	Date		
	1 OF 1	Jerry	10/23/24'		
Unit	mm	Customer Drawing		ALL00	A3
				P-ALL00-88-08	X1

符合AWAN環境管理物質技術標準
All materials meet the AWAN's spec. Environment - related substances management technical standard.

	5G Aux Gain Data	
Frequency(MHz)	Peak Gain (dBi)	Efficiency (%)
738	-0.53	30.20
746	-0.43	31.27
777	1.50	48.87
787	1.73	49.06
791	1.61	46.89
798	1.23	41.23
814	-3.60	14.07
859	-1.24	23.78
862	-0.98	25.49
880	0.64	36.29
1805	1.74	46.51
1880	2.47	53.79
1900	2.65	54.16
1930	2.73	54.55
1960	2.39	54.05
2010	3.18	54.04
2300	0.52	41.25
2355	1.63	42.00
2500	1.20	30.58
2595	2.01	30.38
2690	1.59	26.08
3300	2.11	48.11
3400	1.80	53.13
3500	2.59	55.07
3600	2.58	56.56
3700	2.55	49.39
3800	2.77	49.80
4700	-0.29	28.87

	WLAN Aux Gain Data	
Frequency(MHz)	Peak Gain (dBi)	Efficiency (%)
2412	2.29	53.68
2437	3.14	56.68
2442	3.08	55.21
2450	3.05	53.75
2462	2.95	50.59
2484	3.26	51.32
5150	5.90	50.01
5250	6.80	50.39
5350	6.73	53.02
5470	7.75	55.20
5600	7.53	60.72
5725	7.34	56.69
5785	6.66	53.18
5850	6.11	51.89