



**FCC CFR47 PART 15 SUBPART C  
CERTIFICATION  
TEST REPORT**

**FOR**

**802.11B/G BBGW 1x2 APx Module**

**MODEL NUMBER: AGN0912AR-01**

**FCC ID: SA3-AGN0912AR0100**

**REPORT NUMBER: 05U3468-1**

**ISSUE DATE: JULY 5, 2005**

*Prepared for*  
**AIRGO NETWORKS, INC.  
900 ARASTRADERO ROAD  
PALO ALTO, CA 94304 U.S.A.**

*Prepared by*  
**COMPLIANCE ENGINEERING SERVICES, INC.  
d.b.a.  
COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

**NVLAP<sup>®</sup>**  
**LAB CODE:200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
<u>A</u>	<u></u>	<u>Initial Issue</u>	<u>YZ</u>

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY.....</b>	<b>5</b>
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY.....	5
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>6</b>
5.1. DESCRIPTION OF EUT.....	6
5.2. MAXIMUM OUTPUT POWER .....	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	6
5.4. SOFTWARE AND FIRMWARE.....	6
5.5. WORST-CASE CONFIGURATION AND MODE.....	6
5.6. DESCRIPTION OF TEST SETUP .....	7
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>9</b>
<b>7. LIMITS AND RESULTS .....</b>	<b>10</b>
7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND.....	10
7.1.1. 6 dB BANDWIDTH .....	10
7.1.2. 99% BANDWIDTH.....	17
7.1.3. PEAK OUTPUT POWER .....	24
7.1.4. MAXIMUM PERMISSIBLE EXPOSURE.....	32
7.1.5. AVERAGE POWER.....	35
7.1.6. PEAK POWER SPECTRAL DENSITY .....	36
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	43
7.2. RADIATED EMISSIONS.....	56
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS .....	56
7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND.....	59
7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz.....	77
7.3. POWERLINE CONDUCTED EMISSIONS.....	79
<b>8. SETUP PHOTOS.....</b>	<b>83</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** AIRGO NETWORKS, INC.  
900 ARASTRADERO ROAD  
PALO ALTO, CA 94304  
U.S.A.

**EUT DESCRIPTION:** 802.11B/G BBGW 1x2 APx Module

**MODEL:** AGN0912AR-01

**SERIAL NUMBER:** 15235

**DATE TESTED:** MAY 13, 2005 ~ JULY 1, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



---

YAN ZHENG  
EMC SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES

---

DAVID GARCIA  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is an 802.11b/g transceiver 1x2 Apx PCI Card.

The radio module is manufactured by Airgo Networks, Inc..

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	23.20	208.93
2412 - 2462	802.11g	27.59	574.12

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes two monopole omni antennas for diversity, each with a maximum gain of 3.0 dBi.

### 5.4. SOFTWARE AND FIRMWARE

The test utility software used during testing was MfgDemoTest v18.0.

### 5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2437 MHz.

The worst-case data rate for this channel is determined to be 6 Mb/s, based on previous experience with 2.4 GHz WLAN product design architectures.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC Adapter	Sony	PCGA-AC19V1	9/27/2263	N/A
Laptop PC	Sony	Vaio, PCG-5312	3303321	DoC


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	0.5 m	
2	DC	1	DC	Unshielded	1.5 m	

### TEST SETUP

The EUT is installed in a host laptop computer via a cardbus-to-miniPCI adapter / extension board during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

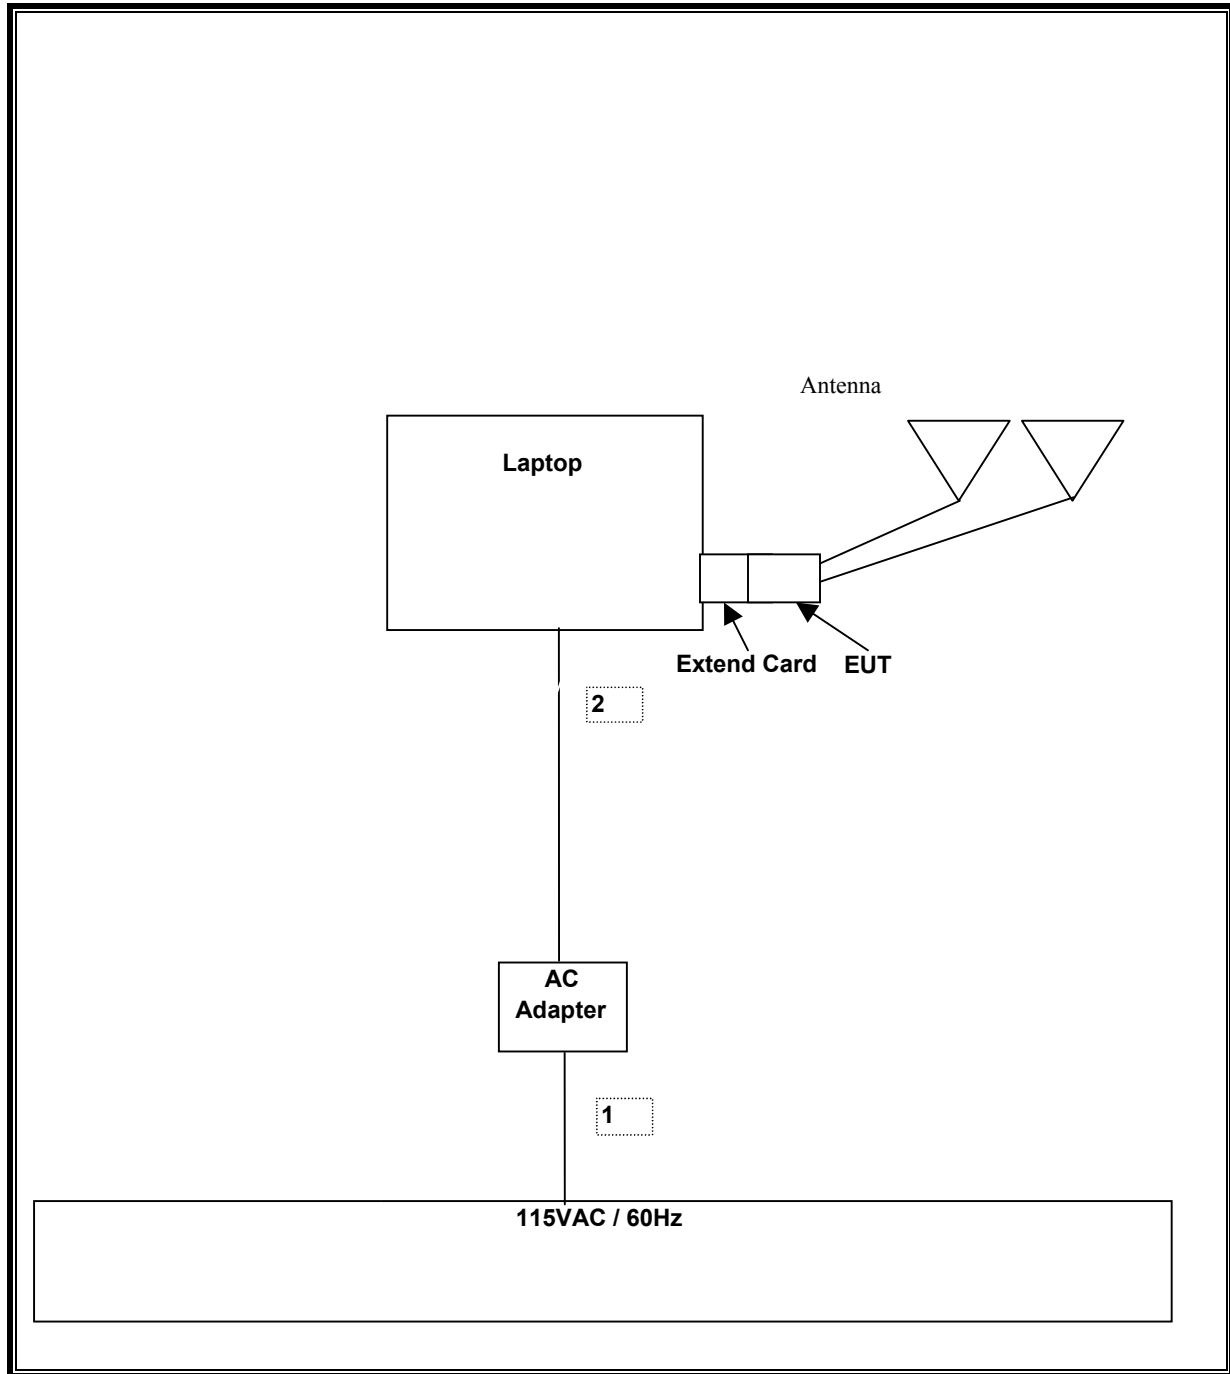



## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	3/21/1980	9/12/2005
Amplifier 1-26GHz	MITEQ	NSP2600-SP	924342	8/17/05
30MHz---- 2Ghz	Sunol Sciences	JB1 Antenna	A121003	9/12/05
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	3/6/06
RF Filter Section	HP	85420E	3705A00256	3/6/06
EMI Test Receiver	R & S	ESHS 20	827129/006	10/22/05
Site A Line Stabilizer / Conditioner	Tripplite	LC-1800a	A0051681	CNR
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	837990	10/21/05
Peak / Average Power Sensor	Agilent	E9327A	US40440755	1/10/06
Spectrum Analyzer	Agilent	E4446A	US42510266	8/25/05
2.7GHz HPF	MicroTronic	HPM13351	1	CNR
Power Meter	Agilent	E4416A	GB41291160	1/9/06

## 7. LIMITS AND RESULTS

### 7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

#### 7.1.1. 6 dB BANDWIDTH

##### LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

##### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

##### RESULTS

No non-compliance noted:


##### 802.11b Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	10920	500	10420
Middle	2437	11330	500	10830
High	2462	11170	500	10670


##### 802.11g Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	15830	500	15330
Middle	2437	15670	500	15170
High	2462	15420	500	14920


**6 DB BANDWIDTH (802.11b MODE)**

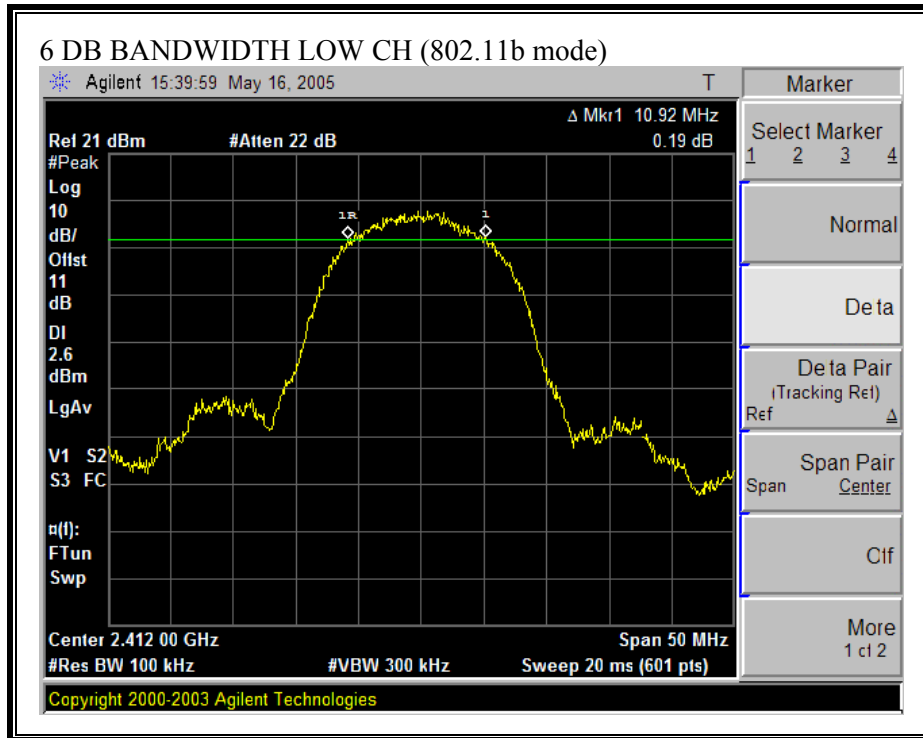


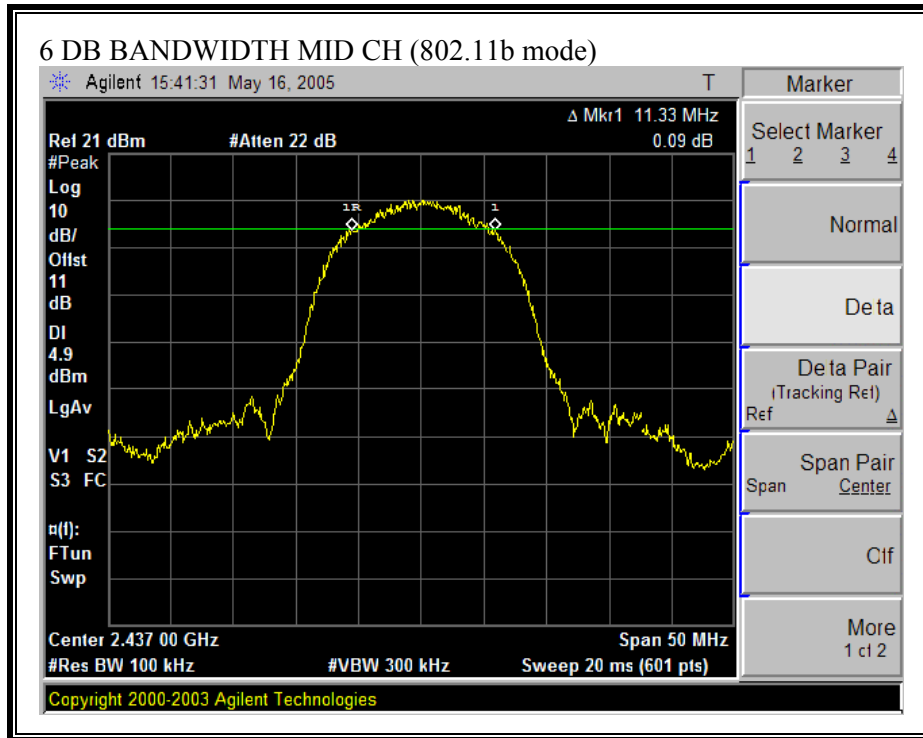


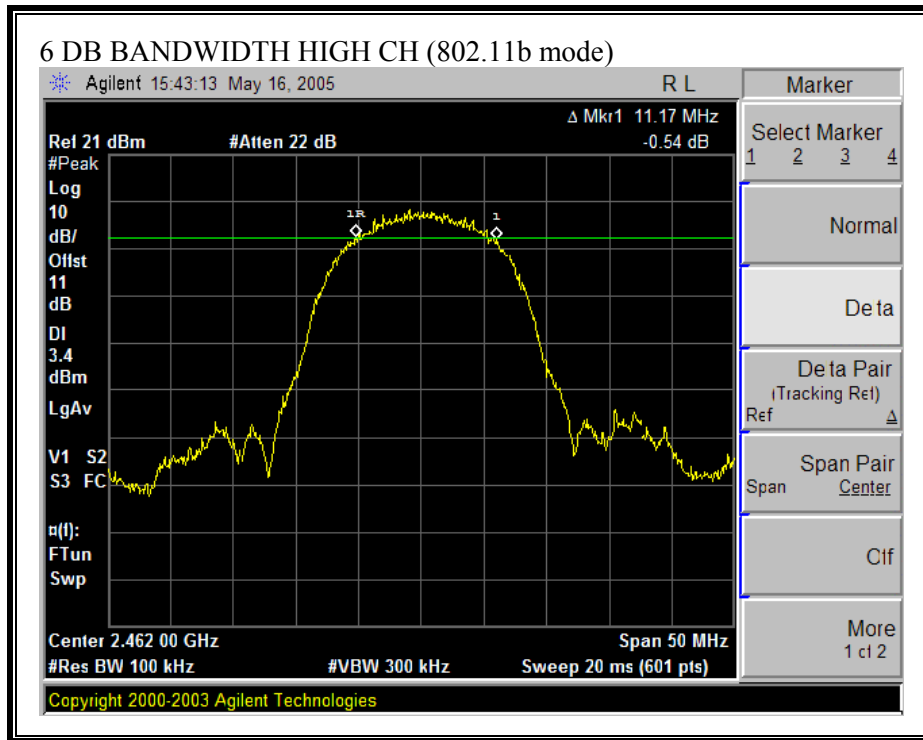

**6 DB BANDWIDTH (802.11g MODE)**

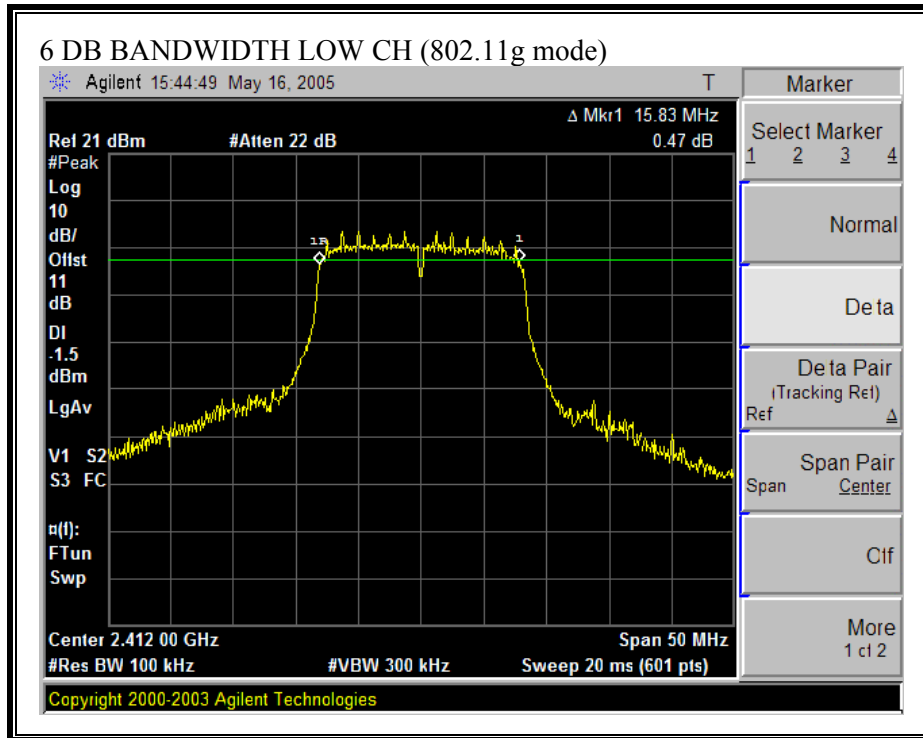

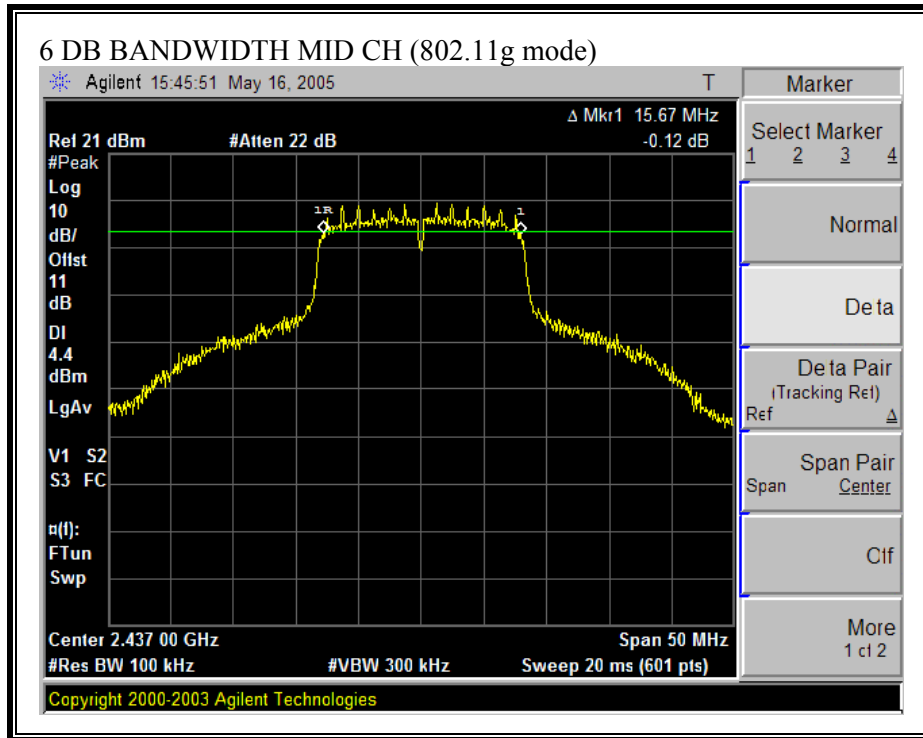

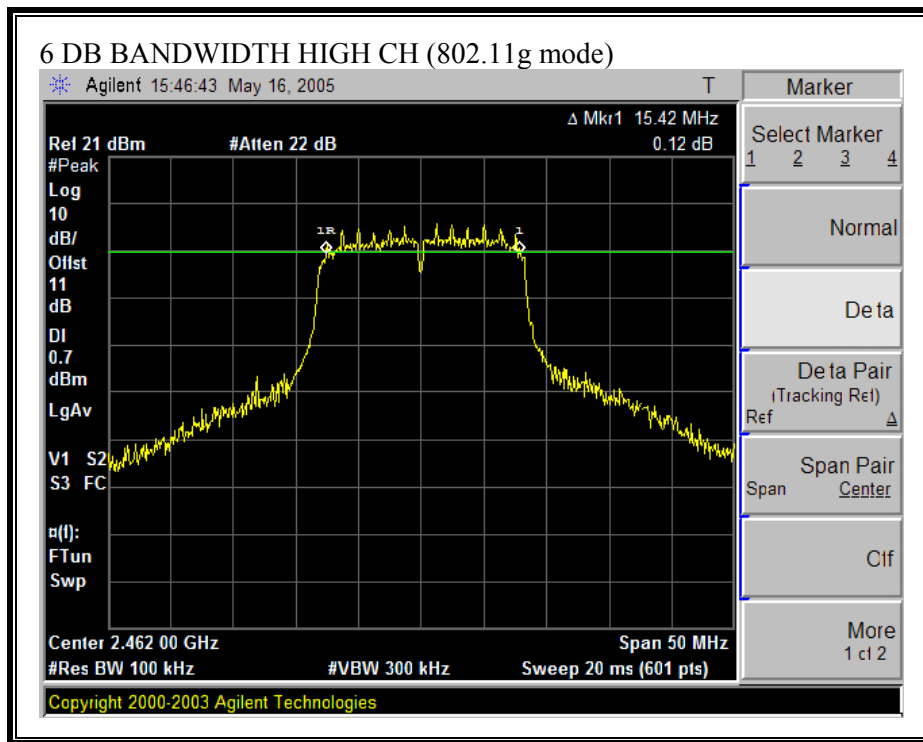



### 7.1.2. 99% BANDWIDTH

#### LIMIT

Note: for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

#### RESULTS

No non-compliance noted:


##### 802.11b Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	14.7053
Middle	2437	14.8417
High	2462	14.7504


##### 802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.172
Middle	2437	16.1800
High	2462	16.1758


**99% BANDWIDTH (802.11b MODE)**

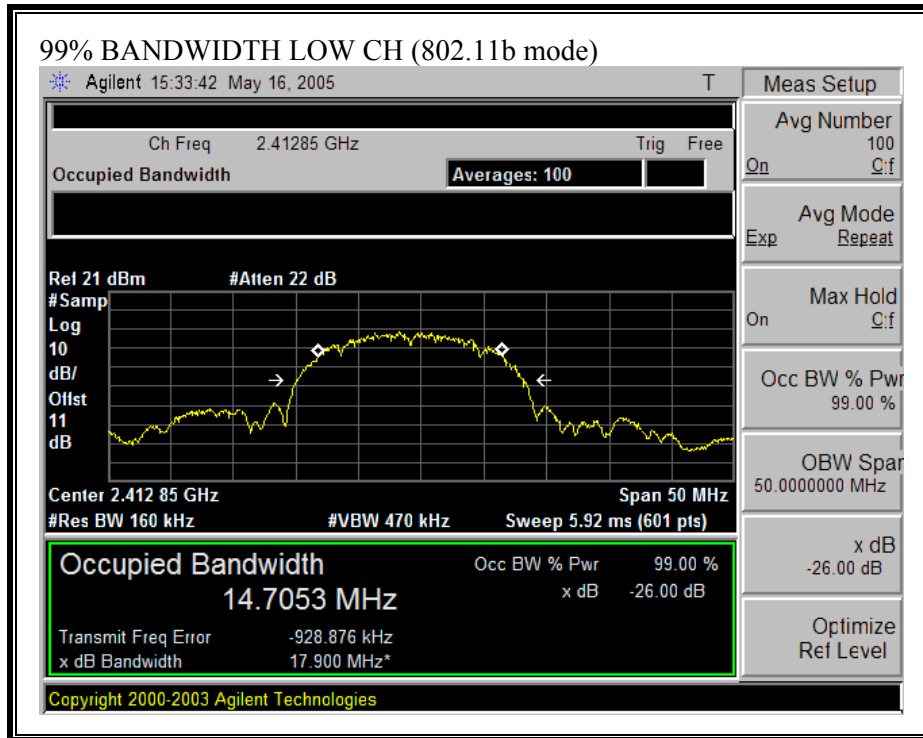


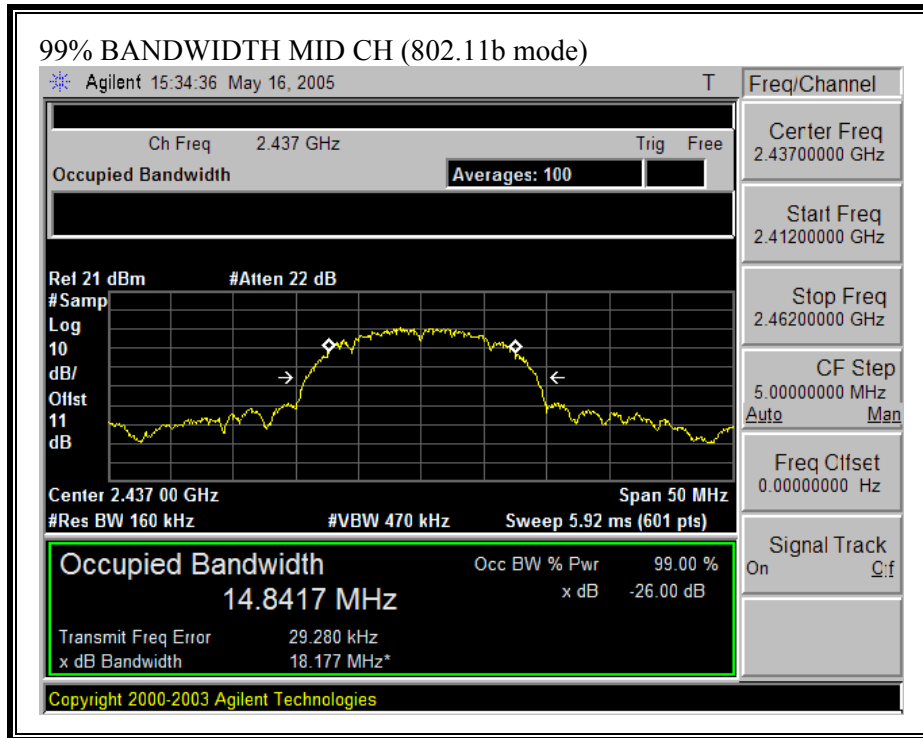


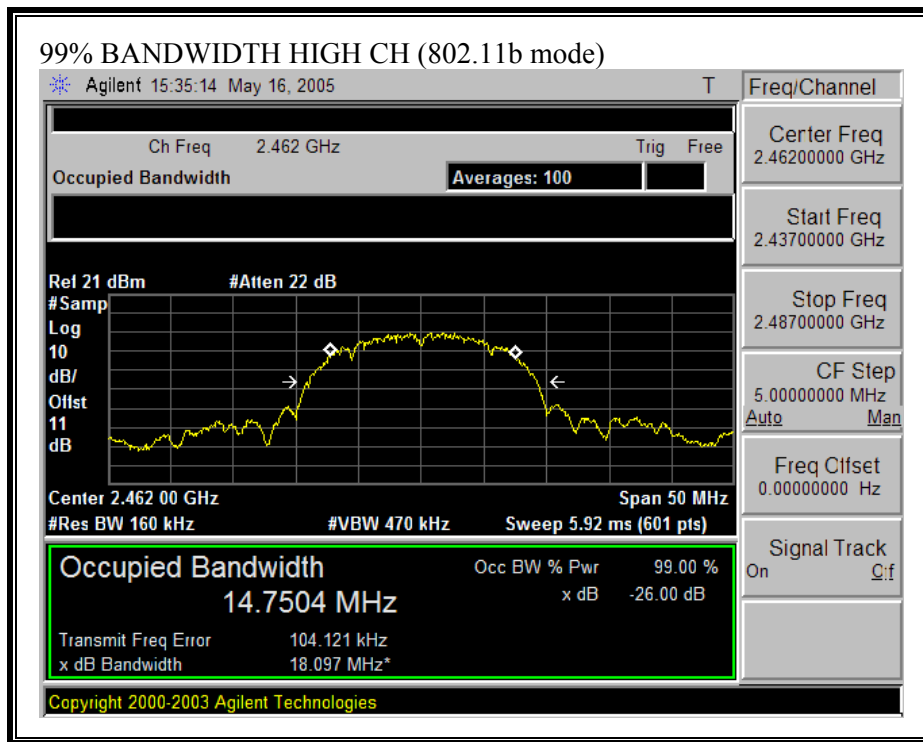

**99% BANDWIDTH (802.11g MODE)**

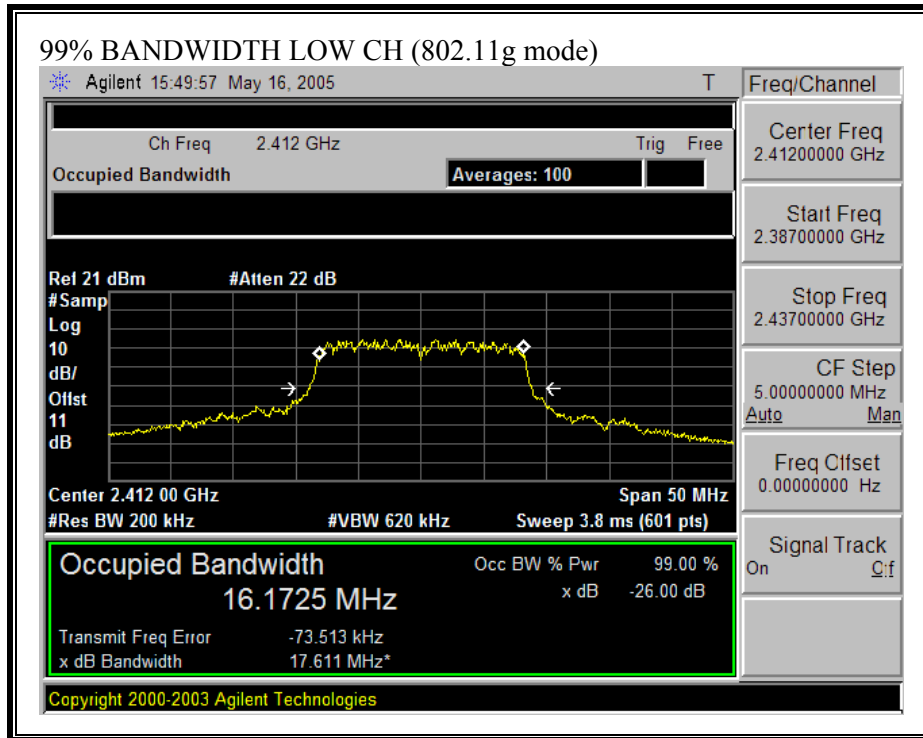

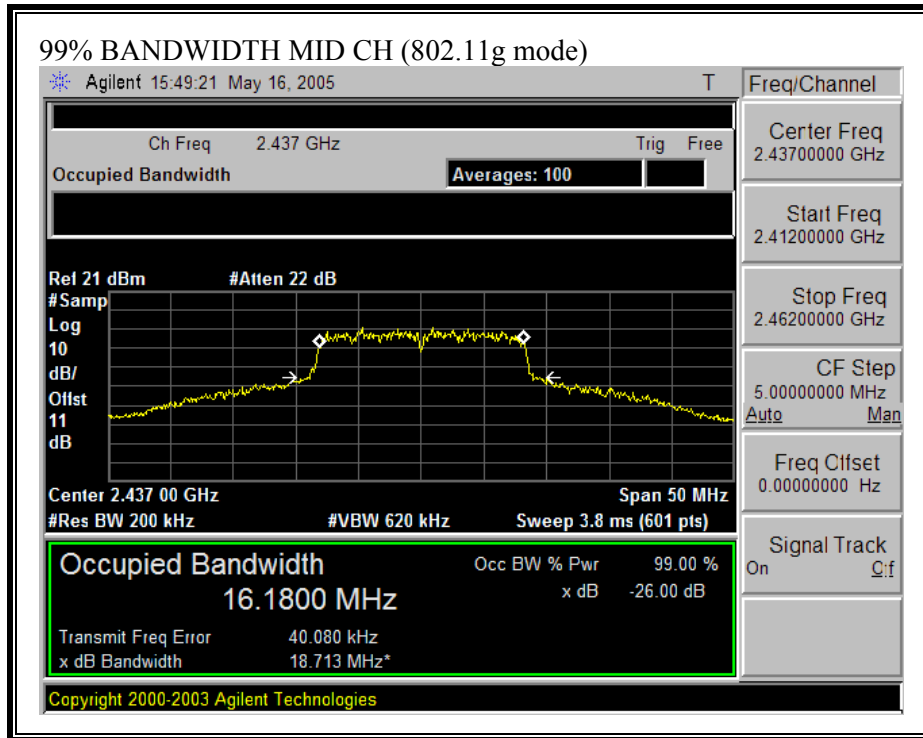

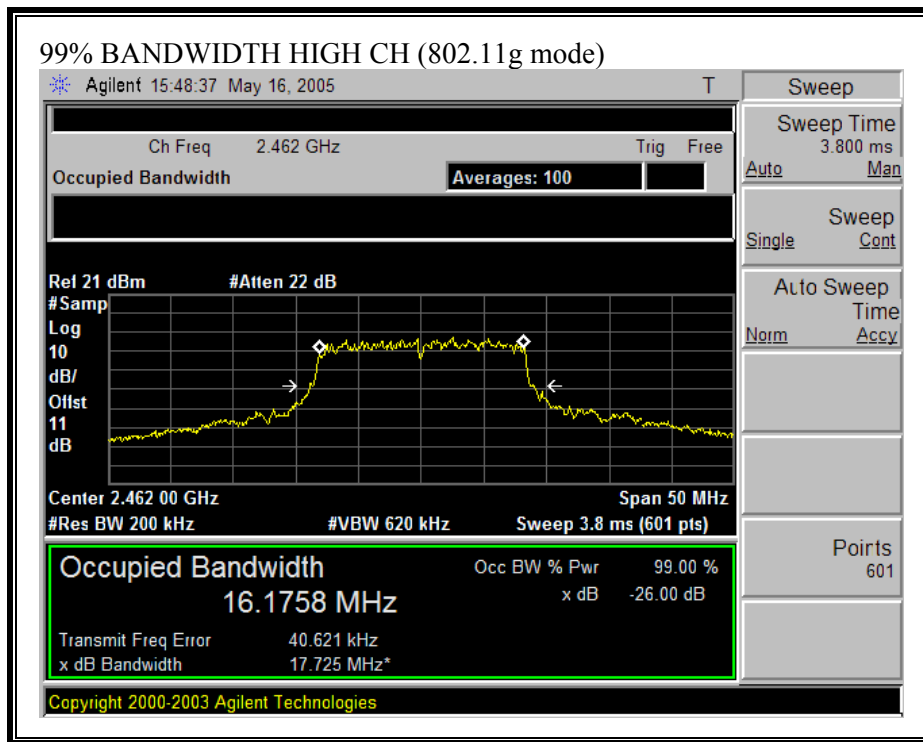

### **7.1.3. PEAK OUTPUT POWER**

#### **PEAK POWER LIMIT**

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(4) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.



## **RESULTS**

The maximum antenna gain is 3 dBi for other than fixed, point-to-point operations, therefore the limit is 30 dBm.

No non-compliance noted:


### 802.11b Mode


<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Peak Power (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>
Low	2412	20.56	30	-9.44
Middle	2437	23.20	30	-6.80
High	2462	21.50	30	-8.50


### 802.11g Mode

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Peak Power (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>
Low	2412	22.02	30	-7.98
Middle	2437	27.59	30	-2.41
High	2462	24.35	30	-5.65


**OUTPUT POWER (802.11b MODE)**

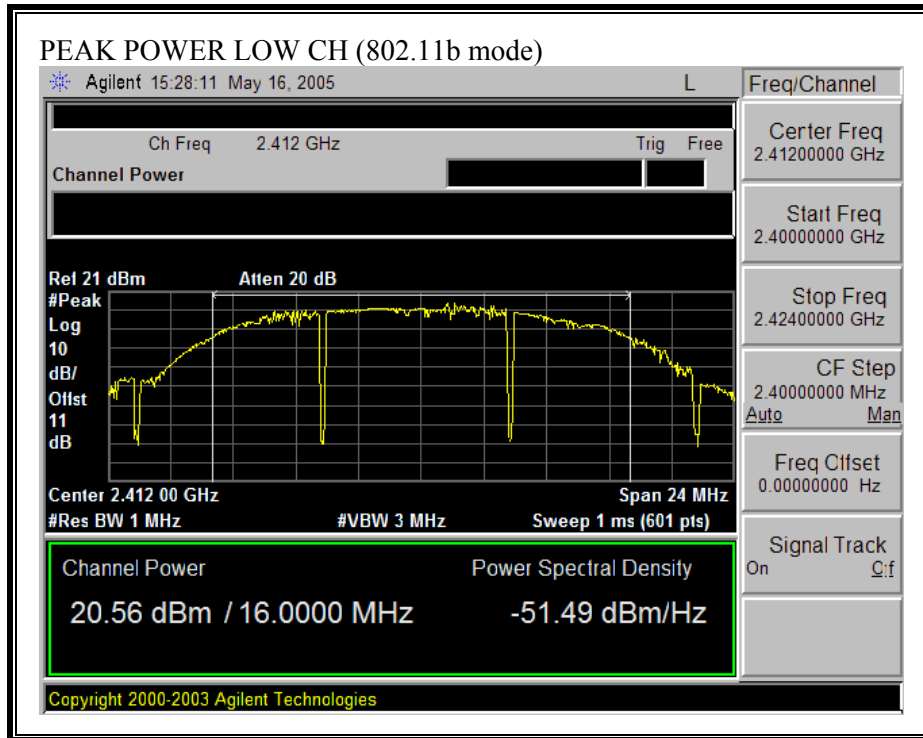


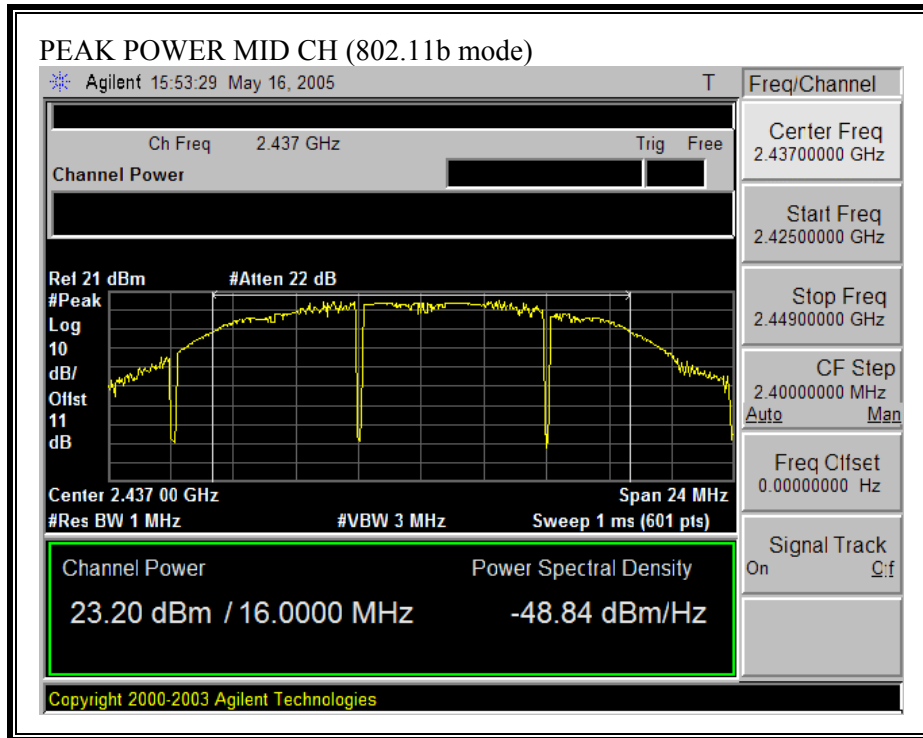


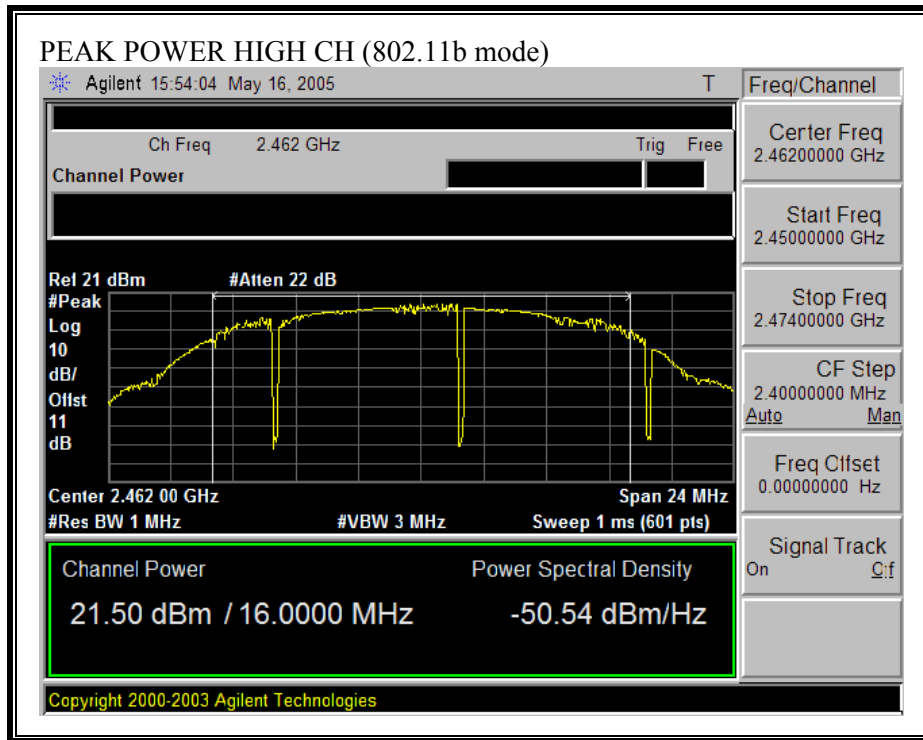

**OUTPUT POWER (802.11g MODE)**

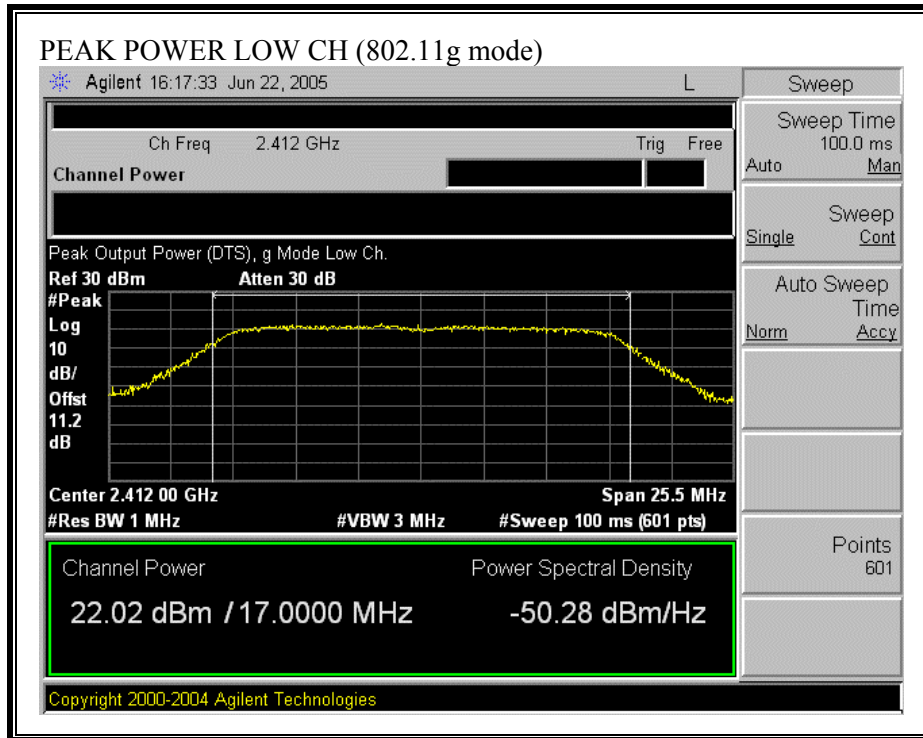

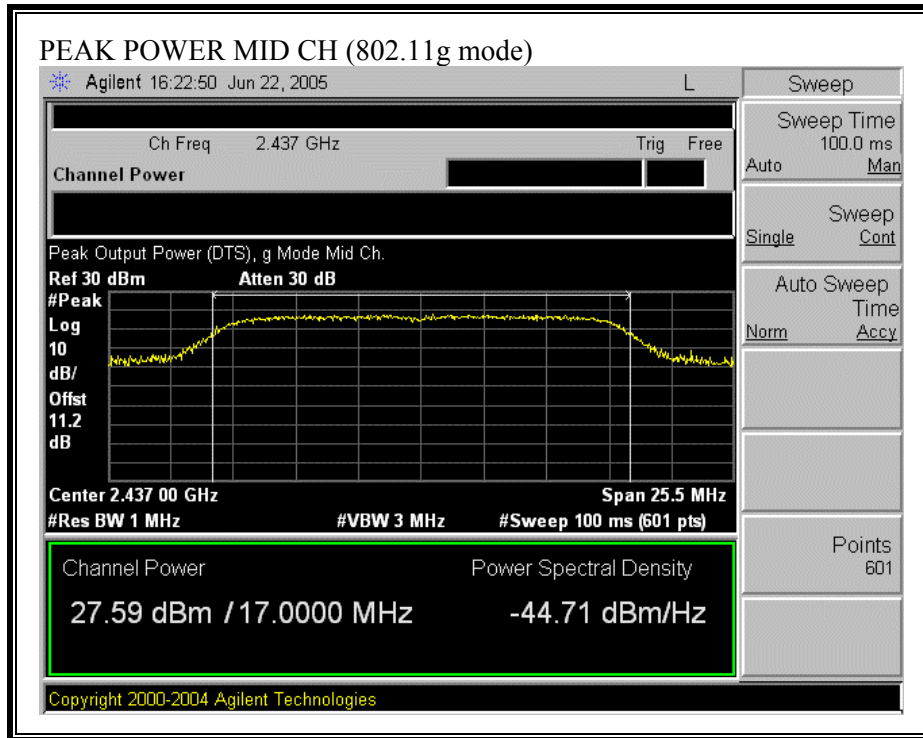

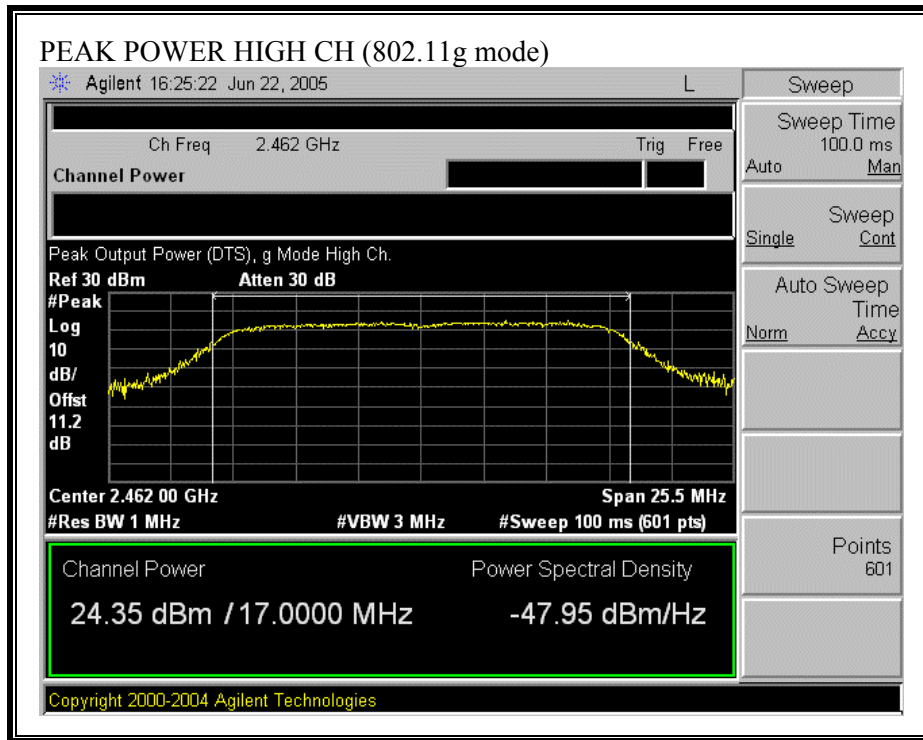

### 7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

#### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.



## **CALCULATIONS**

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Equation (1) and the measured peak power is used to calculate the MPE distance.

**LIMITS**

From §1.1310 Table 1 (B),  $S = 1.0 \text{ mW/cm}^2$

**RESULTS**

No non-compliance noted:

<b>Mode</b>	<b>Power Density Limit (mW/cm<sup>2</sup>)</b>	<b>Output Power (dBm)</b>	<b>Antenna Gain (dBi)</b>	<b>MPE Distance (cm)</b>
802.11b	1.0	23.20	3.00	5.76
802.11g	1.0	27.59	3.00	9.54

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

## 7.1.5. AVERAGE POWER

### AVERAGE POWER LIMIT

Note: for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.18 dB (including 10 dB pad and 1.18 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### 802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	17.45
Middle	2437	22.98
High	2462	18.73

#### 802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	14.48
Middle	2437	20.38
High	2462	16.50

### 7.1.6. PEAK POWER SPECTRAL DENSITY

#### LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

#### RESULTS

No non-compliance noted:


##### 802.11b Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-4.16	8	-12.16
Middle	2437	-1.71	8	-9.71
High	2462	-3.42	8	-11.42


##### 802.11g Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-8.41	8	-16.41
Middle	2437	-2.22	8	-10.22
High	2462	-6.40	8	-14.40


**PEAK POWER SPECTRAL DENSITY (802.11b MODE)**

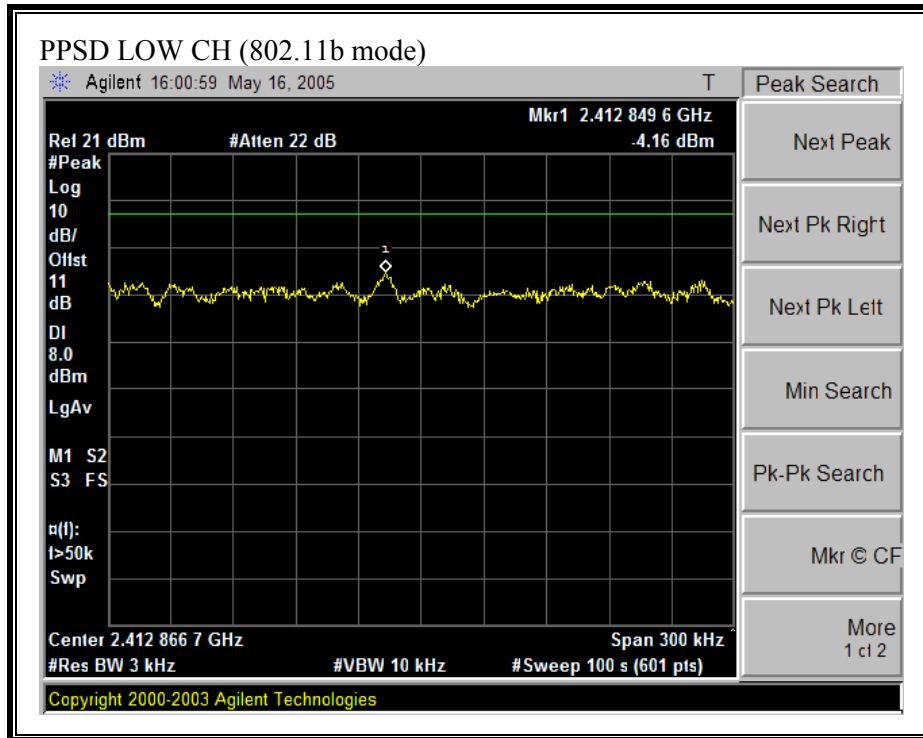

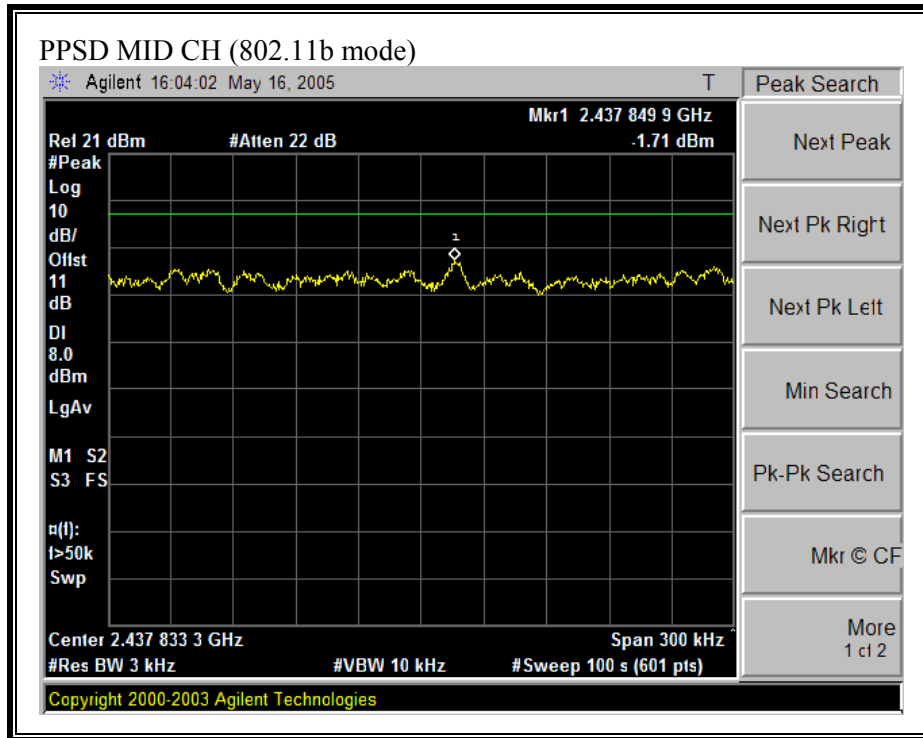


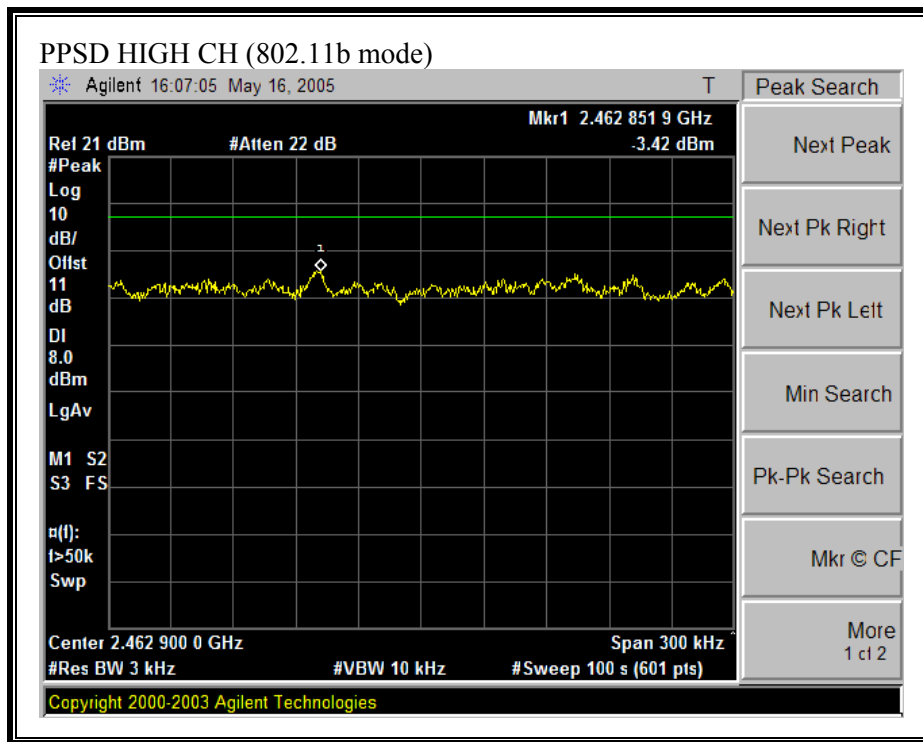


**PEAK POWER SPECTRAL DENSITY (802.11g MODE)**

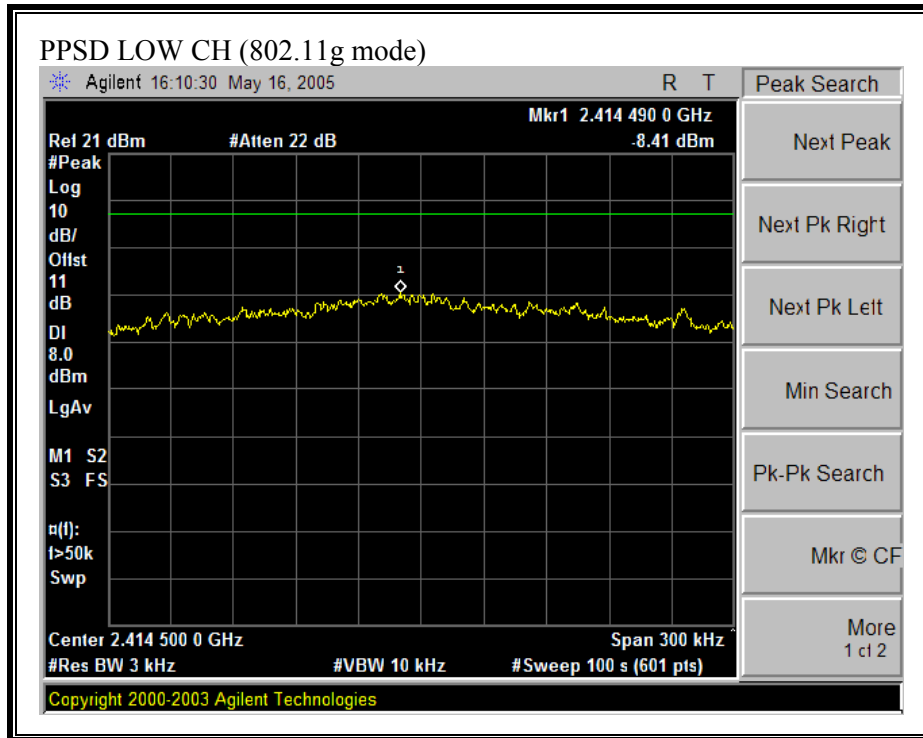



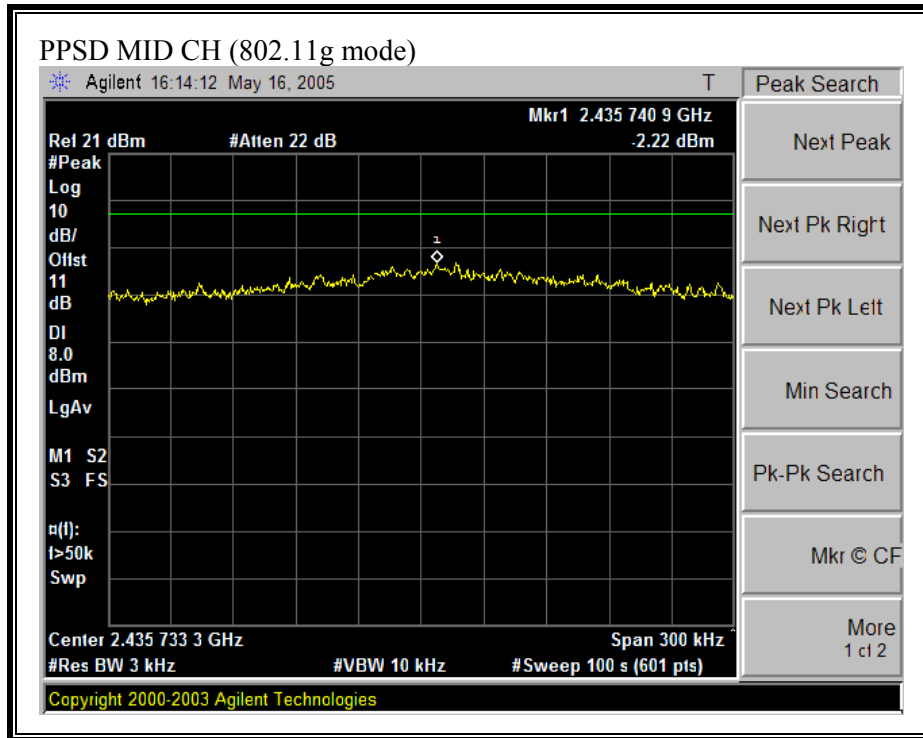

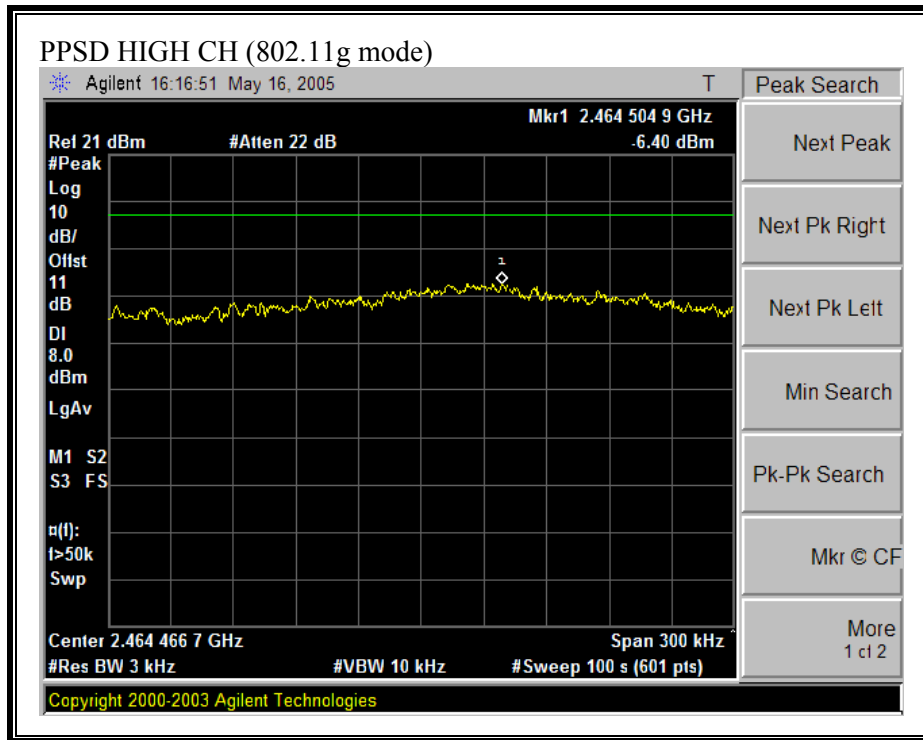

## **7.1.7. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### **RESULTS**


No non-compliance noted:


**SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)**

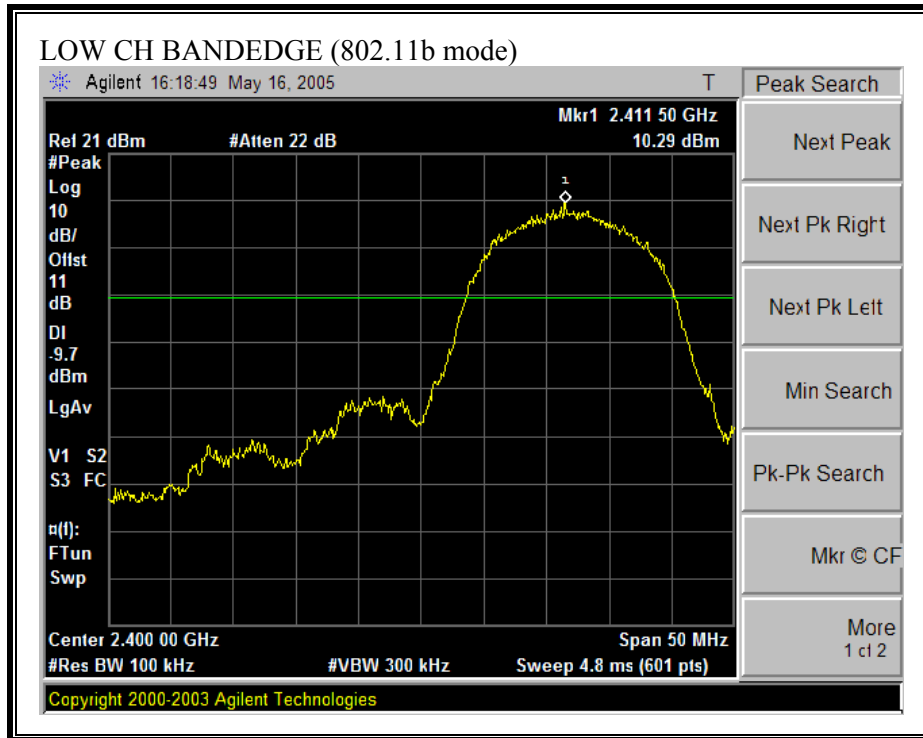

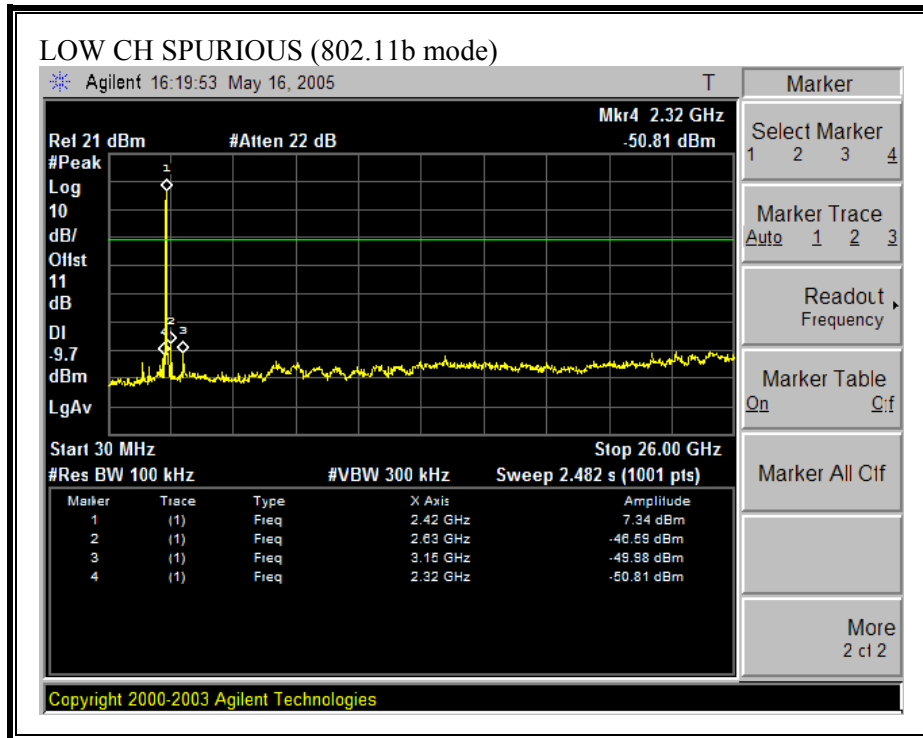


**SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)**

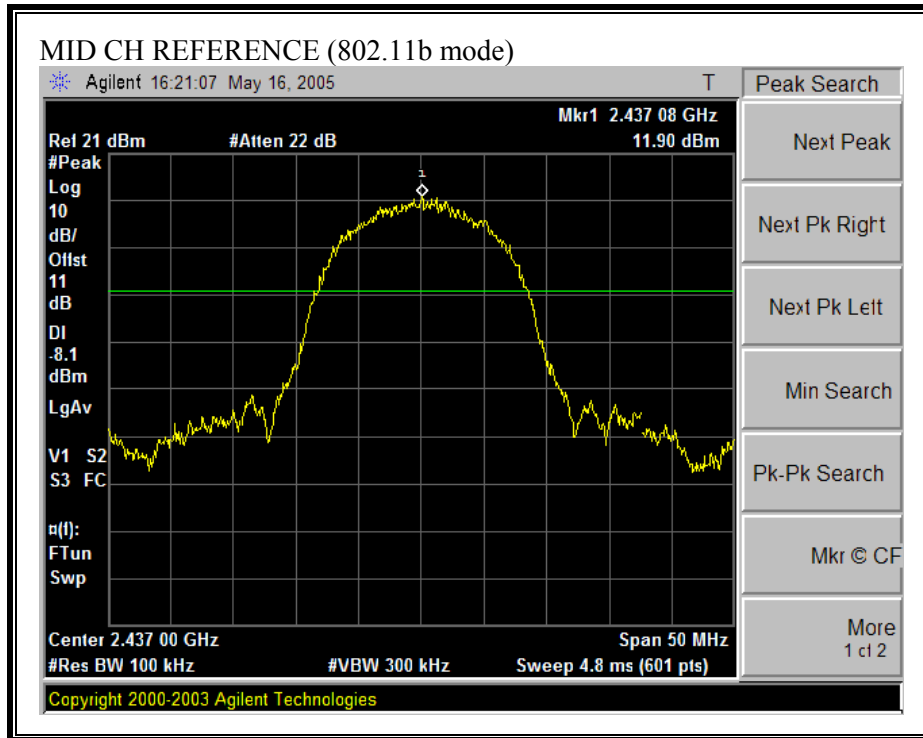


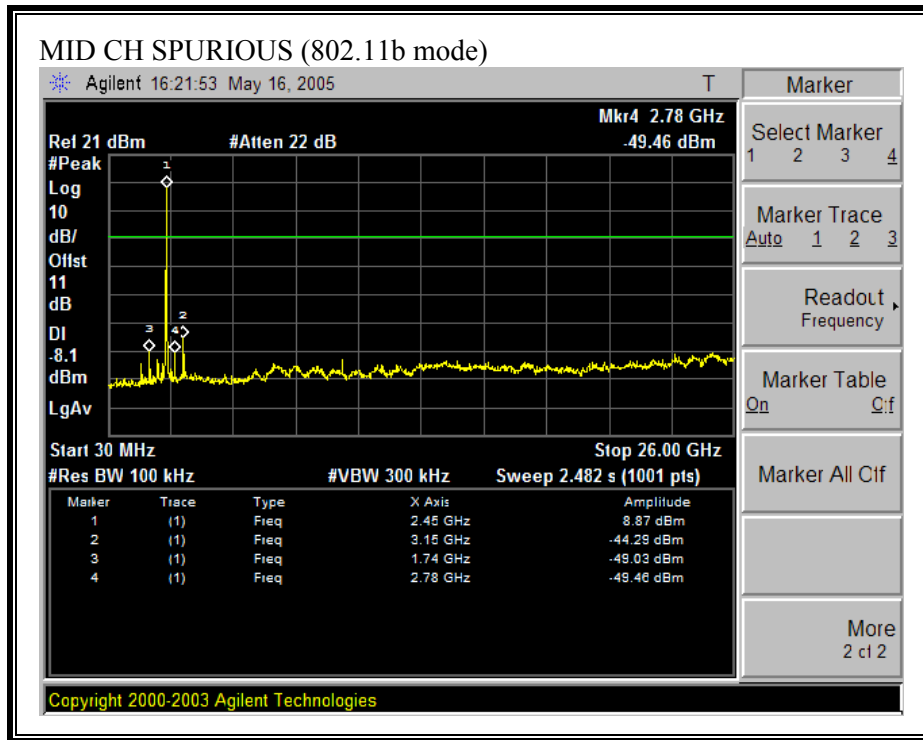


**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)**

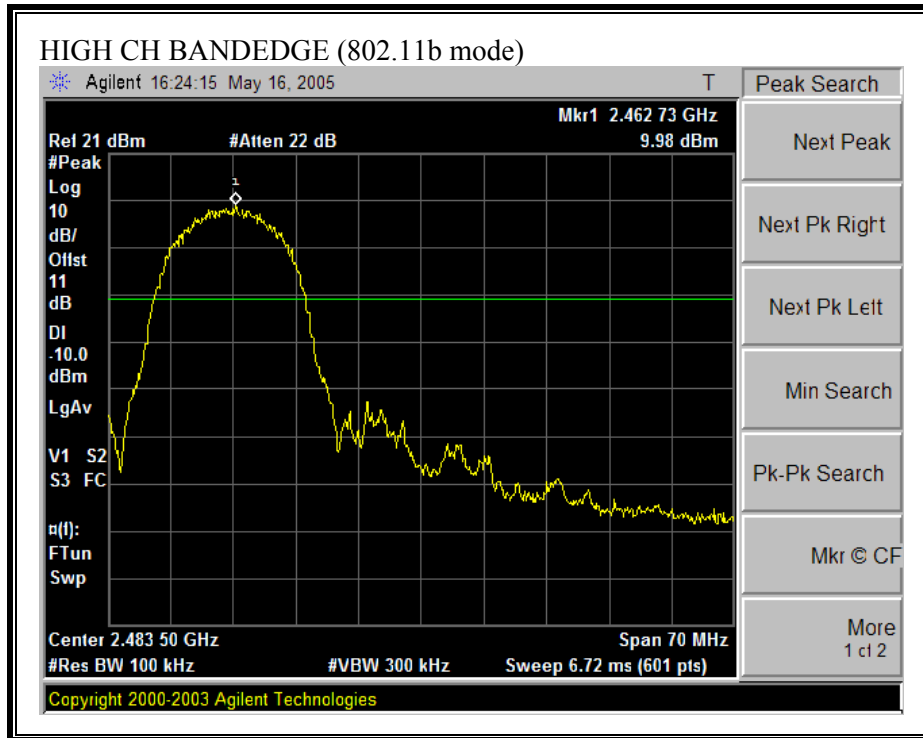




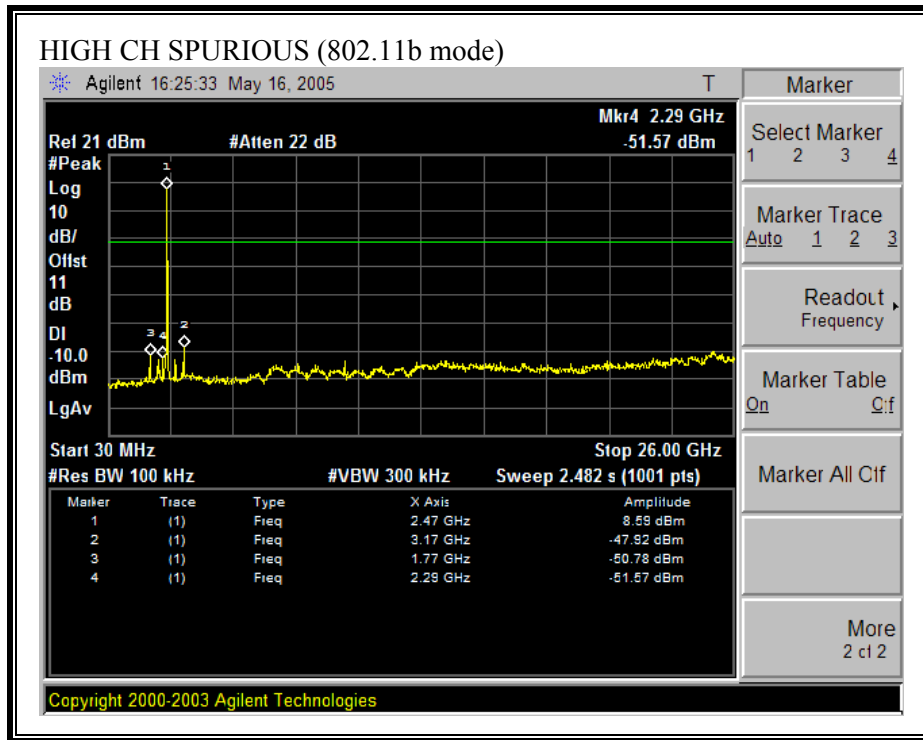



**SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)**

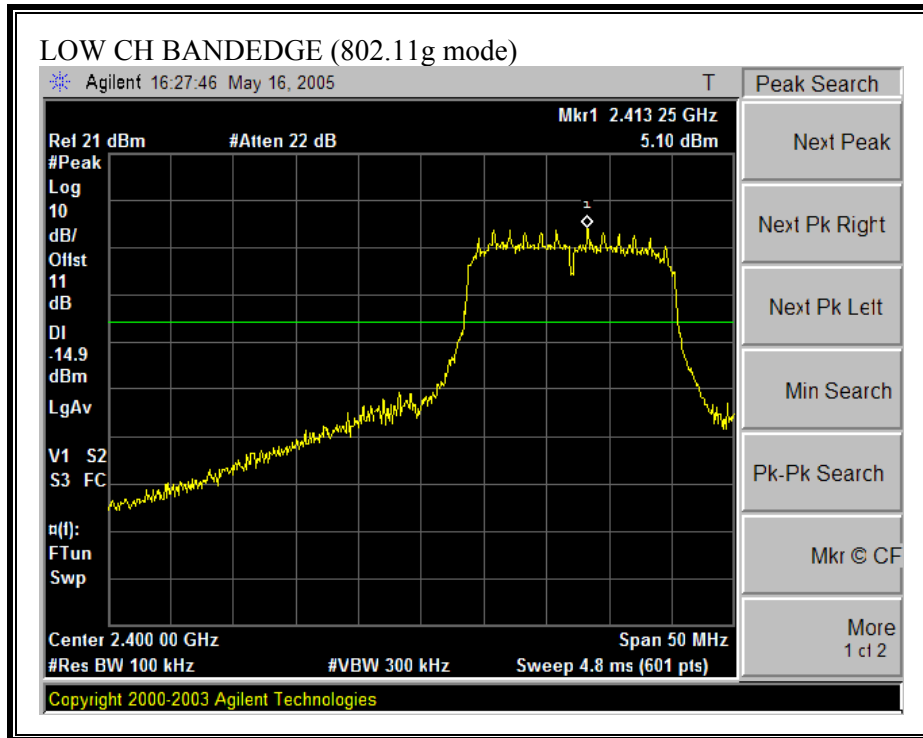

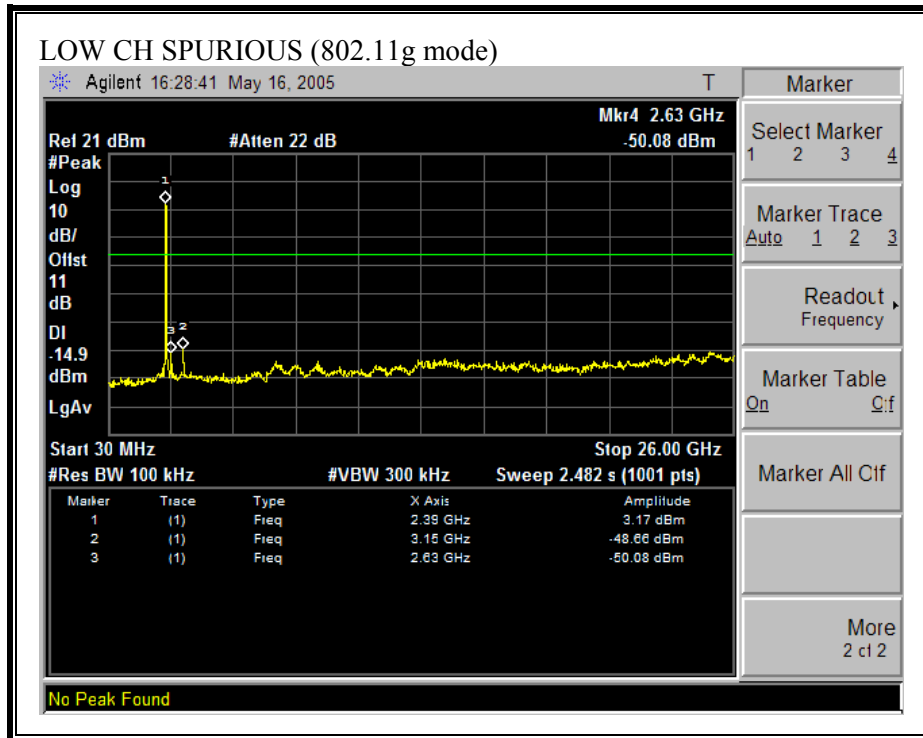



**SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)**

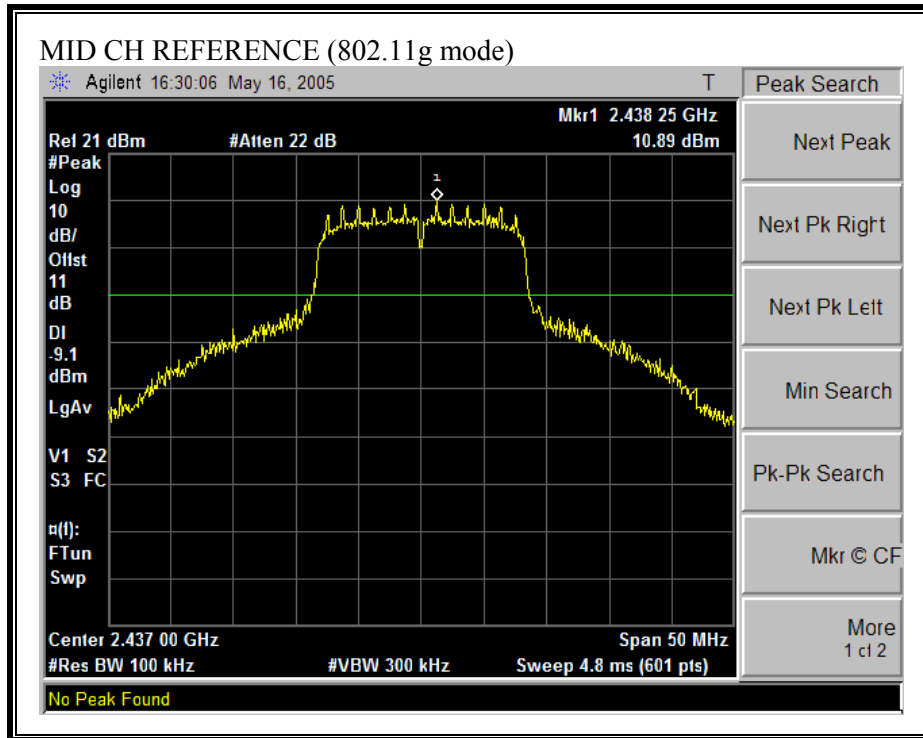

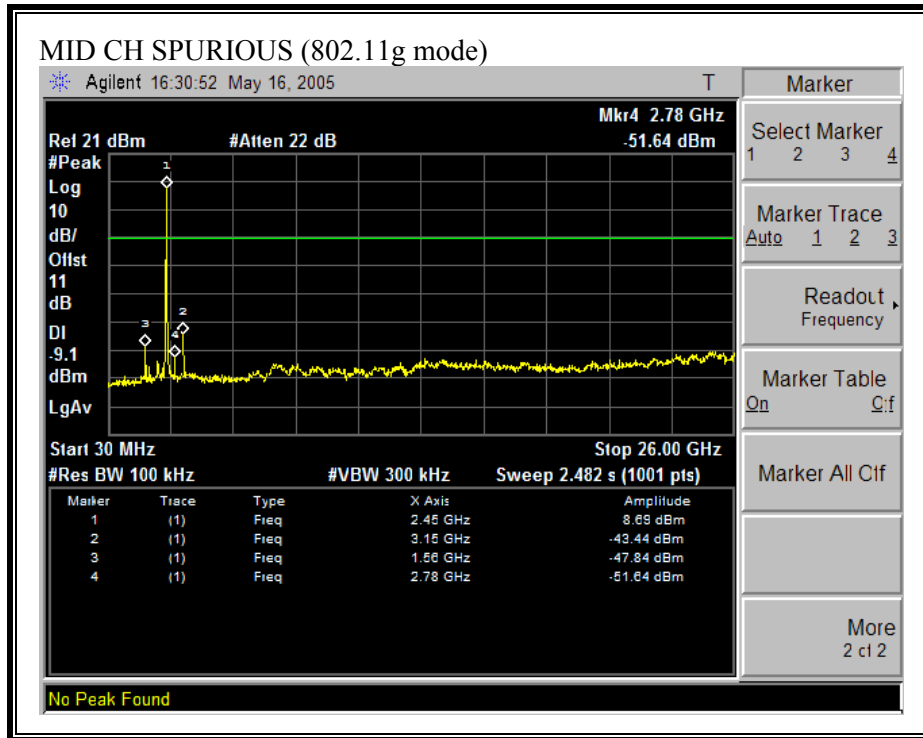

**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)**

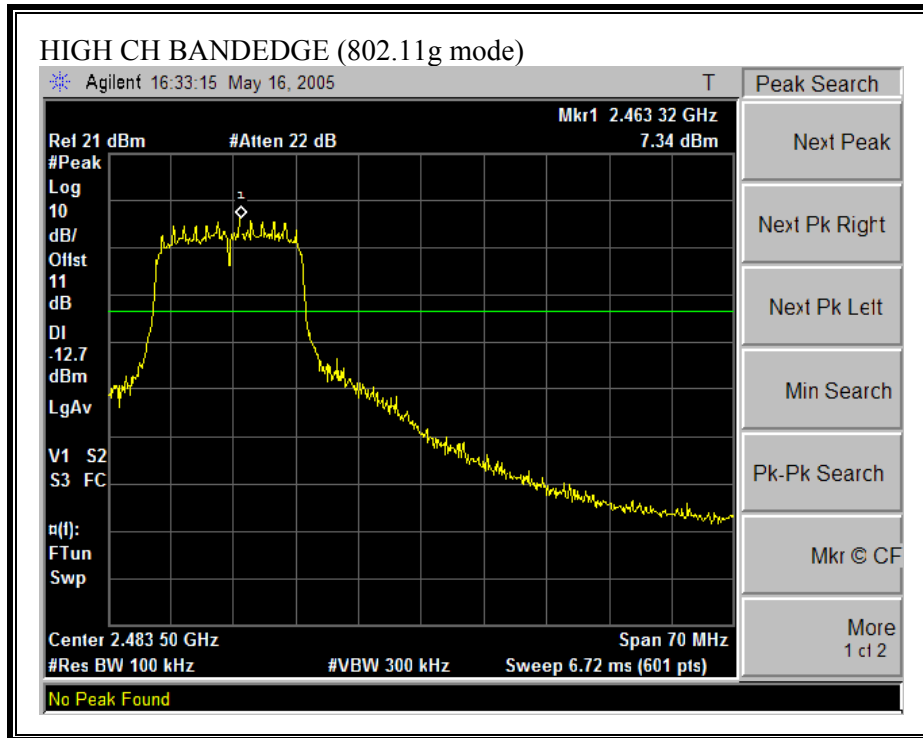

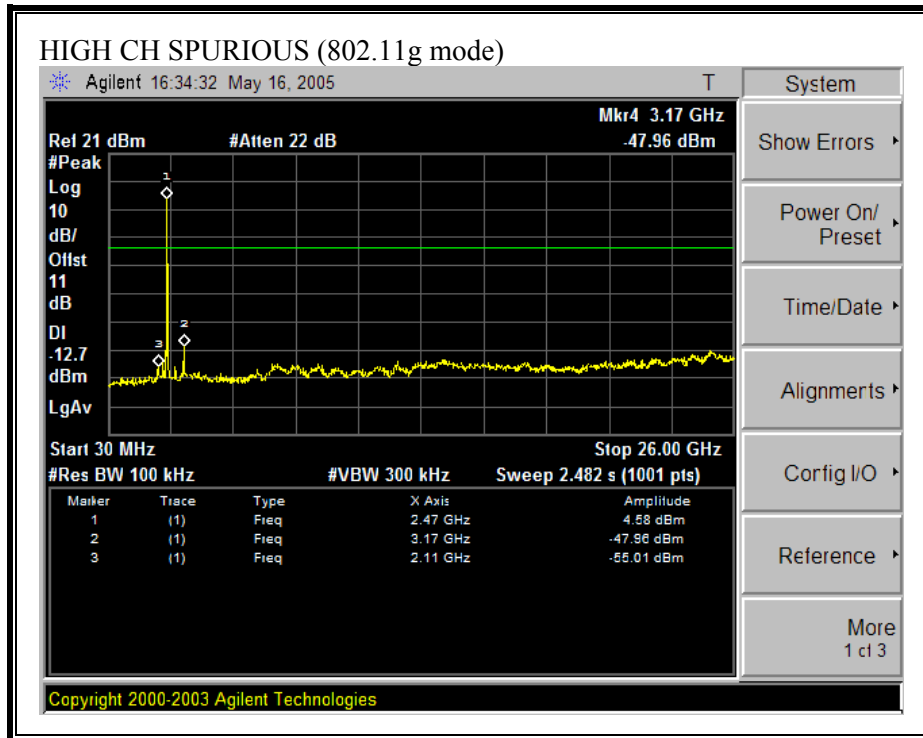

## 7.2. RADIATED EMISSIONS

### 7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


### 7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND


#### RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

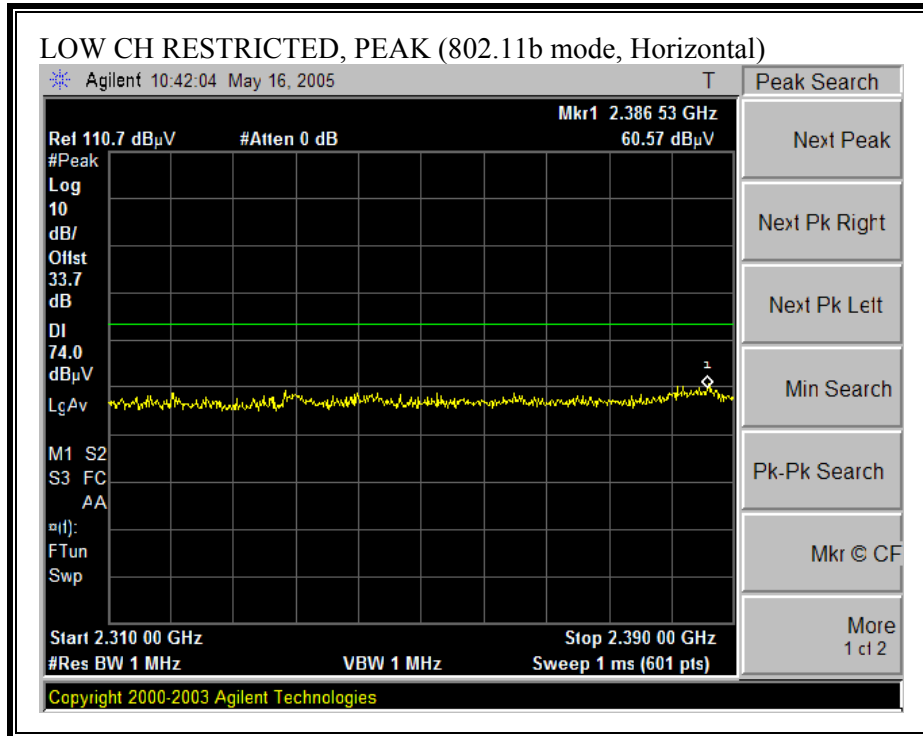

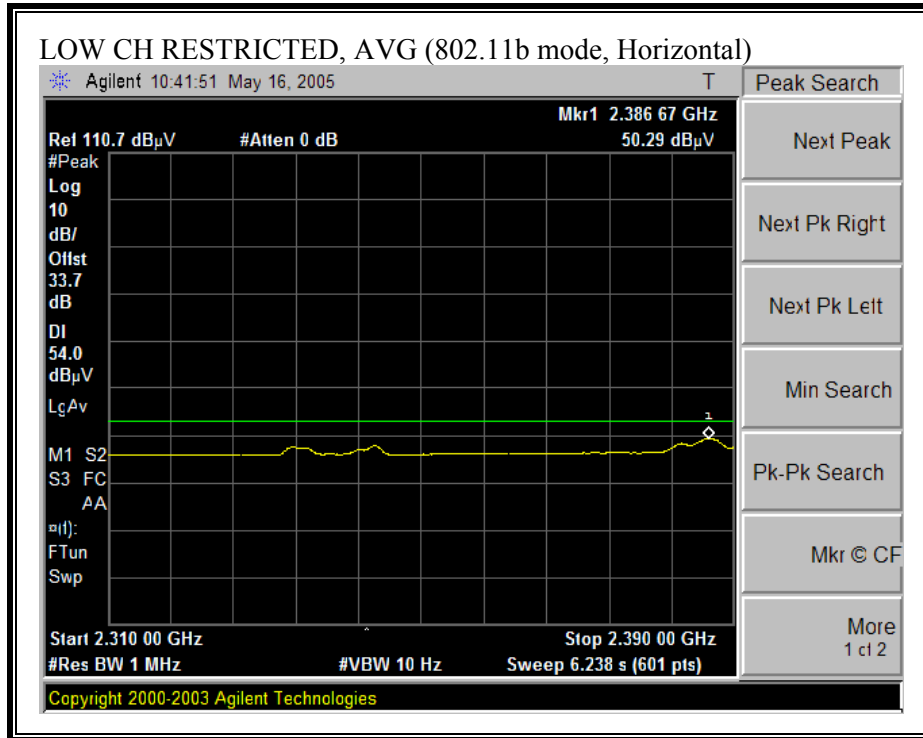



**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

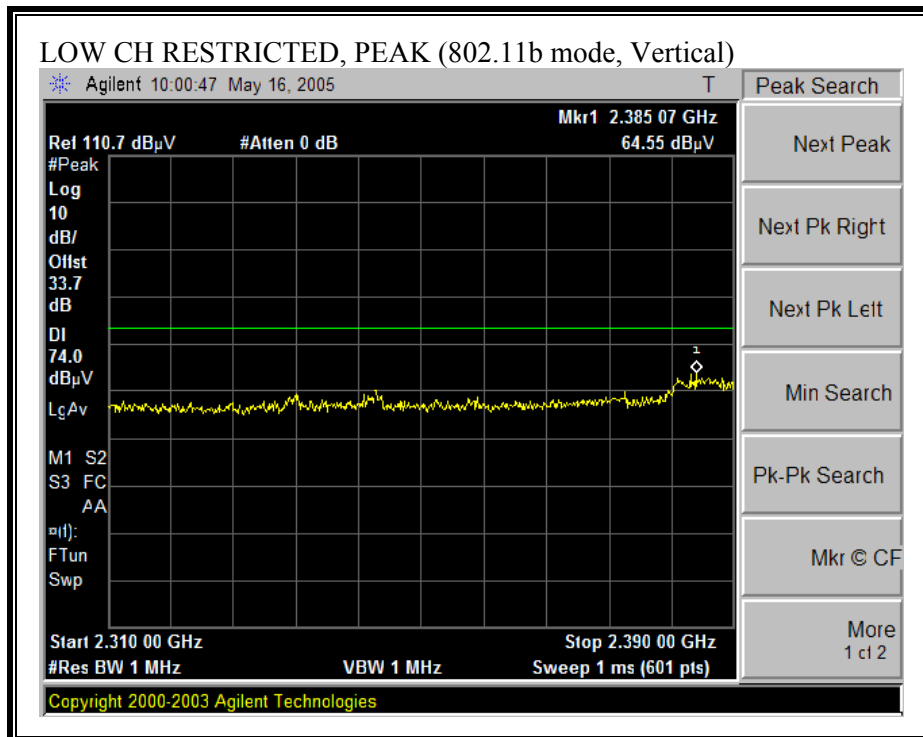

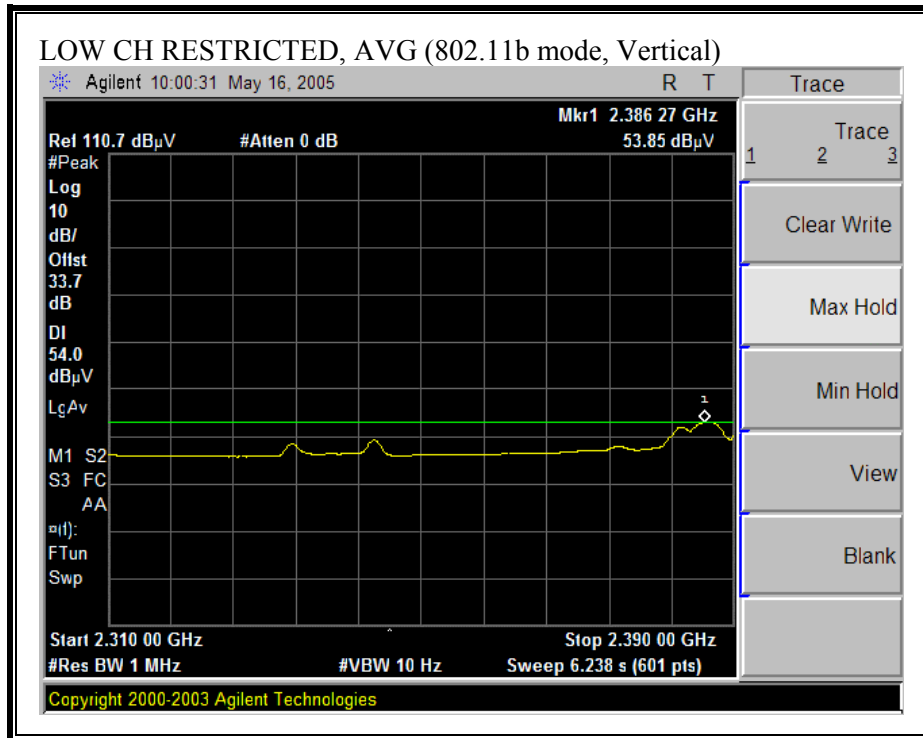


**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

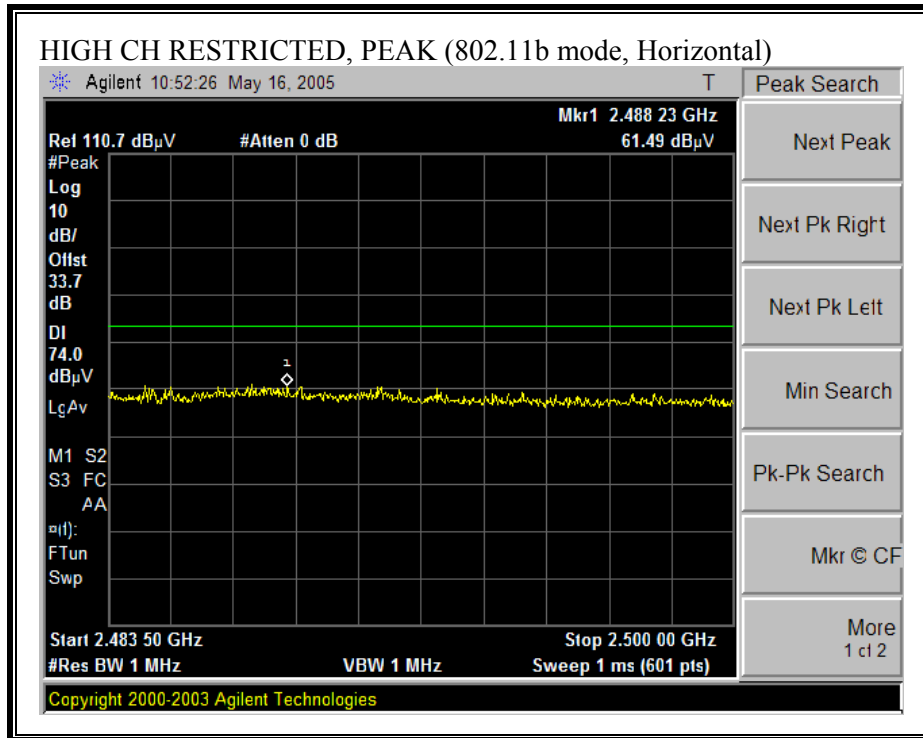


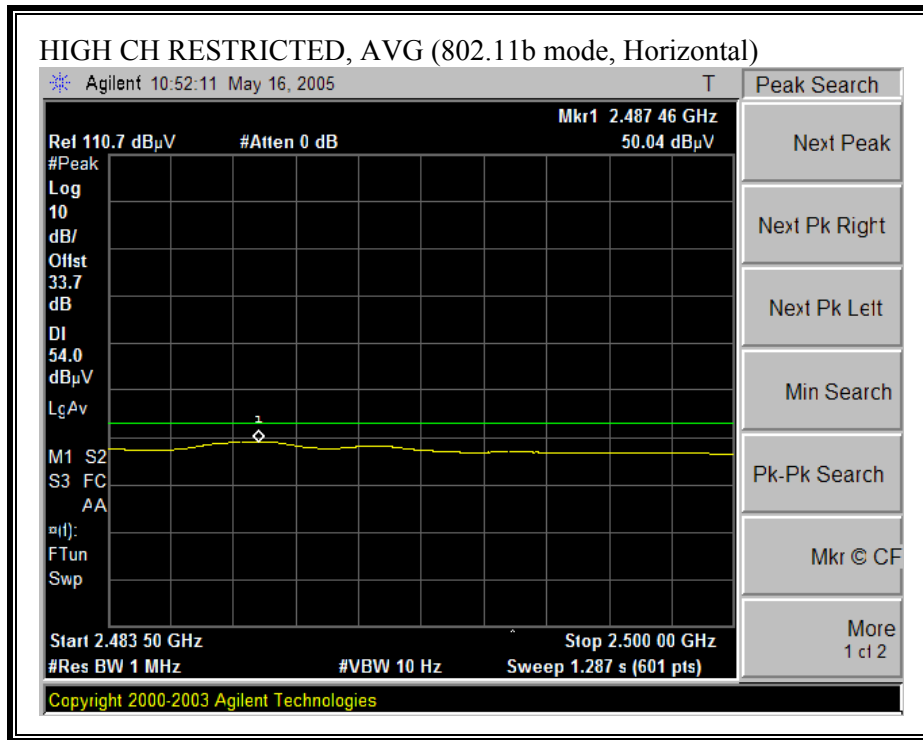



**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)**

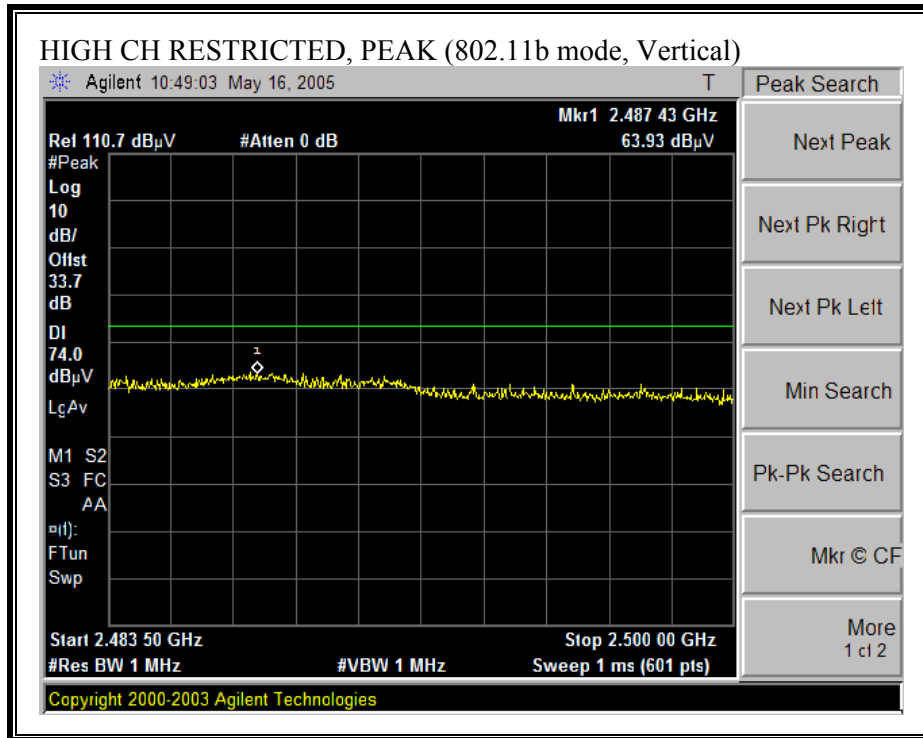

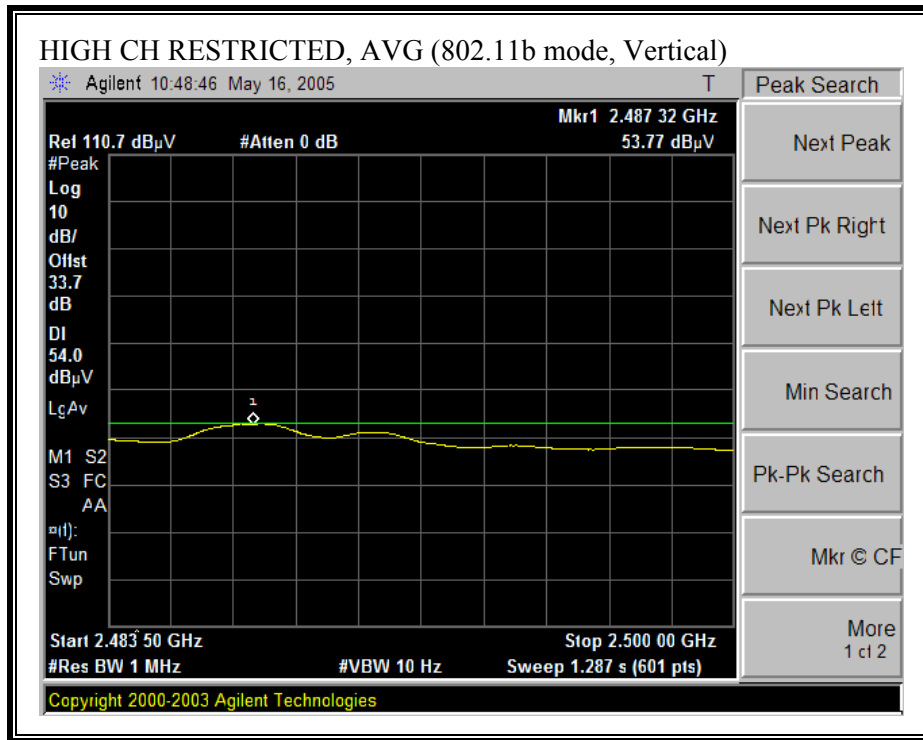

**HARMONICS AND SPURIOUS EMISSIONS (b MODE)**

05/16/05 **High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

**Test Engr:** HITESH H. SOLANKI  
**Project #:** 05U3468-1  
**Company:** AIRGO NETWORKS  
**EUT Descrip.:** APx 1x2 bg module  
**EUT M/N:** AGN0923AR-07  
**Test Target:** FCC CLASS B  
**Mode Oper:** TX CONTINUOUSLY ON SPECIFIED CHANNELS  
**Average Power Meter:** Low = xx dBm, Mid = xx dBm, High = xx dBm

**Test Equipment:**

EMCO Horn 1-18GHz T120; S/N: 29310 @3m	Pre-amplifier 1-26GHz T87 Miteq 924342	Pre-amplifier 26-40GHz	Horn > 18GHz
Hi Frequency Cables			
2 foot cable	3 foot cable 3_Vien	4 foot cable	12 foot cable 12_Hitesh


**Peak Measurements**  
RBW=VBW=1MHz


**Average Measurements**  
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>LOW CH. 2412 MHz</b>															
4.824	3.0	50.7	39.6	33.9	3.8	-39.6	0.0	0.0	48.9	37.8	74	54	-25.1	-16.2	V
7.236	3.0	50.4	38.6	35.9	5.2	-40.4	0.0	0.0	51.1	39.3	74	54	-22.9	-14.7	V
9.648	3.0	47.5	38.2	37.6	6.5	-38.1	0.0	0.0	53.5	44.2	74	54	-20.5	-9.8	V
<b>MID. CH. 2437 MHz</b>															
4.874	3.0	51.3	38.9	34.0	3.9	-39.6	0.0	0.0	49.5	37.1	74	54	-24.5	-16.9	V
7.311	3.0	49.3	39.0	35.9	5.2	-40.3	0.0	0.0	50.1	39.8	74	54	-23.9	-14.2	V
9.748	3.0	47.1	36.7	37.7	6.5	-37.9	0.0	0.0	53.4	43.0	74	54	-20.6	-11.0	V
<b>HIGH CH. 2462 MHz</b>															
4.924	3.0	56.2	40.9	34.0	3.9	-39.7	0.0	0.0	54.4	39.1	74	54	-19.6	-14.9	V
7.386	3.0	50.1	39.0	35.9	5.3	-40.3	0.0	0.0	51.0	39.9	74	54	-23.0	-14.1	V
9.848	3.0	46.9	35.5	37.8	6.6	-37.8	0.0	0.0	53.5	42.1	74	54	-20.5	-11.9	V
<b>LOW CH. 2412 MHz</b>															
4.824	3.0	51.0	38.0	33.9	3.8	-39.6	0.0	0.0	49.2	36.2	74	54	-24.8	-17.8	H
7.236	3.0	49.8	37.9	35.9	5.2	-40.4	0.0	0.0	50.5	38.6	74	54	-23.5	-15.4	H
9.648	3.0	46.5	35.3	37.6	6.5	-38.1	0.0	0.0	52.5	41.3	74	54	-21.5	-12.7	H
<b>MID. CH. 2437 MHz</b>															
4.874	3.0	51.3	38.9	34.0	3.9	-39.6	0.0	0.0	49.5	37.1	74	54	-24.5	-16.9	H
7.311	3.0	48.4	37.2	35.9	5.2	-40.3	0.0	0.0	49.2	38.0	74	54	-24.8	-16.0	H
9.748	3.0	46.4	34.7	37.7	6.5	-37.9	0.0	0.0	52.7	41.0	74	54	-21.3	-13.0	H
<b>HIGH CH. 2462 MHz</b>															
4.924	3.0	52.5	40.8	34.0	3.9	-39.7	0.0	0.0	50.7	39.0	74	54	-23.3	-15.0	H
7.386	3.0	50.3	38.3	35.9	5.3	-40.3	0.0	0.0	51.2	39.2	74	54	-22.8	-14.8	H
9.848	3.0	47.5	35.7	37.8	6.6	-37.8	0.0	0.0	54.1	42.3	74	54	-19.9	-11.7	H


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)**

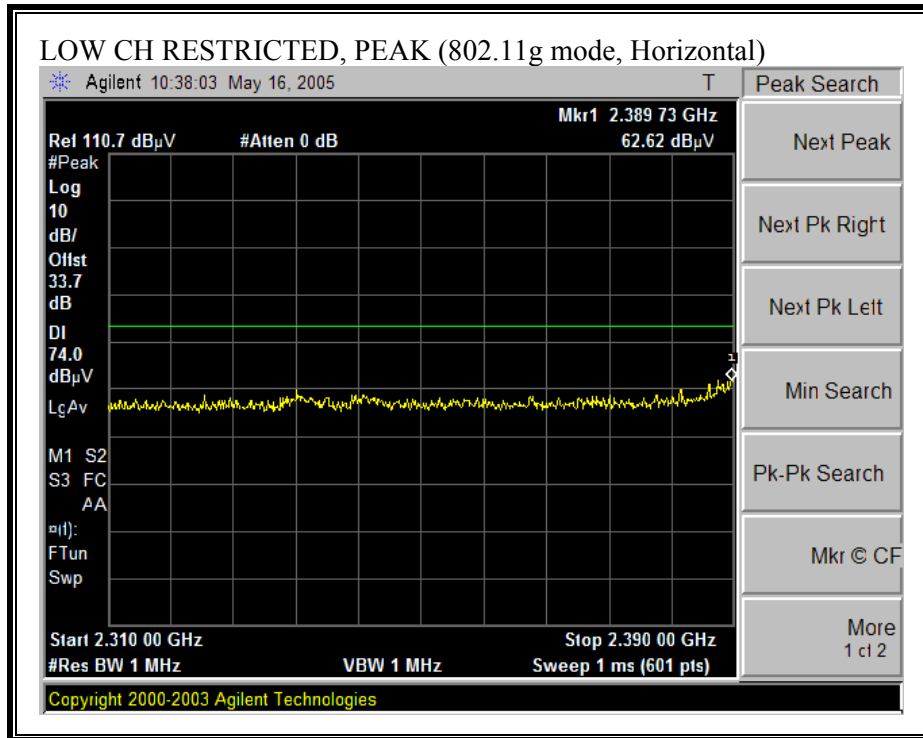

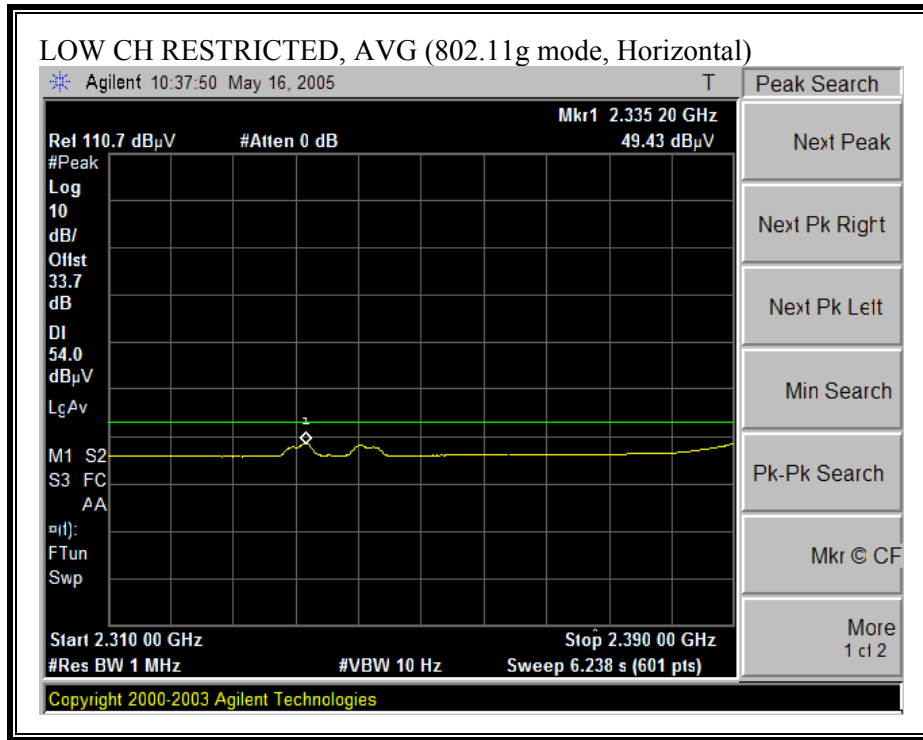


**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)**

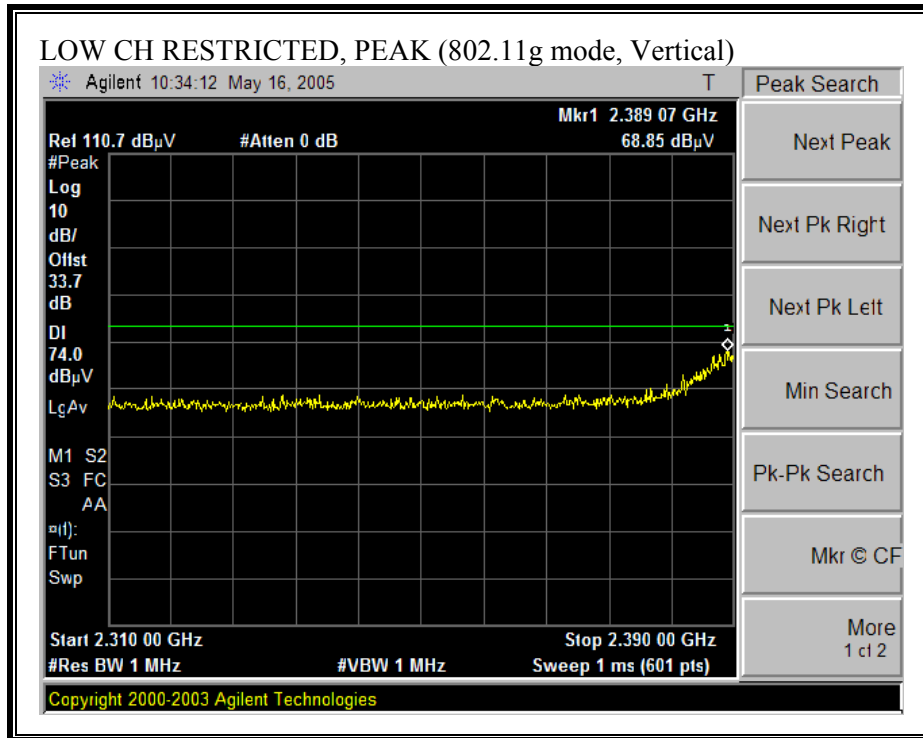


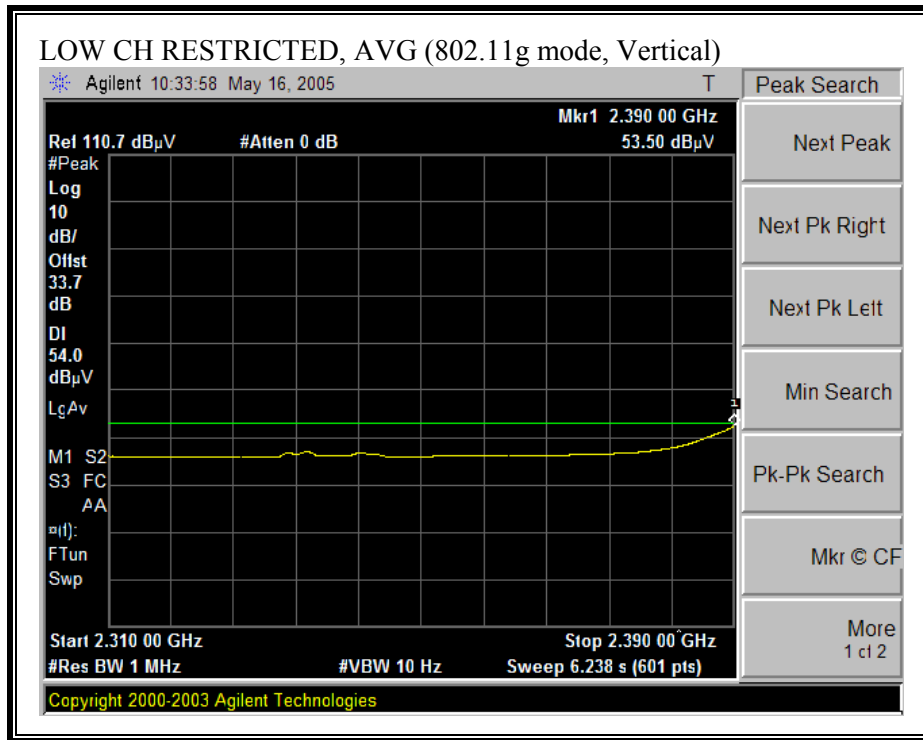


**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

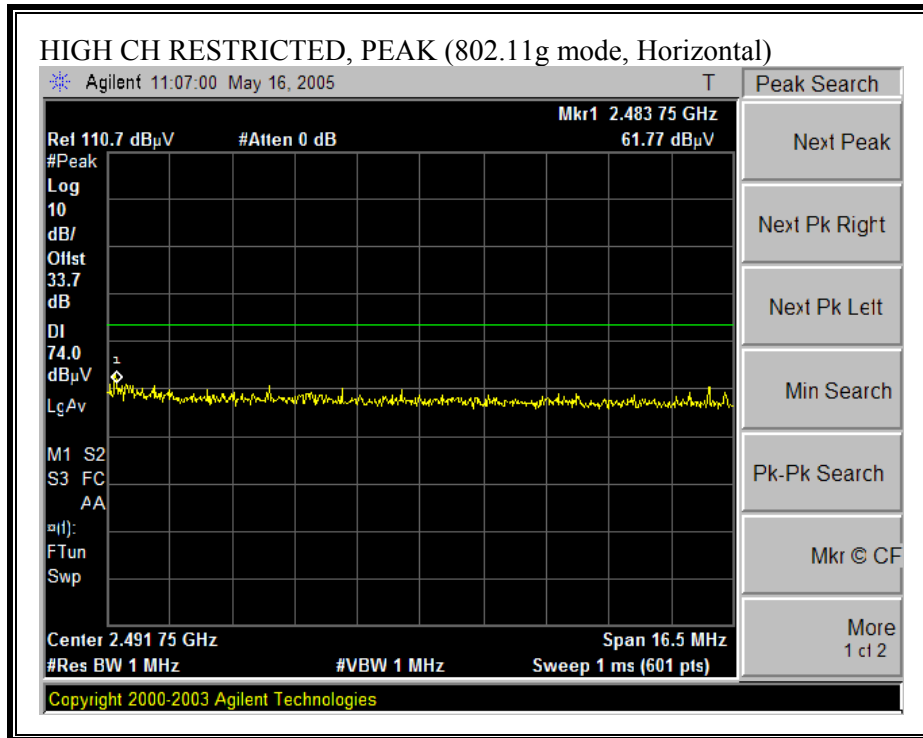




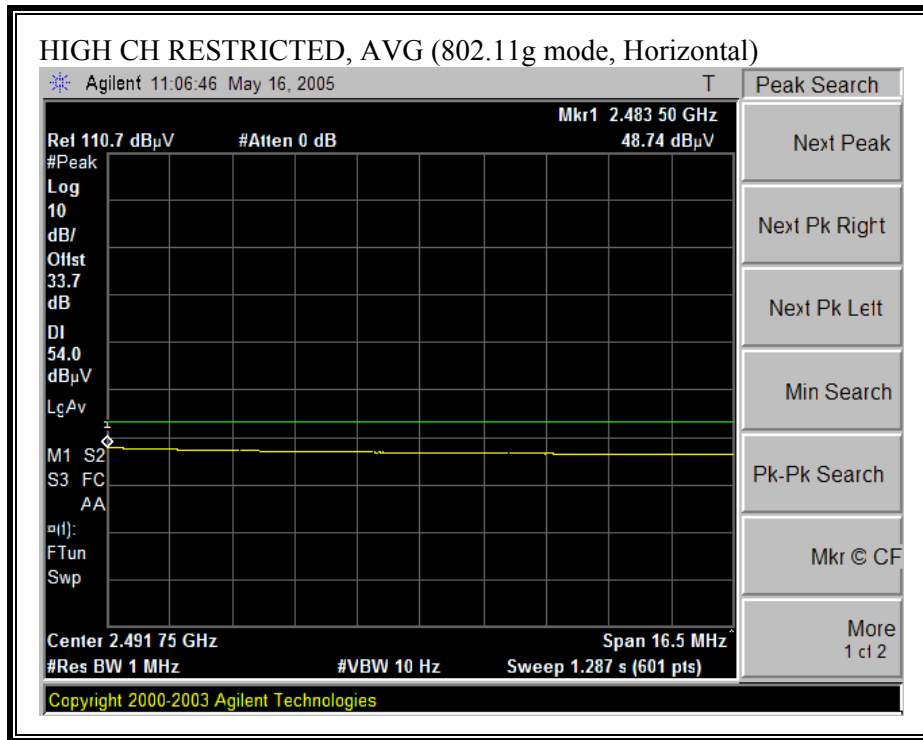

**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)**

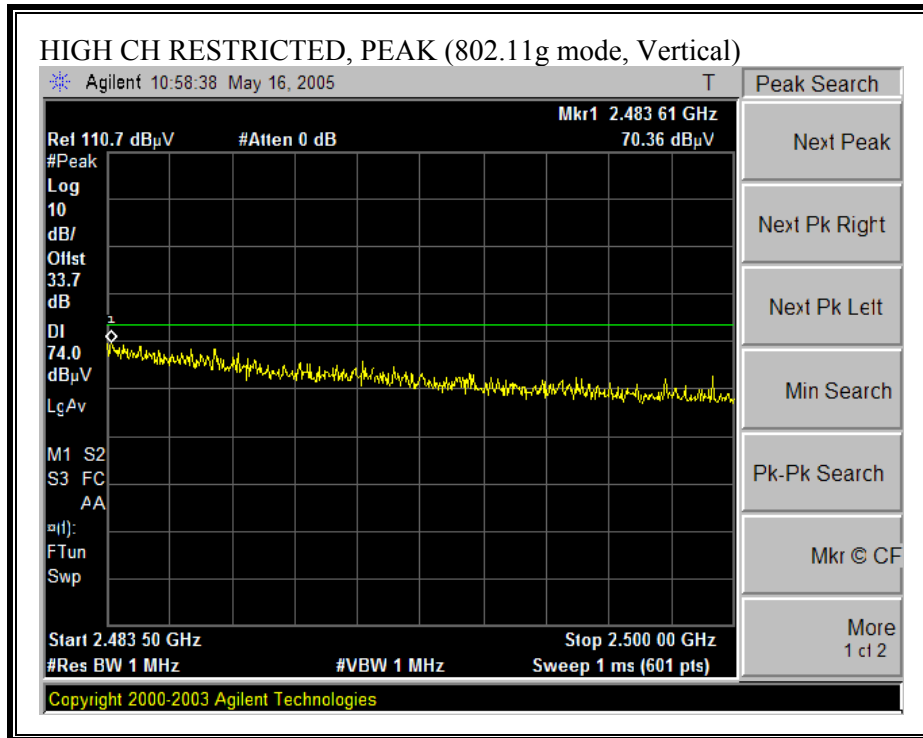

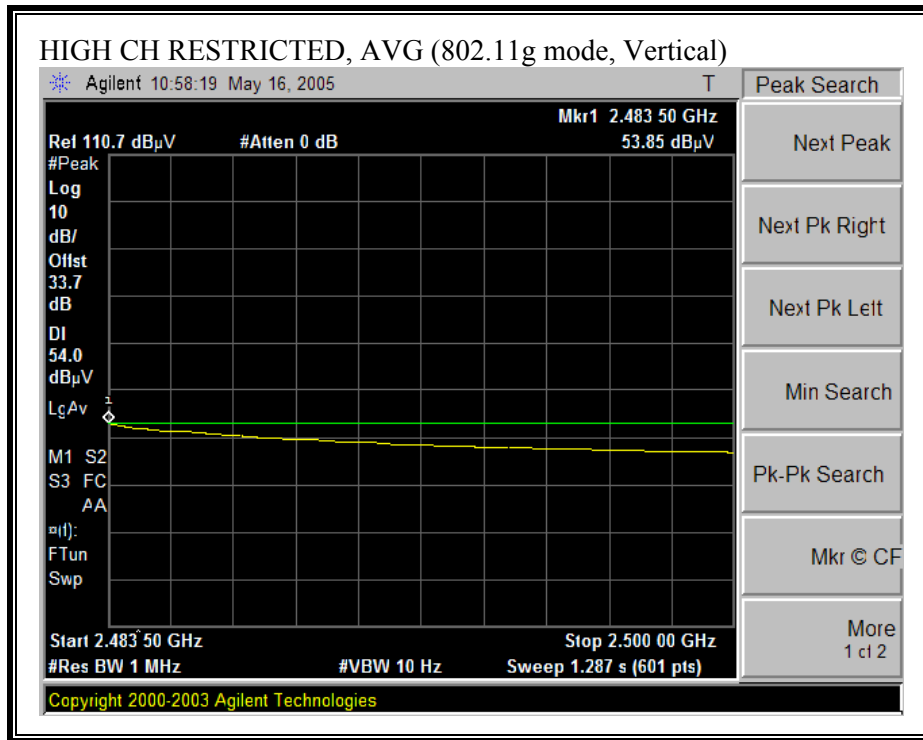

**HARMONICS AND SPURIOUS EMISSIONS (g MODE)**

04/26/05 **High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: HITESH H. SOLANKI  
 Project #: 05U3468-1  
 Company: AIRGO NETWORKS  
 EUT Descrip.: APx 1x2 bg module  
 EUT M/N: AGN0923AR-07  
 Test Target: FCC CLASS B  
 Mode Oper: TX CONTINUOUSLY ON SPECIFIED CHANNELS  
 Average Power Meter: Low = xx dBm, Mid = xx dBm, High = xx dBm

**Test Equipment:**

EMCO Horn 1-18GHz T120; S/N: 29310 @3m	Pre-amplifier 1-26GHz T87 Miteq924342	Pre-amplifier 26-40GHz	Horn >18GHz
---	--	------------------------	-------------

Hi Frequency Cables

2 foot cable	3 foot cable 3_Vien	4 foot cable	12 foot cable 12_Hitesh
--------------	------------------------	--------------	----------------------------


**Peak Measurements**  
 RBW=VBW=1MHz  
  
**Average Measurements**  
 RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>LOW CH. 2412 MHz</b>															
4.824	3.0	49.5	37.7	33.9	3.8	-39.6	0.0	0.0	47.7	35.9	74	54	-26.3	-18.1	V
7.236	3.0	50.0	38.0	35.9	5.2	-40.4	0.0	0.0	50.7	38.7	74	54	-23.3	-15.3	V
9.648	3.0	46.6	35.3	37.6	6.5	-38.1	0.0	0.0	52.6	41.3	74	54	-21.4	-12.7	V
<b>MID. CH. 2437 MHz</b>															
4.874	3.0	49.1	37.0	34.0	3.9	-39.6	0.0	0.0	47.3	35.2	74	54	-26.7	-18.8	V
7.311	3.0	49.4	37.6	35.9	5.2	-40.3	0.0	0.0	50.2	38.4	74	54	-23.8	-15.6	V
9.748	3.0	45.7	36.4	37.7	6.5	-37.9	0.0	0.0	52.0	42.7	74	54	-22.0	-11.3	V
<b>HIGH CH. 2462 MHz</b>															
4.924	3.0	50.3	38.6	34.0	3.9	-39.7	0.0	0.0	48.5	36.8	74	54	-25.5	-17.2	V
7.386	3.0	50.0	37.2	35.9	5.3	-40.3	0.0	0.0	50.9	38.1	74	54	-23.1	-15.9	V
9.848	3.0	46.9	34.6	37.8	6.6	-37.8	0.0	0.0	53.5	41.2	74	54	-20.5	-12.8	V
<b>LOW CH. 2412 MHz</b>															
4.824	3.0	49.7	37.6	33.9	3.8	-39.6	0.0	0.0	47.9	35.8	74	54	-26.1	-18.2	V
7.236	3.0	49.0	37.8	35.9	5.2	-40.4	0.0	0.0	49.7	38.5	74	54	-24.3	-15.5	H
9.648	3.0	46.4	35.2	37.6	6.5	-38.1	0.0	0.0	52.4	41.2	74	54	-21.6	-12.8	H
<b>MID. CH. 2437 MHz</b>															
4.874	3.0	49.9	37.7	34.0	3.9	-39.6	0.0	0.0	48.1	35.9	74	54	-25.9	-18.1	H
7.311	3.0	49.1	36.9	35.9	5.2	-40.3	0.0	0.0	49.9	37.7	74	54	-24.1	-16.3	H
9.748	3.0	46.4	34.7	37.7	6.5	-37.9	0.0	0.0	52.7	41.0	74	54	-21.3	-13.0	H
<b>HIGH CH. 2462 MHz</b>															
4.924	3.0	50.1	37.6	34.0	3.9	-39.7	0.0	0.0	48.3	35.8	74	54	-25.7	-18.2	H
7.386	3.0	49.6	37.0	35.9	5.3	-40.3	0.0	0.0	50.5	37.9	74	54	-23.5	-16.1	H
9.848	3.0	46.6	34.7	37.8	6.6	-37.8	0.0	0.0	53.2	41.3	74	54	-20.8	-12.7	H


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

### 7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

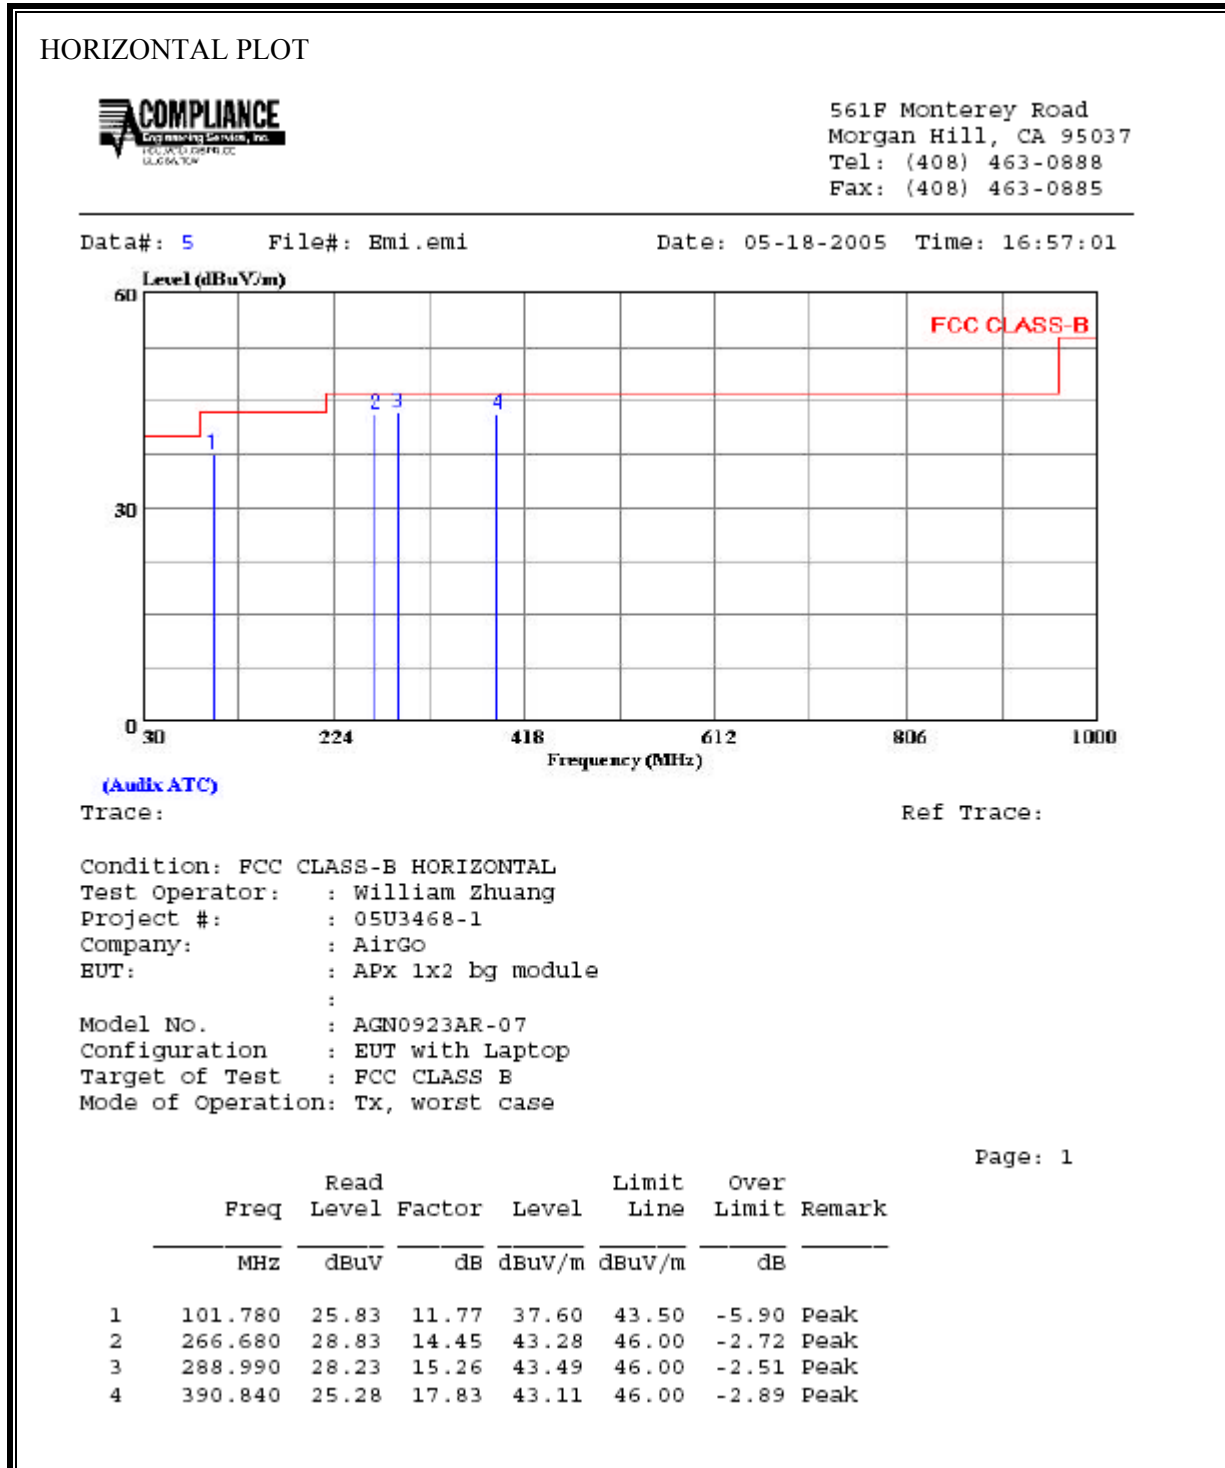

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

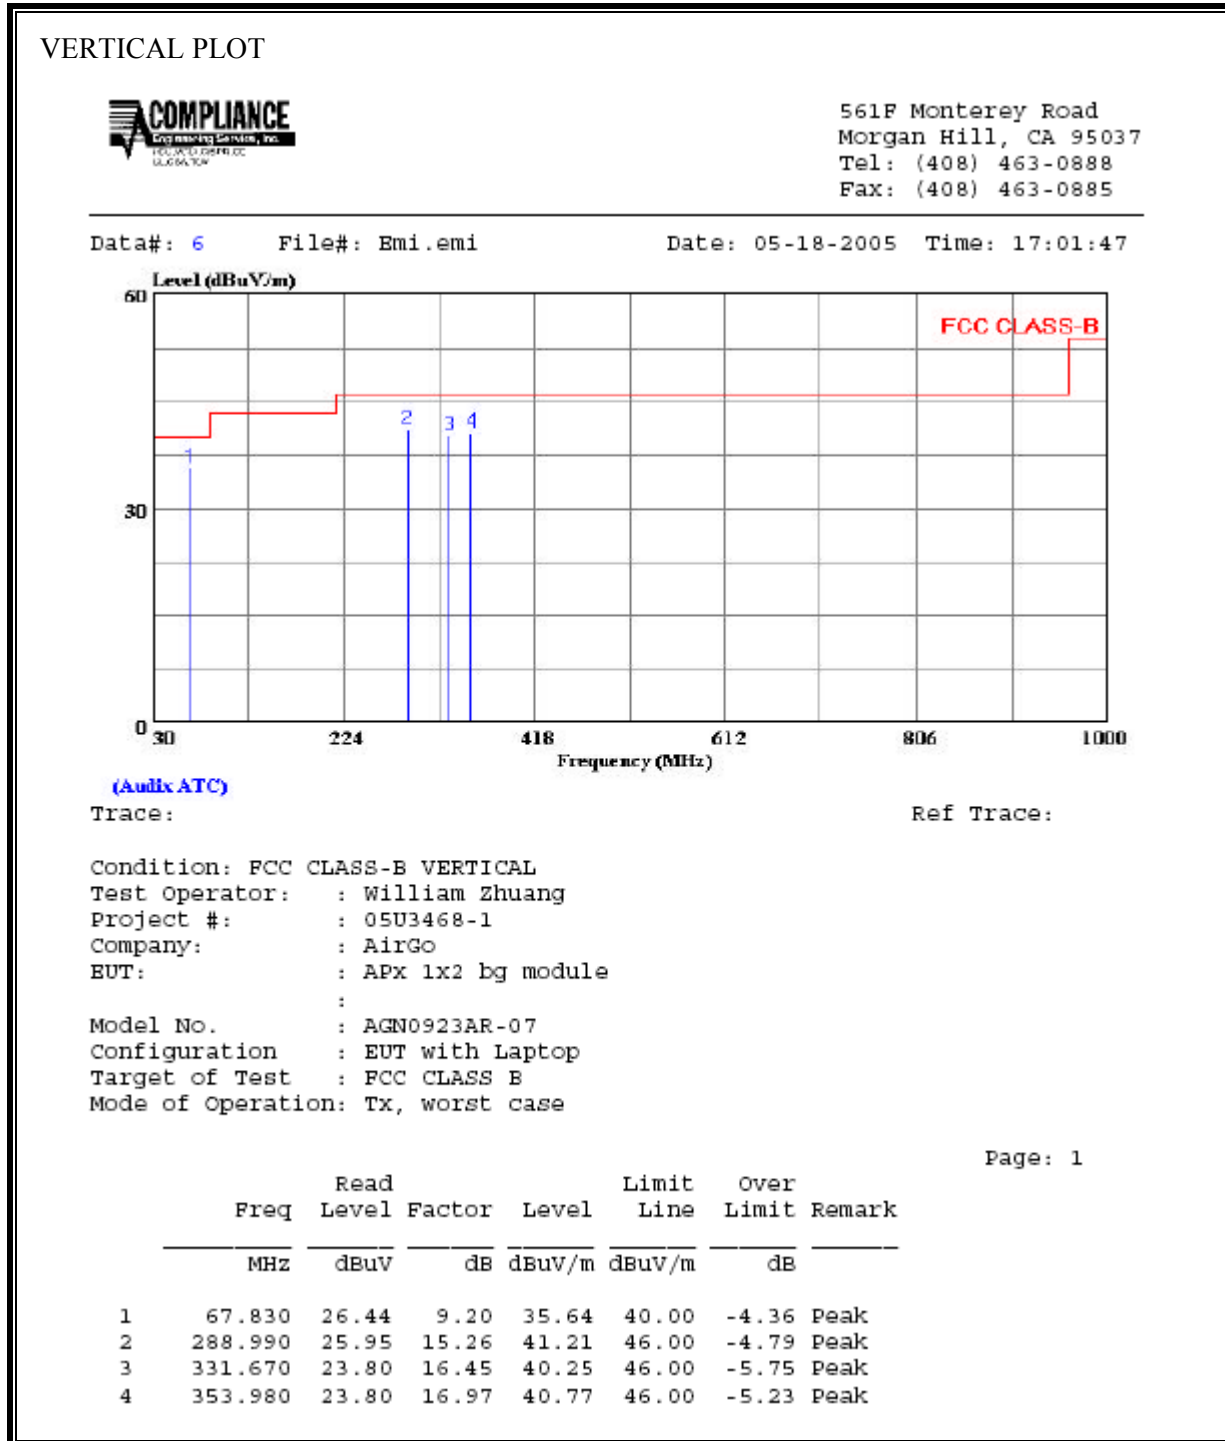

### 7.3. POWERLINE CONDUCTED EMISSIONS

#### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

#### RESULTS


No non-compliance noted:

**6 WORST EMISSIONS**


CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Class (dB)	Limit QP	FCC B		Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)			AV	QP (dB)	AV (dB)		
0.17	53.54	--	28.68	0.00	65.01	55.01	-11.47	-26.33	L1	
0.23	44.68	--	30.48	0.00	62.52	52.52	-17.84	-22.04	L1	
0.29	40.24	--	24.52	0.00	60.67	50.67	-20.43	-26.15	L1	
0.17	52.34	--	35.36	0.00	65.01	55.01	-12.67	-19.65	L2	
0.23	44.74	--	29.81	0.00	62.38	52.38	-17.64	-22.57	L2	
0.29	41.44	--	25.53	0.00	60.55	50.55	-19.11	-25.02	L2	
6 Worst Data										



**LINE 1 RESULTS**

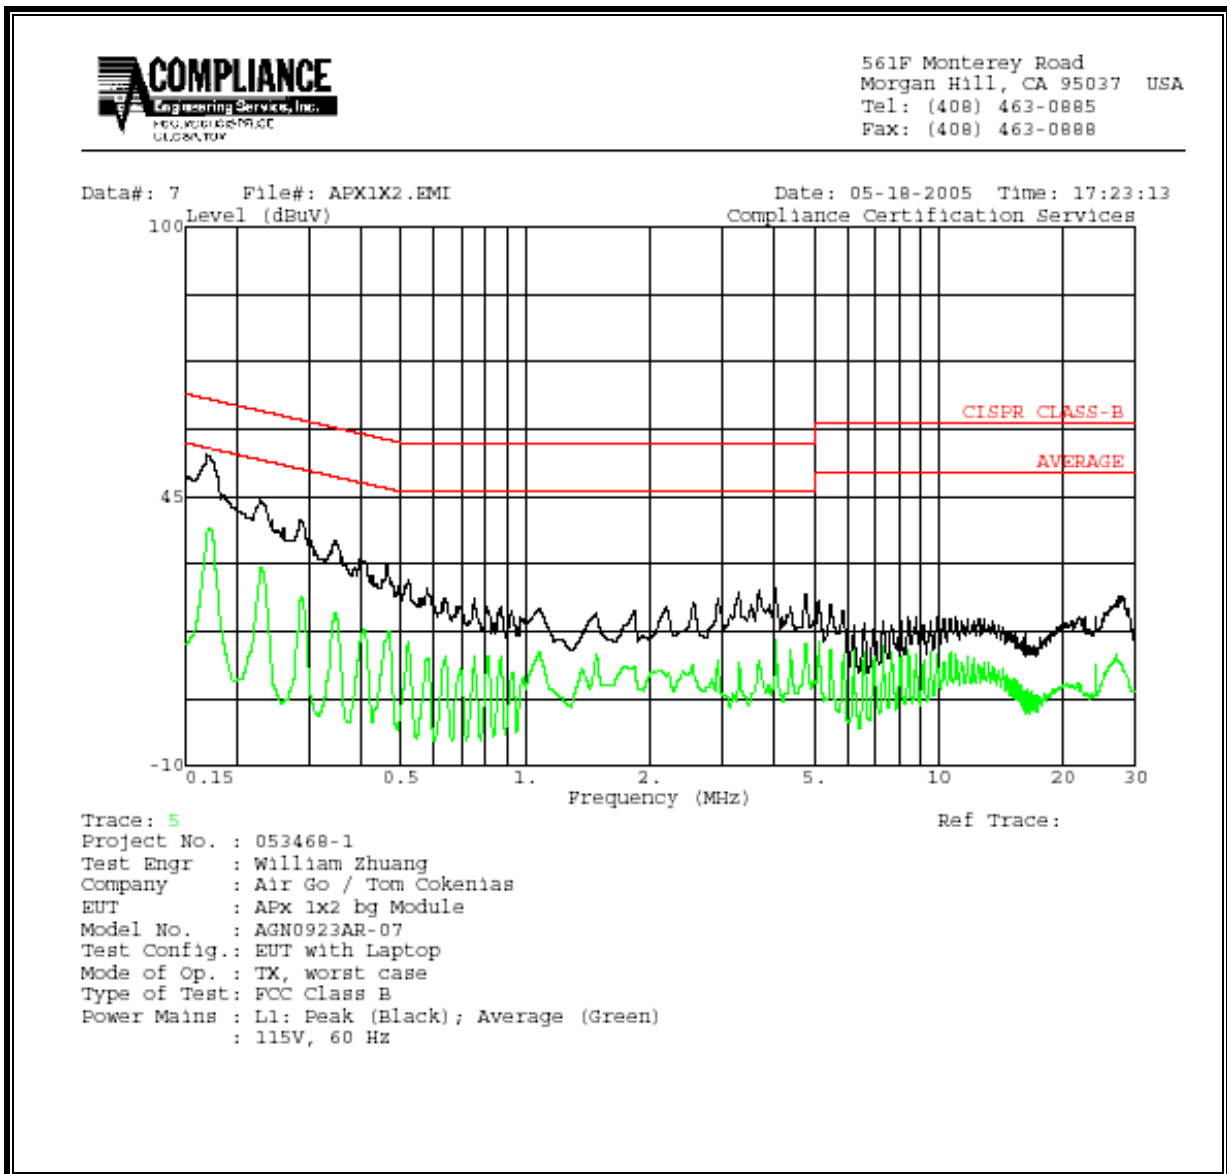


**LINE 2 RESULTS**

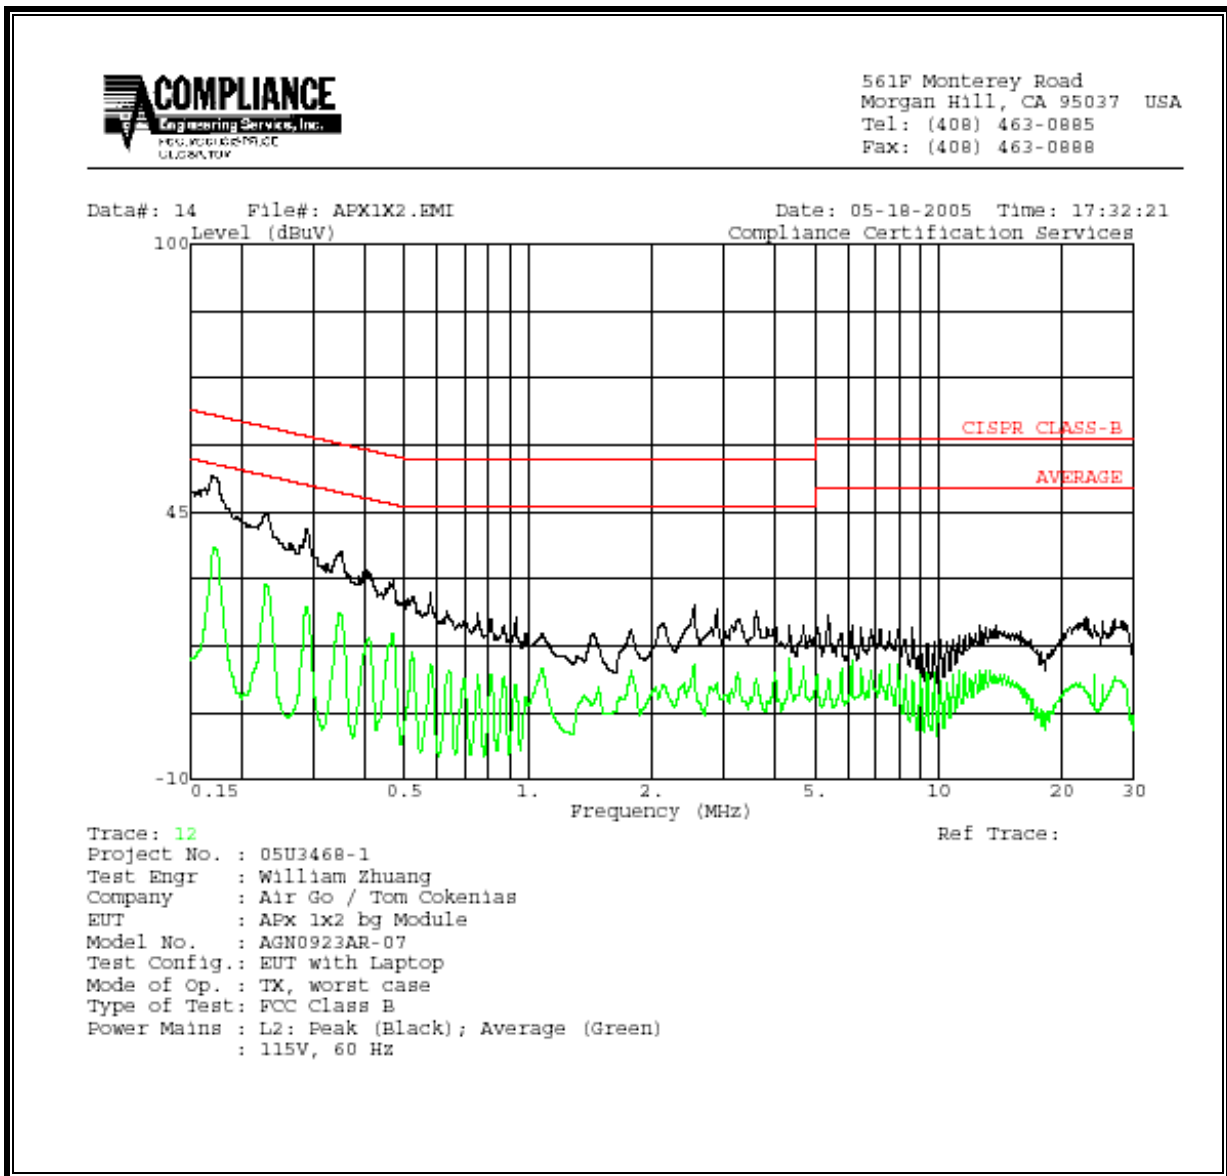


## 8. SETUP PHOTOS

### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

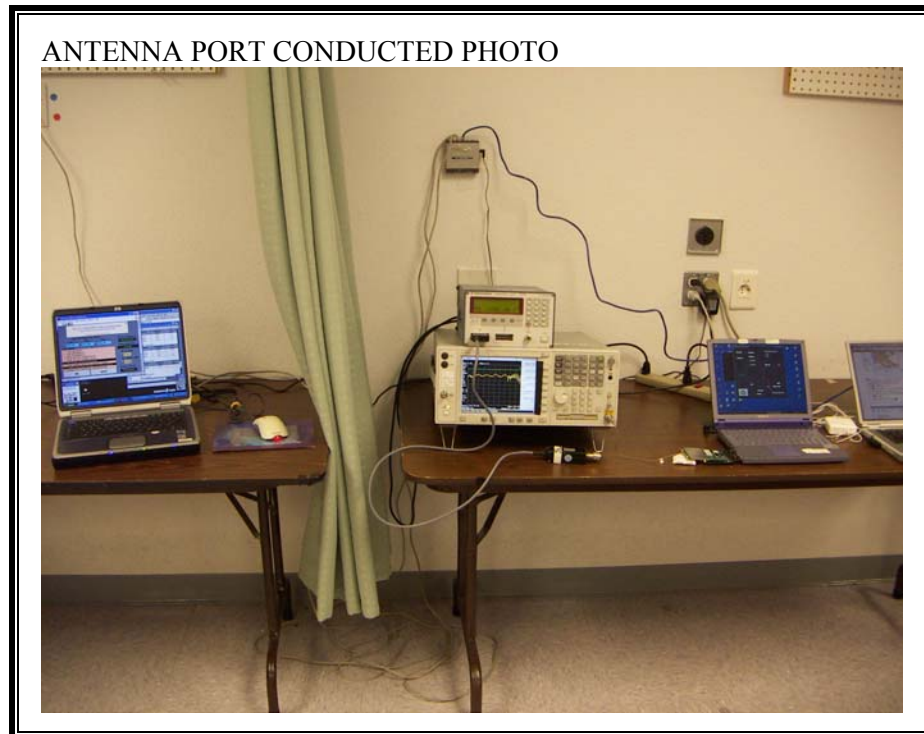


**RADIATED RF MEASUREMENT SETUP**

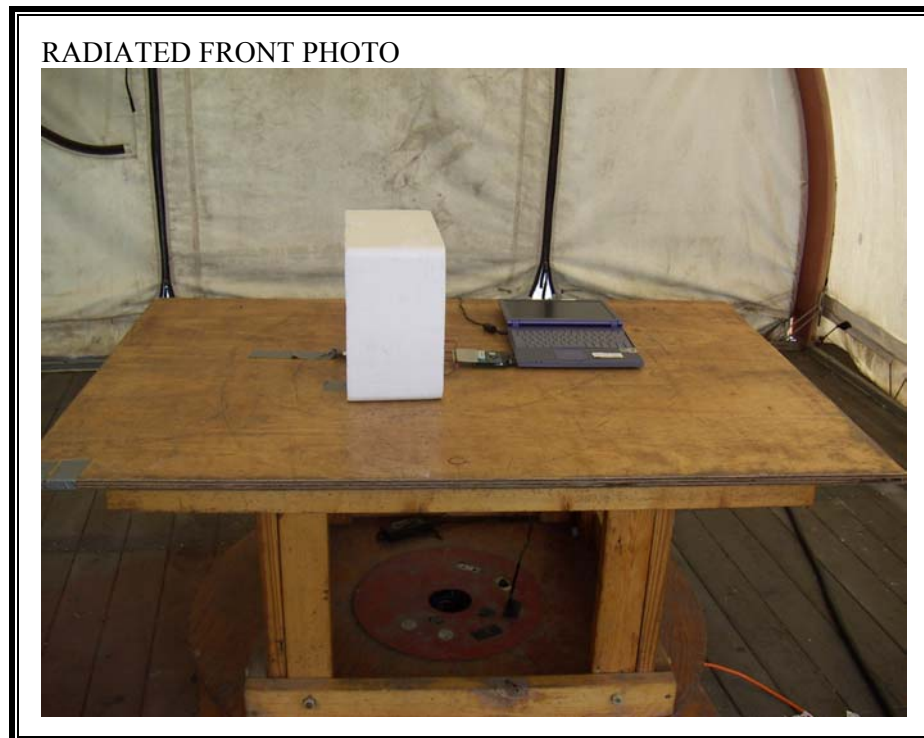



**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**

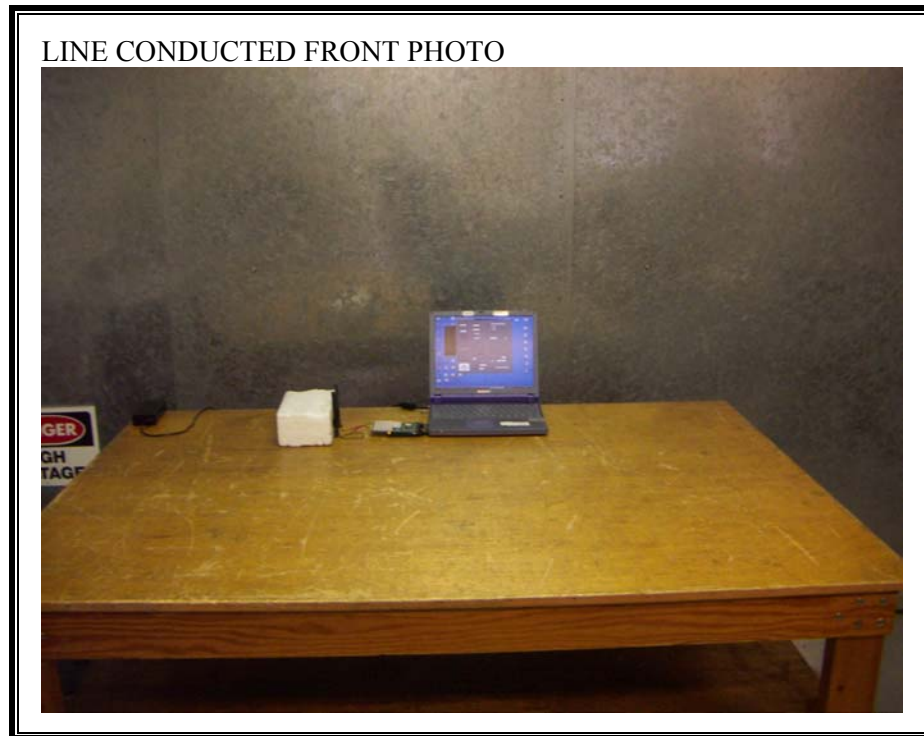



**END OF REPORT**