



FCC PART 18
MEASUREMENT AND TEST REPORT
FOR
Toshiba Lighting & Technology Corporatin

2-13, MINAMISHINAGAWA 2-CHOME. SHINAGAWA-KU.TOKYO 1408660

FCC ID: SAJSKB13WAP

2004-06-22

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: Self-ballasted lamp
Test Engineer: <u>Jerry Wang/</u> 	
Report Number: <u>R0406153</u>	
Test Date: <u>2004-06-15</u>	
Reviewed By: <u>Ling Zhang/</u> 	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: The test report is specially limited to the use of the above client company and the product model. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. Government

TABLE OF CONTENTS

1 - GENERAL INFORMATION3

- 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3
- 1.2 OBJECTIVE3
- 1.3 RELATED SUBMITTAL(S)/GRANT(S)3
- 1.4 TEST METHODOLOGY3
- 1.5 TEST FACILITY.....3

2 - SYSTEM TEST CONFIGURATION.....4

- 2.1 JUSTIFICATION4
- 2.2 EUT EXERCISE PROGRAM4
- 2.3 SCHEMATICS/BLOCK DIAGRAM4
- 2.4 EQUIPMENT MODIFICATIONS.....4
- 2.5 LOCAL SUPPORT EQUIPMENT4
- 2.6 INTERFACE PORTS AND CABLING4
- 2.7 CONFIGURATION OF TEST SYSTEM.....5
- 2.8 TEST SETUP BLOCK DIAGRAM.....5

3 - CONDUCTED EMISSIONS TEST DATA.....6

- 3.1 MEASUREMENT UNCERTAINTY.....6
- 3.2 EUT SETUP6
- 3.3 EMI RECEIVER SETUP6
- 3.4 EQUIPMENT LIST AND DETAILS.....6
- 3.5 TEST PROCEDURE.....6
- 3.6 SUMMARY OF TEST RESULTS.....7
- 3.7 CONDUCTED EMISSIONS TEST DATA.....7

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

The *Toshiba Lighting & Technology Corporation's* product, Model: *SKB 13EAP* or the "EUT" as referred to in this report is a Self-ballasted lamp, which measures 4"L x 2.5"W x 2.5"H.

**The test data gathered are from production sample, serial number:TL06153, provided by the manufacturer.*

1.2 Objective

This Following test report is prepared on behalf of *Toshiba Lighting & Technology Corporation* in accordance with Part 2, Subpart J, and Part 18, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 18 limit requirements for Industrial, Scientific, and Medical Equipment.

1.3 Related Submittal(s)/Grant(s)

No Related Submittals.

1.4 Test Methodology

All measurements contained in this report were conducted in accordance with MP-5, FCC Methods of Measurements of Radio Noise Emissions from Industrial, Scientific, and Medical Equipment. All radiated and conducted emission measurements were performed at Bay Area Compliance Laboratory Corp. (BACL).

1.5 Test Facility

The Open Area Test site used by BACL to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules and Article 8 of the VCCI regulations. The facility also complies with the test methods and procedures set forth ANSI C63.4-2001.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0).

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT is configured for testing according to MP-5.

2.2 EUT Exercise Program

The sequence used is as follows:

The EUT was switched on after being connected to the mains power supply.

2.3 Schematics/Block Diagram

The EUT's block diagram is presented in Appendix D.

2.4 Equipment Modifications

The EUT samples provided were reported by the manufacturer to be unmodified production samples.


2.5 Local Support Equipment

Manufacturer	Description	Model	Serial Number	FCC ID
QUEEN PUO	Power Cord Cable	E89949	E183417	None


2.6 Interface Ports and Cabling

Cable Description	Length (M)	From/Port	To
None-Shielded Power Cord Cable	1.6	AC Output	WALL Light /EUT

2.7 Configuration of Test System



2.8 Test Setup Block Diagram

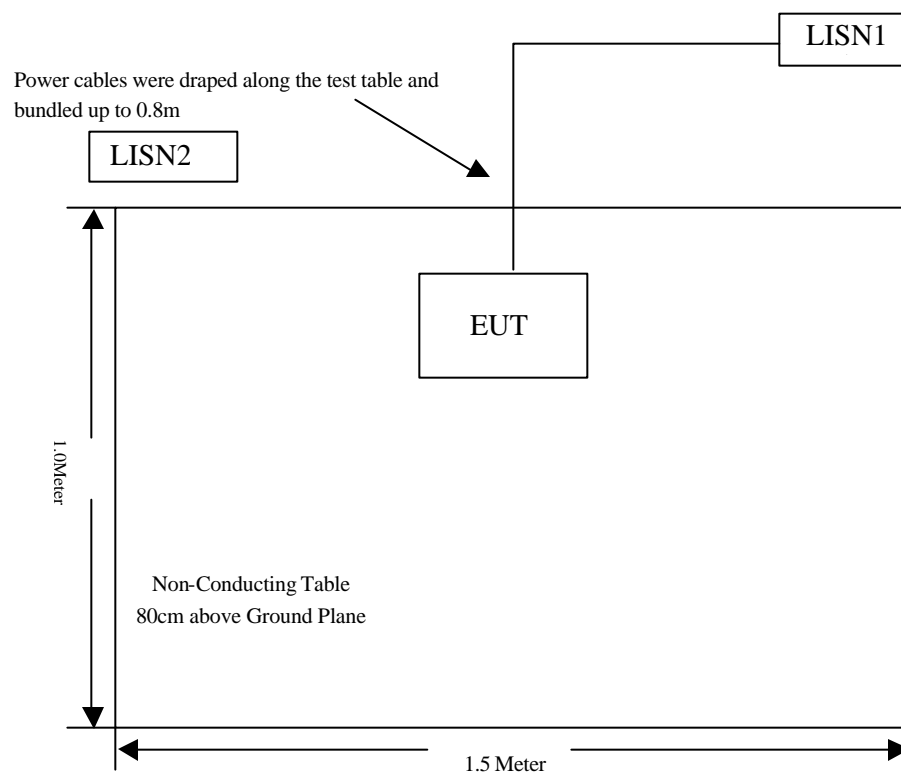

3 - CONDUCTED EMISSIONS TEST DATA

3.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties. The factors contributing to uncertainties are spectrum analyzer, amplifier, and calibration procedures, LISN etc.

Based on NIS 81, The Treatment of Uncertainty in EMI Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is ± 2.4 dB.

3.2 EUT Setup

The measurement is performed in the shield room, using the same setup per FCC MP-5 measurement procedure. The specification used was the FCC Part Subpart C 18 limits.

The EUT was placed on the center of the back edge on the test table.

The power cord extension of the EUT was connected with 120 VAC/60 Hz power source.

3.3 EMI Receiver Setup

The spectrum analyzer was set to investigate the spectrum from 450 kHz to 30MHz.

3.4 Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal Date
Rohde & Schwarz	Artificial-Mains Network	ESH2-Z5	871884/039	2004-03-28
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2004-05-06
Fluke	Calibrated Voltmeter	189	18485-38	2003-07-18

3.5 Test Procedure

During the conducted emissions test, the power cord of the power cord extension was connected to the mains outlet of the LISN-1.

The six highest emissions were maximized to ensure the EUT is in compliance in all possible installation configurations.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (within -4 dB of the specification limits). Quasi-peak readings are distinguished with a "Qp".

The EUT was tested under the normal modes during the final qualification test to represent the worst case results.

3.6 Summary of Test Results

According to the data in section 3.7, the EUT, was found to be in compliance with the FCC 18 Conducted margin for industry, scientific and medical devices, and with the worst margin reading of:

-20.9 dB at 0.54 MHz at the Neutral mode, 0.45-30MHz

Environmental Conditions

Temperature:	30°C
Relative Humidity:	64%
ATM Pressure:	1019mbar

3.7 Conducted Emissions Test Data

3.7.1 Conducted Test, 0.45-30MHz.

LINE CONDUCTED EMISSIONS				FCC PART 18	
Frequency	Amplitude	Detector	Phase	Limit	Margin
MHz	dB μ V	Qp/Ave/Peak	Line/Neutral	dB μ V	dB
0.54	35.1	Peak	Neutral	48	-20.9
0.46	31.6	Peak	Line	48	-25.1
0.72	30.8	Peak	Neutral	48	-25.2
0.79	30.1	Peak	Neutral	48	-25.9
0.60	29.5	Peak	Line	48	-26.5
0.84	28.8	Peak	Line	48	-27.2

3.7.2 Plot of Conducted Emissions Test Data

The plot(s) of conducted emission test is presented in the following page as reference.


Bay Area Compliance Laboratory Corp
FCC 18

15. Jun 04 18:00

EUT: SKB 13 EAP
 Manuf: Toshiba Lighting
 Op Cond: Normal
 Operator: Jerry
 Comment: L

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	
450k	1M	5k	9k	PK	20ms	15dB LN	OFF	
1M	5M	10k	9k	PK	1ms	15dB LN	OFF	
5M	30M	100k	9k	PK	1ms	15dB LN	OFF	

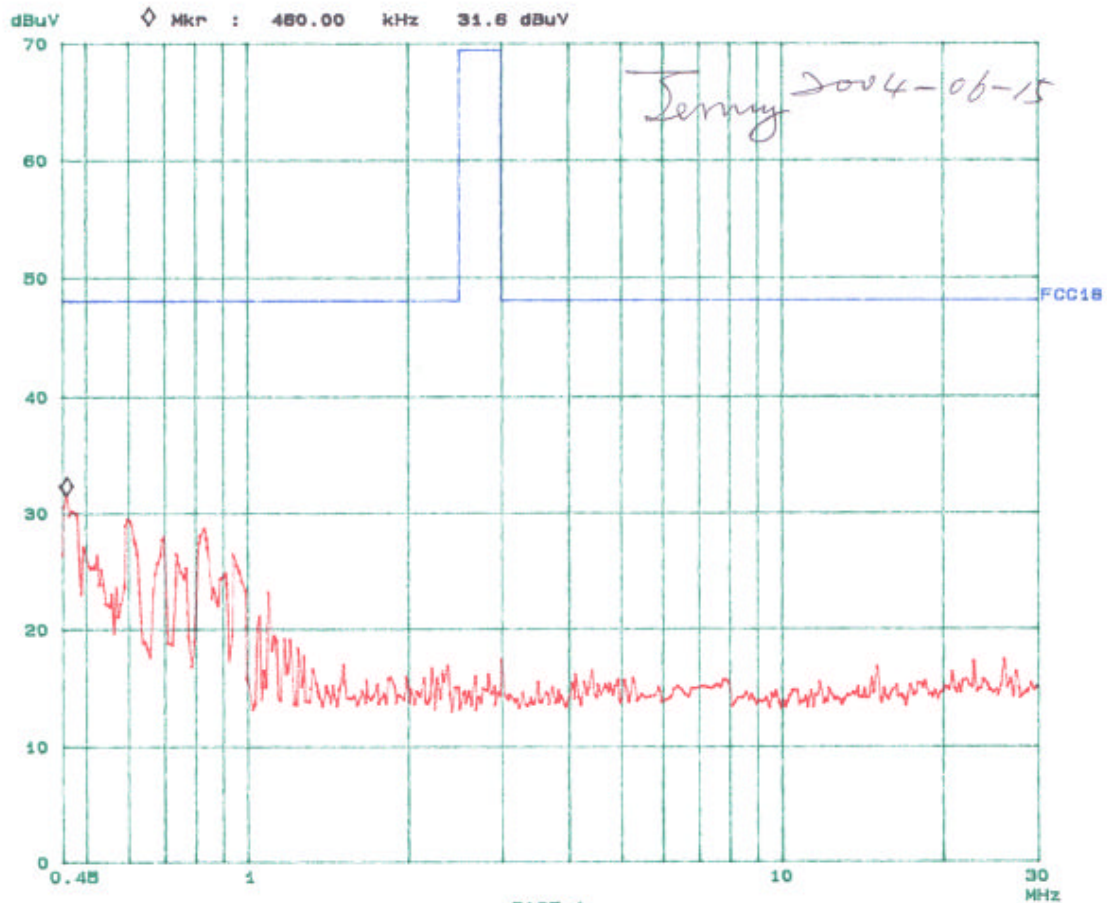

PAGE 1

Bay Area Compliance Laboratory Corp
FCC 18

15. Jun 04 15:45

EUT: SKB 13 EAP
 Manuf: Toshiba Lighting
 Op Cond: Normal
 Operator: Jerry
 Comment: N

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	
450k	1M	5k	9k	PK	20ms	15dB LN	OFF	
1M	5M	10k	9k	PK	1ms	15dB LN	OFF	
5M	30M	100k	9k	PK	1ms	15dB LN	OFF	

