
TEST REPORT FOR WLAN TESTING

Report No.: SRTC2021-9004(F)-21111502(F)

Product Name: BT/Wi-Fi Module

Applicant: Hisense Communication Co., Ltd.

Manufacturer: Hisense Communication Co., Ltd.

Specification: FCC Part 15 Subpart C (2020)

FCC ID: SARMW5101

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. GENERAL INFORMATION.....	2
1.1 Notes of the test report	2
1.2 Information about the testing laboratory	2
1.3 Applicant’s details	2
1.4 Manufacturer’s details.....	2
1.5 Test Environment.....	3
2 DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 Final Equipment Build Status.....	4
2.2 Description of Test Modes.....	6
2.2.1 Test Mode Applicability and Tested Channel Detail	6
2.3 EUT Operating conditions.....	7
2.4 Support Equipment	7
3 REFERENCE SPECIFICATION.....	8
4 KEY TO NOTES AND RESULT CODES.....	8
5 RESULT SUMMARY.....	9
6 TEST RESULT	10
6.1 Peak Power Output.....	10
6.2 6dB Bandwidth.....	11
6.3 Transmitter Power Spectral Density	12
6.4 Conducted Out of band emission measurement	13
6.5 Band-edge measurement	14
6.6 Spurious Radiated Emissions.....	15
6.7 AC Power line Conducted Emission	20
7 MEASUREMENT UNCERTAINTIES	22
8 TEST EQUIPMENTS.....	23
APPENDIX A – TEST DATA OF CONDUCTED EMISSION.....	24
APPENDIX B – TEST DATA OF RADIATED EMISSION.....	58

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn
Designation Number:	CN1267
Registration number:	239125

1.3 Applicant's details

Company:	Hisense Communication Co., Ltd.
Address:	No.218, Qianwangang Road, Economic and Technological Development Zone, Qingdao, Shandong Province,China

1.4 Manufacturer's details

Company:	Hisense Communication Co., Ltd.
Address:	No.218, Qianwangang Road, Economic and Technological Development Zone, Qingdao, Shandong Province,China

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2021-11-15
Testing Start Date:	2021-11-17
Testing End Date:	2021-11-26-

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient:	25	40
Maximum Extreme:	70	---
Minimum Extreme:	-10	---

Normal Supply Voltage (V d.c.):	5.00
Maximum Extreme Supply Voltage (V d.c.):	5.25
Minimum Extreme Supply Voltage (V d.c.):	4.75

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Band:	2.412GHz~2.462GHz
Number of Channel For 20MHz:	11
Number of Channel For 40MHz:	7
Modulation Type:	802.11b 802.11g 802.11n (HT20/HT40)
Power Supply:	Charger
Software Revision:	---
Hardware Revision:	V1.00
SN:	#01/#02/#03/#04/#05
Antenna type:	Refer to Note
Antenna connector:	Refer to Note

Note: Antenna requirement (FCC part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

Note: The antenna provides to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency band (GHz)	Antenna type	Connecter Type
N/A	N/A	0.7dBi	2.4GHz~2.4835GHz	PCB antenna	N/A

The antenna gain is provided by the customer and involved in the calculation and influence of the test results. Our laboratory takes the value declared by the customer as the criterion, and the customer is responsible for the antenna gain value. Manufacturers ensure that their designs will not be modified by the user or third party's arbitrary antenna parameters and performance.

Note: 802.11b/g cannot transmit at the same time. 802.11n MIMO is uncorrelated signal, Directional Gain is not a common character in 802.11n simultaneous transmitting modes.

11n MIMO DG=0.7dBi

d) *Unequal antenna gains, with equal transmit powers.* For antenna gains given by G_1, G_2, \dots, G_N dBi

- If transmit signals are *correlated*, then
Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]
- If all transmit signals are *completely uncorrelated*, then
Directional gain = $10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}]$ dBi

Note:


The modified product and the variant product, is different on

1.The Connector

Initial:The module MW510-1 has one 14-PIN chip-socket connector, which model is the HX1.25-14P-W-K.
Variant. the module has two chip-socket connectors, which are the HX1.25-10P-W-K and HX1.25-4P-W-K.
As shown below:



Initial

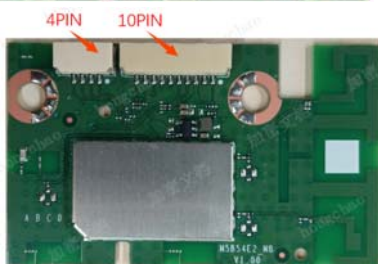

Variant

2.The PCB Supplier

Add the supplier of PCB,

Initial:,The module MW510-1 has one supplier of PCB, which is bominelec.

Variant ,the module has two supplier of PCB, which are bominelec and tigerbuilder.

The product model MW510-1 add a new variant specification (the change is described above), and the initial specification is still retained.

Note: The test results of variant product derive from original product Report No.: SRTC2021-9004(F)-21090302(F).

2.2 Description of Test Modes

11 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	---	---

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE ≥ 1G	RE < 1G	PLC	APCM	
-	√	√	√	√	-

Where

RE ≥ 1G: Radiated Emission above 1GHz

RE < 1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1/6/11 For HT20 3/6/9 For HT40	DBPSK/BPSK	1,6, 6.5, 13.5 8.6, 17.2

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1/6/11 For HT20 3/6/9 For HT40	DBPSK/BPSK	1,6, 6.5,13.5 8.6,17.2

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK	1

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1/6/11 For HT20 3/6/9 For HT40	DBPSK/BPSK	1,6, 6.5,13.5 8.6,17.2

2.3 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

2.4 Support Equipment

The following support equipment was used to exercise the DUT during testing:
N/A

3 REFERENCE SPECIFICATION




Specification	Version	Title
FCC part15 Subpart C	2020	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 V05R02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

4 KEY TO NOTES AND RESULT CODES

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.

5 RESULT SUMMARY

No.	Test case	Reference	Verdict
1	Transmitter Output Power	15.247(b)(3)	Pass
2	6dB Bandwidth	15.247(a)(2)	Pass
3	Transmitter Power Spectral Density	15.247(e)	Pass
4	Conducted Out of band emission measurement	15.247(d)	Pass
5	Band Edge	15.247(d)	Pass
6	Spurious Radiated Emissions	15.205/15.209	Pass
7	AC Power line Conducted Emission	15.207	Pass
8	Antenna requirement	15.203	Pass(refer to section 2.1)

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. Liu Ce 	Issued date: 20211126

6 TEST RESULT

6.1 Peak Power Output

6.2.1 Test limit

Part15.247 (b) (3)

The maximum permissible conducted output power is 1 Watt.

6.2.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3

ANSI C63.10-2013 – Section 11.9.2.3.2

KDB 558074 D01 v05r02 – Section 8.3.1.3

6.2.3 Test Settings

Peak Power Measurement


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.2.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.2.5 Test result

The test results are shown in Appendix A.

6.2 6dB Bandwidth

6.1.1 Test limit

Part15.247 (a) (2)

The minimum permissible 6dB bandwidth is 500 kHz

6.1.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2


KDB 558074 D01 v05r02 – Section 8.2

6.1.3 Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

6.1.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.1.5 Test result

The test results are shown in Appendix A.

6.3 Transmitter Power Spectral Density

6.3.1 Test limit

Part15.247 (e)

The maximum permissible power spectral density is 8.0dBm in any 3 kHz band.

6.3.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD


KDB 558074 D01 v05r02 – Section 8.4

6.3.3 Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW = 10 kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.3.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.3.5 Test result

The test results are shown in Appendix A.

6.4 Conducted Out of band emission measurement

6.4.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.4.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

KDB 558074 D01 v05r02 – Section 8.5

6.4.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 MHz
- c) Set the RBW = 100 kHz.
- d) Set the VBW ≥ 300 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

6.4.4 Test Settings

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW ≥ 300 kHz.
- d) Detector = peak.
- e) Set span to encompass the spectrum to be examined
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.

6.4.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.4.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.5 Band-edge measurement

6.5.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.5.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

6.5.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 MHz
- c) Set the RBW = 100 kHz.
- d) Set the VBW ≥ 300 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

6.5.4 Test Settings

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW ≥ 300 kHz.
- d) Detector = peak.
- e) Set span to encompass the spectrum to be examined
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.

6.5.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.5.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.6 Spurious Radiated Emissions

6.6.1 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.6.2 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dB $\mu\text{V/m}$) = 20 log (Limit ($\mu\text{V/m}$)/1 $\mu\text{V/m}$)

Frequency [MHz]	Detector	Unit (dB $\mu\text{V/m}$)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits

6.6.3 Test Procedure Used

ANSI C63.10-2013

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

NOTE:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

- 2. Signals below 30MHz are not recorded in the report because they are lower than the limits by more than 20dB.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.6.4 Test Settings

Average Field Strength Measurements

Frequency	Detector
<1000MHz	Quasi-peak
>1000MHz	Peak and average

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.5 Test Setup


For Radiated emission below 30MHz

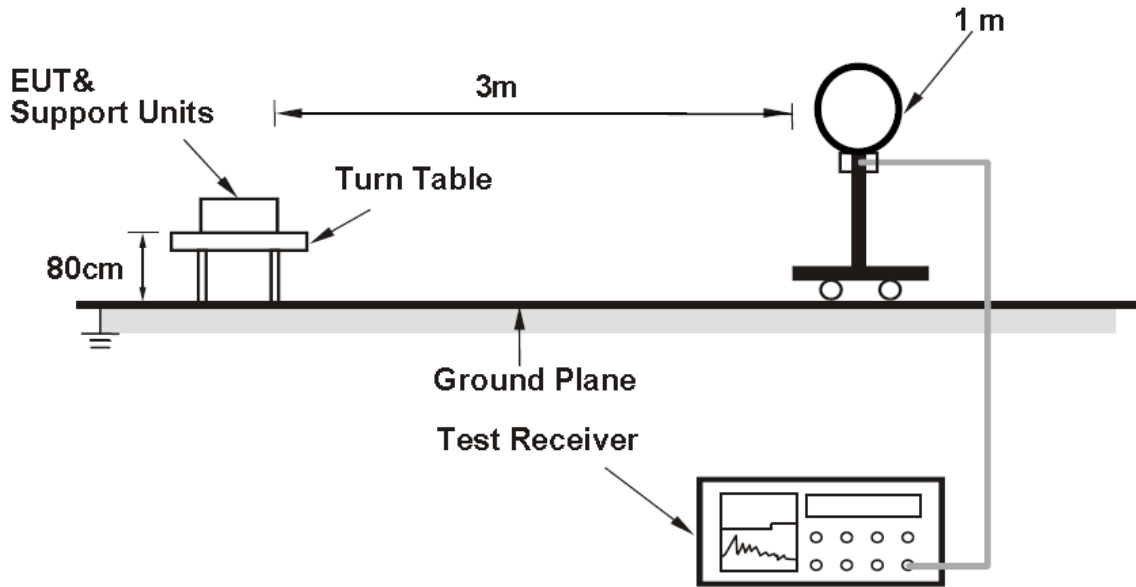

For Radiated emission 30MHz to 1GHz

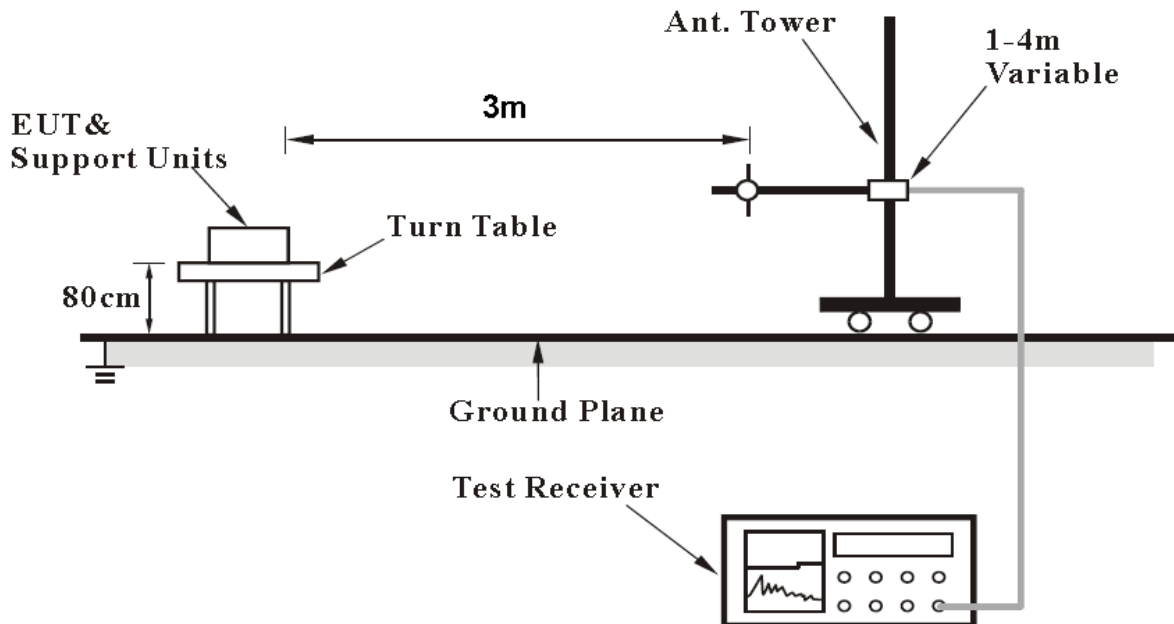

For Radiated emission above 1GHz

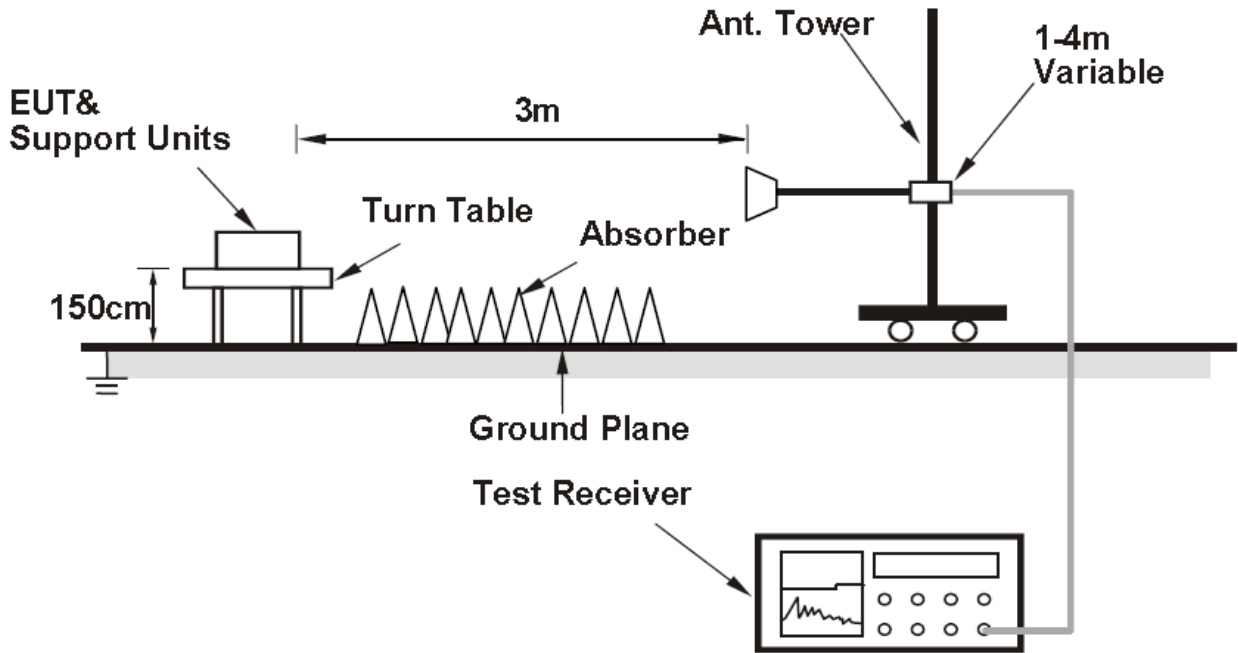

6.6.6 Test result

The test results are shown in Appendix B.

6.7 AC Power line Conducted Emission

6.7.1 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

6.7.2 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.


b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/240V/60Hz.

6.7.3 Test Setup

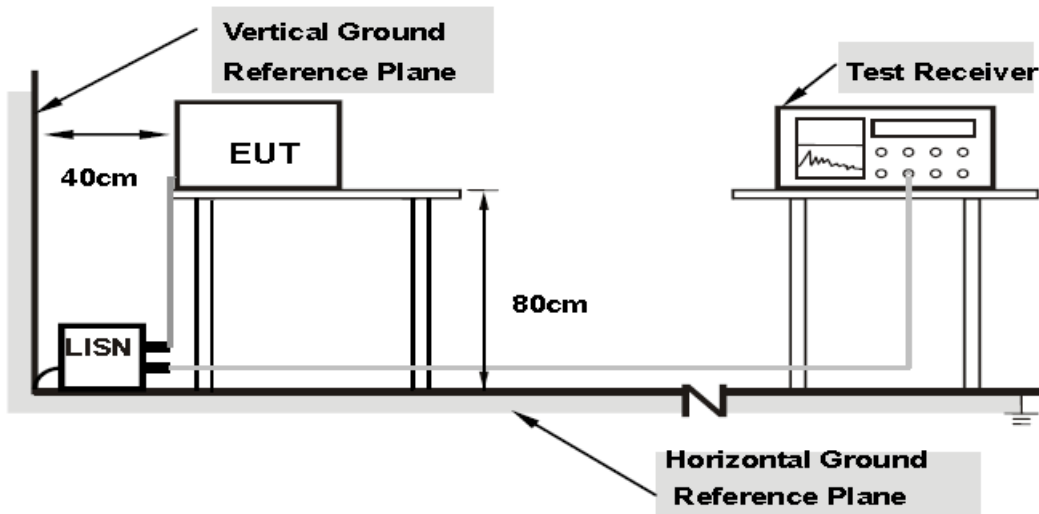

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.4 Test result

The test results are shown in Appendix B.

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
6dB Bandwidth	3kHz	
Peak power output	0.67dB	
Transmitter Power Spectral Density	0.75dB	
Band edge compliance	1.20dB	
Conducted Out of band emission measurement	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB
Spurious Radiated Emissions	30MHz~200MHz	4.88dB
	200MHz~1GHz	4.87dB
	1GHz~18GHz	4.58dB
	18GHz~40GHz	4.35dB
AC Power line Conducted Emission	3.92dB	

8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer / FSV	ROHDE & SCHWARZ	101065	2021.06.21	2022.06.20
2.	Signal Analyzer / N9020A	Agilent	MY48010771	2021.05.18	2022.05.17
3.	Bluetooth Test Set / MT8852B	Anritsu	1329003	2021.06.21	2022.06.20
4.	Power Divider / 11667A	HP	19632	2021.06.21	2022.06.20
5.	Power Meter E4416A	Agilent	MY52370013	2021.04.13	2022.04.12
6.	Power Sensor E9323A	Agilent	MY52150008	2021.04.13	2022.04.12
7.	Signal Generator / SMBV100A	R&S	260910	2021.06.21	2022.06.20
8.	Temperature chamber / SH241	ESPEC	92013758	2021.06.21	2022.06.20
9.	Fully-Anechoic Chamber / 12.65m×8.03m×7.50m	FRANKONIA	----	----	----
10.	Semi-Anechoic/Chamber / 23.18m×16.88m×9.60m	FRANKONIA	---	----	----
11.	Turn table Diameter:1m	FRANKONIA	----	----	----
12.	Turn table Diameter:5m	FRANKONIA	----	----	----
13.	Antenna master FAC(MA4.0)	MATURO	----	----	----
14.	Antenna master SAC(MA4.0)	MATURO	----	----	----
15.	Shielding room / 9.080m×5.255m×3.525m	FRANKONIA	----	----	----
16.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100512	2021.06.21	2022.06.20
17.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100513	2021.06.21	2022.06.20
18.	Ultra log antenna / HL562	R&S	100016	2021.06.21	2022.06.20
19.	Receive antenna /3160-09	SCHWARZ-BECK	002058-002	2021.06.21	2022.06.20
20.	EMI test receiver / ESI 40	R&S	100015	2021.06.21	2022.06.20
21.	EMI test receiver / ESCS30	R&S	100029	2021.06.21	2022.06.20
22.	Receive antenna / HL562	R&S	100167	2021.06.21	2022.06.20
23.	AMN / ENV216	R&S	3560.6550.12	2021.06.21	2022.06.20
24.	WLAN AP WIA3300-20	SKSpruce	8152017060700339	---	---
25.	Notebook E470c	Lenovo	PF10UZW7	---	---

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

Offset 1.2dB = Temporary antenna connector loss 0.2dB+ Cable loss 1.0dB

Duty Cycle

Modulation Type	Frequency (MHz)	Chain	Duty Cycle	Correction Factor(dB)
802.11b	2412	Chain1	99.88%	0
802.11b	2412	Chain0	99.80%	0
802.11g	2412	Chain1	98.99%	0
802.11g	2412	Chain0	98.88%	0
802.11n HT20	2412	Chain0	98.81%	0
802.11n HT20	2412	Chain1	98.79%	0
802.11n HT40	2422	Chain0	97.74%	0.10
802.11n HT40	2422	Chain1	97.77%	0.10

Note: Correction Factor=10*log (1/Duty Cycle)

Conducted power

Mode	Tones/ RU Index	Freq(MHz)	Chain	Peak power output (dBm)	Average power output (dBm)
802.11b	NA	2412MHz	Chain0	21.58	18.69
	NA		Chain1	21.36	18.29
	NA	2437MHz	Chain0	21.76	18.85
	NA		Chain1	21.51	18.59
	NA	2462MHz	Chain0	21.77	18.81
	NA		Chain1	21.35	18.45
802.11g	NA	2412MHz	Chain0	26.24	17.89
	NA		Chain1	26.05	17.69
	NA	2437MHz	Chain0	26.12	17.79
	NA		Chain1	26.13	17.64
	NA	2462MHz	Chain0	26.24	17.85
	NA		Chain1	26.17	17.80
802.11n20M	NA	2412MHz	Chain0	25.11	16.73
	NA		Chain1	25.04	16.69
	NA		MIMO	28.09	19.72
	NA	2437MHz	Chain0	25.01	16.63
	NA		Chain1	24.89	16.60
	NA		MIMO	27.96	19.63
	NA	2462MHz	Chain0	24.97	16.67
	NA		Chain1	25.02	16.64
	NA		MIMO	28.01	19.67
802.11n40M	NA	2422MHz	Chain0	25.30	16.69
	NA		Chain1	25.13	16.53
	NA		MIMO	28.23	19.62
	NA	2437MHz	Chain0	25.40	16.71
	NA		Chain1	25.29	16.63
	NA		MIMO	28.36	19.68
	NA	2452MHz	Chain0	25.25	16.65
	NA		Chain1	25.24	16.63
	NA		MIMO	28.26	19.65

6dB Bandwidth

Test Mode:802.11b

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2412MHz	1	Chain0	7.83
		Chain1	8.29
2437MHz	6	Chain0	7.60
		Chain1	7.98
2462MHz	11	Chain0	8.43
		Chain1	7.79

Test Mode:802.11b Chain0



Test Mode:802.11b Chain0



Test Mode:802.11b Chain0



Test Mode:802.11b Chain1



Test Mode:802.11b Chain1



Test Mode:802.11b Chain1



Test Mode:802.11g

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2412MHz	1	Chain0	16.37
		Chain1	16.31
2437MHz	6	Chain0	16.36
		Chain1	13.57
2462MHz	11	Chain0	14.12
		Chain1	16.06

Test Mode:802.11g Chain0



Test Mode:802.11g Chain0



Test Mode:802.11g Chain0



Test Mode:802.11g Chain1



Test Mode:802.11g Chain1




Test Mode:802.11g Chain1



Test Mode:802. 11n HT20

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2412MHz	1	Chain0	16.07
		Chain1	17.25
2437MHz	6	Chain0	17.51
		Chain1	16.66
2462MHz	11	Chain0	16.67
		Chain1	17.29

Test Mode:802. 11n HT20 Chain0

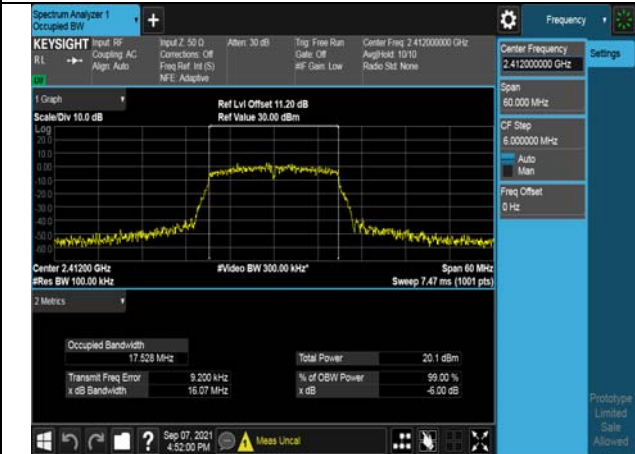

Test Mode:802. 11n HT20 Chain0



Test Mode:802. 11n HT20 Chain0




Test Mode:802. 11n HT20 Chain1



Test Mode:802. 11n HT20 Chain1



Test Mode:802. 11n HT20 Chain1

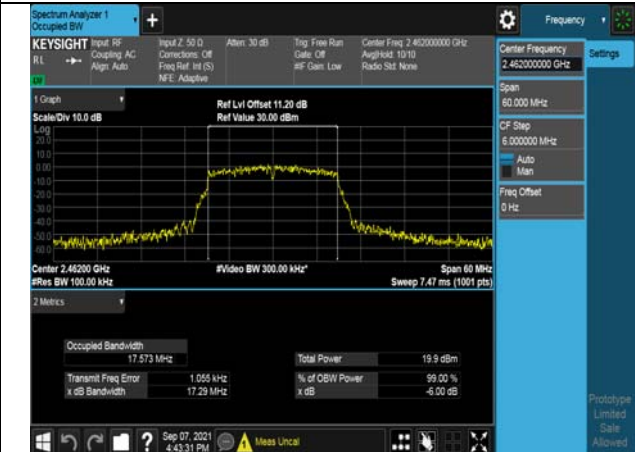

Test Mode:802. 11n HT40

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2422MHz	3	Chain0	35.11
		Chain1	31.03
2437MHz	6	Chain0	34.93
		Chain1	35.04
2452MHz	9	Chain0	34.53
		Chain1	34.24


Test Mode:802. 11n HT40 Chain0



Test Mode:802. 11n HT40 Chain0



Test Mode:802. 11n HT40 Chain0

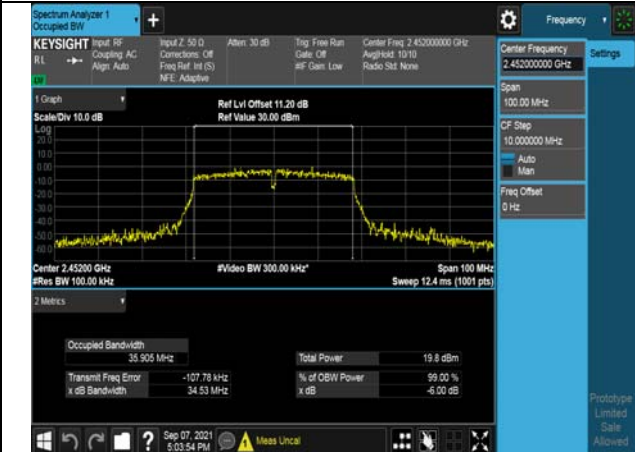


Test Mode:802. 11n HT40 Chain1



Test Mode:802. 11n HT40 Chain1



Test Mode:802. 11n HT40 Chain1

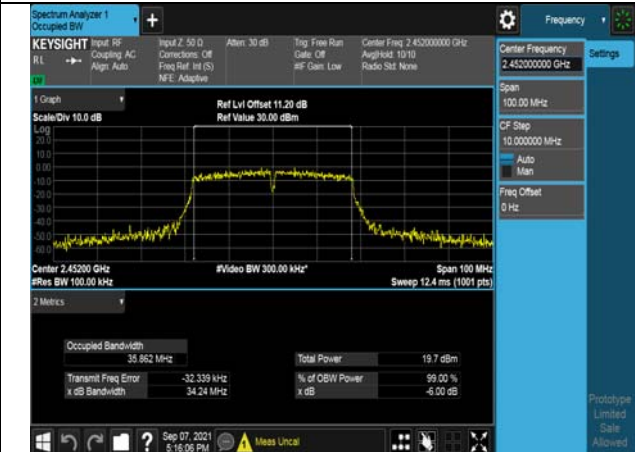

99% Bandwidth

Test Mode:802.11b

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2412MHz	1	Chain0	13.511
		Chain1	13.439
2437MHz	6	Chain0	13.561
		Chain1	13.443
2462MHz	11	Chain0	13.506
		Chain1	13.417

Test Mode:802.11b Chain0



Test Mode:802.11b Chain0



Test Mode:802.11b Chain0




Test Mode:802.11b Chain1



Test Mode:802.11b Chain1



Test Mode:802.11b Chain1

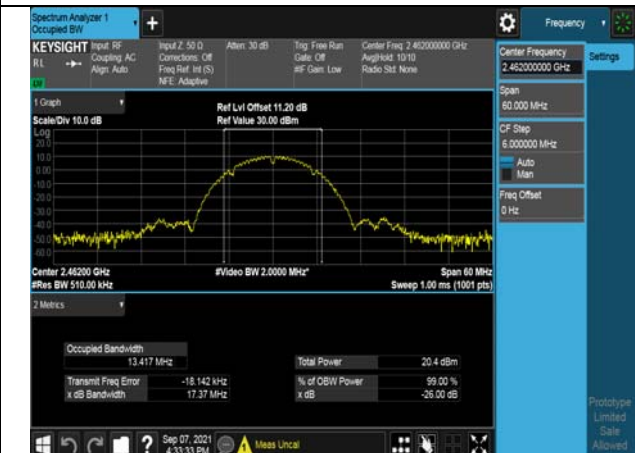

Test Mode:802.11g

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2412MHz	1	Chain0	16.498
		Chain1	16.584
2437MHz	6	Chain0	16.530
		Chain1	16.610
2462MHz	11	Chain0	16.503
		Chain1	16.628

Test Mode:802.11g Chain0



Test Mode:802.11g Chain0



Test Mode:802.11g Chain0



Test Mode:802.11g Chain1



Test Mode:802.11g Chain1



Test Mode:802.11g Chain1



Test Mode:802. 11n HT20

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2412MHz	1	Chain0	17.747
		Chain1	17.758
2437MHz	6	Chain0	17.639
		Chain1	17.601
2462MHz	11	Chain0	17.670
		Chain1	17.758

Test Mode:802. 11n HT20 Chain0




Test Mode:802. 11n HT20 Chain0



Test Mode:802. 11n HT20 Chain0




Test Mode:802. 11n HT20 Chain1

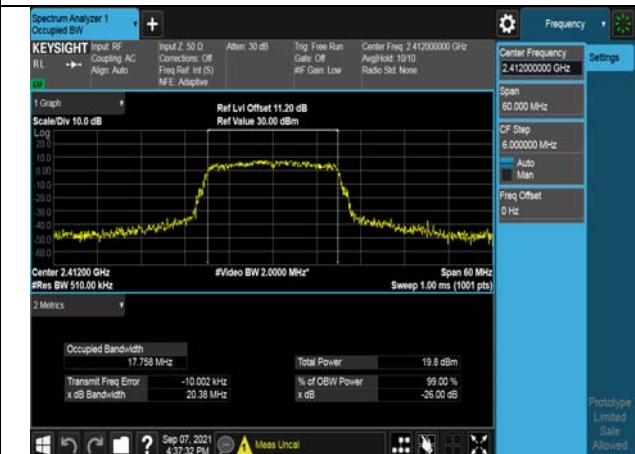

Test Mode:802. 11n HT20 Chain1



Test Mode:802. 11n HT20 Chain1

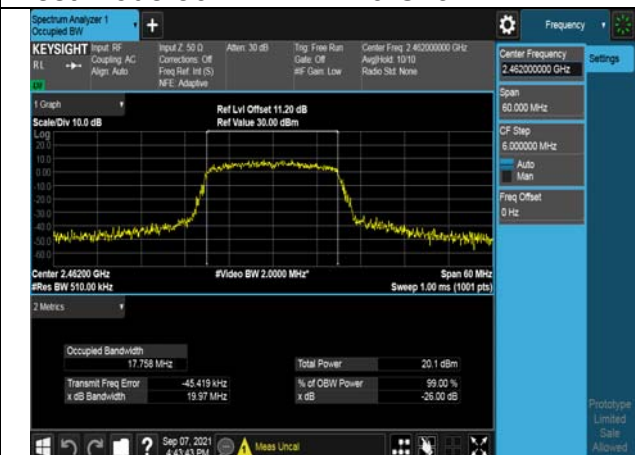

Test Mode:802. 11n HT40

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2422MHz	3	Chain0	36.030
		Chain1	35.934
2437MHz	6	Chain0	35.914
		Chain1	35.878
2452MHz	9	Chain0	35.945
		Chain1	35.994

Test Mode:802. 11n HT40 Chain0



Test Mode:802. 11n HT40 Chain0



Test Mode:802. 11n HT40 Chain0



Test Mode:802. 11n HT40 Chain1



Test Mode:802. 11n HT40 Chain1



Test Mode:802. 11n HT40 Chain1



Transmitter Power Spectral Density

Test Mode:802.11b

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2412MHz	1	Chain0	-4.778
		Chain1	-5.060
2437MHz	6	Chain0	-4.840
		Chain1	-5.403
2462MHz	11	Chain0	-5.212
		Chain1	-4.659

Test Mode:802.11b Chain0



Test Mode:802.11b Chain0



Test Mode:802.11b Chain0



Test Mode:802.11b Chain1



Test Mode:802.11b Chain1



Test Mode:802.11b Chain1



Test Mode:802.11g

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2412MHz	1	Chain0	-8.006
		Chain1	-7.828
2437MHz	6	Chain0	-8.332
		Chain1	-7.825
2462MHz	11	Chain0	-7.754
		Chain1	-7.406

Test Mode:802.11g Chain0



Test Mode:802.11g Chain0




Test Mode:802.11g Chain0



Test Mode:802.11g Chain1



Test Mode:802.11g Chain1

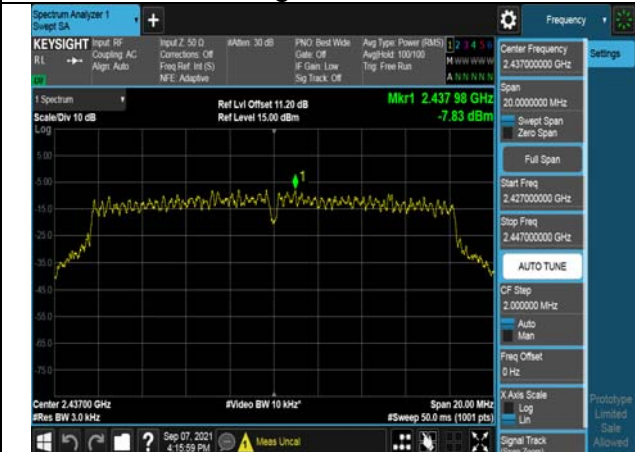

Test Mode:802.11g Chain1



Test Mode:802. 11n HT40

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2422MHz	3	Chain0	-12.766
		Chain1	-12.835
		MIMO	-9.79
2437MHz	6	Chain0	-12.682
		Chain1	-12.475
		MIMO	-9.57
2452MHz	9	Chain0	-12.478
		Chain1	-12.106
		MIMO	-9.28


Test Mode:802. 11n HT40 Chain0



Test Mode:802. 11n HT40 Chain0




Test Mode:802. 11n HT40 Chain0

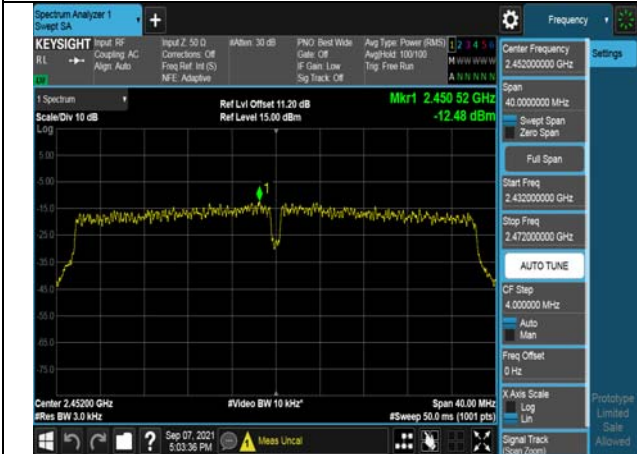

Test Mode:802. 11n HT40 Chain1



Test Mode:802. 11n HT40 Chain1

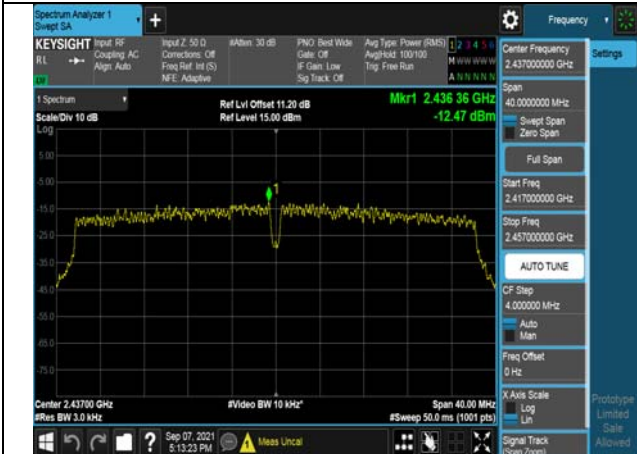


Test Mode:802. 11n HT40 Chain1



Test Mode:802. 11n HT20

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2412MHz	1	Chain0	-9.138
		Chain1	-9.192
		MIMO	-6.15
2437MHz	6	Chain0	-8.142
		Chain1	-9.251
		MIMO	-5.65
2462MHz	11	Chain0	-9.150
		Chain1	-8.682
		MIMO	-5.90

Test Mode:802. 11n HT20 Chain0

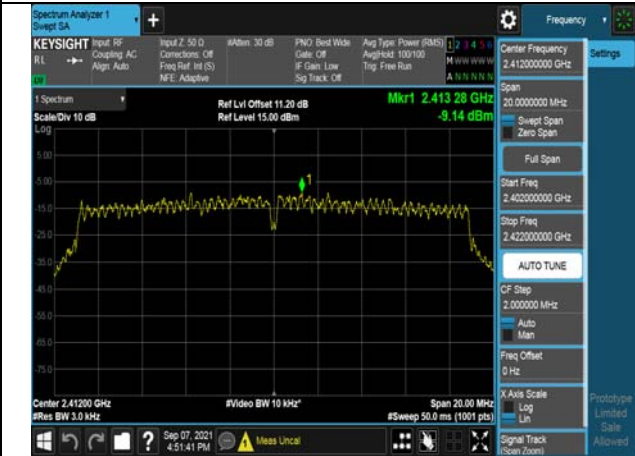

Test Mode:802. 11n HT20 Chain0




Test Mode:802. 11n HT20 Chain0



Test Mode:802. 11n HT20 Chain1



Test Mode:802. 11n HT20 Chain1

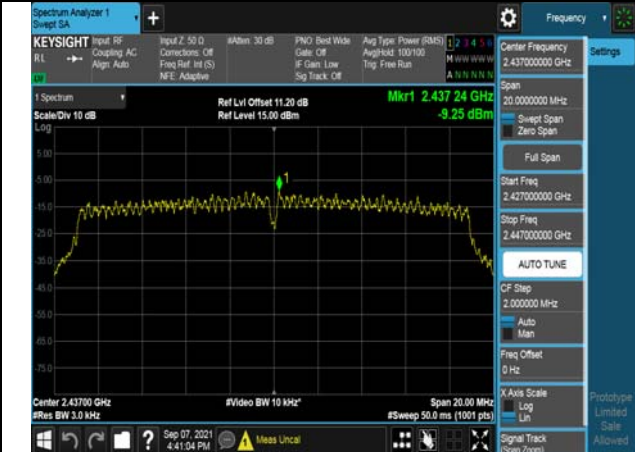

Test Mode:802. 11n HT20 Chain1



Conducted Out of band emission measurement

Test Mode:802.11b

Test Mode:802.11b Chain0 CH1




Test Mode:802.11b Chain0 CH6



Test Mode:802.11b Chain0 CH11



Test Mode:802.11b Chain1 CH1

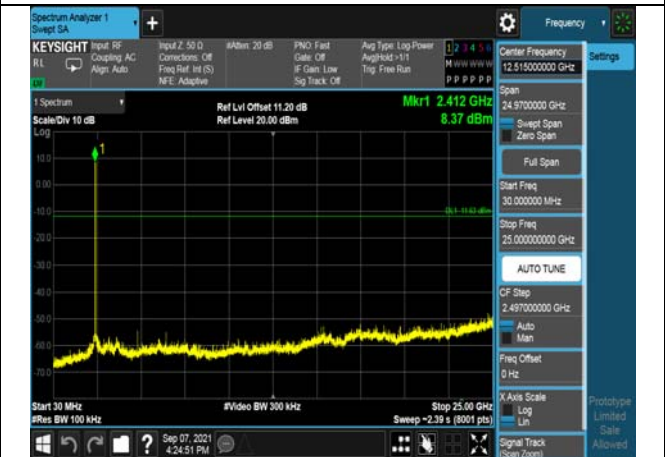

Test Mode:802.11b Chain1 CH6



Test Mode:802.11b Chain1 CH11



Test Mode:802.11g

Test Mode:802.11g Chain0 CH1



Test Mode:802.11g Chain0 CH6



Test Mode:802.11g Chain0 CH11



Test Mode:802.11g Chain1 CH1



Test Mode:802.11g Chain1 CH6



Test Mode:802.11g Chain1 CH11



Test Mode:802. 11n HT20

Test Mode:802. 11n HT20 Chain0 CH1

Test Mode:802. 11n HT20 Chain0 CH6



Test Mode:802. 11n HT20 Chain0 CH11

Test Mode:802. 11n HT20 Chain1 CH1



Test Mode:802. 11n HT20 Chain1 CH6

Test Mode:802. 11n HT20 Chain1 CH11



Test Mode:802. 11n HT40

Test Mode:802. 11n HT40 Chain0 CH3

Test Mode:802. 11n HT40 Chain0 CH6



Test Mode:802. 11n HT40 Chain0 CH9

Test Mode:802. 11n HT40 Chain1 CH3



Test Mode:802. 11n HT40 Chain1 CH6

Test Mode:802. 11n HT40 Chain1 CH9



Band edge measurement

Test Mode:802.11b

Test Mode:802.11b Chain0 CH1



Test Mode:802.11b Chain0 CH11



Test Mode:802.11b Chain1 CH1



Test Mode:802.11b Chain1 CH11



Test Mode:802.11g

Test Mode:802.11g Chain0 CH1



Test Mode:802.11g Chain0 CH11



Test Mode:802.11g Chain1 CH1



Test Mode:802.11g Chain1 CH11



Test Mode:802. 11n HT20

Test Mode:802. 11n HT20 Chain0 CH1



Test Mode:802. 11n HT20 Chain0 CH11



Test Mode:802. 11n HT20 Chain1 CH1



Test Mode:802. 11n HT20 Chain1 CH11



Test Mode:802. 11n HT40

Test Mode:802. 11n HT40 Chain0 CH3

Test Mode:802. 11n HT40 Chain0 CH9



Test Mode:802. 11n HT40 Chain1 CH3

Test Mode:802. 11n HT40 Chain1 CH9



APPENDIX B – TEST DATA OF RADIATED EMISSION

Radiated Emission Band Edge

Pre-tests are needed at the presence of different data rate. Data rate below means worst-case rate of each test item. Worst-case data rates are shown as following table.

Test Mode	Data Rate
802.11b	1Mbps
802.11g	6Mbps
802.11n HT20	MCS0(6.5 Mbps)
802.11n HT40	MCS0(13.5 Mbps)

We chose the Worst-modes are shown as following table:

Test Mode	Chain	Note
802.11b	Chain0	---
802.11g	Chain0	---
802.11n HT20	Chain0+ Chain1	---
802.11n HT40	Chain0+ Chain1	---

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (106.64 dBuV/m) = (72.64dBuV) + (8.90 dB) + (25.10 dB/m), the corresponding frequency is 2412MHz.

The measurement results contain the correction factor of the duty cycle.

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	106.64	72.64	N/A	N/A	8.90	25.10
2	2390	45.31	11.31	-28.69	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	103.89	69.89	N/A	N/A	8.90	25.10
2	2390	42.55	8.55	-31.45	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	103.16	69.16	N/A	N/A	8.90	25.10
2	2390	35.29	1.29	-18.71	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11b
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	100.70	66.70	N/A	N/A	8.90	25.10
2	2390	34.65	0.65	-19.35	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	106.23	72.23	N/A	N/A	8.90	25.10
2	2483.5	46.01	12.01	-27.99	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	104.01	70.01	N/A	N/A	8.90	25.10
2	2483.5	44.10	10.10	-29.90	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	104.84	70.84	N/A	N/A	8.90	25.10
2	2483.5	35.12	1.12	-18.88	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	102.44	68.44	N/A	N/A	8.90	25.10
2	2483.5	33.61	-0.39	-20.39	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	106.31	72.31	N/A	N/A	8.90	25.10
2	2390	46.86	12.86	-27.14	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	103.88	69.88	N/A	N/A	8.90	25.10
2	2390	44.12	10.12	-29.88	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	103.23	69.23	N/A	N/A	8.90	25.10
2	2390	36.18	2.18	-17.82	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	100.65	66.65	N/A	N/A	8.90	25.10
2	2390	34.27	0.27	-19.73	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	106.63	72.63	N/A	N/A	8.90	25.10
2	2483.5	45.10	11.10	-28.90	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	104.41	70.41	N/A	N/A	8.90	25.10
2	2483.5	43.30	9.30	-30.70	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	103.56	69.56	N/A	N/A	8.90	25.10
2	2483.5	35.80	1.80	-18.20	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	101.00	67.00	N/A	N/A	8.90	25.10
2	2483.5	35.01	1.01	-18.99	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	105.78	71.78	N/A	N/A	8.90	25.10
2	2390	45.01	11.01	-28.99	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	103.60	69.60	N/A	N/A	8.90	25.10
2	2390	43.43	9.43	-30.57	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	104.25	70.25	N/A	N/A	8.90	25.10
2	2390	36.69	2.69	-17.31	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	102.12	68.12	N/A	N/A	8.90	25.10
2	2390	36.14	2.14	-17.86	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	106.17	72.17	N/A	N/A	8.90	25.10
2	2483.5	46.74	12.74	-27.26	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	104.14	70.14	N/A	N/A	8.90	25.10
2	2483.5	43.77	9.77	-30.23	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	104.74	70.74	N/A	N/A	8.90	25.10
2	2483.5	35.75	1.75	-18.25	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	102.02	68.02	N/A	N/A	8.90	25.10
2	2483.5	33.79	-0.21	-20.21	54.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	105.08	71.08	N/A	N/A	8.90	25.10
2	2390	45.38	11.38	-28.62	74.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	102.93	68.93	N/A	N/A	8.90	25.10
2	2390	44.30	10.30	-29.70	74.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	102.58	68.58	N/A	N/A	8.90	25.10
2	2390	36.99	2.99	-17.01	54.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	100.04	66.04	N/A	N/A	8.90	25.10
2	2390	36.31	2.31	-17.69	54.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2452	103.80	69.80	N/A	N/A	8.90	25.10
2	2483.5	46.57	12.57	-27.43	74.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2452	101.44	67.44	N/A	N/A	8.90	25.10
2	2483.5	45.29	11.29	-28.71	74.00	8.90	25.10


Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2452	102.37	68.37	N/A	N/A	8.90	25.10
2	2483.5	36.19	2.19	-17.81	54.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	2452	99.65	65.65	N/A	N/A	8.90	25.10
2	2483.5	33.90	-0.10	-20.10	54.00	8.90	25.10

Full Spectrum

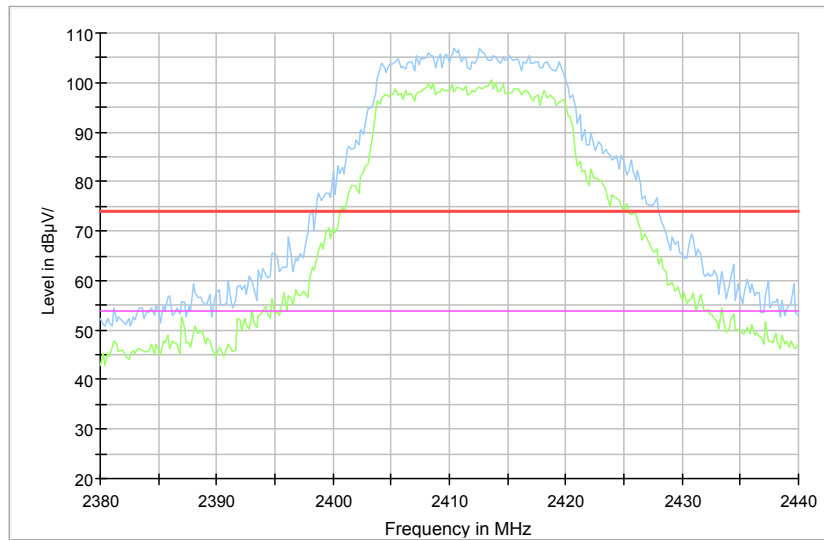

Comment

Radiated Emission Band Edge for 2412MHz

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: (11.47 dB μ V/m) = (24.27 dB μ V) + (-12.8 dB/m), the corresponding frequency is 59.342500MHz.

The worst case attitude: The mobile lay down.

For 802.11b Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
59.342500	11.47	-12.8	24.27	Vertical	40.00
167.982500	27.68	-15.8	43.48	Vertical	43.50
263.964000	29.81	-10.9	40.71	Vertical	46.00
311.979000	33.08	-9.7	42.78	Vertical	46.00
408.009000	30.75	-6.9	37.65	Vertical	46.00
959.987500	30.79	3.4	27.39	Vertical	46.00

For 802.11g Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
50.952000	12.91	-11.6	24.51	Vertical	40.00
167.982500	27.68	-15.8	43.48	Vertical	43.50
263.964000	29.87	-10.9	40.77	Vertical	46.00
311.979000	33.08	-9.7	42.78	Vertical	46.00
407.960500	29.27	-6.9	36.17	Vertical	46.00
744.017000	29.61	0.5	29.11	Vertical	46.00

For 802.11n(HT20) Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
44.647000	12.72	-12.0	24.72	Vertical	40.00
56.869000	11.77	-12.4	24.17	Vertical	40.00
167.982500	27.69	-15.8	43.49	Vertical	43.50
264.012500	31.11	-10.9	42.01	Vertical	46.00
311.979000	33.06	-9.7	42.76	Vertical	46.00
957.368500	26.51	3.4	23.11	Vertical	46.00

For 802.11b Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
52.067500	12.93	-11.8	24.73	Vertical	40.00
167.982500	27.69	-15.8	43.49	Vertical	43.50
264.012500	31.00	-10.9	41.90	Vertical	46.00
311.979000	33.10	-9.7	42.80	Vertical	46.00
408.009000	30.79	-6.9	37.69	Vertical	46.00
839.998500	29.41	1.6	27.81	Vertical	46.00

For 802.11g Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
51.243000	12.97	-11.7	24.67	Vertical	40.00
167.982500	27.66	-15.8	43.46	Vertical	43.50
263.964000	29.80	-10.9	40.70	Vertical	46.00
311.979000	33.01	-9.7	42.71	Vertical	46.00
408.009000	30.82	-6.9	37.72	Vertical	46.00
959.987500	30.77	3.4	27.37	Vertical	46.00

For 802.11n(HT20) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
57.063000	11.88	-12.4	24.28	Vertical	40.00
167.982500	27.66	-15.8	43.46	Vertical	43.50
263.964000	29.75	-10.9	40.65	Vertical	46.00
311.979000	33.11	-9.7	42.81	Vertical	46.00
408.009000	30.90	-6.9	37.80	Vertical	46.00
959.987500	30.81	3.4	27.41	Vertical	46.00

For 802.11b Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
33.395000	11.86	-14.4	26.26	Vertical	40.00
167.982500	27.66	-15.8	43.46	Vertical	43.50
263.964000	29.76	-10.9	40.66	Vertical	46.00
311.979000	33.10	-9.7	42.80	Vertical	46.00
408.009000	30.89	-6.9	37.79	Vertical	46.00
959.987500	30.83	3.4	27.43	Vertical	46.00

For 802.11g Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	P _{mea} (dBuV)	Polarity	Limit (dBuV/m)
52.116000	13.03	-11.8	24.83	Vertical	40.00
167.982500	27.64	-15.8	43.44	Vertical	43.50
263.964000	29.71	-10.9	40.61	Vertical	46.00
311.979000	33.10	-9.7	42.80	Vertical	46.00
408.009000	30.85	-6.9	37.75	Vertical	46.00
957.756500	26.86	3.4	23.46	Vertical	46.00

For 802.11n(HT20) Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	P _{mea} (dBuV)	Polarity	Limit (dBuV/m)
45.617000	12.85	-11.9	24.75	Vertical	40.00
63.998500	10.73	-14.2	24.93	Vertical	40.00
167.982500	27.65	-15.8	43.45	Vertical	43.50
263.964000	29.71	-10.9	40.61	Vertical	46.00
311.979000	33.09	-9.7	42.79	Vertical	46.00
959.987500	30.81	3.4	27.41	Vertical	46.00

For 802.11 n(HT40) Channel No.:3

Frequency(MHz)	Result(dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
52.795000	12.37	-11.9	24.27	Vertical	40.00
56.578000	11.57	-12.4	23.97	Vertical	40.00
167.982500	27.63	-15.8	43.43	Vertical	43.50
263.964000	29.83	-10.9	40.73	Vertical	46.00
311.979000	33.07	-9.7	42.77	Vertical	46.00
959.987500	30.80	3.4	27.40	Vertical	46.00


For 802.11 n(HT40) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
45.811000	12.81	-11.9	24.71	Vertical	40.00
167.982500	27.64	-15.8	43.44	Vertical	43.50
263.964000	29.83	-10.9	40.73	Vertical	46.00
311.979000	33.12	-9.7	42.82	Vertical	46.00
407.960500	29.30	-6.9	36.20	Vertical	46.00
959.987500	30.80	3.4	27.40	Vertical	46.00

For 802.11 n(HT40) Channel No.:9


Frequency(MHz)	Result(dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
51.873500	13.00	-11.8	24.80	Vertical	40.00
167.982500	27.69	-15.8	43.49	Vertical	43.50
263.964000	29.84	-10.9	40.74	Vertical	46.00
311.979000	33.08	-9.7	42.78	Vertical	46.00
408.009000	30.80	-6.9	37.70	Vertical	46.00
959.017500	26.49	3.4	23.09	Vertical	46.00

Carrier frequency (MHz): 2412
Channel No.:1

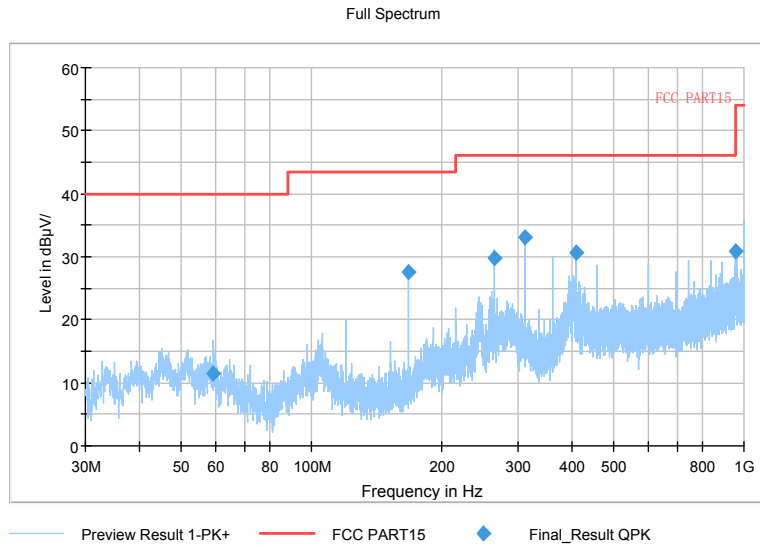

Comment


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

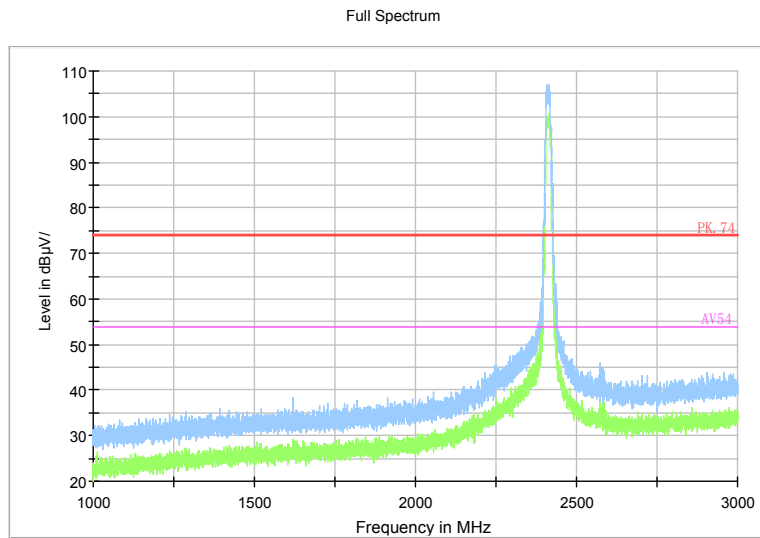

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

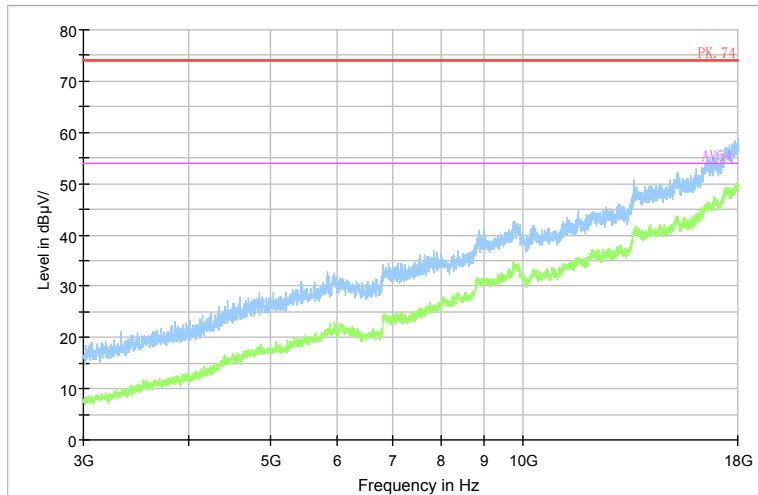

Comment

Frequency Range: 3GHz-18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b

Full Spectrum

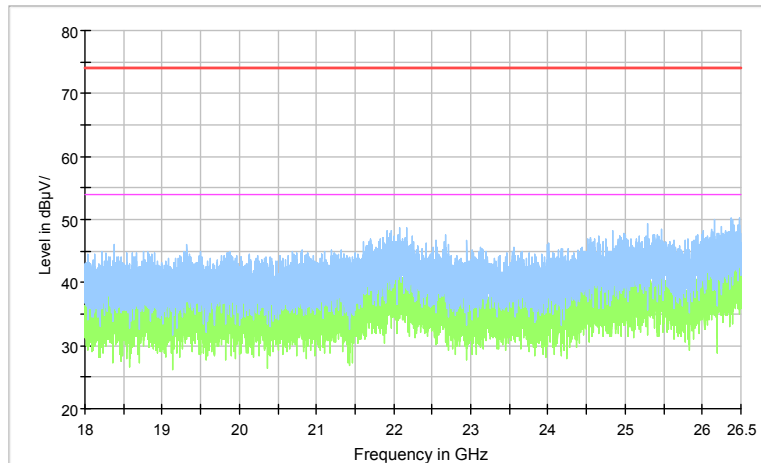


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b


Full Spectrum

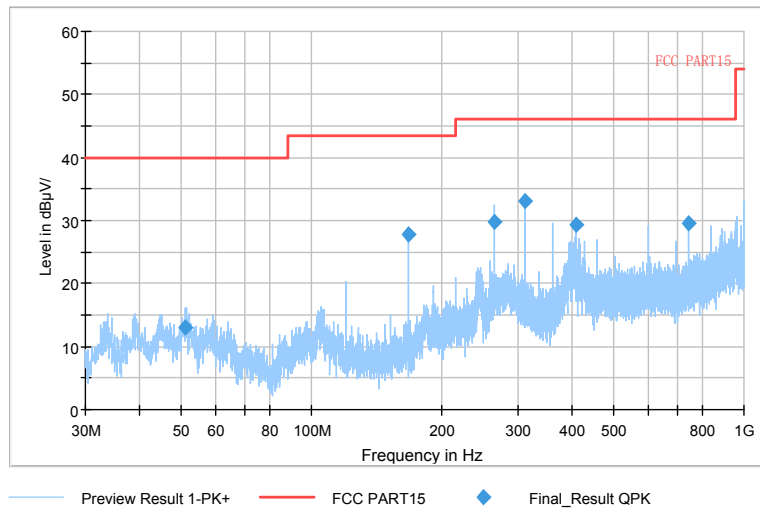

Comment

Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Modulation type: 802.11g


Full Spectrum

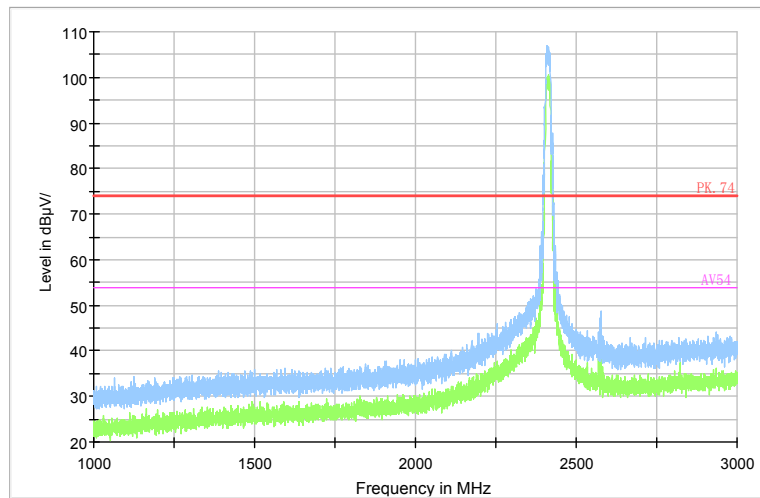

Comment

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g


Full Spectrum

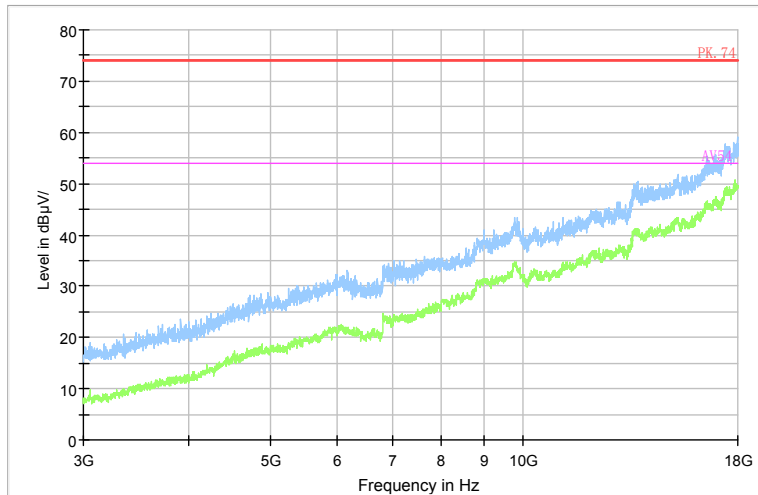

Comment

Frequency Range: 3GHz-18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g

Full Spectrum

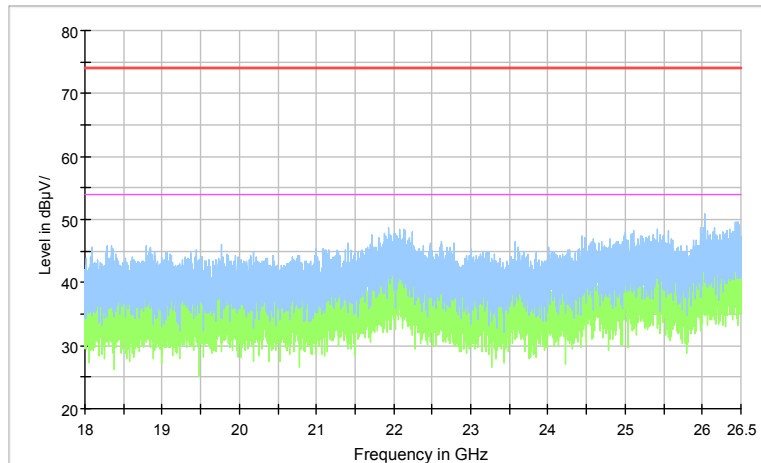


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g

Full Spectrum

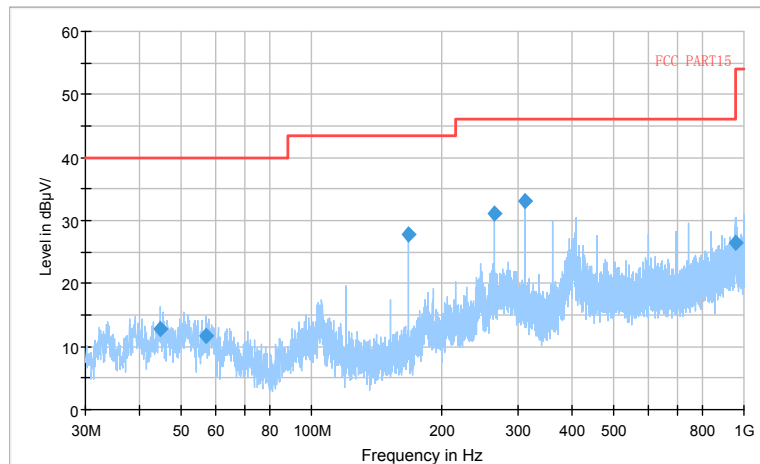


Preview Result 1-PK+ FCC PART15 Final_Result QPK

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)


Full Spectrum

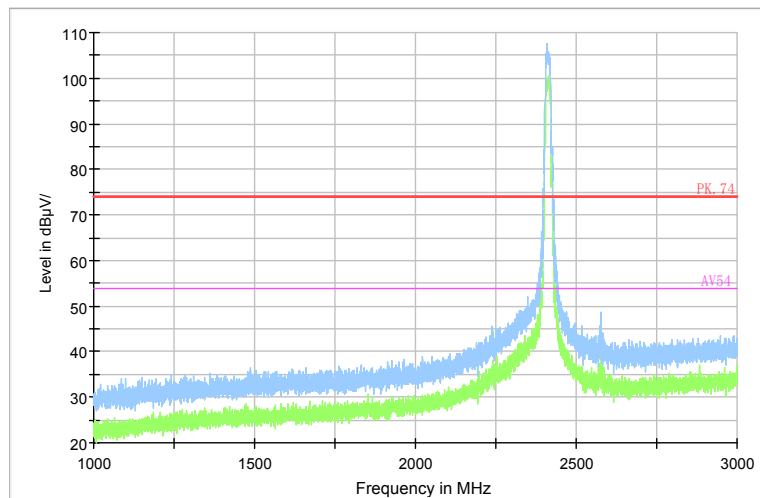

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

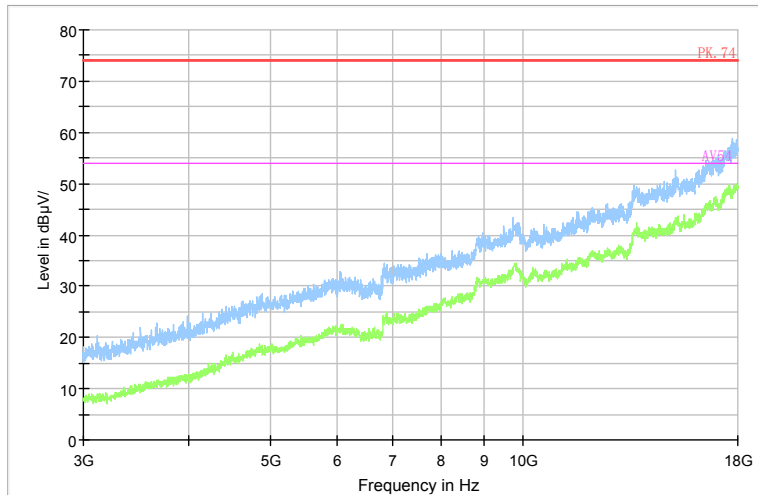

Comment

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum



Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


Carrier frequency (MHz): 2437
Channel No.:6

The State Radio_monitoring_center Testing Center (SRTC)

Tel: 86-10-57996183

Fax: 86-10-57996388


Full Spectrum

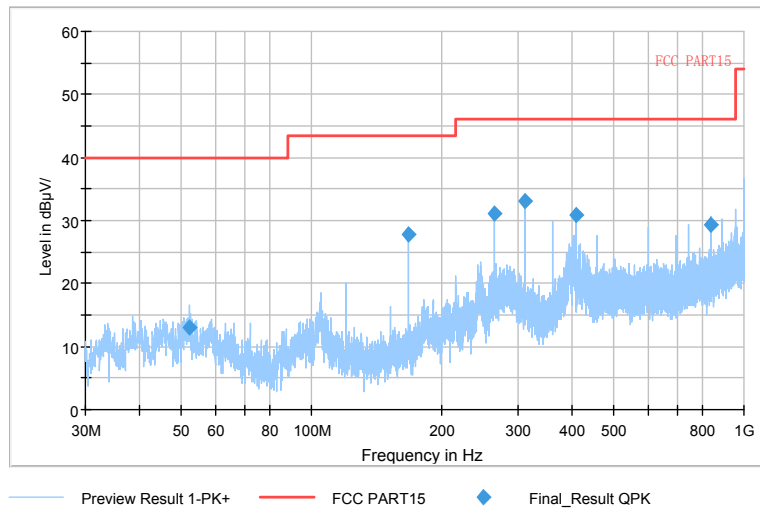

Comment

Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Test Mode: 802.11b


Full Spectrum

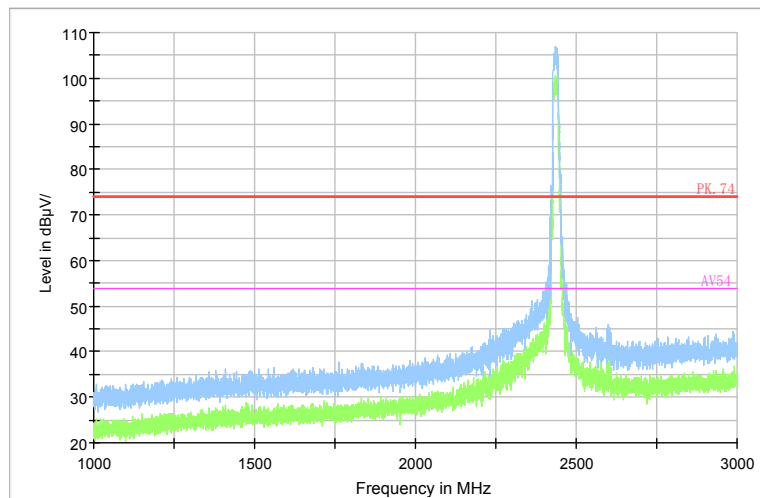

Comment

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b


Full Spectrum

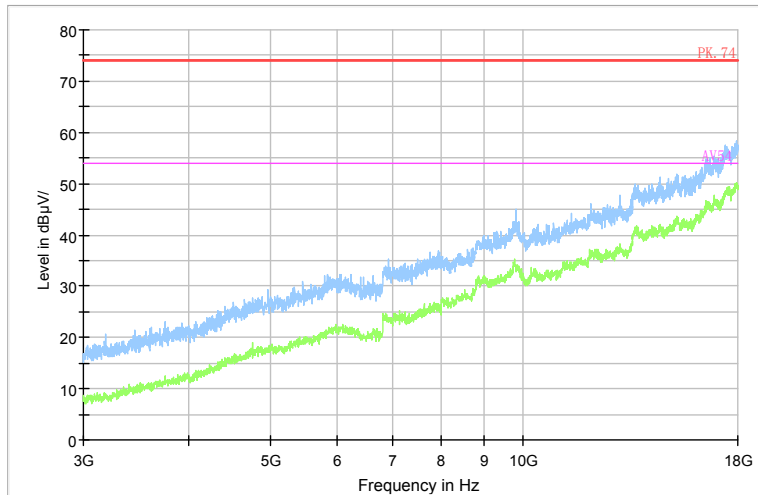

Comment

Frequency Range: 3GHz-18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b

Full Spectrum

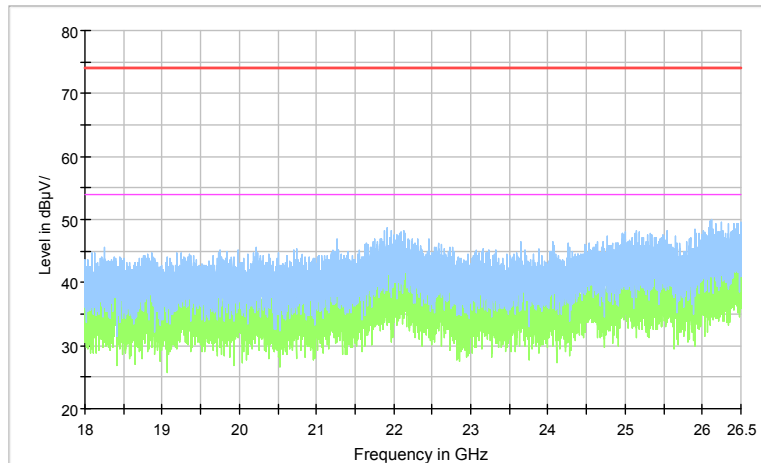


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b


Full Spectrum

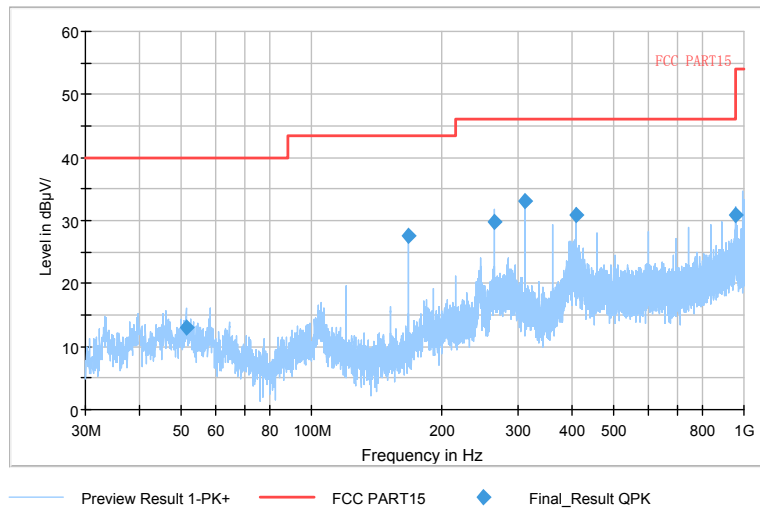

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g


Full Spectrum

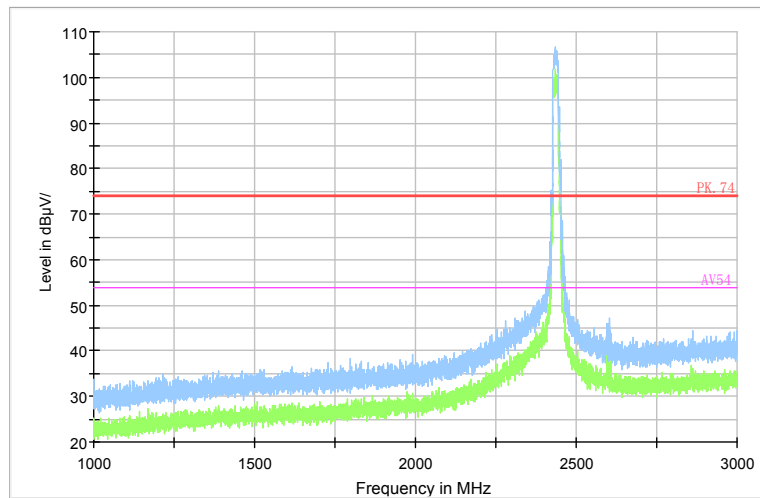

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g


Full Spectrum

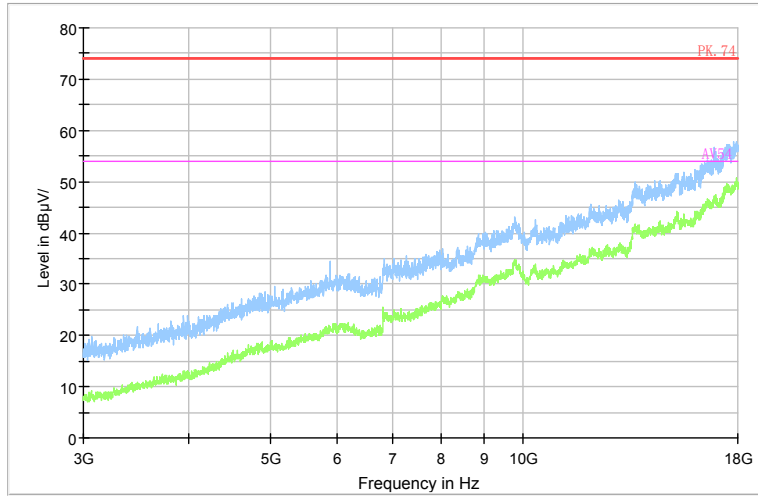

Comment

Frequency Range: 3GHz-18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g

Full Spectrum

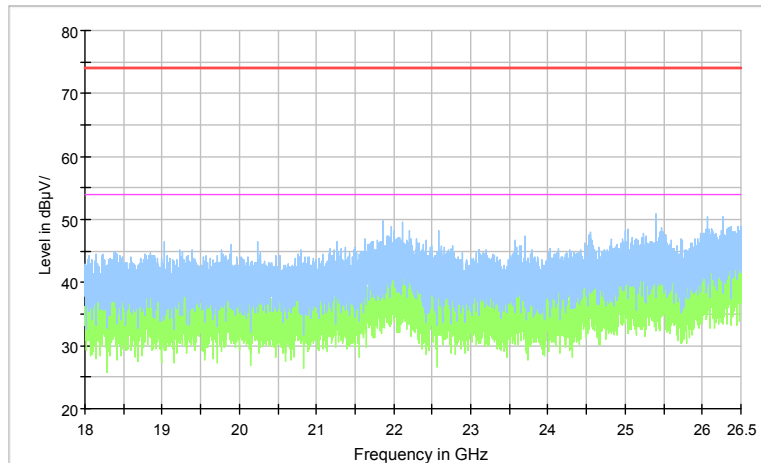


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g

Full Spectrum

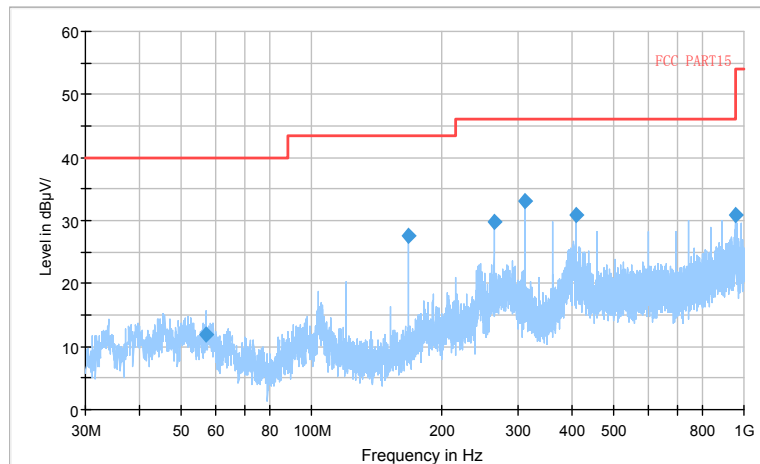


Preview Result 1-PK+ FCC PART15 Final_Result QPK

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)


Full Spectrum

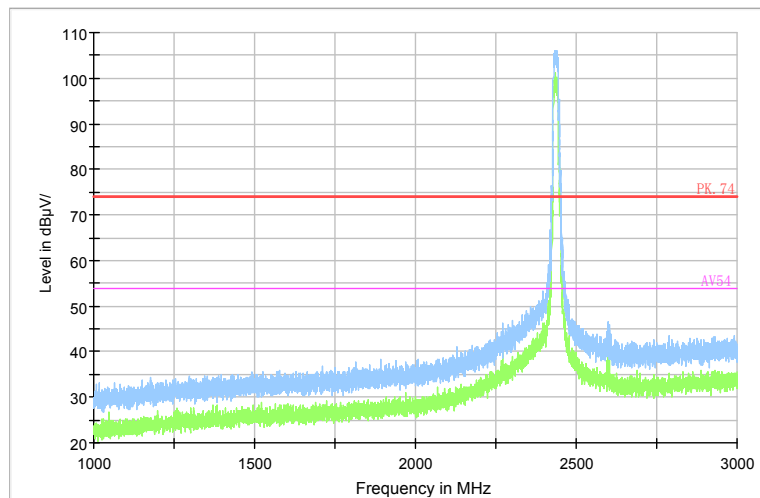

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


Full Spectrum

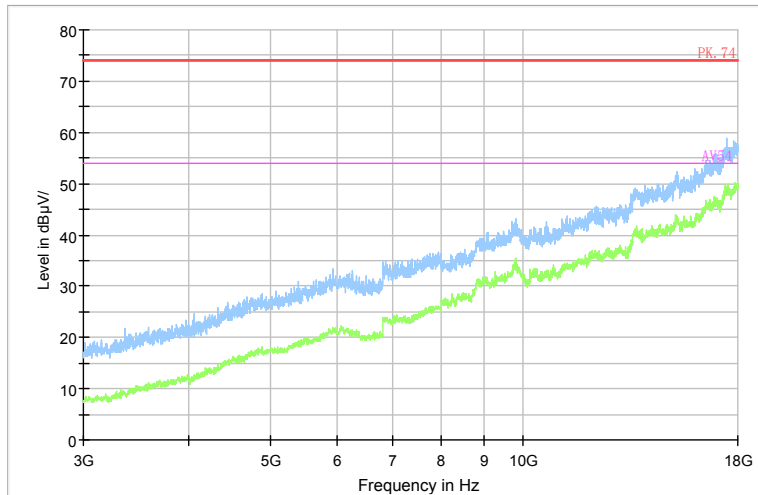

Comment

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

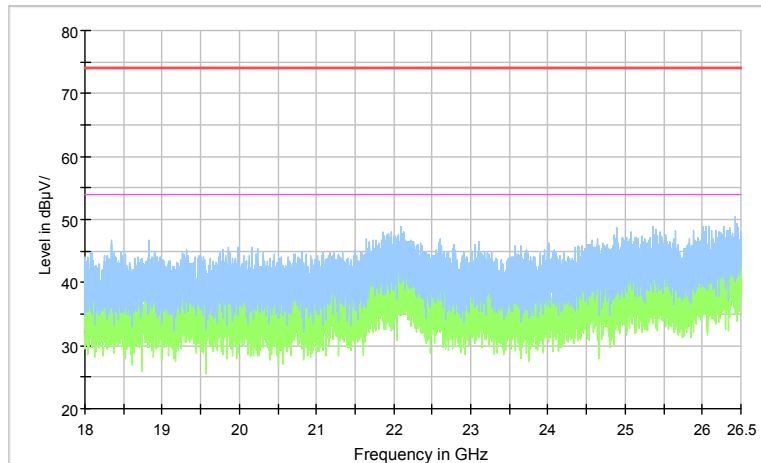


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54


Comment

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Carrier frequency (MHz): 2462
Channel No.:11

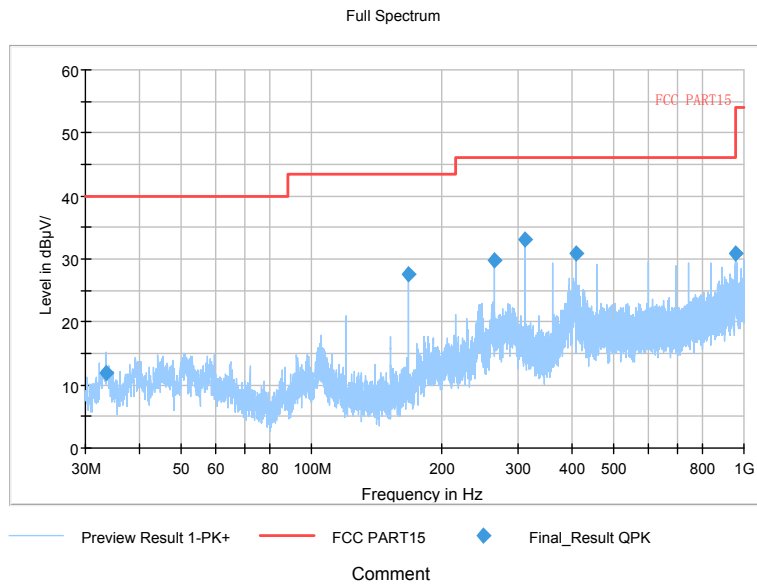


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

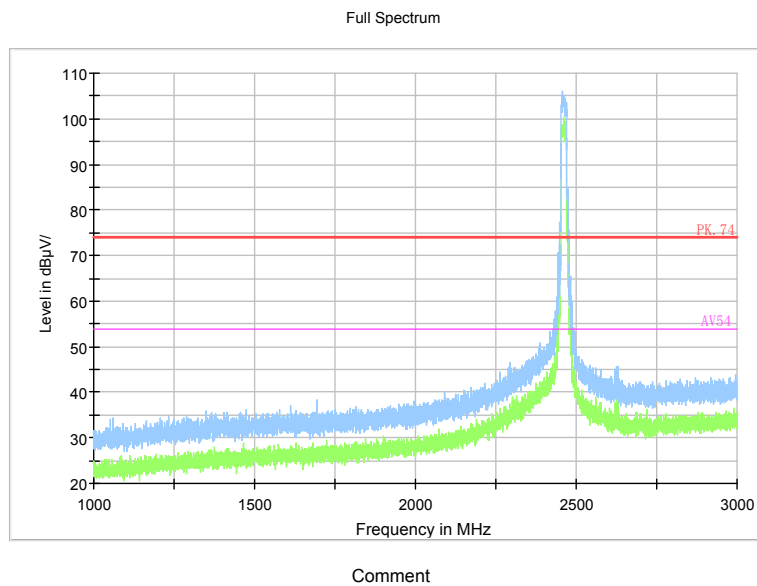

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

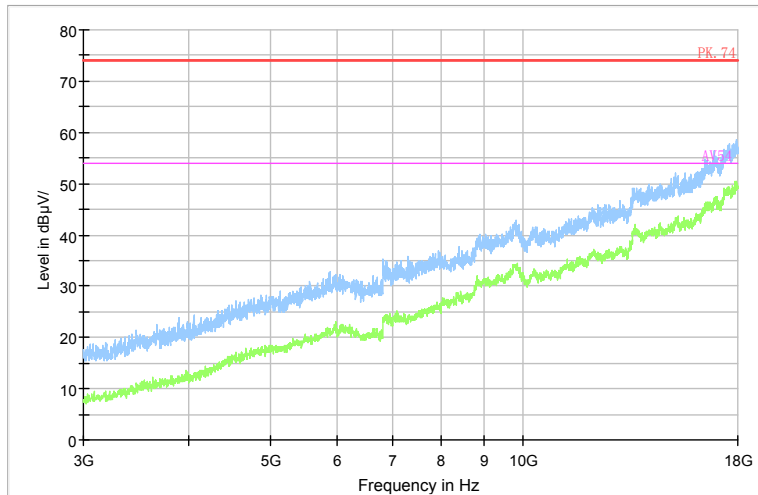

Comment

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

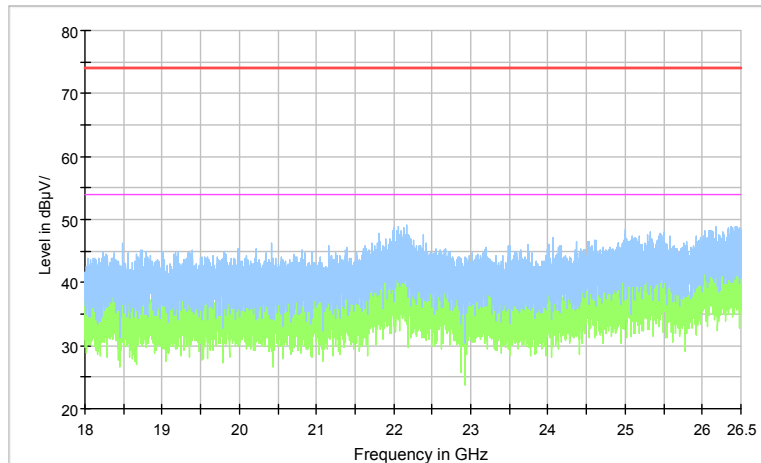


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

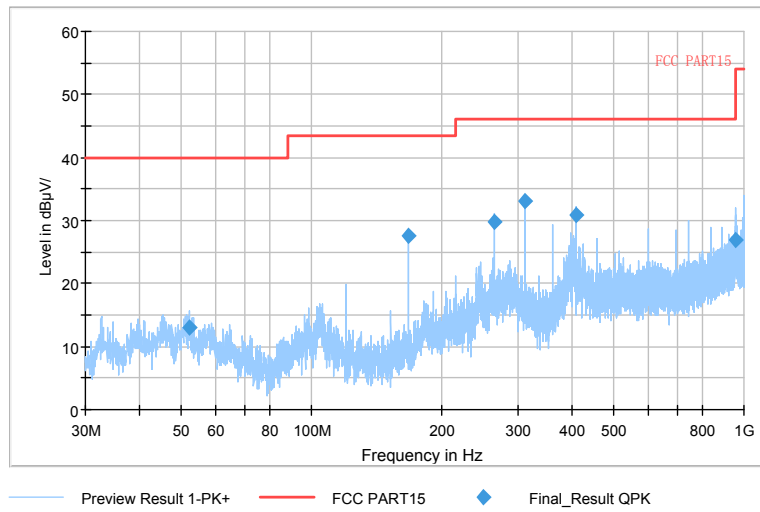

Comment

Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Modulation type: 802.11g


Full Spectrum

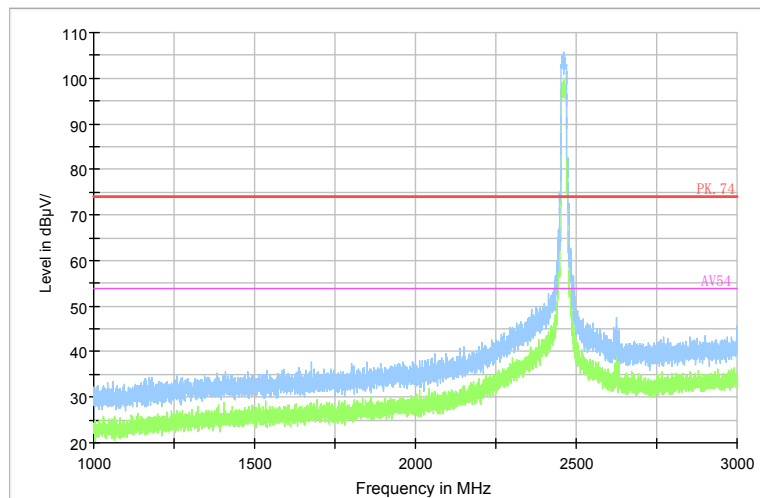

Comment

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g


Full Spectrum

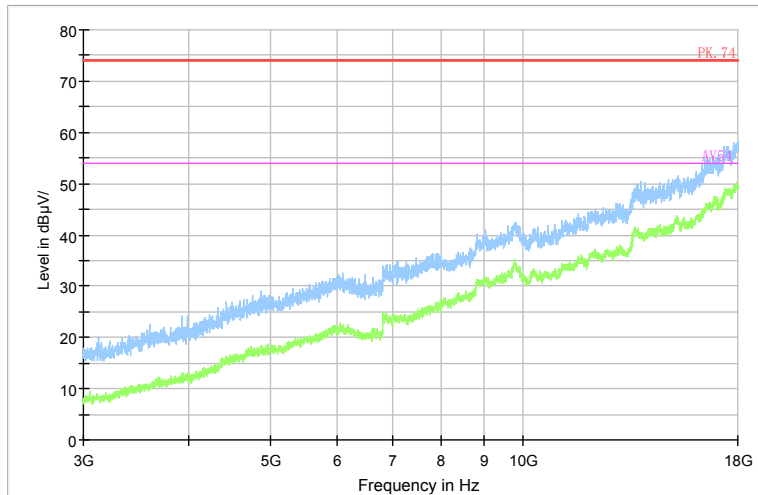

Comment

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

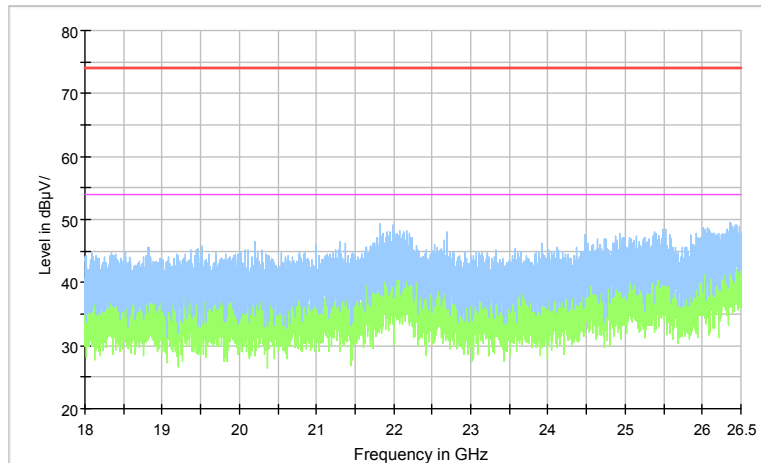


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11g


Full Spectrum

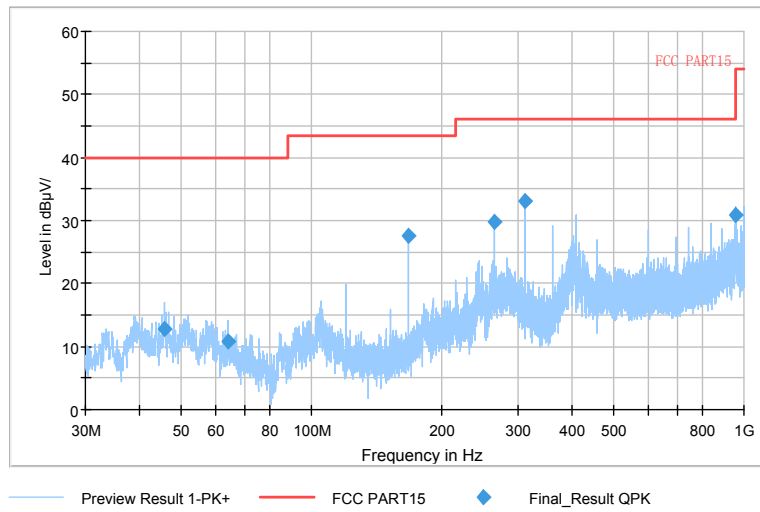

Comment

Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Test Mode: 802.11n(HT20)


Full Spectrum

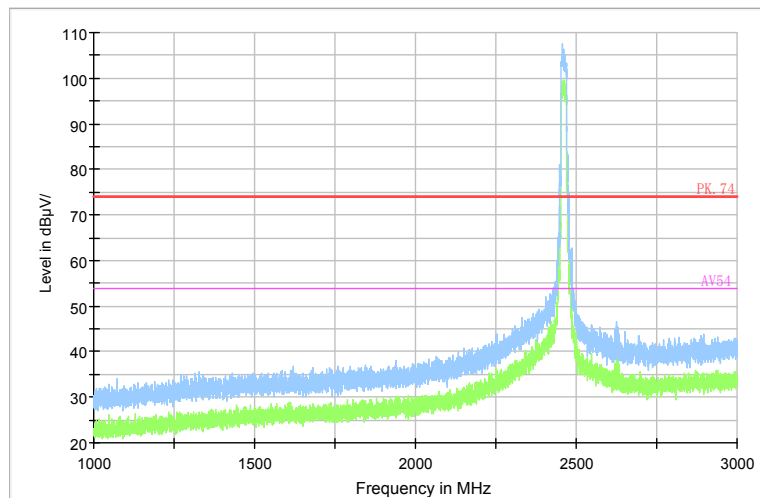

Comment

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)


Full Spectrum

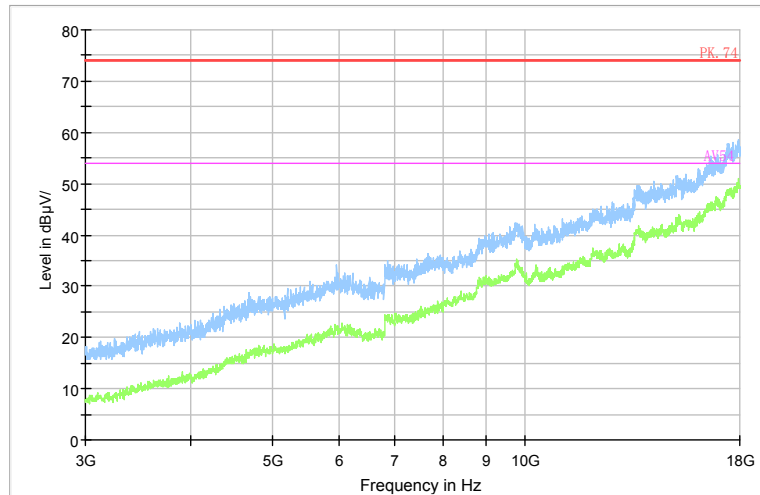

Comment

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

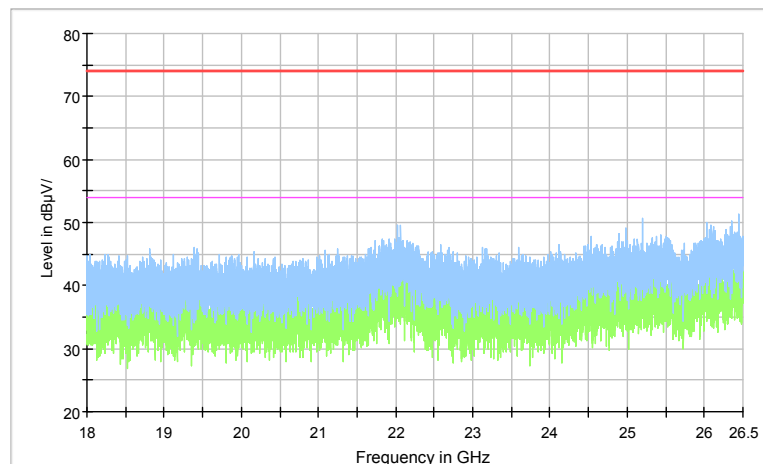


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Carrier frequency (MHz): 2422
Channel No.:3

Full Spectrum

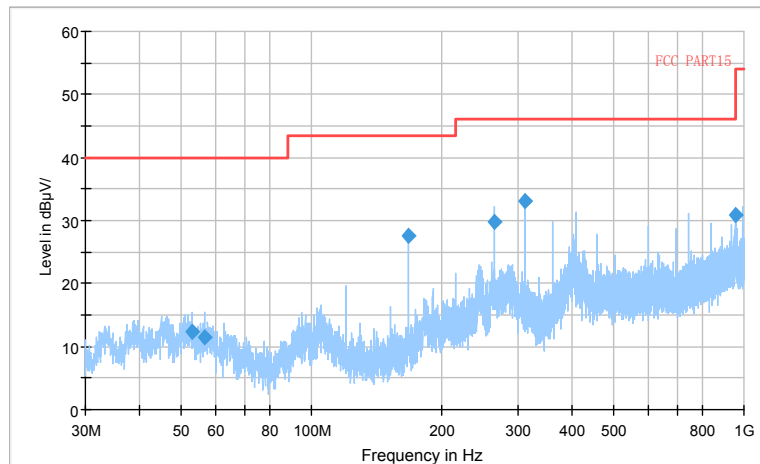


Preview Result 1-PK+ FCC PART15 Final_Result QPK

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT40)


Full Spectrum

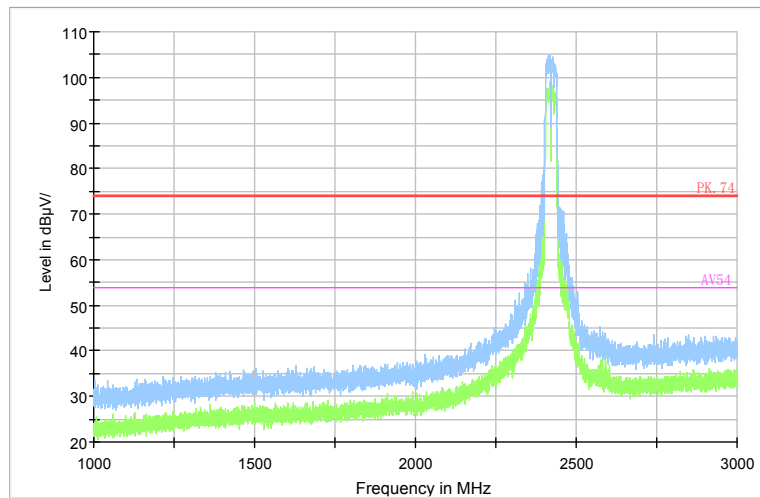

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)


Full Spectrum

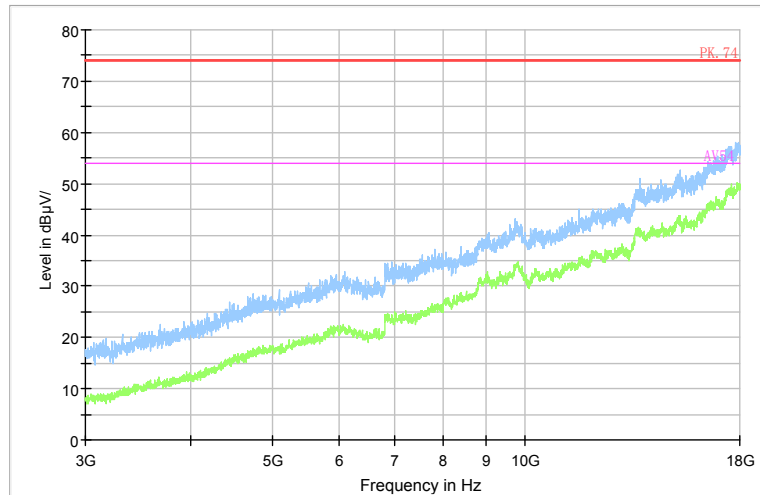

Comment

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

Full Spectrum

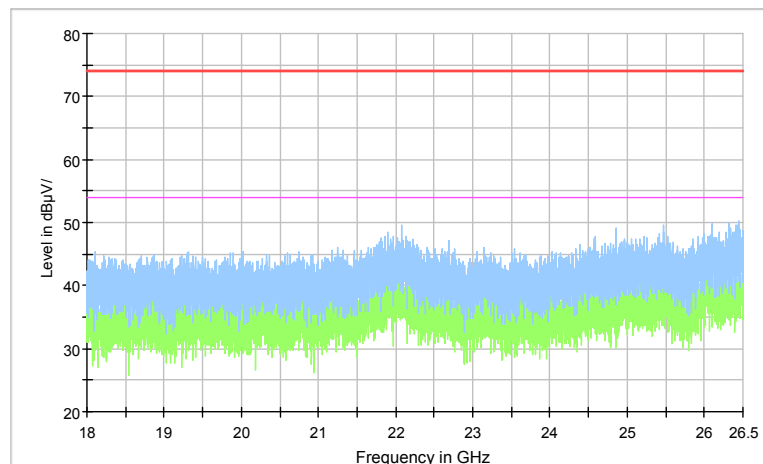


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54


Comment

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

Carrier frequency (MHz): 2437
Channel No.:6

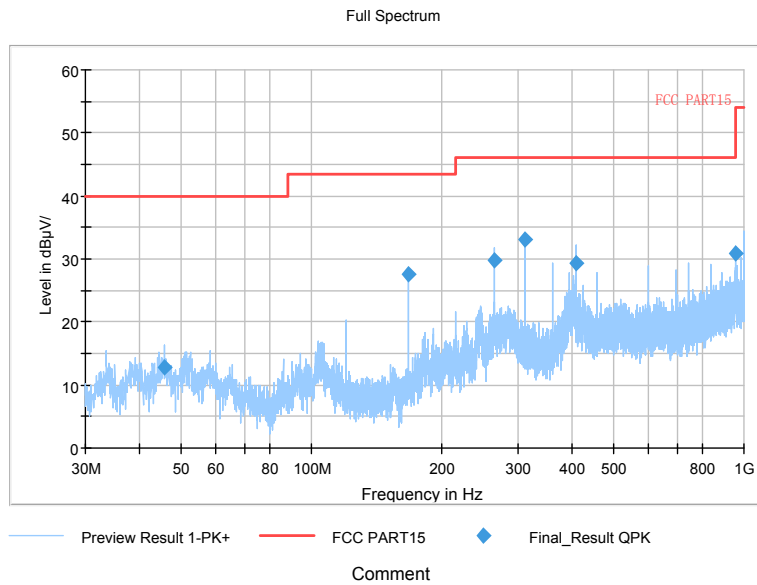


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT40)

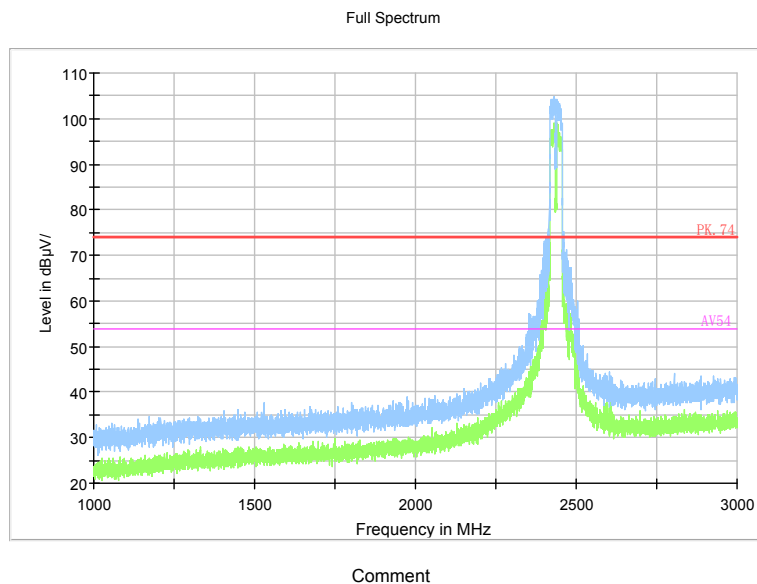

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)


Full Spectrum

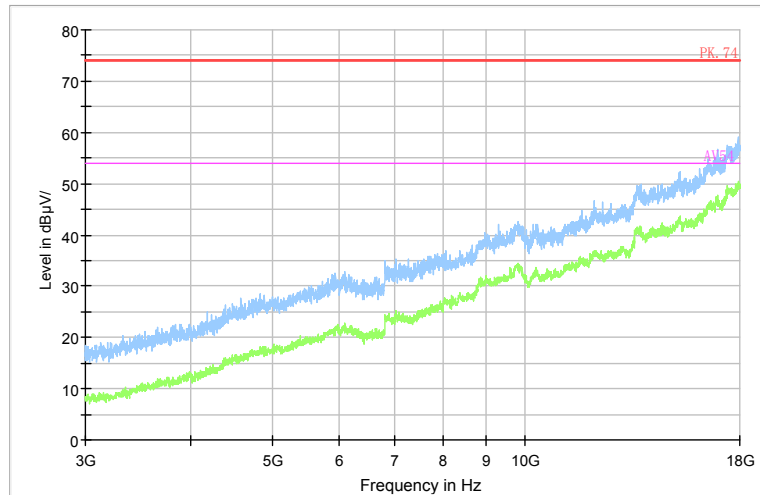

Comment

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

Full Spectrum

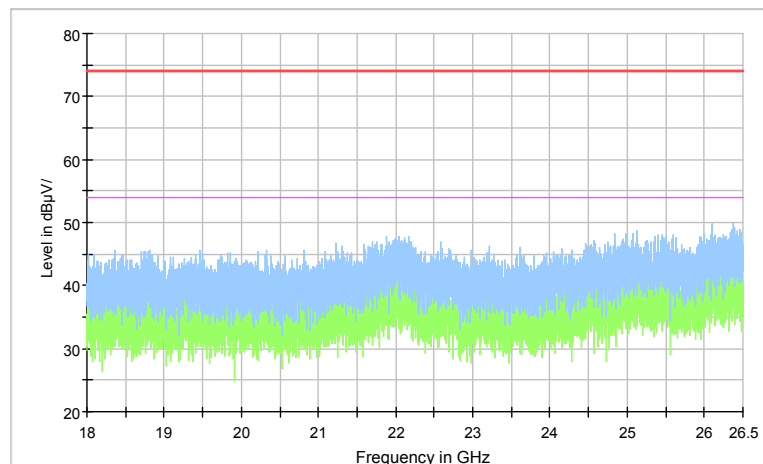


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

Carrier frequency (MHz): 2452
Channel No.:9

Full Spectrum

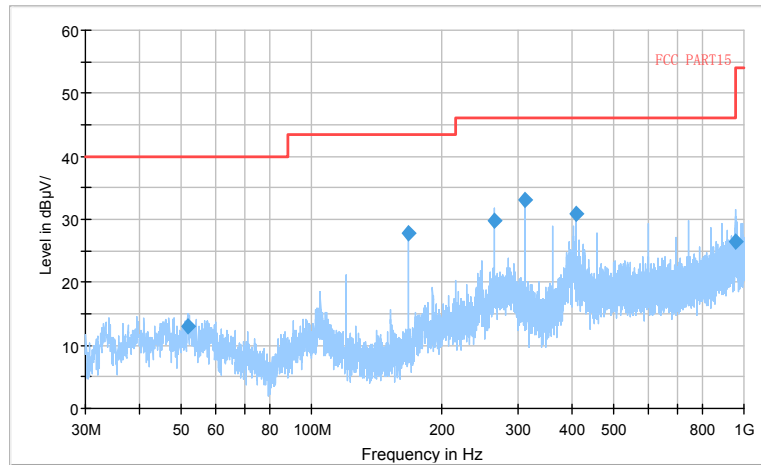


Preview Result 1-PK+ FCC PART15 Final_Result QPK

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT40)


Full Spectrum

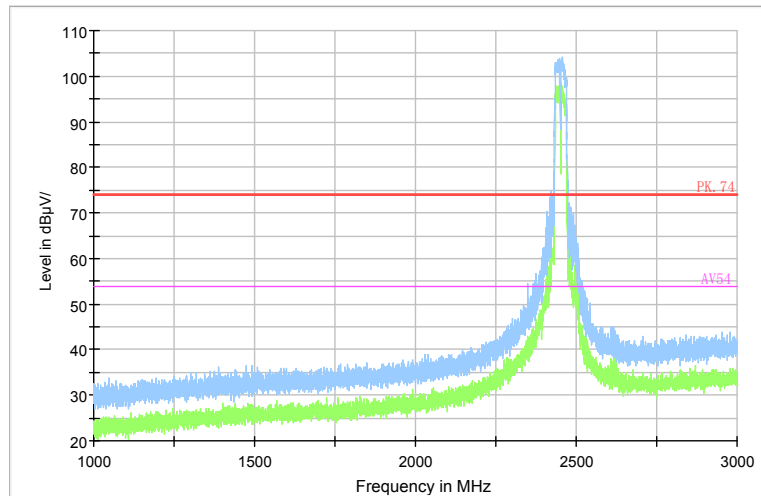

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)


Full Spectrum

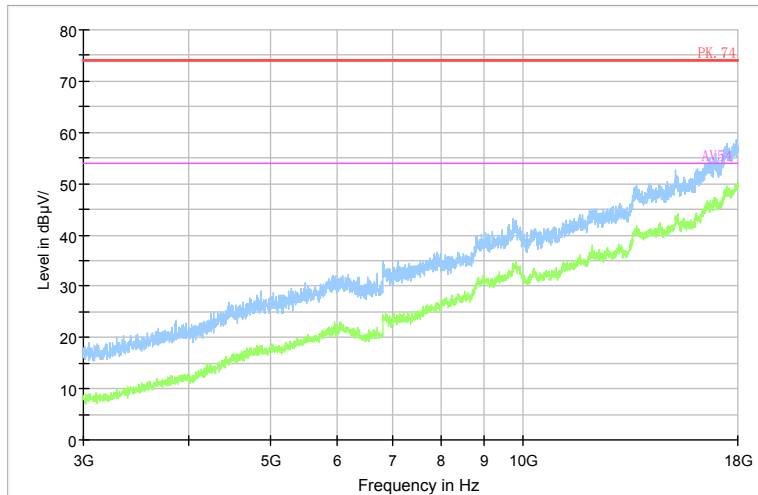

Comment

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

Full Spectrum

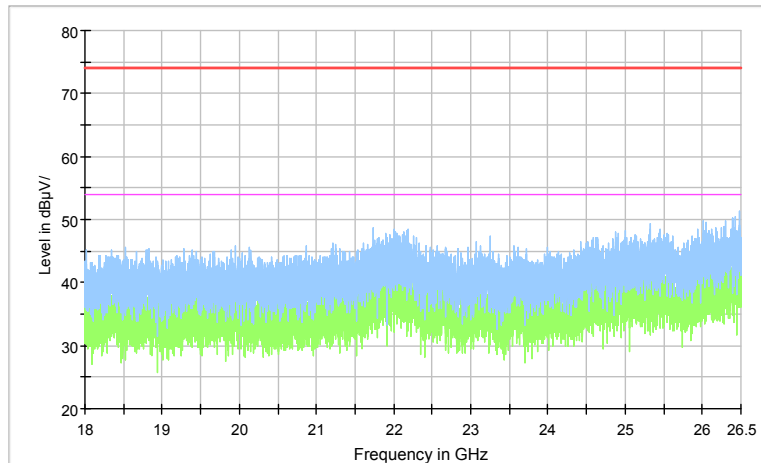

Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)


AC Power line Conducted Emission

A "reference path loss" Corr.(dB) is established and the $L_{cable}+ATT+VDF$ is the attenuation of "reference path loss", and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{result} = P_{mea} + Corr.(dB)$$

Sample calculation: $(43.93dB\mu V) = (14.23 dB\mu V) + (29.7dB)$, the corresponding frequency is 0.154264MHz.

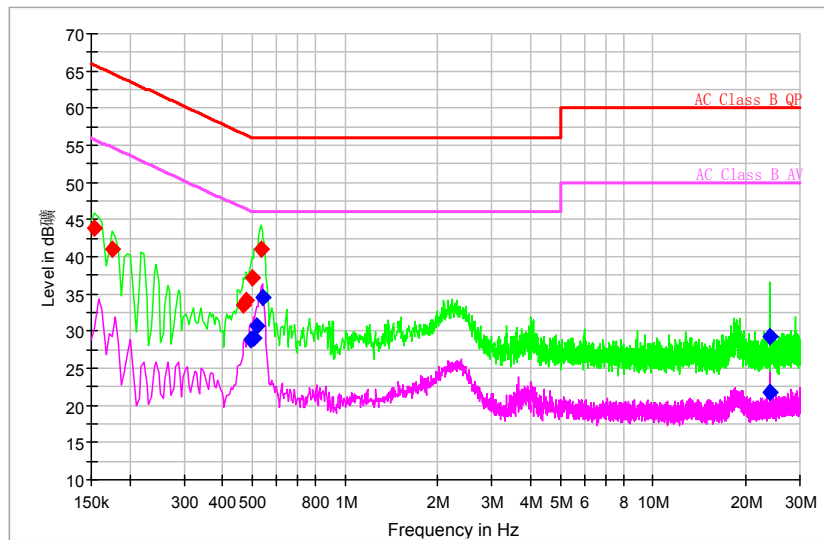

- Preview Result 2-AVG
- Preview Result 1-PK+
- AC Class B QP
- AC Class B AV
- ◆ Final_Result QPK
- ◆ Final_Result AVG

Comment

L+N Line

MEASUREMENT RESULT:

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)	Pmea QuasiPeak (dBμV)	Pmea Average (dBμV)
0.154264	43.93	---	65.77	21.84	L1	29.7	14.23	---
0.175586	40.93	---	64.69	23.76	L1	29.7	11.23	---
0.469821	33.47	---	56.52	23.04	L1	29.7	3.77	---
0.478350	34.07	---	56.37	22.30	L1	29.7	4.37	---
0.495407	---	28.89	46.08	17.19	N	29.7	---	-0.81
0.499671	37.12	---	56.01	18.89	L1	29.7	7.42	---
0.503936	---	29.03	46.00	16.97	L1	29.7	---	-0.67
0.516729	---	30.75	46.00	15.25	L1	29.7	---	1.05
0.533786	41.10	---	56.00	14.90	L1	29.7	11.4	---
0.538050	---	34.63	46.00	11.37	L1	29.7	---	4.93
23.991621	---	29.27	50.00	20.73	L1	30.5	---	-1.23
24.008679	---	21.71	50.00	28.29	L1	30.5	---	-8.79

variant product

test result

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (97.80 dBuV/m) = (63.80dBμV) + (8.90 dB) + (25.10 dB/m), the corresponding frequency is 2412MHz.

The measurement results contain the correction factor of the duty cycle.

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	97.80	63.80	N/A	N/A	8.90	25.10
2	2390	40.44	6.44	-33.56	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	95.43	61.43	N/A	N/A	8.90	25.10
2	2390	38.41	4.41	-35.59	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	93.64	59.64	N/A	N/A	8.90	25.10
2	2390	36.52	2.52	-17.48	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11b
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	91.37	57.37	N/A	N/A	8.90	25.10
2	2390	34.77	0.77	-19.23	54.00	8.90	25.10

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$


Sample calculation: $(16.19 \text{ dB}\mu\text{V/m}) = (35.79 \text{ dB}\mu\text{V}) + (-19.6 \text{ dB/m})$, the corresponding frequency is 36.062500MHz.

The worst case attitude: The mobile lay down.


For 802.11b Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
36.062500	16.19	-19.6	35.79	Vertical	40.00
47.751000	19.08	-17.7	36.78	Vertical	40.00
71.661500	13.48	-22.5	35.98	Vertical	40.00
95.572000	21.53	-20.1	41.63	Vertical	43.50
161.338000	20.32	-22.0	42.32	Vertical	43.50
179.234500	17.95	-21.1	39.05	Vertical	43.50

Carrier frequency (MHz): 2412
 Channel No.:1

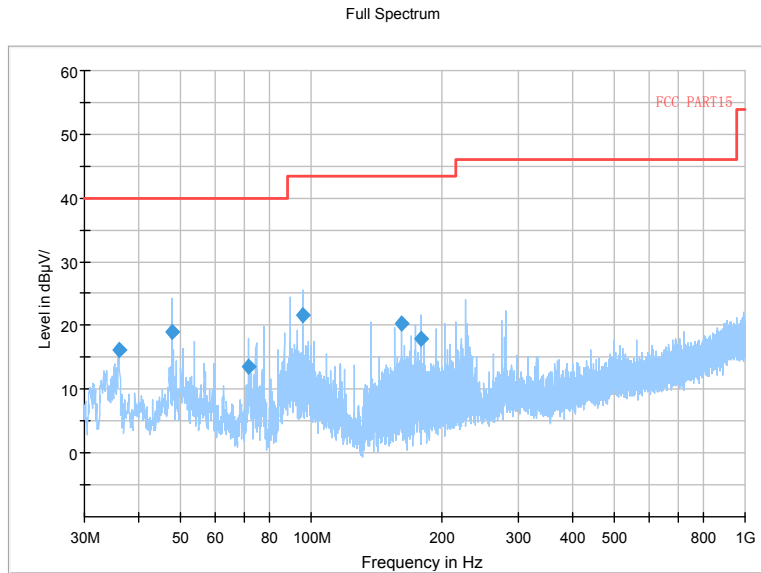


Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Test Mode: 802.11b

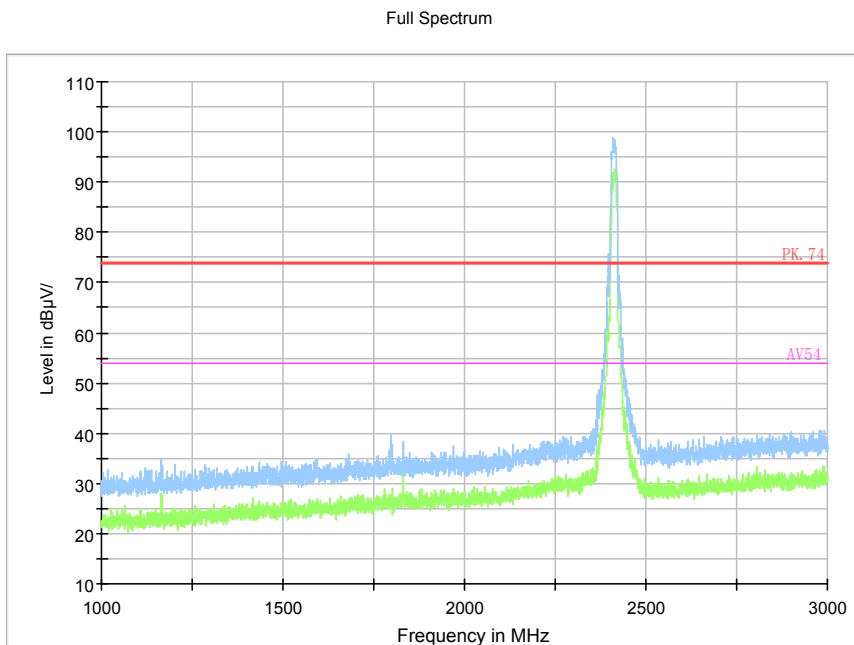


Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b

Full Spectrum

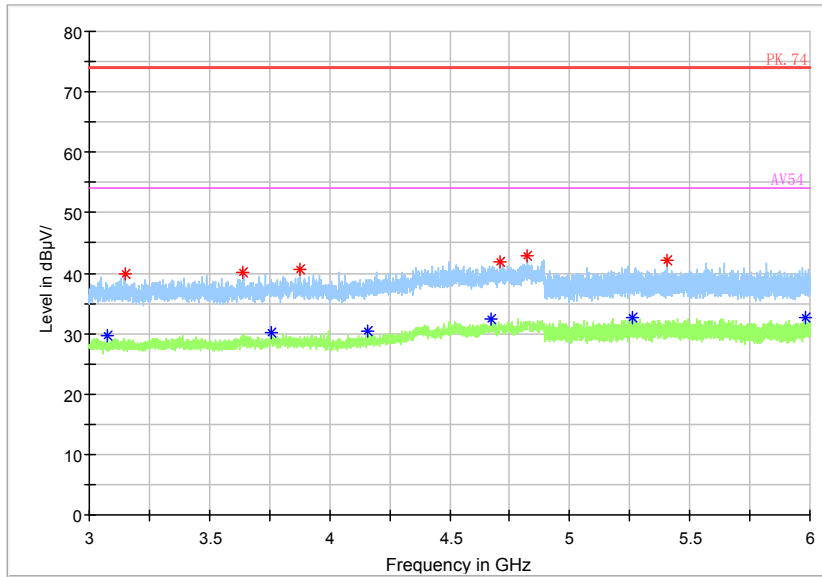


Frequency Range: 3GHz -6GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b

Full Spectrum

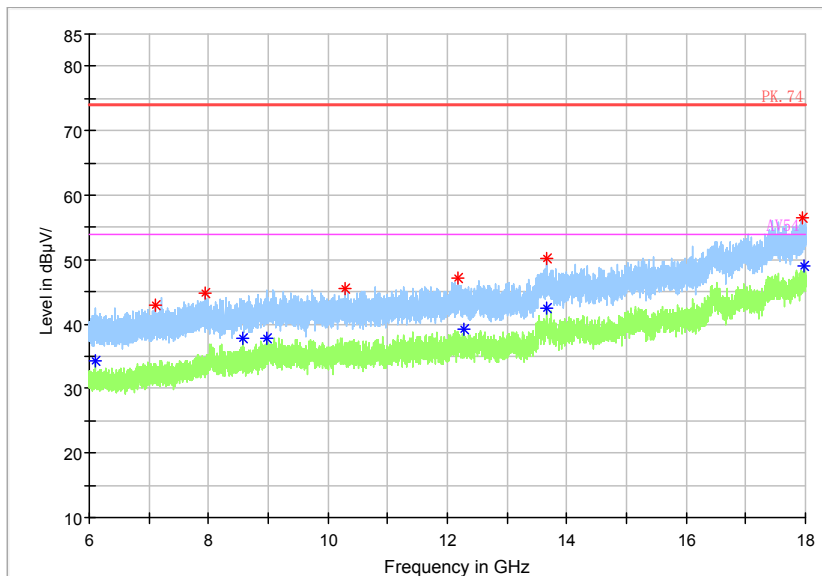

Frequency Range: 6GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b

Full Spectrum

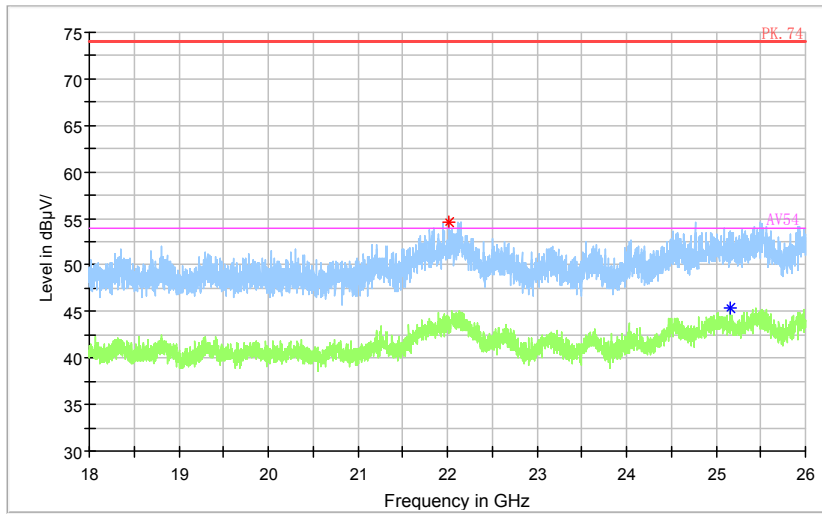

- Preview Result 2-AVG
- Preview Result 1-PK+
- * Critical_Freqs PK+
- ◆ Final_Result PK+
- ◆ Final_Result AVG
- * Critical_Freqs AVG AV54

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b


AC Power line Conducted Emission

A "reference path loss" Corr.(dB) is established and the $L_{cable}+ATT+VDF$ is the attenuation of "reference path loss", and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{result}=P_{mea}+ Corr.(dB)$$

Sample calculation: $(35.44dB\mu V) = (5.84 dB\mu V) + (29.6 dB)$, the corresponding frequency is 0.150000MHz.

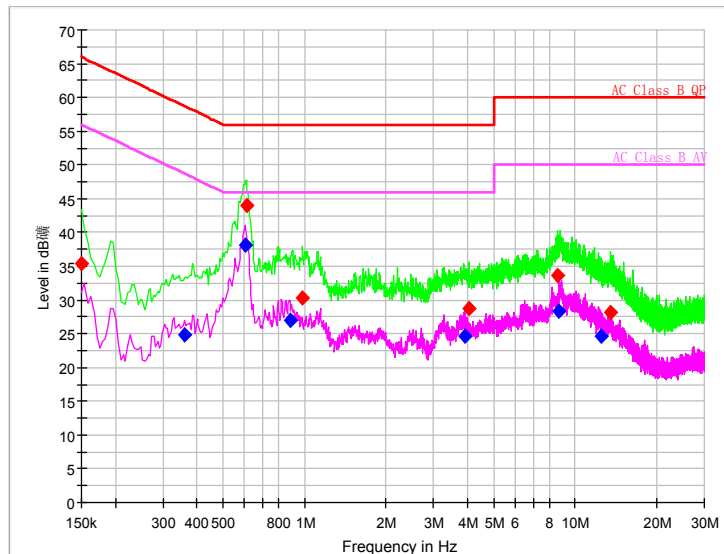

L+N Line

MEASUREMENT RESULT:

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr (dB)	Pmea Quasi Peak (dBμV)	Pmea Average (dBμV)
0.150000	35.44	---	66.00	30.56	L1	29.6	5.84	---
0.358950	---	24.81	48.75	23.94	L1	29.6	---	-4.79
0.602014	---	38.05	46.00	7.95	L1	29.6	---	8.45
0.610543	43.95	---	56.00	12.05	L1	29.6	14.35	---
0.883457	---	26.93	46.00	19.07	L1	29.7	---	-2.77
0.981536	30.32	---	56.00	25.68	L1	29.7	0.62	---
3.902571	---	24.70	46.00	21.30	L1	29.7	---	-5
4.068879	28.80	---	56.00	27.20	L1	29.7	-0.9	---
8.623136	33.56	---	60.00	26.44	L1	29.7	3.86	---
8.699893	---	28.42	50.00	21.58	L1	29.7	---	-1.28
12.516429	---	24.64	50.00	25.36	L1	29.8	---	-5.16
13.501479	28.12	---	60.00	31.88	L1	29.8	-1.68	---

---End of the test report---