

RADIATED ADDENDUM

Test of: Sonos, Inc S26

To: FCC CFR 47 Part 15 Subpart E 15.407

Test Report Serial No.: SONO01-U9_Radiated Rev A

This report supersedes: NONE

Generated Reports	Document Number
Master:	<input type="checkbox"/> SONO01-U9_Master
Conducted:	<input type="checkbox"/> SONO01-U9_Conducted#1_Addendum
	<input type="checkbox"/> SONO01-U9_Conducted#2_Addendum
Radiated:	<input checked="" type="checkbox"/> SONO01-U9_Radiated_Addendum
DFS:	<input type="checkbox"/> SONO01-U9_DFS_Addendum

Issue Date: 13th April 2020

Table of Contents

1. TEST SUMMARY	3
2. TEST RESULTS	4
2.1. Control of Test Item.....	4
2.2. Operational Mode Duty Cycle(s).....	4
2.3. Radiated.....	5
2.3.1. <i>TX Spurious & Restricted Band Emissions</i>	8
2.3.2. <i>Restricted Edge & Band-Edge Emissions</i>	20
APPENDIX - GRAPHICAL IMAGES	32
A.1. Radiated.....	33
A.1.1. <i>TX Spurious & Restricted Band Emissions</i>	33
A.1.1.1. Antenna SAA Calculated	33
A.1.2. <i>Restricted Edge & Band-Edge Emissions</i>	45
A.1.2.2. SAA Calculated	45

1. TEST SUMMARY

List of Measurements

Test Header	Result	Data Link
Radiated	Complies	-
TX Spurious & Restricted Band Emissions	Complies	-
Integral Antenna SAA Calculated	Complies	View Data
Restricted Edge & Band-Edge Emissions	Complies	-
Integral Antenna SAA Calculated	Complies	View Data

2. TEST RESULTS

2.1. Control of Test Item

The EUT was controlled via the Sonos GUI. This gave access to operational channels, output power and antenna port activation. As the device was a 4x4 MIMO all the antenna ports were activated to operate simultaneously during conducted and radiated testing.

The power setting reported in Section 9.3 Conducted Output Power is the final power setting found in order to prove compliance for radiated and conducted testing for the Sonos S26.


Output Power

In the case of average power measurements an average power sensor was utilized using connected to each antenna port. Power measurements on all ports were measured simultaneously, the EUT was set to transmit maximum power during the test program (compliant power setting logged for each test mode). The duty cycle correction factor was used to correct all power readings.

The lowest data rate for each operational mode was used to exercise the test sample.

2.2. Operational Mode Duty Cycle(s)

Results for system Duty Cycle for the following configurations are measured and reported below:

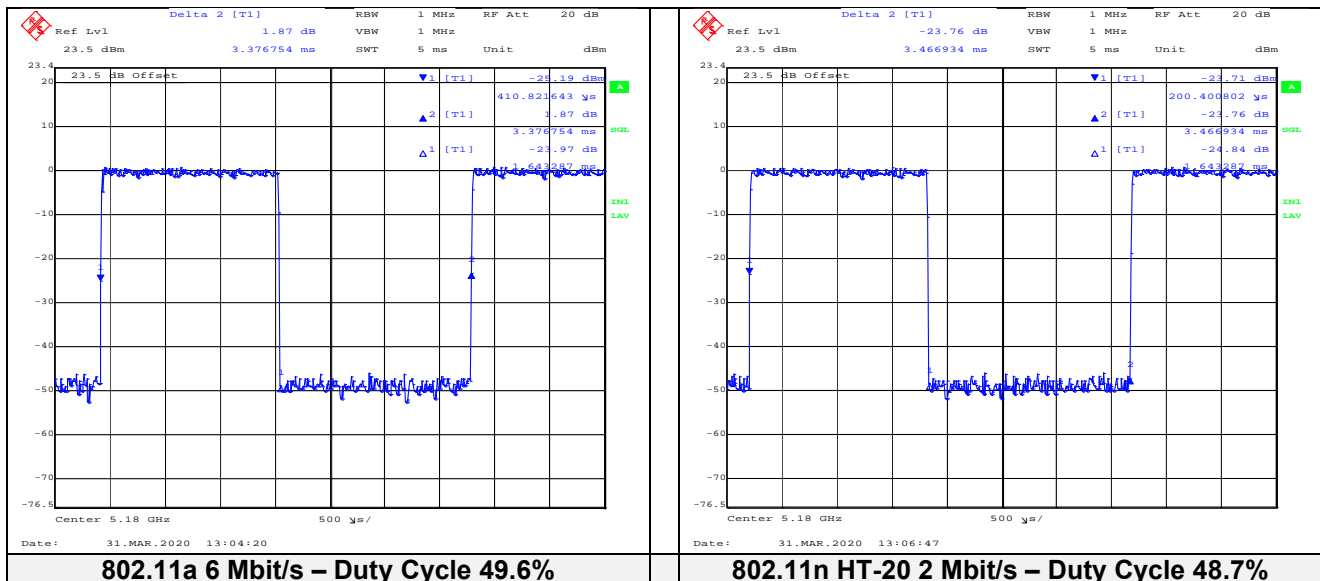

2.3. Radiated

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (b), 15.205, 15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Undesirable Measurement were per the Radiated Test Set-up specified in this document.

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Limits for Restricted Bands (15.205, 15.209)

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain
FO = Distance Falloff Factor
NFL = Notch Filter Loss

Example:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dBµV/m);

$$E = \frac{1000000 \times \sqrt{30P}}{3} \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz equates to 68.23 dBuV/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:
 Level (dBmV/m) = 20 * Log (level (mV/m))

40 dBmV/m = 100 mV/m
 48 dBmV/m = 250 mV/m

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.

(2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.

(3) Cable locating equipment operated pursuant to §15.213.

(4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.

(5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.

(6) Transmitters operating under the provisions of subparts D or F of this part.

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

2.3.1. TX Spurious & Restricted Band Emissions

2.3.1.1. Tx Spurious 1 - 18 GHz

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	6.29	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.6
Channel Frequency (MHz):	5180.00	Data Rate:	6.00 MBit/s
Power Setting:	17.5	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5180.74	68.37	2.99	-12.15	59.21	Fundamental	Vertical	151	0	--	--	
#2	10360.08	56.39	4.38	-5.42	55.35	Peak (NRB)	Horizontal	151	161	--	--	Pass
#3	15542.08	56.72	5.44	-3.93	58.23	Max Peak	Horizontal	123	257	68.2	-10.0	Pass
#4	15542.08	40.78	5.44	-3.93	45.34	Max Avg	Horizontal	123	257	54.0	-8.7	Pass

Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.05 added to average measurement

Radiated spurious emissions were investigated up to the 10th harmonic of the fundamental and no emissions were found

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	6.29	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.6
Channel Frequency (MHz):	5200.00	Data Rate:	6.00 MBit/s
Power Setting:	16.5	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	5200.80	71.60	3.00	-12.43	62.17	Fundamental	Vertical	151	0	--	--	
#2	10396.35	58.13	4.43	-5.30	57.26	Peak (NRB)	Horizontal	151	107	--	--	Pass
#3	15598.65	56.97	5.58	-3.66	58.89	Max Peak	Horizontal	150	246	68.2	-9.3	Pass
#4	15598.65	41.46	5.58	-3.66	46.43	Max Avg	Horizontal	150	246	54.0	-7.6	Pass

Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.05 added to average measurement

Radiated spurious emissions were investigated up to the 10th harmonic of the fundamental and no emissions were found

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	6.29	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.6
Channel Frequency (MHz):	5240.00	Data Rate:	6.00 MBit/s
Power Setting:	16.5	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5241.15	77.04	3.01	-12.06	67.99	Fundamental	Vertical	100	0	--	--	
#2	10482.56	65.41	4.39	-5.12	64.68	Max Peak*	Horizontal	151	221	68.2	-3.6	Pass
#3	15724.79	54.92	5.76	-3.01	57.67	Max Peak	Horizontal	127	165	68.2	-10.6	Pass
#4	15724.79	39.65	5.76	-3.01	45.45	Max Avg	Horizontal	127	165	54.0	-8.6	Pass

Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.05 added to average measurement. *Non-Restricted Band Peak Limit is 68.23

Radiated spurious emissions were investigated up to the 10th harmonic of the fundamental and no emissions were found

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	6.63	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.8
Channel Frequency (MHz):	5260.00	Data Rate:	6.00 MBit/s
Power Setting:	17.5	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	5256.81	77.64	2.95	-12.20	68.39	Fundamental	Vertical	151	20	--	--	
#2	10518.48	65.16	4.45	-5.09	64.52	Max Peak*	Horizontal	151	230	68.2	-3.7	Pass
#3	15781.80	58.12	5.62	-2.76	60.98	Max Peak	Horizontal	139	222	68.2	-7.3	Pass
#4	15781.80	41.52	5.62	-2.76	47.41	Max Avg	Horizontal	139	222	54.0	-6.6	Pass

Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.03 added to average measurement. *Non-Restricted Band Peak Limit is 68.23

Radiated spurious emissions were investigated up to the 10th harmonic of the fundamental and no emissions were found

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	6.63	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.8
Channel Frequency (MHz):	5300.00	Data Rate:	6.00 MBit/s
Power Setting:	17.5	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5305.11	76.20	2.66	-12.09	66.46	Fundamental	Vertical	100	0	--	--	
#2	10600.45	64.51	4.57	-4.92	64.16	Max Peak	Horizontal	148	232	68.2	-4.1	Pass
#3	10600.45	46.80	4.57	-4.92	49.48	Max Avg	Horizontal	148	232	54.0	-4.5	Pass
#4	15901.85	57.30	5.70	-2.56	60.44	Max Peak	Horizontal	180	229	68.2	-7.8	Pass
#5	15901.85	40.72	5.70	-2.56	46.89	Max Avg	Horizontal	180	229	54.0	-7.1	Pass

Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.03 added to average measurement

Radiated spurious emissions were investigated up to the 10th harmonic of the fundamental and no emissions were found

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	6.63	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.8
Channel Frequency (MHz):	5320.00	Data Rate:	6.00 MBit/s
Power Setting:	17	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5317.11	74.31	2.97	-12.02	65.26	Fundamental	Vertical	100	109	--	--	
#2	10640.34	62.43	4.44	-4.57	62.30	Max Peak	Horizontal	169	230	68.2	-5.9	Pass
#3	10640.34	44.43	4.44	-4.57	44.30	Max Avg	Horizontal	169	230	54.0	-9.7	Pass
#4	15963.68	53.59	5.56	-2.35	56.80	Max Peak	Horizontal	101	214	68.2	-11.4	Pass
#5	15963.68	39.09	5.56	-2.35	42.30	Max Avg	Horizontal	101	214	54.0	-11.7	Pass

Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.03 added to average measurement

Radiated spurious emissions were investigated up to the 10th harmonic of the fundamental and no emissions were found

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	5.81	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	50.1
Channel Frequency (MHz):	5500.00	Data Rate:	6.00 MBit/s
Power Setting:	17	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	5501.90	69.45	3.05	-11.64	60.86	Fundamental	Vertical	151	217	--	--	
#2	11000.71	58.75	4.60	-4.70	58.65	Max Peak	Horizontal	156	227	68.2	-9.6	Pass
#3	11000.71	41.53	4.60	-4.70	44.43	Max Avg	Horizontal	156	227	54.0	-9.6	Pass

Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.00 added to average measurement

Radiated spurious emissions were investigated up to the 10th harmonic of the fundamental and no emissions were found

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	5.81	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	50.1
Channel Frequency (MHz):	5580.00	Data Rate:	6.00 MBit/s
Power Setting:	17	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	5584.47	71.25	3.12	-11.55	62.82	Fundamental	Vertical	151	0	--	--	
#2	11156.20	57.74	4.58	-5.05	57.27	Max Peak	Horizontal	150	302	68.2	-11.0	Pass
#3	11156.20	40.18	4.58	-5.05	42.71	Max Avg	Horizontal	150	302	54.0	-11.3	Pass

Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.00 added to average measurement

Radiated spurious emissions were investigated up to the 10th harmonic of the fundamental and no emissions were found

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	5.81	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	50.1
Channel Frequency (MHz):	5700.00	Data Rate:	6.00 MBit/s
Power Setting:	17.5	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5700.91	63.68	3.19	-11.35	55.52	Fundamental	Vertical	151	272	--	--	
#2	11394.27	61.86	4.54	-5.64	60.76	Max Peak	Horizontal	156	317	68.2	-7.5	Pass
#3	11394.27	43.98	4.54	-5.64	45.88	Max Avg	Horizontal	156	317	54.0	-8.1	Pass

Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.00 added to average measurement

Radiated spurious emissions were investigated up to the 10th harmonic of the fundamental and no emissions were found

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	5.90	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.2
Channel Frequency (MHz):	5745.00	Data Rate:	6.00 MBit/s
Power Setting:	18.5	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5747.54	55.27	3.21	-11.03	47.45	Fundamental	Vertical	151	0	--	--	
#2	11490.27	59.43	4.75	-5.61	58.57	Max Peak	Horizontal	106	214	68.2	-9.7	Pass
#3	11490.27	42.32	4.75	-5.61	44.54	Max Avg	Horizontal	106	214	54.0	-12.5	Pass

Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.08 added to average measurement

Radiated spurious emissions were investigated up to the 10th harmonic of the fundamental and no emissions were found

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	5.90	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.2
Channel Frequency (MHz):	5785.00	Data Rate:	6.00 MBit/s
Power Setting:	18.5	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5788.99	61.04	3.14	-10.90	53.28	Fundamental	Vertical	100	34	--	--	
#2	11571.55	60.75	4.39	-5.55	59.59	Max Peak	Horizontal	153	237	68.2	-8.6	Pass
#3	11571.55	43.69	4.39	-5.55	45.61	Max Avg	Horizontal	153	237	54.0	-18.4	Pass

Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.08 added to average measurement

Radiated spurious emissions were investigated up to the 10th harmonic of the fundamental and no emissions were found

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	5.90	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.2
Channel Frequency (MHz):	5825.00	Data Rate:	6.00 MBit/s
Power Setting:	18.5	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5827.70	65.38	3.14	-10.85	57.67	Fundamental	Vertical	151	0	--	--	
#2	11649.84	64.57	4.92	-5.69	63.80	Max Peak	Horizontal	151	302	68.2	-4.4	Pass
#3	11649.84	47.36	4.92	-5.69	49.67	Max Avg	Horizontal	151	302	54.0	-4.3	Pass

Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.08 added to average measurement

Radiated spurious emissions were investigated up to the 10th harmonic of the fundamental and no emissions were found

2.3.2. Restricted Edge & Band-Edge Emissions

RESULTS SUMMARY FOR RADIATED BAND-EDGE EMISSIONS

5150 - 5250 MHz

Antenna SAA Calculated		Band-Edge Freq	Limit 74.0dB μ V/m	Limit 54.0dB μ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
802.11a	5180.00	5150.00	69.49	53.83	17
802.11n HT-20	5180.00	5150.00	69.97	52.88	17

5250 - 5350 MHz

Antenna SAA Calculated		Band-Edge Freq	Limit 74.0dB μ V/m	Limit 54.0dB μ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
802.11a	5320.00	5350.00	71.69	53.61	17
802.11n HT-20	5320.00	5350.00	70.36	53.38	16.5

5470 - 5725 MHz

Antenna SAA Calculated		Restricted-Edge Freq	Limit 74.0dB μ V/m	Limit 54.0dB μ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
802.11a	5500.00	5460.00	67.78	48.69	17.0
802.11n HT-20	5500.00	5460.00	67.99	48.92	17

Antenna SAA Calculated		Band-Edge Freq	Limit 68.23dB μ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V/m	
802.11a	5500.00	5470.00	67.78	17.0
802.11n HT-20	5500.00	5470.00	67.99	17

5725 MHz Radiated Lower Band-Edge Emissions

Antenna SAA Calculated		Band-Edge Freq	Limit 68.2dB μ V/m	Limit 122.2dB μ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
802.11a	5725.00	5725.00	60.47	97.20	18.5
802.11n HT-20	5725.00	5725.00	60.47	98.89	18.5

5850 MHz Radiated Higher Band-Edge Emissions

Antenna SAA Calculated		Band-Edge Freq	Limit 68.2dB μ V/m	Limit 122.2dB μ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
802.11a	5850.00	5850.00	59.78	86.66	18.5
802.11n HT-20	5850.00	5850.00	62.42	90.79	18.5

Click on the links to view the data.

Equipment Configuration for Restricted Lower Band-Edge Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	6.29	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.6
Channel Frequency (MHz):	5180.00	Data Rate:	6.00 MBit/s
Power Setting:	17	Tested By:	JMH

Test Measurement Results

4500.00 - 5250.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5150.00	13.64	2.93	34.21	53.83	Max Avg	Vertical	162	265	54.0	-0.2	Pass
#2	5150.00	32.35	2.93	34.21	69.49	Max Peak	Vertical	162	265	74.0	-4.5	Pass
#3	5150.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT Connected to laptop outside chamber via Ethernet. Average Measurement includes DC correction of 3.05

Equipment Configuration for Restricted Lower Band-Edge Emissions

Antenna:	SAA Calculated	Variant:	802.11n HT-20
Antenna Gain (dBi):	Not Applicable	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.6
Channel Frequency (MHz):	5180.00	Data Rate:	6.50 MBit/s
Power Setting:	17	Tested By:	JMH

Test Measurement Results

4500.00 - 5250.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5148.50	32.85	2.91	34.21	69.97	Max Peak	Vertical	162	265	74.0	-4.0	Pass
#2	5150.00	12.69	2.93	34.21	52.88	Max Avg	Vertical	162	265	54.0	-1.1	Pass
#3	5150.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT Connected to laptop outside chamber via Ethernet. Average Measurement includes DC correction of 3.05

Equipment Configuration for Restricted Lower Band-Edge Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	Not Applicable	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.6
Channel Frequency (MHz):	5500.00	Data Rate:	6.00 MBit/s
Power Setting:	17.0	Tested By:	JMH

Test Measurement Results

5350.00 - 5500.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5460.00	7.60	3.06	34.53	48.69	Max Avg	Vertical	157	80	54.0	-5.3	Pass
#3	5468.42	29.71	3.07	34.55	67.78	Max Peak	Vertical	157	80	68.2	-0.4	Pass
#2	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
#4	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT Connected to laptop outside chamber via Ethernet. Average Measurement includes DC correction of 3.05

Equipment Configuration for Restricted Lower Band-Edge Emissions

Antenna:	SAA Calculated	Variant:	802.11n HT-20
Antenna Gain (dBi):	Not Applicable	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.6
Channel Frequency (MHz):	5500.00	Data Rate:	6.50 MBit/s
Power Setting:	17	Tested By:	JMH

Test Measurement Results

5350.00 - 5500.00 MHz

Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	5458.80	8.29	3.06	34.52	48.92	Max Avg	Vertical	157	80	54.0	-5.1	Pass
#3	5467.29	30.36	3.08	34.55	67.99	Max Peak	Vertical	157	80	68.2	-0.2	Pass
#2	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
#4	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT Connected to laptop outside chamber via Ethernet. Average Measurement includes DC correction of 3.05

Equipment Configuration for Restricted Upper Band-Edge Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	6.63	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.8
Channel Frequency (MHz):	5320.00	Data Rate:	6.00 MBit/s
Power Setting:	17	Tested By:	JMH

Test Measurement Results

5300.00 - 5460.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#2	5351.62	13.06	3.06	34.46	53.61	Max Avg	Vertical	154	40	54.0	-0.4	Pass
#3	5351.92	34.17	3.06	34.46	71.69	Max Peak	Vertical	154	40	74.0	-2.3	Pass
#1	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT Connected to laptop outside chamber via Ethernet. Average Measurement includes DC correction of 3.03

Equipment Configuration for Restricted Upper Band-Edge Emissions

Antenna:	SAA Calculated	Variant:	802.11n HT-20
Antenna Gain (dBi):	6.63	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.5
Channel Frequency (MHz):	5320.00	Data Rate:	6.50 MBit/s
Power Setting:	16.5	Tested By:	JMH

Test Measurement Results

5300.00 - 5460.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#2	5350.98	32.84	3.06	34.46	70.36	Max Peak	Vertical	154	40	74.0	-3.6	Pass
#3	5351.28	12.83	3.06	34.46	53.38	Max Avg	Vertical	154	40	54.0	-0.6	Pass
#1	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT Connected to laptop outside chamber via Ethernet. Average Measurement includes DC correction of 3.05

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	5.90	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.2
Channel Frequency (MHz):	5745.00	Data Rate:	6.00 MBit/s
Power Setting:	18.5	Tested By:	JMH

Test Measurement Results

5600.00 - 5780.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5650.07	22.75	3.09	34.63	60.47	Max Peak	Vertical	193	78	68.2	-7.8	Pass
#2	5725.00	59.29	3.19	34.72	97.20	Max Peak	Vertical	193	78	122.2	-25.0	Pass
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT Connected to laptop outside chamber via Ethernet.

Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions

Antenna:	SAA Calculated	Variant:	802.11n HT-20
Antenna Gain (dBi):	5.90	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	48.9
Channel Frequency (MHz):	5745.00	Data Rate:	6.50 MBit/s
Power Setting:	18.5	Tested By:	JMH

Test Measurement Results

5600.00 - 5780.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5642.13	22.74	3.09	34.64	60.47	Max Peak	Vertical	193	78	68.2	-7.8	Pass
#2	5725.00	60.98	3.19	34.72	98.89	Max Peak	Vertical	193	78	122.2	-23.3	Pass
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT Connected to laptop outside chamber via Ethernet.

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	SAA Calculated	Variant:	802.11a
Antenna Gain (dBi):	5.90	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	49.2
Channel Frequency (MHz):	5825.00	Data Rate:	6.00 MBit/s
Power Setting:	18.5	Tested By:	JMH

Test Measurement Results

5770.00 - 6000.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#2	5850.46	48.46	3.24	34.96	86.66	Max Peak	Vertical	193	78	121.8	-35.1	Pass
#3	5931.44	21.47	3.20	35.11	59.78	Max Peak	Vertical	193	78	68.2	-8.5	Pass
#1	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT Connected to laptop outside chamber via Ethernet.

Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions

Antenna:	SAA Calculated	Variant:	802.11n HT-20
Antenna Gain (dBi):	Not Applicable	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	48.9
Channel Frequency (MHz):	5825.00	Data Rate:	6.50 MBit/s
Power Setting:	18.5	Tested By:	JMH

Test Measurement Results

5770.00 - 6000.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#2	5850.46	52.59	3.24	34.96	90.79	Max Peak	Vertical	193	78	121.8	-31.0	Pass
#3	5921.30	24.15	3.16	35.11	62.42	Max Peak	Vertical	193	78	68.2	-5.8	Pass
#1	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--


Test Notes: EUT Connected to laptop outside chamber via Ethernet.

APPENDIX - GRAPHICAL IMAGES

A.1. Radiated

A.1.1. TX Spurious & Restricted Band Emissions

A.1.1.1. Antenna SAA Calculated

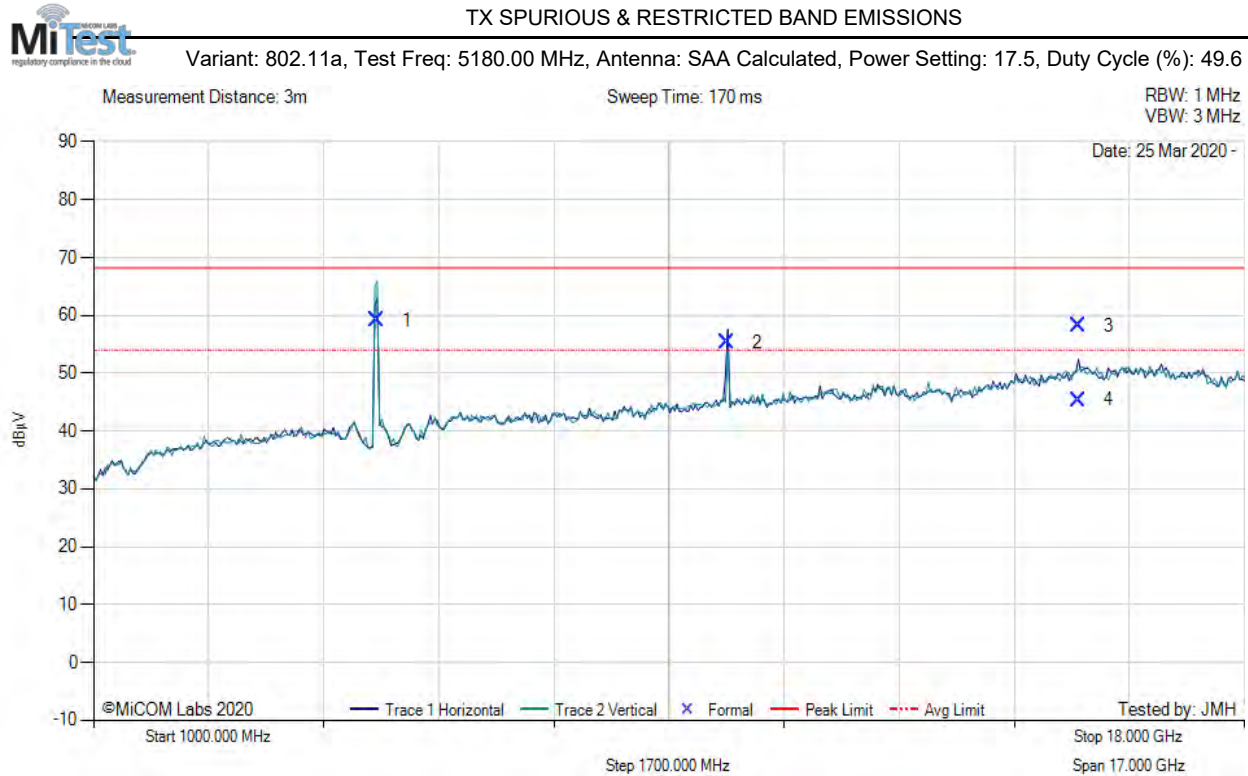

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5180.74	68.37	2.99	-12.15	59.21	Fundamental	Vertical	151	0	--	--	
2	10360.08	56.39	4.38	-5.42	55.35	Peak (NRB)	Horizontal	151	161	--	--	Pass
3	15542.08	56.72	5.44	-3.93	58.23	Max Peak	Horizontal	123	257	68.2	-10.0	Pass
4	15542.08	40.78	5.44	-3.93	45.34	Max Avg	Horizontal	123	257	54.0	-8.7	Pass


Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.05 added to average measurement

[back to matrix](#)



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5200.00 MHz, Antenna: SAA Calculated, Power Setting: 16.5, Duty Cycle (%): 49.6

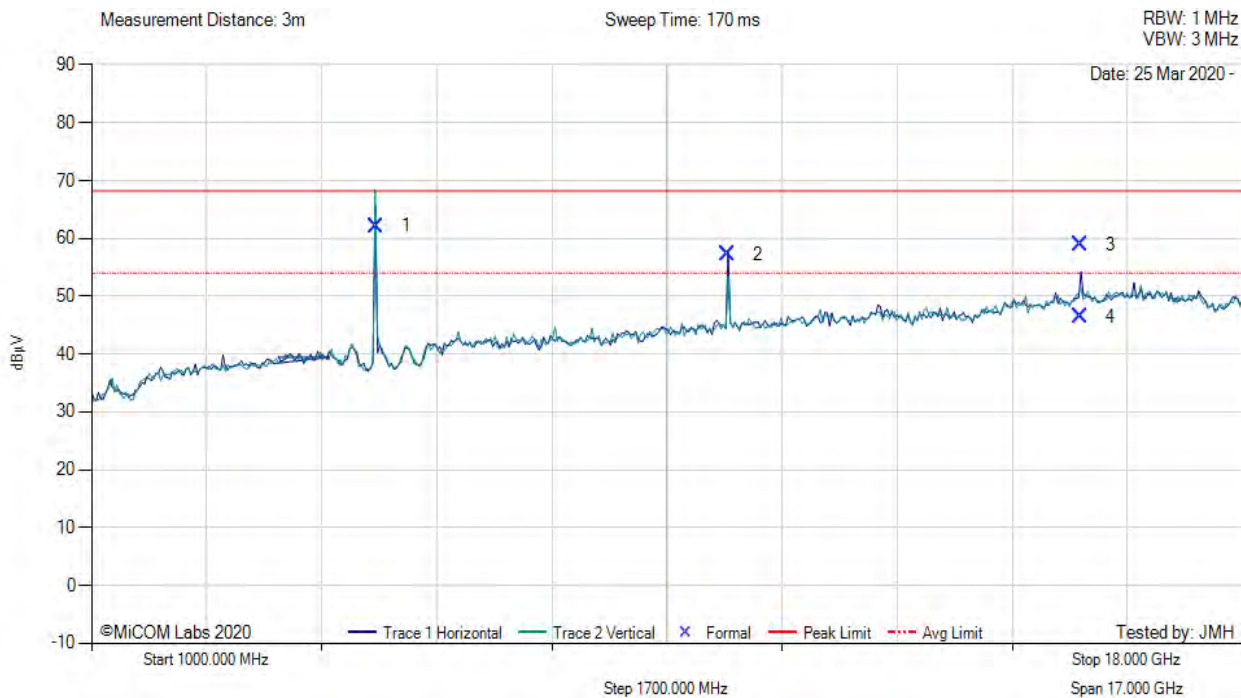

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5200.80	71.60	3.00	-12.43	62.17	Fundamental	Vertical	151	0	--	--	
2	10396.35	58.13	4.43	-5.30	57.26	Peak (NRB)	Horizontal	151	107	--	--	Pass
3	15598.65	56.97	5.58	-3.66	58.89	Max Peak	Horizontal	150	246	68.2	-9.3	Pass
4	15598.65	41.46	5.58	-3.66	46.43	Max Avg	Horizontal	150	246	54.0	-7.6	Pass


Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.05 added to average measurement

[back to matrix](#)



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5240.00 MHz, Antenna: SAA Calculated, Power Setting: 16.5, Duty Cycle (%): 49.6

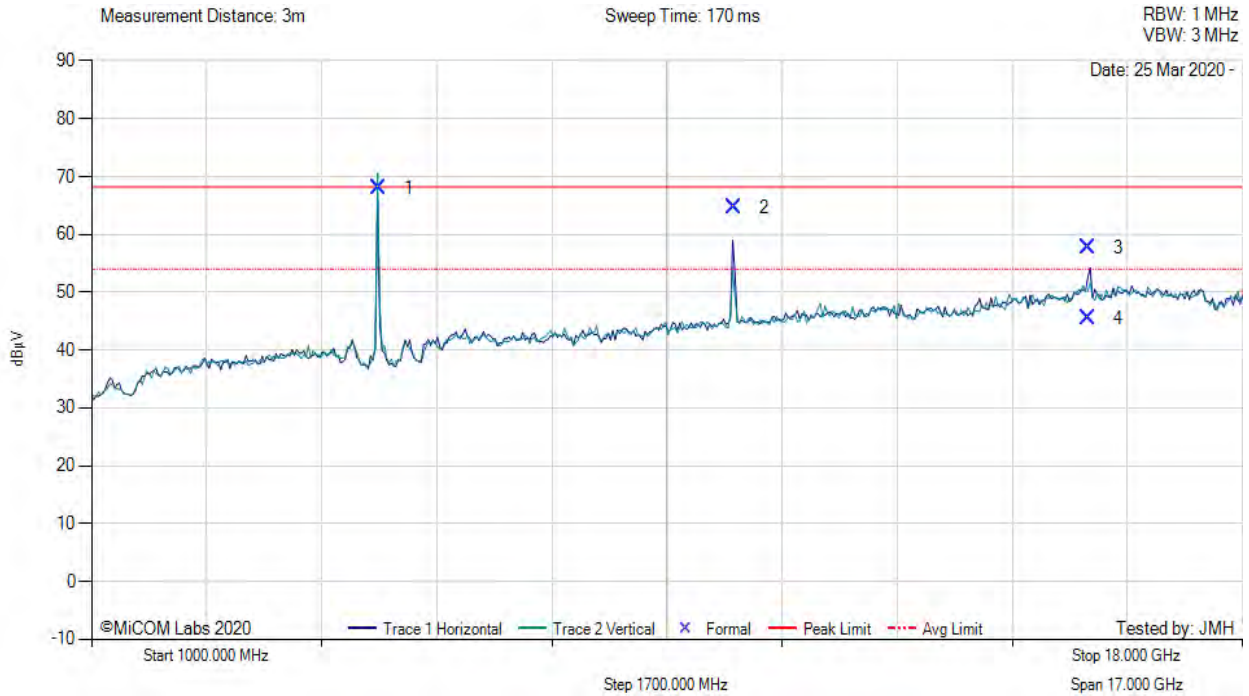

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5241.15	77.04	3.01	-12.06	67.99	Fundamental	Vertical	100	0	--	--	
2	10482.56	65.41	4.39	-5.12	64.68	Max Peak*	Horizontal	151	221	68.2	-3.6	Pass
3	15724.79	54.92	5.76	-3.01	57.67	Max Peak	Horizontal	127	165	68.2	-10.6	Pass
4	15724.79	39.65	5.76	-3.01	45.45	Max Avg	Horizontal	127	165	54.0	-8.6	Pass


Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.05 added to average measurement. *Non-Restricted Band Peak Limit is 68.23

[back to matrix](#)



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5260.00 MHz, Antenna: SAA Calculated, Power Setting: 17.5, Duty Cycle (%): 49.8

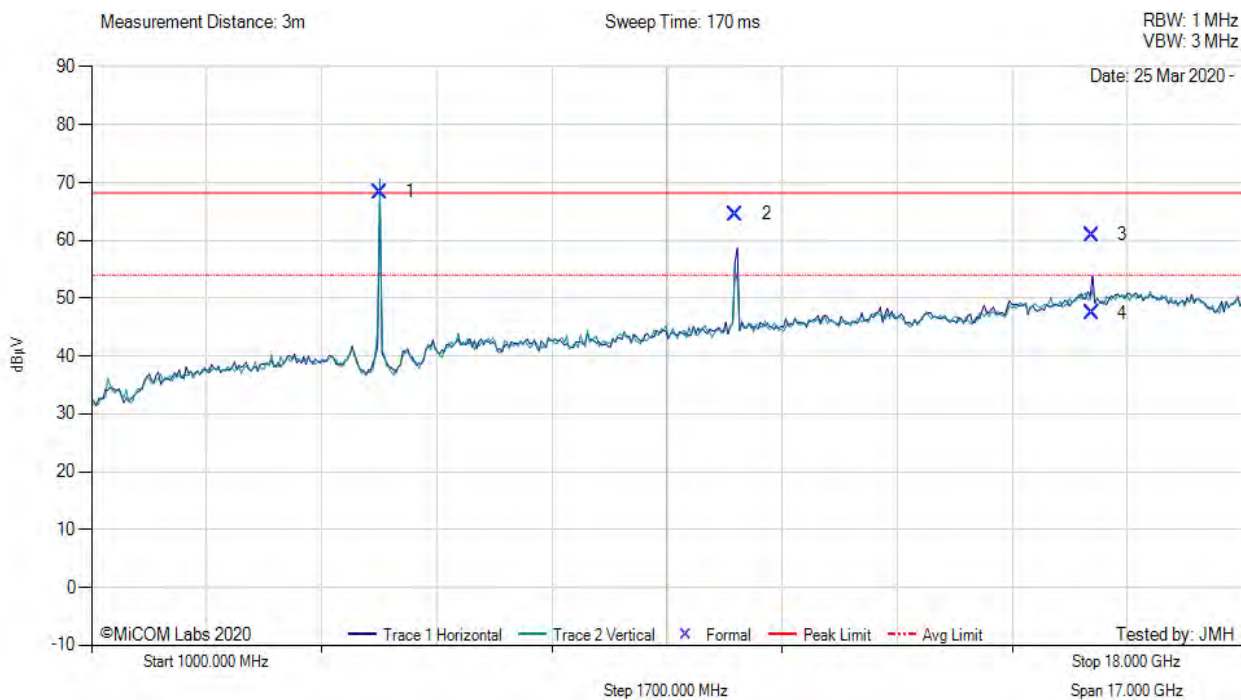

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5256.81	77.64	2.95	-12.20	68.39	Fundamental	Vertical	151	20	--	--	
2	10518.48	65.16	4.45	-5.09	64.52	Max Peak*	Horizontal	151	230	68.2	-3.7	Pass
3	15781.80	58.12	5.62	-2.76	60.98	Max Peak	Horizontal	139	222	68.2	-7.3	Pass
4	15781.80	41.52	5.62	-2.76	47.41	Max Avg	Horizontal	139	222	54.0	-6.6	Pass


Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.03 added to average measurement. *Non-Restricted Band Peak Limit is 68.23

[back to matrix](#)



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5300.00 MHz, Antenna: SAA Calculated, Power Setting: 17.5, Duty Cycle (%): 49.8

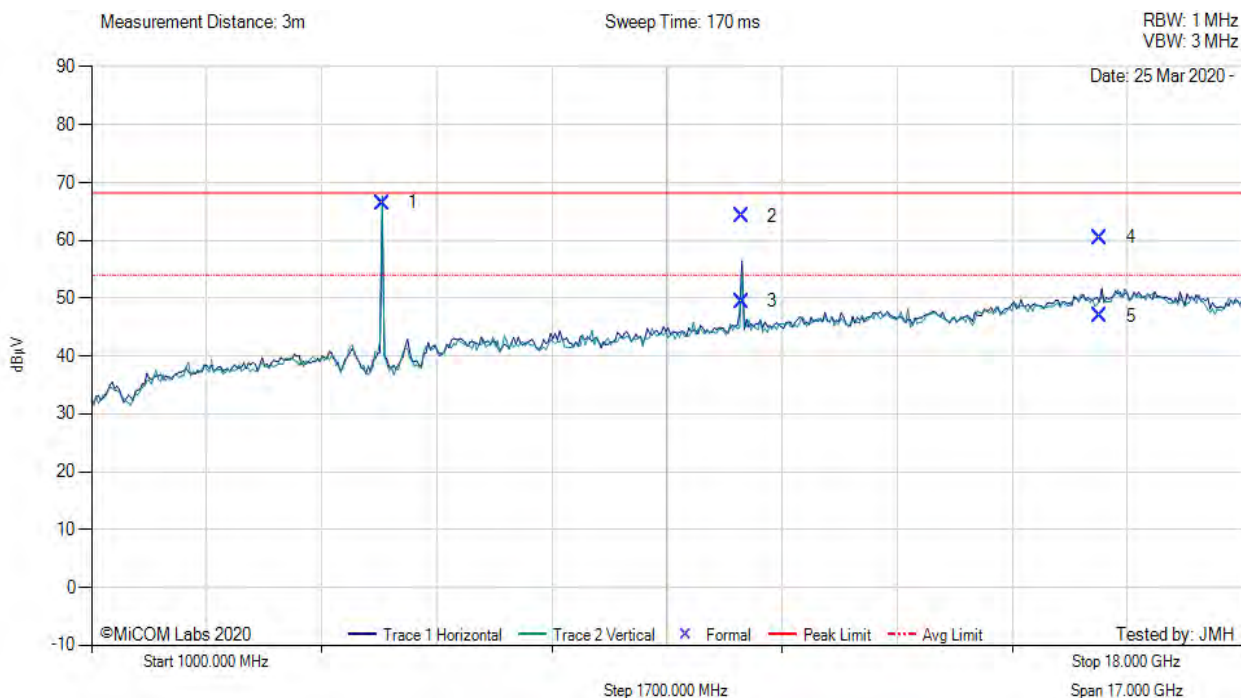

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5305.11	76.20	2.66	-12.09	66.46	Fundamental	Vertical	100	109	--	--	
2	10600.45	64.51	4.57	-4.92	64.16	Max Peak	Horizontal	148	232	68.2	-4.1	Pass
3	10600.45	46.80	4.57	-4.92	49.48	Max Avg	Horizontal	148	232	54.0	-4.5	Pass
4	15901.85	57.30	5.70	-2.56	60.44	Max Peak	Horizontal	180	229	68.2	-7.8	Pass
5	15901.85	40.72	5.70	-2.56	46.89	Max Avg	Horizontal	180	229	54.0	-7.1	Pass


Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.03 added to average measurement

[back to matrix](#)



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5320.00 MHz, Antenna: SAA Calculated, Power Setting: 17, Duty Cycle (%): 49.8

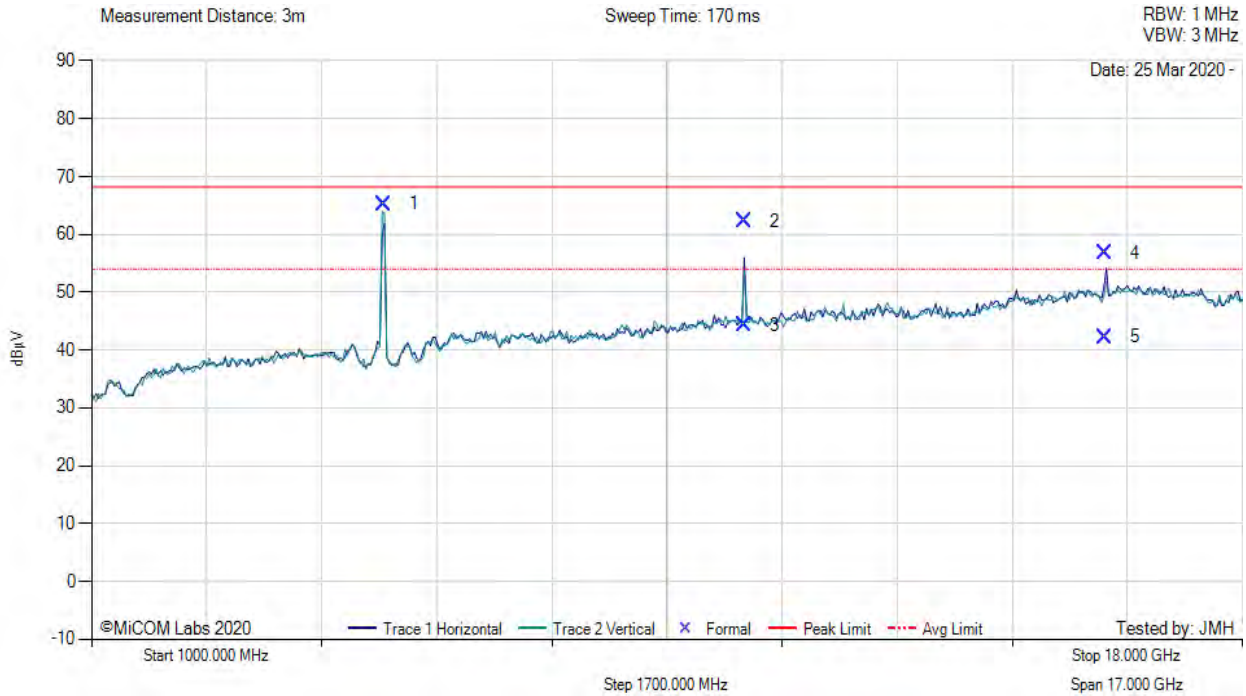

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5317.11	74.31	2.97	-12.02	65.26	Fundamental	Vertical	100	109	--	--	
2	10640.34	62.43	4.44	-4.57	62.30	Max Peak	Horizontal	169	230	68.2	-5.9	Pass
3	10640.34	44.43	4.44	-4.57	44.30	Max Avg	Horizontal	169	230	54.0	-9.7	Pass
4	15963.68	53.59	5.56	-2.35	56.80	Max Peak	Horizontal	101	214	68.2	-11.4	Pass
5	15963.68	39.09	5.56	-2.35	42.30	Max Avg	Horizontal	101	214	54.0	-11.7	Pass


Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.03 added to average measurement

[back to matrix](#)



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5500.00 MHz, Antenna: SAA Calculated, Power Setting: 17, Duty Cycle (%): 50.1

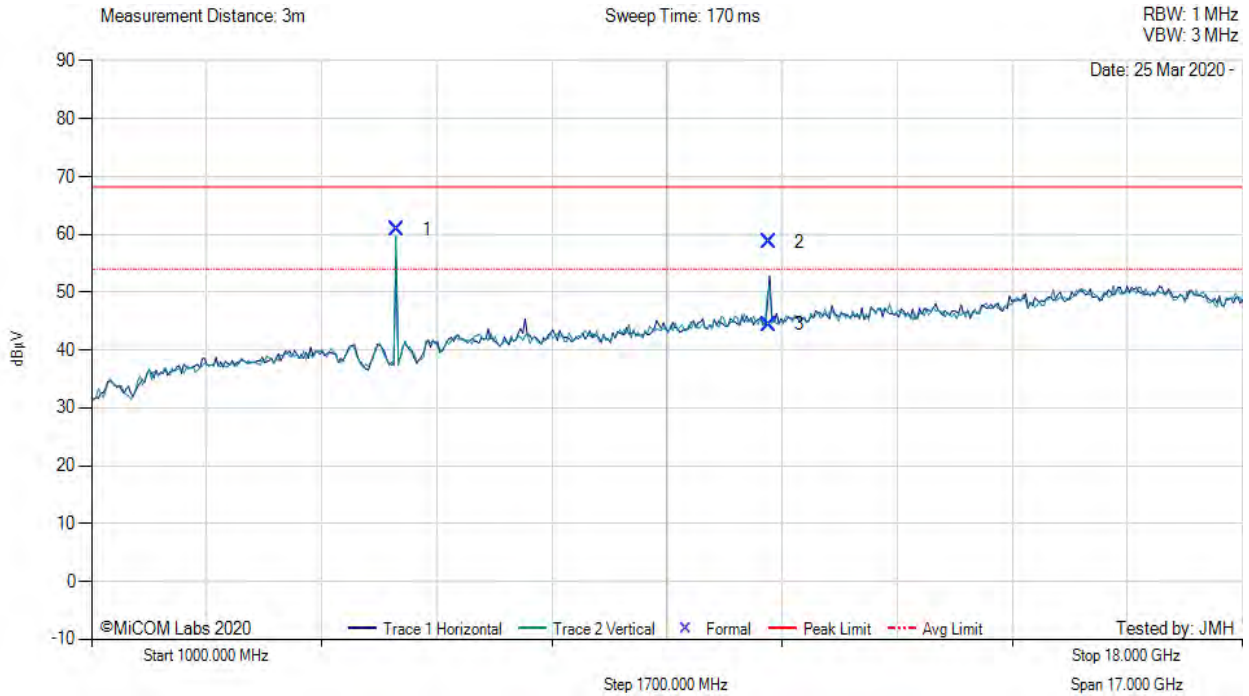

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5501.90	69.45	3.05	-11.64	60.86	Fundamental	Vertical	151	217	--	--	
2	11000.71	58.75	4.60	-4.70	58.65	Max Peak	Horizontal	156	227	68.2	-9.6	Pass
3	11000.71	41.53	4.60	-4.70	44.43	Max Avg	Horizontal	156	227	54.0	-9.6	Pass


Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.00 added to average measurement

[back to matrix](#)



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5580.00 MHz, Antenna: SAA Calculated, Power Setting: 17, Duty Cycle (%): 50.1

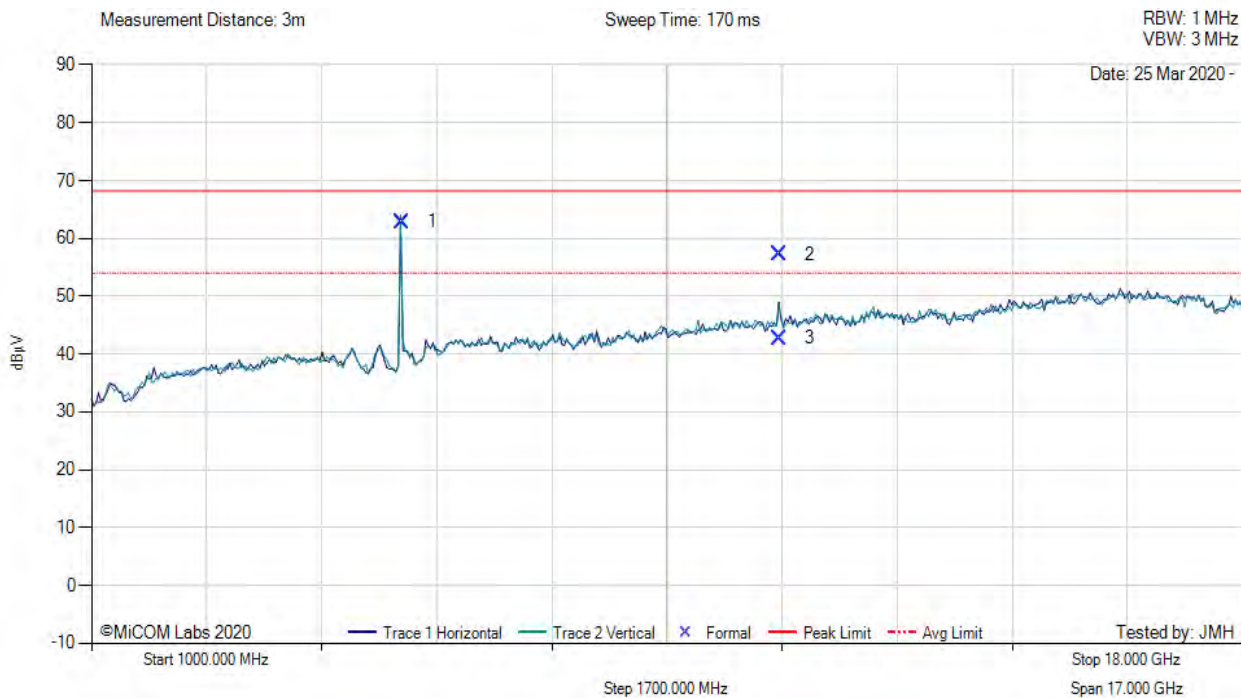

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5584.47	71.25	3.12	-11.55	62.82	Fundamental	Vertical	151	0	--	--	
2	11156.20	57.74	4.58	-5.05	57.27	Max Peak	Horizontal	150	302	68.2	-11.0	Pass
3	11156.20	40.18	4.58	-5.05	42.71	Max Avg	Horizontal	150	302	54.0	-11.3	Pass


Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.00 added to average measurement

[back to matrix](#)



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5700.00 MHz, Antenna: SAA Calculated, Power Setting: 17.5, Duty Cycle (%): 50.1

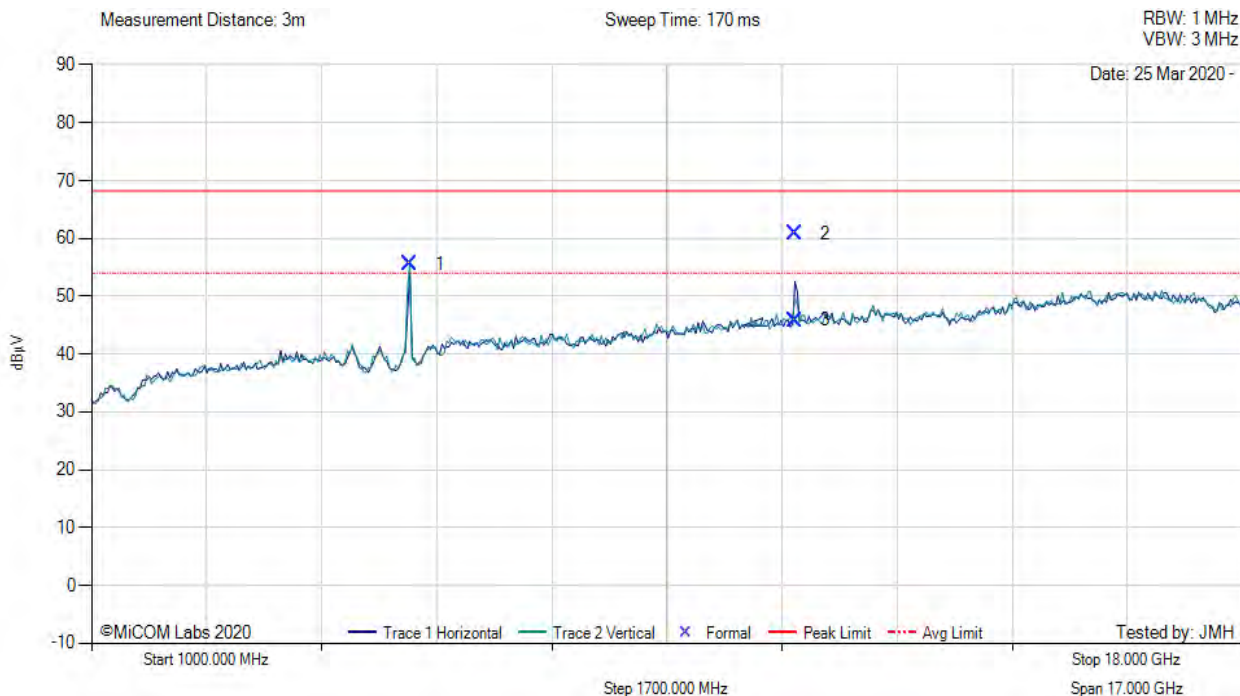

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5700.91	63.68	3.19	-11.35	55.52	Fundamental	Vertical	151	272	--	--	
2	11394.27	61.86	4.54	-5.64	60.76	Max Peak	Horizontal	156	317	68.2	-7.5	Pass
3	11394.27	43.98	4.54	-5.64	45.88	Max Avg	Horizontal	156	317	54.0	-8.1	Pass


Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.00 added to average measurement

[back to matrix](#)



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: SAA Calculated, Power Setting: 18.5, Duty Cycle (%): 49.2

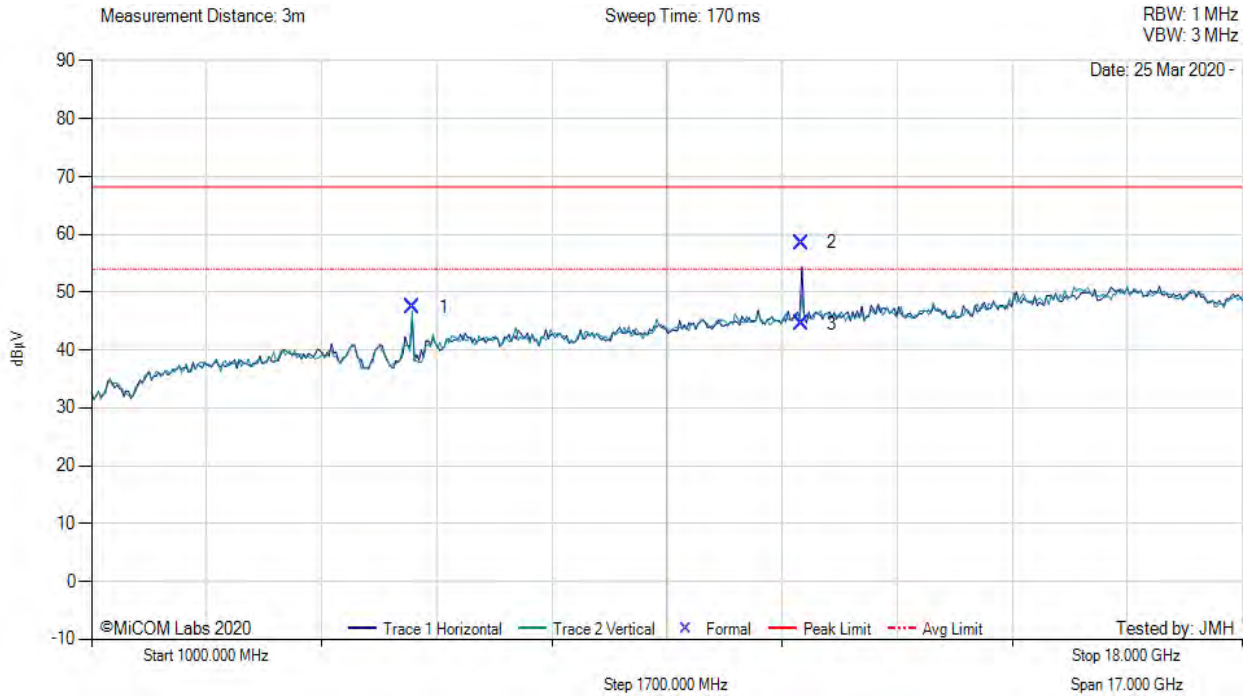

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5747.54	55.27	3.21	-11.03	47.45	Fundamental	Vertical	151	0	--	--	
2	11490.27	59.43	4.75	-5.61	58.57	Max Peak	Horizontal	106	214	68.2	-9.7	Pass
3	11490.27	42.32	4.75	-5.61	44.54	Max Avg	Horizontal	106	214	54.0	-12.5	Pass


Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.08 added to average measurement.

[back to matrix](#)



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5785.00 MHz, Antenna: SAA Calculated, Power Setting: 18.5, Duty Cycle (%): 49.2

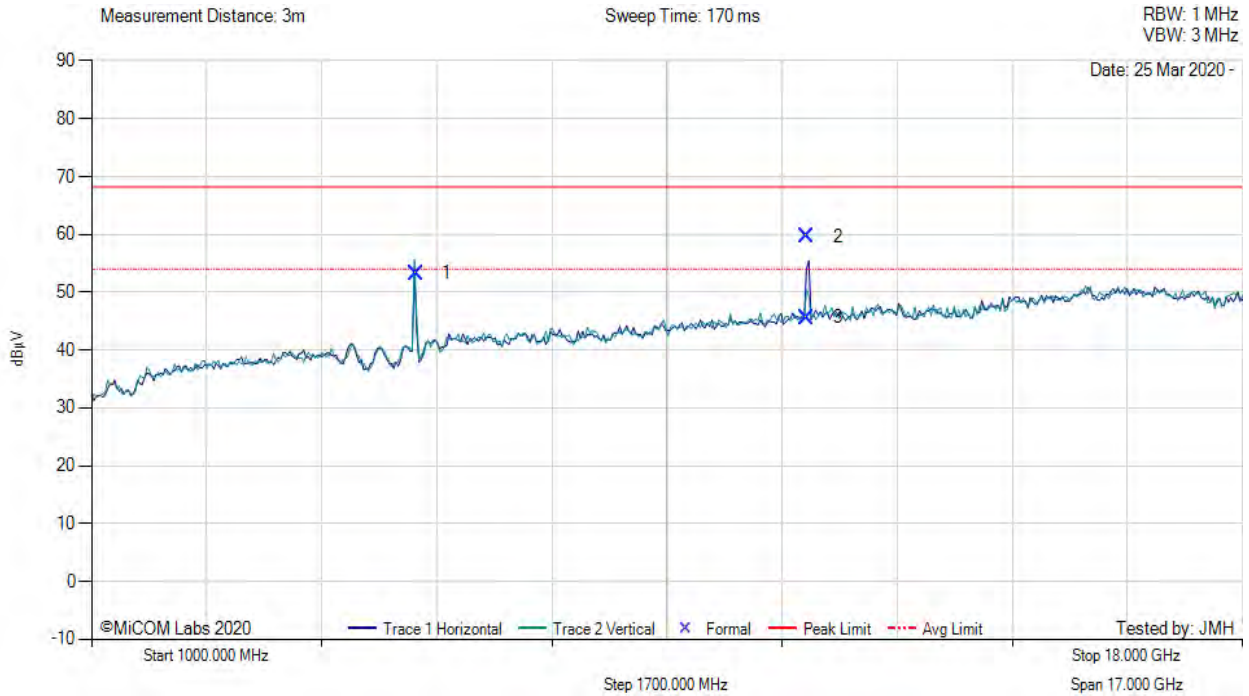

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5788.99	61.04	3.14	-10.90	53.28	Fundamental	Vertical	100	34	--	--	
2	11571.55	60.75	4.39	-5.55	59.59	Max Peak	Horizontal	153	237	68.2	-8.6	Pass
3	11571.55	43.69	4.39	-5.55	45.61	Max Avg	Horizontal	153	237	54.0	-18.4	Pass


Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.08 added to average measurement

[back to matrix](#)



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: SAA Calculated, Power Setting: 18.5, Duty Cycle (%): 49.2

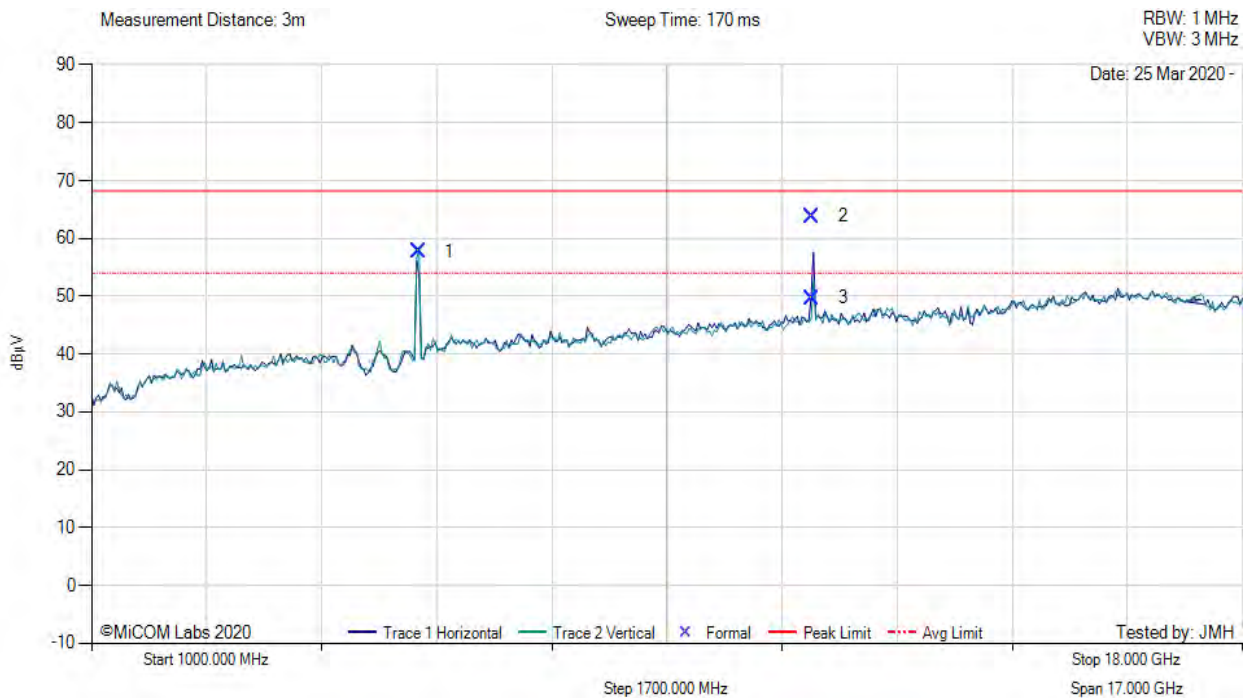

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5827.70	65.38	3.14	-10.85	57.67	Fundamental	Vertical	151	0	--	--	
2	11649.84	64.57	4.92	-5.69	63.80	Max Peak	Horizontal	151	302	68.2	-4.4	Pass
3	11649.84	47.36	4.92	-5.69	49.67	Max Avg	Horizontal	151	302	54.0	-4.3	Pass

Test Notes: EUT Connected to laptop outside chamber via Ethernet. 5G Notch in front of amp to prevent overload. DC Correction of 3.08 added to average measurement

[back to matrix](#)


A.1.2. Restricted Edge & Band-Edge Emissions

A.1.2.2. SAA Calculated



RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: SAA Calculated, Power Setting: 17, Duty Cycle (%): 49.6

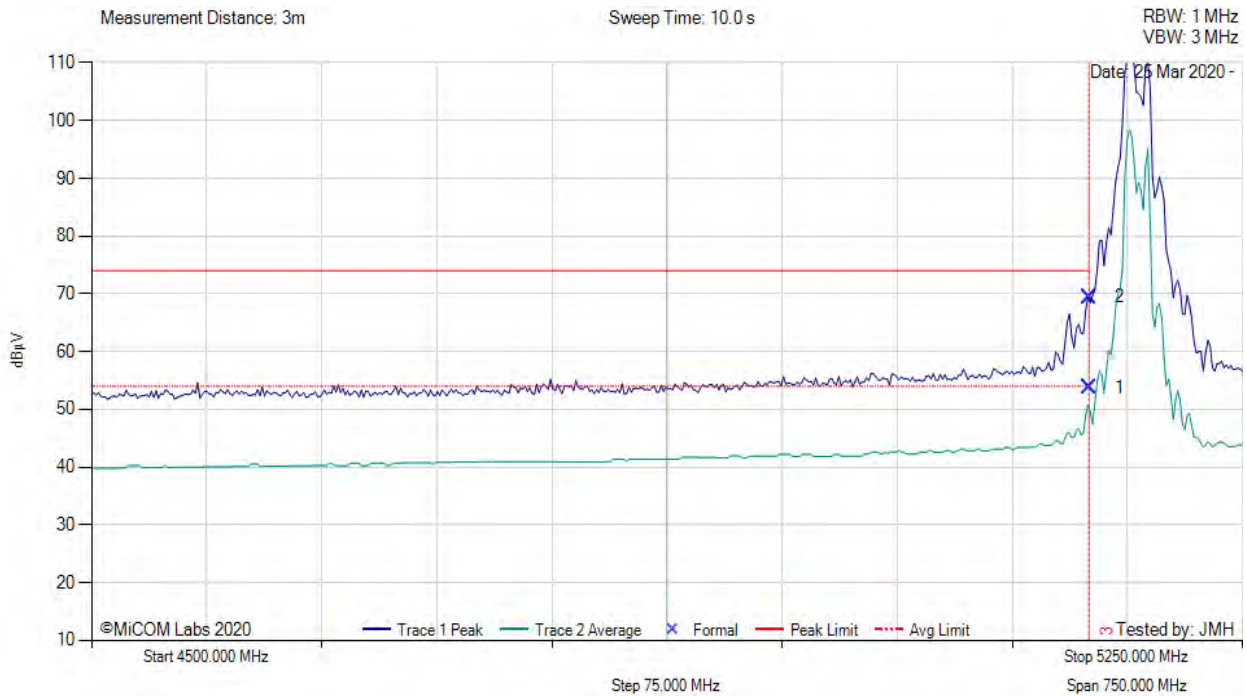

4500.00 - 5250.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5150.00	13.64	2.93	34.21	53.83	Max Avg	Vertical	162	265	54.0	-0.2	Pass
2	5150.00	32.35	2.93	34.21	69.49	Max Peak	Vertical	162	265	74.0	-4.5	Pass
3	5150.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--


Test Notes: EUT Connected to laptop outside chamber via Ethernet. Average Measurement includes DC correction of 3.05

[back to matrix](#)

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5180.00 MHz, Antenna: SAA Calculated, Power Setting: 17, Duty Cycle (%): 49.6

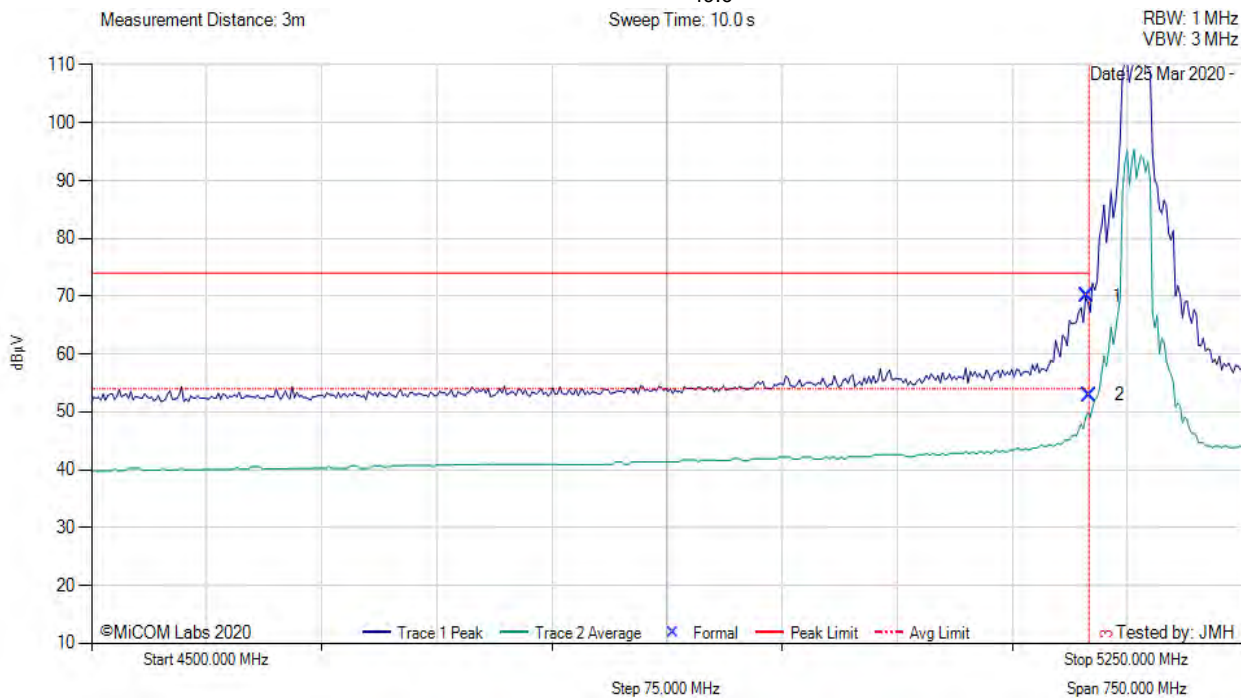

4500.00 - 5250.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5148.50	32.85	2.91	34.21	69.97	Max Peak	Vertical	162	265	74.0	-4.0	Pass
2	5150.00	12.69	2.93	34.21	52.88	Max Avg	Vertical	162	265	54.0	-1.1	Pass
3	5150.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--


Test Notes: EUT Connected to laptop outside chamber via Ethernet. Average Measurement includes DC correction of 3.05

[back to matrix](#)



RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 802.11a, Test Freq: 5500.00 MHz, Antenna: SAA Calculated, Power Setting: 17.0, Duty Cycle (%): 49.6

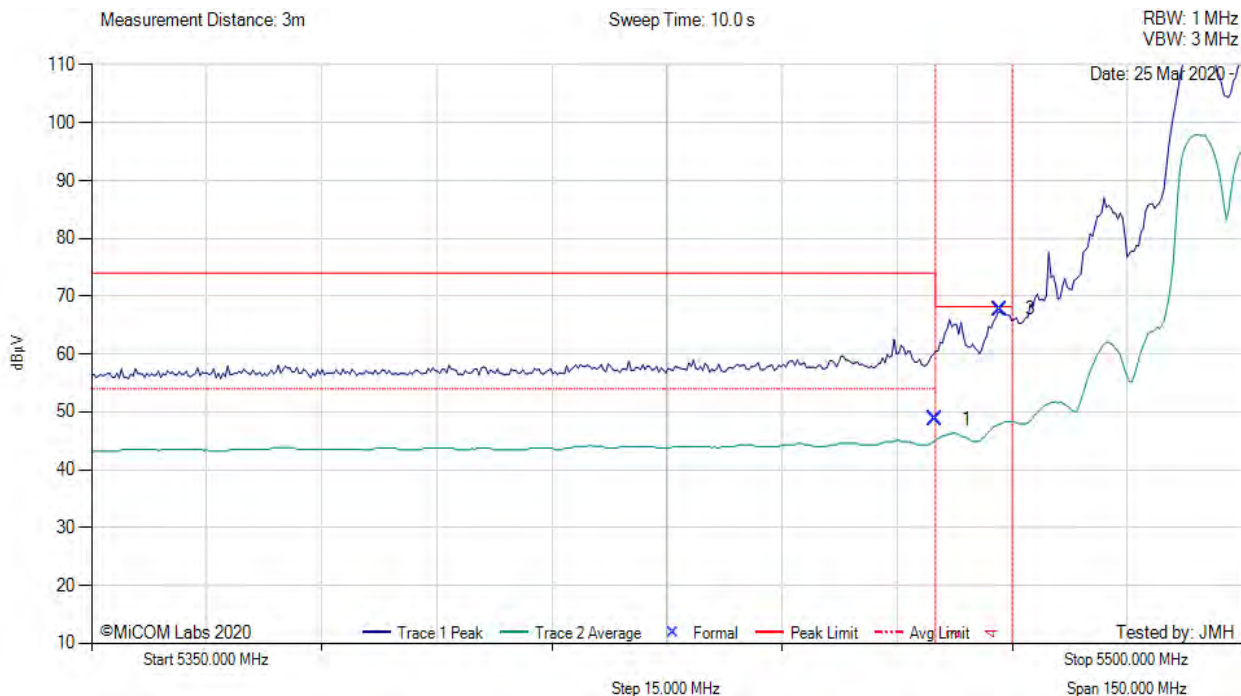

5350.00 - 5500.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5460.00	7.60	3.06	34.53	48.69	Max Avg	Vertical	157	80	54.0	-5.3	Pass
3	5468.42	29.71	3.07	34.55	67.78	Max Peak	Vertical	157	80	68.2	-0.4	Pass
2	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
4	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--


Test Notes: EUT Connected to laptop outside chamber via Ethernet. Average Measurement includes DC correction of 3.05

[back to matrix](#)

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5500.00 MHz, Antenna: SAA Calculated, Power Setting: 17, Duty Cycle (%): 49.6

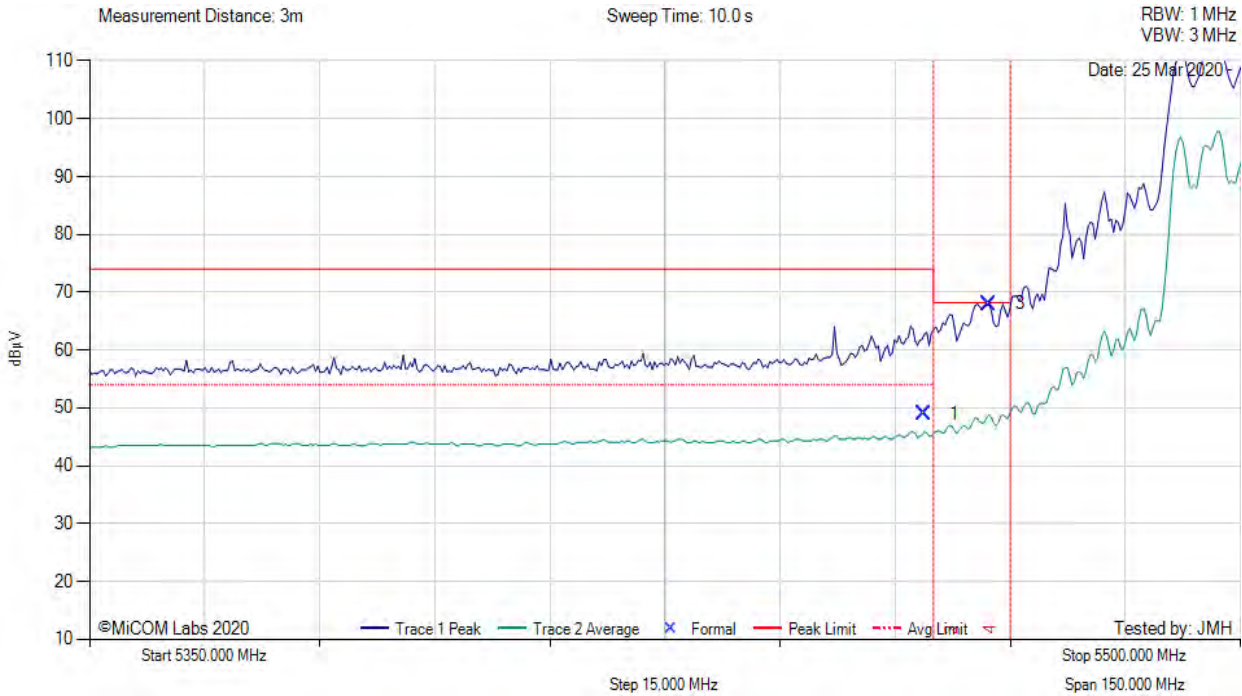

5350.00 - 5500.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5458.80	8.29	3.06	34.52	48.92	Max Avg	Vertical	157	80	54.0	-5.1	Pass
3	5467.29	30.36	3.08	34.55	67.99	Max Peak	Vertical	157	80	68.2	-0.2	Pass
2	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
4	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--


Test Notes: EUT Connected to laptop outside chamber via Ethernet. Average Measurement includes DC correction of 3.05

[back to matrix](#)



RESTRICTED UPPER BAND-EDGE EMISSIONS

Variant: 802.11a, Test Freq: 5320.00 MHz, Antenna: SAA Calculated, Power Setting: 17, Duty Cycle (%): 49.8

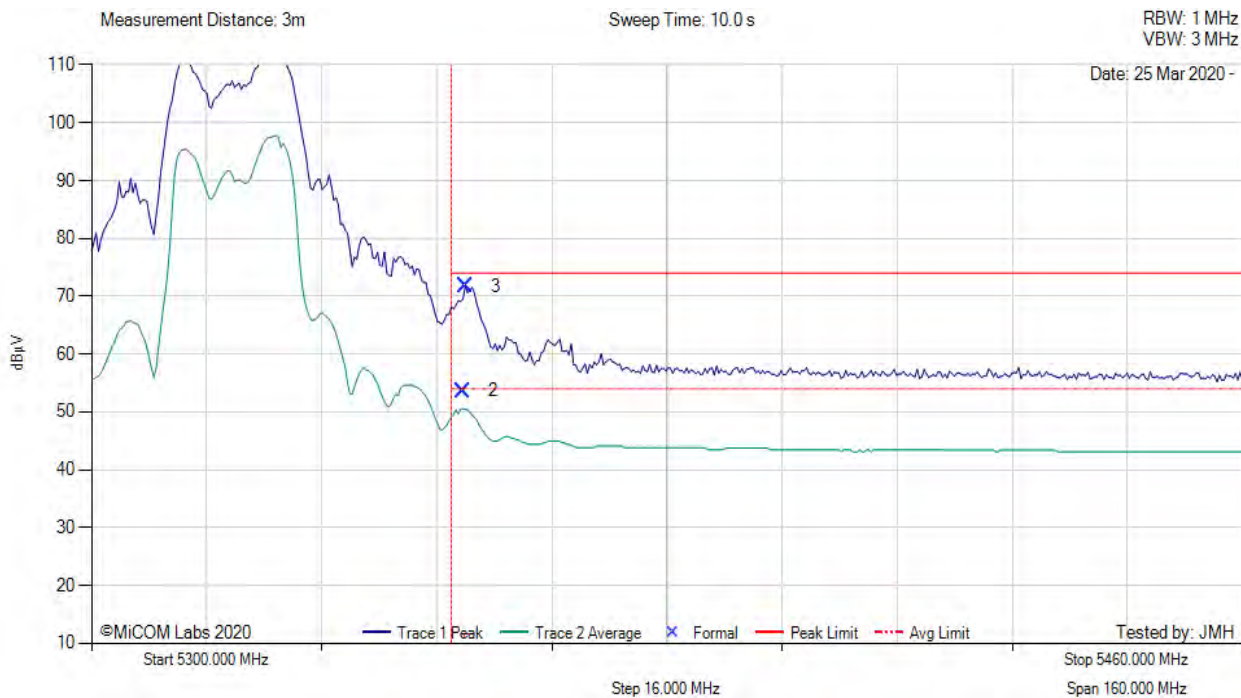

5300.00 - 5460.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
2	5351.62	13.06	3.06	34.46	53.61	Max Avg	Vertical	154	40	54.0	-0.4	Pass
3	5351.92	34.17	3.06	34.46	71.69	Max Peak	Vertical	154	40	74.0	-2.3	Pass
1	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--


Test Notes: EUT Connected to laptop outside chamber via Ethernet. Average Measurement includes DC correction of 3.03

[back to matrix](#)

RESTRICTED UPPER BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5320.00 MHz, Antenna: SAA Calculated, Power Setting: 16.5, Duty Cycle (%): 49.5

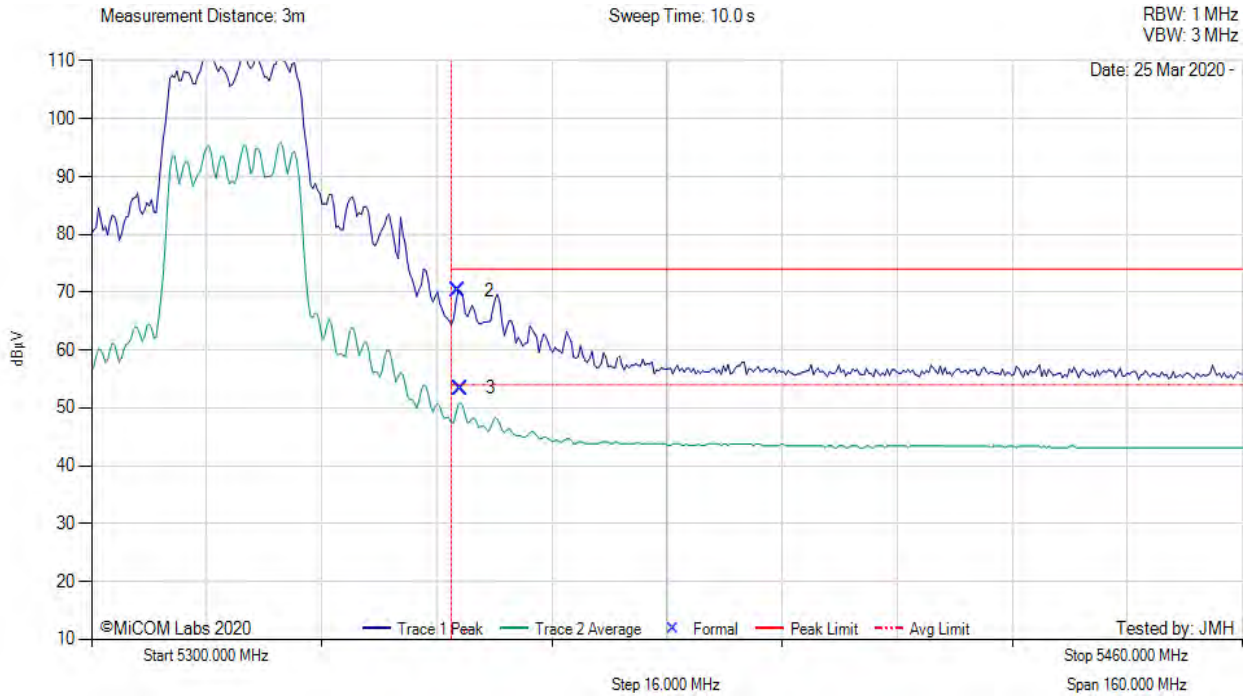

5300.00 - 5460.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
2	5350.98	32.84	3.06	34.46	70.36	Max Peak	Vertical	154	40	74.0	-3.6	Pass
3	5351.28	12.83	3.06	34.46	53.38	Max Avg	Vertical	154	40	54.0	-0.6	Pass
1	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--


Test Notes: EUT Connected to laptop outside chamber via Ethernet. Average Measurement includes DC correction of 3.05

[back to matrix](#)



5725 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: SAA Calculated, Power Setting: 18.5, Duty Cycle (%): 49.2

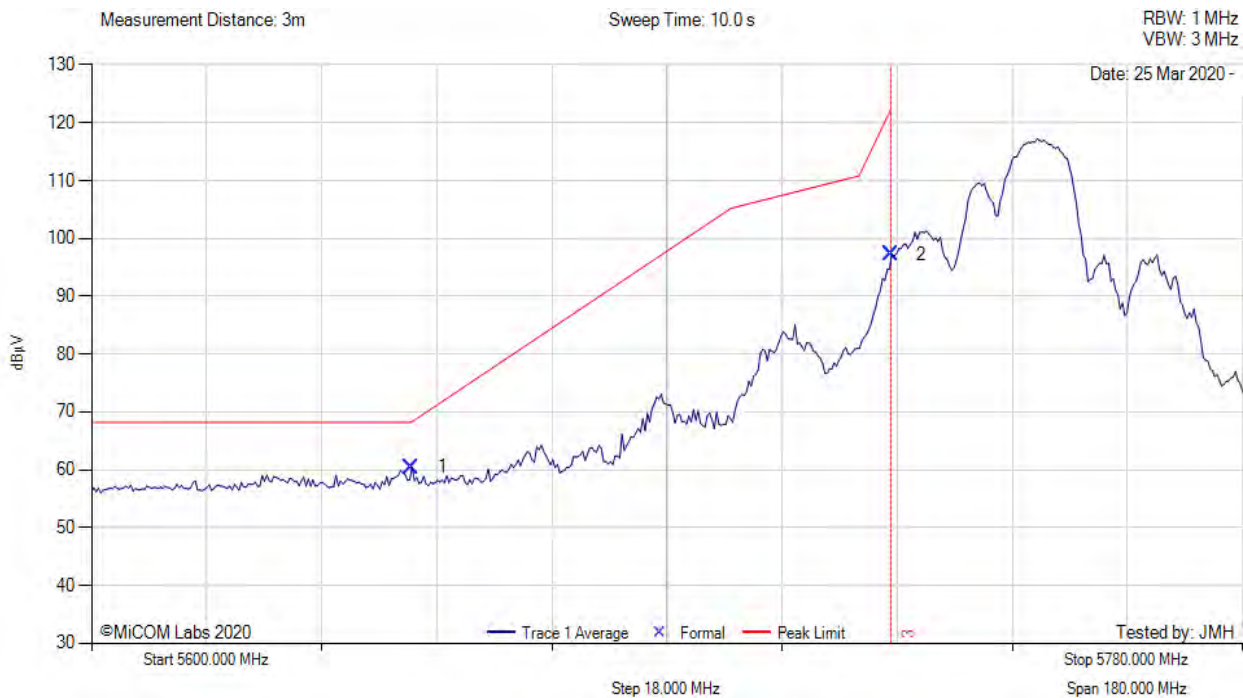

5600.00 - 5780.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5650.07	22.75	3.09	34.63	60.47	Max Peak	Vertical	193	78	68.2	-7.8	Pass
2	5725.00	59.29	3.19	34.72	97.20	Max Peak	Vertical	193	78	122.2	-25.0	Pass
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--


Test Notes: EUT Connected to laptop outside chamber via Ethernet.

[back to matrix](#)

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5745.00 MHz, Antenna: SAA Calculated, Power Setting: 18.5, Duty Cycle (%): 48.9

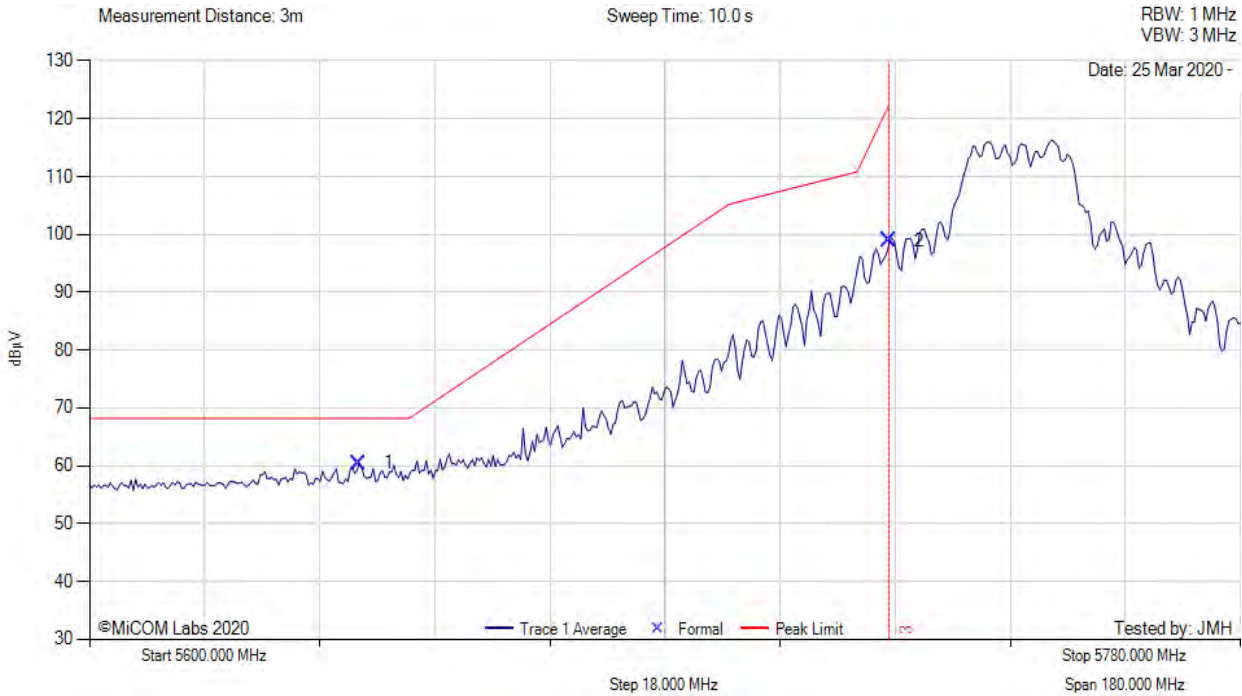

5600.00 - 5780.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5642.13	22.74	3.09	34.64	60.47	Max Peak	Vertical	193	78	68.2	-7.8	Pass
2	5725.00	60.98	3.19	34.72	98.89	Max Peak	Vertical	193	78	122.2	-23.3	Pass
3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--


Test Notes: EUT Connected to laptop outside chamber via Ethernet.

[back to matrix](#)



5850 MHz RADIATED BAND-EDGE EMISSIONS

Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: SAA Calculated, Power Setting: 18.5, Duty Cycle (%): 49.2

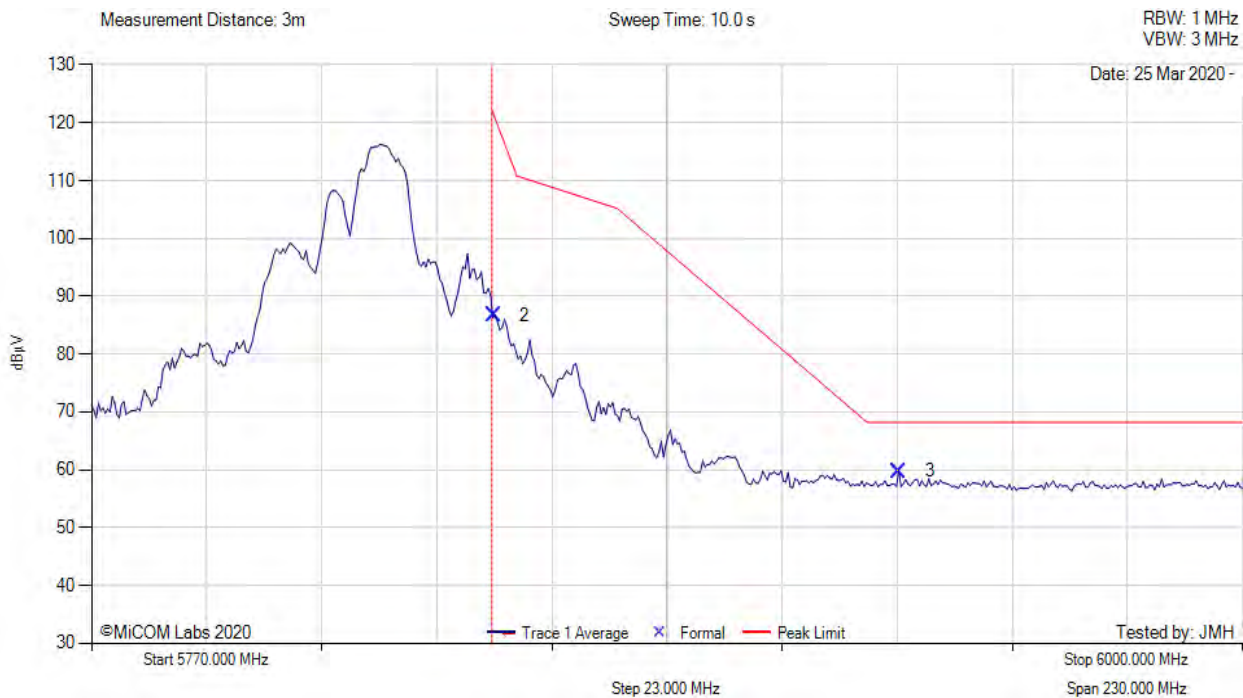

5770.00 - 6000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
2	5850.46	48.46	3.24	34.96	86.66	Max Peak	Vertical	193	78	121.8	-35.1	Pass
3	5931.44	21.47	3.20	35.11	59.78	Max Peak	Vertical	193	78	68.2	-8.5	Pass
1	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--


Test Notes: EUT Connected to laptop outside chamber via Ethernet.

[back to matrix](#)

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5825.00 MHz, Antenna: SAA Calculated, Power Setting: 18.5, Duty Cycle (%): 48.9

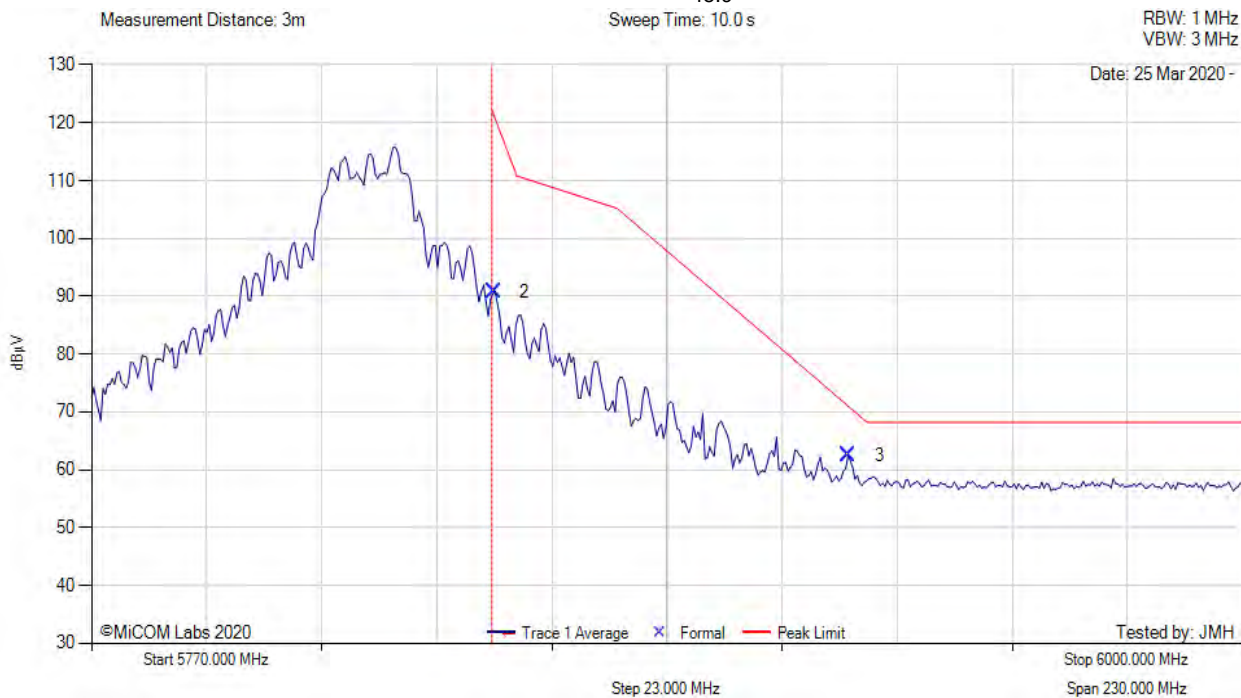

5770.00 - 6000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
2	5850.46	52.59	3.24	34.96	90.79	Max Peak	Vertical	193	78	121.8	-31.0	Pass
3	5921.30	24.15	3.16	35.11	62.42	Max Peak	Vertical	193	78	68.2	-5.8	Pass
1	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT Connected to laptop outside chamber via Ethernet.

[back to matrix](#)



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com