

Product Specification

Flavus 2.4 GHz Snap-In Antenna



Table of content

1. Features	2
2. Description	2
3. Application	2
4. Model name	3
5. General data	3
6. Electrical characteristics	3
7. Electrical performance	4
7.1 Voltage Standing Wave Ratio	4
7.2 3D-Radiation	4
7.3 Radiation patterns	4
8. Antenna Dimensions	5
9. Antenna Foot print	5
10. Electrical interface	6
10.1 Transmission line and matching	6
10.2 Test board dimensions	6
10.3 Test board matching	6
11. Reliability	7
11.1 Temperature and Humidity	7
11.2 Mechanical	7
11.3 Miscellaneous	7
11.4 Judgement standard	7
12. Hazardous Material Regulation Conformance	7
13. Application example	8
14. Packaging	9
14.1 Shelf storage recommendation	9
14.2 Packaging characteristics	9
14.3 Tray dimension	9
14.4 Box dimension	9
14.5 Label information	9
15. Contact information	9

1. FEATURES

- Designed for 2.4 GHz applications [Bluetooth™, WiFi™ (802.11b/g), Zigbee™, WiMedia™ etc.]
- Intended for Snap-In mounting
- Supplied in trays


2. DESCRIPTION

The Flavus antenna is intended for use with all 2.4 GHz applications. The antenna is a halfwave type and this makes the antenna less sensitive to ground and surrounding components and facilitates easy antenna placement on the PCB. The antenna uses plastic snap ins to attach to the PCB, no need for soldering.

3. APPLICATION

- Industrial applications
- Network nodes
- Access points
- Portable PCs
- Wireless cable modems

4. MODEL NAME

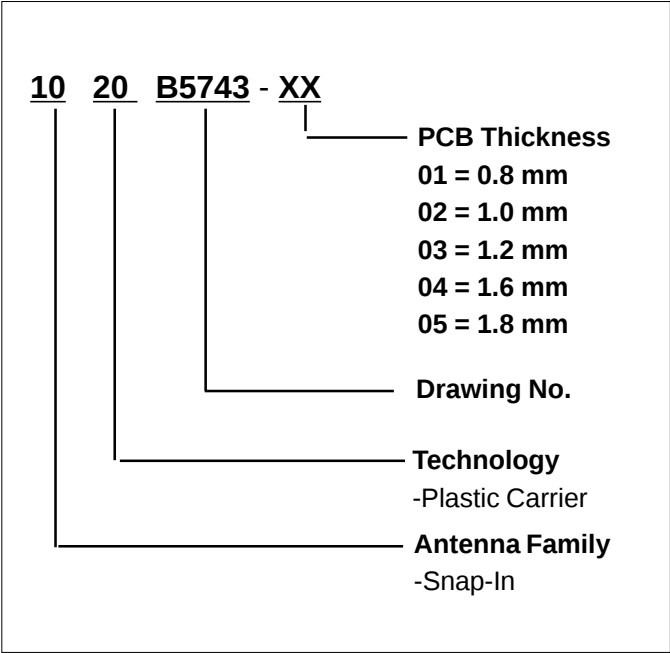

5. GENERAL DATA


Product Name	Flavus 2.4 GHz
Article No.	1020B5743-01..05
Frequency	2.4-2.5 GHz
Polarization	Linear
Operating temperature	-40 to + 85 degC
Impedance	50 Ohm
Weight	0.6 gram
Antenna type	Snap-in

6. ELECTRICAL CHARACTERISTICS


	Characteristics			Conditions*
	Min	Typ	Max	
Peak Gain	3.5 dBi	4.0 dBi	4.3 dBi	Frequency 2.4-2.5 GHz, Measured in 3D chamber (near field)
Efficiency	62%	65%	66%	
VSWR	1.2:1	1.5:1	2.1:1	Frequency 2.4-2.5 GHz, Measured in Network Analyzer
*Note all data provided in this table are based on the gigaAnt reference board				

7. ELECTRICAL PERFORMANCE


7.1 Voltage Standing Wave Ratio

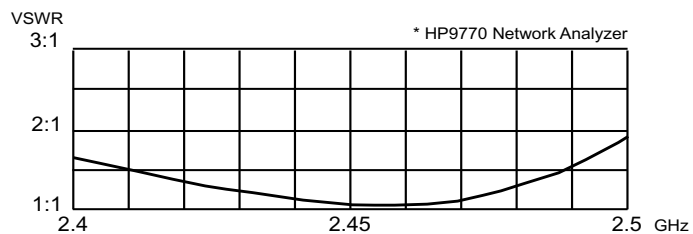


7.2 3D-Radiation

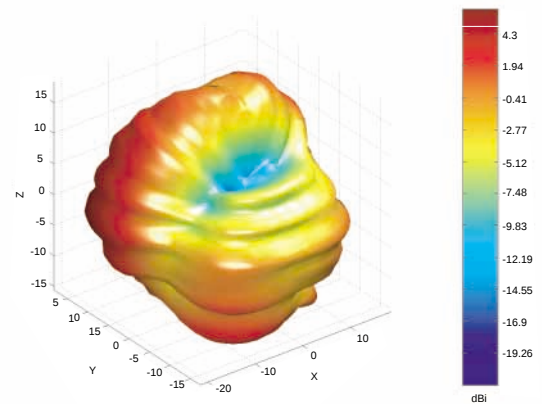


7.3 Radiation patterns



XY- Plane






XZ- Plane




YZ- Plane

Total polarization

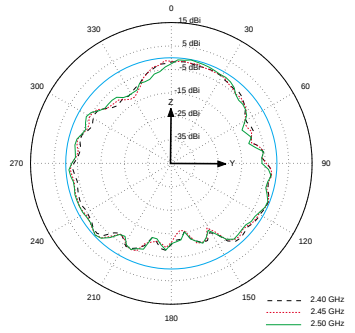


8. ANTENNA DIMENSIONS

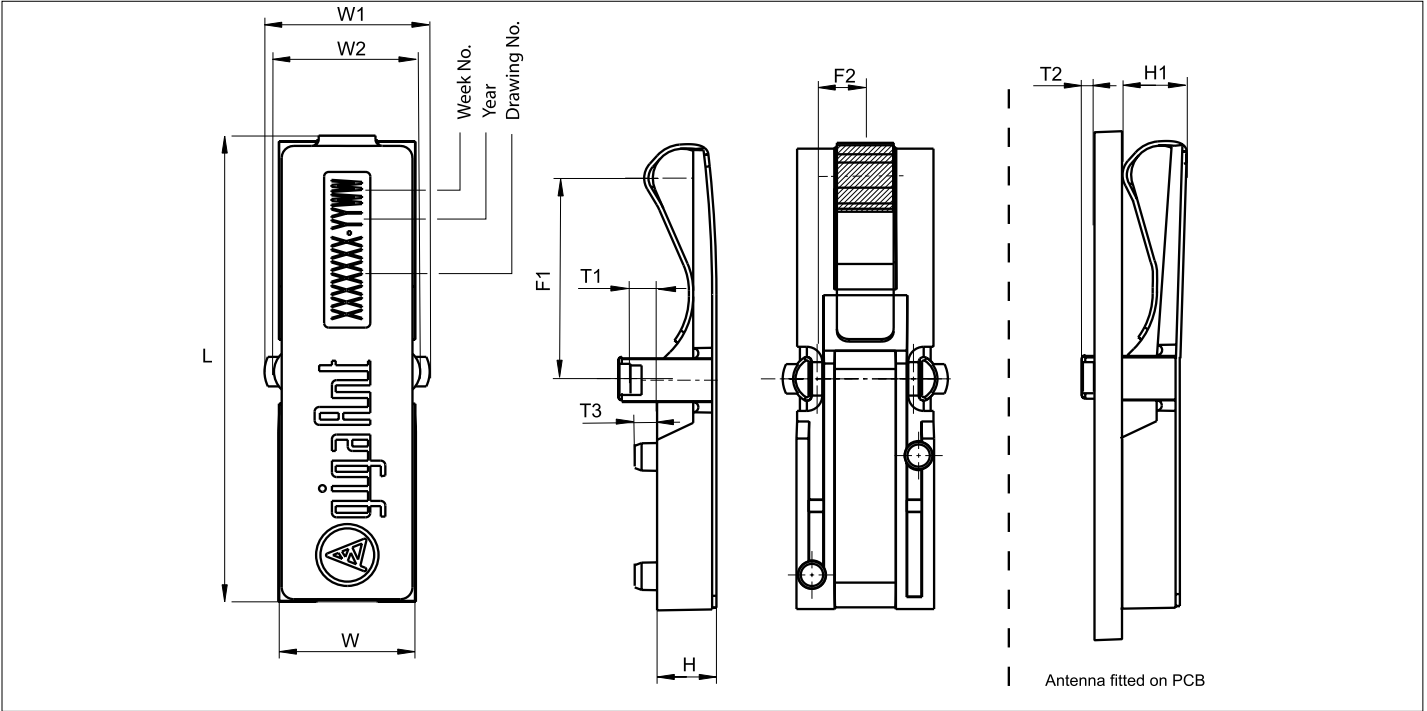

L	W	W1	W2	H	H1	F1	F2	T1	T2	T3
Length	Width	Width	Width	Height	Height	Feed	Feed	PCB		
27.3 ±0.2	7.9 ±0.2	9.6±0.2	8.5±0.2	3.45±0.1	3.85±0.1	11.85±0.2	2.8±0.1	T1±0.05	1.35±0.2	1.3±0.1
Dimensions in millimeter										


9. ANTENNA FOOT PRINT

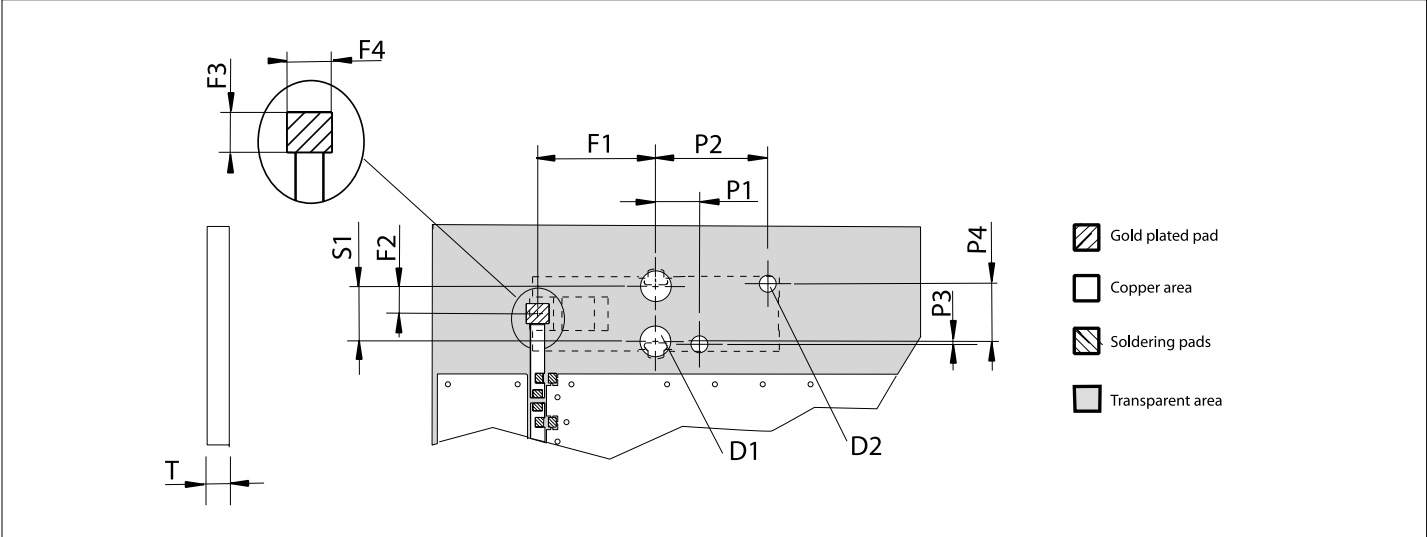


F1	F2	F3	F4	S1	P1	P2	P3	P4	D1	D2	T*
Feed	Feed	Feed	Feed	Snap-In	Position	Position	Position	Position	Diameter	Diameter	PCB
11.85±0.1	2.8±0.1	2±0.05	2.25±0.05	5.6±0.1	4.5±0.1	11.5±0.1	0.3±0.1	5.9±0.1	3.05±0.1	1.75±0.1	0.8, 1.0, 1.2, 1.6, 1.8
Dimensions in millimeter											

10. ELECTRICAL INTERFACE

10.1 Transmission line and matching

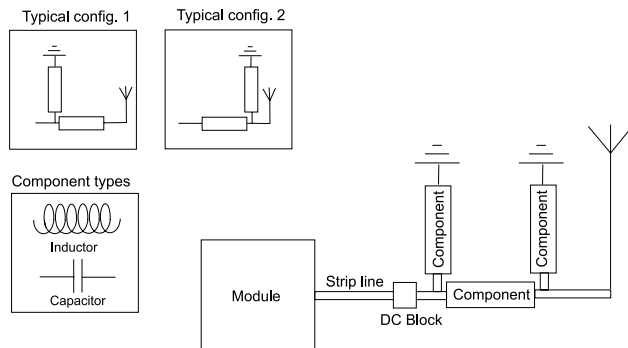

The matching network has to be individually designed using one, two or three components.

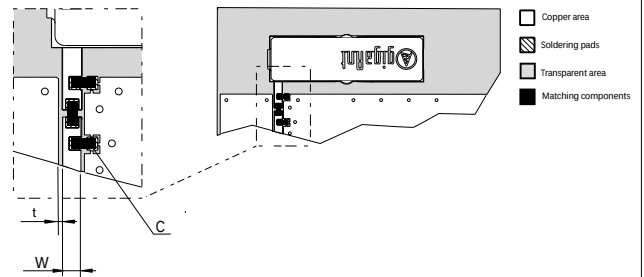


t, w = Unique dimensioning according to your PCB *

C = Inductor and capacitor values according to your specific device*


* gigaAnt provides this service upon request

10.2 Test board dimensions

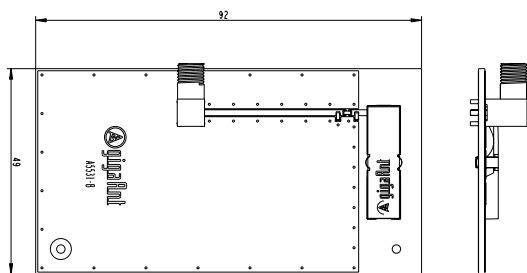

The testboard is designed for evaluation purposes for Flavus 2.4 GHz SMD antenna. The card has the same size as a typical PCMCIA card and is fitted with an SMA connector.

10.3 Test board matching

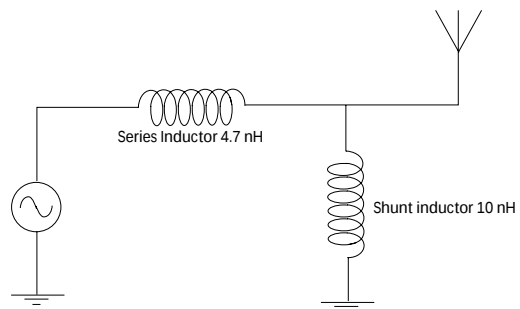

The testboard is matched with above specified component. Note! The component value(s) will vary depending on size of PCB, surrounding components etc.

11. RELIABILITY

11.1 Temperature and Humidity

Item	Standard	Low	High	Duration
Operating temperature	EN/IEC 60068-2-2, Test Bd: Dry heat	-30 degC	+90 degC	-
Temperature cycling	EN/IEC 60068-2-14, Test Na: Change of temperature	-30 degC	+90 degC	100cycles / 10min
Storage life Humidity	EN/IEC 60068-2-1, Test Ca: Damp heat	+40 degC / 93% RH		96 h
Storage life Low temperature	EN/IEC 60068-2-1, Test Ad: Cold	-25 degC	-	200 h
Storage life High temperature	EN/IEC 60068-2-2, Test Bb: Dry heat	-	+ 90 degC	1000 h

11.2 Mechanical

Item	Standard	Specification	Duration
Contact force		Antenna is mounted on reference board. and a pressure gauge is applied to antenna contact.	
Drop test		Dummy weight: 150g Height: 170cm	One drop at each side, total drops: 6
Vibration	EN/IEC 60068-2-6, Test Fc (sinusoidal)	Acceleration spectral density:10-1000Hz Acceleration: 20m/s ² Number of axes: 3 mutually perpendicular	5 cycles per axis

11.3 Miscellaneous

Item	Standard	Specification	Duration
Contact pad Corrosion	ASTM B117	SO ₂ Concentration: 25 ppm Temperature : 25 Deg C RH: 93%	96 hours

11.4 Judgement standard


The judgement of the above tests should be made as follows:

1. Visual inspection - Normal apperance with no obvious deformation
2. Electrical inspection - The antenna satisfies the VSWR specification throughout the 2.4-2.5 GHz band
3. Mechanical inspection - Acceptable contact force min. 0.5 N

12. HAZARDOUS MATERIAL REGURATION CONFORMANCE

Cadmium and cadmium compound.	Lead and lead compound
Organic brominated compound (PBB, PBDE)	Mercury and mercury compound
Polychlorinated biphenyl (PCB)	Sexivalent chrome compound
Polychlorinated naphthalene (PCN)	Chlorinated paraffin (CP)
Organic tin compound	Mirex
Asbestos	Formaldehyde
Azo compound	Tetra-bromo-bisphenol-A-bis (TBBP-A-bis)

13. APPLICATION EXAMPLE

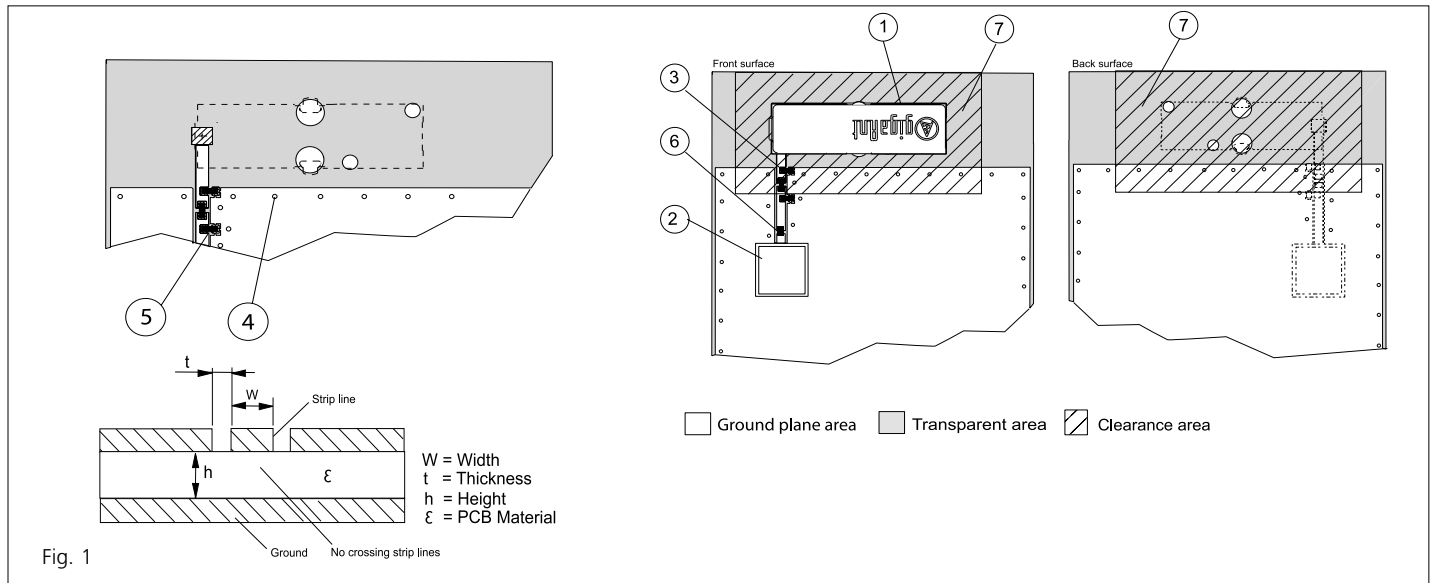

1. Placement of antenna

The antenna shall preferably be placed at the edge of the PCB oriented as above. Other placements and orientations and size of groundplanes are possible, but will affect the performance. Avoid active components near the antenna.

2. Placement of 2.4 GHz module

To avoid losses the module shall be placed as close to the antenna as possible.

3. Strip line

The strip line must be dimensioned according to your specific PCB. (see fig 1). No crossing strip lines are allowed between the strip line and its ground plane.

4. Via connections

To avoid spurious effects, via connections must be made to analogue ground.

5. Component matching

Component values are depending on antenna placement, PCB dimensions and location of other components.

6. DC Block

Might be needed depending on RF Module configuration.

7. Clearance area

Avoid components and parts close to the antenna.

**Note ! Incorrect implementation of the antenna will affect the performance.
Contact gigaAnt for implementation services.**

14. PACKAGING



14.1 Shelf storage recommendation

Temperature	-10 to +40 degree C
Humidity	Less than 75% RH
Shelf Life	12 Months
Storage place	Away from corrosive gas and direct sunlight

14.2 Packaging characteristics

Quantity	Number of trays	Tray quantity
840 pcs / box	6 / box	140 pcs

14.3 Tray dimension

Material: Anti static plastic tray		Material: Paper	
Width [mm] W: 290		Width [mm] W: 296	
Bredth [mm] B: 390		Bredth [mm] B: 396	
Height [mm] H: 14		Thickness [mm] H: 75	

14.5 Label information

 gigaAnt Article number : XXXXXXXX-XX Description : Product name, Frequenzy Hz Reel Quantity : XXXX Pcs. Order No: Customer PO number Date: YYMMDD
--

15. CONTACT INFORMATION

www.gigaAnt.com <u>Europe & Africa</u> e-mail: info.EU@gigaAnt.com Tel: +46 46 286 4177 Or your local gigaAnt representative	<u>America</u> e-mail: info.US@gigaAnt.com Tel: +1 817 430 7291	<u>Asia and Pacific</u> e-mail: info.ASIA@gigaAnt.com Tel: +656 890 6200
---	--	---