



Inter**Lab**[®]
Final Report on
Sparky, HILTI PD-C (01)
FCC ID SDL-PDC01
IC: 5228A-PDC01

Report Reference: MDE_ELEKT_1404_FCCb_rev1
According to:
FCC 47 CFR Ch.1 Part 15 Subpart B, Class B

Date: November 30, 2015

Test Laboratory:

7layers GmbH
Borsigstraße 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH
Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350
www.7layers.com

Geschäftsführer /
Managing Director:
Dr. Harald Ansorge

Registergericht registered in:
Düsseldorf, HRB 75554
USt-IdNr VAT No.:
DE203159652
TAX No. 147/5869/0385
A Bureau Veritas Group Company

1 Administrative Data

1.1 Project Data

Project Responsible: Abdellah Ahakki
Date Of Test Report: 2015/11/30
Date of first test: 2015/04/22
Date of last test: 2015/04/22

1.2 Applicant Data

Company Name: Hilti Entwicklungsgesellschaft GmbH
Street: Hiltistrasse 6
City: 86916 Kaufering
Country: Germany
Contact Person: Mr. Dirk Bischoff

1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:


7 layers DE

Company Name : 7layers GmbH
Street : Borsigstrasse 11
City : 40880 Ratingen
Country : Germany
Contact Person : Mr. Michael Albert
Phone : +49 2102 749 201
Fax : +49 2102 749 444
E Mail : Michael.Albert@7Layers.com

Laboratory Details


<i>Lab ID</i>	<i>Identification</i>	<i>Responsible</i>	<i>Accreditation Info</i>
Lab 1	Conducted Emissions	Mr. Andreas Petz Mr. Wolfgang Richter	DAkkS-Registration no. D-PL-12140-01-01
Lab 2	Radiated Emissions	Mr. Marco Kullik Mr. Jens Dörwald	DAkkS-Registration no. D-PL-12140-01-01

1.4 Signature of the Testing Responsible

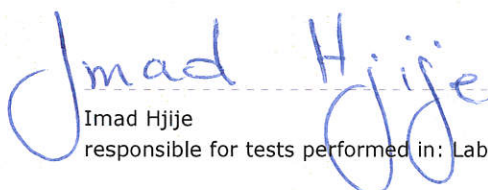

Imad Hjije
responsible for tests performed in: Lab 1, Lab 2

1.5 Signature of the Accreditation Responsible



Accreditation scope responsible person
responsible for Lab 1, Lab 2

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: HILTI PD-C (01)

Type / Model / Family: Sparky, HILTI PD-C (01)
FCC ID SDL-PDC01
IC: 5228A-PDC01

Product Category: Others

Manufacturer:
Company Name: Hillos GmbH
Street: Pruessingstrasse 41
City: D-07745 Jena
Country: Geramany

Contact Person: Mr. Mareen Rauh
Phone: +49 (0) 3641 65 2944
E-Mail: mareen.rauh@jenoptik.com

Parameter List:

Parameter name	Value
AC Power Supply	120 V / 60 Hz
Antenna Gain	1.3 (dBi)
DC Power Supply	3.7 (V)
highest channel (BT)	2480 (MHz)
lowest channel (BT)	2402 (MHz)
mid channel (BT)	2441 (MHz)

2.2 Detailed Description of OUT Samples

Sample : aa01

<i>OUT Identifier</i>	HILTI PD-C (01)		
<i>Sample Description</i>	Radio Sample 1		
<i>Serial No.</i>	321		
<i>Low Voltage</i>	3,6 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4,2 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	3,7 V	<i>Normal Temp.</i>	+22 °C

Parameter List:

<i>Parameter Description</i>	<i>Value</i>
Parameter for Scope FCC_v2	
Antenna Gain	1.3 (dBi)
Frequency_high	2480 (MHz)
Frequency_low	2402 (MHz)
Frequency_mid	2441 (MHz)

Sample : ab01

<i>OUT Identifier</i>	HILTI PD-C (01)		
<i>Sample Description</i>	Radio Sample 2		
<i>Serial No.</i>	311		
<i>Low Voltage</i>	3,6 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4,2 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	3,7 V	<i>Normal Temp.</i>	+22 °C

Parameter List:

<i>Parameter Description</i>	<i>Value</i>
Parameter for Scope FCC_v2	
Antenna Gain	1.3 (dBi)
Frequency_high	2480 (MHz)
Frequency_low	2402 (MHz)
Frequency_mid	2441 (MHz)

2.3 OUT Features

Features for OUT: HILTI PD-C (01)

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
Features for scope: FCC_v2			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
DC	The OUT is powered by or connected to DC		
EDR2	EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR3	EUT supports Bluetooth using data rate of 3 Mbps with 8DPSK modulation in the band 2400 MHz - 2483.5 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
TantC	temporary antenna connector, which may be only built-in for testing, designed as an example part of the equipment		

2.4 Auxiliary Equipment

<i>AE No.</i>	<i>Type Designation</i>	<i>Serial No.</i>	<i>HW Status</i>	<i>SW Status</i>	<i>Description</i>
AE AE01					AC DC Adapter
AE AUX4	CHERRY RS 6000 USB ON	G 0000273 2P28			Keyboard
AE AUX2	Fujitsu Lifebook Eseries E781	DSCK013817	2012-03	Win7 Prof. Engl.	Laptop
AE AUX3	Fujitsu Ltd. SED100P2-19.0	07Y17323A	2007.11		Laptop Power Supply
AE AUX1	Ktec	KSA29B0500210 D5			AC Adapter
AE AUX6	LG L17MB-P	412WAPLOU560			TFT Monitor
AE AUX5	Logitech M-BT58	HC60915A2XC			Mouse

2.5 Operating Mode(s)

<i>Ref.-No.</i>	<i>Description</i>
1	Bluetooth TX on 2441 MHz. USB Connection between laptop and EUT for data transfer
2	EUT connected to the ACDC charger

2.6 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

Setup No.	List of OUT samples	List of auxiliary equipment	
Sample No.	Sample Description	AE No.	AE Description
CP_S_AB01 (Computer peripheral setup)			
Sample: aa01	Radio Sample 1	AE AUX4	Keyboard
		AE AUX2	Laptop
		AE AUX3	Laptop Power Supply
		AE AUX1	AC Adapter
		AE AUX6	TFT Monitor
		AE AUX5	Mouse
S_AA01			
Sample: aa01	Radio Sample 1	AE AE01	AC DC Adapter
S_AB01			
Sample: ab01	Radio Sample 2	AE AE01	AC DC Adapter

3 Results

3.1 General

Documentation of tested devices:

Available at the test laboratory.

Interpretation of the test results:

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

Note:

1. All tests are performed under environmental conditions within the requirements of the specifications. Environmental conditions are available at the laboratory.
2. The device is a hands-free kit containing a BT Transceiver operating in the 2.4 GHz ISM band. The EUT was controlled by the CBT via Bluetooth test mode.
3. This report is a revision of "MDE_ELEKT_1404_FCCb". please refer to the revision table on page 33 (Revision History)

3.2 List of the Applicable Body

(Body for Scope: FCC_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART15bRADIO FREQUENCY DEVICES	Part 15, Subpart B - Unintentional Radiators

3.3 List of Test Specification

<i>Test Specification:</i>	FCC part 2 and 15
<i>Version</i>	10-1-14 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 15 - RADIO FREQUENCY DEVICES



3.4 Summary

<i>Test Case Identifier / Name</i> <i>Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
15b.1 Conducted Emissions (AC Power Line) §15.107				
15b.1; Mode = Generating a high power consumption	Passed	2015/04/22	Lab 1	CP_S_AB01
	operating mode: 1			
	Passed	2015/04/22	Lab 1	S_AB01
	operating mode: 2			
15b.2 Spurious Radiated Emissions §15.109				
15b.2; Mode = Generating a high power consumption	Passed	2015/04/22	Lab 2	CP_S_AB01
	operating mode: 2			
	Passed	2015/04/22	Lab 2	S_AA01
	operating mode: 1			



3.5 Detailed Results

3.5.1 15b.1 Conducted Emissions (AC Power Line) §15.107

Test1: 15b.1; Mode = Generating a high power consumption

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AB01
<i>Date of Test:</i>	2015/04/22 14:59
<i>Body:</i>	FCC47CFRChIPART15bRADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

AC MAINS CONDUCTED

EUT: (DE1132000ab01)
 Manufacturer: Elektrobit
 Operating Condition: BT-Hopping, metering by Laser switched on
 Test Site: 7 layers Ratingen
 Operator: Pet/Rem
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207 Class B
 Comment: supplied by AC/DC adapter at 120 V / 60 Hz
 Start of Test: 16.04.2015 / 18:02:42

SCAN TABLE: "FCC Voltage"

Short Description:			FCC Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak Average	20.0 ms	9 kHz	ESH3-Z5

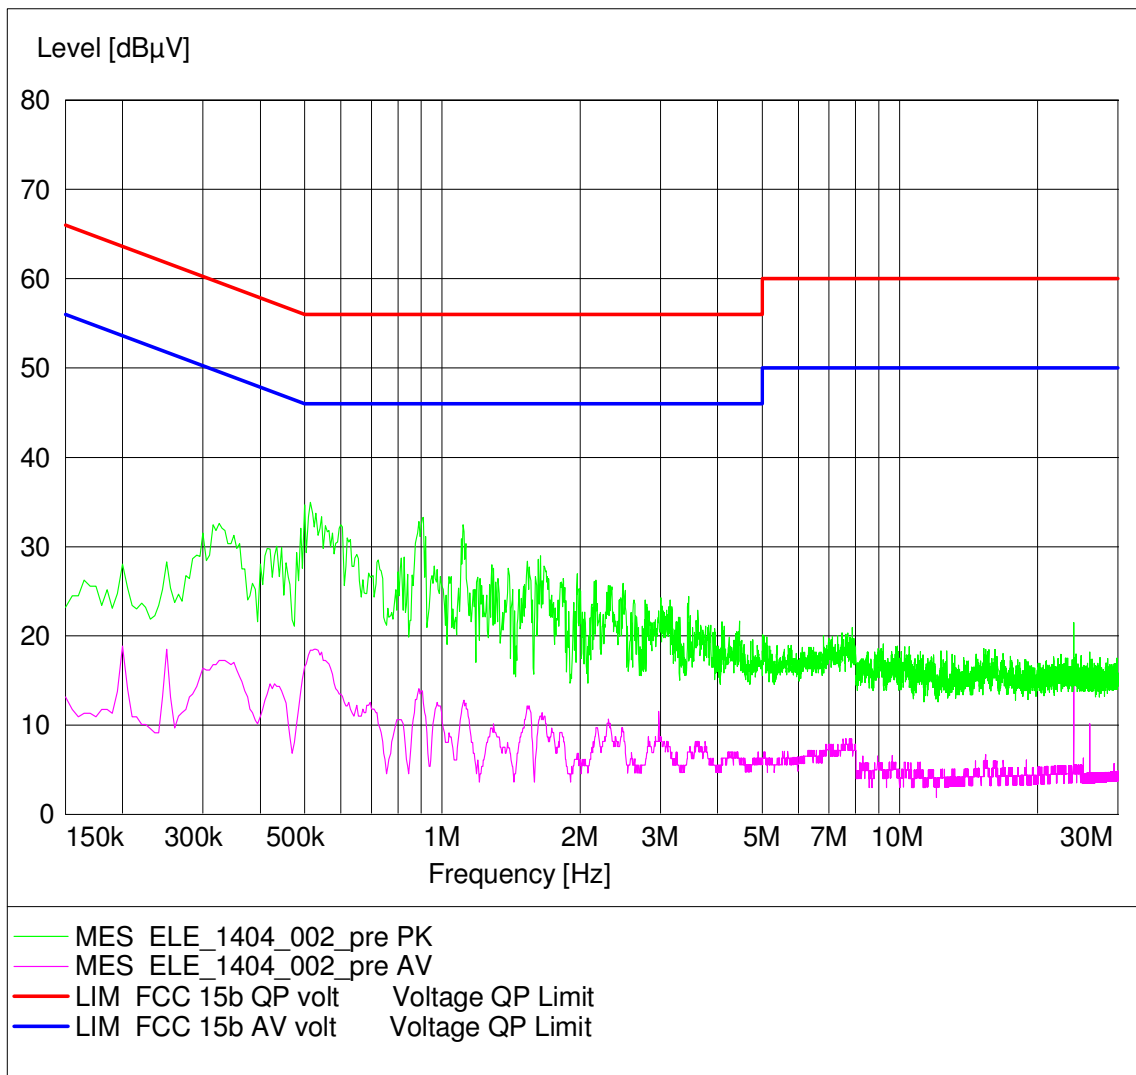



Reference: MDE_ELEKT_1404_FCCb_rev1
According to:
FCC 47 CFR Ch.1 Part 15 Subpart B, Class B

Test1: 15b.1; Mode = Generating a high power consumption

<i>Result:</i>	Passed
<i>Setup No.:</i>	CP_S_AB01
<i>Date of Test:</i>	2015/04/22 19:51
<i>Body:</i>	FCC47CFRChIPART15bRADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

AC MAINS CONDUCTED

EUT: (DE1132000aa01)
 Manufacturer: Elektrobit
 Operating Condition: BT TX on 2441MHz, laser active;computer peripheral 120V/60Hz
 Test Site: 7 layers Ratingen
 Operator: URO
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207
 Comment: vertical + horizontal antenna polarisation
 Start of Test: 22.04.2015 / 19:58:09

SCAN TABLE: "FCC Voltage"

Short Description:			FCC Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
			Average			

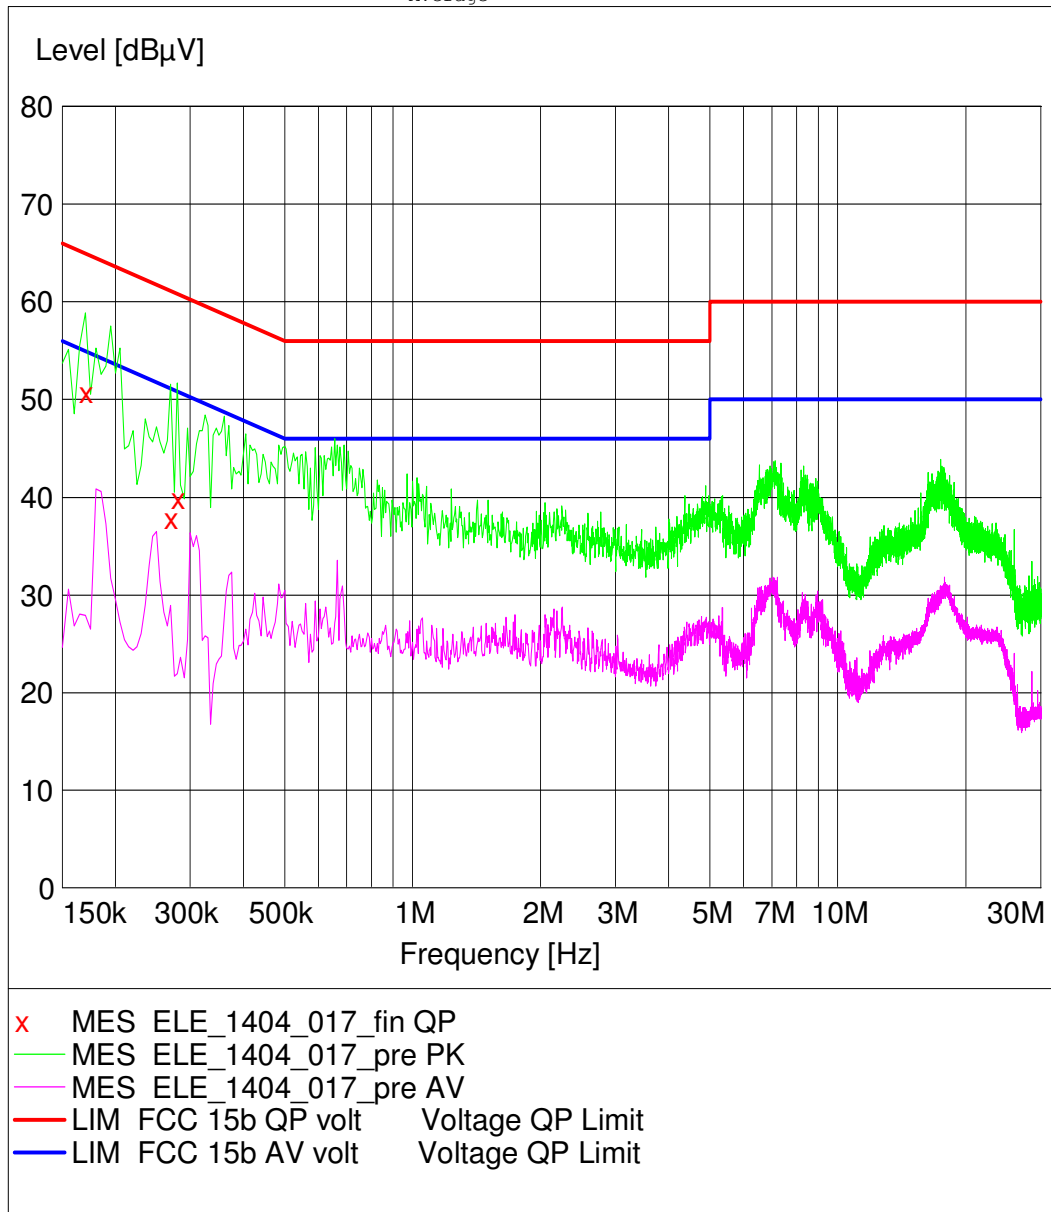



Reference: MDE_ELEKT_1404_FCCb_rev1
According to:
FCC 47 CFR Ch.1 Part 15 Subpart B, Class B

MEASUREMENT RESULT: "ELE_1404_017_fin QP"

22.04.2015 20:03

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.170000	50.70	10.1	65	14.3	N	GND
0.270000	37.90	10.1	61	23.3	L1	FLO
0.280000	39.90	10.1	61	20.9	L1	FLO



3.5.2 15b.2 Spurious Radiated Emissions §15.109

Test1: 15b.2; Mode = Generating a high power consumption

<i>Result:</i>	Passed
<i>Setup No.:</i>	S_AA01
<i>Date of Test:</i>	2015/04/22 14:51
<i>Body:</i>	FCC47CFRChIPART15bRADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

EMI RADIATED TEST

EUT: (DE1132000aa01)
 Manufacturer: Elekt
 Operating Condition: BT TX on 2441MHz, laser active; 120V/60Hz
 Test Site: 7 layers, Ratingen
 Operator: Doe
 Test Specification: FCC Part 15 B Class B
 Comment: Horizontal EUT position, Horizontal+Vertical antenna polaris
 Start of Test: 22.04.2015 / 05:42:58

SCAN TABLE: "FCC part 15 b"

Short Description:		FCC part 15 b				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	60.0 kHz	MaxPeak	1.0 ms	120 kHz	HL562

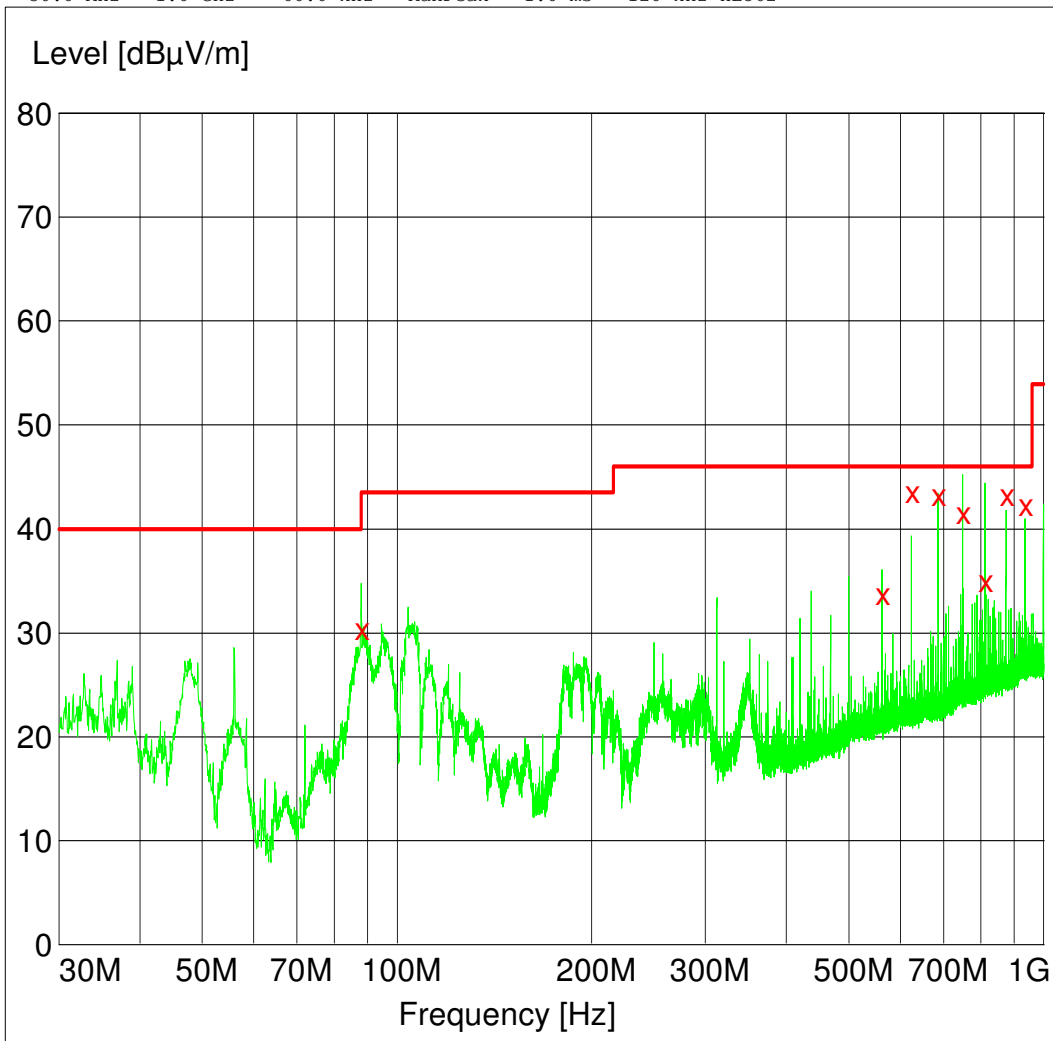

- x MES ELE_1404_013_fin QP
- MES ELE_1404_013_pre PK
- LIM FCC ClassB F QP/AV FCC ClassB, field strength



MEASUREMENT RESULT: "ELE_1404_013_fin QP"

22.04.2015 06:30

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
87.960000	30.40	11.0	40.0	9.6	106.0	202.00	VERTICAL
562.020000	33.70	18.5	46.0	12.3	125.0	112.00	HORIZONTAL
624.420000	43.60	19.3	46.0	2.4	125.0	247.00	HORIZONTAL
686.880000	43.30	20.3	46.0	2.7	109.0	67.00	HORIZONTAL
749.340000	41.60	21.3	46.0	4.4	100.0	67.00	HORIZONTAL
811.740000	35.00	22.0	46.0	11.0	104.0	113.00	HORIZONTAL
874.200000	43.30	22.8	46.0	2.7	107.0	247.00	HORIZONTAL
936.660000	42.30	23.3	46.0	3.7	100.0	90.00	HORIZONTAL

Test2: 15b.2; Mode = Generating a high power consumption

Result: Passed
Setup No.: CP_S_AB01
Date of Test: 2015/04/22 15:04
Body: FCC47CFRChIPART15bRADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15


Detailed Results:

EMI RADIATED TEST

EUT: (DE1132000aa01)
 Manufacturer: Elek
 Operating Condition: BT TX on 2441MHz, laser active;computer peripheral 120V/60Hz
 Test Site: 7 layers, Ratingen
 Operator: Doe
 Test Specification: FCC Part 15 B Class B
 Comment: Horizontal EUT position, Horizontal+Vertical antenna polaris
 Start of Test: 22.04.2015 / 06:59:23

SCAN TABLE: "FCC part 15 b"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	60.0 kHz	MaxPeak	1.0 ms	120 kHz	HL562

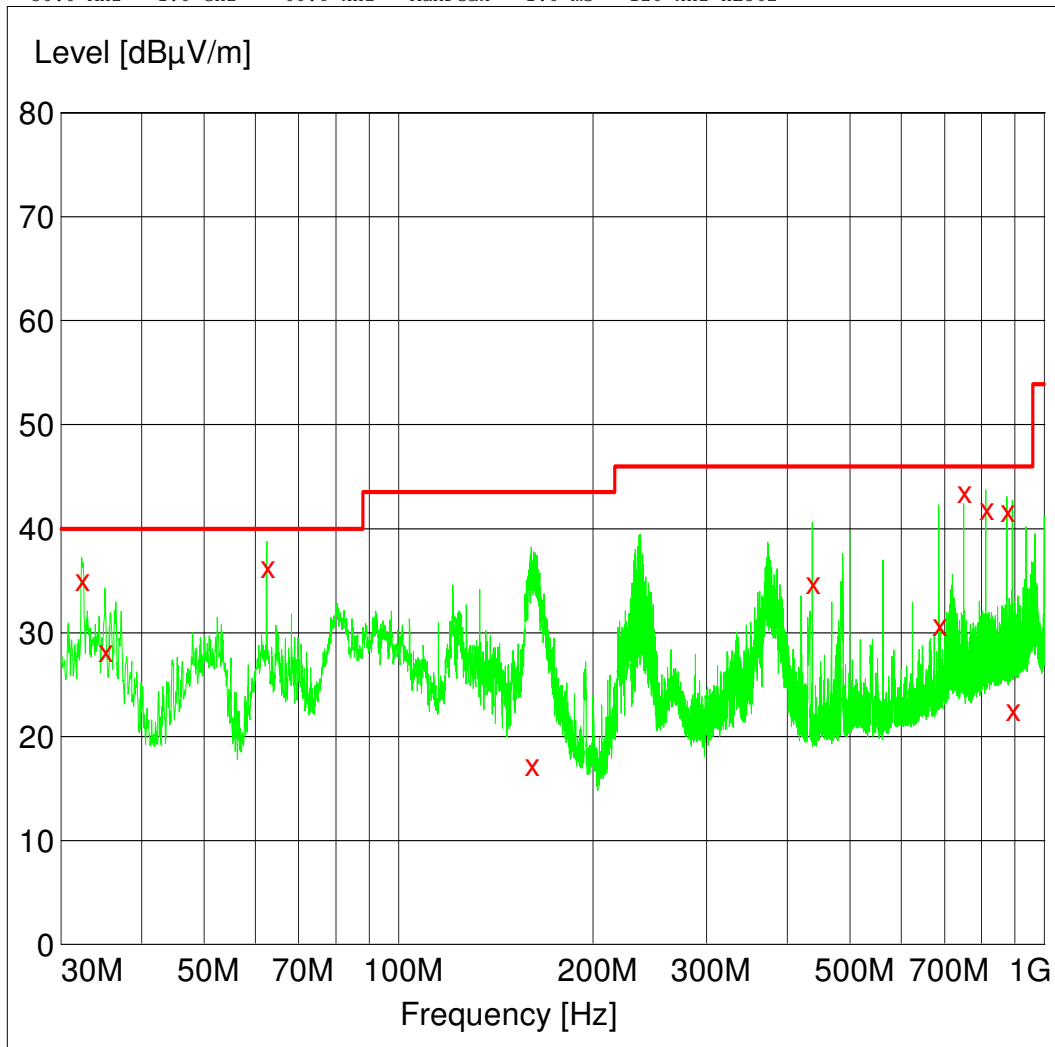

- x MES ELE_1404_014_fin QP
- MES ELE_1404_014_pre PK
- LIM FCC ClassB F QP/AV FCC ClassB, field strength



Reference: MDE_ELEKT_1404_FCCb_rev1
According to:
FCC 47 CFR Ch.1 Part 15 Subpart B, Class B

MEASUREMENT RESULT: "ELE_1404_014_fin QP"

22.04.2015 07:52

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
32.280000	35.10	19.8	40.0	4.9	101.0	67.00	VERTICAL
35.100000	28.20	18.4	40.0	11.8	103.0	67.00	VERTICAL
62.460000	36.30	6.2	40.0	3.7	248.0	202.00	VERTICAL
160.620000	17.30	9.7	43.5	26.2	121.0	157.00	VERTICAL
437.100000	34.80	16.2	46.0	11.2	113.0	67.00	HORIZONTAL
686.880000	30.80	20.3	46.0	15.2	117.0	158.00	HORIZONTAL
749.340000	43.60	21.3	46.0	2.4	162.0	222.00	HORIZONTAL
811.740000	41.90	22.0	46.0	4.1	113.0	22.00	HORIZONTAL
874.200000	41.80	22.8	46.0	4.2	125.0	292.00	HORIZONTAL
891.720000	22.60	22.9	46.0	23.4	108.0	157.00	VERTICAL

4 Test Equipment Details

4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 2		
Manufacturer:	Frankonia		
Description:	Anechoic Chamber for radiated testing		
Type:	10.58x6.38x6.00 m ³		
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	NSA (FCC)	2014/01/09	2017/01/09

Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	FCC listing 96716 3m Part15/18		2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID: Lab 1
Manufacturer: Rohde & Schwarz GmbH & Co.KG
Description: EMI Conducted Auxiliary Equipment

Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/02/06 2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/10 2016/01/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/01/08 2016/01/31
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	standard calibration		2014/06/18 2017/11/30
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2013/11/25 2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DAkKS Calibration		2015/03/30 2017/03/31
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DAkks Calibration		2015/03/30 2017/03/31

Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AM 4.0	AM4.0/180/11920 513	Maturo GmbH
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck Mess-Elektronik OHG
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck Mess-Elektronik OHG
Broadband Amplifier 1 GHz - 4 GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 18 GHz - 26 GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 30 MHz - 18 GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01- 2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02- 2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
			<i>Calibration Details</i>
Standard Calibration			<i>Last Execution</i> <i>Next Exec.</i>
Double-ridged horn-duplicated 2015-07-15 10:47:55	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/18000-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Horn Antenna Schwarzbeck 15-26.5 GHz BBHA 9170	BBHA 9170	BBHA9170262	Schwarzbeck Mess-Elektronik OHG
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG
			<i>Calibration Details</i>
Standard Calibration			<i>Last Execution</i> <i>Next Exec.</i>
Log.-per. Antenna (upgraded)	HL 562 Ultralog new biconicals	830547/003	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
			<i>Calibration Details</i>
DKD Calibration			<i>Last Execution</i> <i>Next Exec.</i>
Standard Gain / Pyramidal Horn Antenna 26.5 GHz	3160-09	00083069	EMCO Elektronik GmbH

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Standard Gain / Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5- 10kg/024/379070 9	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 2
<i>Manufacturer:</i>	see single devices
<i>Description:</i>	Single Devices for various Test Equipment
<i>Type:</i>	various
<i>Serial Number:</i>	none

Single Devices for Auxiliary Test Equipment

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2014/02/10 2016/02/09
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/07/29 2015/07/28
Spectrum Analyzer	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2012/06/13 2015/06/12
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

Test Equipment Digital Signalling Devices

Lab ID: Lab 1, Lab 2
Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/27 2016/01/26
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2014/12/02 2017/12/01
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2014/12/03 2017/12/02
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02
	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG

Test Equipment Emission measurement devices

Lab ID: Lab 1, Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
EMI Receiver / Spectrum Analyzer	ESR 7	101424	Rohde & Schwarz
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial Factory Calibration		2014/11/13 2016/11/12
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/10
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/10
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/06/24 2017/06/23
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/01/07 2016/01/31
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03
Spectrum Analyzer	FSW 43	103779	Rohde & Schwarz
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial Factory Calibration		2014/11/17 2016/11/16

Test Equipment Multimeter 03

Lab ID: Lab 2
Description: Fluke 177
Serial Number: 86670383

Single Devices for Multimeter 03

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03

Test Equipment Shielded Room 02

Lab ID: Lab 1
Manufacturer: Frankonia
Description: Shielded Room for conducted testing
Type: 12 qm
Serial Number: none

Test Equipment T/A Logger 13

Lab ID: Lab 1, Lab 2
Description: Lufft Opus10 TPR
Type: Opus10 TPR
Serial Number: 13936

Single Devices for T/A Logger 13

Single Device Name	Type	Serial Number	Manufacturer
ThermoAirpressure Datalogger 13 (Environ)	Opus10 TPR (8253.00)	13936	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2015/02/27 2017/02/26

Test Equipment T/H Logger 02

Lab ID: Lab 1
Description: Lufft Opus10
Serial Number: 7489

Single Devices for T/H Logger 02

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 02 (Environ)	Opus10 THI (8152.00)	7489	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2015/02/27 2017/02/26

Test Equipment T/H Logger 12

Lab ID: Lab 2
Description: Lufft Opus10
Serial Number: 12482

Single Devices for T/H Logger 12

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 12 (Environ)	Opus10 THI (8152.00)	12482	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2015/03/10 2017/03/09



Reference: MDE_ELEKT_1404_FCCb_rev1
According to:
FCC 47 CFR Ch.1 Part 15 Subpart B, Class B

5 Annex

5.1 Additional Information for Report

Test Description

Conducted emissions (AC power line)

Standard FCC Part 15 Subpart B

The test was performed according to: ANSI C 63.4, 2009

Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2009. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was connected to a 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN), which meets the requirements of ANSI C63.4-2009, Annex B, in the frequency range of the measurements. The LISN's unused connections were terminated with 50 Ohm loads. AC Power supply voltage for EUT: 120 V 60 Hz (if not stated within the measurement plot and/or test result).

The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.107, Class B Limit

Frequency Range (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

FCC Part 15, Subpart B, §15.107, Class A Limit

Frequency Range (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V)
0.15 - 0.5	79	66
0.5 - 30	73	60

Used conversion factor: Limit (dB μ V) = 20 log (Limit (μ V)/1 μ V).

NOTES:

A missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

The chosen operating mode is selected as representative mode to generate "worst-case" conditions, i.e. high power consumption.

Spurious radiated emissions

Standard FCC Part 15, Subpart B

The test was performed according to: ANSI C 63.4, 2009

Test Description

Measurement below 1 GHz:

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2009.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The influence of the EUT support table that is used between 30-1000 MHz was evaluated.

The test was performed at the distance of 3 m between the EUT and the receiving antenna. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The radiated emissions measurements were made in a typical installation configuration. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition. AC Power supply voltage for EUT: 120 V 60 Hz (if not stated within the measurement plot and/or test result).

Step 1: Preliminary scan (test to identify the highest amplitudes relative to the limit)

Intention of this step is, to determine the radiated EMI-profile of the EUT.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 - 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s
- Turntable angle range: -180° to +180°
- Turntable step size: 90°
- Height variation range: 1 - 3 m
- Height variation step size: 2 m
- Polarization: Horizontal + Vertical

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2:

A further measurement will be performed on the frequencies determined in step 1. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

Settings for step 2:

- Detector: Peak - Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF - Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180° to +180°
- Turntable step size: 45°
- Height variation range: 1 - 4 m
- Height variation step size: 0.5 m
- Polarizations: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)

- Antenna height
- The last two values have now the following accuracy:
- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/- 22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -22.5° to +22.5° around the determined value
- Height variation range: -0.25 m to +0.25 m around the determined value

Step 4: Final measurement (with QP detector)

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1GHz)
- Measured frequencies: in step 3 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

Measurement above 1 GHz:

The following modifications apply to the measurement procedure for the frequency range above 1 GHz: The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse-linear-distance-squared for the power density measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2-4 as described before, are omitted. Step 1 was performed at one height of the receiving antenna only.

Detector: Peak, Average (simultaneously)
RBW = VBW = 1 MHz; above 7 GHz 100 kHz

Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.109, Radiated Emission Limits

Frequency Range (MHz)	Class B Limit (dBµV/m)
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
above 960	54.0

Frequency Range (MHz)	Class A Limit (dBµV/m) / @ 3 m!
30 - 88	49.5
88 - 216	54.0
216 - 960	56.9
above 960	60.0


§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)


NOTE: A missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

Setup Drawings

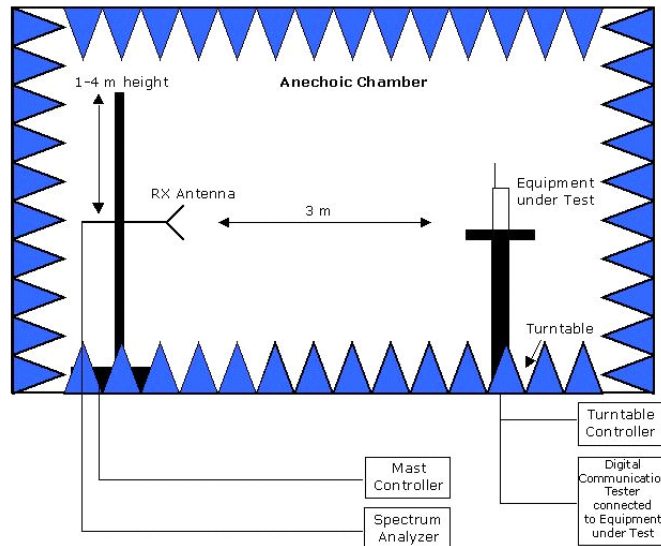

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

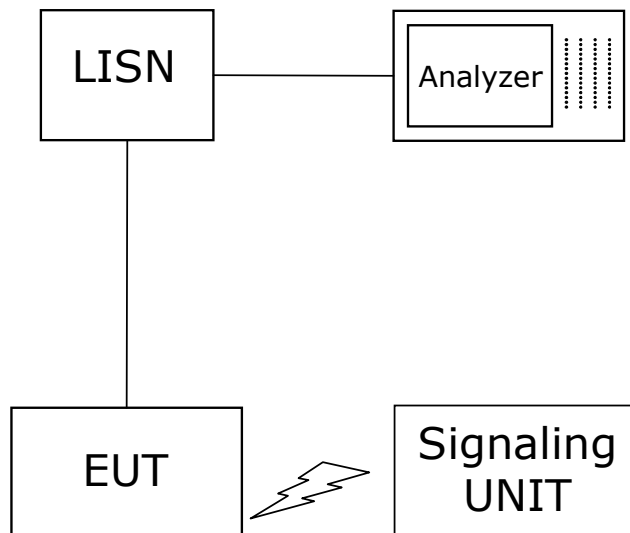

Setup in the shielded room for conducted measurements at AC mains port



November, 2014

To Whom This May Concern

**Correlation of measurement requirements for
Information Technology Equipment (ITE) / Digital Circuits
from
FCC and IC**

Information Technology Equipment (ITE) / Radio Apparatus Containing Digital Circuits

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§15.107	ICES-003 Issue 5: 6.1
Spurious Radiated Emissions	§15.109	ICES-003 Issue 5: 6.2

Measurement Uncertainties

FCC Part 22, 24, 27, 90
IC RSS-132, RSS-133, RSS-139

Test Case	Parameter	Uncertainty
RF Power Output	Power	± 2.2 dB
Frequency Stability	Frequency	± 25 Hz
Spurious Emissions at antenna terminal	Power	± 2.2 dB
Field strength of spurious radiation	Power	± 4.5 dB
Emission and Occupied Bandwidth	Power Frequency	± 2.9 dB GSM: ± 10.6 kHz UMTS, LTE: ± 120.0 kHz
Band Edge Compliance	Power Frequency	± 2.9 dB GSM: ± 14.6 kHz UMTS, LTE: ± 68.0 kHz

FCC Part 15b
IC ICES-003

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power+	± 5.5 dB

FCC Part 15c, 15e
IC RSS-210, IC RSS-247

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power		± 2.2 dB
Spurious Emissions at antenna terminal	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

Revision History

Report version control			
Version	Release date	Change Description	Version validity
initial	2015-07-21	--	invalid
rev1	2015-11-30	<ul style="list-style-type: none">Added FCC_IC Measurement uncertainty	valid



6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	2
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	3
2.1	General OUT Description	3
2.2	Detailed Description of OUT Samples	4
2.3	OUT Features	5
2.4	Auxiliary Equipment	5
2.5	Operating Mode(s)	5
2.6	Setups used for Testing	6
3	Results	6
3.1	General	6
3.2	List of the Applicable Body	7
3.3	List of Test Specification	7
3.4	Summary	8
3.5	Detailed Results	9
3.5.1	15b.1 Conducted Emissions (AC Power Line) §15.107	9
3.5.2	15b.2 Spurious Radiated Emissions §15.109	14
4	Test Equipment Details	19
4.1	List of Used Test Equipment	19
5	Annex	26
5.1	Additional Information for Report	26
6	Index	34