

**FCC 47 CFR PART 15 SUBPART C &
INDUSTRY CANADA RSS-247**

TEST REPORT

For

Zonar Connect

Model: 20081

Trade Name: ZONAR

Issued to

For FCC:

**Zonar Systems Inc
18200 Cascade Ave South Suite 200
Seattle Washington United States**

For IC

**ZONAR SYSTEMS
18200 Cascade Ave South Suite 200
SEATTLE WA USA**

Issued by

Compliance Certification Services Inc.

**No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)**

<http://www.ccsrf.com>

service@ccsrf.com

Issued Date: October 28, 2016



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	October 28, 2016	Initial Issue	ALL	Doris Chu

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY.....	6
3.1 EUT CONFIGURATION	6
3.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
3.3 DESCRIPTION OF TEST MODES.....	8
4. INSTRUMENT CALIBRATION	9
4.1 MEASURING INSTRUMENT CALIBRATION	9
4.2 MEASUREMENT EQUIPMENT USED	9
4.3 MEASUREMENT UNCERTAINTY	10
5. FACILITIES AND ACCREDITATIONS	11
5.1 FACILITIES.....	11
5.2 EQUIPMENT.....	11
5.3 LABORATORY ACCREDITATIONS AND LISTING.....	11
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
6. SETUP OF EQUIPMENT UNDER TEST	13
6.1 SETUP CONFIGURATION OF EUT	13
6.2 SUPPORT EQUIPMENT.....	13
7. FCC PART 15.247 REQUIREMENTS & RSS-247 REQUIREMENTS.....	14
7.1 99% BANDWIDTH AND 6 DB BANDWIDTH.....	14
7.2 PEAK POWER	22
7.3 AVERAGE POWER	24
7.4 BAND EDGES MEASUREMENT	26
7.5 CONDUCTED BAND EDGE AND CONDUCTED SPURIOUS EMISSION	41
7.6 PEAK POWER SPECTRAL DENSITY	57
7.7 RADIATED EMISSIONS	65
7.8 POWERLINE CONDUCTED EMISSIONS	89
APPENDIX II PHOTOGRAPHS OF TEST SETUP	92

1. TEST RESULT CERTIFICATION

Applicant: **For FCC**
 Zonar Systems Inc
 18200 Cascade Ave South Suite 200
 Seattle Washington United States
For IC
 ZONAR SYSTEMS
 18200 Cascade Ave South Suite 200
 SEATTLE WA USA

Manufacturer: First International Computer
 8F, No.300, Yang Guang St., NeiHu, Taipei, Taiwan 114

Equipment Under Test: Zonar Connect

Model Number: 20081

Trade Name: ZONAR

Date of Test: July 19 ~ October 22, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C Industry Canada RSS-247 Issue 1	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 and Industry Canada RSS-247.


The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:



Sam Chuang
 Manager
 Compliance Certification Services Inc.

Tested by:



Dennis Li
 Engineer
 Compliance Certification Services Inc.

2. EUT DESCRIPTION

Product	Zonar Connect			
Model Number	20081			
Trade Name	ZONAR			
Model Discrepancy	N/A			
Received Date	April 15, 2016			
Power supply	VDC from Power Adapter DARFON / B112-51(SOY-0500250US) I/P: 100-240Vac, 0.4A, 50-60Hz O/P: 5Vdc, 2.5A			
Frequency Range	2412 ~ 2462 MHz			
Transmit Power	Mode	Frequency Range	Output Power (dBm)	Output Power (W)
	IEEE 802.11b	2412 - 2462	17.72	0.0592
	IEEE 802.11g	2412 - 2462	23.44	0.2208
	IEEE 802.11n HT 20 MHz	2412 - 2462	23.27	0.2123
Number of Channels	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT 20 MHz mode: 11 Channels			
Antenna Specification	Dipole Antenna / Gain: 2.1dBi			

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **SEJ-CONNECT** & ISED No. : **5266A-CONNECT** filing to comply with FCC Part 15C, Section 15.207, 15.209 and IC RSS-247 & RSS-GEN.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 Part 15.207, 15.209, 15.247, KDB 558074 D01 DTS Meas Guidance v03r05

The tests documented in this report were performed in accordance with IC RSS-247, IC RSS-Gen.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.3 DESCRIPTION OF TEST MODES

The EUT (model: 20081) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode was programmed.

After verification, all tests carried out are with the worst-case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case worst case was in CH Mid.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

3.3.2 The worst mode of measurement

AC Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Voltage/Hz	120V/60Hz
Test Mode	Mode 1: Adapter Mode Mode 2: USB Mode
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Remark: The worst mode was record in this test report.

Radiated Emission Measurement	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Voltage/Hz	120V/60Hz
Test Mode	Mode 1: Adapter Mode Mode 2: USB Mode Mode 3: Docking Mode
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Position	<input type="checkbox"/> Placed in fixed position. <input type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input checked="" type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)

Remark: The worst mode was record in this test report.

4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Conducted Emissions Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Power Meter	Anritsu	ML2495A	1012009	2016/7/4	2017/7/3
Power Meter	Anritsu	MA2411B	917072	2016/7/4	2017/7/3
Spectrum Analyzer	R&S	FSV 40	101073	2015/10/04	2016/10/03
Spectrum Analyzer	R&S	FSV 40	0229	2016/05/11	2017/05/10

Wugu 966 Chamber A					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	2015/12/8	2016/12/7
Loop Ant	COM-POWER	AL-130	121051	2016/2/25	2017/2/24
Bilog Antenna	Sunol Sciences	JB3	A030105	2016/8/5	2017/8/4
Pre-Amplifier	EMEC	EM330	60609	2016/6/8	2017/6/7
Horn Antenna	ETC	MCTD 1209	DRH13M02003	2015/9/2	2016/9/1
Pre-Amplifier	MITEQ	AMF-6F-2604 00-40-8P	985646	2016/1/14	2017/1/13
Horn Antenna	EMCO	3116	26370	2016/1/15	2017/1/14
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	EZ-EMC (CCS-3A1RE)				

Conducted Emission Room # B					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
LISN	SCHWARZBECK	NSLK 8127	8127-541	2015/11/23	2016/11/22
Receiver	R&S	ESCI	101073	2015/9/9	2016/9/8
Software	CCS-3A1-CE				

Remark:

1. Each piece of equipment is scheduled for calibration once a year and Precision Dipole is scheduled for calibration once three years.
2. N.C.R. = No Calibration Request.

4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2575
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN,
R.O.C.
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

5.2 EQUIPMENT


Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, ridged waveguide, horn and/or Loop. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method	

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Zonar Connect Dock	ZONAR	20082	N/A	N/A	N/A	N/A
2	USB Dongle	Transcend	32 GB	N/A	N/A	N/A	N/A
3	Ear phone	Logitech	H150	N/A	N/A	N/A	N/A
4	SD Card	Kingston	4GB	N/A	N/A	N/A	N/A

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

7. FCC PART 15.247 REQUIREMENTS & RSS-247 REQUIREMENTS

7.1 99% BANDWIDTH AND 6 DB BANDWIDTH

Test Configuration

99% BANDWIDTH

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold.

6 dB Bandwidth

According to 15.247 photograph (a)(2) and RSS-247, Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW= 300kHz, Span = 30 MHz, Detector = Peak, Sweep = auto.
4. Set spectrum analyzer as OBW(99%) function.
5. Mark the peak frequency and

Test Data**IEEE 802.11b mode**

Channel	Frequency (MHz)	99% Bandwidth (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Limit (kHz)
Low	2412	14.0231	8.9870	>500
Mid	2437	14.0231	8.9440	
High	2462	14.0231	8.9870	

IEEE 802.11g mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Limit (kHz)
Low	2412	16.5412	16.0200	>500
Mid	2437	16.5412	16.0640	
High	2462	16.5412	16.0640	

IEEE 802.11n HT 20 MHz mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Limit (kHz)
Low	2412	17.7568	17.4960	>500
Mid	2437	17.7568	17.4960	
High	2462	17.7568	17.1920	

Test Plot


IEEE 802.11b mode (CH Low)

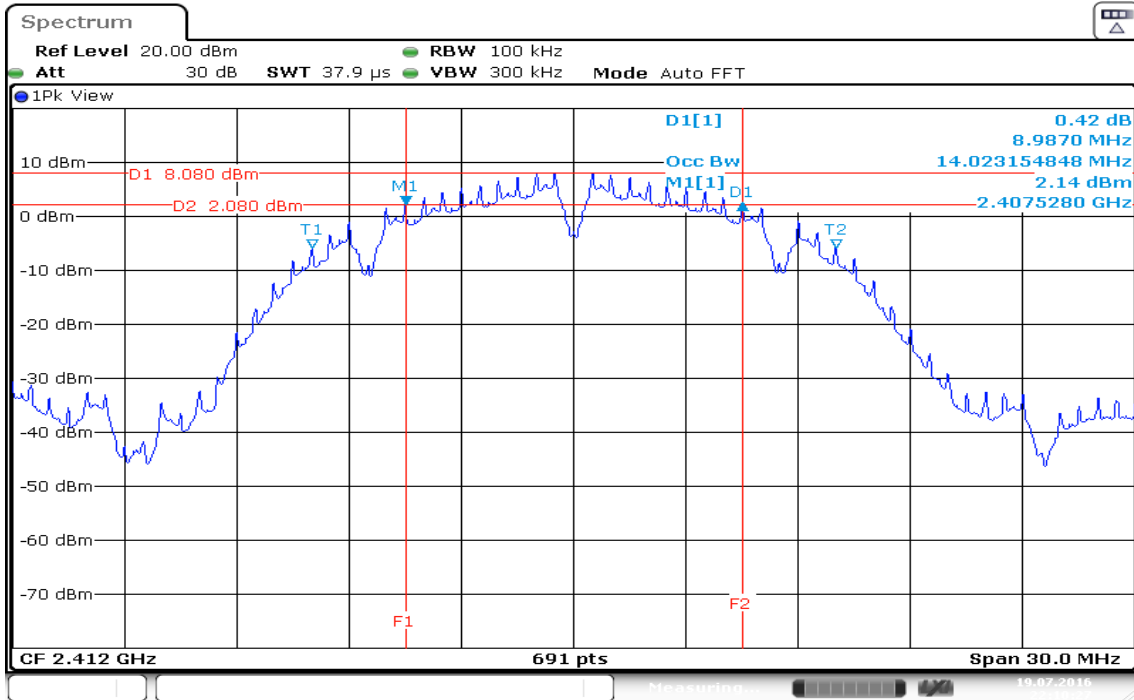

IEEE 802.11b mode (CH Mid)

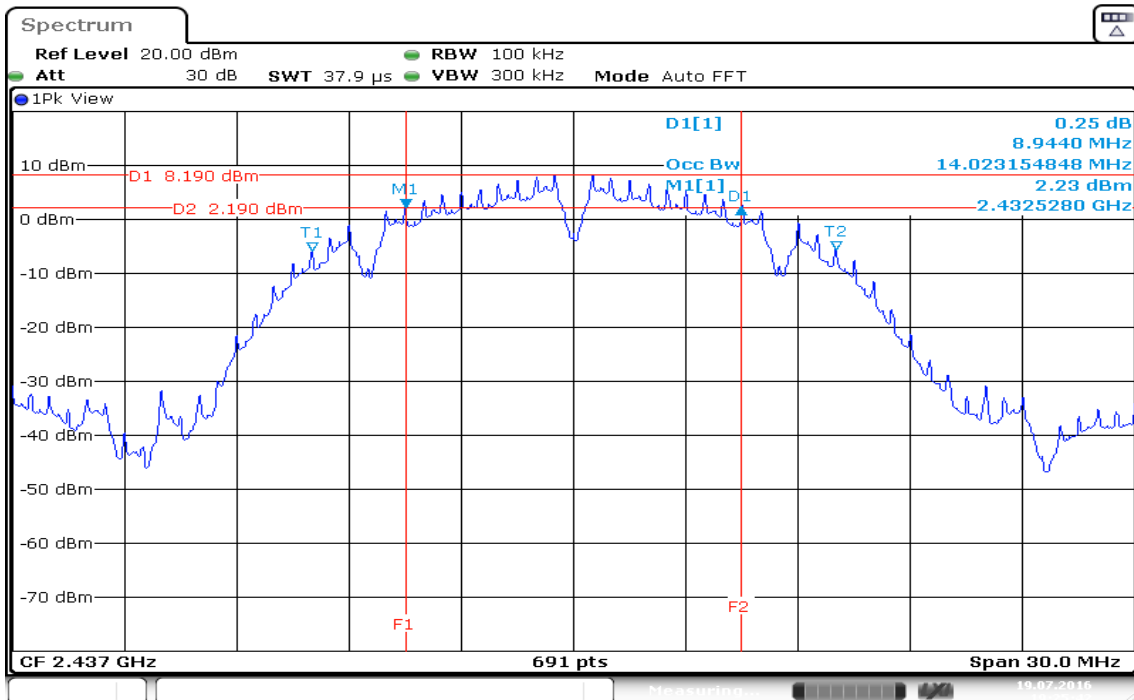


IEEE 802.11b mode (CH High)

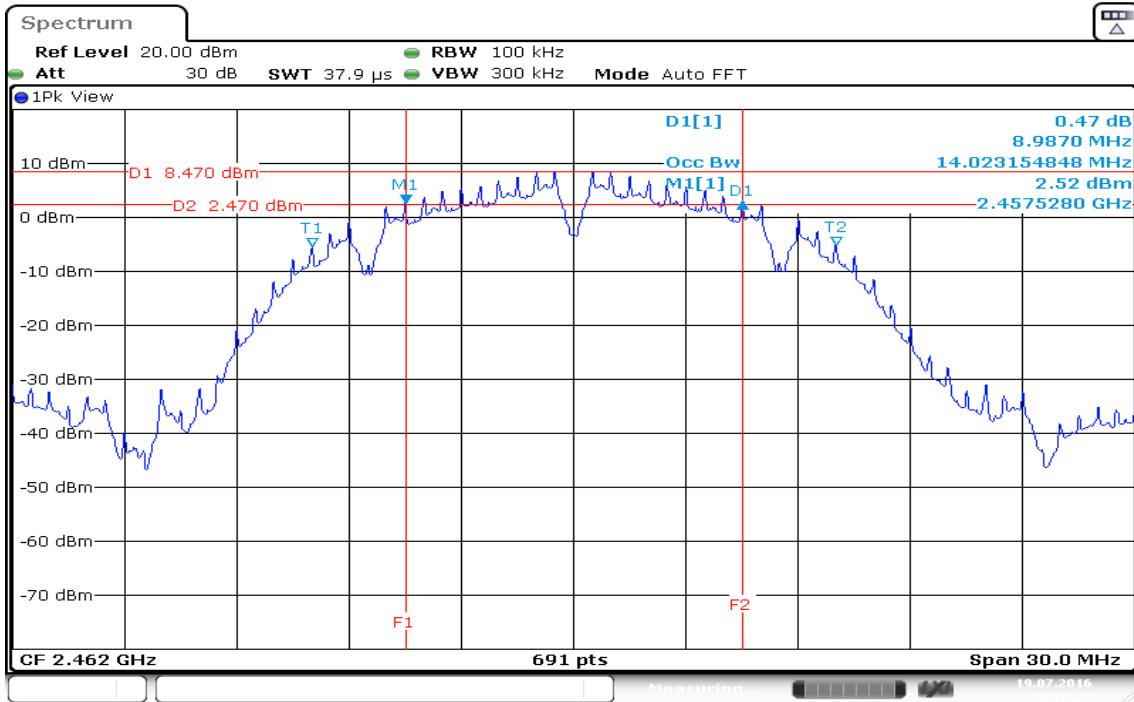


Date: 19.JUL.2016 19:52:28


IEEE 802.11g mode (CH Low)

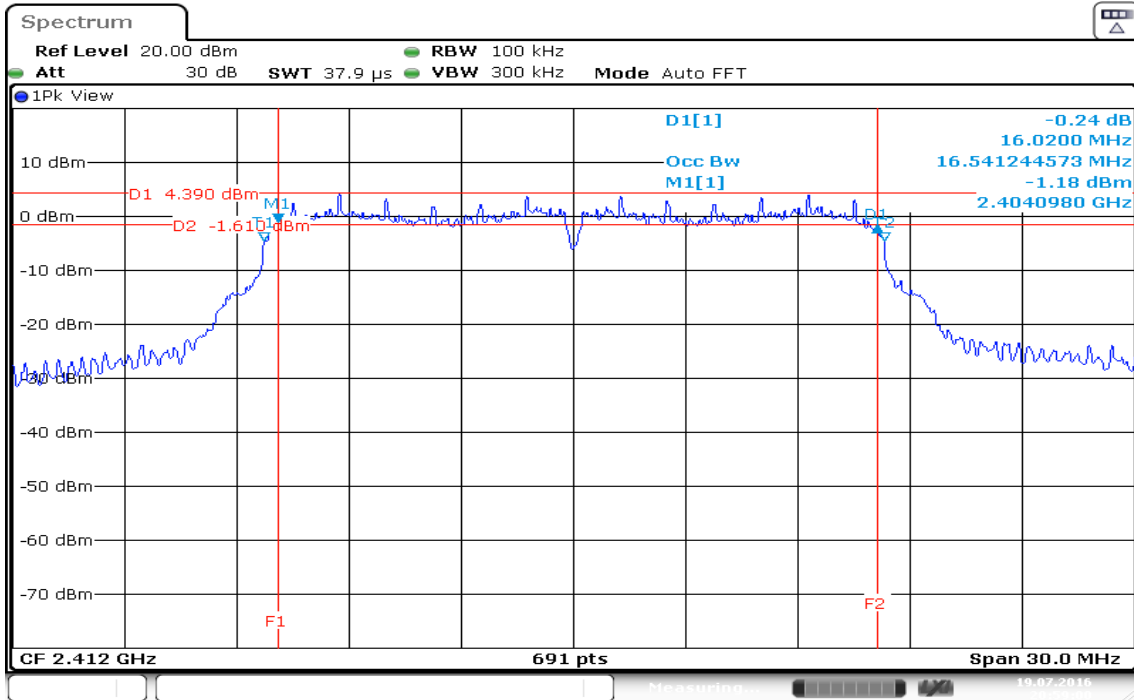

IEEE 802.11g mode (CH Mid)

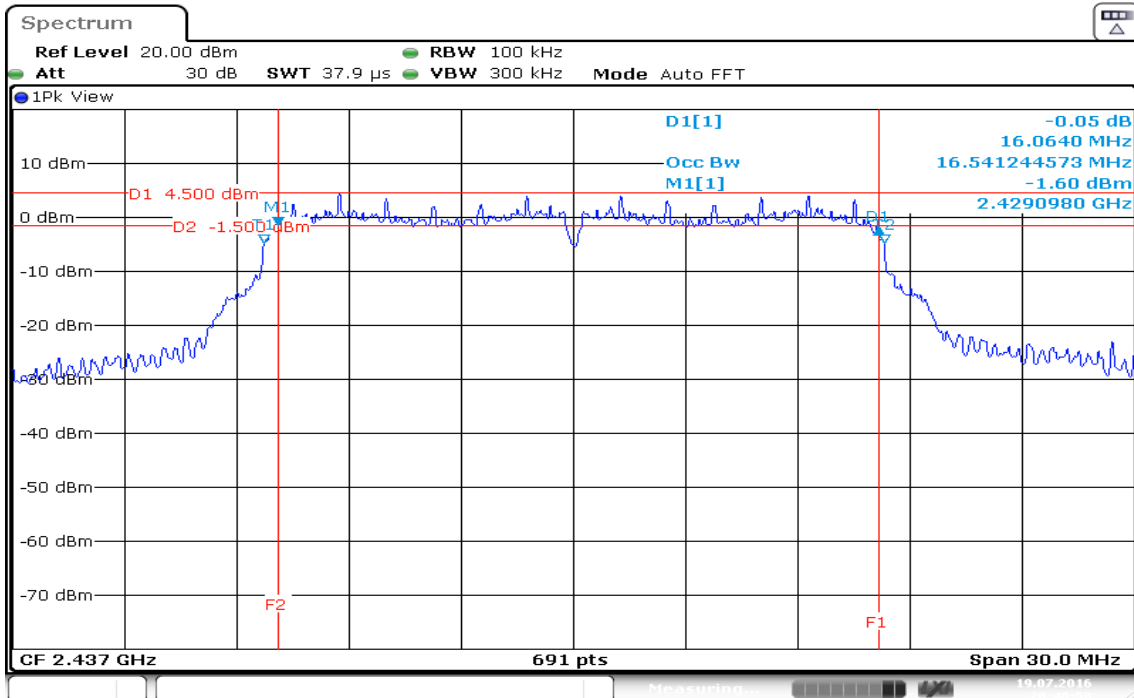


IEEE 802.11g mode (CH High)

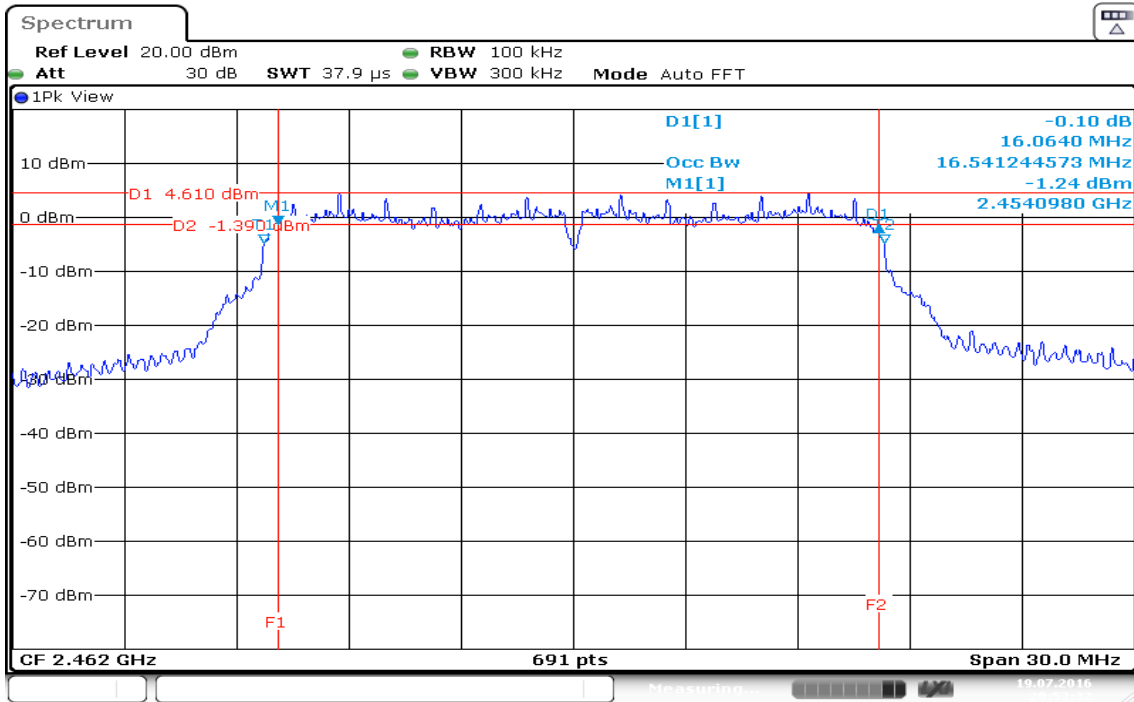


Date: 19.JUL.2016 20:53:32

IEEE 802.11n HT 20 MHz mode (CH Low)

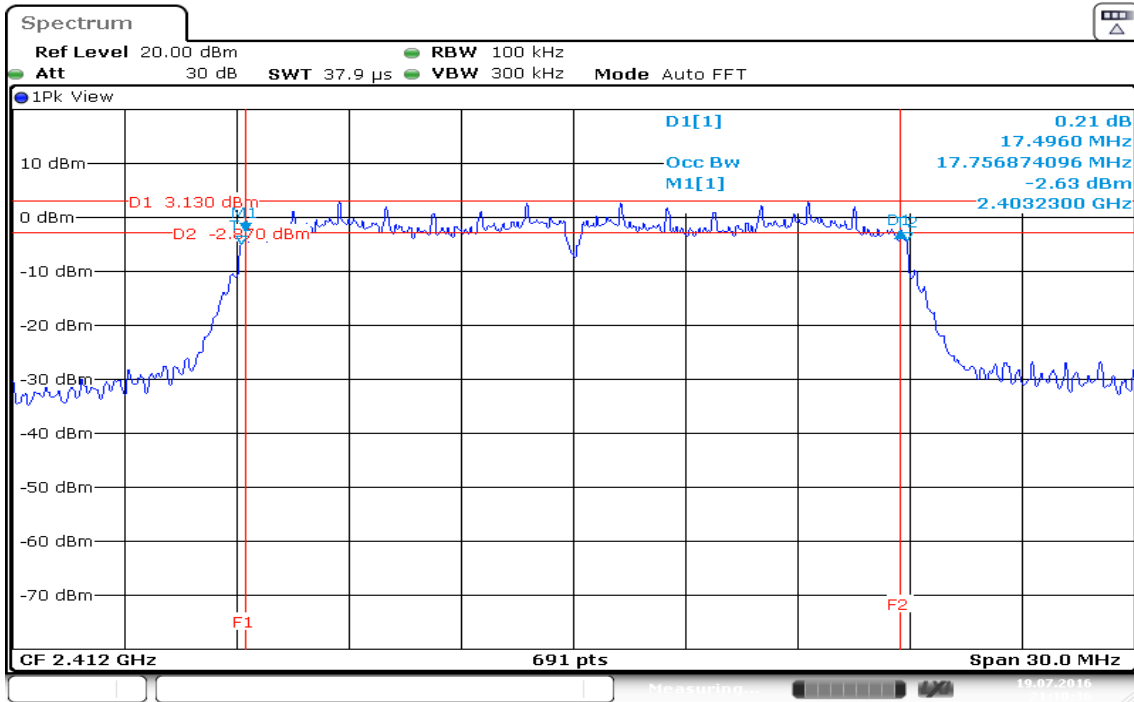


Date: 19.JUL.2016 21:10:36

IEEE 802.11n HT 20 MHz mode (CH Mid)

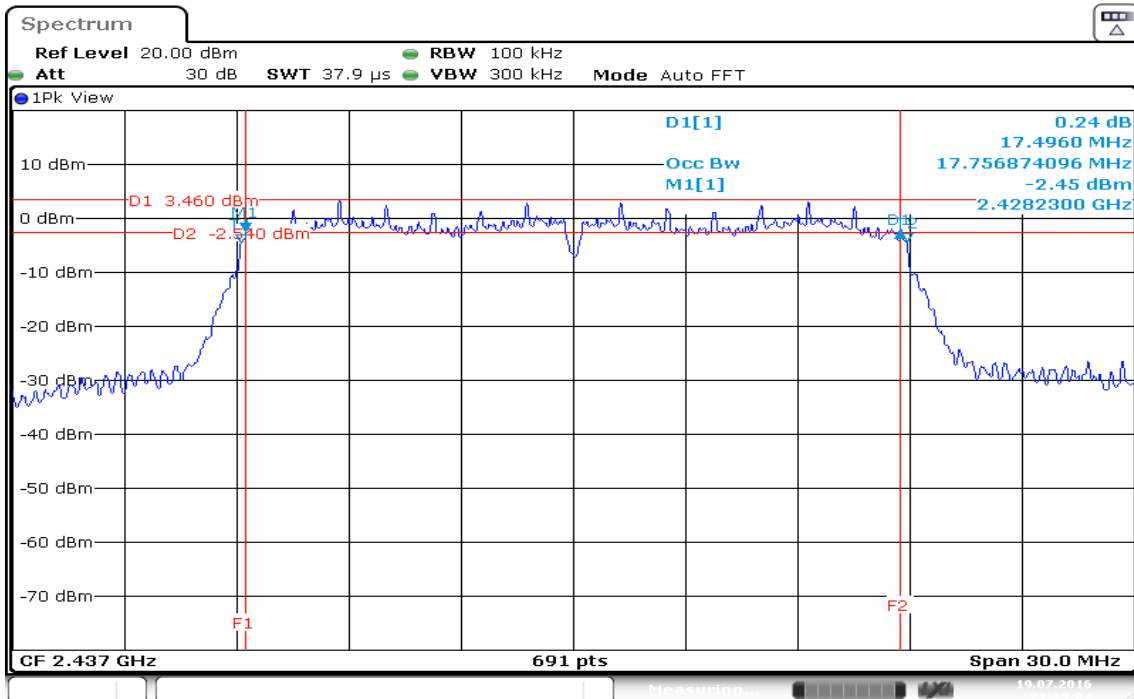

Date: 19.JUL.2016 21:19:04

IEEE 802.11n HT 20 MHz mode (CH High)

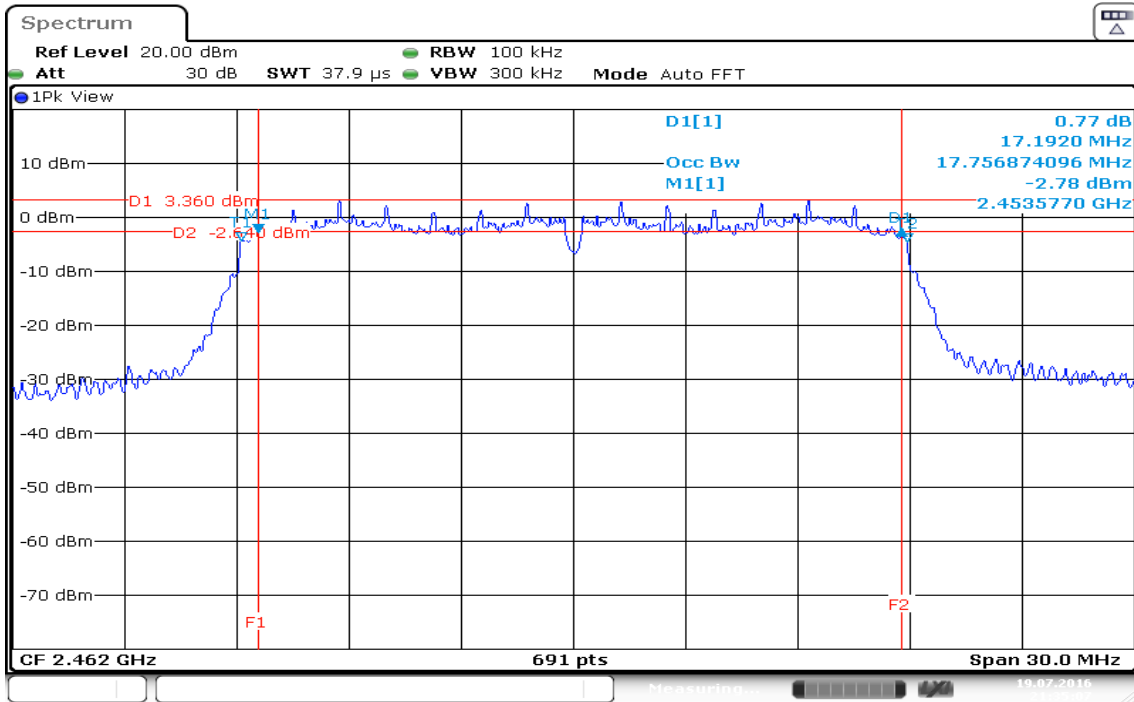


7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. According to RSS-247, for systems employing digital modulation techniques operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz, the maximum peak conducted output power shall not exceed 1 W.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	17.25	0.0531	30	PASS
Mid	2437	17.36	0.0545		PASS
High	2462	*17.72	0.0592		PASS

IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	*23.44	0.2208	30	PASS
Mid	2437	23.34	0.2158		PASS
High	2462	23.42	0.2198		PASS

IEEE 802.11n HT 20 MHz mode


Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	23.22	0.2099	30	PASS
Mid	2437	23.11	0.2046		PASS
High	2462	*23.27	0.2123		PASS

7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter.

TEST RESULTS

No non-compliance noted

Test Data**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	14.54	0.0284
Mid	2437	15.25	0.0335
High	2462	15.78	0.0378

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	14.67	0.0293
Mid	2437	14.59	0.0288
High	2462	14.66	0.0292

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Total Output Power (dBm)	Output Power (W)
Low	2412	13.69	0.0234
Mid	2437	13.70	0.0234
High	2462	13.70	0.0234


7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d) & RSS-247, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

For Radiated

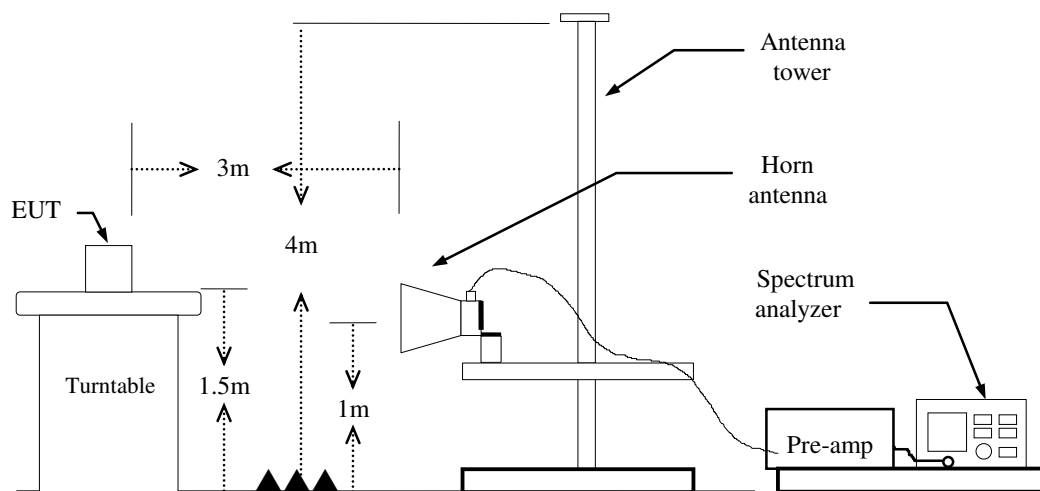


TEST PROCEDURE

For Radiated


1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz,
if duty cycle $\geq 98\%$, VBW=10Hz.
if duty cycle $< 98\%$ VBW=1/T.
IEEE 802.11b mode: $\geq 98\%$, VBW=10Hz
IEEE 802.11g mode: $\geq 98\%$, VBW=10Hz
IEEE 802.11n HT 20 MHz mode: $\geq 98\%$, VBW=10Hz
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.
6. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

Duty Cycle:


B mode:

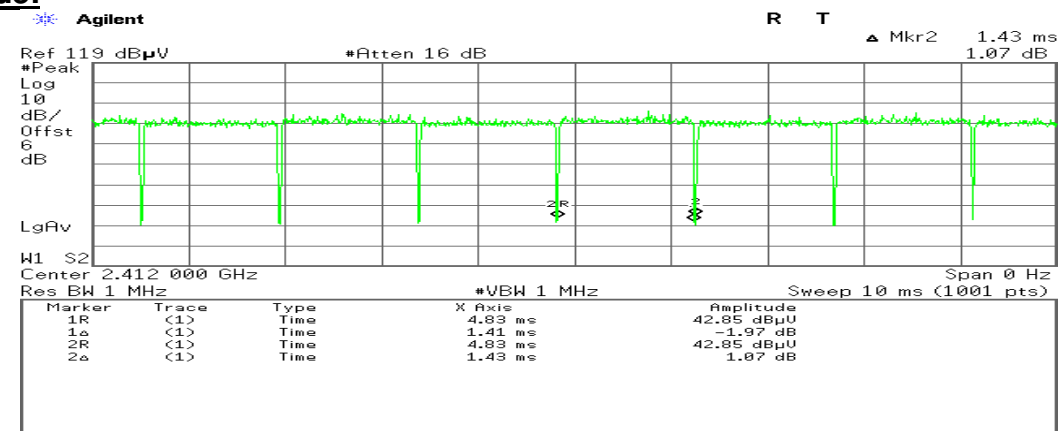

G mode:

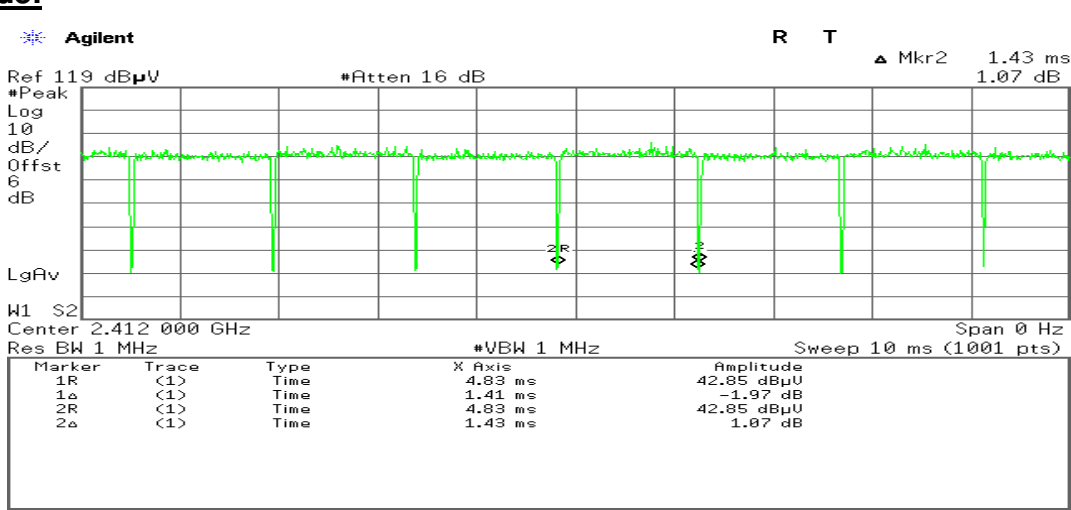

HT20 mode:

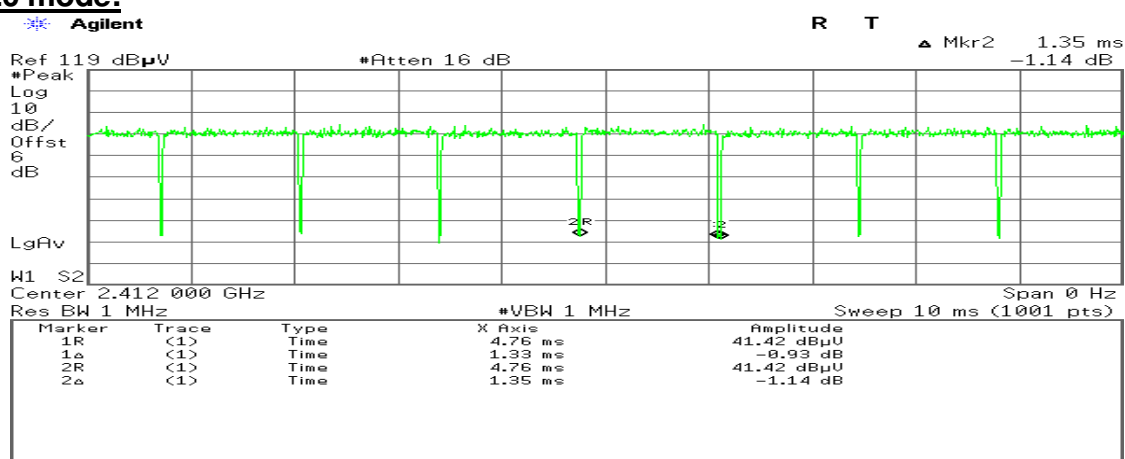


TEST RESULTS

Refer to attach spectrum analyzer data chart.

Band Edges


IEEE 802.11b Mode / CH Low

Detector mode: Peak

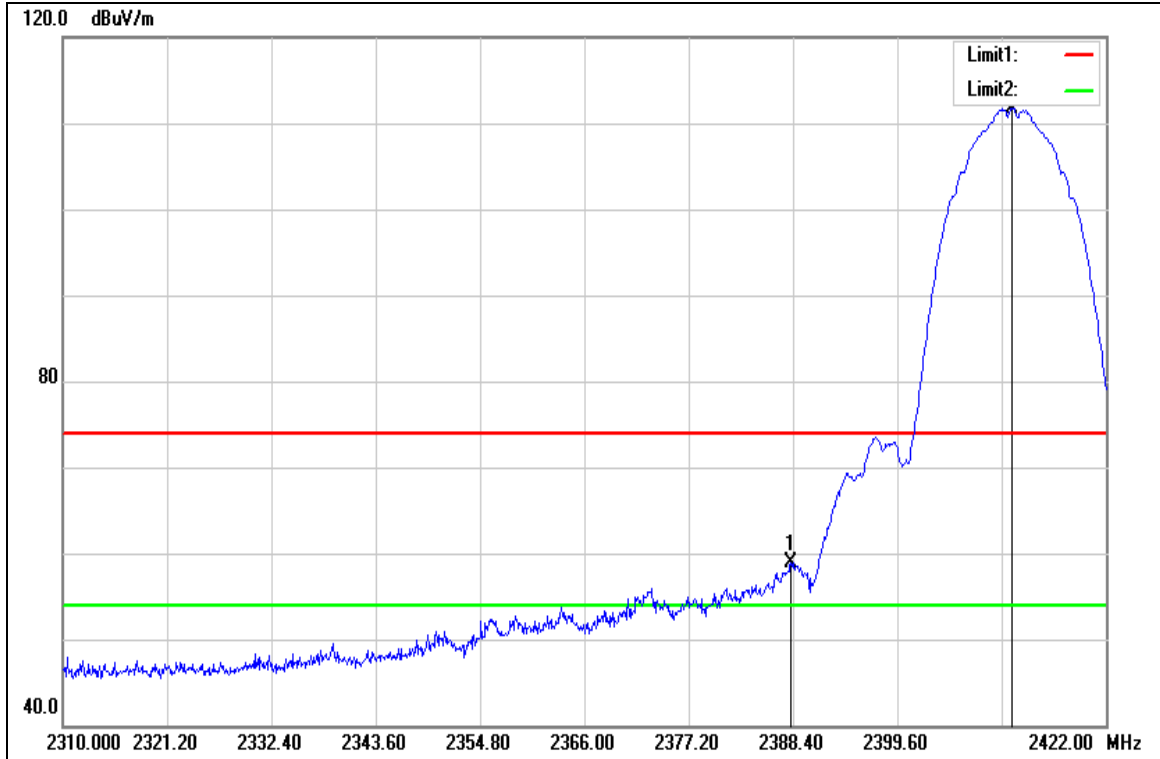

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.176	62.24	-3.29	58.95	74.00	-15.05	peak
2	2411.920	115.02	-3.24	111.78	-	-	peak

Detector mode: Average

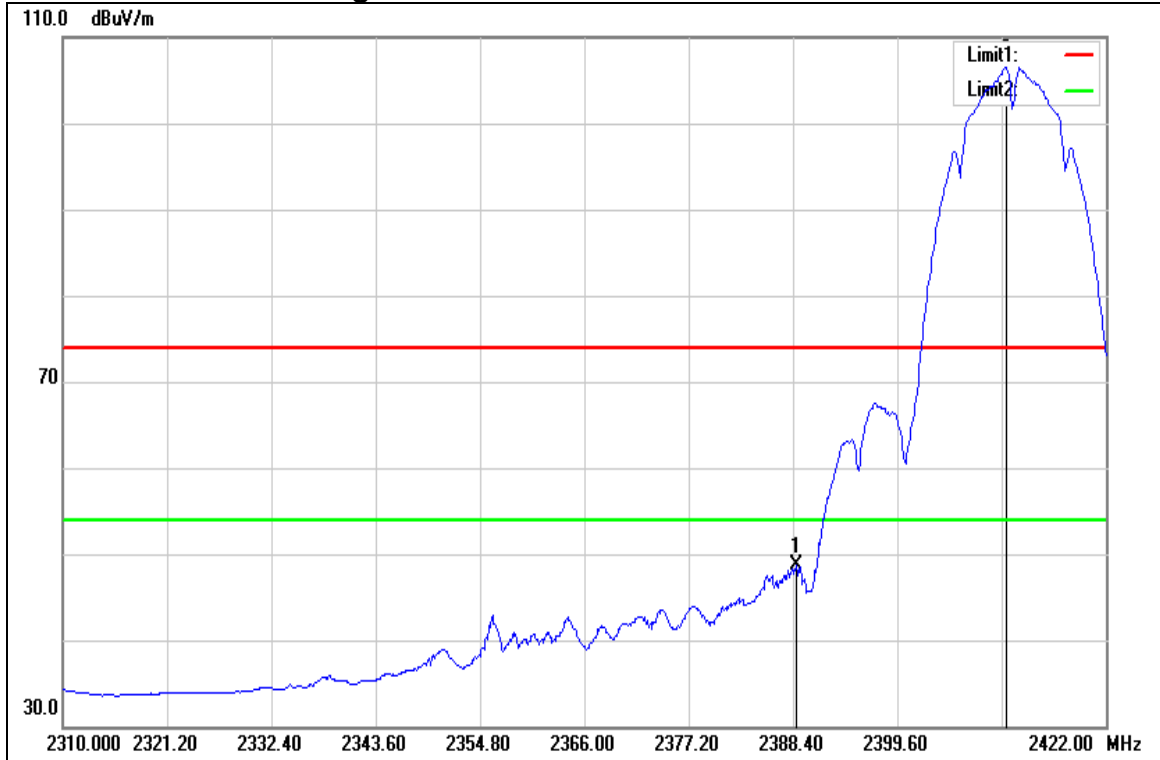


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.736	51.95	-3.29	48.66	54.00	-5.34	AVG
2	2411.248	109.67	-3.24	106.43	-	-	AVG

Band Edges


IEEE 802.11b Mode / CH High

Detector mode: Peak

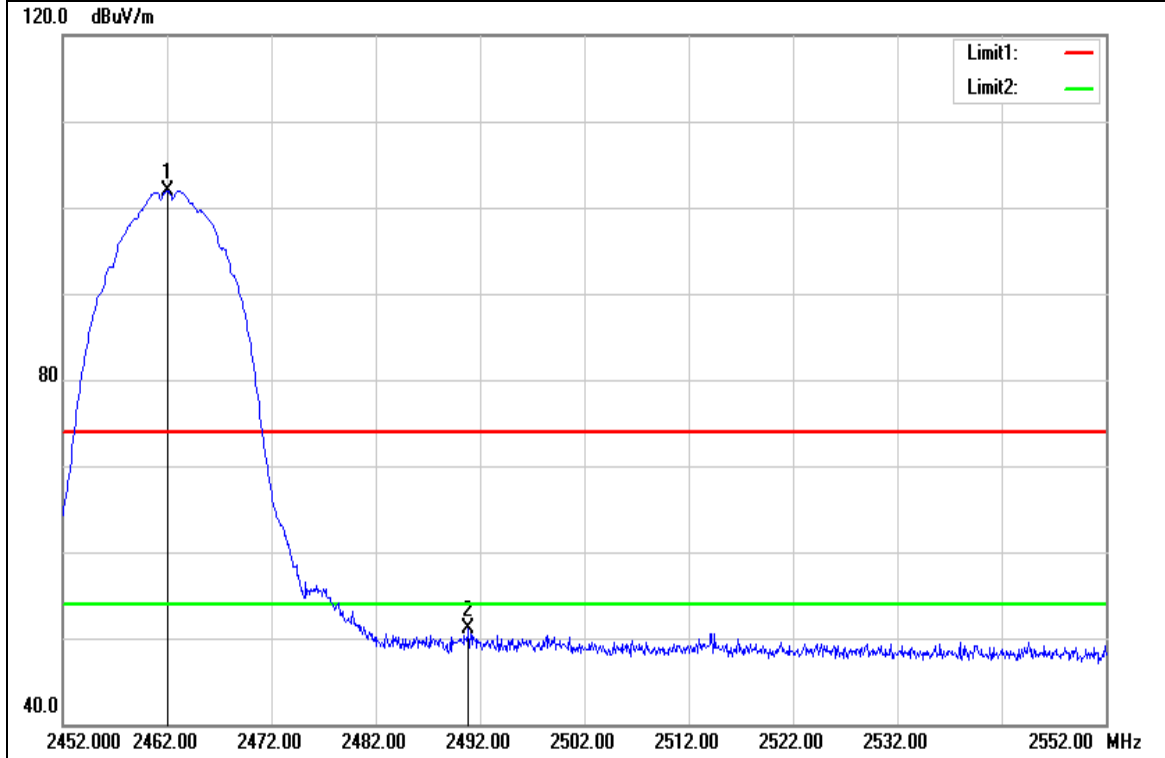

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.100	104.02	-2.10	101.92	-	-	peak
2	2490.900	53.09	-1.92	51.17	74.00	-22.83	peak

Detector mode: Average

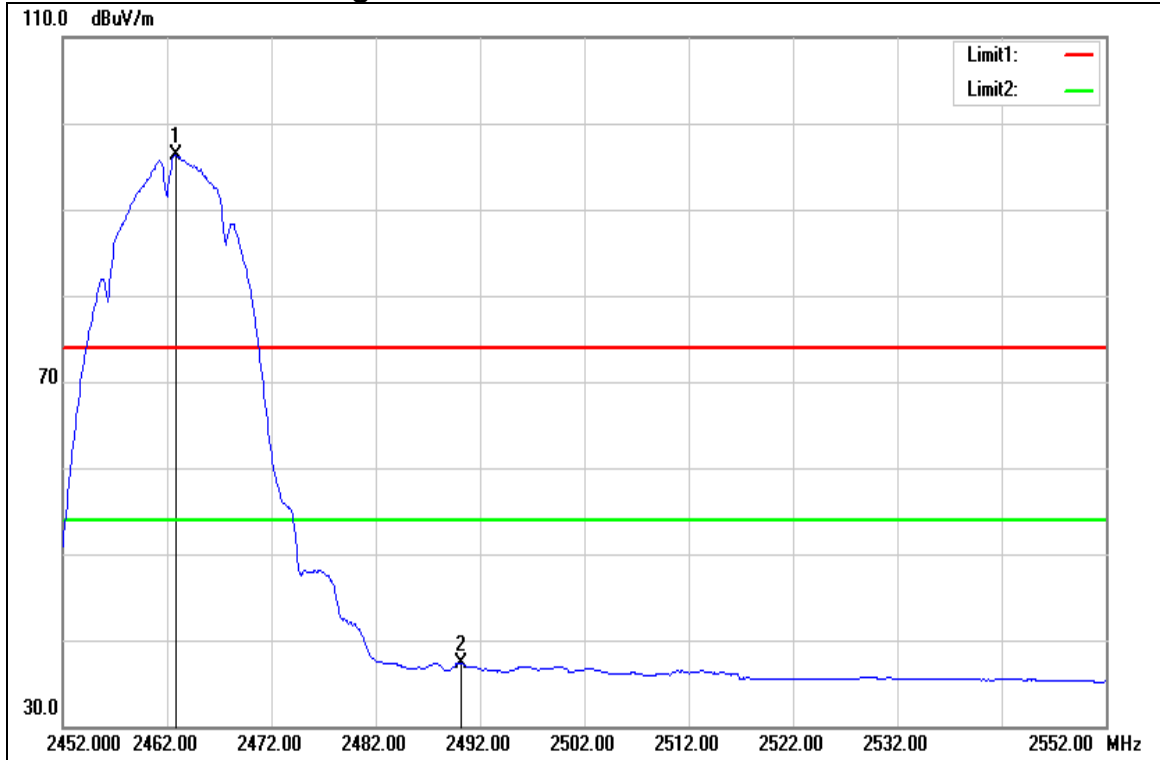


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.800	98.48	-2.09	96.39	-	-	AVG
2	2490.200	39.31	-1.93	37.38	54.00	-16.62	AVG

Band Edges


IEEE 802.11g Mode / CH Low

Detector mode: Peak

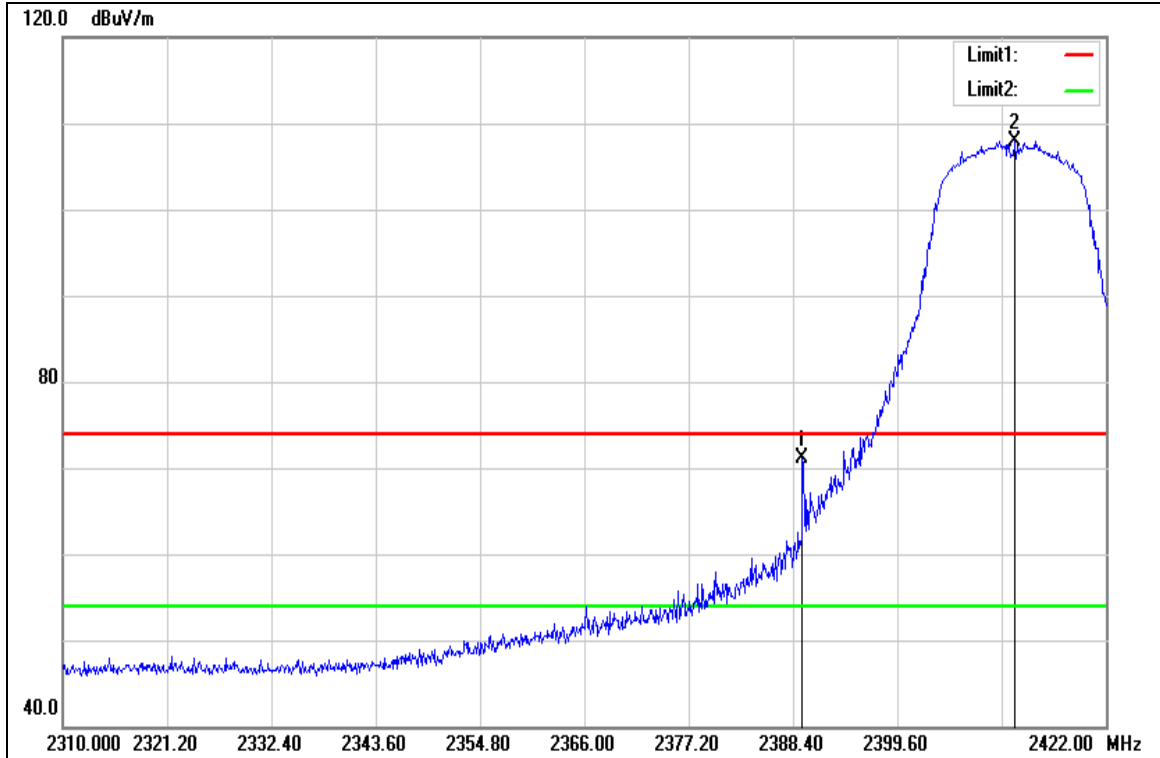

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.408	74.31	-3.28	71.03	74.00	-2.97	peak
2	2412.256	111.16	-3.23	107.93	-	-	peak

Detector mode: Average

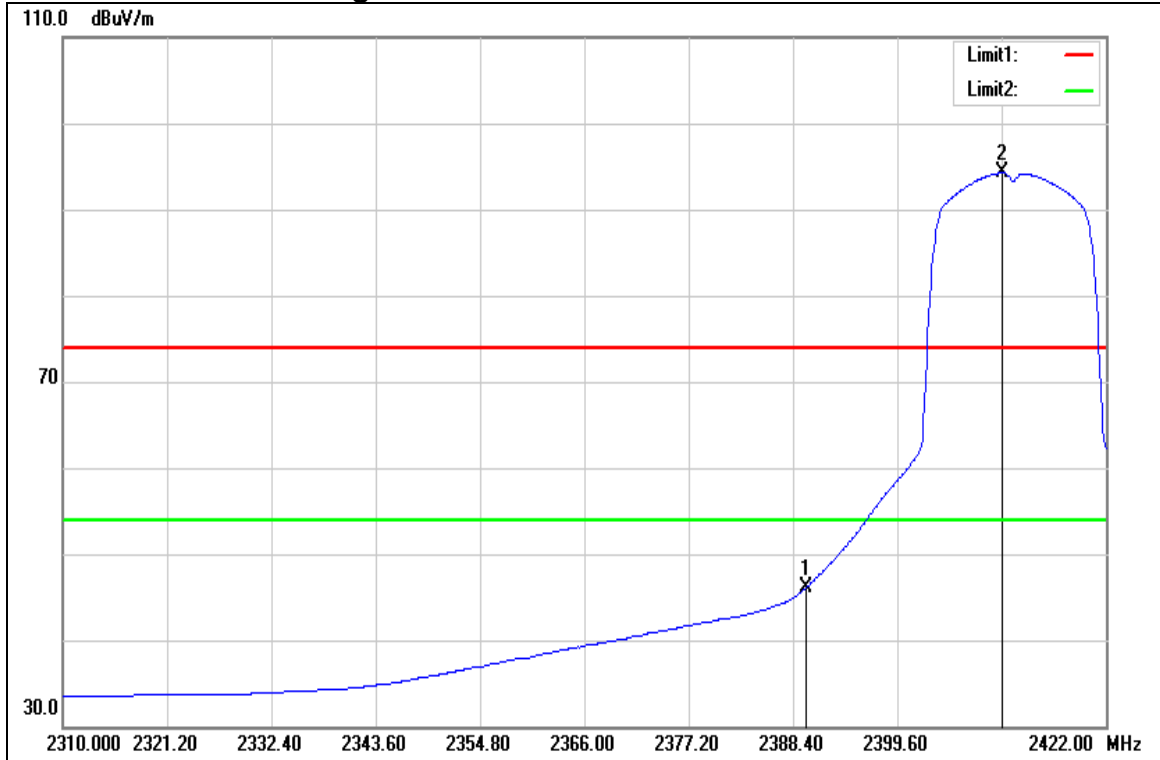


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.856	49.46	-3.28	46.18	54.00	-7.82	AVG
2	2410.800	97.57	-3.24	94.33	-	-	AVG

Band Edges


IEEE 802.11g Mode / CH High

Detector mode: Peak

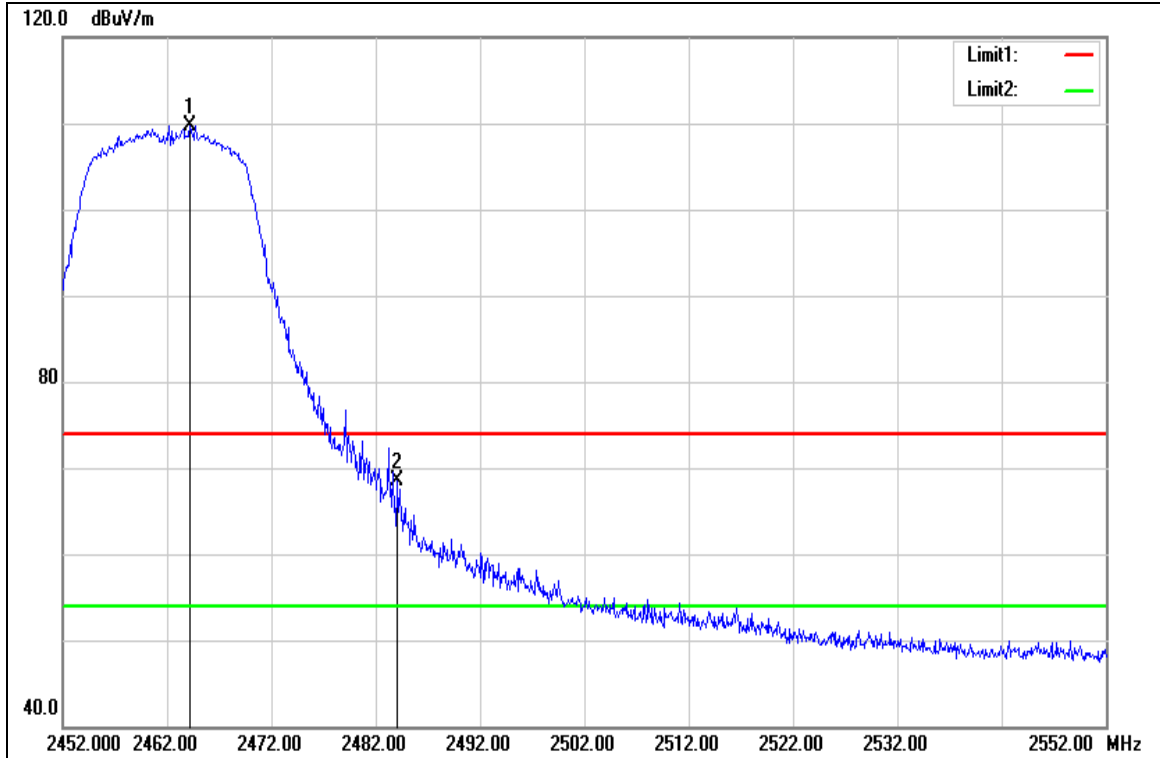

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.200	111.85	-2.09	109.76	-	-	peak
2	2484.100	70.54	-1.99	68.55	74.00	-5.45	peak

Detector mode: Average

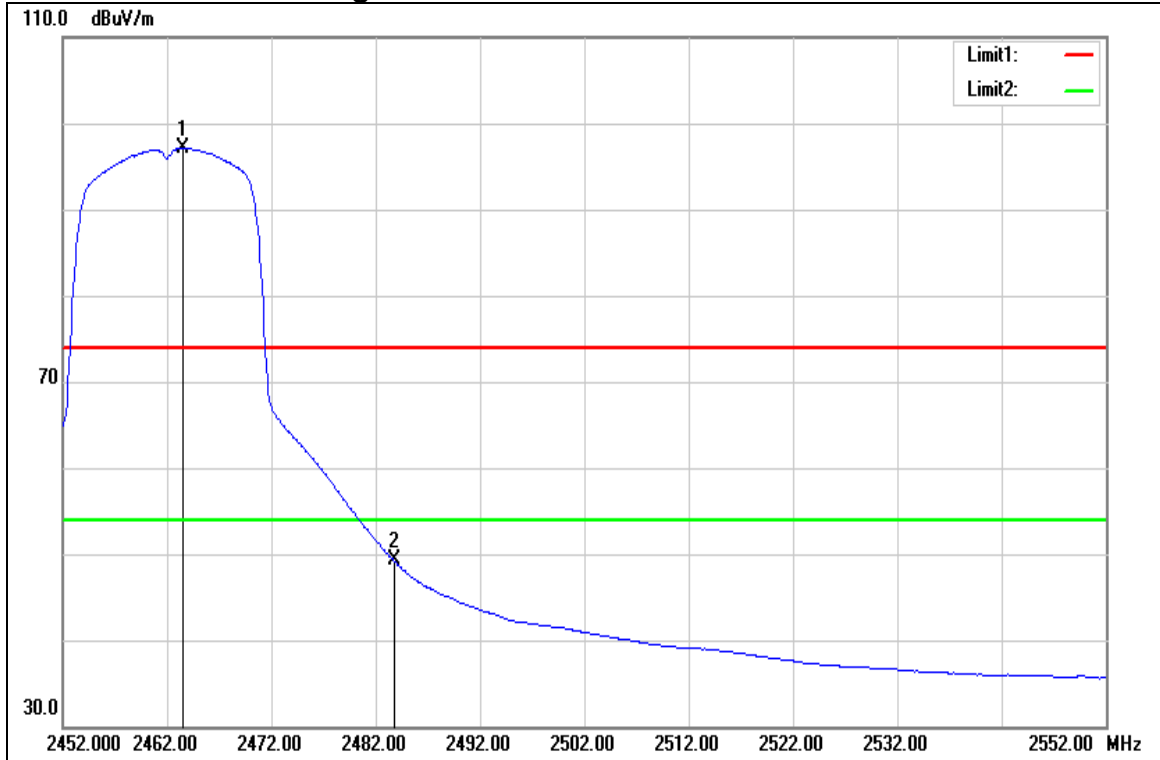


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.500	99.23	-2.09	97.14	-	-	AVG
2	2483.800	51.19	-1.99	49.20	54.00	-4.80	AVG

Band Edges


IEEE 802.11n HT 20 MHz Mode / CH Low

Detector mode: Peak

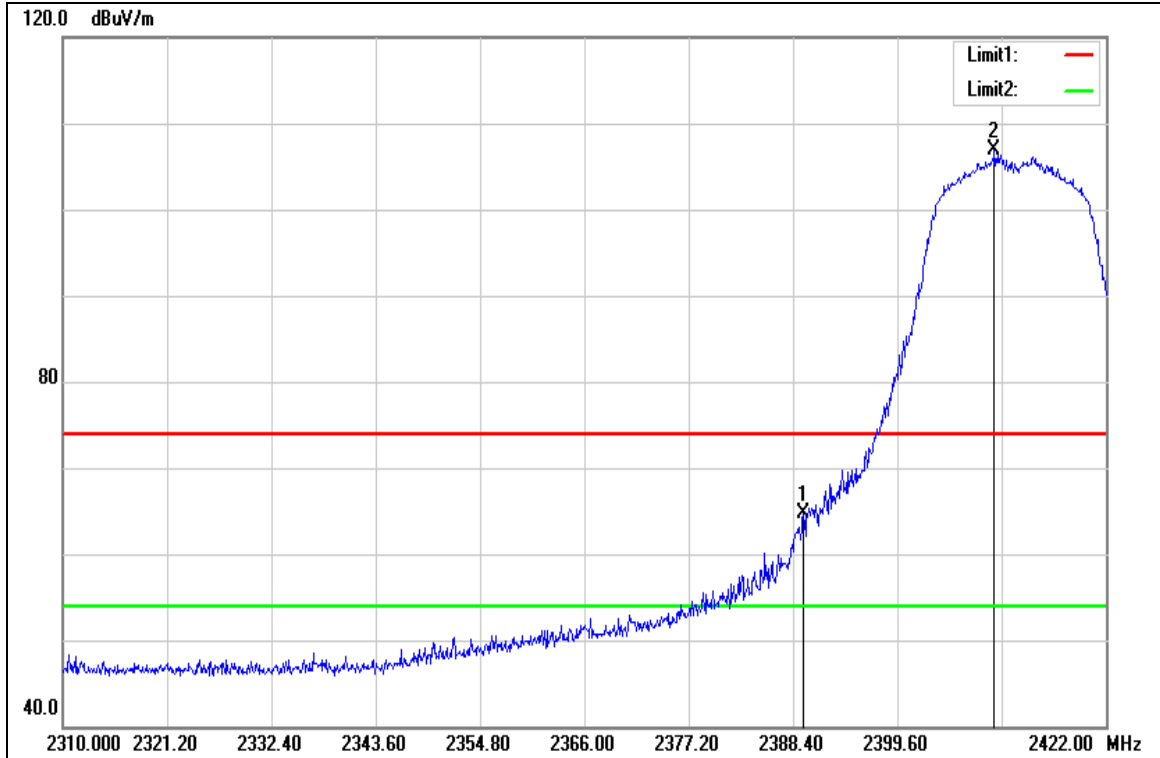

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.520	67.95	-3.28	64.67	74.00	-9.33	peak
2	2410.016	110.12	-3.24	106.88	-	-	peak

Detector mode: Average

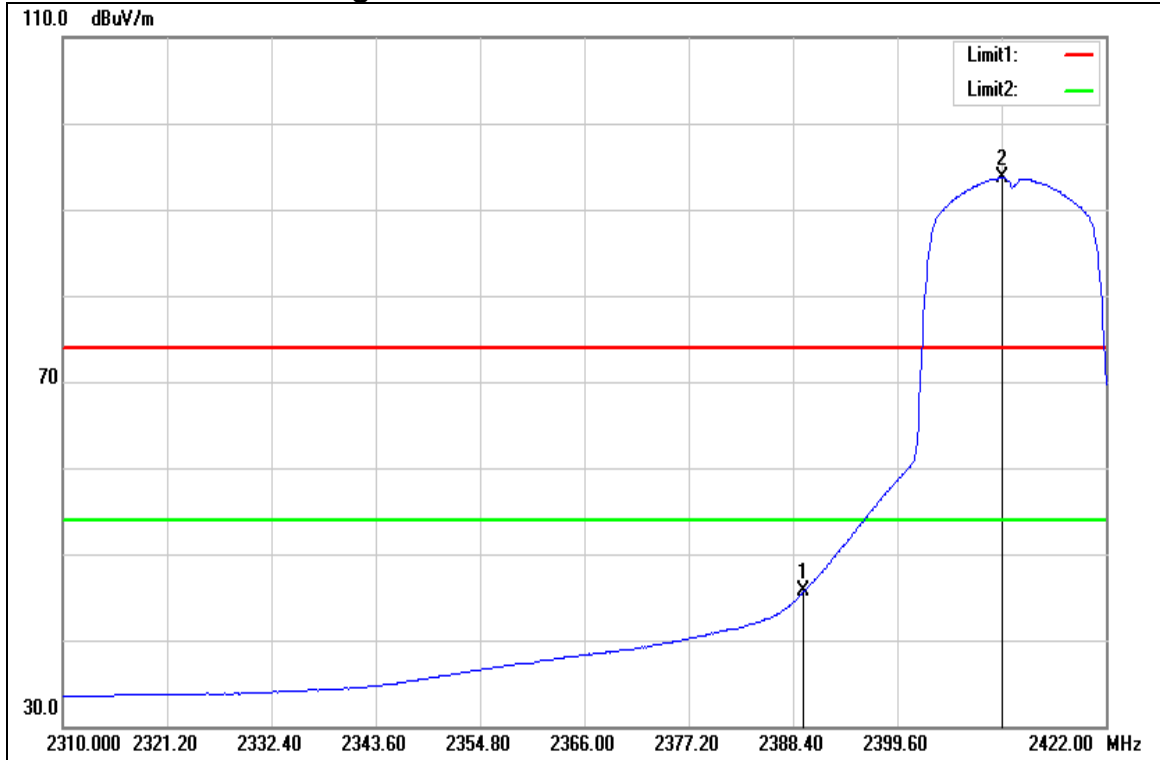


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.520	48.92	-3.28	45.64	54.00	-8.36	AVG
2	2410.800	96.97	-3.24	93.73	-	-	AVG

Band Edges


IEEE 802.11n HT 20 MHz Mode / CH High

Detector mode: Peak

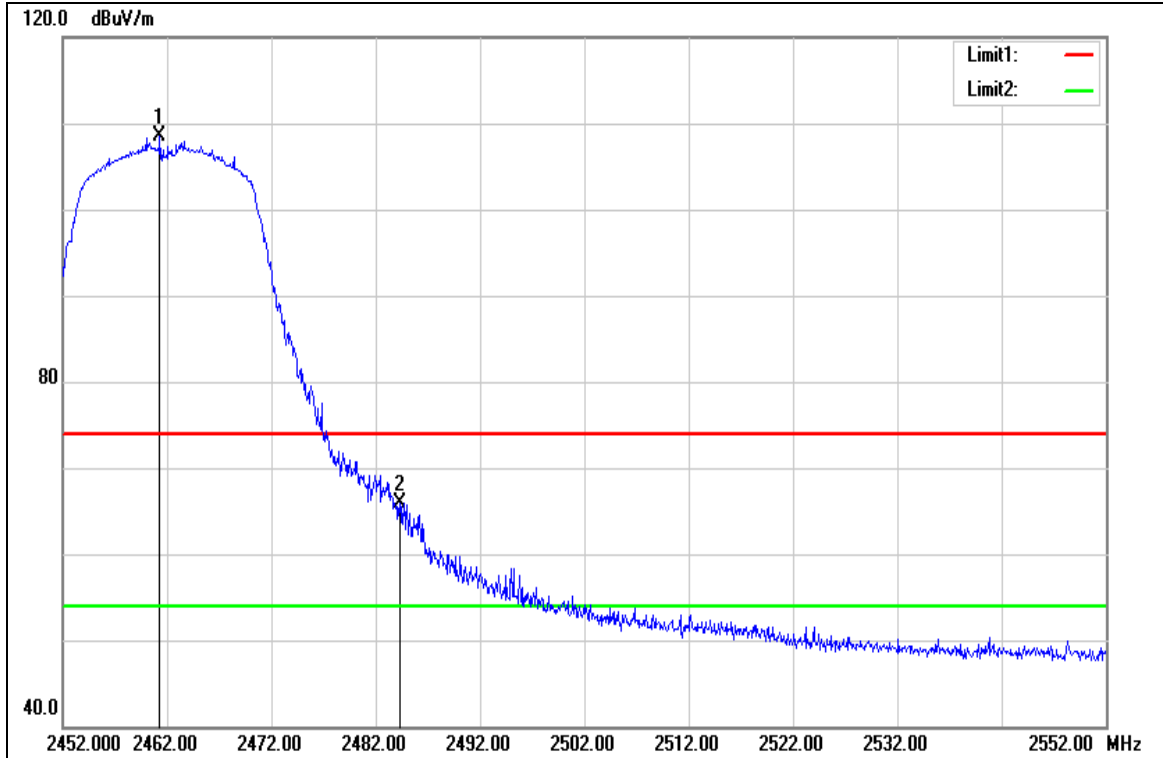

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.300	110.68	-2.10	108.58	-	-	peak
2	2484.300	67.83	-1.99	65.84	74.00	-8.16	peak

Detector mode: Average

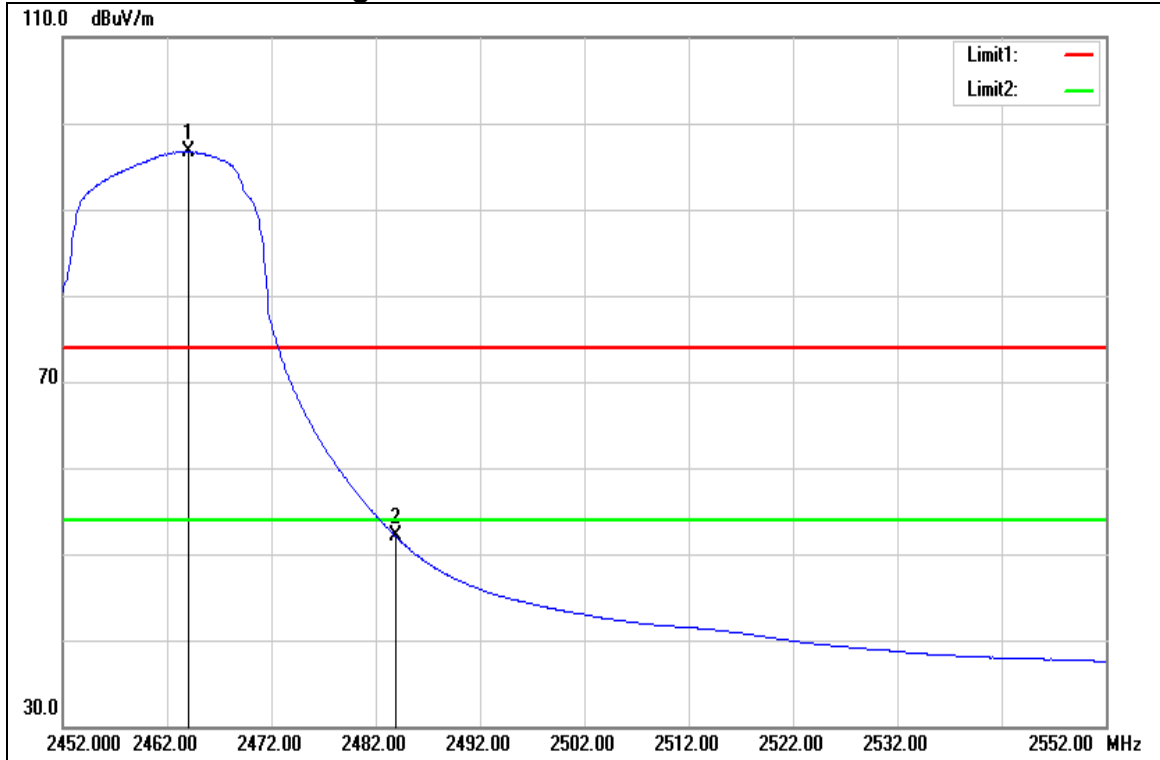

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.000	98.81	-2.09	96.72	-	-	AVG
2	2483.900	54.06	-1.99	52.07	54.00	-1.93	AVG

7.5 CONDUCTED BAND EDGE AND SPURIOUS EMISSION

In any 100 kHz bandwidth outside the authorized frequency band,

Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)


TEST PROCEDURE

According to KDB 558074 D01 v03r0


Test Data

Mode: IEEE 802.11b


Low CH_100kHz PSD reference Level

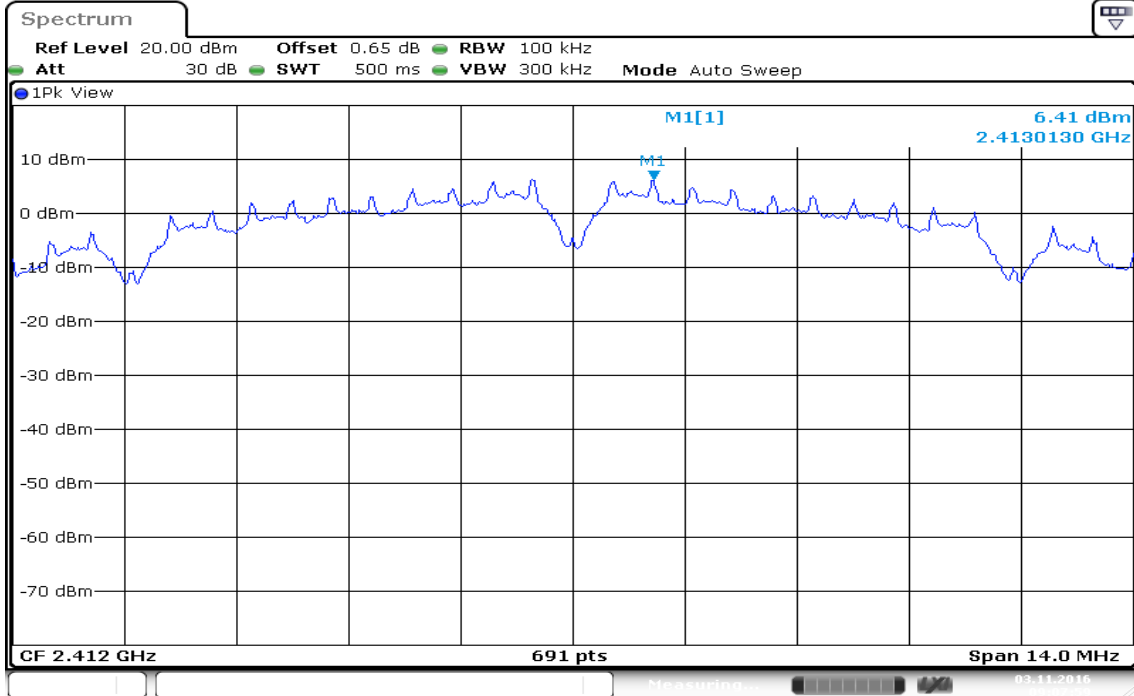

Low CH_Conducted Band edge

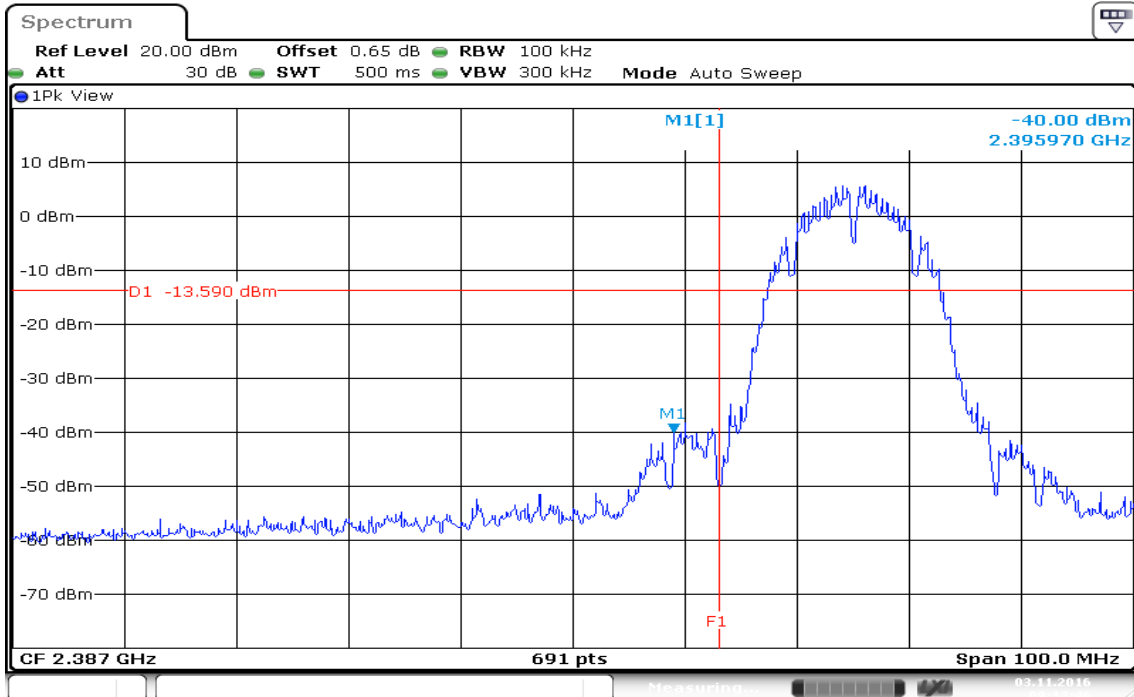


Low CH_Conducted spurious emission

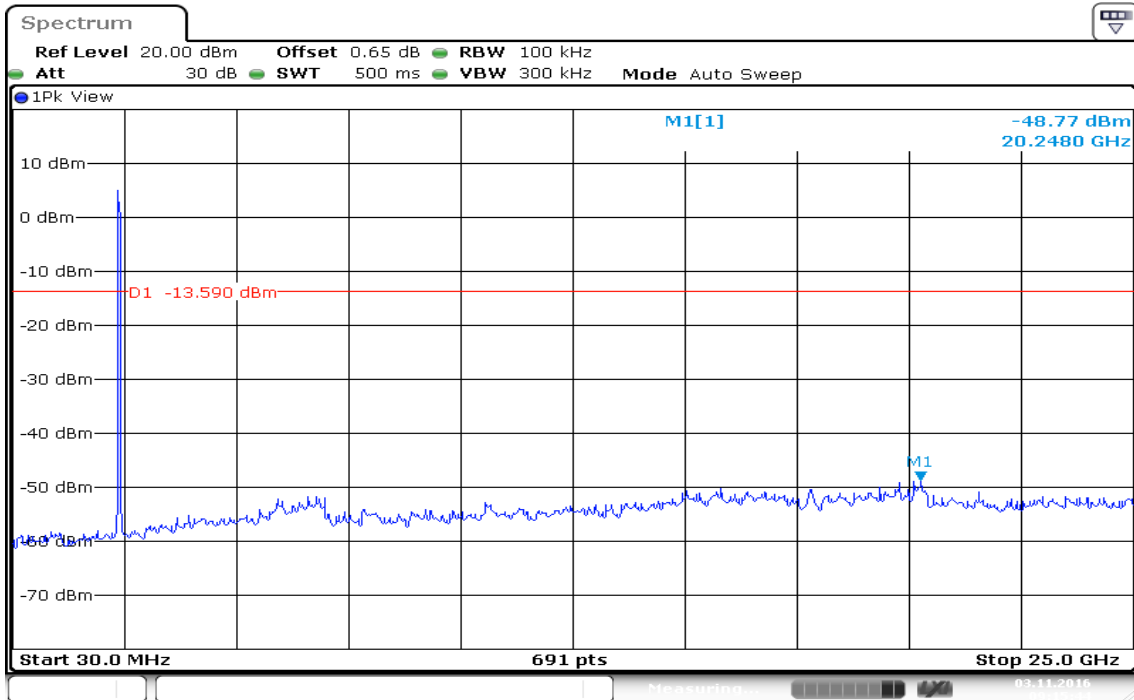


Date: 3 NOV 2016 09:15:44


Mid CH_100kHz PSD reference Level

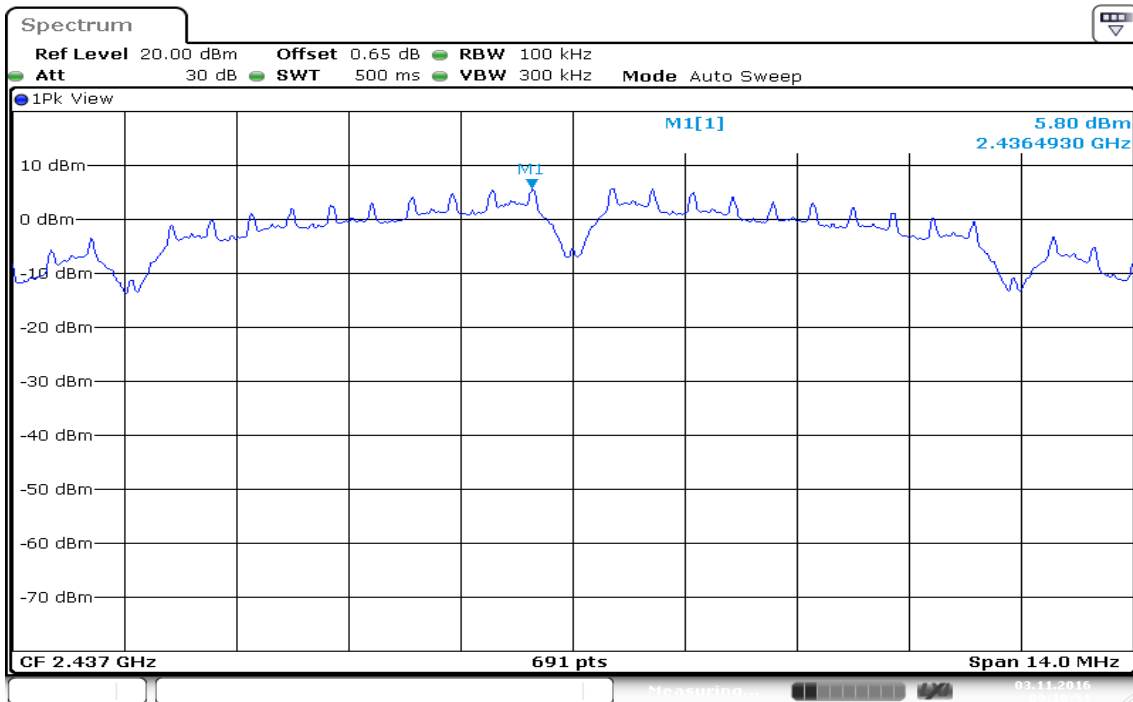

Mid CH_ Conducted spurious emission

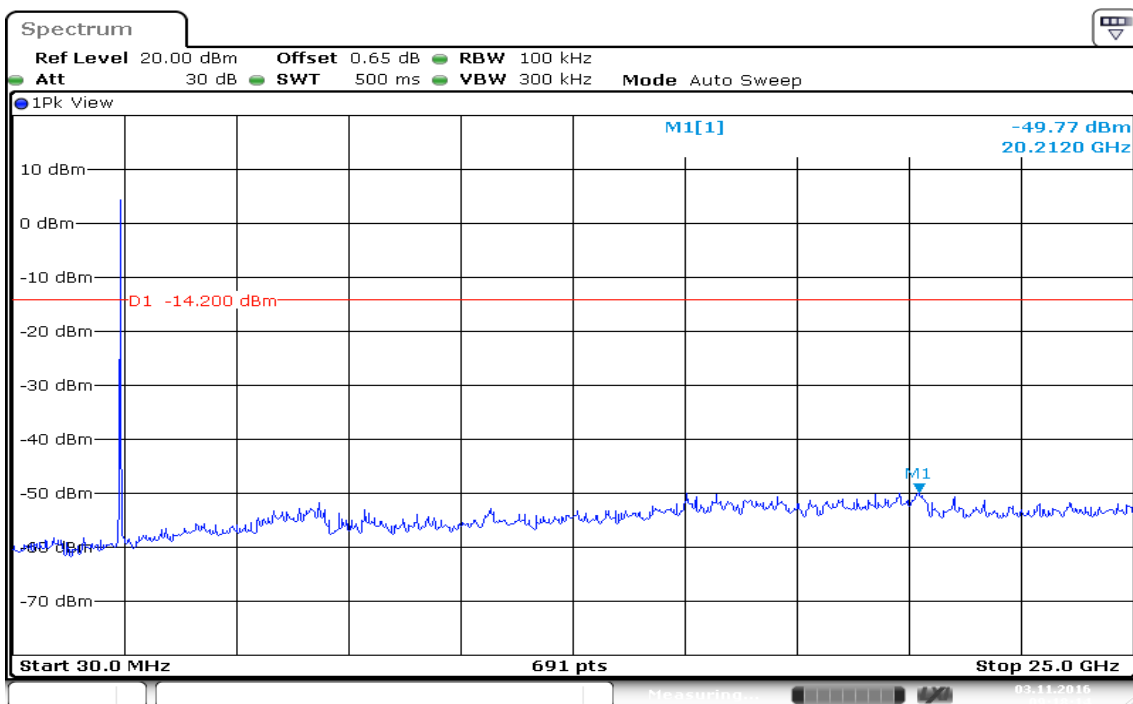


High CH_100kHz PSD reference Level

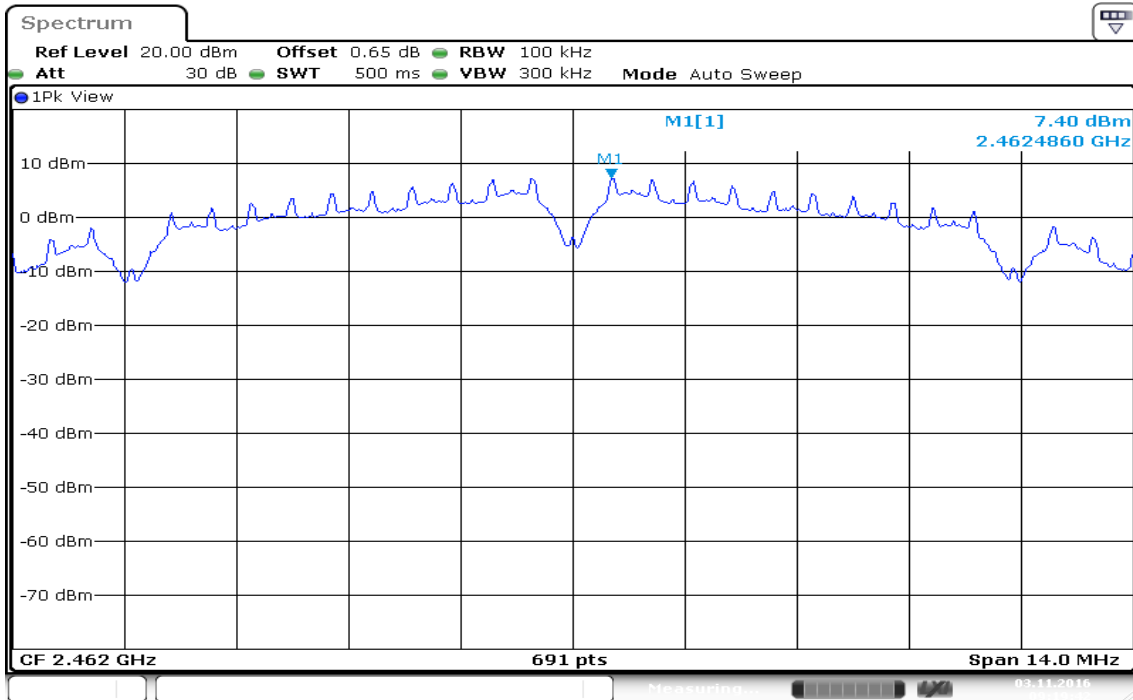


Date: 3 NOV 2016 09:19:43

High CH_Conducted Band edge

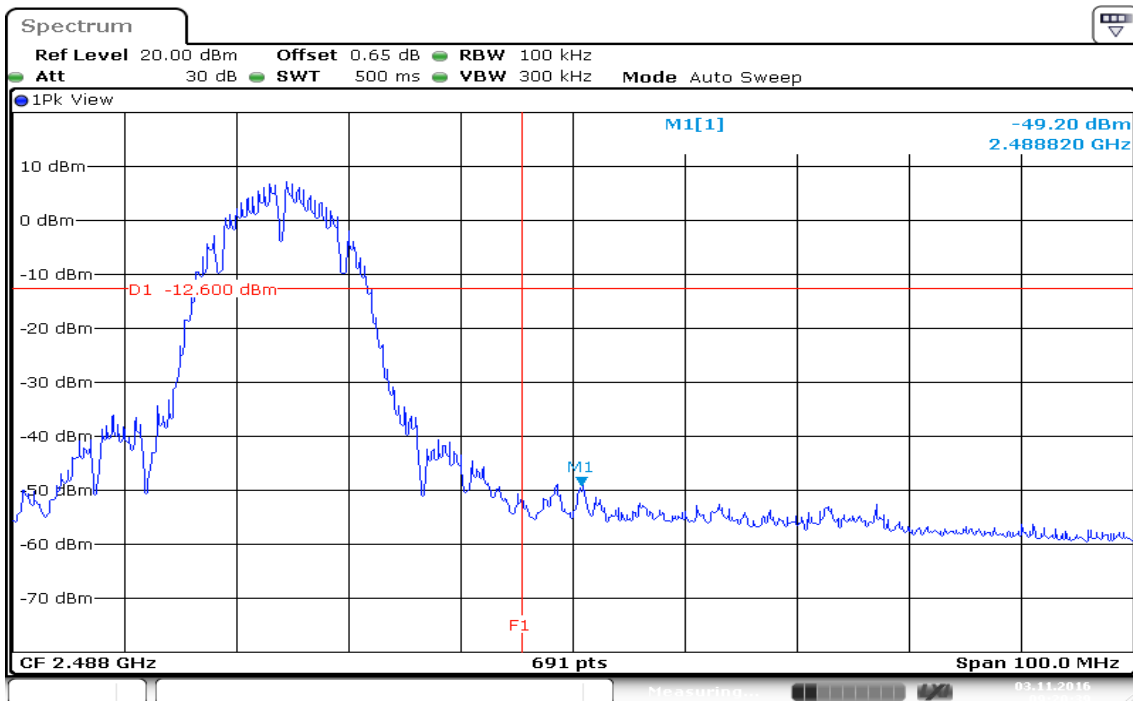

Date: 3 NOV 2016 09:20:40


High CH_ Conducted spurious emission

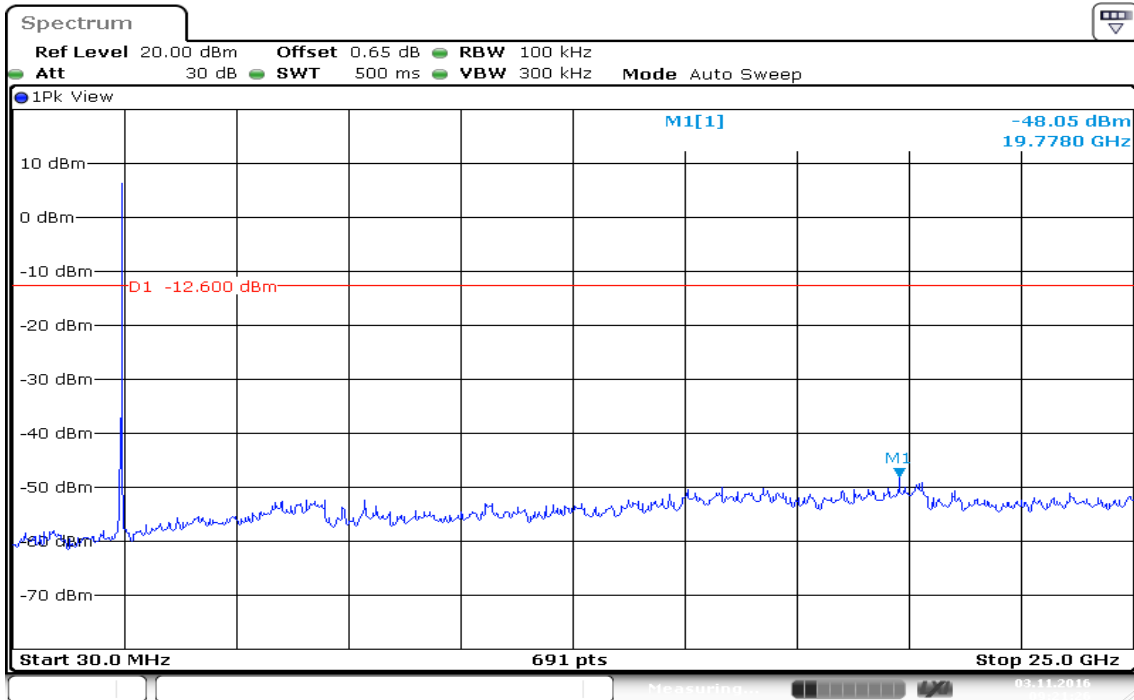


Date: 3 NOV 2016 09:21:26

Mode: IEEE 802.11g


Low CH_100kHz PSD reference Level

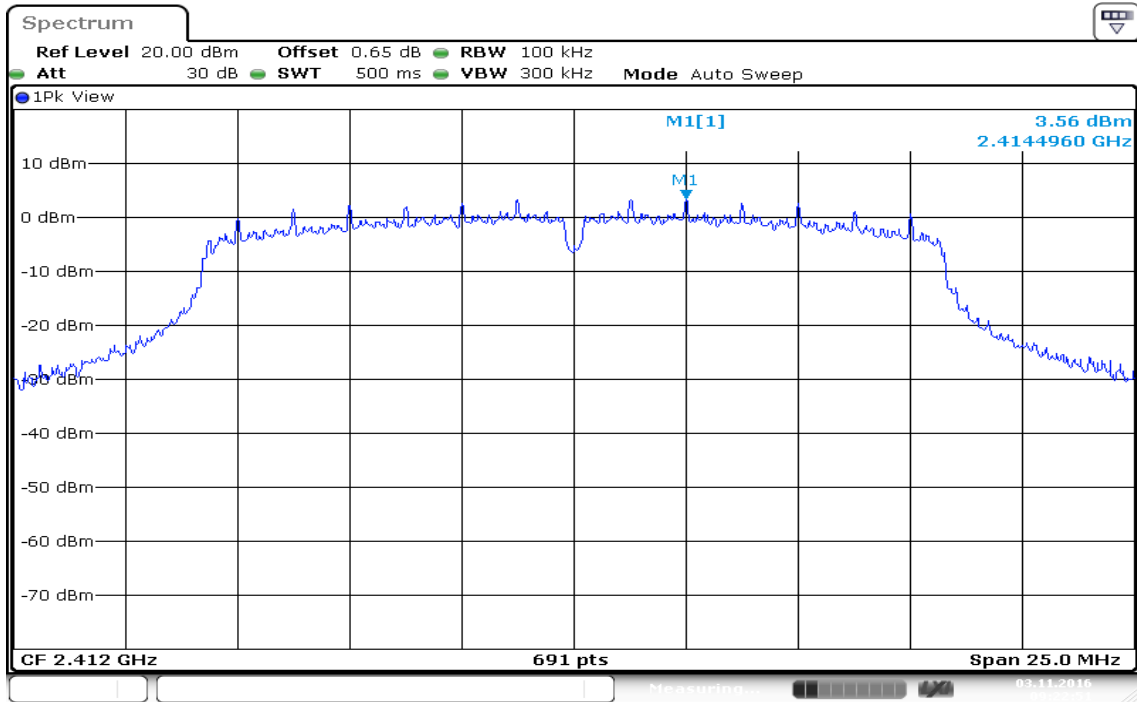

Low CH_Conducted Band edge

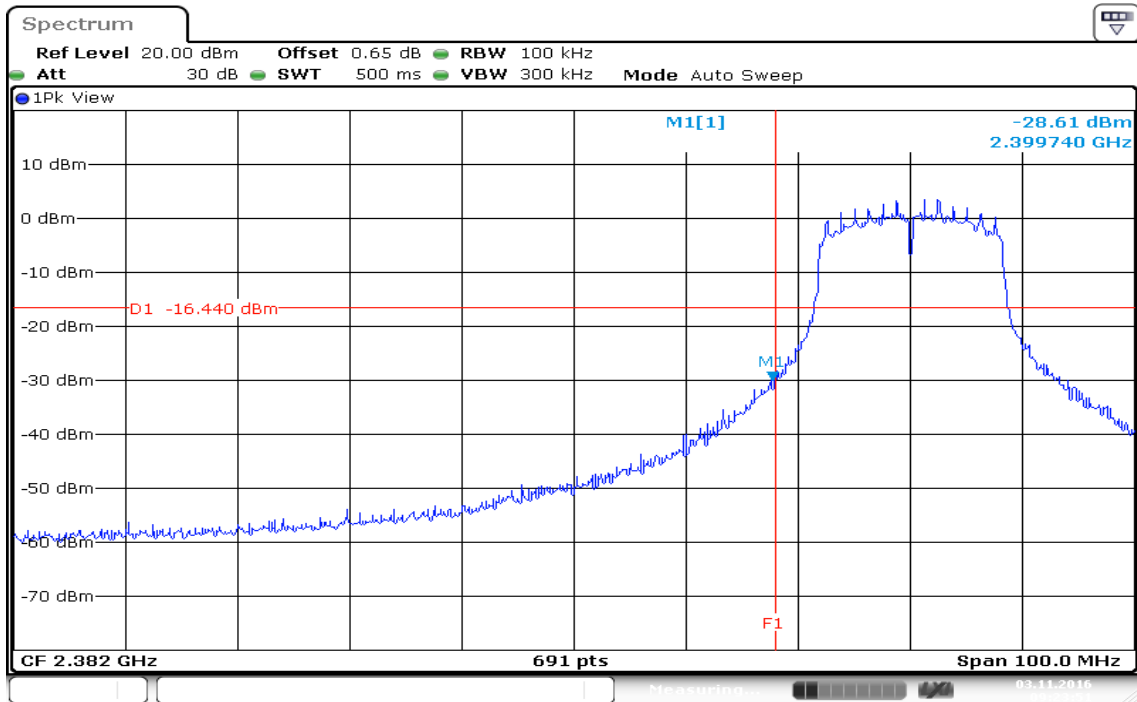


Low CH_Conducted spurious emission

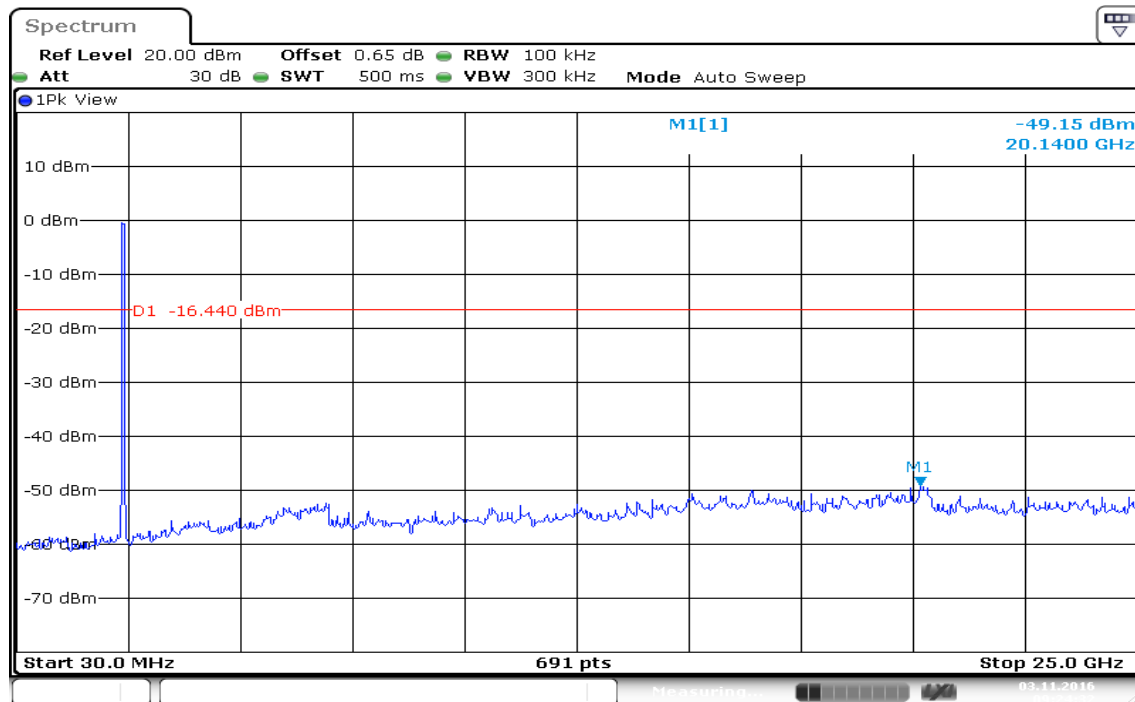


Date: 3 NOV 2016 09:24:33

Mid CH_100kHz PSD reference Level

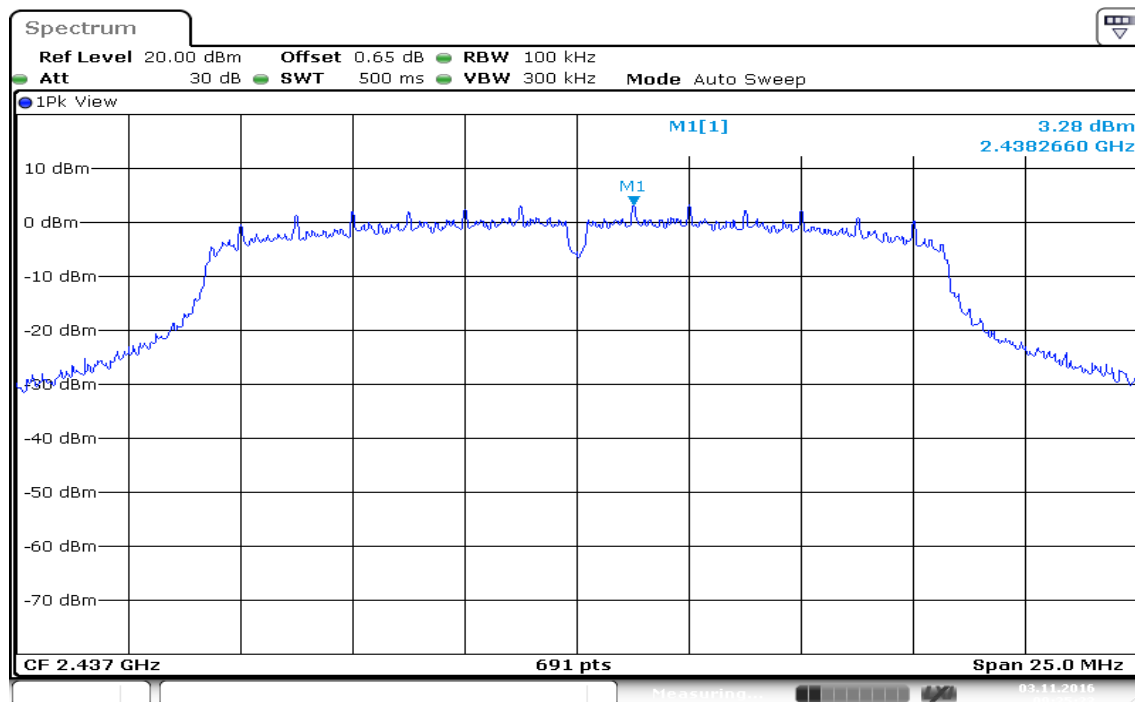


Date: 3 NOV 2016 09:25:23

Mid CH_ Conducted spurious emission

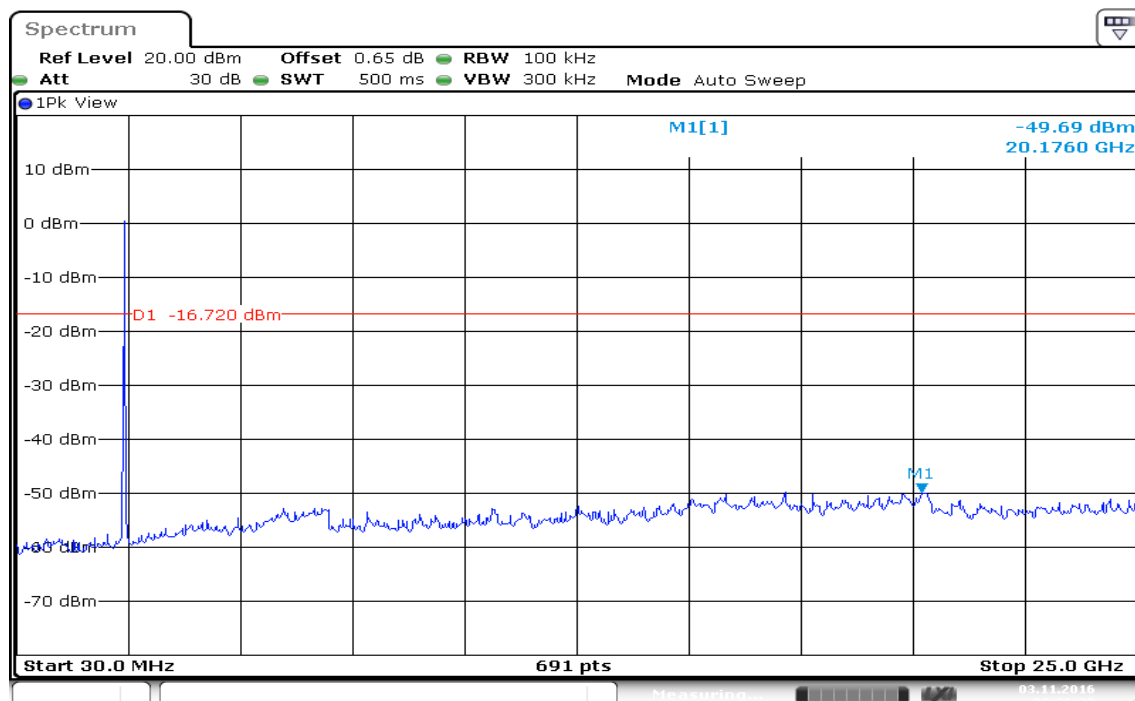


Date: 3 NOV 2016 09:26:20


High CH_100kHz PSD reference Level

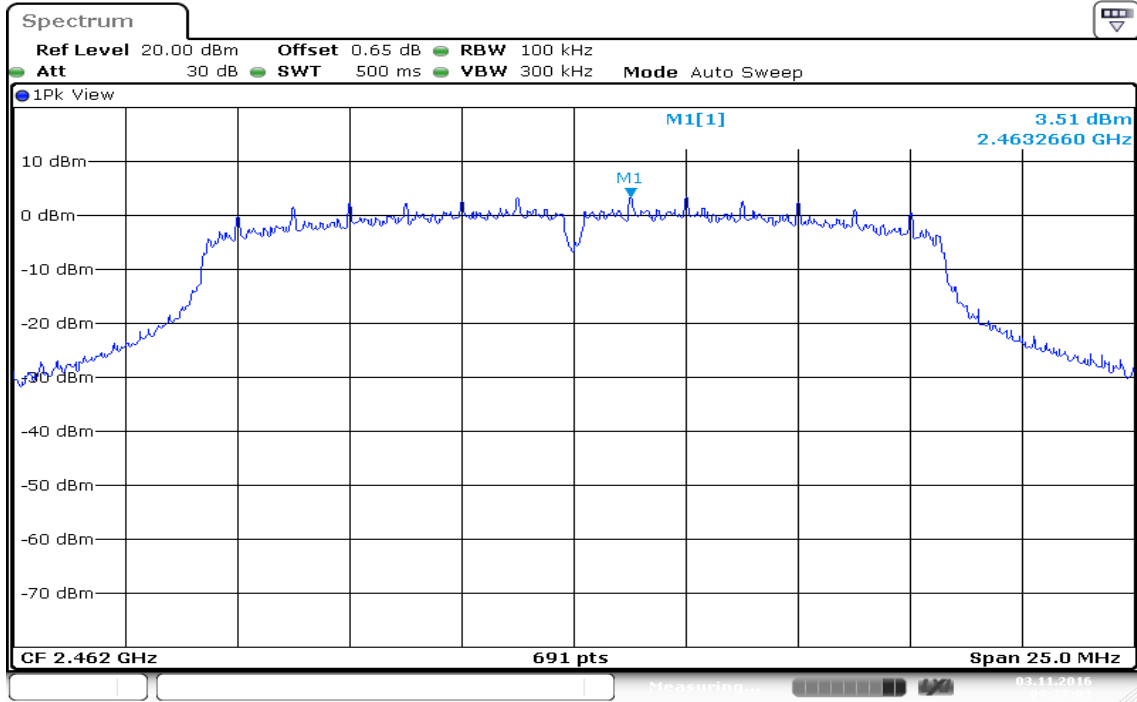

High CH_Conducted Band edge

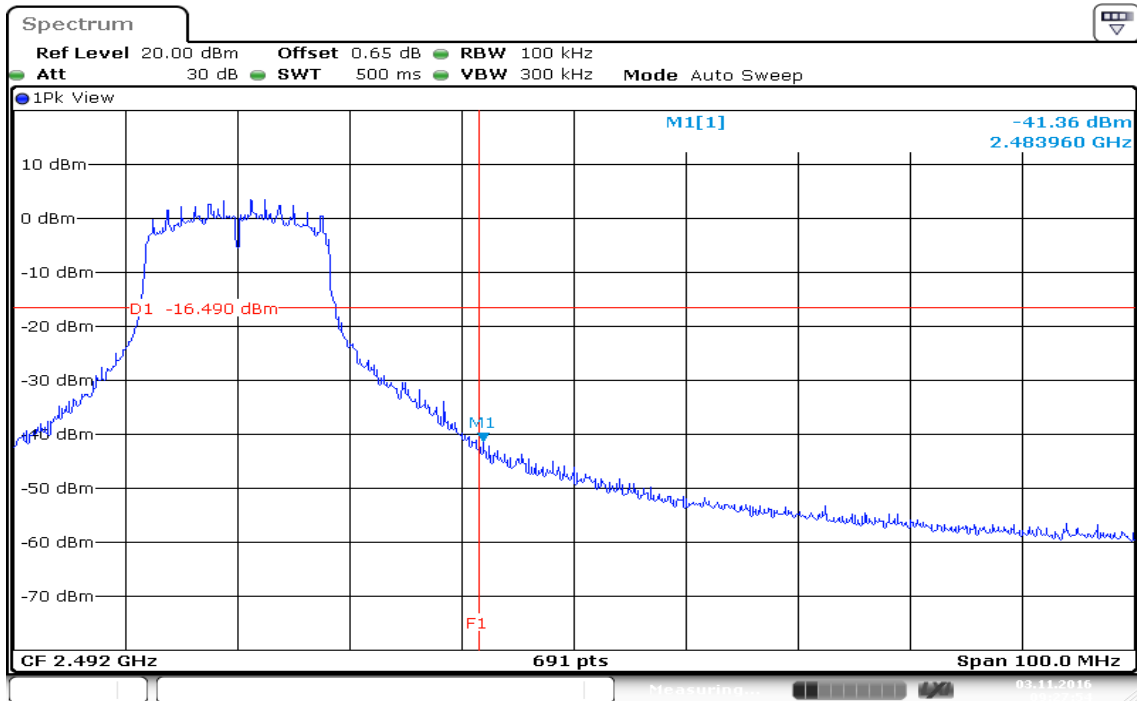


High CH_ Conducted spurious emission

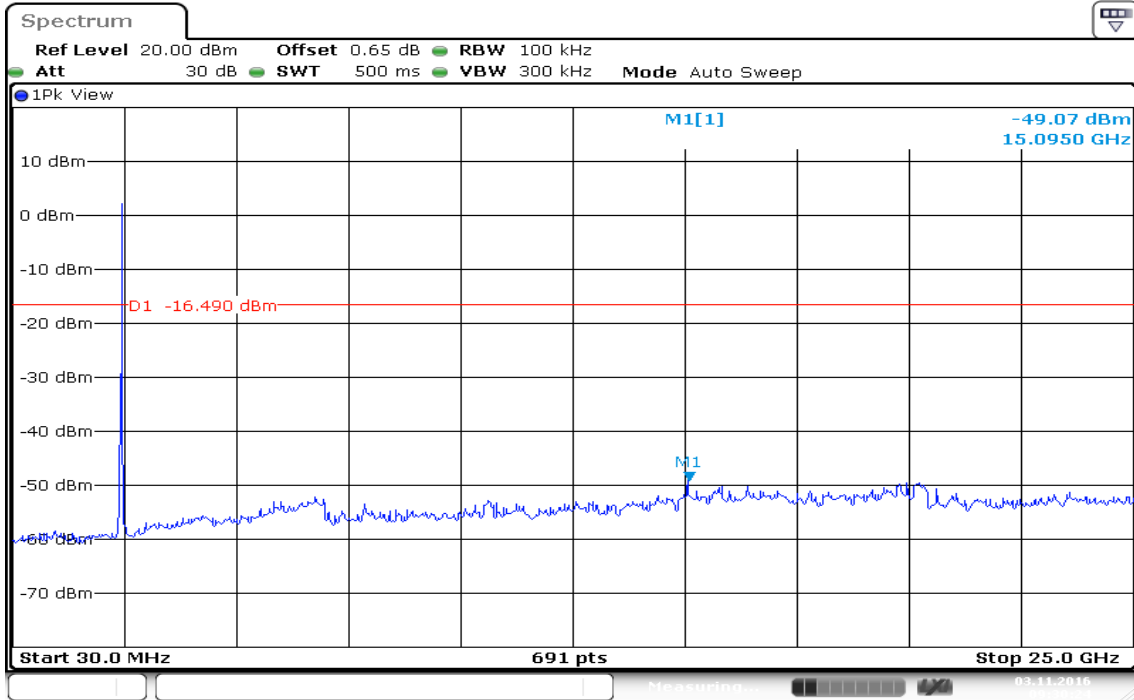

Date: 3 NOV 2016 09:30:24


Mode: IEEE 802.11n HT20

Low CH_100kHz PSD reference Level

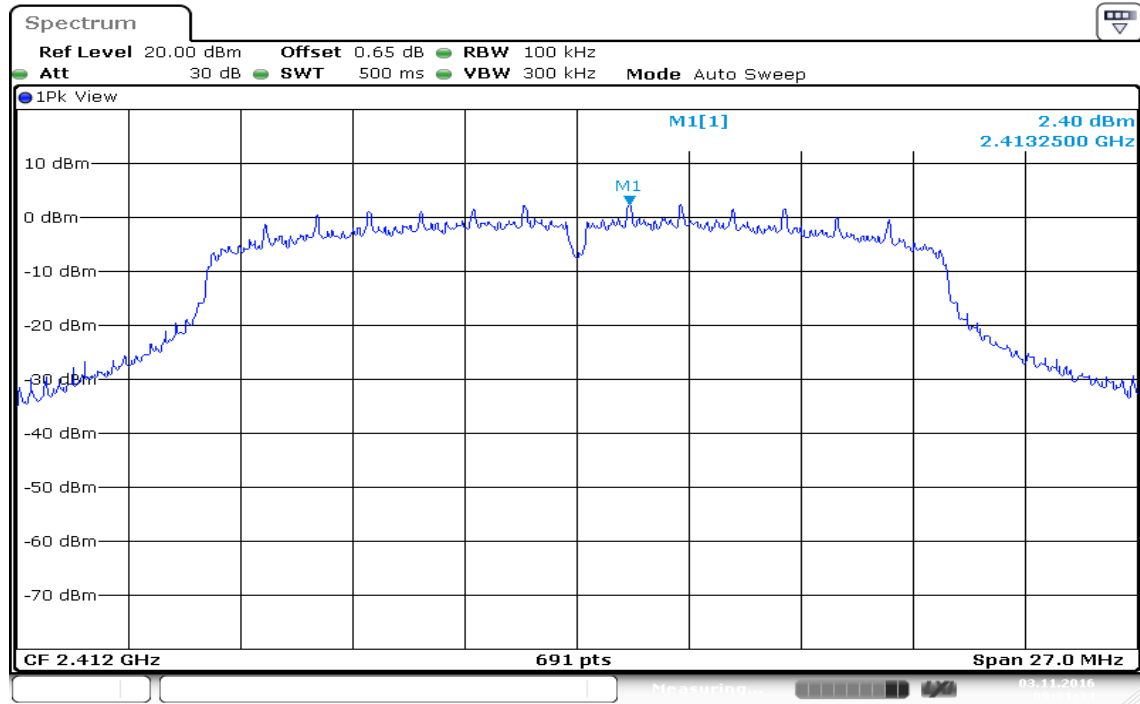


Date: 3 NOV 2016 09:31:34

Low CH_Conducted Band edge

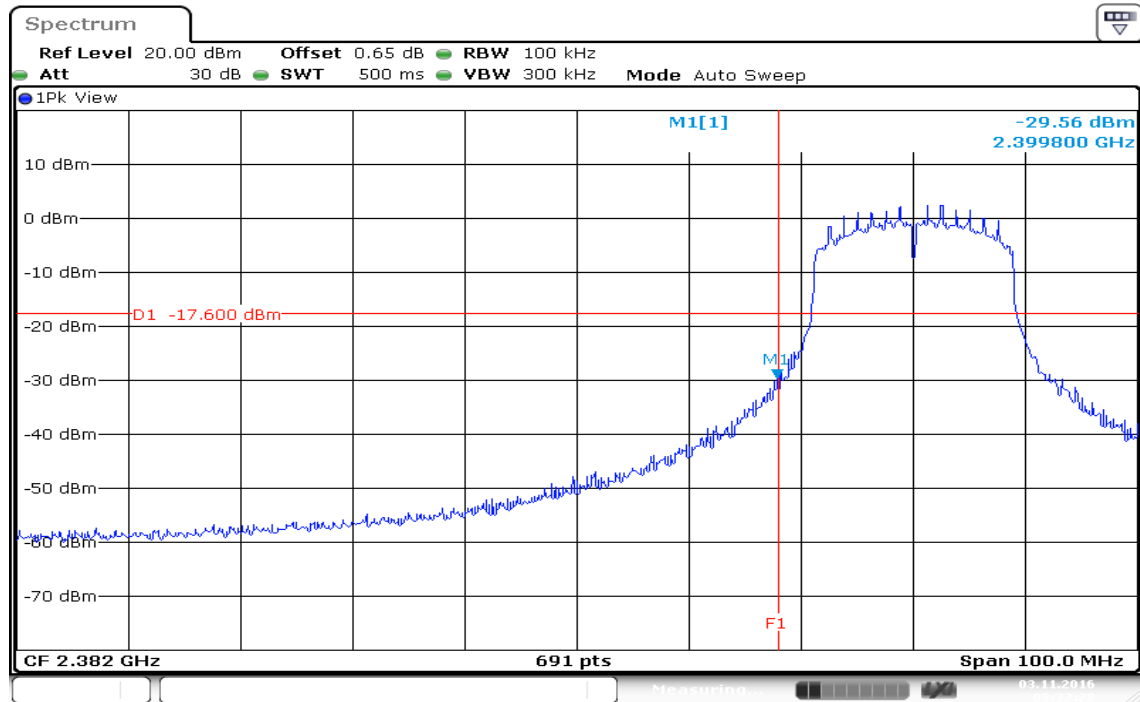


Date: 3 NOV 2016 09:32:28

Low CH_Conducted spurious emission

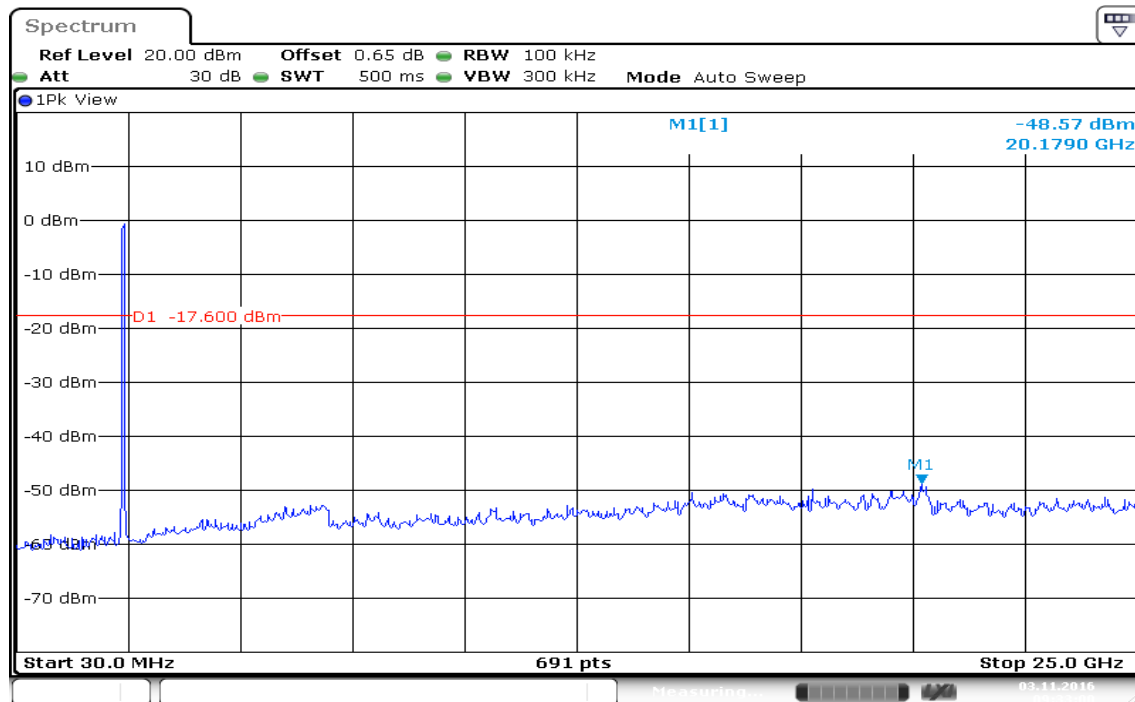


Date: 3 NOV 2016 09:33:00


Mid CH_100kHz PSD reference Level

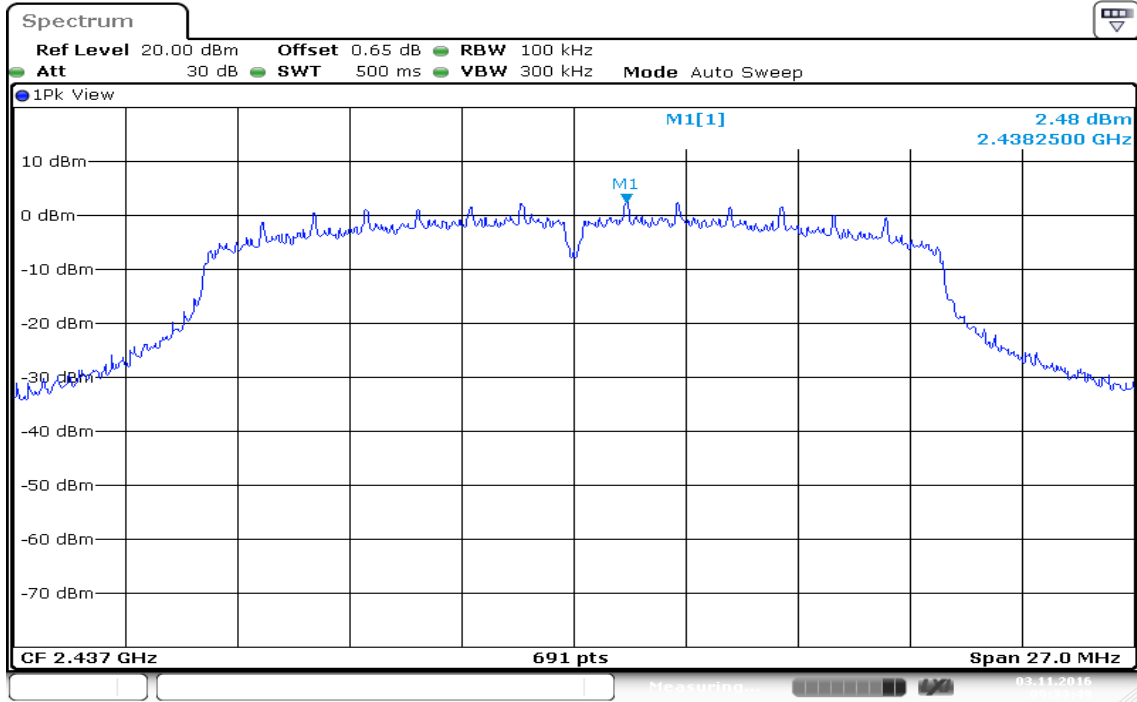


Mid CH_ Conducted spurious emission

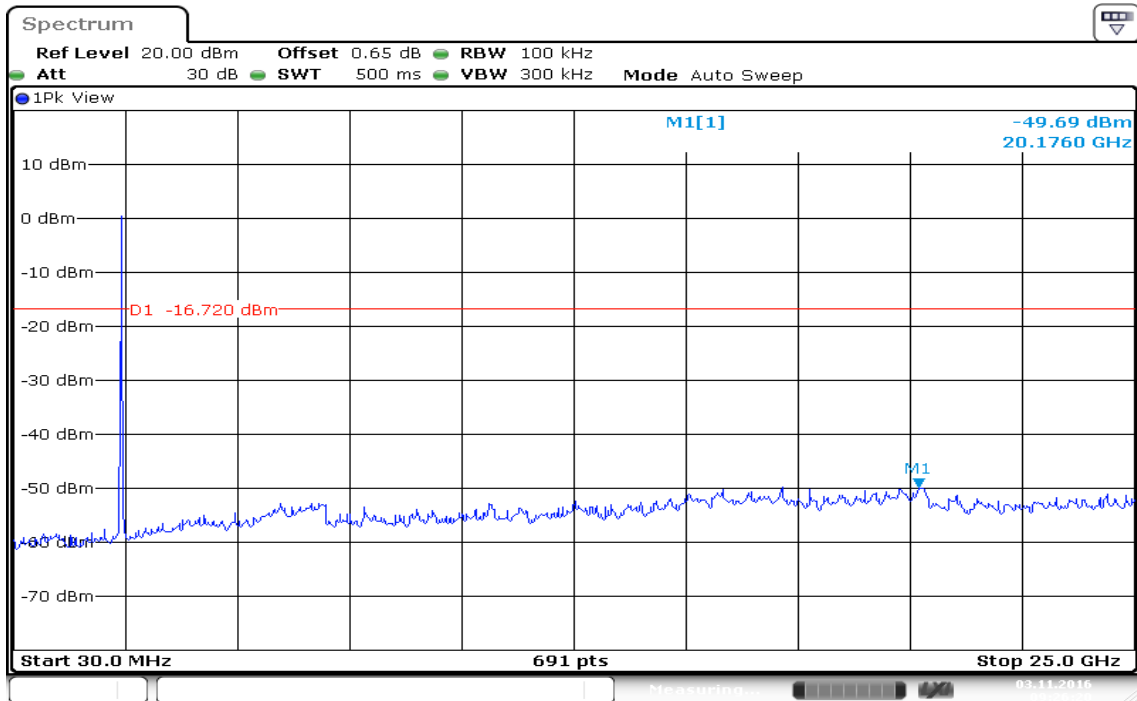


High CH_100kHz PSD reference Level

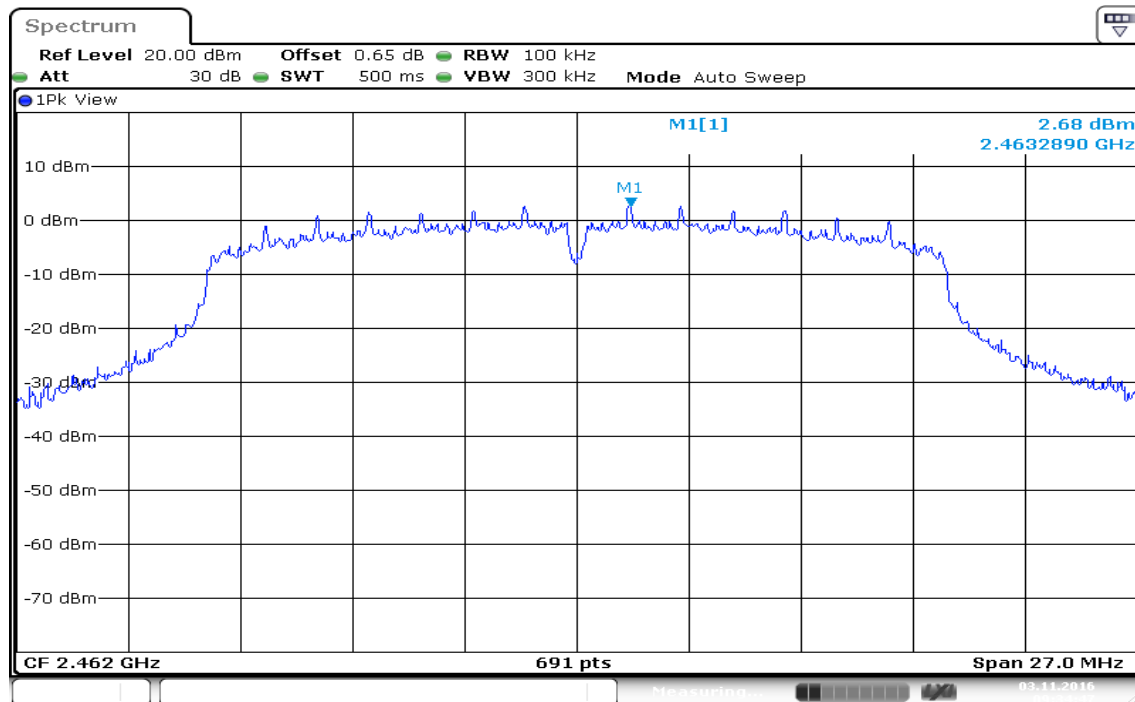

High CH_Conducted Band edge

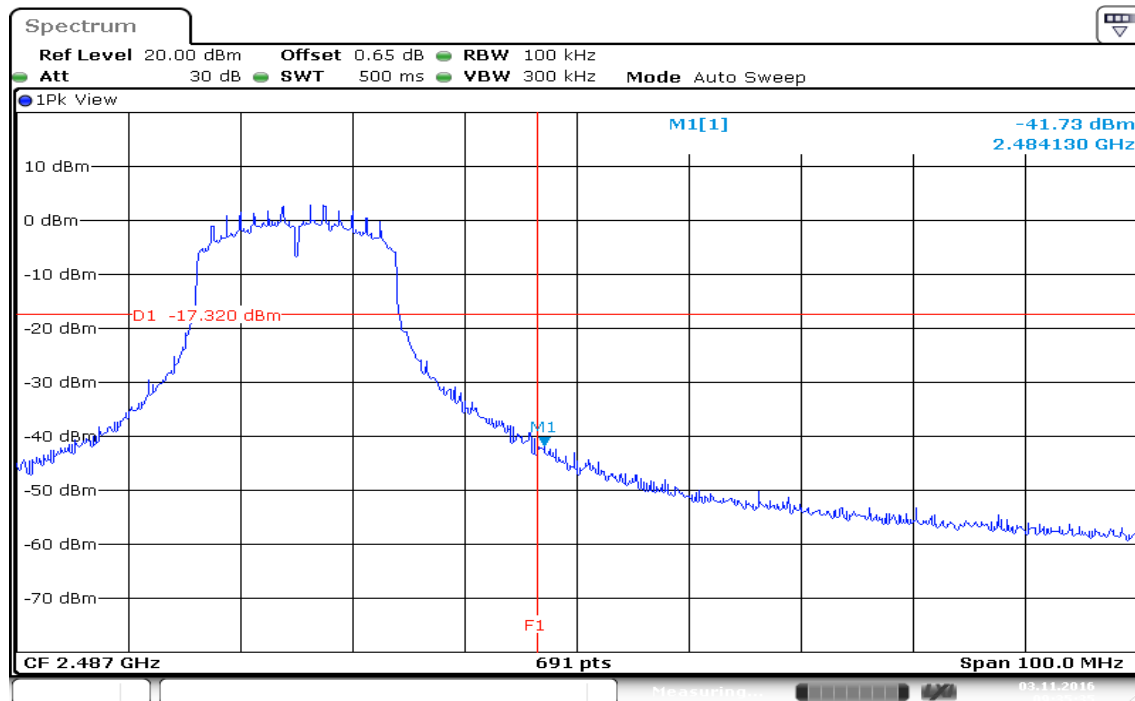

High CH_ Conducted spurious emission

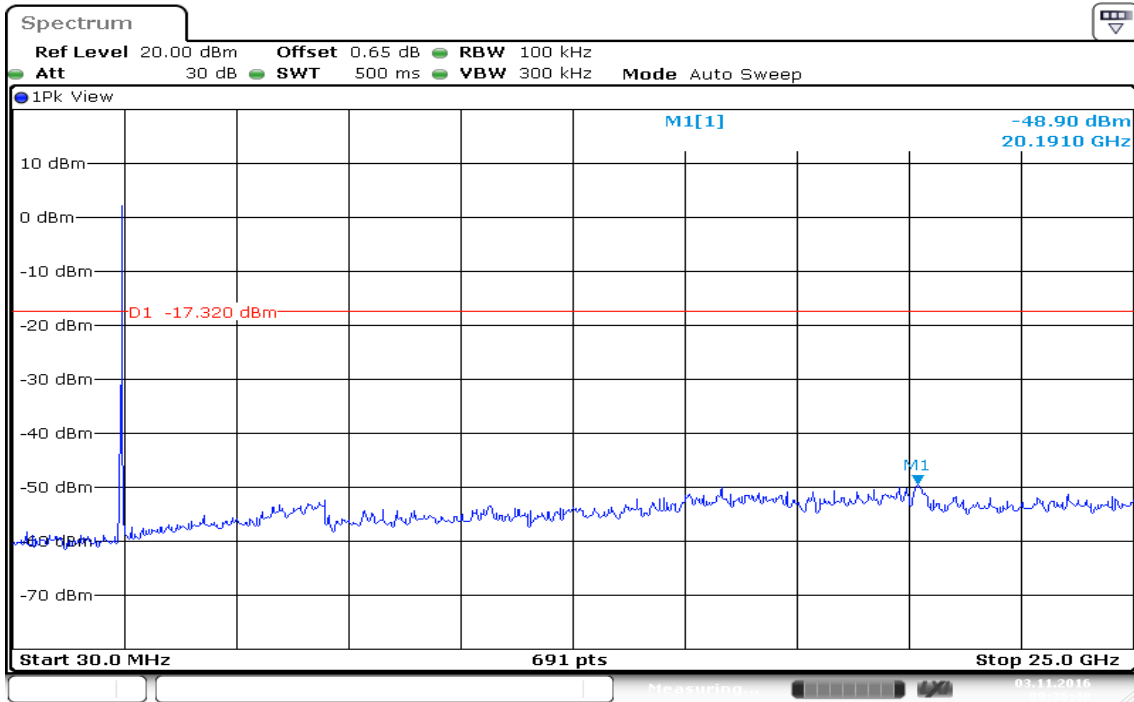


Date: 3 NOV 2016 09:36:40

7.6 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e) & RSS-247, for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f) & RSS-247, the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration

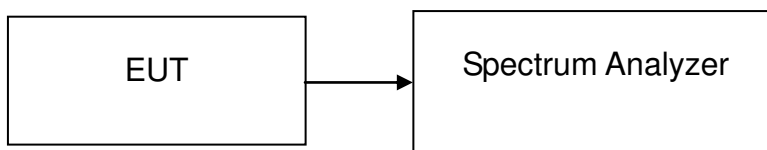

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 30 kHz, Sweep time = 2.5ms
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data**IEEE 802.11b mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-3.74	8.00	PASS
Mid	2437	-3.86		PASS
High	2462	-4.70		PASS

IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-13.70	8.00	PASS
Mid	2437	-6.17		PASS
High	2462	-13.19		PASS


IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-14.30	8.00	PASS
Mid	2437	-7.88		PASS
High	2462	-13.40		PASS

Test Plot


IEEE 802.11b mode

PPSD (CH Low)

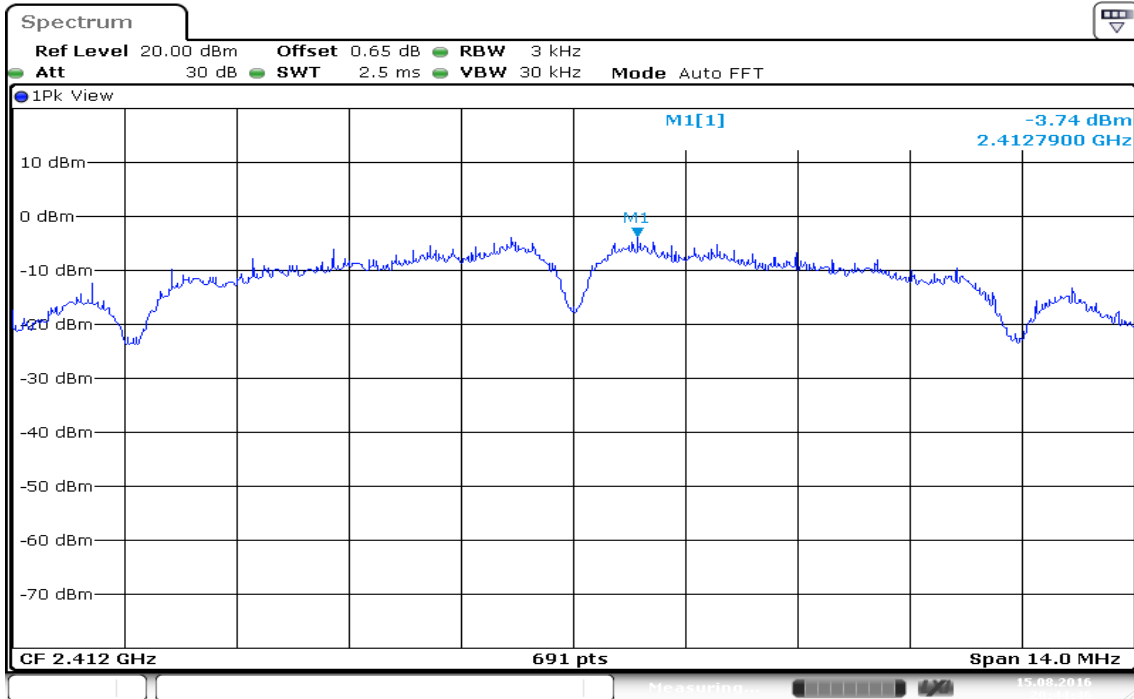


Date: 15.AUG.2016 20:44:47

PPSD (CH Mid)

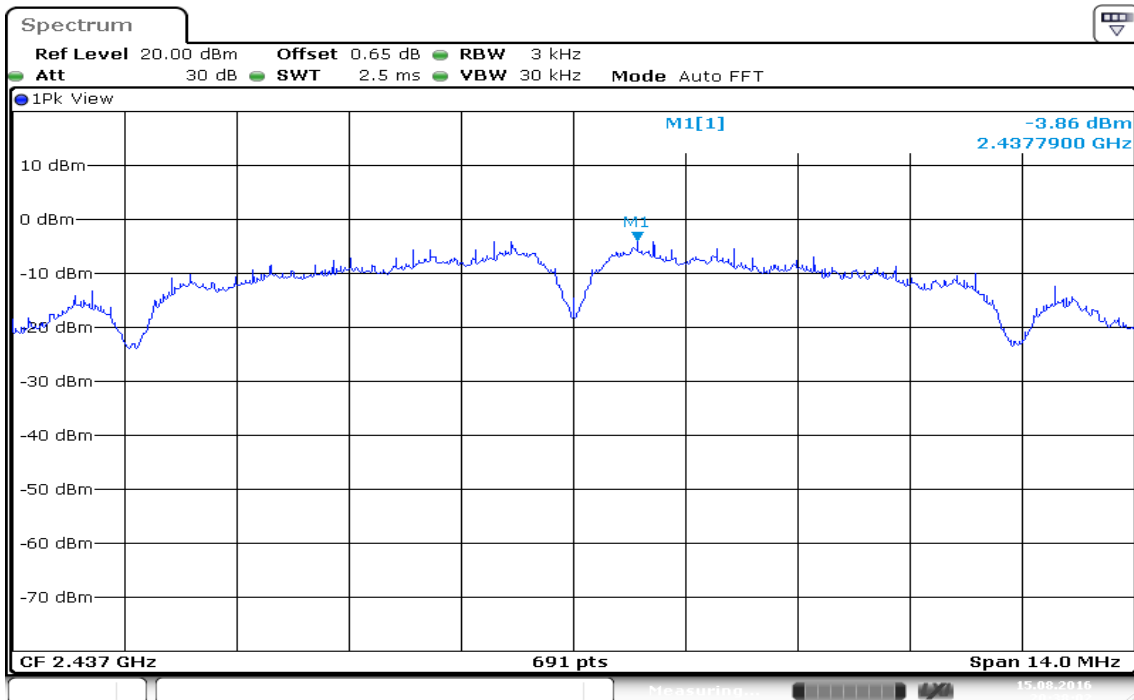

Date: 15.AUG.2016 20:38:03


PPSD (CH High)

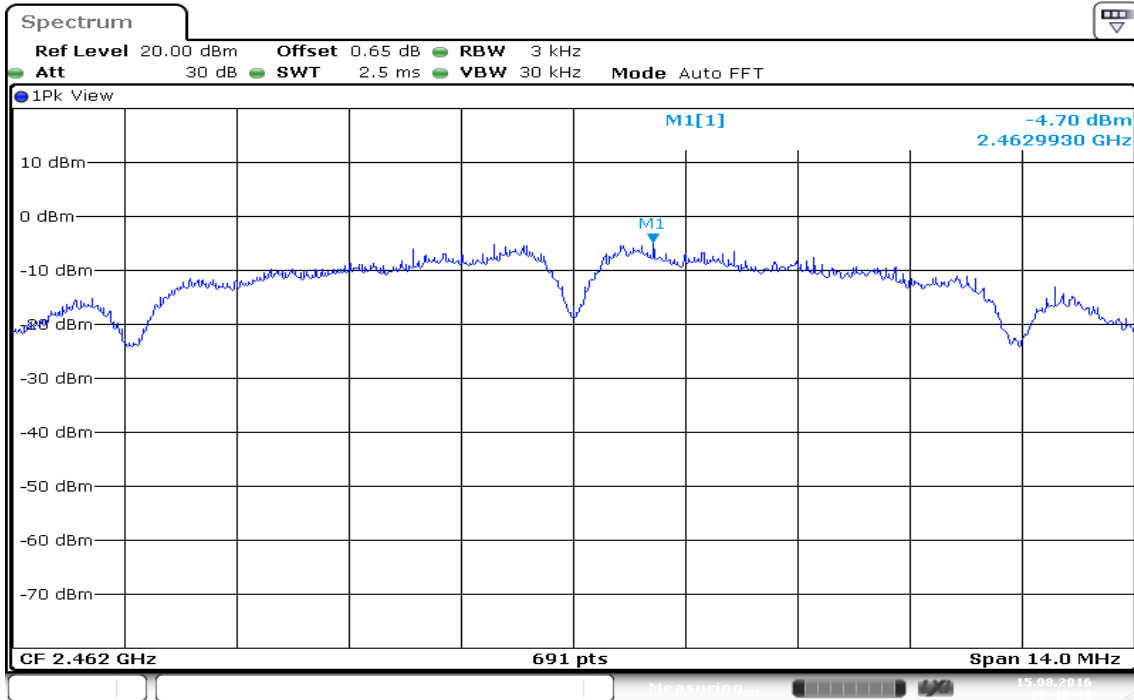


Date: 15.AUG.2016 20:46:42

IEEE 802.11g mode


PPSD (CH Low)

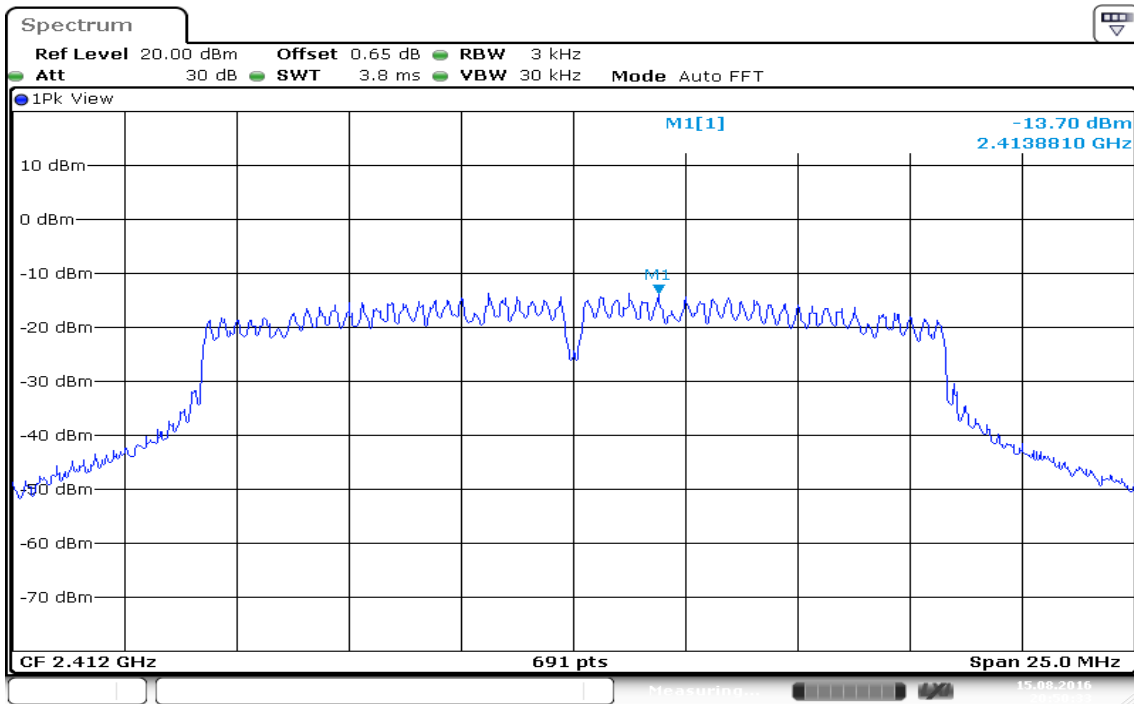

PPSD (CH Mid)

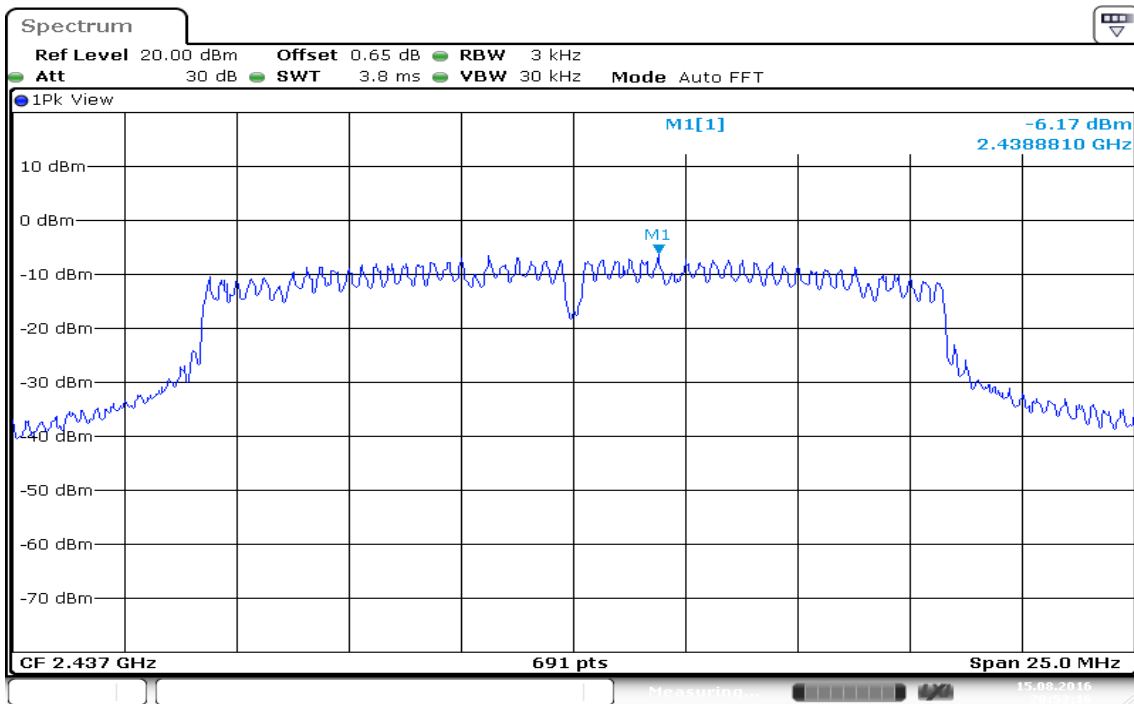


PPSD (CH High)

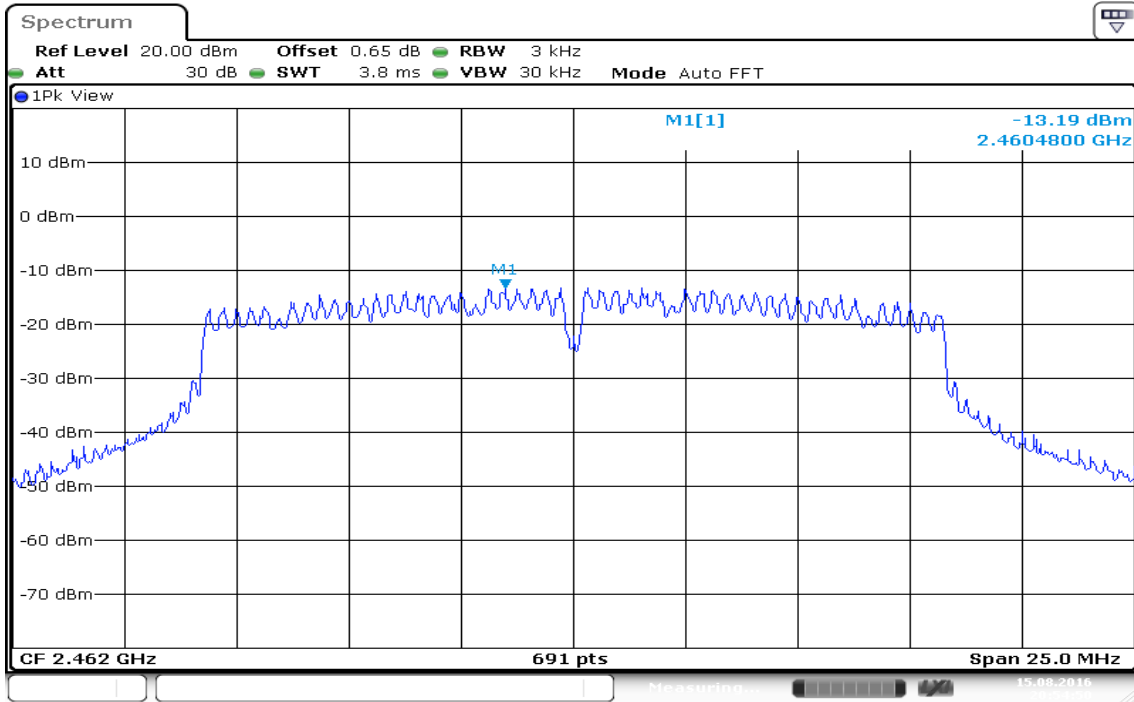


Date: 15.AUG.2016 20:54:50

IEEE 802.11n HT 20 MHz mode


PPSD (CH Low)

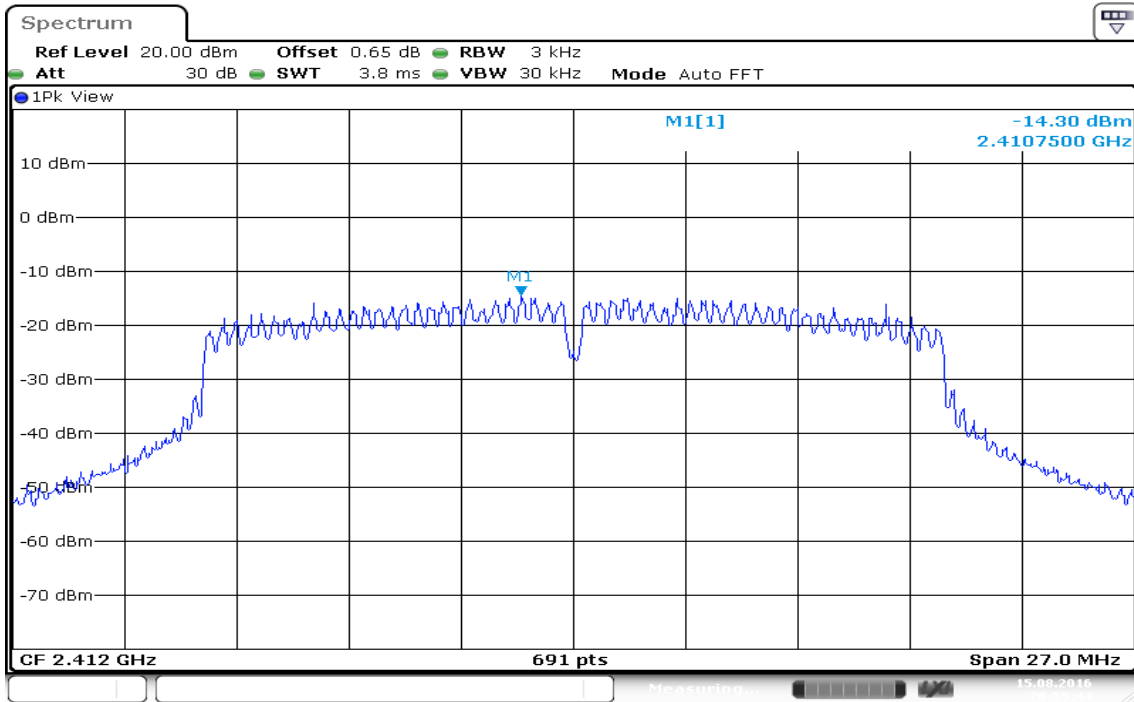

PPSD (CH Mid)

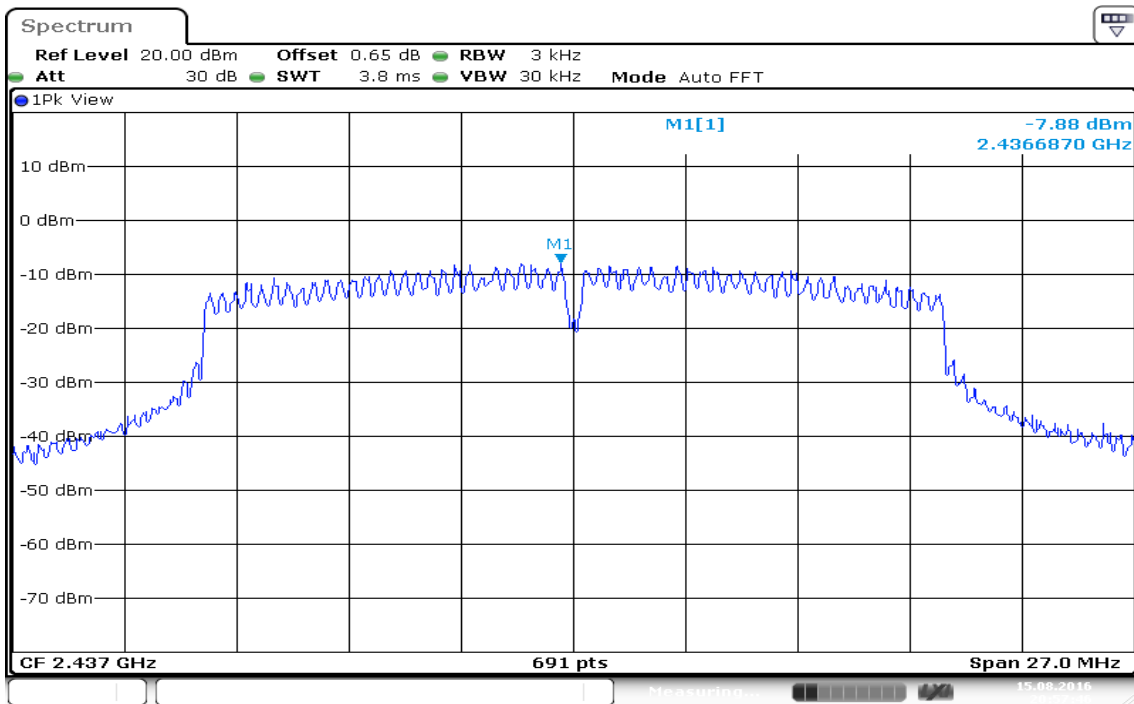

PPSD (CH High)

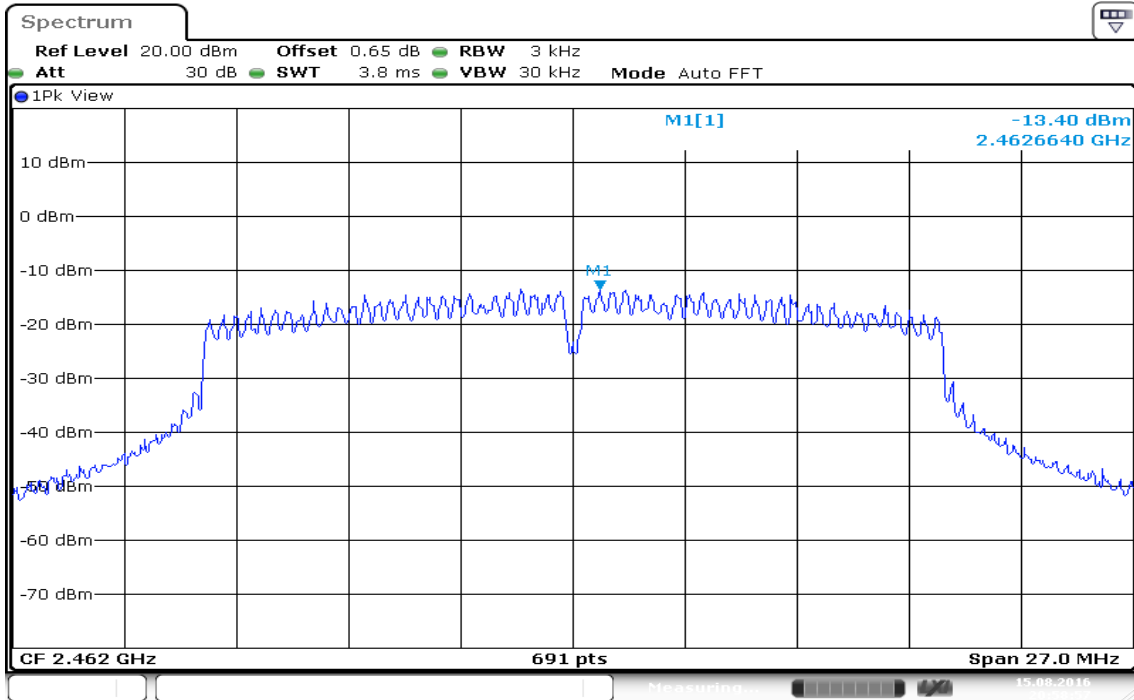

Date: 15.AUG.2016 20:58:57

7.7 RADIATED EMISSIONS

LIMIT

All spurious emissions shall comply with the limits of §15.209(a) and RSS-Gen Table 2 & Table 4.

RSS-Gen Table 2 & Table 4: General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz ^(Note)

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Note: *Measurements for compliance with limits in the above table may be performed at distances other than 3 metres, in accordance with Section 6.5.

Transmitting devices are not permitted in Table 1 bands or, unless stated otherwise, in TV bands (54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-806 MHz).


RSS-Gen Table 5: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/377F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1.705-30 MHz	30	N/A	30


Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average detector.

Test Configuration


9kHz ~ 30MHz

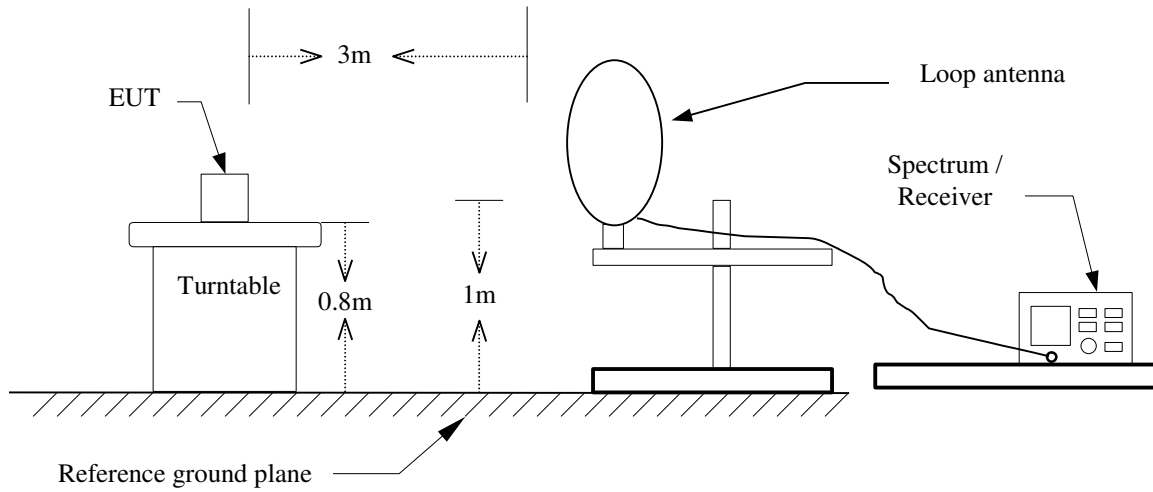

30MHz ~ 1GHz

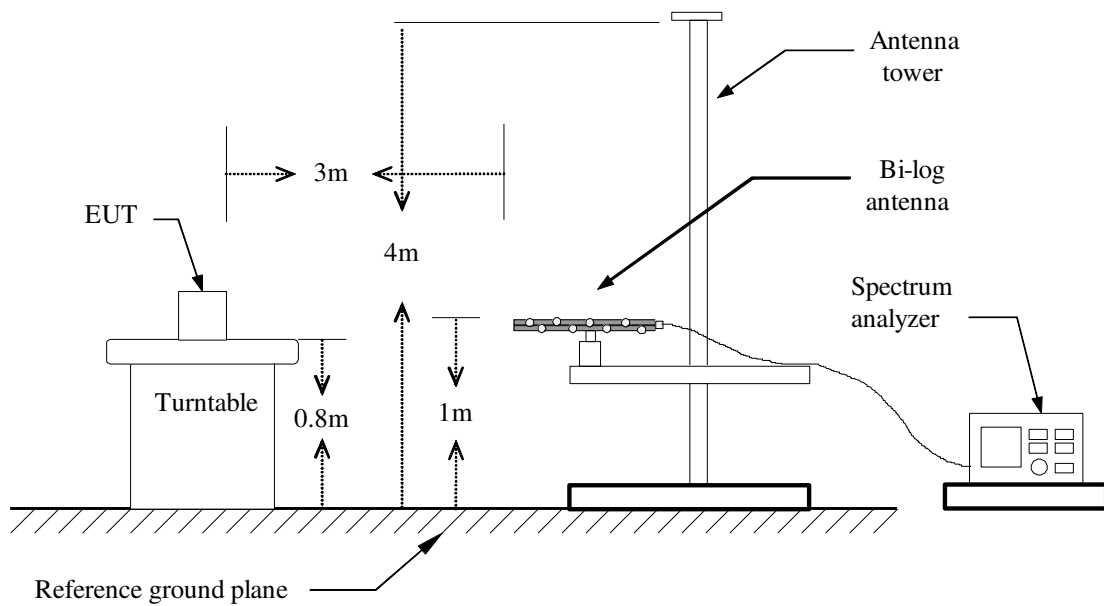

Above 1 GHz

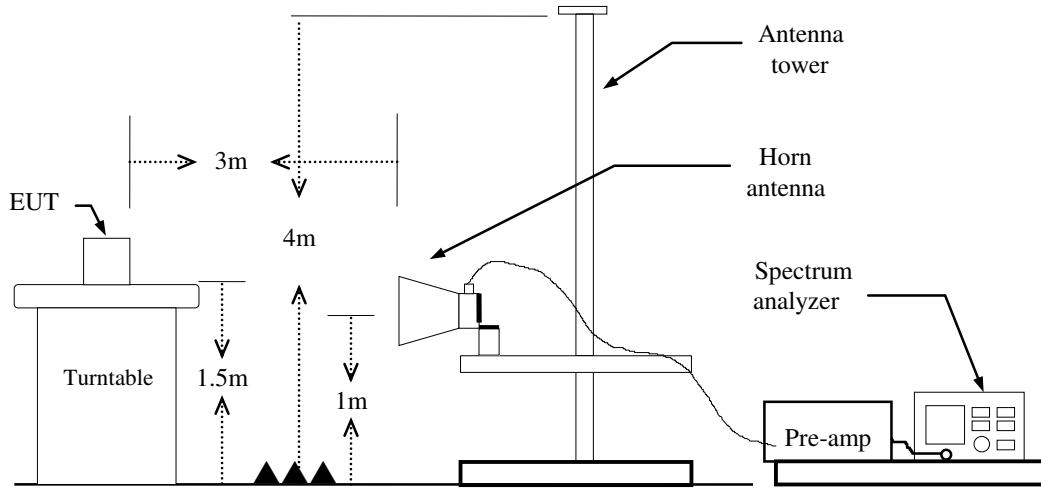

TEST PROCEDURE

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m high and below 1 GHz is 0.8m high above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz,
if duty cycle $\geq 98\%$, VBW=10Hz.
if duty cycle $< 98\%$ VBW=1/T.

IEEE 802.11b mode: $\geq 98\%$, VBW=10Hz

IEEE 802.11g mode: $\geq 98\%$, VBW=10Hz

IEEE 802.11n HT 20 MHz mode: $\geq 98\%$, VBW=10Hz

7. Repeat above procedures until the measurements for all frequencies are complete.
8. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

Note: We checked every harmonics frequencies from Fundamental frequencies with reduced VBW, and we mark a point to prove pass or not if we find any emission. For this case, there are no emissions hidden in the noise floor.

Below 1GHz

Operation Mode: Normal Link


Test Date: October 20, 2016

Temperature: 27°C

Tested by: Dennis Li

Humidity: 53% RH

Polarity: Ver.

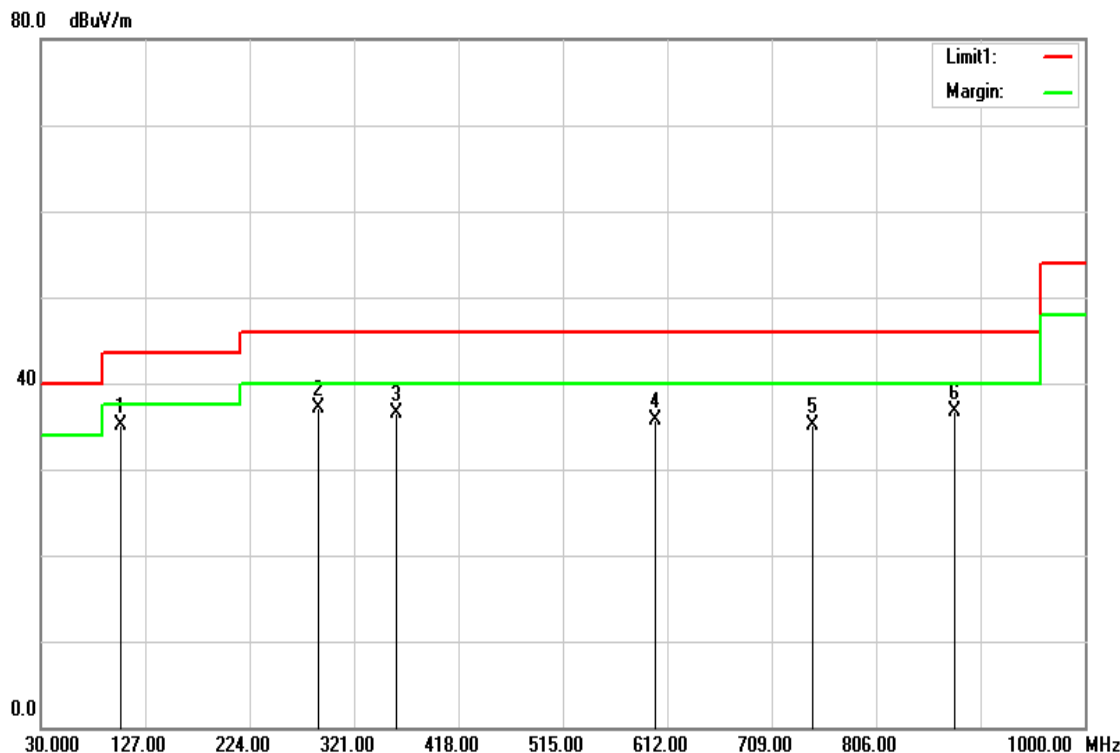

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
103.7200	53.54	-18.37	35.17	43.50	-8.33	QP	V
288.0200	51.54	-14.46	37.08	46.00	-8.92	peak	V
360.7700	49.09	-12.63	36.46	46.00	-9.54	peak	V
600.3600	43.38	-7.75	35.63	46.00	-10.37	peak	V
746.8300	40.04	-4.99	35.05	46.00	-10.95	QP	V
878.7500	40.17	-3.44	36.73	46.00	-9.27	QP	V

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

Operation Mode: Normal Link


Test Date: October 20, 2016

Temperature: 27°C

Tested by: Dennis Li

Humidity: 53% RH

Polarity: Hor.

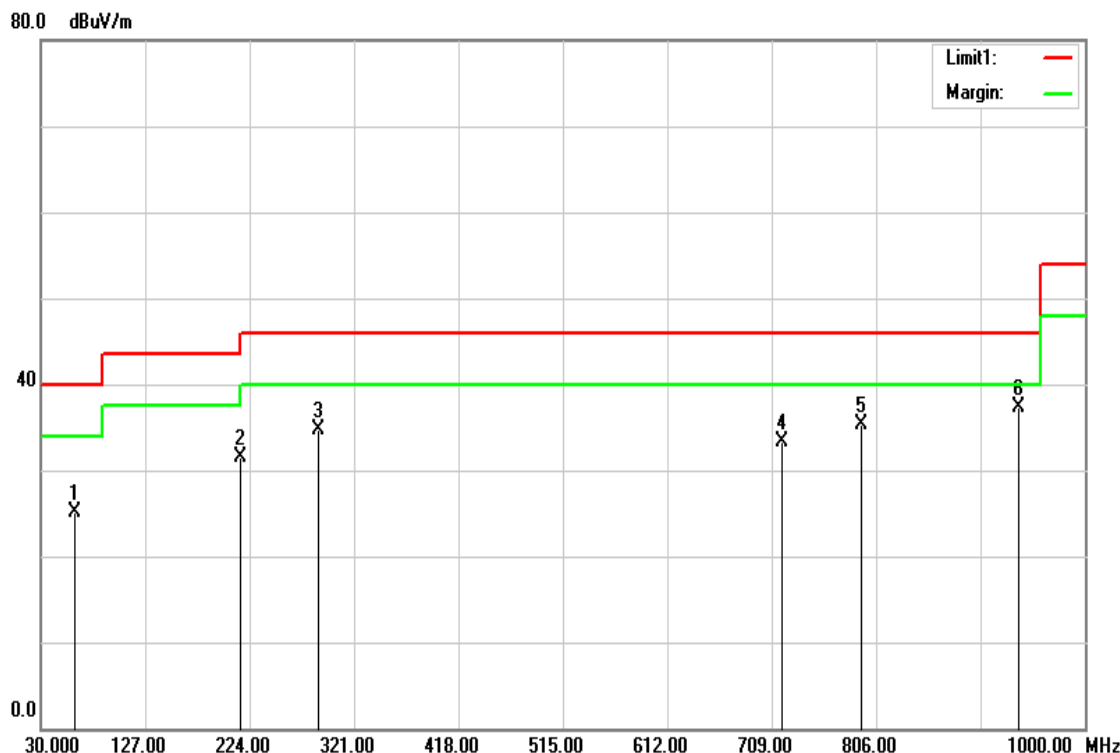

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
62.0100	46.89	-21.83	25.06	40.00	-14.94	QP	H
215.2700	48.10	-16.63	31.47	43.50	-12.03	QP	H
288.0200	49.18	-14.46	34.72	46.00	-11.28	QP	H
718.7000	38.95	-5.64	33.31	46.00	-12.69	peak	H
792.4200	39.93	-4.56	35.37	46.00	-10.63	peak	H
937.9200	39.81	-2.59	37.22	46.00	-8.78	peak	H

Remark:


1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

Above 1 GHz

TX / IEEE 802.11b / CH Low


Polarity: Vertical

110.0 dBuV/m

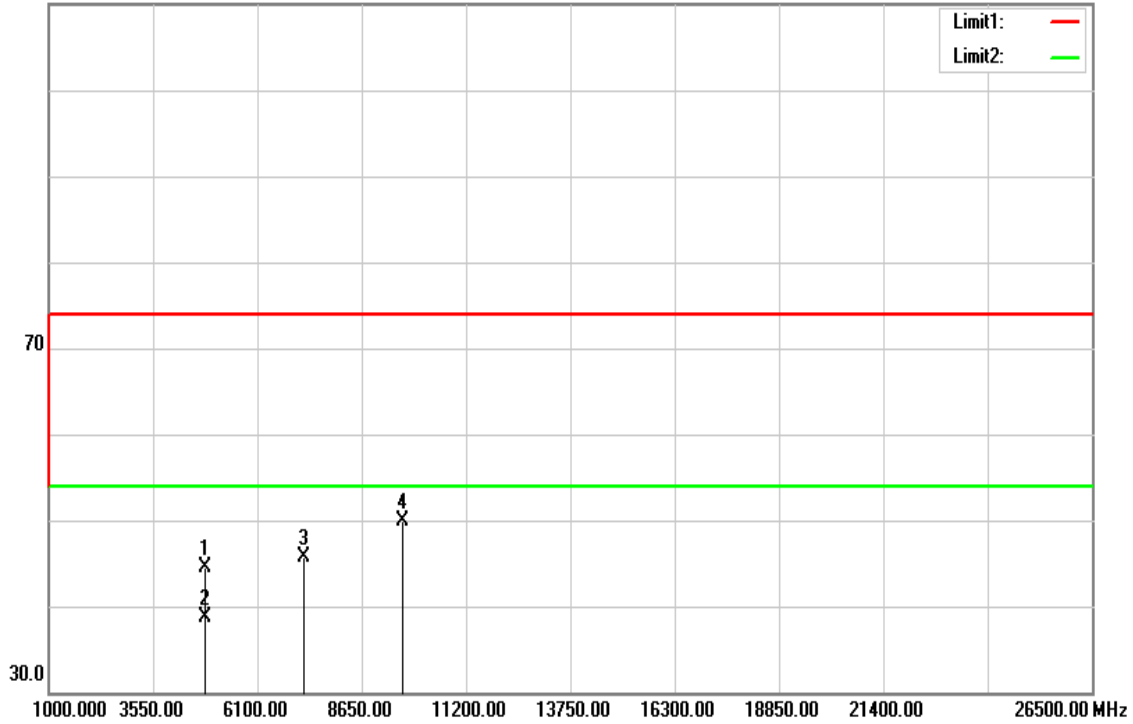

Polarity: Horizontal

110.0 dBuV/m

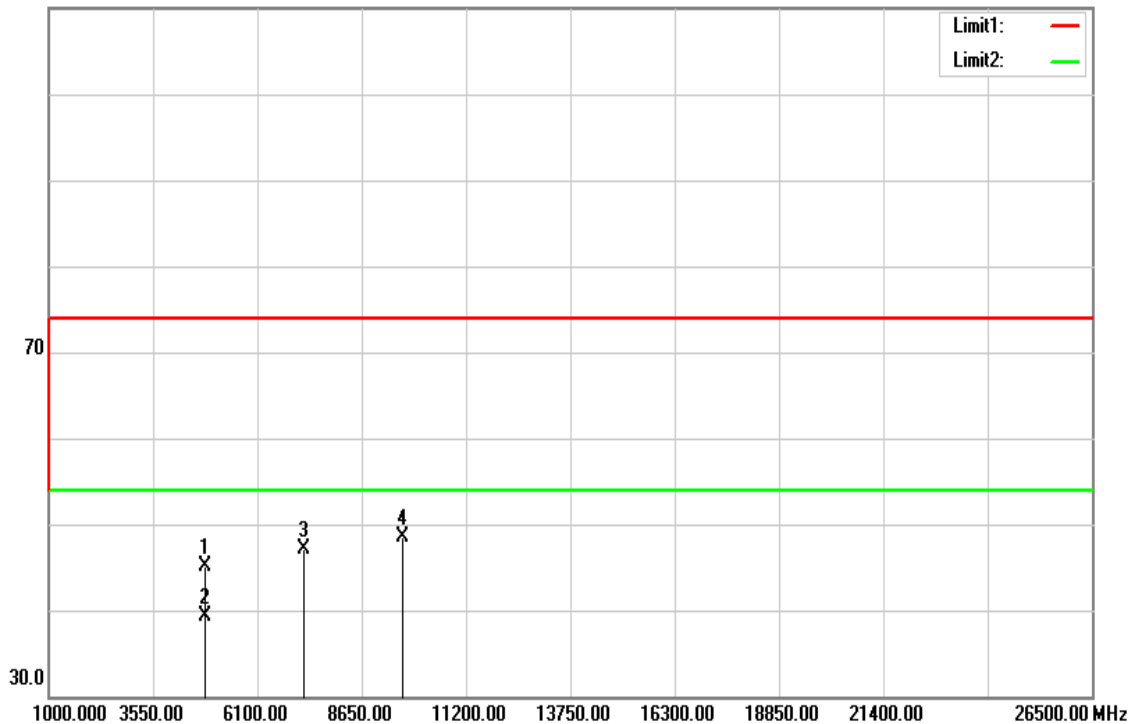

Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: October 22, 2016

Temperature: 27°C

Tested by: Dennis Li

Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4824.000	39.36	5.10	44.46	74.00	-29.54	peak	V
4824.000	33.60	5.10	38.70	54.00	-15.30	AVG	V
7236.000	33.03	12.71	45.74	74.00	-28.26	peak	V
9648.000	32.27	17.60	49.87	74.00	-24.13	peak	V
N/A							
4824.000	40.09	5.10	45.19	74.00	-28.81	peak	H
4824.000	34.25	5.10	39.35	54.00	-14.65	AVG	H
7236.000	34.30	12.71	47.01	74.00	-26.99	peak	H
9648.000	30.98	17.60	48.58	74.00	-25.42	peak	H
N/A							

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11b / CH Mid

Polarity: Vertical

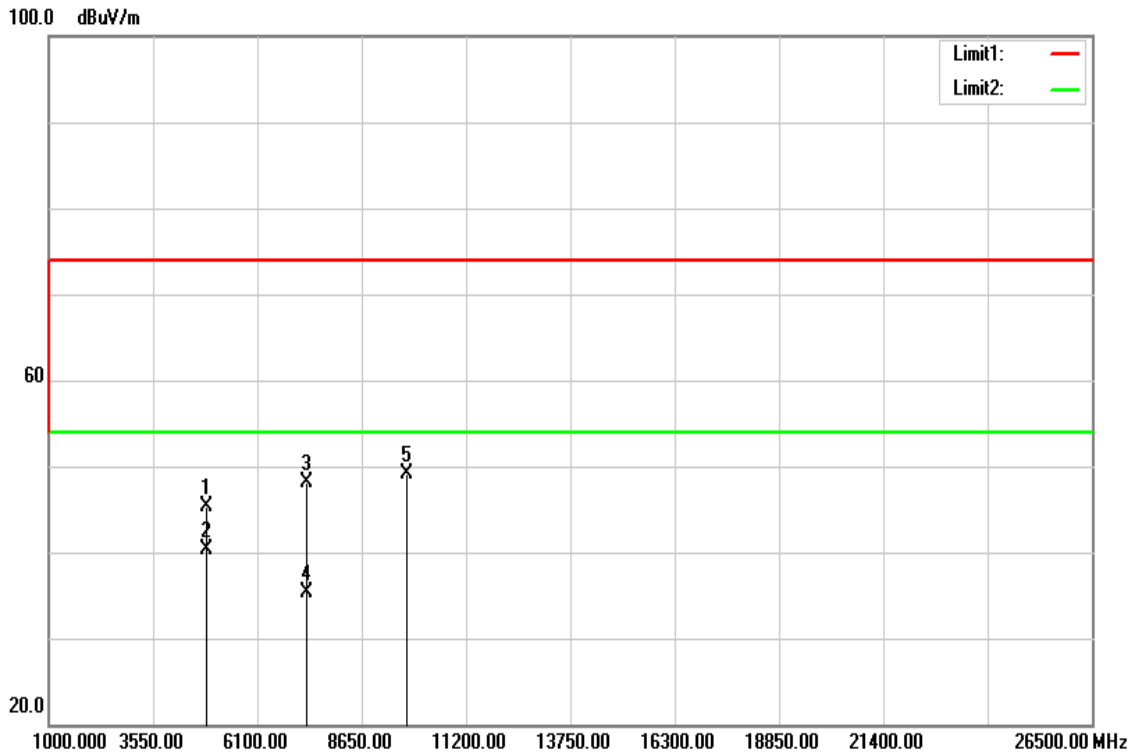

Polarity: Horizontal

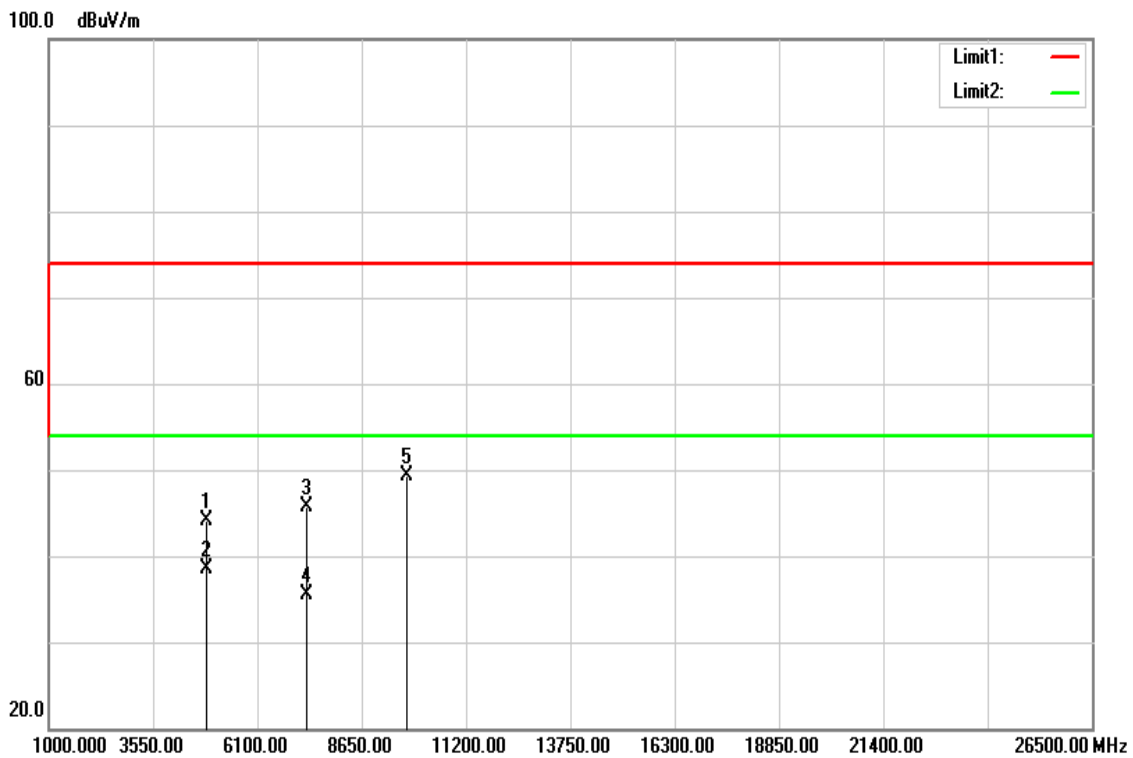

Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: October 22, 2016

Temperature: 27°C

Tested by: Dennis Li

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4874.000	39.99	5.23	45.22	74.00	-28.78	peak	V
4874.000	34.97	5.23	40.20	54.00	-13.80	AVG	V
7311.000	35.10	12.94	48.04	74.00	-25.96	peak	V
7311.000	22.43	12.94	35.37	54.00	-18.63	AVG	V
9748.000	31.47	17.60	49.07	74.00	-24.93	peak	V
N/A							
4874.000	38.92	5.23	44.15	74.00	-29.85	peak	H
4874.000	33.29	5.23	38.52	54.00	-15.48	AVG	H
7311.000	32.78	12.94	45.72	74.00	-28.28	peak	H
7311.000	22.49	12.94	35.43	54.00	-18.57	AVG	H
9748.000	31.69	17.60	49.29	74.00	-24.71	peak	H
N/A							


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11b / CH High


Polarity: Vertical

100.0 dBuV/m

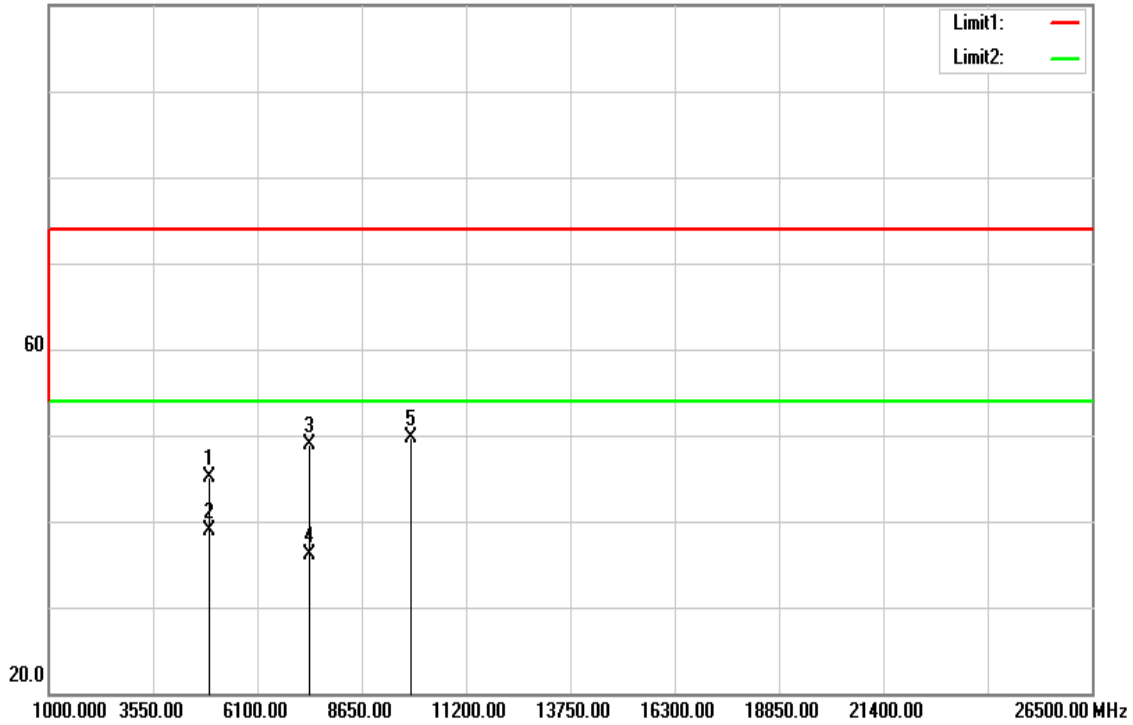

Polarity: Horizontal

100.0 dBuV/m

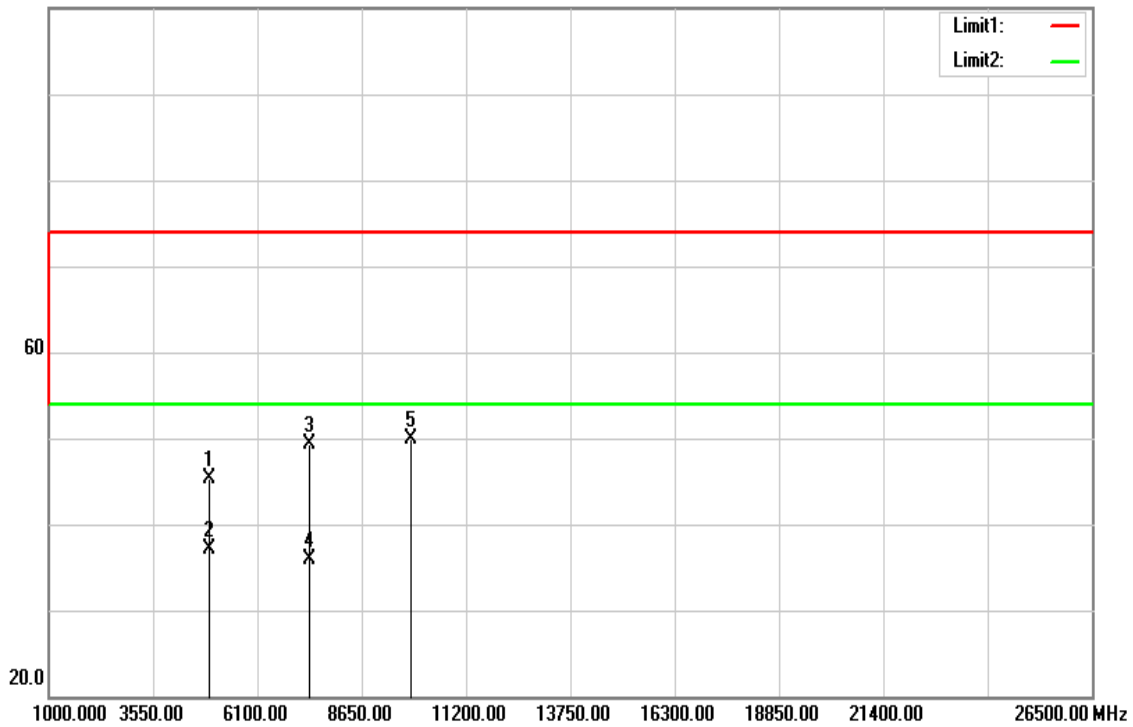

Operation Mode: TX / IEEE 802.11b / CH High

Test Date: October 22, 2016

Temperature: 27°C

Tested by: Dennis Li

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4924.000	39.75	5.37	45.12	74.00	-28.88	peak	V
4924.000	33.46	5.37	38.83	54.00	-15.17	AVG	V
7386.000	35.73	13.17	48.90	74.00	-25.10	peak	V
7386.000	22.88	13.17	36.05	54.00	-17.95	AVG	V
9848.000	32.05	17.60	49.65	74.00	-24.35	peak	V
N/A							
4924.000	39.84	5.37	45.21	74.00	-28.79	peak	H
4924.000	31.74	5.37	37.11	54.00	-16.89	AVG	H
7386.000	36.21	13.17	49.38	74.00	-24.62	peak	H
7386.000	22.75	13.17	35.92	54.00	-18.08	AVG	H
9848.000	32.38	17.60	49.98	74.00	-24.02	peak	H
N/A							


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11g / CH Low


Polarity: Vertical

100.0 dBuV/m

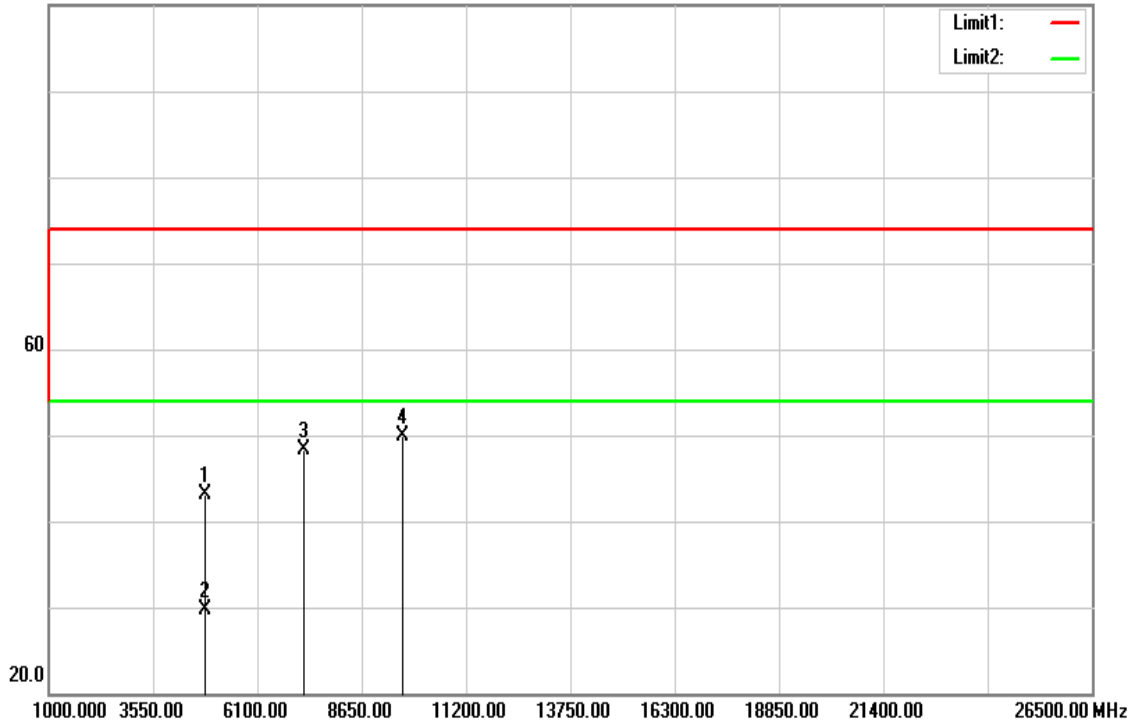

Polarity: Horizontal

100.0 dBuV/m

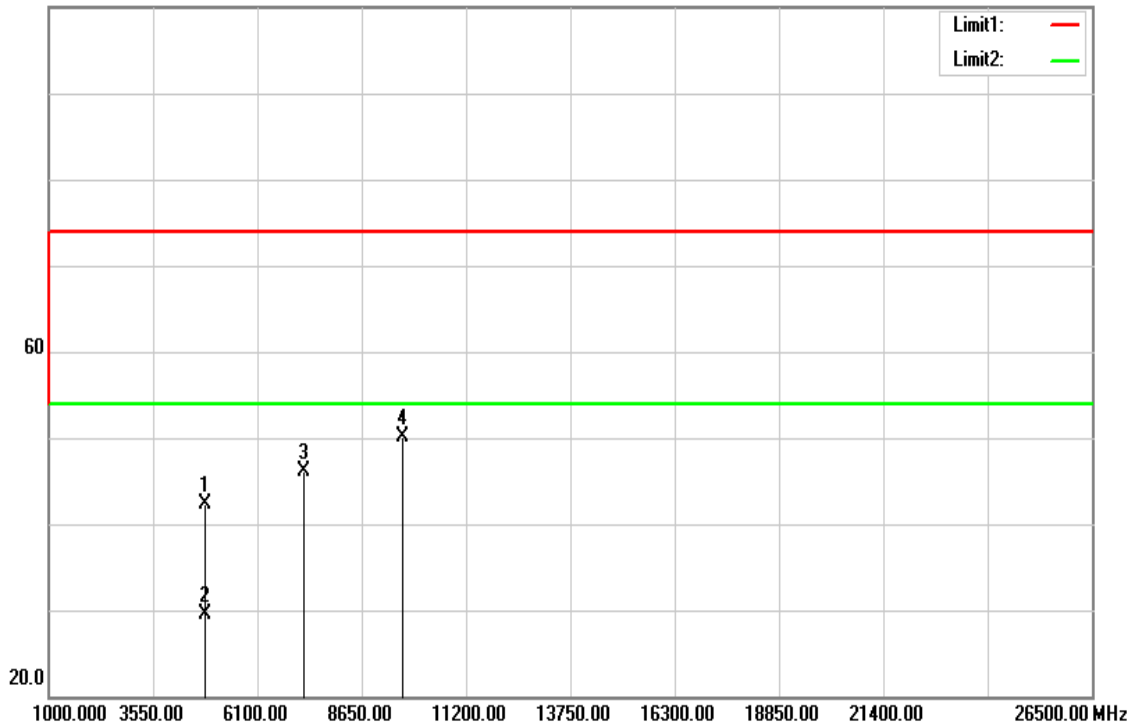

Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: October 22, 2016

Temperature: 27°C

Tested by: Dennis Li

Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4824.000	37.93	5.10	43.03	74.00	-30.97	peak	V
4824.000	24.70	5.10	29.80	54.00	-24.20	AVG	V
7236.000	35.51	12.71	48.22	74.00	-25.78	peak	V
9648.000	32.23	17.60	49.83	74.00	-24.17	peak	V
N/A							
4824.000	37.23	5.10	42.33	74.00	-31.67	peak	H
4824.000	24.39	5.10	29.49	54.00	-24.51	AVG	H
7236.000	33.40	12.71	46.11	74.00	-27.89	peak	H
9648.000	32.41	17.60	50.01	74.00	-23.99	peak	H
N/A							

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11g / CH Mid

Polarity: Vertical

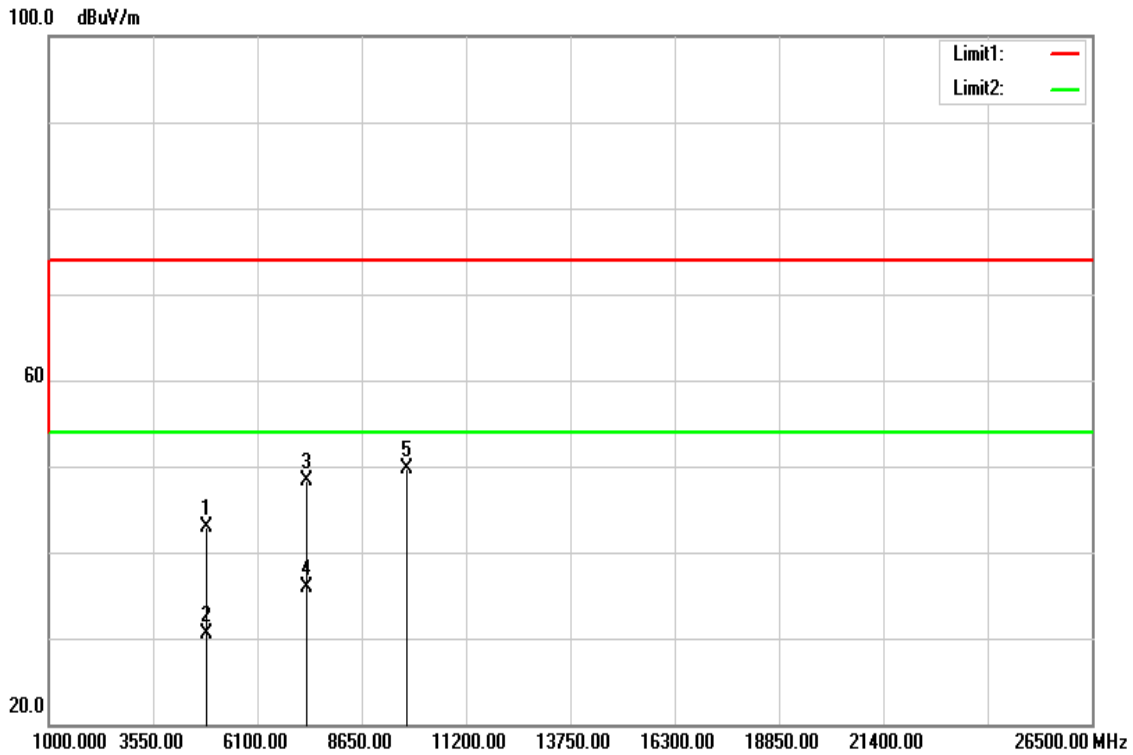

Polarity: Horizontal

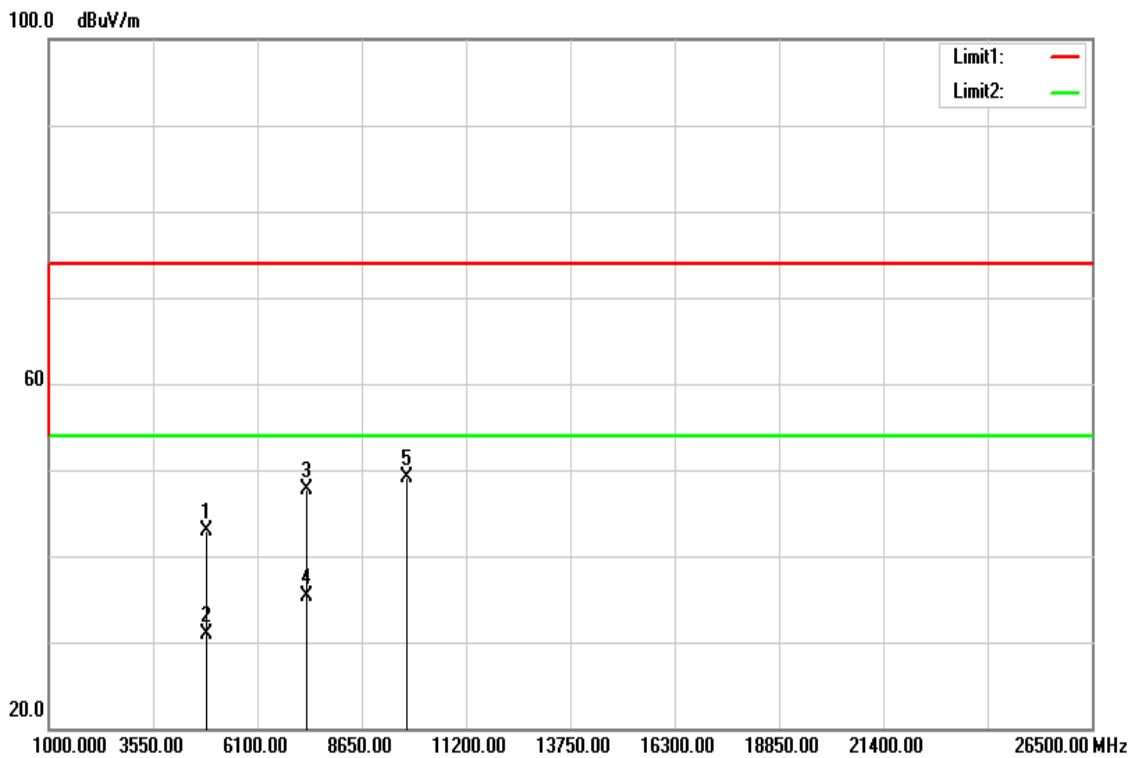

Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: October 22, 2016

Temperature: 27°C

Tested by: Dennis Li

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4874.000	37.73	5.23	42.96	74.00	-31.04	peak	V
4874.000	25.25	5.23	30.48	54.00	-23.52	AVG	V
7311.000	35.46	12.94	48.40	74.00	-25.60	peak	V
7311.000	22.89	12.94	35.83	54.00	-18.17	AVG	V
9748.000	32.03	17.60	49.63	74.00	-24.37	peak	V
N/A							
4874.000	37.65	5.23	42.88	74.00	-31.12	peak	H
4874.000	25.59	5.23	30.82	54.00	-23.18	AVG	H
7311.000	34.84	12.94	47.78	74.00	-26.22	peak	H
7311.000	22.30	12.94	35.24	54.00	-18.76	AVG	H
9748.000	31.41	17.60	49.01	74.00	-24.99	peak	H
N/A							


Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

TX / IEEE 802.11g / CH High


Polarity: Vertical

100.0 dBuV/m

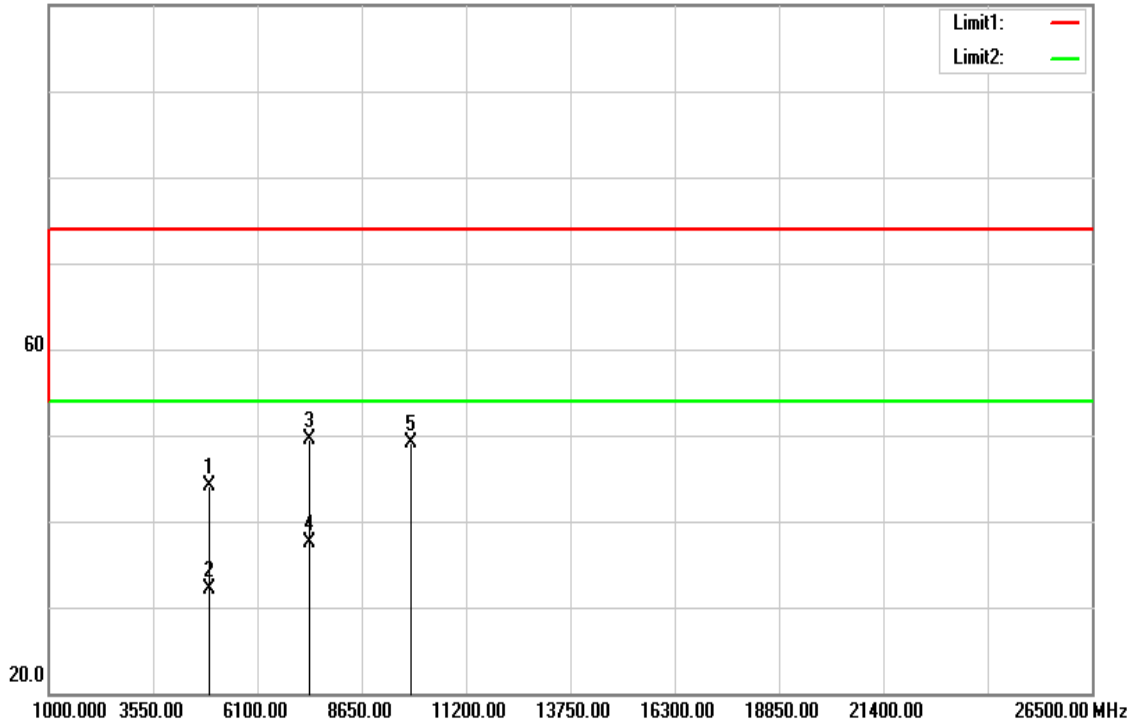

Polarity: Horizontal

100.0 dBuV/m

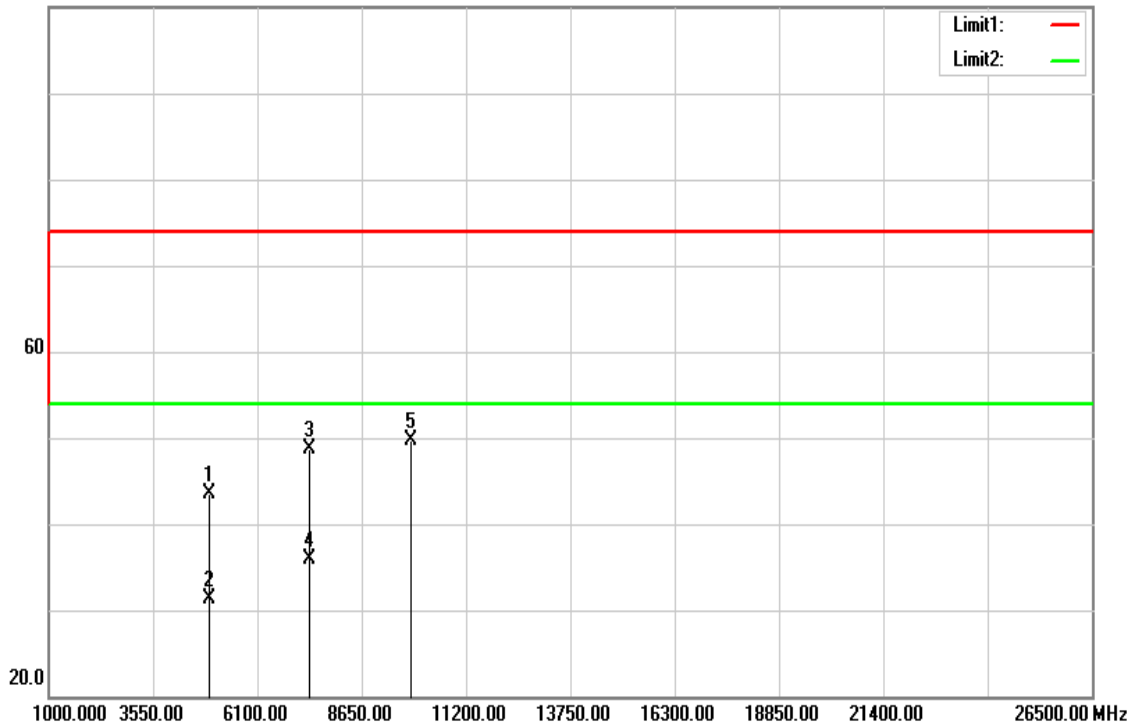

Operation Mode: TX / IEEE 802.11g / CH High

Test Date: October 22, 2016

Temperature: 27°C

Tested by: Dennis Li

Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4924.000	38.82	5.37	44.19	74.00	-29.81	peak	V
4924.000	26.82	5.37	32.19	54.00	-21.81	AVG	V
7386.000	36.24	13.17	49.41	74.00	-24.59	peak	V
7386.000	24.31	13.17	37.48	54.00	-16.52	AVG	V
9848.000	31.45	17.60	49.05	74.00	-24.95	peak	V
N/A							
4924.000	38.21	5.37	43.58	74.00	-30.42	peak	H
4924.000	25.90	5.37	31.27	54.00	-22.73	AVG	H
7386.000	35.60	13.17	48.77	74.00	-25.23	peak	H
7386.000	22.75	13.17	35.92	54.00	-18.08	AVG	H
9848.000	32.07	17.60	49.67	74.00	-24.33	peak	H
N/A							

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

TX / IEEE 802.11n HT 20 MHz mode / CH Low

Polarity: Vertical

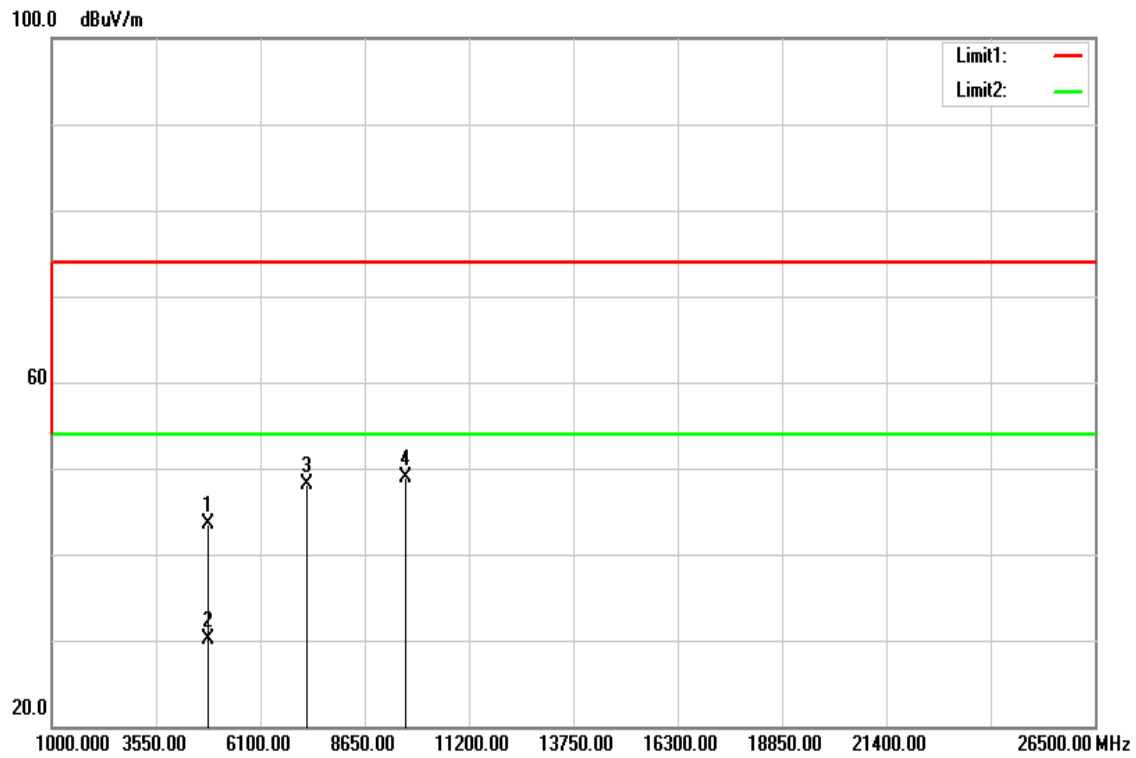

Polarity: Horizontal

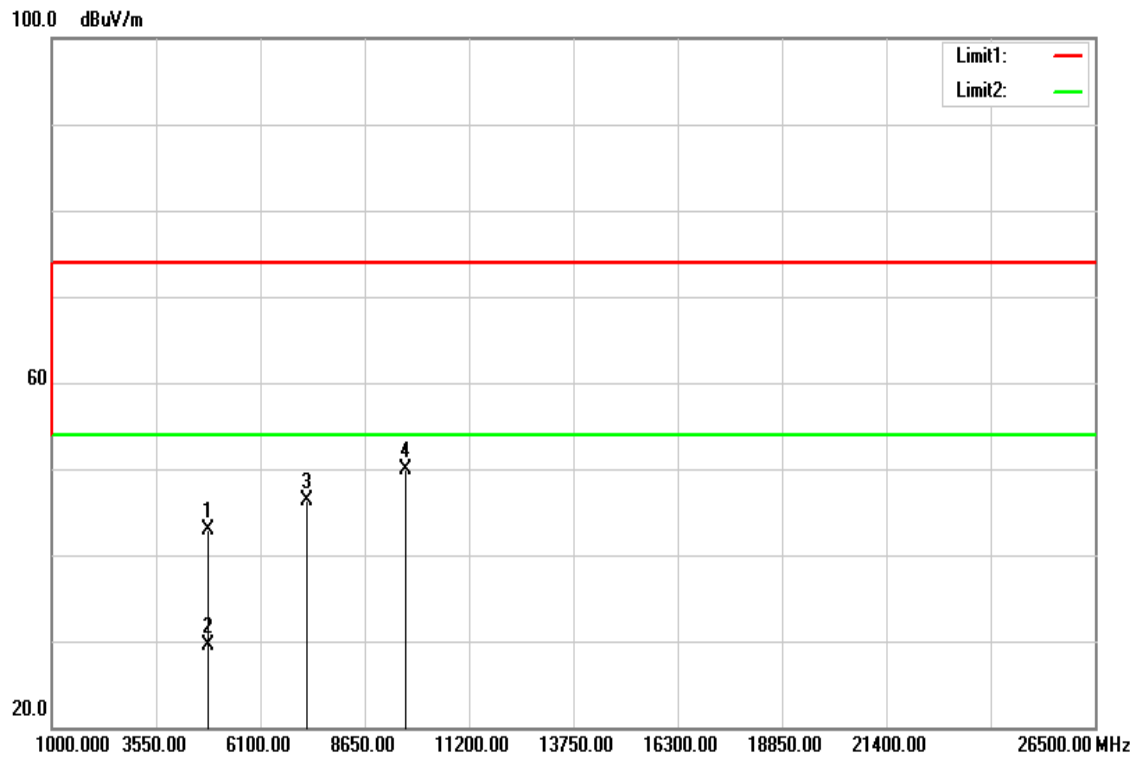

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Low **Test Date:** October 22, 2016

Temperature: 27°C

Tested by: Dennis Li

Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4824.000	38.33	5.10	43.43	74.00	-30.57	peak	V
4824.000	25.08	5.10	30.18	54.00	-23.82	AVG	V
7236.000	35.47	12.71	48.18	74.00	-25.82	peak	V
9648.000	31.34	17.60	48.94	74.00	-25.06	peak	V
N/A							
4824.000	37.84	5.10	42.94	74.00	-31.06	peak	H
4824.000	24.38	5.10	29.48	54.00	-24.52	AVG	H
7236.000	33.54	12.71	46.25	74.00	-27.75	peak	H
9648.000	32.28	17.60	49.88	74.00	-24.12	peak	H
N/A							

Remark:


1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

TX / IEEE 802.11n HT 20 MHz mode / CH Mid

Polarity: Vertical

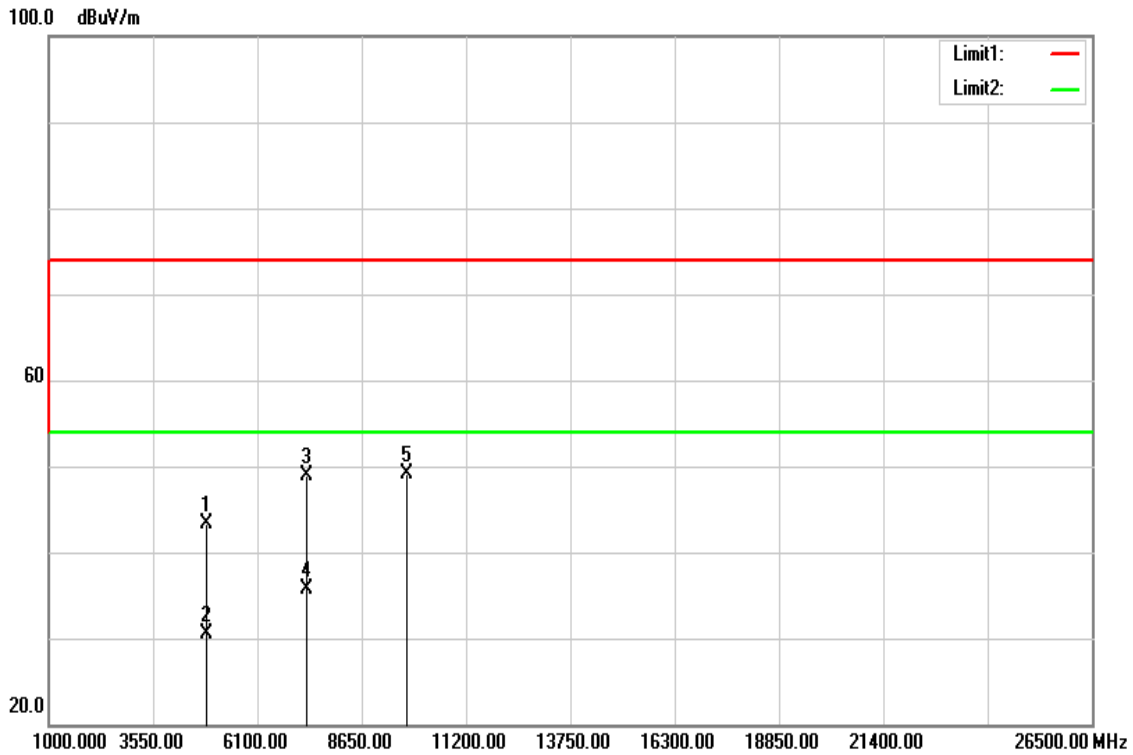

Polarity: Horizontal

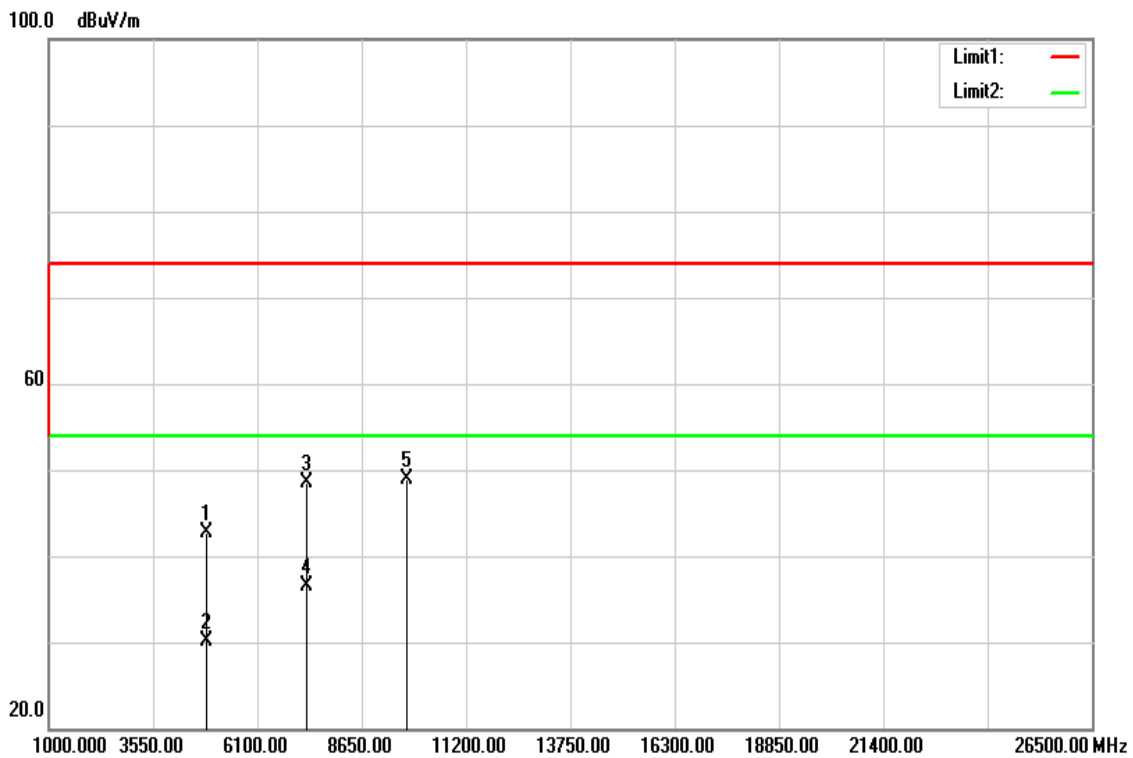

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Mid **Test Date:** October 22, 2016

Temperature: 27°C

Tested by: Dennis Li

Humidity: 53% RH

Polarity: Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4874.000	38.03	5.23	43.26	74.00	-30.74	peak	V
4874.000	25.25	5.23	30.48	54.00	-23.52	AVG	V
7311.000	35.95	12.94	48.89	74.00	-25.11	peak	V
7311.000	22.80	12.94	35.74	54.00	-18.26	AVG	V
9748.000	31.52	17.60	49.12	74.00	-24.88	peak	V
N/A							
4874.000	37.43	5.23	42.66	74.00	-31.34	peak	H
4874.000	24.95	5.23	30.18	54.00	-23.82	AVG	H
7311.000	35.62	12.94	48.56	74.00	-25.44	peak	H
7311.000	23.47	12.94	36.41	54.00	-17.59	AVG	H
9748.000	31.24	17.60	48.84	74.00	-25.16	peak	H
N/A							

Remark:


1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

TX / IEEE 802.11n HT 20 MHz mode / CH High

Polarity: Vertical

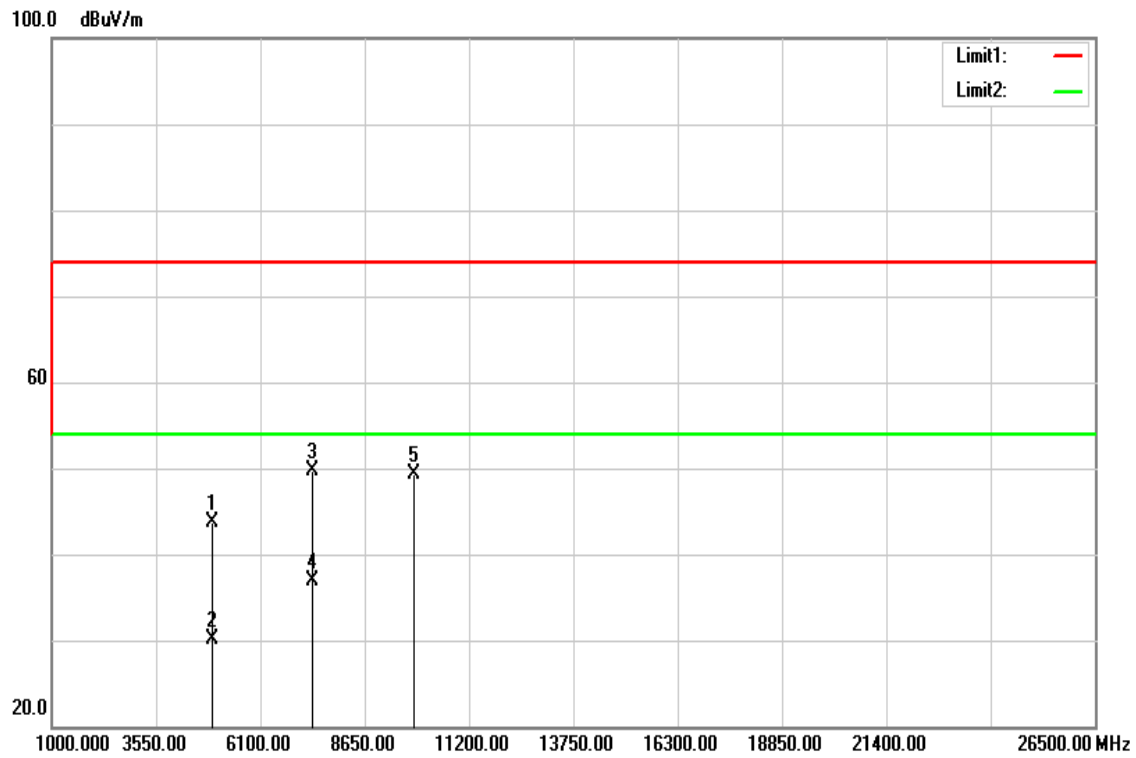

Polarity: Horizontal

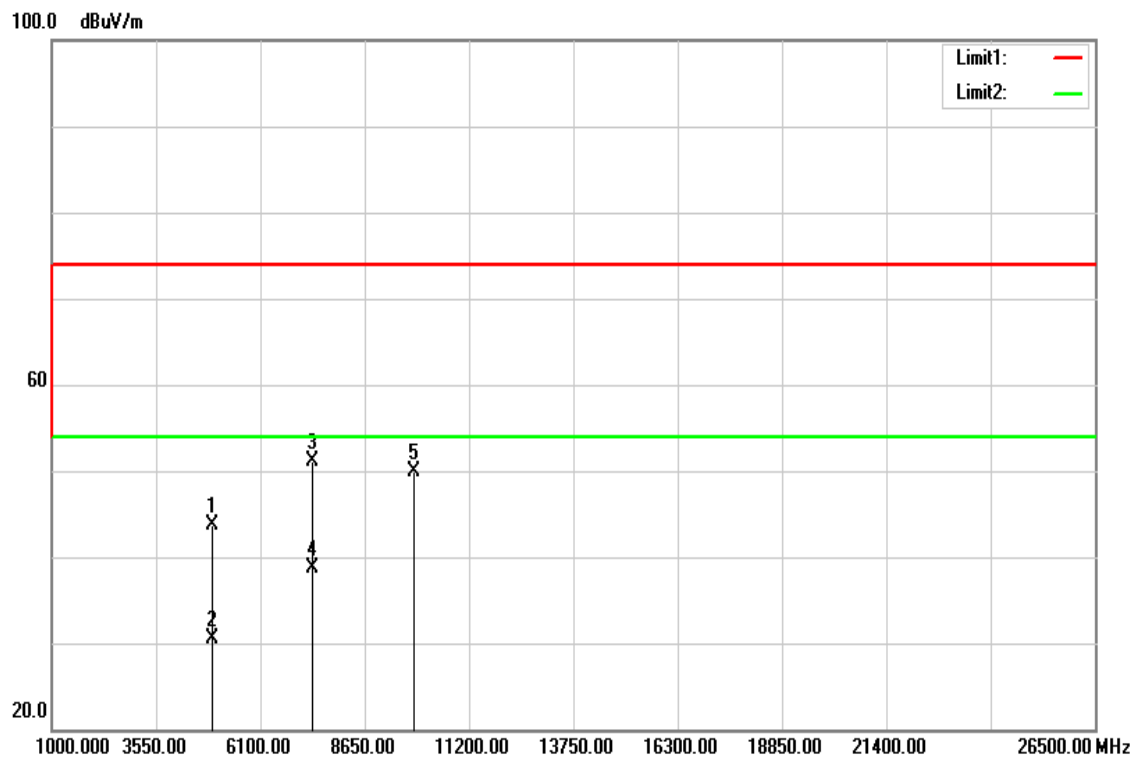

Operation Mode:TX / IEEE 802.11n HT 20 MHz mode / CH High **Test Date:** October 22, 2016

Temperature: 27°C

Tested by:Dennis Li

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4924.000	38.29	5.37	43.66	74.00	-30.34	peak	V
4924.000	24.81	5.37	30.18	54.00	-23.82	AVG	V
7386.000	36.62	13.17	49.79	74.00	-24.21	peak	V
7386.000	23.65	13.17	36.82	54.00	-17.18	AVG	V
9848.000	31.79	17.60	49.39	74.00	-24.61	peak	V
N/A							
4924.000	38.34	5.37	43.71	74.00	-30.29	peak	H
4924.000	25.08	5.37	30.45	54.00	-23.55	AVG	H
7386.000	38.00	13.17	51.17	74.00	-22.83	peak	H
7386.000	25.50	13.17	38.67	54.00	-15.33	AVG	H
9848.000	32.25	17.60	49.85	74.00	-24.15	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a) & RSS-Gen §8.8, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration


See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

Test Plots

Conducted emissions (Line 1)

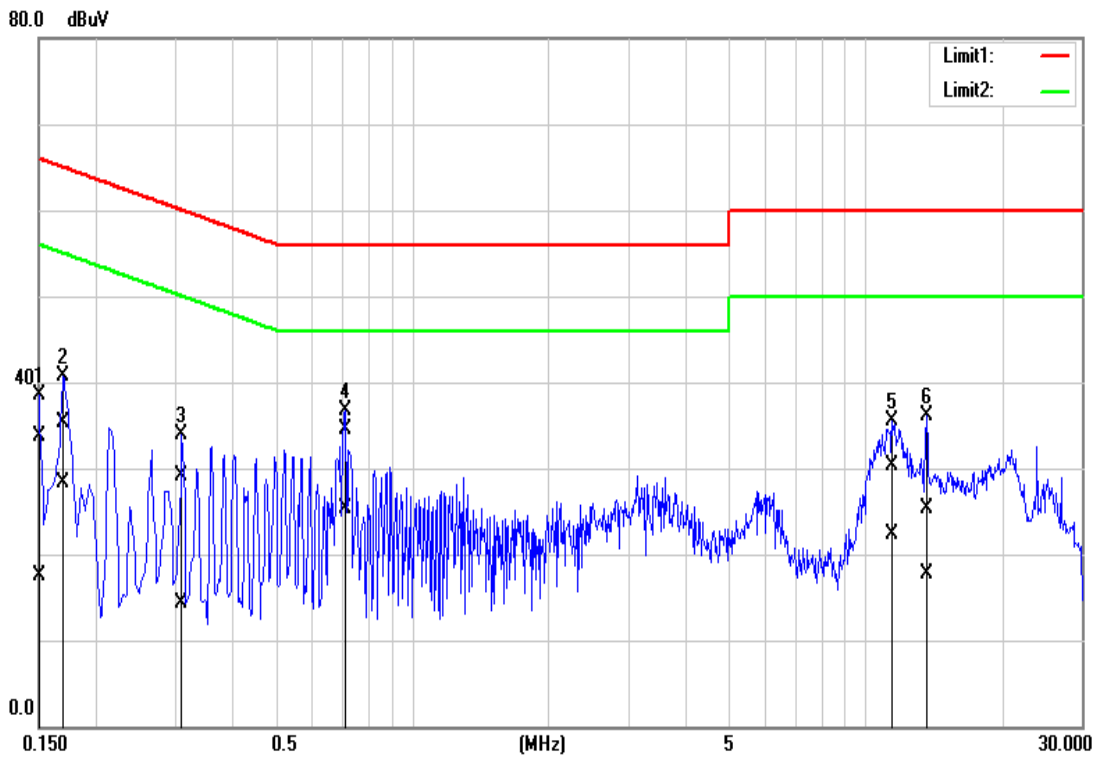

Conducted emissions (Line 2)

