



## SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 6191 5666

Fax: +86 (0) 21 6191 5678

ee.shanghai@sgs.com

Report No.: SHEM140900247402

Page: 1 of 24

### 1 Cover Page

# RF TEST REPORT

Application No.:	SHEM1409002474RF
Applicant:	iSmart Alarm, Inc.
FCC ID:	SENSP3
IC:	10970A-SP3
<b>Equipment Under Test (EUT):</b> <b>NOTE:</b> The following sample(s) submitted was/were identified on behalf of the client as	
Product Name:	Smart Switch
Model No.(EUT):	SP3
Standards:	FCC PART 15 Subpart C Section 15.249: 2013 RSS-210 Issue 8 (December 2010) RSS-Gen Issue 3 (December 2010)
Date of Receipt:	September 29, 2014
Date of Test:	October 17, 2014 to November 07, 2014
Date of Issue:	November 10, 2014
Test Result:	<b>Pass*</b>

\*In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Tony Wu

E&E Section Manager

SGS-CSTC (Shanghai) Co., Ltd.

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.




The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## 2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00	/	November 10, 2014	/	Original

Authorized for issue by:				
Engineer		Eddy Zong _____ Print Name		 _____ 
Clerk		Susie Liu _____ Print Name		 _____ 
Reviewer		Kenx Xu _____ Print Name		 _____ 

### 3 Test Summary

Test Item	Test Requirement	IC Reference	Test method	Result
Antenna Requirement	FCC Part 15, Subpart C Section 15.203	RSS-Gen 7.1.2	---	PASS
AC Power Line Conducted Emission	FCC Part 15, Subpart C Section 15.207	RSS-Gen Issue 3 Section 7.2.4	ANSI C63.10 (2009) Section 6.2	PASS
Field Strength of the Fundamental Signal	FCC Part 15, Subpart C Section 15.249 (a)	RSS-210 Issue 8 Annex 2.9 (a)	ANSI C63.10 (2009) Section 6.10.2	PASS
Radiated Spurious Emissions	FCC Part 15, Subpart C Section 15.249 (a) &15.209&15.205	RSS-Gen Issue 3 Section 4.9 RSS-Gen Issue 3 Section 7.2.2	ANSI C63.10 (2009) Section 6.5&6.6&6.7	PASS
20dB Bandwidth	FCC Part 15, Subpart C Section 15.215 (c)	RSS-210 Issue 8 Annex 8	ANSI C63.10 (2009) Section 6.9.1	PASS
99% Occupied bandwidth	---	RSS-Gen Issue 3 Section 4.6.1	RSS-Gen Issue 3 Section 4.6.1	PASS

## 4 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 VERSION .....</b>	<b>2</b>
<b>3 TEST SUMMARY .....</b>	<b>3</b>
<b>4 CONTENTS.....</b>	<b>4</b>
<b>5 GENERAL INFORMATION .....</b>	<b>5</b>
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TECHNICAL SPECIFICATIONS:.....	5
5.4 DESCRIPTION OF SUPPORT UNITS.....	5
5.5 TEST MODE.....	5
5.6 TEST LOCATION .....	5
5.7 TEST FACILITY .....	6
5.8 MEASUREMENT UNCERTAINTY .....	6
<b>6 EQUIPMENTS USED DURING TEST .....</b>	<b>7</b>
<b>7 TEST RESULTS .....</b>	<b>8</b>
7.1 E.U.T. TEST CONDITIONS .....	8
7.2 ANTENNA REQUIREMENT.....	8
7.3 CONDUCTED EMISSIONS ON MAINS TERMINALS .....	9
7.4 FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL .....	13
7.5 RADIATED SPURIOUS EMISSIONS AND BAND-EDGE.....	15
7.5.1 Radiated Spurious Emissions.....	18
7.6 20dB BANDWIDTH .....	22
7.7 99% OCCUPIED BANDWIDTH .....	23
<b>8 TEST SETUP PHOTOGRAPHS.....</b>	<b>24</b>
<b>9 EUT CONSTRUCTIONAL DETAILS.....</b>	<b>24</b>

## 5 General Information

### 5.1 Client Information

Applicant: iSmart Alarm, Inc.  
 Address of Applicant: 1290 Kifer Road Suite 306, Sunnyvale, CA 94086, USA  
 Manufacturer: iSmart Alarm, Inc.  
 Address of Manufacturer: 1290 Kifer Road Suite 306, Sunnyvale, CA 94086, USA  
 Factory: Andon Health Co., Ltd  
 Address of Factory: No.3 JinPing Road YaAn Street Nankai District Tianjin, China

### 5.2 General Description of E.U.T.

Product Description: Fixed Product  
 Brand Name: iSmartAlarm™  
 Power Supply: AC 120V, 60Hz, 10A Max

### 5.3 Technical Specifications:

Operation Frequency: 908 MHz  
 Modulation Technique: GFSK  
 Number of Channel: 1  
 Antenna Type: Spring antenna

### 5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Supplied by
Incandescent filament lamp	/	2010KU25	SGS

### 5.5 Test Mode

Test Mode	Description of Test Mode
Engineering mode	Keeps EUT working in continuous transmitting mode

### 5.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.  
 No.588 West Jindu Road, Songjiang District, Shanghai, China.201612.  
 Tel: +86 21 6191 5666  
 Fax: +86 21 6191 5678

## 5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2017-07-14.

- **FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2017-09-16.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1. Expiry Date: 2017-06-18.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868 and C-4336 respectively. Date of Registration: 2012-05-29. Date of Expiry: 2015-05-28.

## 5.8 Measurement Uncertainty

No.	Parameter	Measurement Uncertainty
1	Radio Frequency	$< \pm 1 \times 10^{-5}$
2	Total RF power, conducted	$< \pm 1.5 \text{ dB}$
3	RF power density, conducted	$< \pm 3 \text{ dB}$
4	Spurious emissions, conducted	$< \pm 3 \text{ dB}$
5	All emissions, radiated	$< \pm 6 \text{ dB (30MHz – 1GHz)}$ $< \pm 6 \text{ dB (above 1GHz)}$
6	Temperature	$< \pm 1^{\circ}\text{C}$
7	Humidity	$< \pm 5 \%$
8	DC and low frequency voltages	$< \pm 3 \%$

## 6 Equipments Used during Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2014-02-14	2015-02-13
2	Line impedance stabilization network	SCHWARZBECK	NSLK8127	8127-490	2014-02-14	2015-02-13
3	Line impedance stabilization network	ETS	3816/2	00034161	2014-02-14	2015-02-13
4	Spectrum Analyzer	Rohde & Schwarz	FSP-30	2705121009	2014-02-14	2015-02-13
5	EMI test receiver	Rohde & Schwarz	ESU40	100109	2014-02-14	2015-02-13
6	Active Loop Antenna (9kHz to 30MHz)	Rohde & Schwarz	FMZB 1519	1519-034	2014-03-19	2015-03-18
7	Broadband UHF-VHF ANTENNA (25MHz to 2GHz)	SCHWARZBECK	VULB9168	9168-313	2014-02-14	2015-02-13
8	Ultra broadband antenna (25MHz to 3GHz)	Rohde & Schwarz	HL562	100227	2014-10-09	2015-10-08
9	Horn Antenna (1GHz to 18GHz)	Rohde & Schwarz	HF906	100284	2014-02-14	2015-02-13
10	Horn Antenna (1GHz to 18GHz)	SCHWARZBECK	BBHA9120D	9120D-679	2014-07-28	2015-07-27
11	Horn Antenna (14GHz to 40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170373	2014-02-14	2015-02-13
12	Pre-amplifier (9KHz – 2GHz)	LNA6900	TESEQ	71033	2014-02-14	2015-02-13
13	Pre-amplifier (1GHz – 26.5GHz)	Rohde & Schwarz	SCU-F0118-G40-BZ4-CSS(F)	10001	2014-02-14	2015-02-13
14	Pre-amplifier (14GHz – 40GHz)	Rohde & Schwarz	SCU-F1840-G35-BZ3-CSS(F)	10001	2014-02-14	2015-02-13
15	Tunable Notch Filter	Wainwright instruments GmbH	WRCT800.0/8 80.0-0.2/40-5SSK	9	2014-06-02	2015-06-01
16	High pass Filter	FSCW	HP 12/2800-5AA2	19A45-02	2014-06-02	2015-06-01
17	High-low temperature cabinet	Suzhou Zhihe	TL-40	50110050	2014-04-13	2015-04-12
18	AC power stabilizer	WOCEN	6100	51122	2014-06-02	2015-06-01
19	DC power	QJE	QJ30003SII	611145	2014-06-02	2015-06-01
20	Signal Generator (Interferer)	Agilent	SMR40	100555	2014-02-14	2015-02-13
21	Signal Generator (Blocker)	Rohde & Schwarz	SMJ100A	02.20.360.142	2014-02-14	2015-02-13
22	Splitter	Anritsu	MA1612A	M12265	/	/
23	Coupler	e-meca	803-S-1	900-M01	/	/



## 7 Test Results

### 7.1 E.U.T. test conditions

**Test Voltage:** AC 120V 60Hz

**Requirements:** 15.31(e) For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

**Operating Environment:**

Temperature:	20.0 -25.0 °C
Humidity:	35-75 % RH
Atmospheric Pressure:	99.2 -102.0 kPa

### 7.2 Antenna Requirement


**Standard requirement:**

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

**EUT Antenna:**

The antenna is Integral Spring antenna.

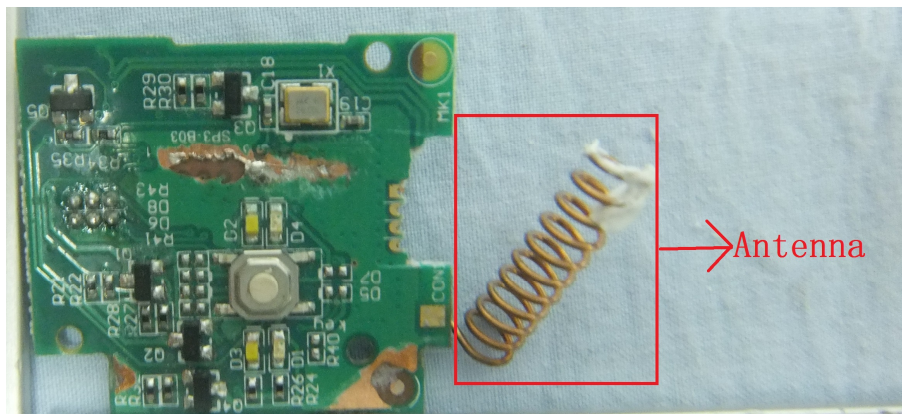



### 7.3 Conducted Emissions on Mains Terminals

**Frequency Range:** 150 KHz to 30 MHz

**Class/Severity:** Class B

**Limit:**


Frequency range MHz	Class B Limits: dB (μV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

Note2: The lower limit is applicable at the transition frequency.

**Test site/setup:** Test instrumentation set-up:

Frequency Range	Detector	RBW	VBW
9KHz to 150Hz	Quasi-peak	200Hz	500Hz
150KHz to 30MHz	Quasi-peak	9kHz	30kHz

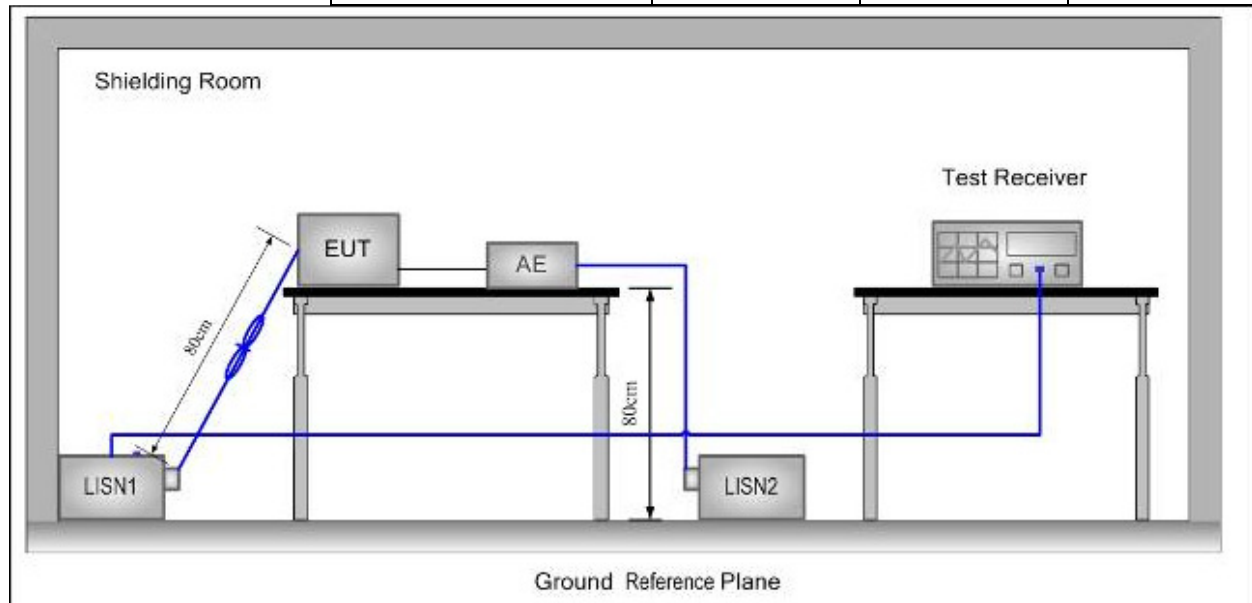

#### Test Procedure:

1. The mains terminal disturbance voltage was measured with the EUT in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN, which was bonded to the ground reference plane in the same way as the LISN for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.


4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance was between the closest points of the LISN and the EUT. The mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m. All other units of the EUT and associated equipment were at least 0.8 m from the LISN.

Remark: Pre-scan was performed with peak detected on all ports, Quasi-peak & average measurements were performed at the frequencies at which maximum peak emission level were detected. Please see the attached Quasi-peak and Average test results.

**Test Result:** N/A


**Test Data:**

Live Line:

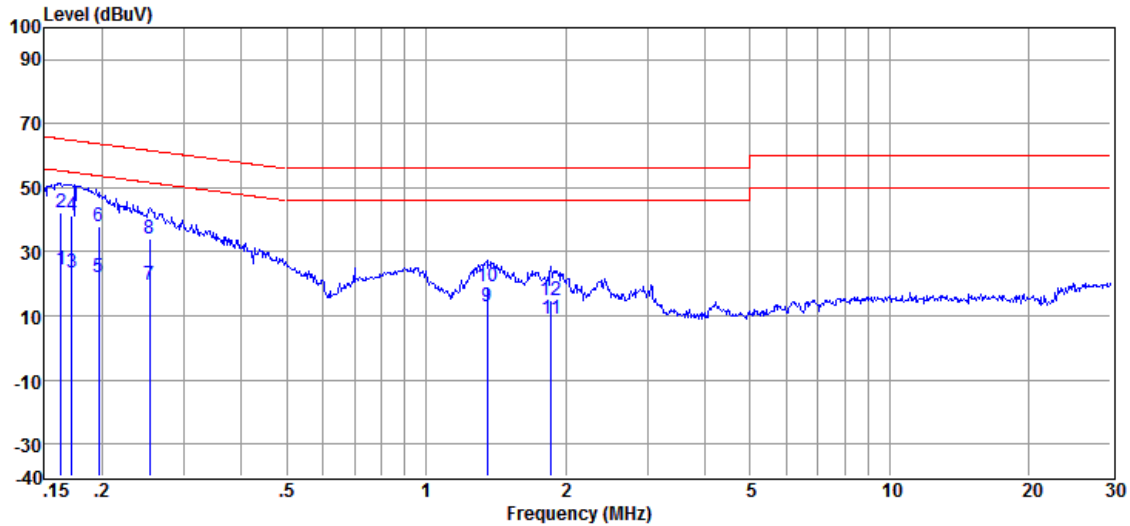

Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.163	24.15	0.31	0.10	24.56	55.30	-30.74	Average
2	0.163	41.70	0.31	0.10	42.11	65.30	-23.19	QP
3	0.172	23.18	0.30	0.10	23.58	54.86	-31.28	Average
4	0.172	40.73	0.30	0.10	41.13	64.86	-23.73	QP
5	0.197	21.61	0.26	0.10	21.97	53.76	-31.79	Average
6	0.197	37.79	0.26	0.10	38.15	63.76	-25.61	QP
7	0.253	19.43	0.26	0.10	19.79	51.64	-31.85	Average
8	0.253	33.51	0.26	0.10	33.87	61.64	-27.77	QP
9	1.352	12.39	0.25	0.10	12.74	46.00	-33.26	Average
10	1.352	18.72	0.25	0.10	19.07	56.00	-36.93	QP
11	1.858	8.63	0.34	0.10	9.07	46.00	-36.93	Average
12	1.858	14.40	0.34	0.10	14.84	56.00	-41.16	QP

Neutral Line:

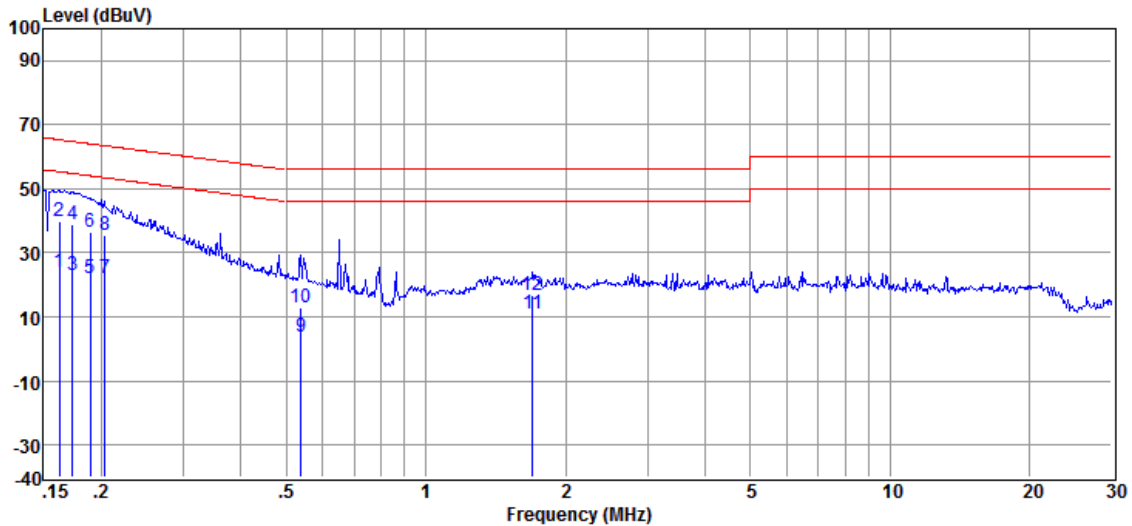

Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.162	23.37	0.33	0.10	23.80	55.34	-31.54	Average
2	0.162	39.30	0.33	0.10	39.73	65.34	-25.61	QP
3	0.173	22.81	0.32	0.10	23.23	54.81	-31.58	Average
4	0.173	38.43	0.32	0.10	38.85	64.81	-25.96	QP
5	0.189	21.43	0.30	0.10	21.83	54.06	-32.23	Average
6	0.189	35.93	0.30	0.10	36.33	64.06	-27.73	QP
7	0.204	21.78	0.29	0.10	22.17	53.45	-31.28	Average
8	0.204	35.15	0.29	0.10	35.54	63.45	-27.91	QP
9	0.538	3.49	0.28	0.10	3.87	46.00	-42.13	Average
10	0.538	12.31	0.28	0.10	12.69	56.00	-43.31	QP
11	1.698	9.98	0.82	0.10	10.90	46.00	-35.10	Average
12	1.698	15.61	0.82	0.10	16.53	56.00	-39.47	QP

Level = Read Level + LISN/ISN Factor + Cable Loss.

## 7.4 Field Strength of the Fundamental Signal

Test Site: Measurement Distance: 3m (Semi-Anechoic Chamber)


Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Limit:

Frequency	Limit (dBuV/m)	Remark
902-928 MHz	114	Peak
	94	Average

Test Setup:

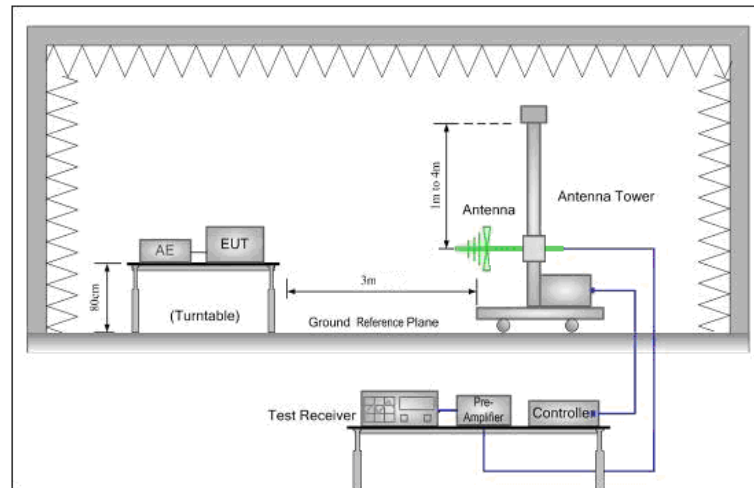

Test Procedure:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Results: Pass



Measurement Data

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
908	89.11	22.70	91.32	94	-2.68	Peak	Horizontal
	84.40	22.70	86.61	94	-7.39	Peak	Vertical

Remark:

- 1) The basic equation with a sample calculation is as follows: Level = Read Level + Factor.  
(The Factor is calculated by adding the Antenna Factor, Cable Loss and Preamp Factor)
- 2) If the Peak value below the AV Limit, the AV test doesn't perform for this submission.

## 7.5 Radiated Spurious Emissions and Band-edge

**Frequency Range:** 9KHz to 10GHz

**Test site/setup:** Measurement Distance: 3m (Semi-Anechoic Chamber)  
Test instrumentation set-up:

Frequency Range	Detector	RBW	VBW
0.009MHz-0.090MHz	Peak	10kHz	30kHz
0.009MHz-0.090MHz	Average	10kHz	30kHz
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz
0.110MHz-0.490MHz	Peak	10kHz	30kHz
0.110MHz-0.490MHz	Average	10kHz	30kHz
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz
30MHz-1GHz	Quasi-peak	100kHz	300kHz
Above 1GHz	Peak	RBW=1MHz	VBW≥RBW
	Average		VBW=10Hz

Sweep=Auto

**15.209 Limit:**

Frequency	Limit (dBuV/m)
0.009MHz-0.490MHz	128.5 ~ 93.8
0.490MHz-1.705MHz	73.8 ~63.0
1.705MHz-30MHz	69.5
30MHz-88MHz	40.0
88MHz-216MHz	43.5
216MHz-960MHz	46.0
960MHz-1GHz	54.0
Above 1GHz	54.0

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



**Test Configuration:** Receive antenna scan height 1 m - 4 m. polarization Vertical / Horizontal

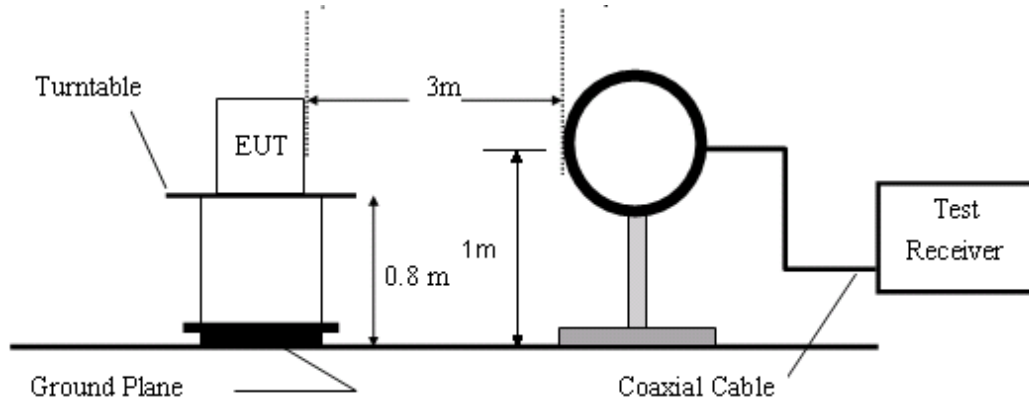


Figure1. 30MHz to 1GHz radiated emissions test configuration

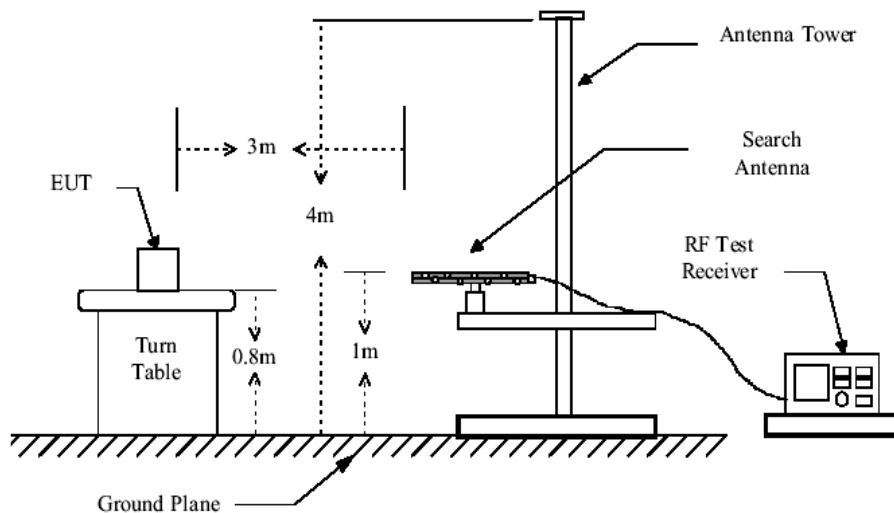


Figure2. 30MHz to 1GHz radiated emissions test configuration

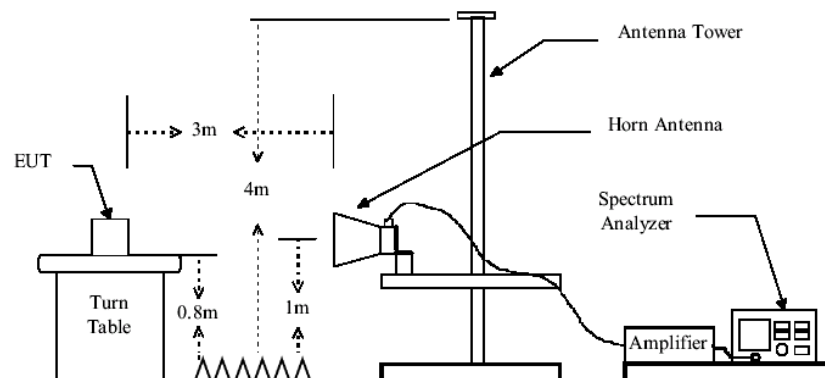


Figure3. Above 1GHz radiated emissions test configuration

**Test Procedure:** The procedure used was ANSI Standard C63.10:2009. The receiver was scanned from 9KHz to 10GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Low noise amplifier was used below 1GHz, High pass Filter was used above 3GHz.

Between 1G and 3GHz, we did not use any amplifier or filter.

Pre-test was performed on Antenna A and Antenna B mode, Compliance test was performed on worse case (Antenna A mode).

Test were performed for their spatial orthogonal(X, Y, Z), the worst test data (X orthogonal) was submitted.

- 1) For this intentional radiator operates below 25 GHz. the spectrum shall be investigated to the tenth harmonic of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 5rd harmonic.
- 2) As shown in Section, for frequencies above 1000MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

**Test Result:** Pass

## 7.5.1 Radiated Spurious Emissions


30MHz-1GHz:

Vertical:

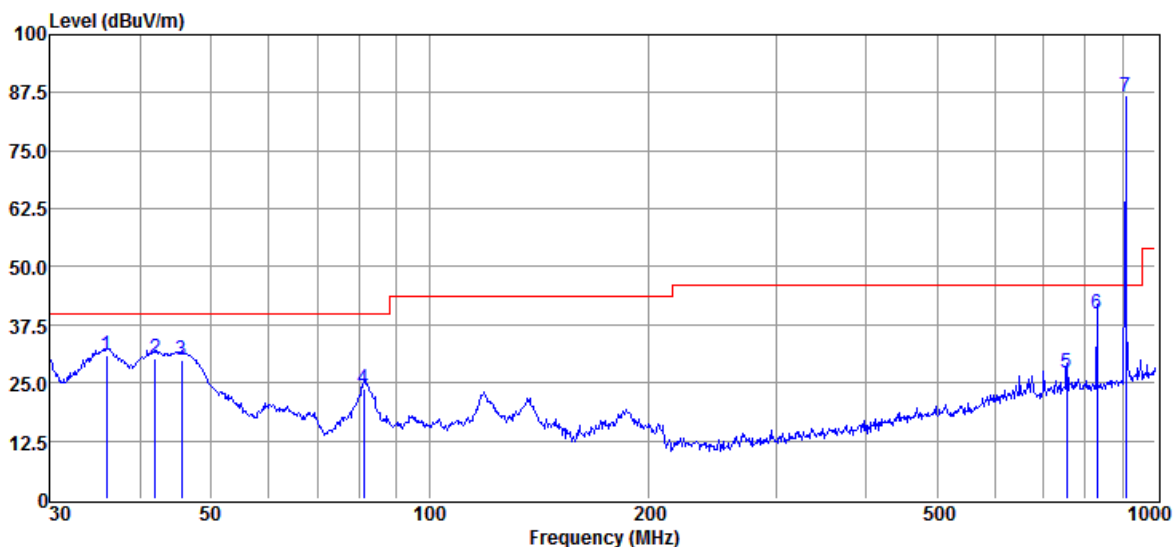

Item	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	35.875	41.60	12.69	23.71	0.19	30.77	40.00	-9.23	QP
2	41.860	40.41	13.10	23.70	0.29	30.10	40.00	-9.90	QP
3	45.535	40.15	13.07	23.70	0.34	29.86	40.00	-10.14	QP
4	81.212	38.14	8.44	23.67	0.72	23.63	40.00	-16.37	QP
5	755.387	26.46	21.48	23.90	3.11	27.15	46.00	-18.85	QP
6	830.400	38.45	21.99	23.93	3.30	39.81	46.00	-6.19	QP

Horizontal:

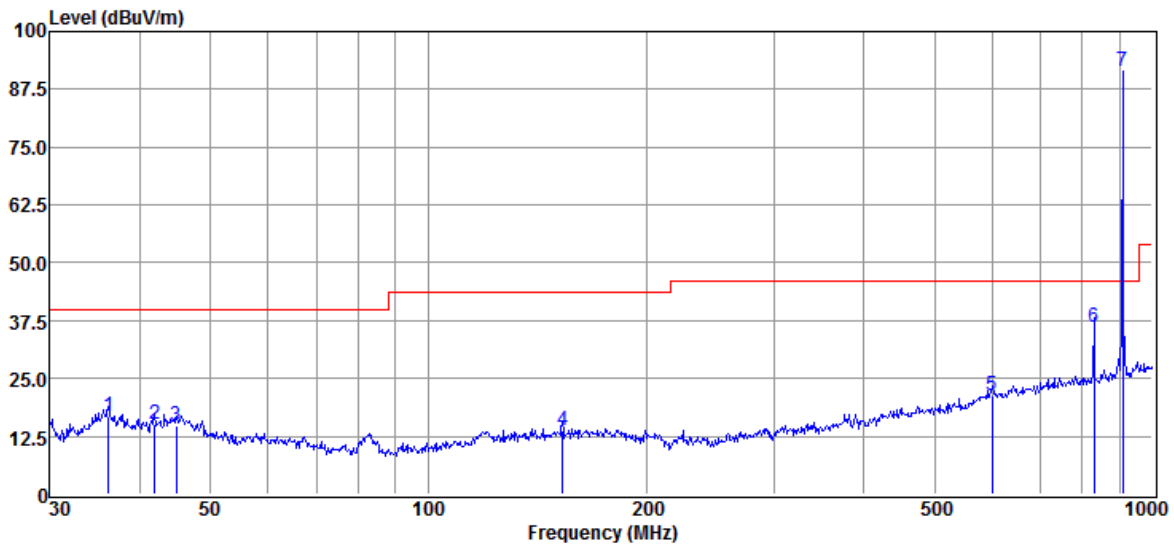

Item	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	36.127	27.53	12.71	23.71	0.20	16.73	40.00	-23.27	QP
2	41.860	25.52	13.10	23.70	0.29	15.21	40.00	-24.79	QP
3	44.901	25.06	13.10	23.70	0.33	14.79	40.00	-25.21	QP
4	153.200	23.83	12.30	23.64	1.19	13.68	43.50	-29.82	QP
5	601.427	22.71	19.58	23.81	2.72	21.20	46.00	-24.80	QP
6	830.400	34.70	21.99	23.93	3.30	36.06	46.00	-9.94	QP

Above 1GHz:

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1815	54.83	-4.46	50.37	54	-3.63	peak	Horizontal
2	4540	49.04	3.62	52.66	54	-1.34	peak	Horizontal
3	5450	46.32	7.15	53.47	54	-0.53	peak	Horizontal
4	1815	48.68	-4.46	44.22	54	-9.78	peak	Vertical
5	4540	49.58	3.62	53.20	54	-0.80	peak	Vertical
6	5450	46.54	7.15	53.69	54	-0.31	peak	Vertical

Remark: 1. Test Level = Receiver Reading + Antenna Factor + Cable Loss- Preamplifier Factor

2. No any other emission which falls in restricted bands can be detected and be reported.

3. If the Peak value below the AV Limit, the AV test doesn't perform for this submission.

All frequencies within the "Restricted bands" have been evaluated to compliance. Section 15.205 Restricted bands of operation.

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

1. FCC Part 15, Subpart C Section 15.205 Restricted bands of operation.


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
1.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.5 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36 - 13.41			

2. RSS-Gen section 7.2.2 Restricted bands of operation

MHz	MHz	GHz
0.090-0.110	240-285	9.0-9.2
2.1735-2.1905	322-335.4	9.3-9.5
3.020-3.026	399.9-410	10.6-12.7
4.125-4.128	608-614	13.25-13.4
4.17725-4.17775	960-1427	14.47-14.5
4.20725-4.20775	1435-1626.5	15.35-16.2
5.677-5.683	1645.5-1646.5	17.7-21.4
6.215-6.218	1660-1710	22.01-23.12
6.26775-6.26825	1718.8-1722.2	23.6-24.0
6.31175-6.31225	2200-2300	31.2-31.8
8.291-8.294	2310-2390	36.43-36.5
8.362-8.366	2655-2900	Above 38.6
8.37625-8.38675	3260-3267	
8.41425-8.41475	3332-3339	
12.29-12.293	3345.8-3358	
12.51975-12.52025	3500-4400	
12.57675-12.57725	4500-5150	
13.36-13.41	5350-5460	
16.42-16.423	7250-7750	
16.69475-16.69525	8025-8500	
16.80425-16.80475		
25.5-25.67		
37.5-38.25		
73-74.6		
74.8-75.2		
108-138		
156.52475-156.52525		
156.7-156.9		

## 7.6 20dB Bandwidth

### Test Configuration:

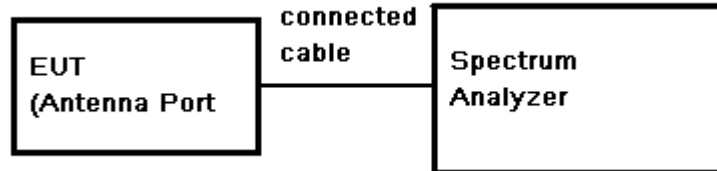

### Test Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = approximately 1 % to 5 % of the OBW (set 1 kHz), VBW = 3\* RBW, Span=100kHz, Sweep=auto
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat above procedures until all frequency measured was complete.

### Limit:

N/A


### Test Result:

Pass

### Test Data:

Frequency (MHz)	Bandwidth (kHz)	Result
908	19.97	PASS


### Test plot as follows:

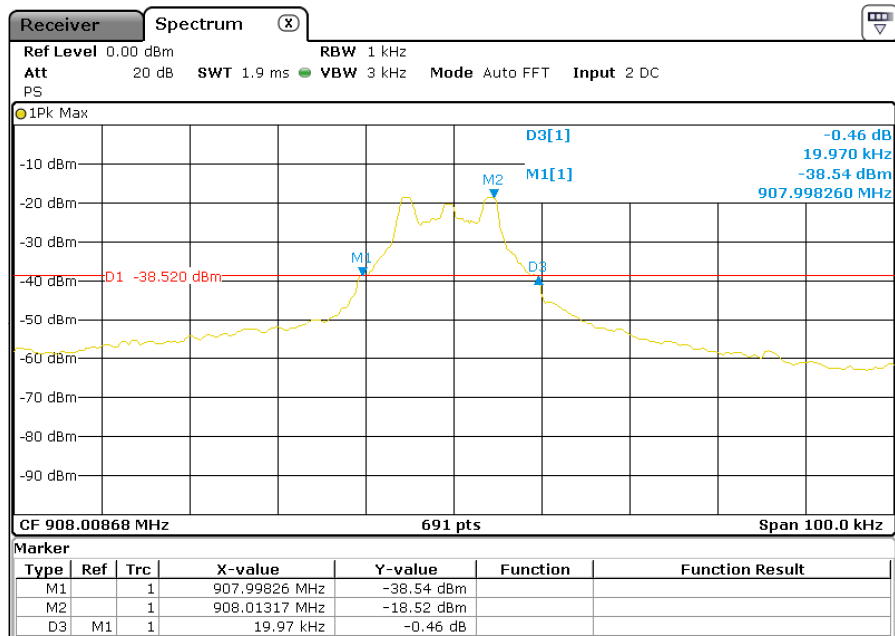



## 7.7 99% Occupied Bandwidth

### Test Configuration:

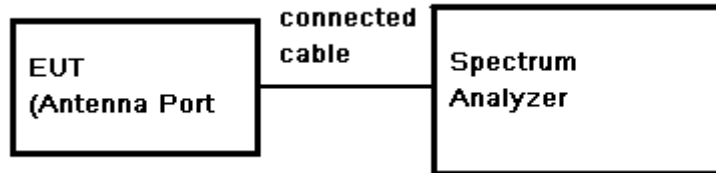

### Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: Span = approximately 2 to 3 times the 20dB bandwidth, centred on the hopping channel;
3. Set the spectrum analyzer: RBW = 1% of the span (set 1 kHz). VBW >= RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
4. Mark the peak frequency and using the 99% OBW function measure the bandwidth.


### Test Result:

Pass

### Test Date:

Frequency (MHz)	Bandwidth (kHz)	Result
908	18.23	PASS

Test plot as follows:

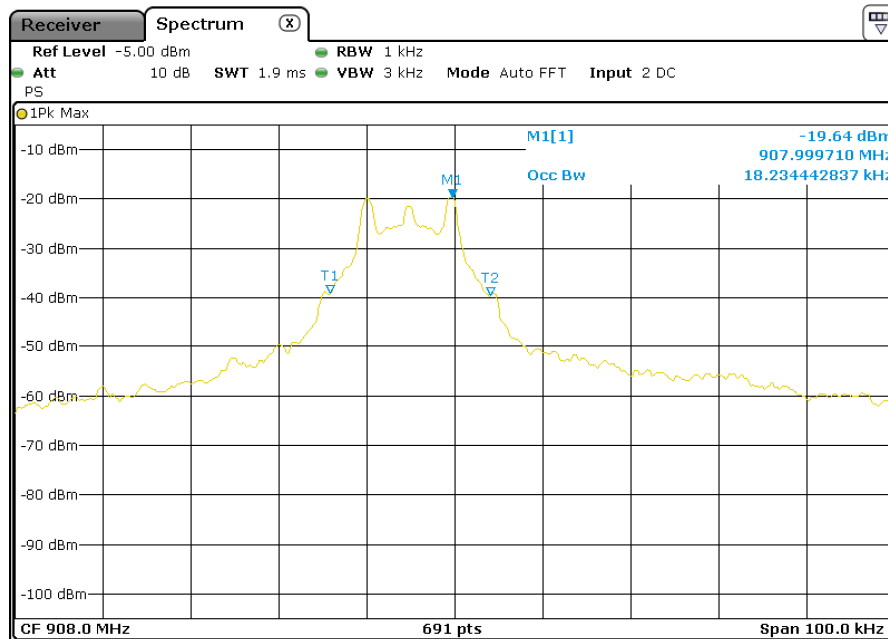

## **8 Test Setup Photographs**

Refer to the < SP3 \_Test Setup photos-FCC>.

## **9 EUT Constructional Details**

Refer to the < SP3 \_External Photos-FCC > & < SP3 \_Internal Photos-FCC>.

**--End of the Report--**