

TEST REPORT

FCC ID: SF4-SH04

Product: Bluetooth headset

Model No.: SH04

**Additional Model: SH04/XX,SH04Y/XX("Y" can be A-Z,
denoting the different appearance; "XX" can be 00 to 99,
denoting the different color), PBT99, SBT524**

Trade Mark: BlueXtel(SH04), Polaroid (PBT99), Sharper image(SBT524)

Report No.: TCT150729E004

Issued Date: July 30, 2015

Issued for:

ATI Electronics (ShenZhen) Co., LTD

**1/F, B Tower, Shengdelan Industrial Park, Kukeng Village, Guanlan Town,
Shenzhen, China.**

Issued By:

Shenzhen Tongce Testing Lab.

1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification..... 3

2. Test Result Summary..... 4

3. EUT Description..... 5

4. General Information..... 6

 4.1. Test environment and mode..... 6

 4.2. Description of Support Units..... 6

5. Facilities and Accreditations..... 7

 5.1. Facilities..... 7

 5.2. Location..... 7

 5.3. Measurement Uncertainty..... 7

6. Test Results and Measurement Data..... 8

 6.1. Antenna requirement..... 8

 6.2. Conducted Emission..... 9

 6.3. Conducted Output Power..... 13

 6.4. 20dB Occupancy Bandwidth..... 18

 6.5. Carrier Frequencies Separation..... 23

 6.6. Hopping Channel Number..... 28

 6.7. Dwell Time..... 31

 6.8. Pseudorandom Frequency Hopping Sequence..... 34

 6.9. Conducted Band Edge Measurement..... 35

 6.10. Conducted Spurious Emission Measurement..... 39

 6.11. Radiated Spurious Emission Measurement..... 43

Appendix A: Photographs of Test Setup

Appendix B: Photographs of EUT

1. Test Certification

Product:	Bluetooth headset
Model No.:	SH04
Additional Model:	SH04/XX,SH04Y/XX (“Y” can be A-Z, denoting the different appearance; “XX” can be 00 to 99, denoting the different color), PBT99, SBT524
Applicant:	ATI Electronics (ShenZhen) Co., LTD
Address:	1/F, B Tower, Shengdelan Industrial Park,Kukeng Village, Guanlan Town, Shenzhen,China.
Manufacturer:	ATI Electronics (ShenZhen) Co., LTD
Address:	1/F, B Tower, Shengdelan Industrial Park,Kukeng Village, Guanlan Town, Shenzhen,China.
Date of Test:	July 29 –July 30, 2015
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:



Date:

July 30, 2015

Reviewed By:


SKY

Date:

July 31, 2015

Approved By:


Joe Zhou

Date:

July 31, 2015

Tomsin

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(1)	PASS
20dB Occupied Bandwidth	§15.247 (a)(1)	PASS
Carrier Frequencies Separation	§15.247 (a)(1)	PASS
Hopping Channel Number	§15.247 (a)(1)	PASS
Dwell Time	§15.247 (a)(1)	PASS
Radiated Emission	§15.205/§15.209	PASS
Band Edge	§15.247(d)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product Name:	Bluetooth headset
Model :	SH04
Additional Model:	SH04/XX,SH04Y/XX (“Y” can be A-Z, denoting the different appearance; “XX” can be 00 to 99, denoting the different color), PBT99, SBT524
Trade Mark:	BlueXtel(SH04), Polaroid(PBT99), Sharper image(SBT524)
BT Version:	V4.1
Operation Frequency:	2402MHz~2480MHz
Transfer Rate:	1/2/3 Mbits/s
Number of Channel:	79
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology:	FHSS
Antenna Type:	Internal Antenna
Antenna Gain:	0dBi
Power Supply:	Rechargeable Li-ion Battery DC3.7V

Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK, 8DPSK

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
...
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
...
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		-

Remark: Channel 0, 39 & 78 have been tested for GFSK, $\pi/4$ -DQPSK, 8DPSK modulation mode.

4. General Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations
<p>The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Laptop	G485	LB00402300	/	/

Note:

1. The Laptop is provided by Testing Lab.
2. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
3. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
4. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- CNAS - Registration No.: CNAS L6165

Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

Tel: 86-755-36638142

5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$

6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:

FCC Part15 C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The Bluetooth antenna is an internal antenna which permanently attached, and the best case gain of the antenna is 0dBi.

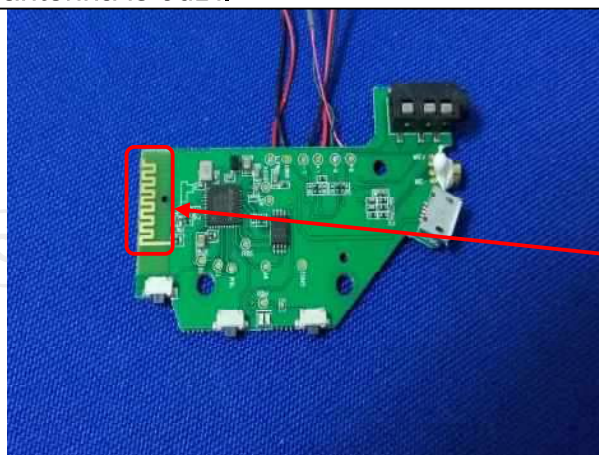

Antenna

6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.4:2009		
Frequency Range:	150 kHz to 30 MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limits:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
Test Setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>		
Test Mode:	Refer to item 4.1		
Test Procedure:	<ol style="list-style-type: none"> The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2009 on conducted measurement. 		
Test Result:	PASS		


6.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	100139	Sep. 16, 2015
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 29, 2015
Coax cable	TCT	CE-05	N/A	Sep.15 , 2015
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.2.3. Test data

Please refer to following diagram for individual
Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

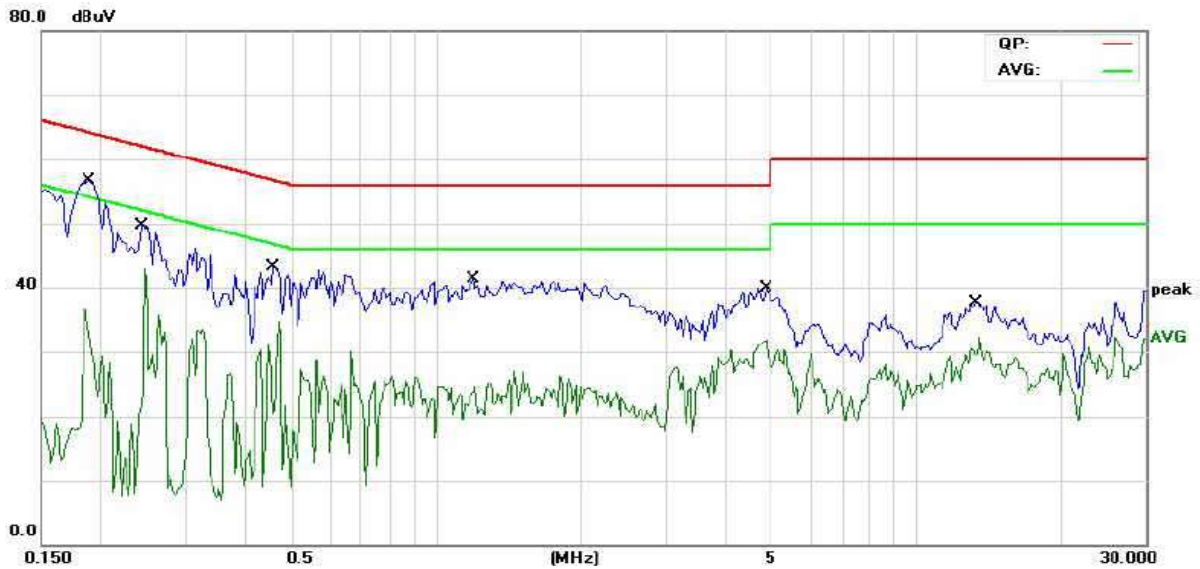


Site Chamber #2 Phase: L1 Temperature: 25 (C)
Limit: FCC PART15 Conduction(QP) Power: AC 120V/60Hz Humidity: 56 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1891	42.79	11.47	54.26	64.07	-9.81	QP	
2		0.1891	27.47	11.47	38.94	54.07	-15.13	AVG	
3		0.2437	34.69	11.44	46.13	61.97	-15.84	QP	
4		0.2437	17.07	11.44	28.51	51.97	-23.46	AVG	
5		0.4586	28.43	11.32	39.75	56.72	-16.97	QP	
6		0.4586	13.76	11.32	25.08	46.72	-21.64	AVG	
7		1.1930	25.24	11.27	36.51	56.00	-19.49	QP	
8		1.1930	8.89	11.27	20.16	46.00	-25.84	AVG	
9		4.8555	24.33	10.66	34.99	56.00	-21.01	QP	
10		4.8555	13.41	10.66	24.07	46.00	-21.93	AVG	
11		13.3242	21.23	11.46	32.69	60.00	-27.31	QP	
12		13.3242	13.23	11.46	24.69	50.00	-25.31	AVG	

Note:

- Freq. = Emission frequency in MHz
- Reading level (dBuV) = Receiver reading
- Corr. Factor (dB) = Antenna factor + Cable loss
- Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)
- Limit (dBuV) = Limit stated in standard
- Margin (dB) = Measurement (dBuV) – Limits (dBuV)
- Q.P. =Quasi-Peak
- AVG =average
- * is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

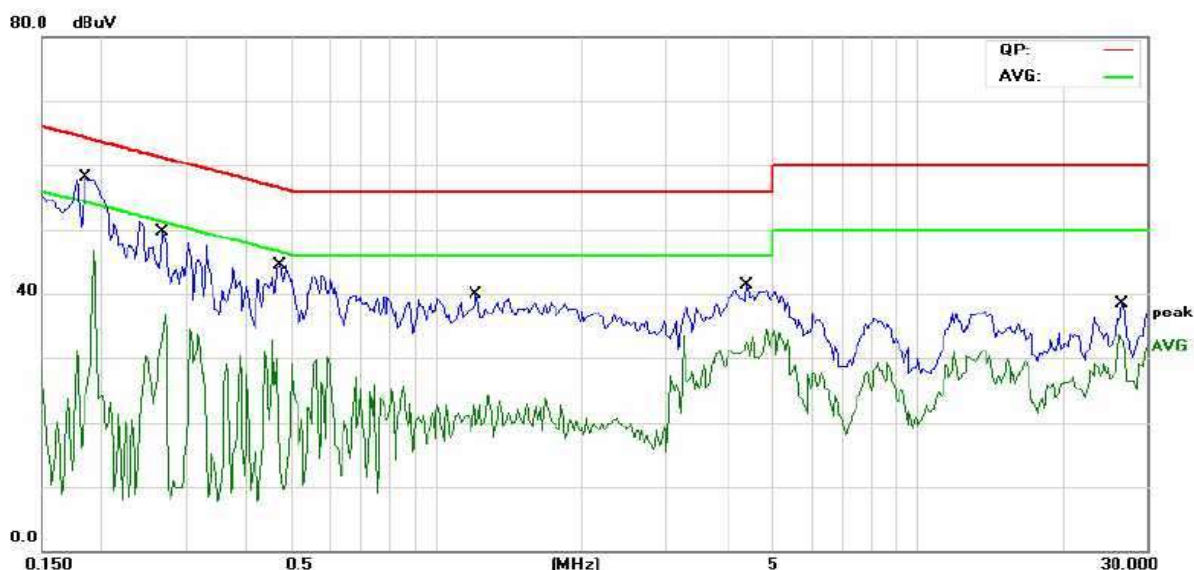

Site: Chamber #2 Phase: N Temperature: 25 (C)
 Limit: FCC PART15 Conduction(QP) Power: AC 120V/60Hz Humidity: 56 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1852	44.19	11.48	55.67	64.24	-8.57	QP	
2		0.1852	27.84	11.48	39.32	54.24	-14.92	AVG	
3		0.2672	34.36	11.43	45.79	61.20	-15.41	QP	
4		0.2672	15.80	11.43	27.23	51.20	-23.97	AVG	
5		0.4703	29.56	11.31	40.87	56.51	-15.64	QP	
6		0.4703	12.85	11.31	24.16	46.51	-22.35	AVG	
7		1.2086	22.77	11.27	34.04	56.00	-21.96	QP	
8		1.2086	7.91	11.27	19.18	46.00	-26.82	AVG	
9		4.4102	25.19	10.83	36.02	56.00	-19.98	QP	
10		4.4102	13.76	10.83	24.59	46.00	-21.41	AVG	
11		26.8047	19.34	10.68	30.02	60.00	-29.98	QP	
12		26.8047	11.00	10.68	21.68	50.00	-28.32	AVG	

Note1:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak

AVG =average


* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Note2:

Measurements were conducted in all three channels (high, middle, low) and three modulation(GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (middle channel and Pi/4 DQPSK) was submitted only.

6.3. Conducted Output Power

6.3.1. Test Specification

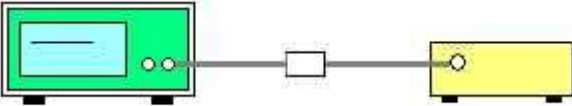Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2009 and DA00-705
Limit:	Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<p>Use the following spectrum analyzer settings:</p> <p>Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel</p> <p>RBW > the 20 dB bandwidth of the emission being measured</p> <p>VBW ≥ RBW</p> <p>Sweep = auto</p> <p>Detector function = peak</p> <p>Trace = max hold</p> <p>Allow the trace to stabilize.</p> <p>Use the marker-to-peak function to set the marker to the peak of the emission.</p>
Test Result:	PASS

6.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Oct. 21, 2015
RF Cable	TCT	RE-06	N/A	Sep.15 , 2015
Antenna Connector	TCT	RFC-01	N/A	Sep.15 , 2015

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.3.3. Test Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-2.464	21.00	PASS
Middle	-0.613	21.00	PASS
Highest	0.282	21.00	PASS

Pi/4DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-1.808	21.00	PASS
Middle	0.017	21.00	PASS
Highest	0.886	21.00	PASS

8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-1.788	21.00	PASS
Middle	0.043	21.00	PASS
Highest	0.957	21.00	PASS

Test plots as follows:

Lowest channel



Middle channel



Highest channel

