



CONFORMANCE TEST REPORT FOR FCC 47 CFR, Part 15 Subpart C

Report No.: 09-12-MAS-279-02

Client: IQ-Group Sdn. Bhd. (Representative Office)
Product: Wireless Door Monitor
Model: VD-8810M
FCC ID: SFV-09VD8810M
Manufacturer/supplier: IQ Group (Dongguan) Ltd.

Date test item received: 2009/11/08
Date test campaign completed: 2009/12/30
Date of issue: 2010/01/13

The test result only corresponds to the tested sample. It is not permitted to copy this report, in part or in full, without the permission of the test laboratory.

Total number of pages of this test report: 53 pages

Total number of pages of photos: External photos 3 pages

Internal photos 10 pages

Setup photos 4 pages

Test Engineer	Checked By	Approved By
 John Li	 James Cheng	 Joe Hsieh

ELECTRONICS TESTING CENTER, TAIWAN
NO.8, LANE 29, WENMING RD.,
LESHAN TSUEN, GUISHAN SHIANG,
TAOYUAN COUNTY, TAIWAN 33383,
R.O.C.TAIWAN, R.O.C.

TEL: (03) 3276170~4
INT: +886-3-3276170~4
FAX: (03) 3276188
INT: +886-3-3276188



Client : IQ-Group Sdn. Bhd. (Representative Office)
Address : 5th Fl., No.16, Lane 130,Ming-Chun Road, Hsin Tien, Taipei Hsien, Taiwan.
Manufacturer : IQ Group (Dongguan) Ltd.
Address : Xi Xi Industrial Region, Liao Bu Town, Dongguan City, Guang Dong Province, China 523402
EUT : Wireless Door Monitor
Trade name : Home Depot
Model No. : VD-8810M
Power Source : Adaptor (ITE / GFP051U-0610)
Input 100-240VAC , 50/60Hz , 0.2A
Output 6V dc , 1A
Regulations applied : FCC 47 CFR, Part 15 Subpart C (2008)

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to believe the sellers from their legal and/or contractual obligations.

The compliance test is only certified for the test equipment and the results of the testing report relate only to the item tested. The compliance test of this report was conducted in accordance with the appropriate standards. It's not intention to assure the quality and performance of the product. This report shall not be reproduced except in full, without the approval of ETC. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

Laboratory Introduction: Electronics Testing Center, Taiwan is recognized, filed and mutual recognition arrangement as following:

- ① ISO9001: TÜV Product Service
- ② ISO/IEC 17025: BSMI, CNLA, DGT, NVLAP, CCIBLAC, UL, Compliance
- ③ Filing: FCC, Industry Canada, VCCI
- ④ MRA: Australia, Hong Kong, New Zealand, Singapore, USA, Japan, Korea, China, APLAC through TAF
- ⑤ FCC Registration Number: 90588, 91094, 91095
- ⑥ Industry Canada Site Registration number: IC 2949A-1



NVLAP Lab Code 200133-0

Table of Contents	Page
1 GENERAL INFORMATION.....	5
1.1 Product Description.....	5
1.2 Characteristics of Device	5
1.3 Test Methodology	5
1.4 Modification List of EUT	5
1.5 Test Facility.....	5
1.6 Test Summary	5
2 PROVISIONS APPLICABLE.....	6
2.1 Definition	6
2.2 Requirement for Compliance	7
2.3 Restricted Bands of Operation	9
2.4 Labeling Requirement.....	9
2.5 User Information	10
3. SYSTEM TEST CONFIGURATION.....	11
3.1 Justification	11
3.2 Devices for Tested System.....	11
4 RADIATED EMISSION MEASUREMENT	12
4.1 Applicable Standard.....	12
4.2 Measurement Procedure.....	12
4.3 Measuring Instrument	14
4.4 Radiated Emission Data	15
4.5 Field Strength Calculation	19
5 CONDUCTED EMISSION MEASUREMENT.....	20
5.1 Standard Applicable.....	20
5.2 Measurement Procedure.....	20
5.3 Conducted Emission Data	21
5.4 Result Data Calculation	23
5.5 Conducted Measurement Equipment	23
6 ANTENNA REQUIREMENT.....	24
6.1 Standard Applicable	24
6.2 Antenna Construction and Directional Gain.....	24
7 20dB EMISSION BANDWIDTH MEASUREMENT	25
7.1 Standard Applicable	25
7.2 Measurement Procedure.....	25

7.3 Measurement Equipment	25
7.4 Measurement Data	26
8 OUTPUT POWER MEASUREMENT	30
8.1 Standard Applicable	30
8.2 Measurement Procedure.....	30
8.3 Measurement Equipment	30
8.4 Measurement Data	31
9 OUT-OF-BAND RF CONDUCTED SPURIOUS EMISSION MEASUREMENT	35
9.1 Standard Applicable	35
9.2 Measurement Procedure.....	35
9.3 Measurement Equipment	35
9.4 Measurement Data	36
10 NUMBER OF HOPPING CHANNELS.....	42
10.1 Standard Applicable	42
10.2 Measurement Procedure.....	42
10.3 Measurement Equipment	42
10.4 Measurement Data	42
11 HOPPING CHANNEL CARRIER FREQUENCY SEPARATED	46
11.1 Standard Applicable	46
11.2 Measurement Procedure.....	46
11.3 Measurement Equipment	46
11.4 Measurement Data	47
12 DWELL TIME	49
12.1 Standard Applicable	49
12.2 Measurement Procedure.....	49
12.3 Measurement Equipment	49
12.4 Measurement Data	49

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : Wireless Door Monitor
- b) Trade Name : Home Depot
- c) Model No. : VD-8810M
- d) FCC ID : SFV-09VD8810M

1.2 Characteristics of Device

The EUT is a Wireless Door Monitor based on the Frequency Hopping Spread Spectrum (FHSS) technology. When a visitor presses the push button of camera, ring tones can be heard and the camera image will show on the LCD monitor. Press the "ANSWER" button of LCD monitor can talk to the visitor for up to 60 seconds. Press "OFF" button will finish the conversation. And EUT operates in the unlicensed ISM Band at 2.4GHz. In this band, 31 RF channels spaced 2MHz apart are defined. The rated output power is 16.54 dBm (45.08 mW).

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
20	2410	48	2424	76	2438	104	2452	132	2466
24	2412	52	2426	80	2440	108	2454	136	2468
28	2414	56	2428	84	2442	112	2456	140	2470
32	2416	60	2430	88	2444	116	2458		
36	2418	64	2432	92	2446	120	2460		
40	2420	68	2434	96	2448	124	2462		
44	2422	72	2436	100	2450	128	2464		

1.3 Test Methodology

All testing were performed according to the procedures in ANSI C63.4 (2003) an FCC CFR 47 Part 2 and Part 15.

1.4 Modification List of EUT

N/A

1.5 Test Facility

The semi-anechoic chamber and conducted measurement facility used to collect the radiated and conducted data are located inside the Building at No.8, Lane 29, Wen-ming Road, Lo-shan Tsun, Kweishan Hsiang, Taoyuan, Taiwan, R.O.C.

This site has been accreditation as a FCC filing site.

1.6 Test Summary

Requirement	FCC Paragraph #	Test Pass
Radiated Emission	15.247 (d)	☒
Conducted Emission	15.207	☒
Antenna Requirement	15.203	☒
Emission Bandwidth	15.247 (a)(2)	☒
Output Power Requirement	15.247 (b)	☒
Power Density Requirement	15.247 (e)	☒
Spurious Emissions	15.247 (d)	☒

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

For unintentional device, according to §15.107(a) Line Conducted Emission Limits is as following:

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

*Decreases with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as above table.

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) 20dB Bandwidth Requirement

For frequency hopping systems, according to 15.247(a)(1), hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

(5) Output Power Requirement

For frequency hopping systems, according to 15.247(1), operating in the 2400-2483.5MHz band employing at least 75 hopping channels. The maximum peak output power of the transmitter shall not exceed 1 Watt. For all other frequency hopping system in the 2400 – 2483.5 MHz band shall not exceed 0.125 Watts. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(6) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

(7) Number of Hopping Channels

According to 15.247(b)(1), for frequency hopping systems, operating in the 2400-2483.5MHz band employing at least 75 hopping channels.

(8) Channel Carrier Frequencies Separation

According to 15.247(a)(1)(iii), the frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

(9) Dwell Time

According to 15.247(a)(1)(iii), frequency hopping system in the 2400-2483.5MHz band employing at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 second multiplied by the number of hopping channels employed.

(10) Power Spectral Density

According to 15.247(d), for bluetooth device, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

To comply with the FCC RF exposure compliance requirement, this device and its antenna must not be co-located or operating to conjunction with any other antenna or transmitter.

3. SYSTEM TEST CONFIGURATION

3.1 Justification


For the purposes of this test report ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT during the test. Camera was used to control the RF channel under the highest, middle and lowest frequency and transmit the maximum RF power. Customer would not use it. But never the less ancillary equipment can influence the test results..

3.2 Devices for Tested System

Device	Manufacture	Model	Cable Description
* Wireless Door Monitor	IQ Group (Dongguan) Ltd.	VD-8810M	----
*Ni-Cd Battery	N/A	BYD-HAAA	(750mAh , 3.6V)
*Cradle	IQ Group (Dongguan) Ltd.	N/A	1.5m*1, Unshielded Power Line (with a core (FH0350B)) / Adaptor

Remark

1. “*” means equipment under test.

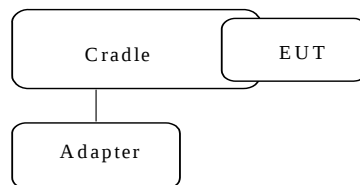

2.

CH Low	Ch28	2410 MHz
CH Mid	Ch61	2440 MHz
CH High	Ch31	2470 MHz

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and digitally modulated, and the out band emission shall be comply with § 15.247 (c)

4.2 Measurement Procedure

A.Preliminary Measurement For Portable Devices.

For movable devices, the following procedure was performed to determine the maximum emission axis of EUT (X,Y and Z axis):

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antennna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. The axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.
4. The position in which the maximum noise occurred was “Z axis”. (Please see the test setup photos)

B. Final Measurement

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively. Turn on EUT and make sure that it is in continuous operating function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a semi-anechoic chamber to determine the accurate frequencies of higher emissions and then each selected frequency is precisely measured. As the same purpose, for emission measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission measured below and above 1 GHz, set the spectrum analyzer on a 120 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

Figure 1 : Frequencies measured below 1 GHz configuration


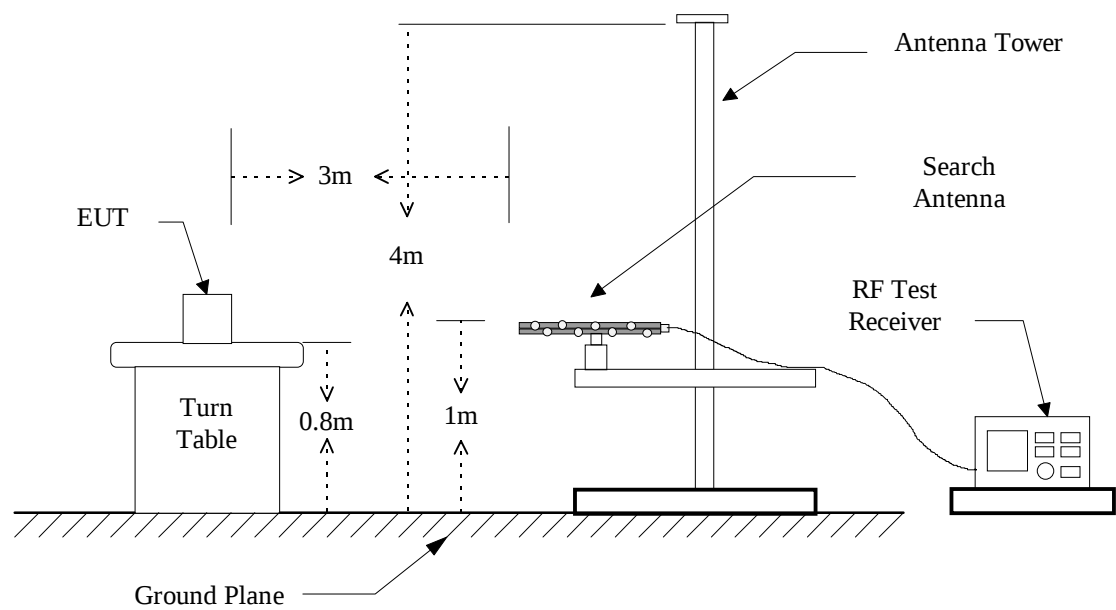


Figure 2 : Frequencies measured above 1 GHz configuration

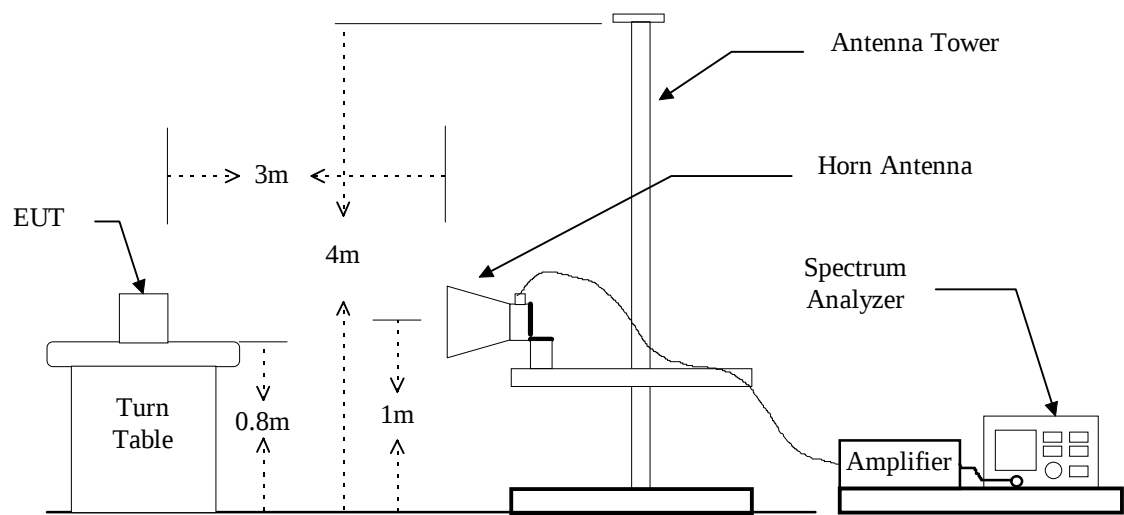

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement :

Equipment	Manufacturer	Model No.	Next Cal. Due
EMI Test Receiver	R&S	ESIB7	07/19/2010
Spectrum Analyzer	Rohde & Schwarz	FSU46	11/18/2010
Horn Antenna	EMCO	3115	12/10/2010
BiLog Antenna	Schaffner	CBL 6112B	08/18/2010
Horn Antenna	EMCO	3116	07/13/2010
Preamplifier	Hewlett-Packard	8449B	10/11/2010

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	300 kHz
	RF Test Receiver	Peak	120 kHz	300 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

4.4 Radiated Emission Data

4.4.1 RF Portion

a) Channel 20

Operation Mode : Transmitting

Fundamental Frequency : 2410 MHz

Test Date : Nov. 11, 2009

Temperature : 26°C

Humidity : 68%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave.
	Peak	Ave	Peak	Ave					
4820.000	67.2	36.9	68.0	38.2	-2.1	65.9	36.1	74.0	54.0

b) Channel 80

Fundamental Frequency : 2440 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave.
	Peak	Ave	Peak	Ave					
4880.000	68.9	37.0	61.3	37.1	-2.1	66.8	35.0	74.0	54.0
7320.000	63.0	36.6	60.1	36.3	1.0	64.0	37.6	74.0	54.0

c) Channel 140

Fundamental Frequency : 2470 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	Ave	Peak	Ave.
	Peak	Ave	Peak	Ave					
4940.000	71.1	37.5	65.6	37.3	-2.1	69.0	35.4	74.0	54.0
7410.000	66.0	37.2	62.1	36.8	1.0	67.0	38.2	74.0	54.0

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.
4. The radiation emissions have been measured to beyond the tenth harmonic of the fundamental frequency and show the significant frequencies, other means the value is too low to be detected.

4.4.2 Other Emission**4.4.2.1 below 1GHz**

File: 24TR


Data: #62

Date: 2009/11/11

Temperature: 26 °C

Time: PM 02:15:14

Humidity: 68 %

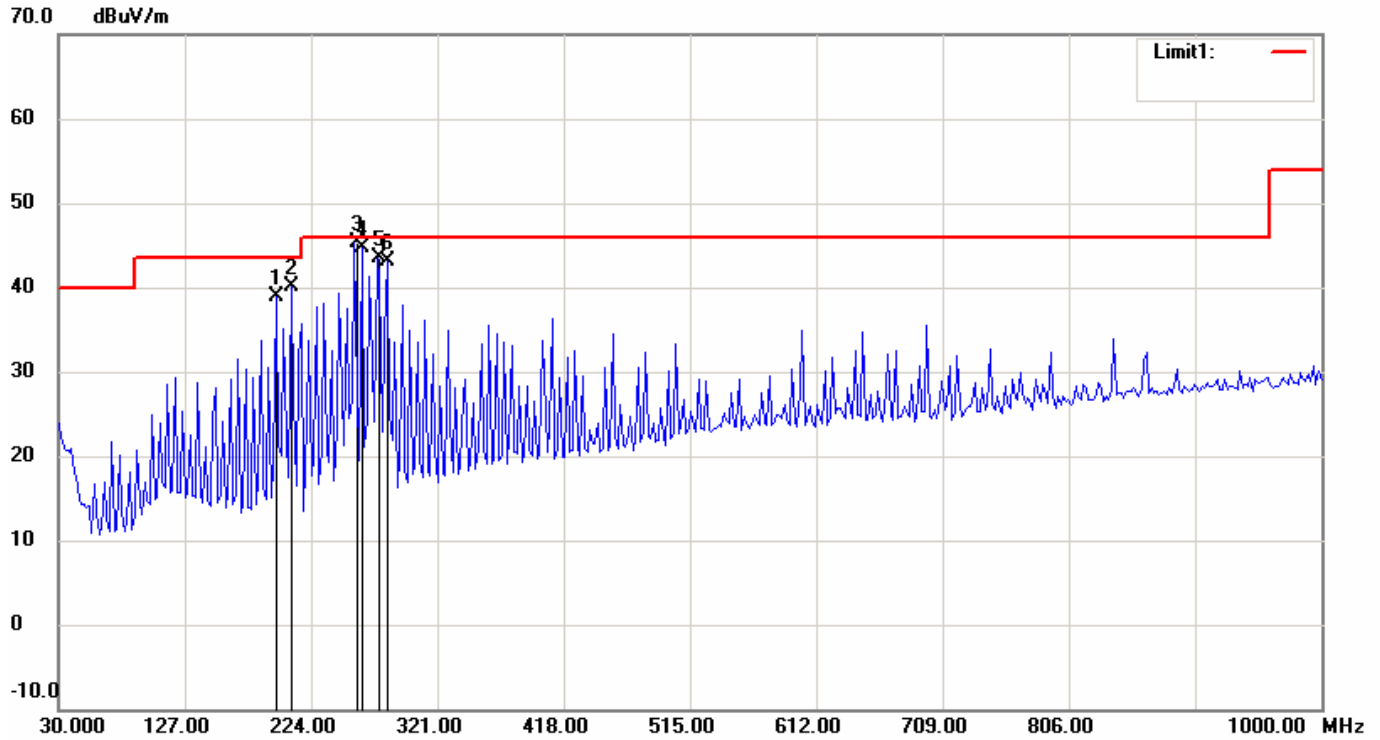

Condition: FCC Part15 RE-Class B_30-1000MHz

Polarization: Horizontal

EUT:

Distance: 3m

Model: VD-8810M

Test Mode: TR MODE

No.	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
	(MHz)	(dBuV/m)		Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)
1	197.1743	24.82	peak	14.15	38.97	43.50	-4.53
2	208.8377	26.34	peak	13.82	40.16	43.50	-3.34
3	257.4350	28.74	QP	15.58	44.32	46.00	-1.68
4	263.2664	28.06	QP	15.70	43.76	46.00	-2.24
5	274.9300	26.88	QP	15.53	42.41	46.00	-3.59
6	282.7054	26.54	QP	15.64	42.18	46.00	-3.82

File: 24TR


Data: #65

Date: 2009/11/11

Temperature: 26 °C

Time: PM 01:45:28

Humidity: 68 %

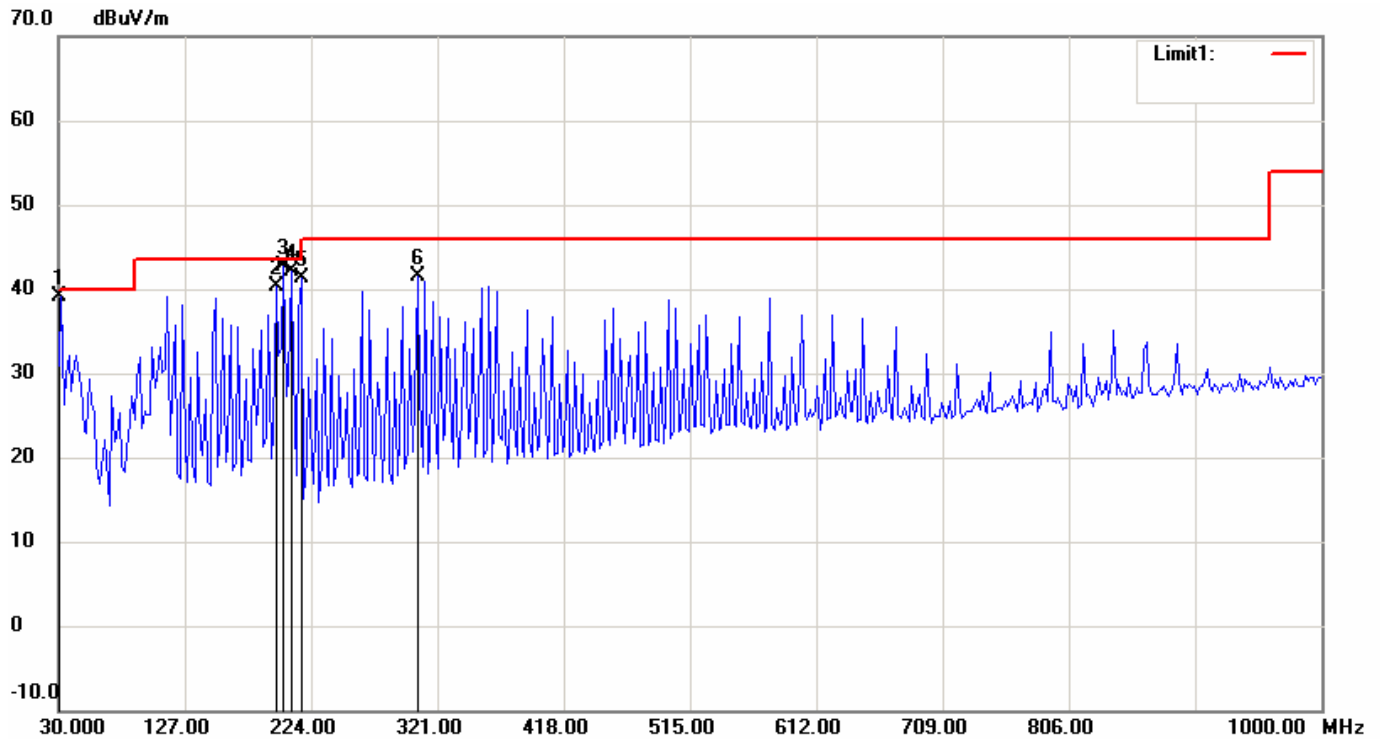

Condition: FCC Part15 RE-Class B_30-1000MHz

Polarization: Vertical

EUT:

Distance: 3m

Model: VD-8810M

Test Mode: TR MODE

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	31.2402	18.00	QP	20.06	38.06	40.00	-1.94
2	197.1742	26.14	peak	14.15	40.29	43.50	-3.21
3	203.0060	27.31	QP	14.44	41.75	43.50	-1.75
4	208.8377	27.29	QP	13.82	41.11	43.50	-2.39
5	216.6132	28.52	peak	12.81	41.33	46.00	-4.67
6	306.0321	25.28	peak	16.18	41.46	46.00	-4.54

4.4.2.2 above 1GHz**4.4.2.2.1 Operation Mode : CH 20, 2410 MHz**

Frequency (MHz)	Reading (dBuV)				Correct Factor (dB/m)	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	AVG	Peak	AVG
	Peak	AVG	Peak	AVG					
1206.4	53.7	36.3	58.1	35.5	-14.6	43.5	21.7	74.0	54.0
1307.7	53.4	34.4	60.9	35.3	-12.1	48.8	23.2	74.0	54.0
2085.9	54.3	34.8	---	---	-9.6	44.7	25.2	74.0	54.0
2484.2	68.2	35.6	71.4	35.2	-8.1	63.3	27.5	74.0	54.0

4.4.2.2.2 Operation Mode : CH 80, 2440 MHz

Frequency (MHz)	Reading (dBuV)				Correct Factor (dB/m)	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	AVG	Peak	AVG
	Peak	AVG	Peak	AVG					
1219.9	54.5	37.2	57.7	36.8	-14.6	43.1	22.6	74.0	54.0
1345.6	52.8	---	57.6	35.7	-12.1	45.5	23.6	74.0	54.0
2390.0	66.8	35.3	72.1	36.4	-8.1	64.0	28.3	74.0	54.0
2483.5	72.7	34.6	76.2	34.8	-8.1	68.1	26.7	74.0	54.0

4.4.2.2.3 Operation Mode : CH 140, 2470 MHz

Frequency (MHz)	Reading (dBuV)				Correct Factor (dB/m)	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
	H		V			Peak	AVG	Peak	AVG
	Peak	AVG	Peak	AVG					
1235.6	53.3	36.2	58.6	35.4	-14.6	44.0	21.6	74.0	54.0
2390.0	63.8	35.7	66.8	34.8	-8.1	58.7	27.6	74.0	54.0

Note:

1. Place of Measurement: Measuring site of the ETC.
2. If the data table appeared symbol of "****" means the value was too low to be measured.
3. The estimated measurement uncertainty of the result measurement is
 $\pm 4.6\text{dB}$ ($30\text{MHz} \leq f < 300\text{MHz}$).
 $\pm 4.4\text{dB}$ ($300\text{MHz} \leq f < 1000\text{MHz}$).
 $\pm 4.1\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$).
 $\pm 4.4\text{dB}$ ($18\text{GHz} < f \leq 40\text{GHz}$).

4 Remark "—" means that the emissions level is too low to be measured.

4.4.3 Radiated Measurement at Bandedge with Fundamental Frequencies

(A)

Channel 20

Operation Mode : TR Mode

Fundamental Frequency : 2410 MHz

Test Date : Nov. 11, 2009

Temperature : 26°C

Humidity : 68%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m) Peak Ave (H/V Max.)		Limit @3m (dBuV/m) Peak Ave.	
	H Peak	V Ave	H Peak	V Ave		Peak	Ave	Peak	Ave.
2390.000	37.7	15.7	42.1	16.0	29.8	71.9	45.8	74.0	54.0

Note:

The result is the highest value of radiated emission from restrict band of 2310 ~2390 MHz.

(B)

Channel 140

Operation Mode : TR Mode

Fundamental Frequency : 2470 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m) Peak Ave (H/V Max.)		Limit @3m (dBuV/m) Peak Ave.	
	H Peak	V Ave	H Peak	V Ave		Peak	Ave	Peak	Ave.
2483.844	38.8	15.4	44.0	15.5	29.8	73.8	45.3	74.0	54.0

Note:

The result is the highest value of radiated emission from restrict band of 2483.5 ~2500 MHz.

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

5 CONDUCTED EMISSION MEASUREMENT


5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to § 15.107(a) and §15.207(a) respectively. Both Limits are identical specification.


5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

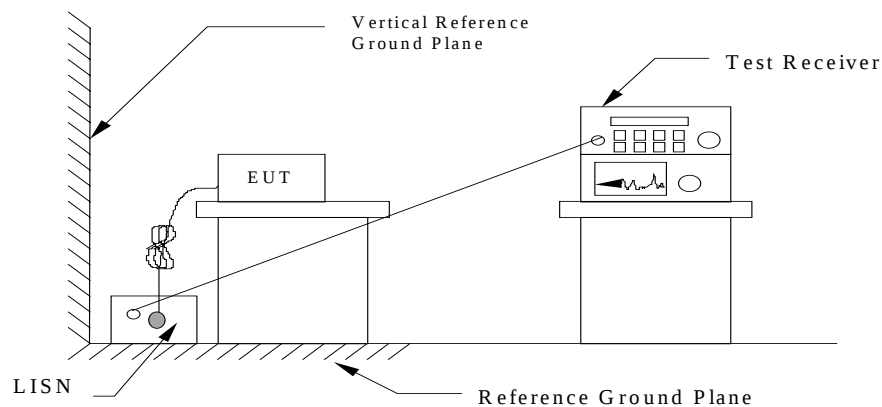


5.3 Conducted Emission Data

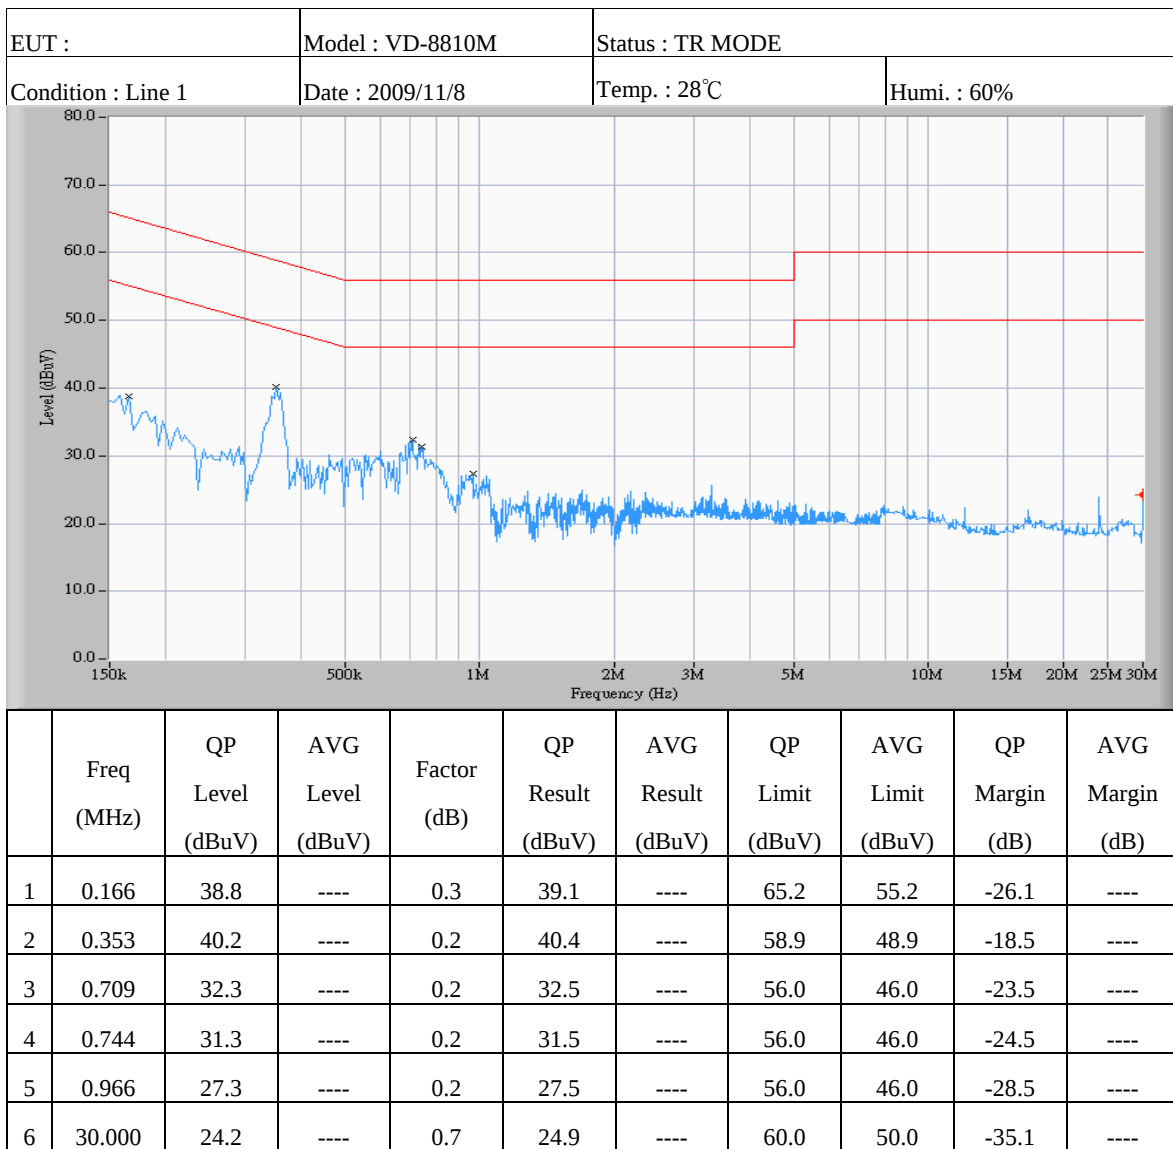

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of “----” means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is $\pm 2.5\text{dB}$.

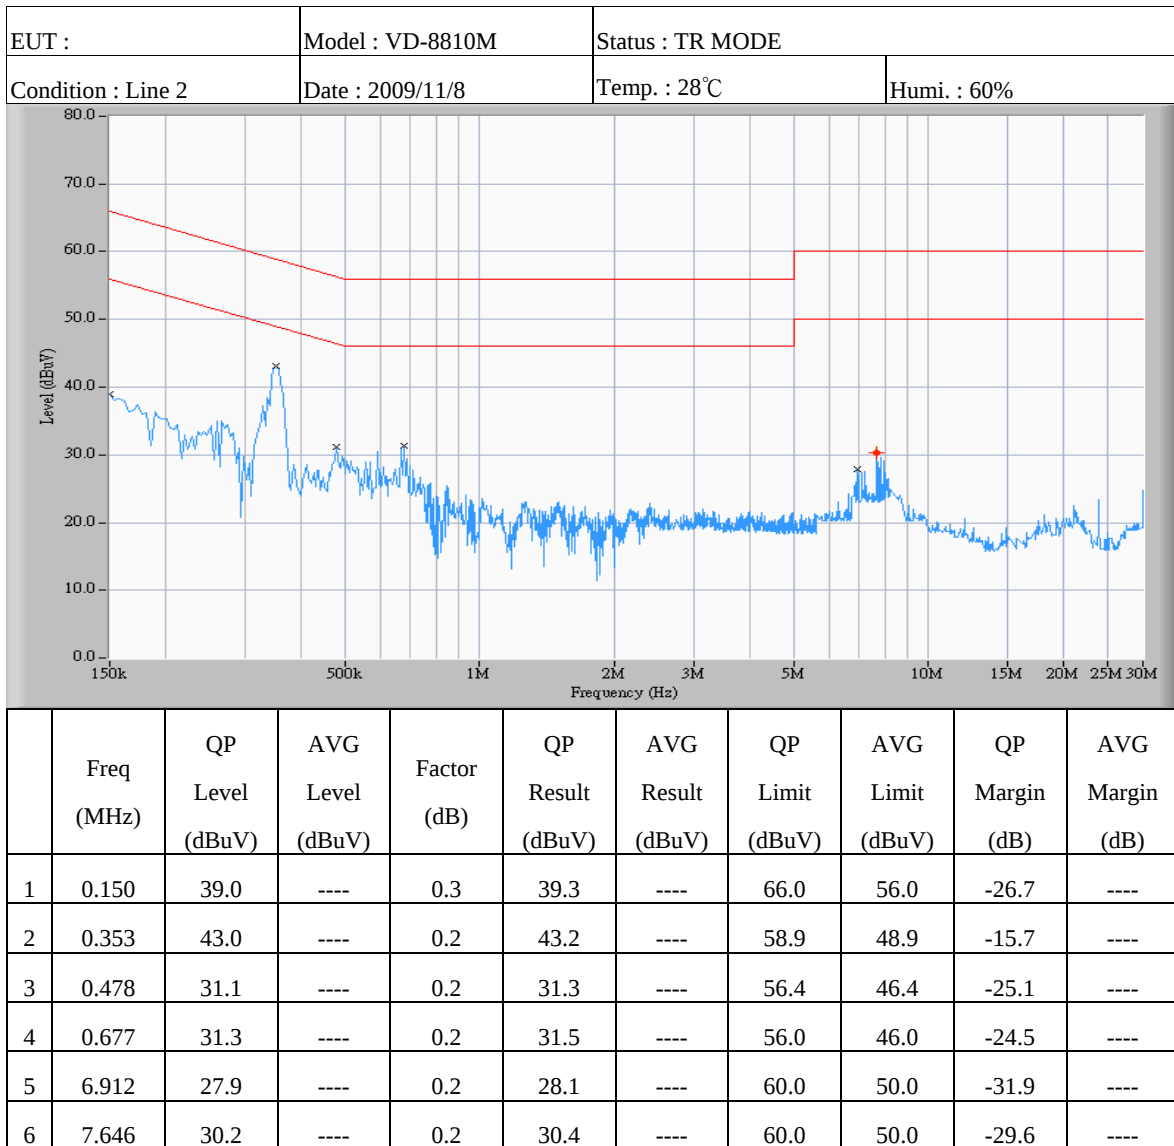

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of “----” means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is $\pm 2.5\text{dB}$.

5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\textbf{RESULT} = \textbf{READING} + \textbf{LISN FACTOR (Included Cable Loss)}$$

5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test.

Equipment	Manufacturer	Model No.	Next Cal. Due
RF Test Receiver	Rohde and Schwarz	ESCS30	08/22/2010
LISN	EMCO	37100/2M	02/11/2010

6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to §15.247 (b), if Receiving antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.2 Antenna Construction and Directional Gain

Antenna Type	Monopole Antenna
Model Number	N/A
Brand Name	N/A
Peak Antenna Gain	2.04 dBi
Antenna Size	L: 19.4mm , Φ : 0.4 mm

The directional gain of antenna doesn't greater than 6 dBi, the power won't be reduced.

7 20dB EMISSION BANDWIDTH MEASUREMENT

7.1 Standard Applicable

According to 15.247(a)(1), for frequency hopping systems, hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4. Turn on the EUT and connect it to measurement instrument. Then set it to any convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.



7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	E4446A	09/27/2010

7.4 Measurement Data

Test Date : Nov. 20, 2009

Temperature : 26°C

Humidity : 51%

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	Chart
20	2410	1.600	Page 27
80	2440	1.600	Page 28
140	2470	1.527	Page 29

Note: Please refer to page 27 to page 29 for chart.

File: 24TR 1119


Data: #146

Date: 2009/11/20

Temperature: 26 °C

Time: PM 04:06:31

Humidity: 51 %

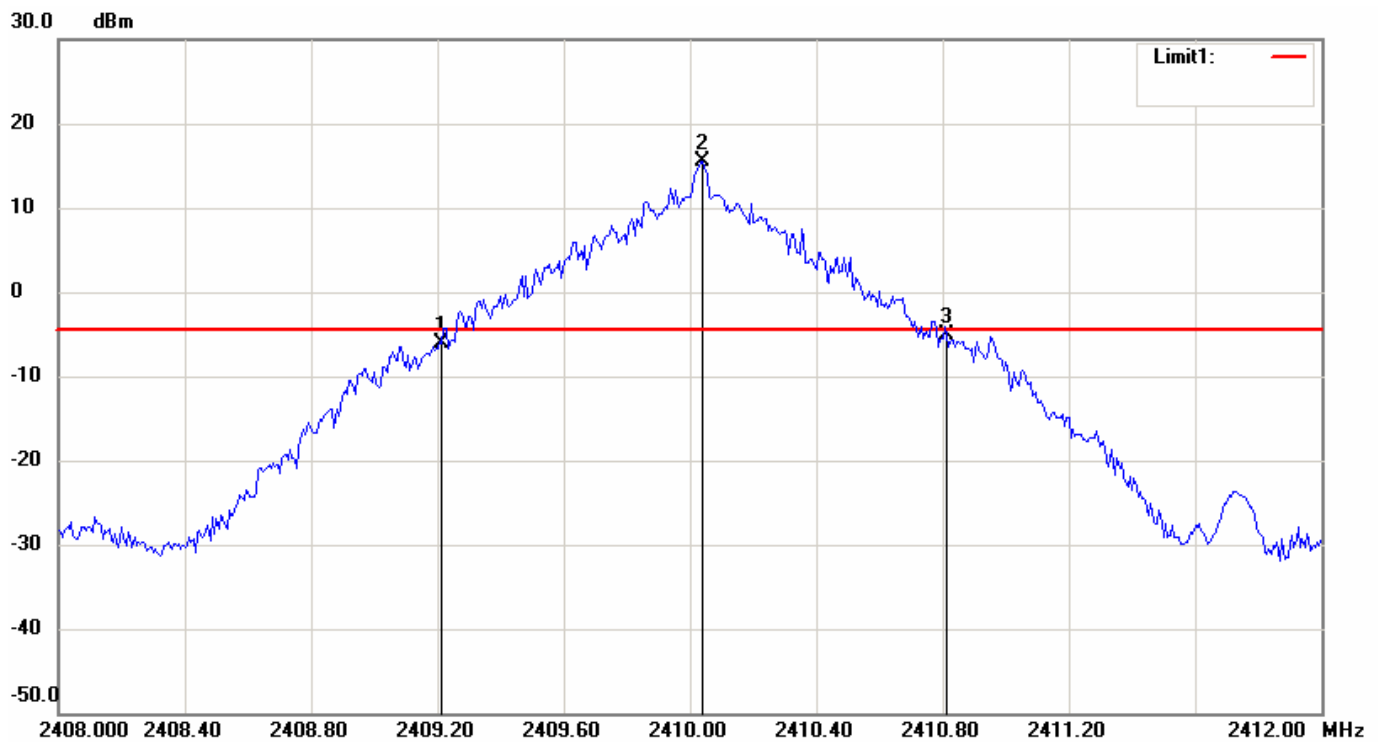

Condition:

RF Conducted

EUT:

Sweep Time: 3.2ms Att.: 30dB

Model: VD-8810M

RBW: 30 KHz VBW: 100 KHz


Test Mode: FCC- Channel L-20dB EBW

Note:

No.	Frequency(MHz)	Level(dBm)
1	2409.2133	-6.13
2	2410.0400	15.52
3	2410.8133	-5.08

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	1.600	1.05

File: 24TR 1119 Data: #108 Date: 2009/11/20 Temperature: 26 °C
Time: PM 03:44:20 Humidity: 51 %

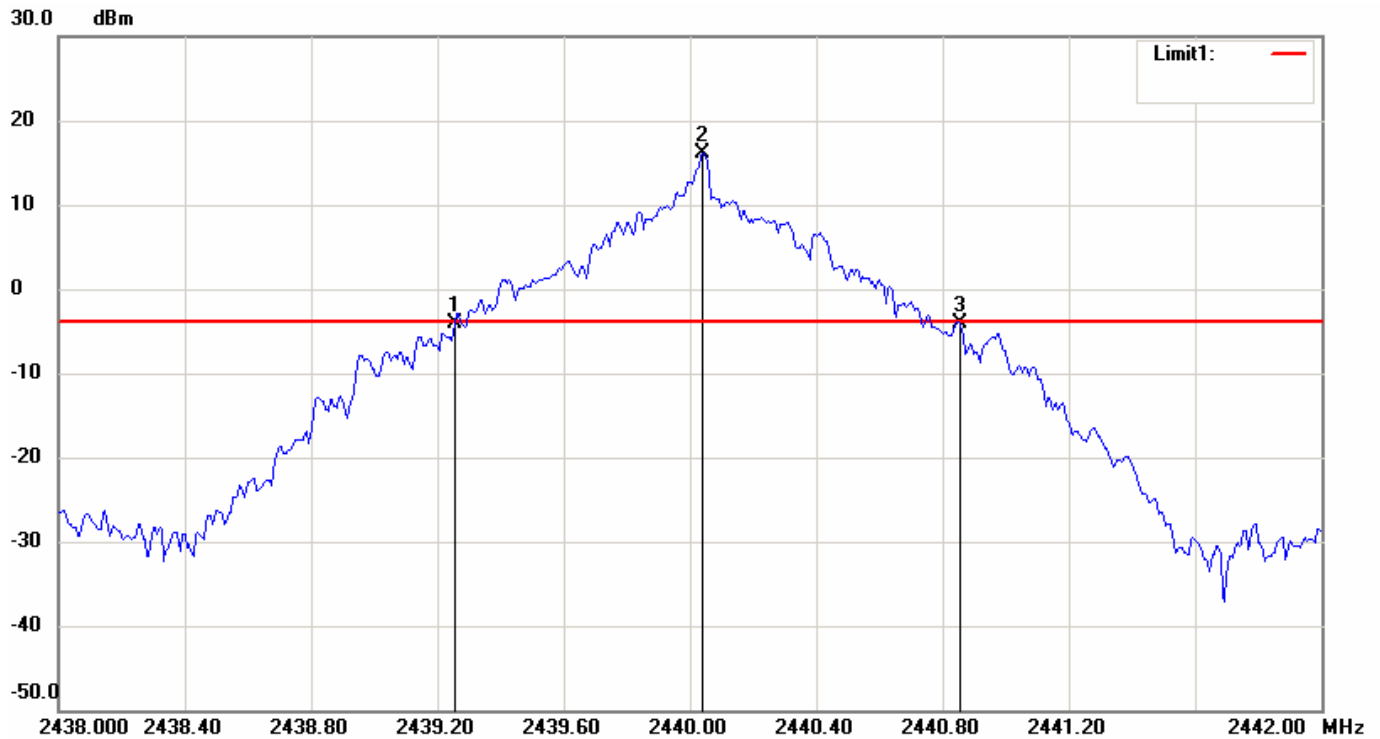

Condition:

RF Conducted

EUT:

Sweep Time: 3.2ms Att.: 30dB

Model: VD-8810M

RBW: 30 KHz VBW: 100 KHz


Test Mode: FCC- Channel M-20dB EBW

Note:

No.	Frequency(MHz)	Level(dBm)
1	2439.2533	-4.04
2	2440.0400	16.03
3	2440.8533	-4.09

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	1.600	-0.05

File: 24TR 1119 Data: #125 Date: 2009/11/20 Temperature: 26 °C
Time: PM 04:20:27 Humidity: 51 %

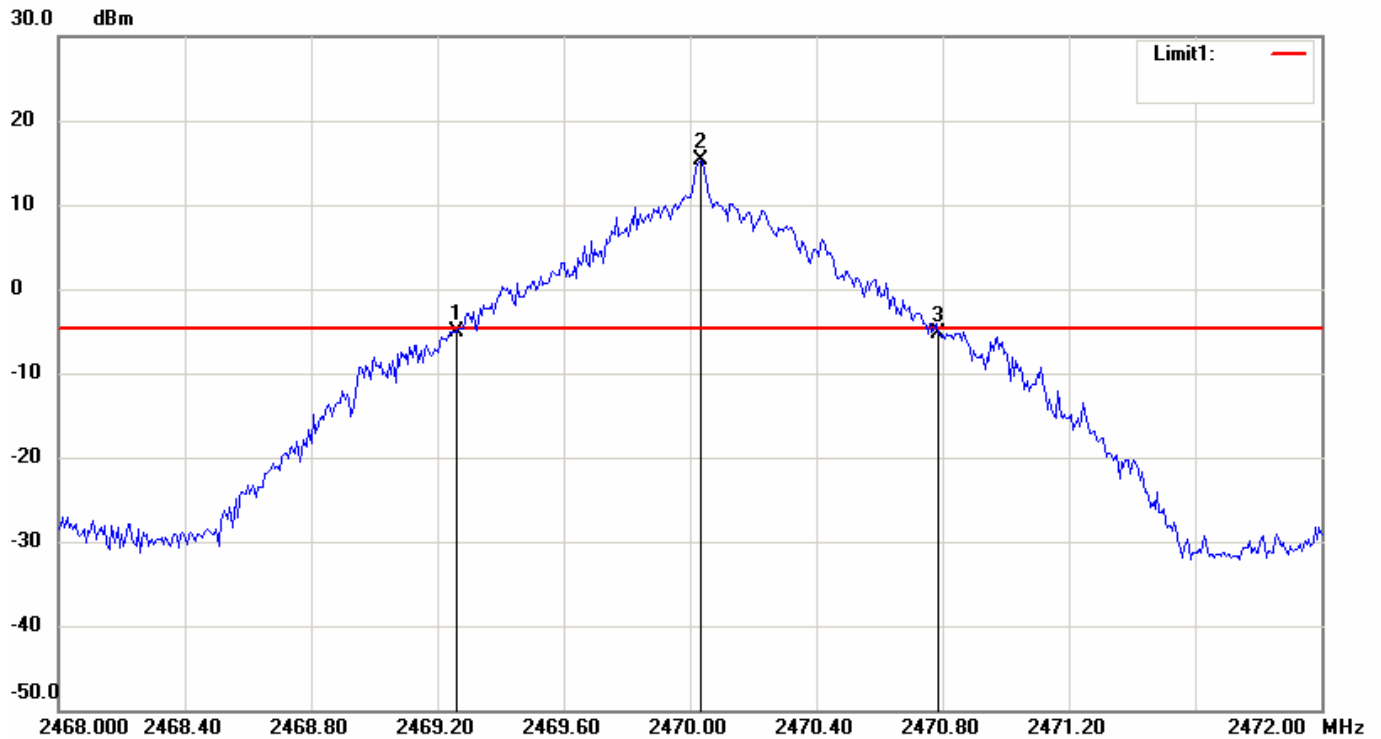

Condition: RF Conducted
EUT: Sweep Time: 3.2ms Att.: 30dB
Model: VD-8810M RBW: 30 KHz VBW: 100 KHz
Test Mode: FCC- Channel H-20dB EBW
Note:

No.	Frequency(MHz)	Level(dBm)
1	2469.2600	-5.16
2	2470.0333	15.29
3	2470.7867	-5.29

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	1.5267	-0.13

8 OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

For frequency hopping system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If Receiving antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.
4. Measure the highest amplitude appearing on spectral display and record the level to calculate result data.
5. Repeat above procedures until all frequencies measured were complete.

8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	E4446A	09/27/2010

8.4 Measurement Data

Test Date : Nov. 20, 2009

Temperature : 26°C

Humidity : 51%

A. Peak Power

Channel	Frequency (MHz)	Maximum Peak Output Power (dBm)	Maximum Peak Output Power (mW)	FCC Limit (mW)	Chart
20	2410	16.16	41.30	1000	Page 32
80	2440	16.54	45.08	1000	Page 33
140	2470	15.94	39.26	1000	Page 34

B. Average Power

Channel	Frequency (MHz)	Maximum Average Output Power (dBm)	Maximum Average Output Power (mW)
20	2410	8.04	6.37
80	2440	8.42	6.95
140	2470	7.82	6.05

Note: Please refer to page 32 to page 34 for chart.

File: 24TR 1119


Data: #148

Date: 2009/12/21

Temperature: 18 °C

Time: PM 04:09:47

Humidity: 51 %

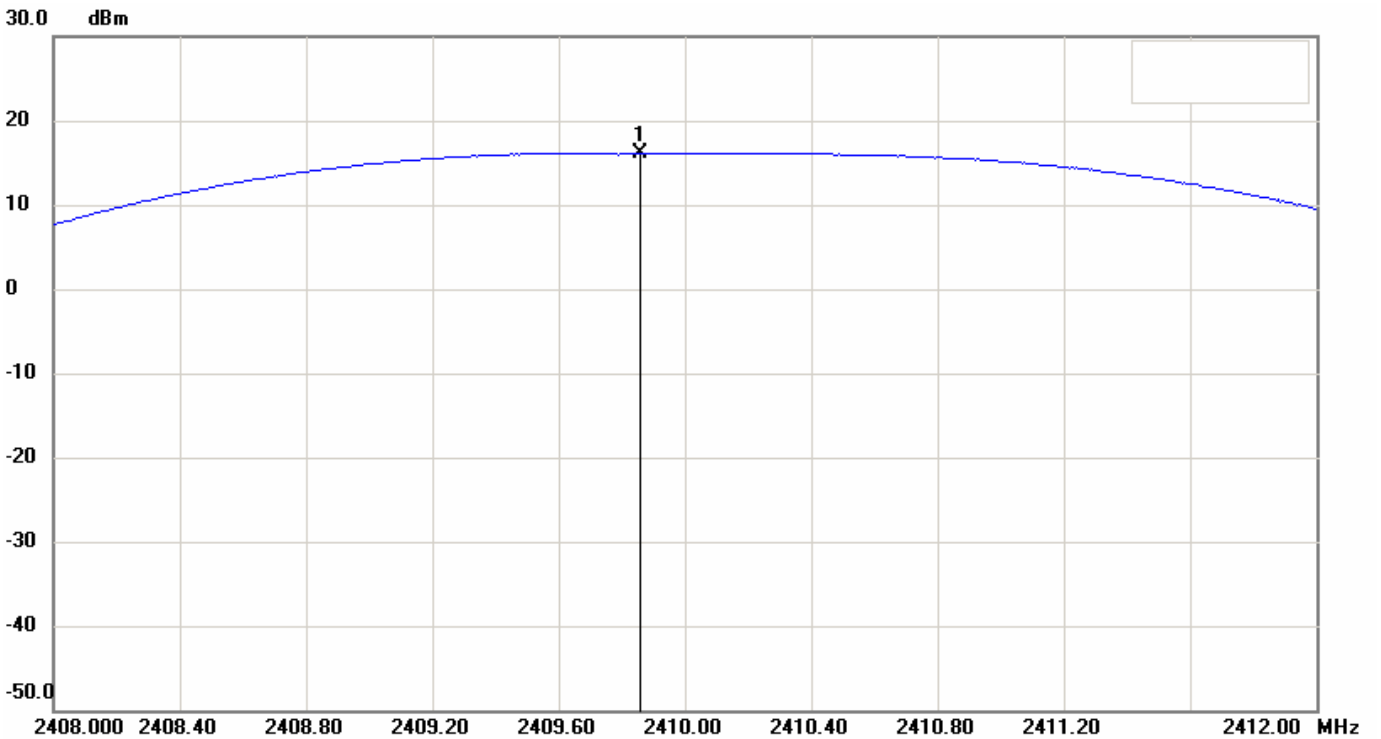

Condition:

EUT:

Model: VD-8810M

Test Mode: FCC CHL Output Power

Note:

RF Conducted

Sweep Time: 1ms Att.: 30dB

RBW: 1000 KHz VBW: 3000 KHz

No.	Frequency(MHz)	Level(dBm)
1	2409.8600	16.16

File: 24TR 1119


Data: #106

Date: 2009/11/20

Temperature: 26 °C

Time: PM 03:42:15

Humidity: 51 %

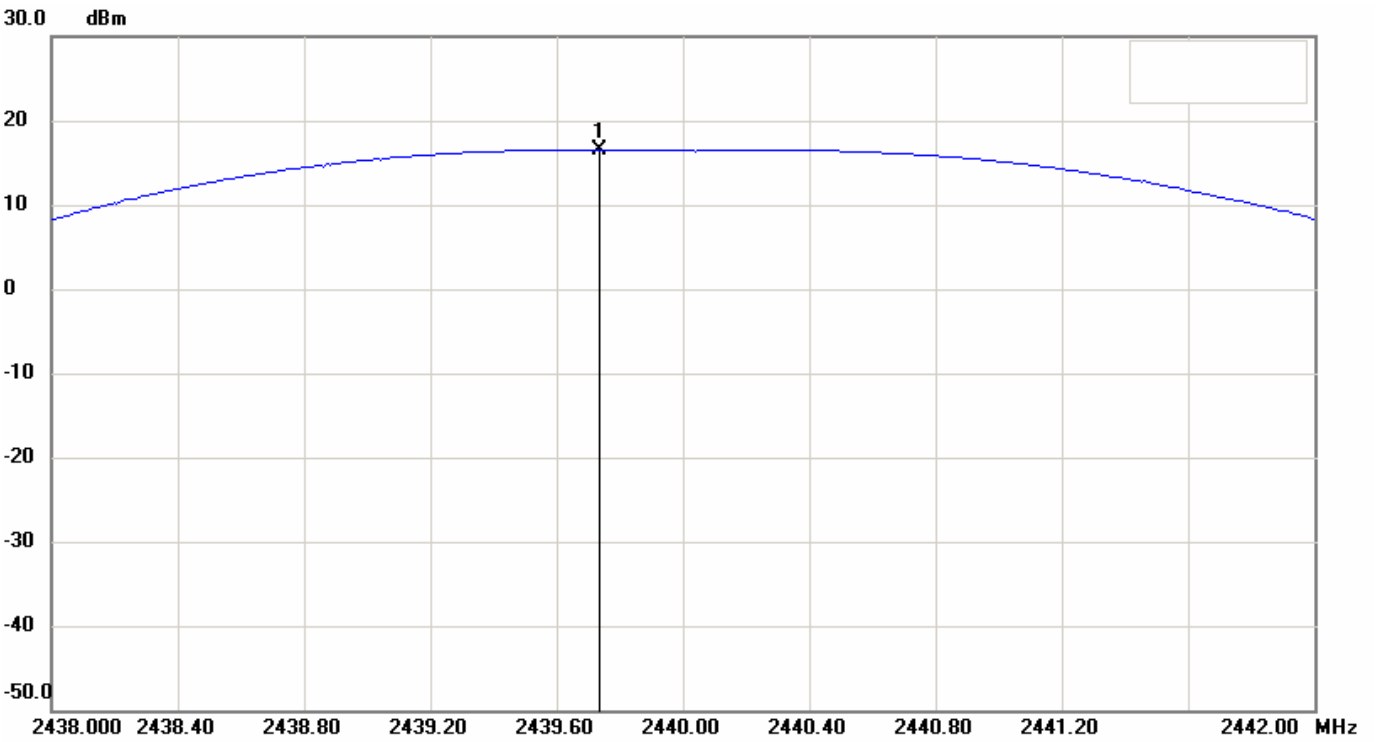

Condition:

EUT:

Model: VD-8810M

Test Mode: FCC CHM Output Power

Note:

RF Conducted

Sweep Time: 1ms Att.: 30dB

RBW: 1000 KHz VBW: 3000 KHz

No.	Frequency(MHz)	Level(dBm)
1	2439.7333	16.54

File: 24TR 1119


Data: #121

Date: 2009/11/20

Temperature: 26 °C

Time: PM 04:18:21

Humidity: 51 %

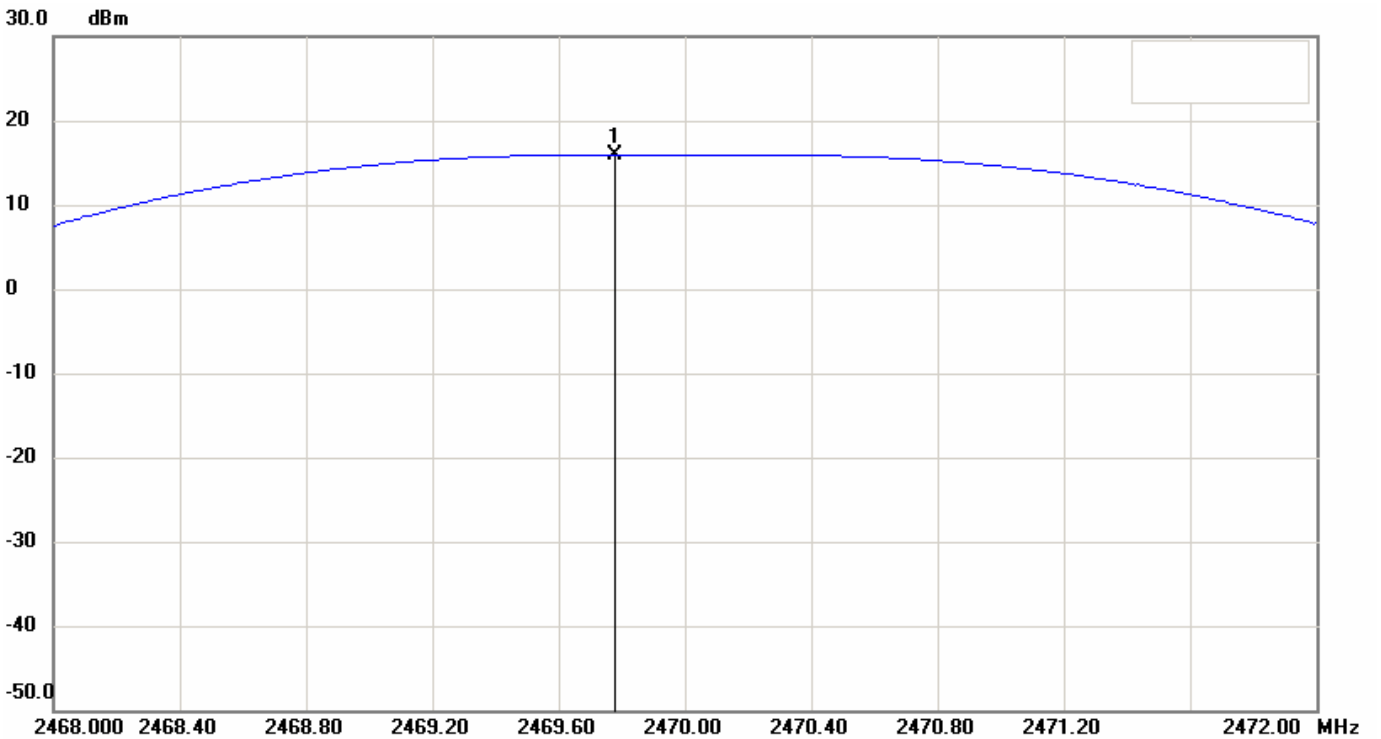

Condition:

EUT:

Model: VD-8810M

Test Mode: FCC CHH Output Power

Note:

RF Conducted

Sweep Time: 1ms Att.: 30dB

RBW: 1000 KHz VBW: 3000 KHz

No.	Frequency(MHz)	Level(dBm)
1	2469.7800	15.94

9 OUT-OF-BAND RF CONDUCTED SPURIOUS EMISSION MEASUREMENT

9.1 Standard Applicable

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	E4446A	09/27/2010

9.4 Measurement Data

Test Date : Nov. 20, 2009


Temperature : 26°C

Humidity : 51%

Channel	Test Frequency Range	Note	Chart
20	2350 MHz - 2450 MHz	Lower Band Edge	Page 37
140	2433.5 MHz - 2533.5 MHz	Upper Band Edge	Page 38
20	30 MHz - 25 GHz		Page 39
80	30 MHz - 25 GHz		Page 40
140	30 MHz - 25 GHz		Page 41

Note: Please refer to page 37 to page 41 for chart.

File: 24TR 1119 Data: #144 Date: 2009/11/20 Temperature: 26 °C
Time: PM 04:00:25 Humidity: 51 %

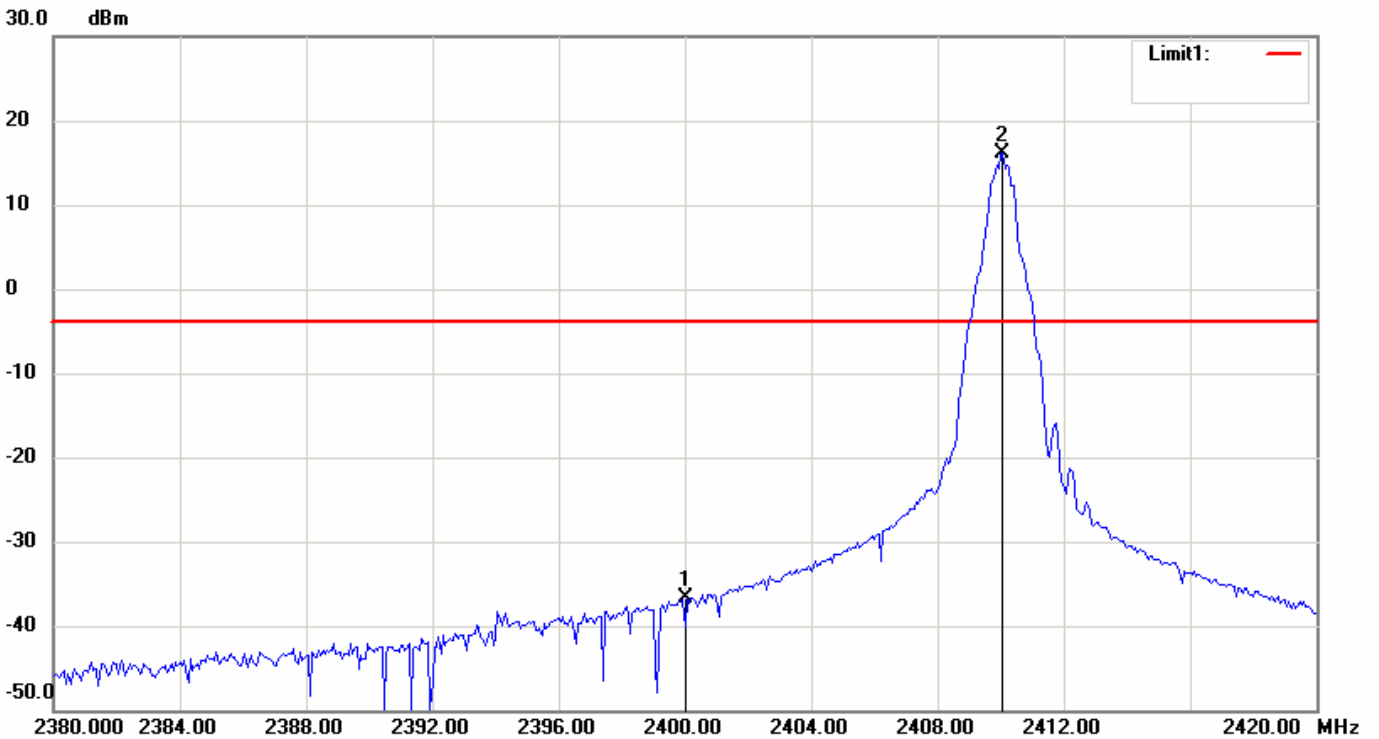

Condition: RF Conducted
EUT: Sweep Time: 1.12ms Att.: 30dB
Model: VD-8810M RBW: 100 KHz VBW: 300 KHz
Test Mode: FCC- ChanneL-Bandedge (Fixed)
Note:

No.	Frequency(MHz)	Level(dBm)
1	2400.0000	-36.79
2	2410.0667	16.17

File: 24TR 1119


Data: #128

Date: 2009/11/20

Temperature: 26 °C

Time: PM 04:23:37

Humidity: 51 %

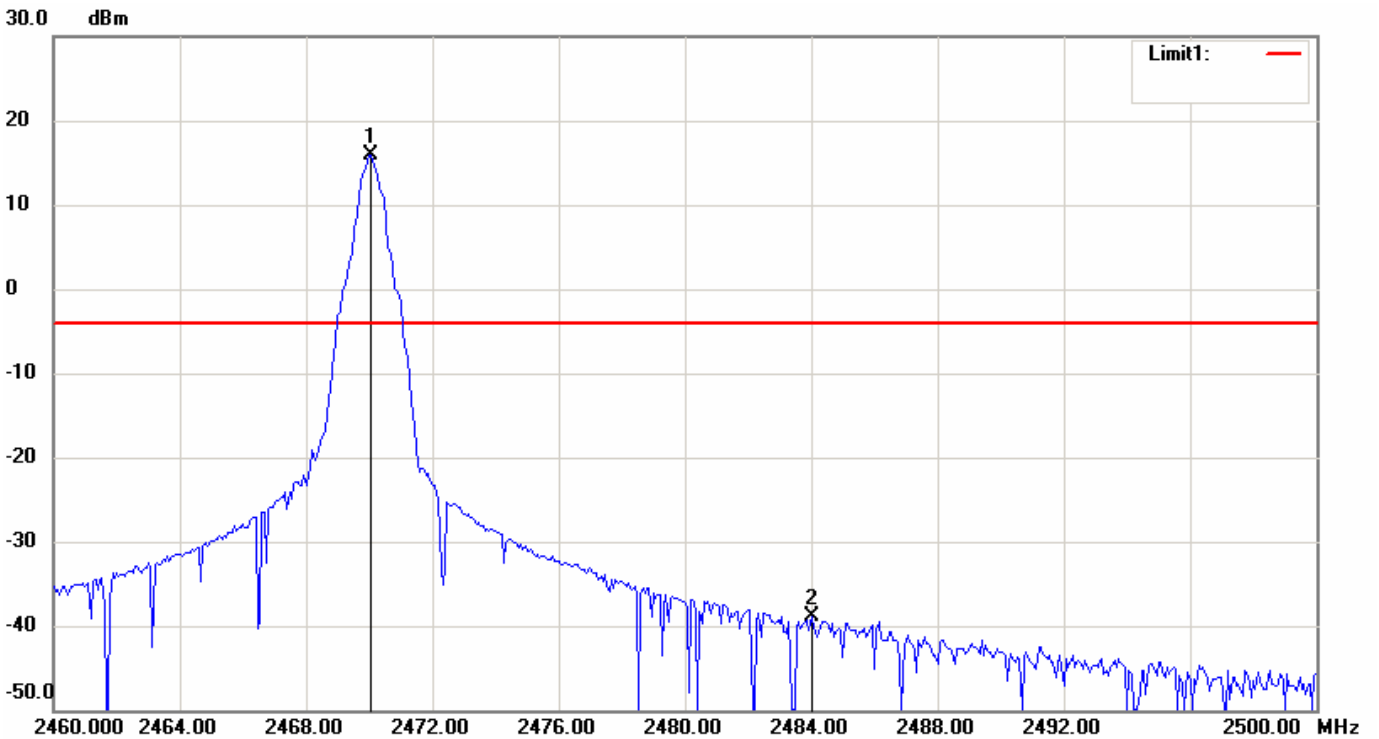

Condition: RF Conducted

EUT: Sweep Time: 1.12ms Att.: 30dB


Model: VD-8810M RBW: 100 KHz VBW: 300 KHz

Test Mode: FCC- Channel H-Bandedge (Fixed)

Note:

No.	Frequency(MHz)	Level(dBm)
1	2470.0667	15.90
2	2484.0000	-38.93

File: 24TR 1119 Data: #201 Date: 2009/11/20 Temperature: 26 °C
Time: PM 03:53:37 Humidity: 51 %

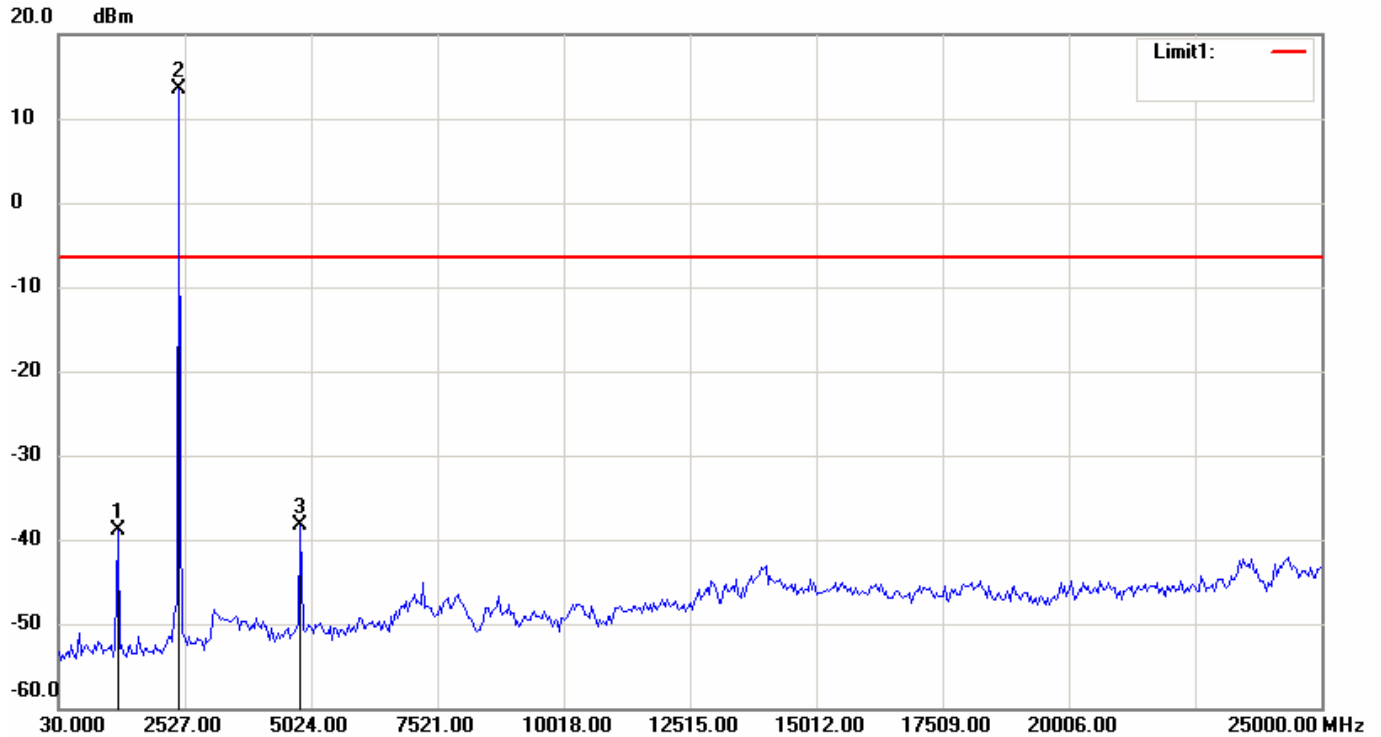

Condition:

RF Conducted

EUT:

Sweep Time: 2386.4ms Att.: 30dB

Model: VD-8810M


RBW: 100 KHz VBW: 300 KHz

Test Mode: FCC- Channel L-Conducted Spurious

Note:

No.	Frequency(MHz)	Level(dBm)
1	1195.2667	-38.96
2	2402.1500	13.41
3	4815.9167	-38.24

File: 24TR 1119 Data: #236 Date: 2009/11/20 Temperature: 26 °C
Time: PM 03:47:19 Humidity: 51 %

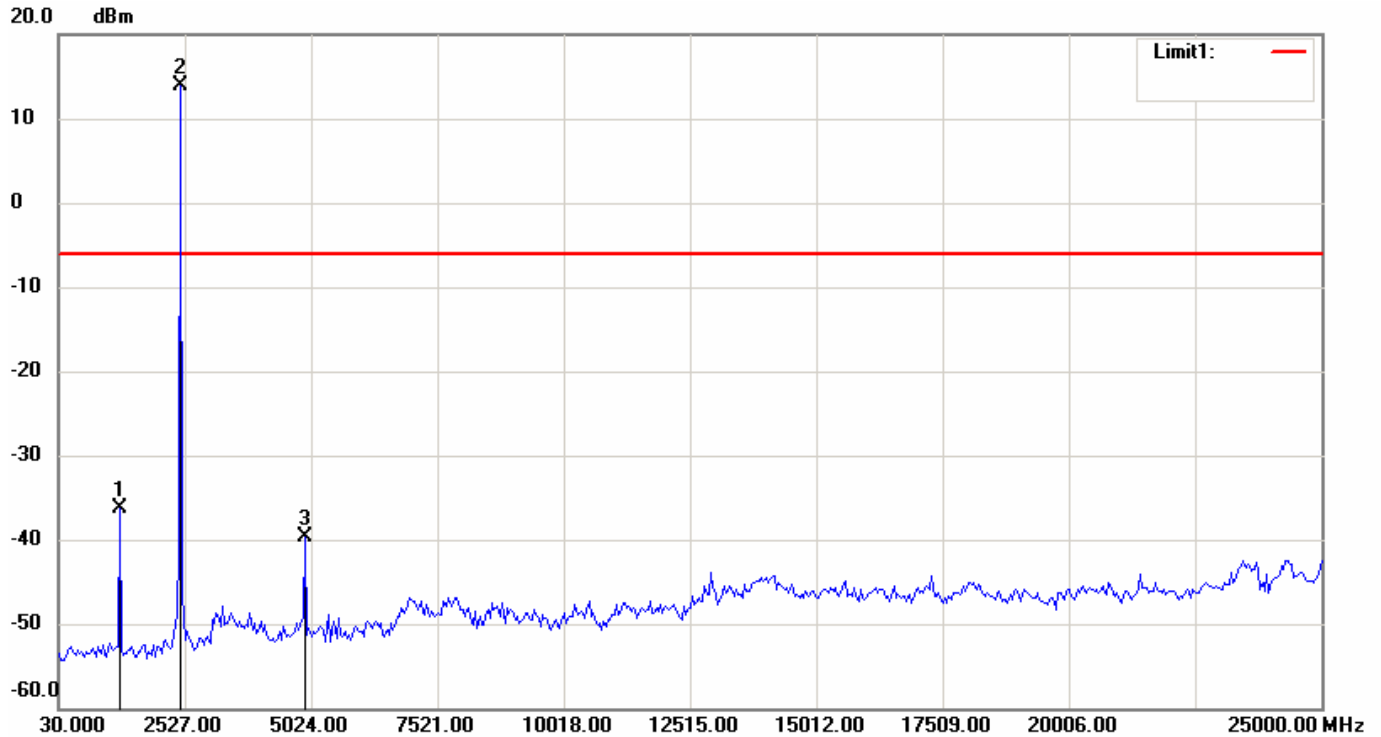

Condition: RF Conducted
EUT: Sweep Time: 2386.4ms Att.: 30dB
Model: VD-8810M RBW: 100 KHz VBW: 300 KHz
Test Mode: FCC- Channel M-Conducted Spurious
Note:

No.	Frequency(MHz)	Level(dBm)
1	1236.8833	-36.31
2	2443.7667	13.82
3	4899.1500	-39.63

File: 24TR 1119


Data: #204

Date: 2009/11/20

Temperature: 26 °C

Time: PM 04:00:04

Humidity: 51 %

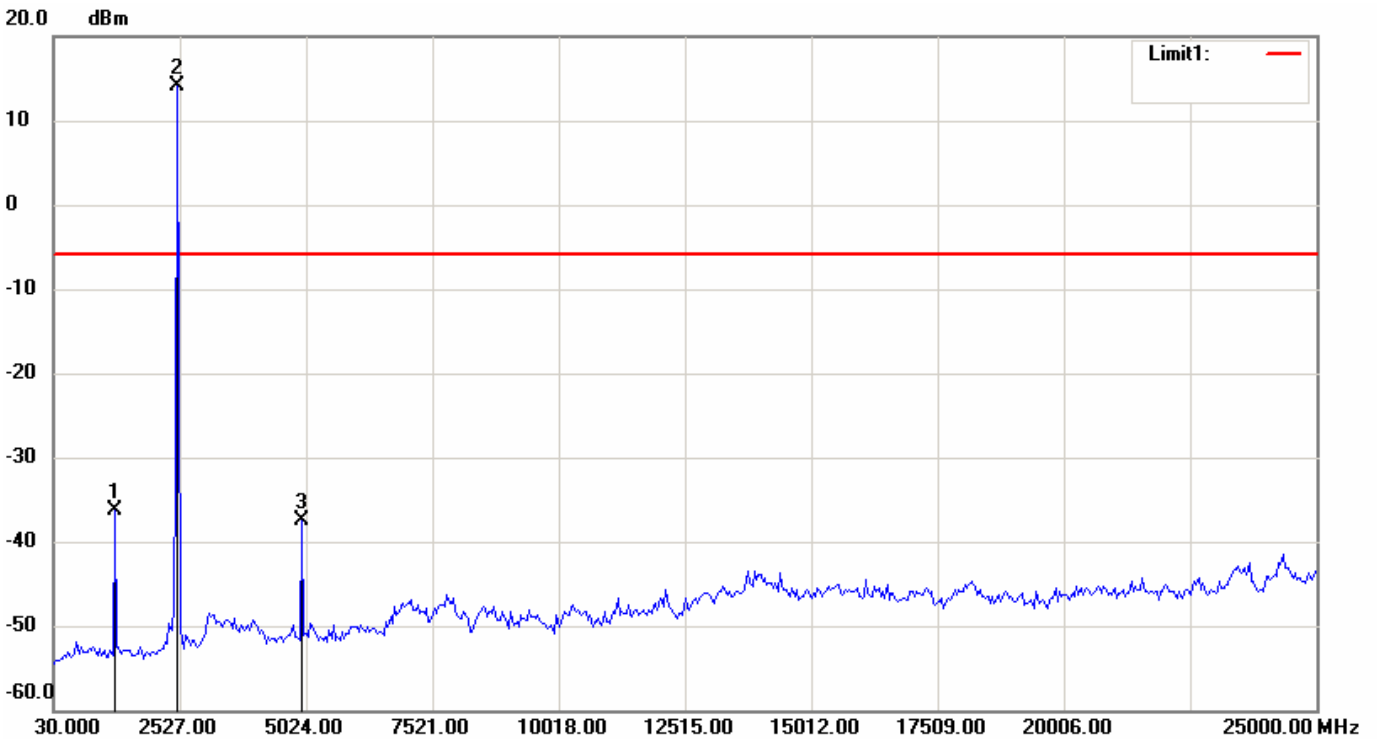

Condition: RF Conducted

EUT: Sweep Time: 2386.4ms Att.: 30dB

Model: VD-8810M RBW: 100 KHz VBW: 300 KHz

Test Mode: FCC- Channel H-Conducted Spurious

Note:

No.	Frequency(MHz)	Level(dBm)
1	1236.8833	-36.38
2	2485.3833	14.07
3	4940.7667	-37.52

10 NUMBER of HOPPING CHANNELS

10.1 Standard Applicable

According to 15.247(a)(1)(iii), for frequency hopping systems, operating in the 2400-2483.5MHz band employing at least 15 hopping channels

10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to hopping operating mode and set spectrum analyzer maximum to measure the number of hopping channels.

10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	E4446A	09/27/2010


10.4 Measurement Data

Test Date : Dec. 30, 2009 Temperature : 18°C Humidity : 51%

Number of hopping channels = 31 channels


Note: Please refer to page 43 to page 45 for chart.

File: 24TR 1119 Data: #185 Date: 2009/12/30 Temperature: 18 °C
Time: PM 01:45:09 Humidity: 51 %

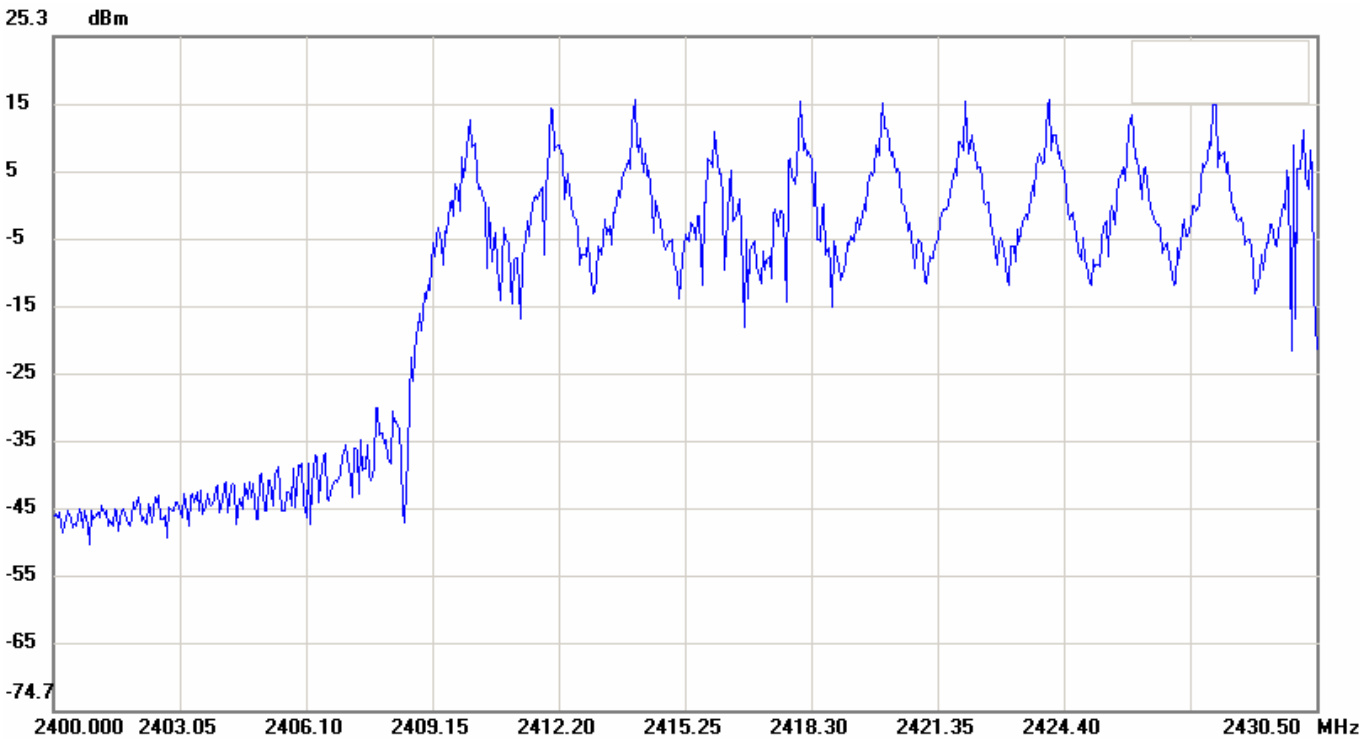


Condition:		RF Conducted
EUT:		Sweep Time: 26.36ms Att.: 30dB
Model:	VD-8810M	RBW: 30 KHz VBW: 100 KHz
Test Mode:	FCC-Number of Hopping Channels –Part1	
Note:		

File: 24TR 1119 Data: #186 Date: 2009/12/30 Temperature: 18 °C
Time: PM 01:53:43 Humidity: 51 %

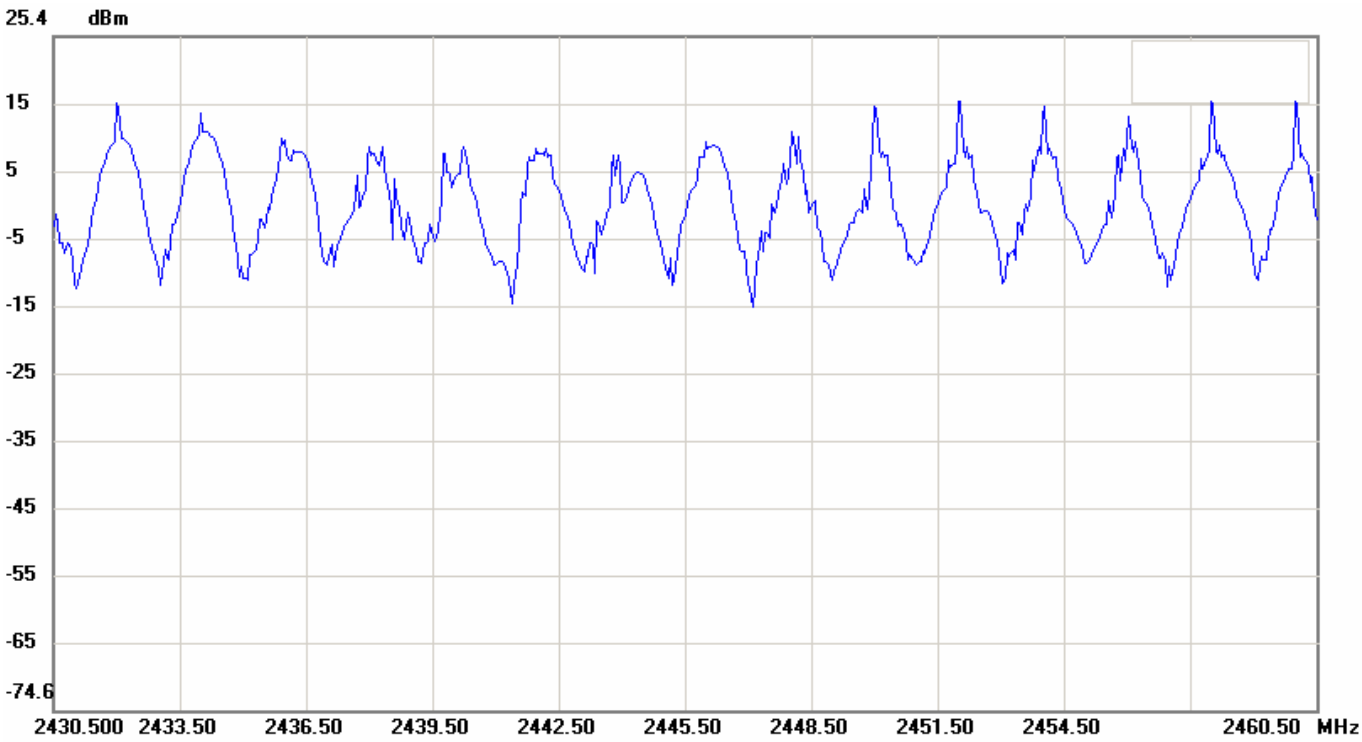

Condition:		RF Conducted
EUT:		Sweep Time: 26.36ms Att.: 30dB
Model:	VD-8810M	RBW: 30 KHz VBW: 100 KHz
Test Mode:	FCC-Number of Hopping Channels –Part2	
Note:		

File: 24TR 1119 Data: #193 Date: 2009/12/30 Temperature: 18 °C
Time: PM 02:00:52 Humidity: 51 %

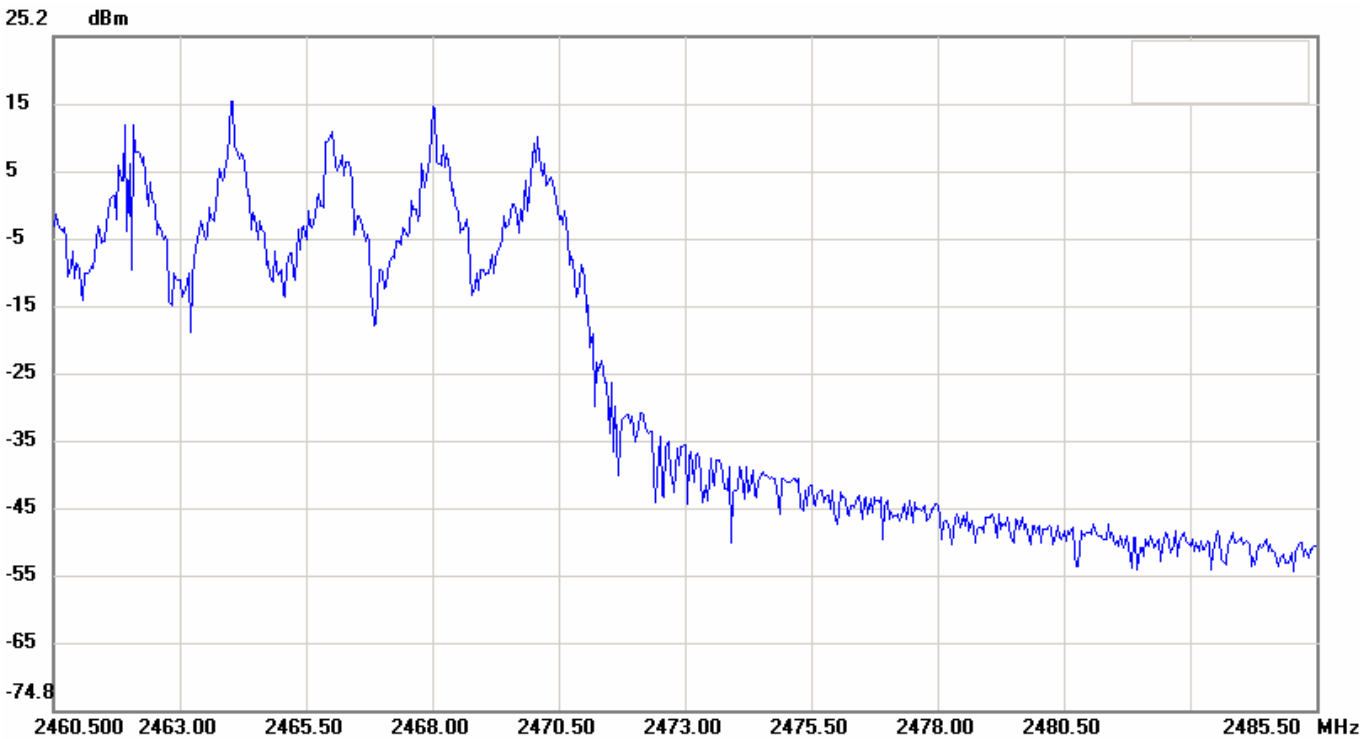

Condition: RF Conducted
EUT: Sweep Time: 26.36ms Att.: 30dB
Model: VD-8810M RBW: 30 KHz VBW: 100 KHz
Test Mode: FCC-Number of Hopping Channels -Part3
Note:

11 HOPPING CHANNEL CARRIER FREQUENCY SEPARATED

11.1 Standard Applicable

According to 15.247(a)(1), the frequency hopping system shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any measurement frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set spectrum analyzer maximum hold to measure channel carrier frequency, then adjust channel carrier frequency to adjacent channel.
4. Repeat above procedure until all measured frequencies were complete.

11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	E4446A	09/27/2010

11.4 Measurement Data

Test Date : Dec. 30, 2009

Temperature : 18°C


Humidity : 51%

Channel	Frequency (MHz)	Hopping Channel Carrier Frequency Separated (MHz)	Chart
80	2440	2.020	Page 48

Note: 1. Please refer to page 48 for chart.

2. CH Low, CH Mid and CH High have the same test result. Only Mid test result showed in the test report.

File: 24TR 1119 Data: #213 Date: 2009/12/30 Temperature: 18 °C
Time: AM 09:46:31 Humidity: 51 %

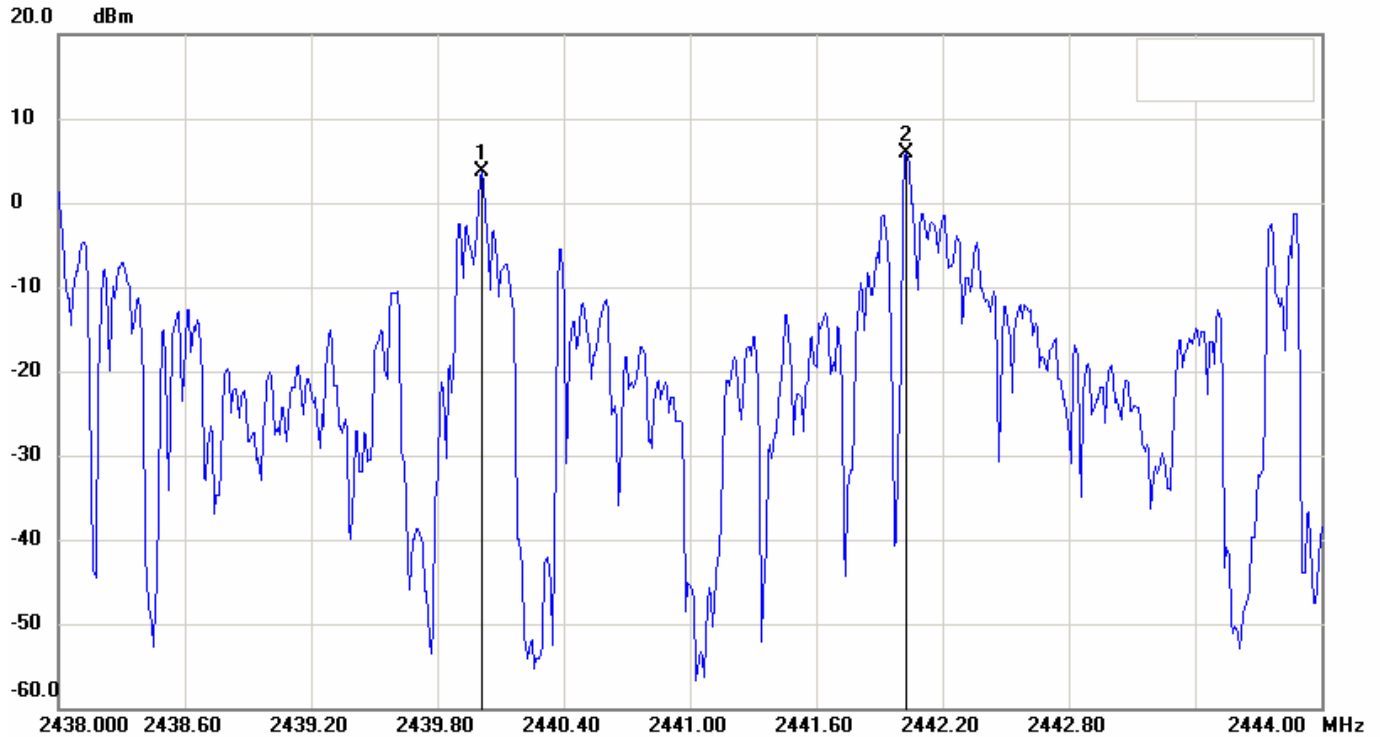

Condition:

RF Conducted

EUT:

Sweep Time: 6.36ms Att.: 30dB

Model: VD-8810M

RBW: 30 KHz VBW: 100 KHz

Test Mode: FCC-Carrier Frequency Separation

Note:

No.	Frequency(MHz)	Level(dBm)
1	2440.0100	3.65
2	2442.0300	5.88

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk2-mk1	2.02	2.23

12 Dwell Time

12.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping system in the 2400-2483.5MHz band employing at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 second multiplied by the number of hopping channels employed.

12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4.

12.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Agilent	E4446A	09/27/2010

12.4 Measurement Data


Test Date : Nov. 19, 2009 Temperature : 26°C Humidity : 51%

Test period=0.4 (second/channel) × 31 channel=12.4 sec

Dwell time= 1.1167 ms × 26 = 29.0 ms


Note: Please refer to page 50 to page 53 for chart.

File: 24TR 1119 Data: #221 Date: 2009/11/19 Temperature: 26 °C
Time: AM 10:48:58 Humidity: 51 %

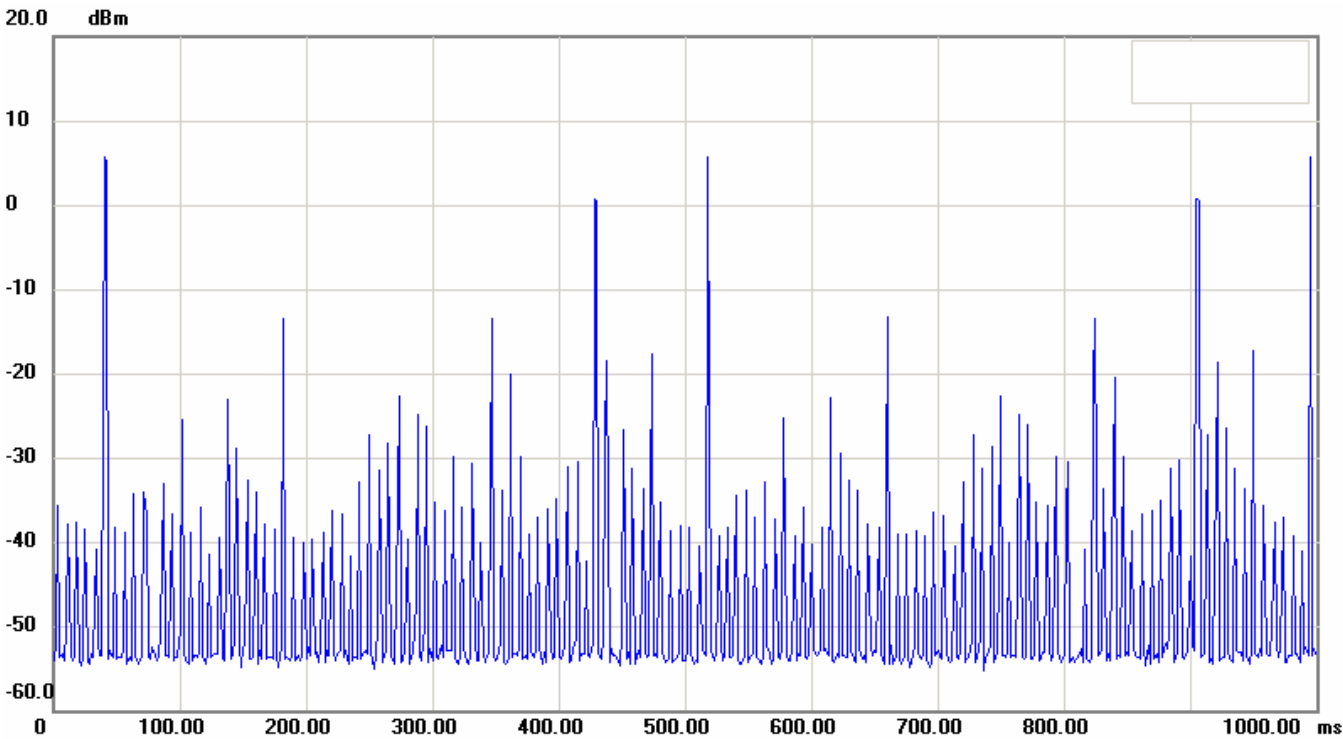


Condition:		RF Conducted
EUT:		Sweep Time: 1000ms Att.: 30dB
Model:	VD-8810M	RBW: 1000 KHz VBW: 1000 KHz
Test Mode:	Hops per 12.4 seconds - 1	
Note:		

File: 24TR 1119 Data: #217 Date: 2009/11/19 Temperature: 26 °C
Time: AM 10:35:46 Humidity: 51 %

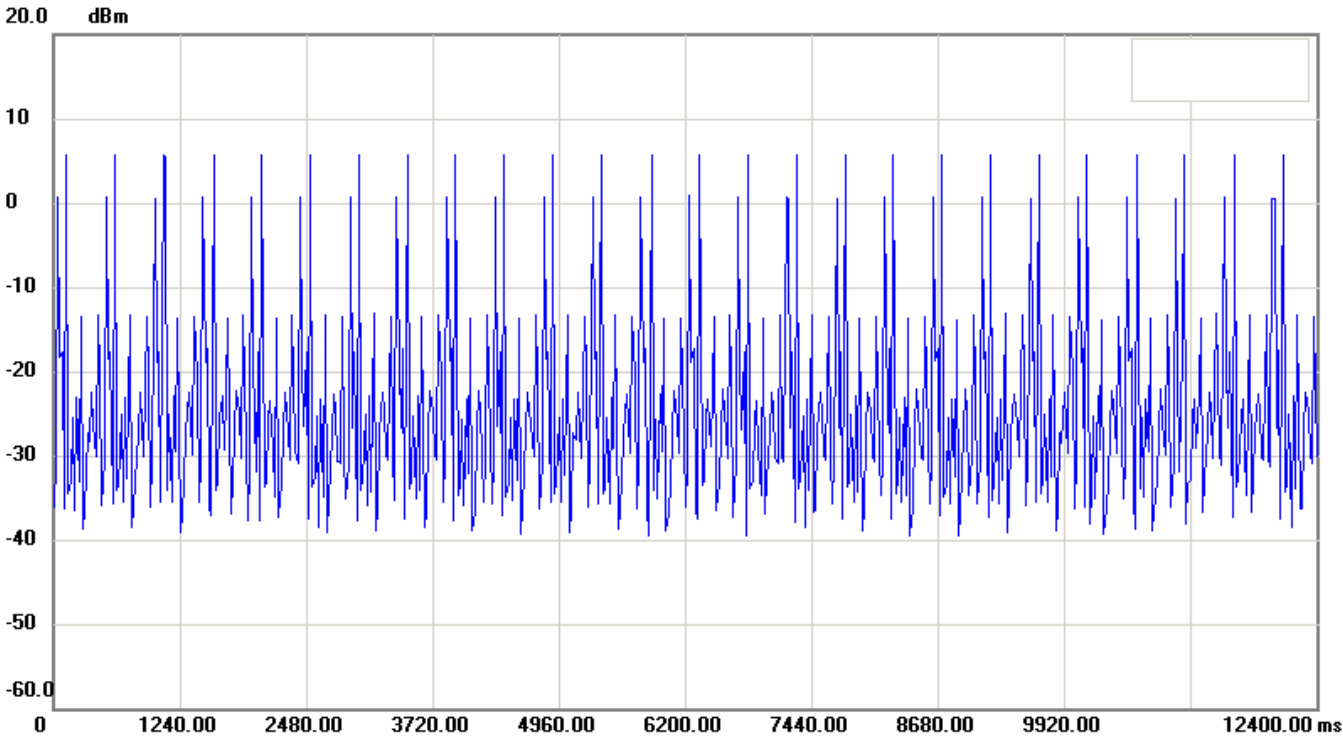


Condition:		RF Conducted
EUT:		Sweep Time: 12400ms Att.: 30dB
Model:	VD-8810M	RBW: 1000 KHz VBW: 1000 KHz
Test Mode:	Hops per 12.4 seconds -2	
Note:		

File: 24TR 1119	Data: #235	Date: 2009/11/19	Temperature: 26 °C
		Time: AM 11:42:57	Humidity: 51 %

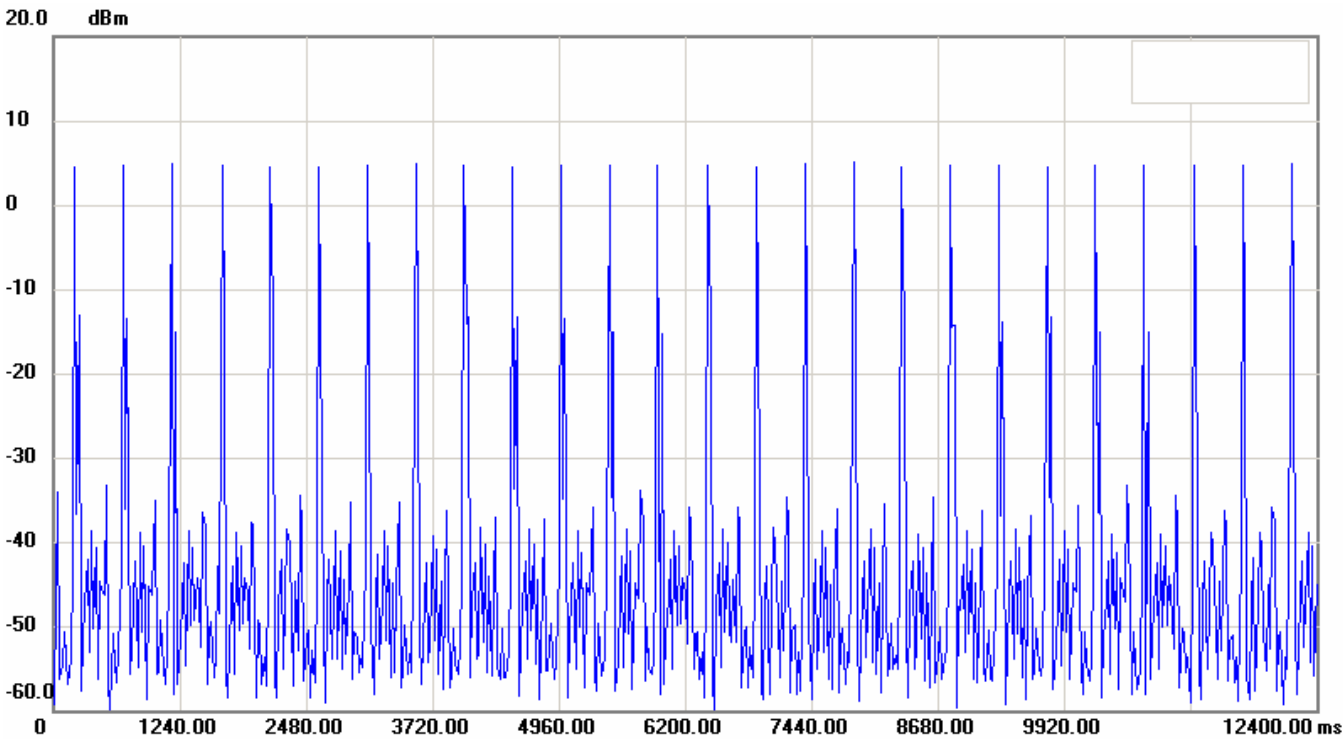

Condition:		RF Conducted
EUT:	R	Sweep Time: 12400ms Att.: 30dB
Model:	VD-8810M	RBW: 100 KHz VBW: 100 KHz
Test Mode:	Hops per 12.4 seconds - 3	
Note:		

File: 24TR 1119 Data: #223 Date: 2009/11/19 Temperature: 26 °C
Time: AM 11:02:16 Humidity: 51 %

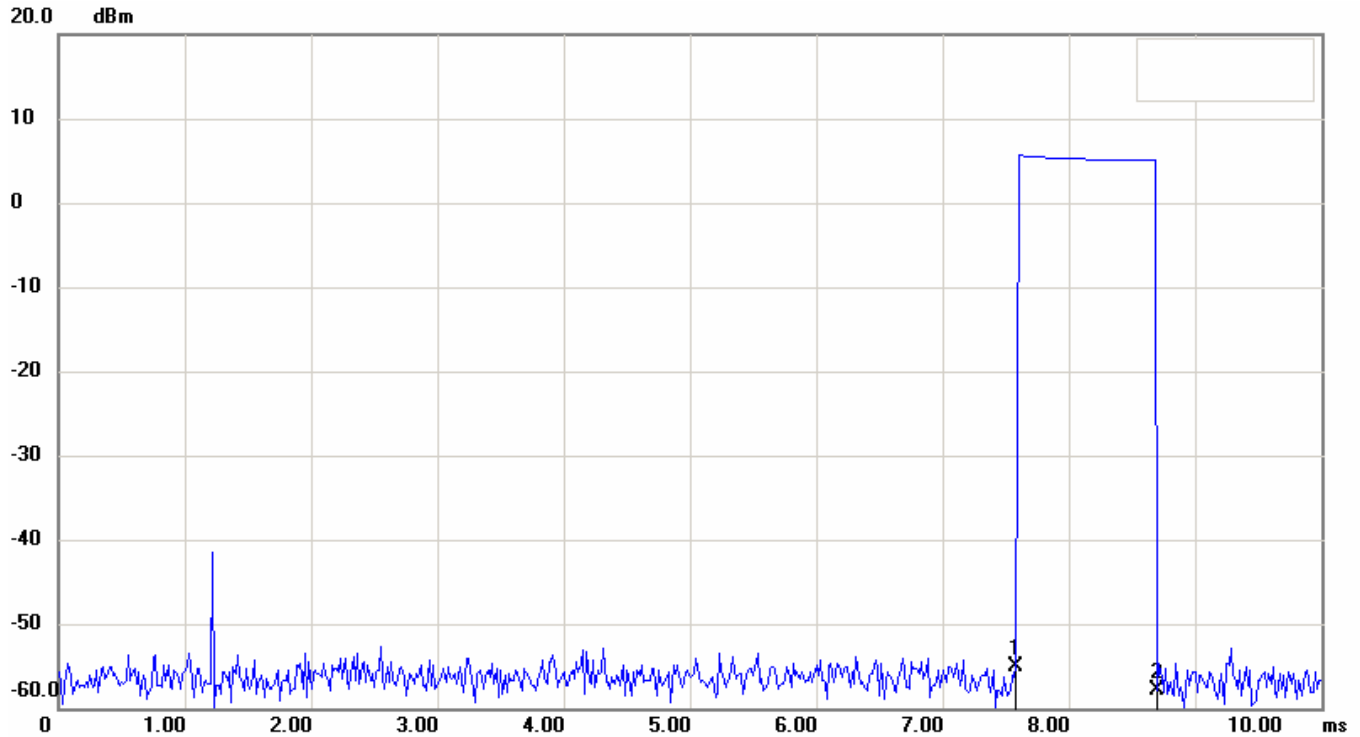

Condition:

EUT: R-HOPPING DT
Model: VD-8810M
Test Mode: DT pusle width

RF Conducted

Sweep Time: 10ms Att.: 30dB
RBW: 1000 KHz VBW: 1000 KHz

Note:

No.	Sweep time(ms)	Level(dBm)
1	7.5833	-55.01
2	8.7000	-57.81

No.		Δ Time(ms)	Δ Level(dB)
1	Mk2-mk1	1.1167	-2.80