



(2004)量认(国)字(H2402)号 No.L1659

FCC TEST REPORT

of

Mobile Phone

FCC ID: SG70605HG-Z1700
Brand Name: Haier
Model No.: HG-Z1700
Serial No.: N.A.
Report No.: FCC06-8053
Date: August 28, 2006

Prepared for

Qingdao HAIER Telecom Co., Ltd.
No.1, HAIER Road Hi-tech Zone, Qingdao, P.R.China

Prepared by

ShenZhen Electronic Product Quality Testing Center
Electronic Testing Building, Shahe Road, Xili, Nanshan District, ShenZhen, 518055, P.R.China
Tel: 86 755 26627338 Fax: 86 755 26627238

This test report consists of 66 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

Table of Contents

1	Test Report Certification	5
2	General Information	6
	2.1 Description of EUT	6
	2.2 Objective	7
	2.3 Test Standards and Results	7
	2.4 List of Equipments Used	8
	2.5 Test Facility	8
	2.6 Environmental conditions	8
3	Conducted Emission Measurement	9
	3.1 Limits of Conducted Emission	9
	3.2 Test Procedure	9
	3.3 Test Setup	10
	3.4 EUT Setup and Operating Conditions	10
	3.5 Test Results	10
4	Radiated Emission Test	12
	4.1 Limits of Radiated Emission	12
	4.2 Test Procedure	12
	4.3 Test Setup	13
	4.4 EUT Setup and Operating Conditions	13
	4.5 Test Results	13
5	Frequencies	15
	5.1 Frequency Blocks Available for Cellular Service	15
	5.2 Frequency Blocks Available for Broadband PCS	15
	5.3 Test Procedure	15
	5.4 Test Setup	16
	5.5 EUT Setup and Operating Conditions	16
	5.6 Test Results	17
6	Conducted RF Output Power Test	19

6.1 RF Power Output Test Requirement	19
6.2 Test Procedure	19
6.3 Test Setup	19
6.4 EUT Setup and Operating Conditions.....	19
6.5 Test Results	20
7 Occupied Bandwidth Test	24
7.1 Definition	24
7.2 Test Procedure	24
7.3 Test Setup	24
7.4 EUT Setup and Operating Conditions.....	24
7.5 Test Results	25
8 Conducted Spurious Emission Test.....	28
8.1 Limits of Conducted Spurious Emission.....	28
8.2 Test Procedure	28
8.3 Test Setup	28
8.4 EUT Setup and Operating Conditions.....	28
8.5 Test Results	29
9 Transmitter Radiated Power (EIRP/ERP) Test.....	37
9.1 Limits of EIRP/ERP	37
9.2 Test Procedure	37
9.3 Test Setup	38
9.4 EUT Setup and Operating Conditions.....	38
9.5 Test Results	39
10 Radiated Spurious Emission Test.....	42
10.1 Limits of Radiated Spurious Emission.....	42
10.2 Test Procedure	42
10.3 Test Setup	42
10.4 EUT Setup and Operating Conditions.....	42
10.5 Test Results	42



11	Frequency Stability Test.....	42
11.1	Requirement of Frequency Stability.....	42
11.2	Test Procedure.....	42
11.3	Test Setup.....	42
11.4	EUT Setup and Operating Conditions.....	42
11.5	Test Results.....	42
	Appendix I: Photographs of the EUT.....	42
	Appendix II: Photographs of the Test Configuration.....	42



1 Test Report Certification

Product: Mobile Phone

FCC ID: SG70605HIG-Z1700

Model No.: HG-Z1700

Applicant: Qingdao HAIER Telecom Co., Ltd.

Applicant Address: No.1, HAIER Road Hi-tech Zone, Qingdao, P.R.China

Manufacturer: Qingdao HAIER Telecom Co., Ltd.

Manufacturer Address: No.1, HAIER Road Hi-tech Zone, Qingdao, P.R.China

Test Standards: 47 CFR Part 2
47 CFR Part 15, Subpart B
47 CFR Part 22, Subpart H
47 CFR Part 24, Subpart E

Test Result: PASS

We, Shenzhen Electronic Product Quality Testing Center, hereby certify that the submitted samples of the above item, as detailed in chapter 2.1 of this report, has been tested in our facility. The test record, data evaluation and test configuration represented herein are true and accurate accounts of measurements of the sample's EMC characteristics under the conditions herein specified.

Tested by: Lin Xingsun Date: Aug. 28. 2006
Lin Xingsun

Checked by: Smart Li Aug 28, 2006
Smart Li



Approved by: Wu Li An Date: Aug. 28. 2006
Wu Li An

2 General Information

2.1 Description of EUT

EUT1	
Description:	Mobile Phone
Model No.:	HG-Z1700
Emission Designator:	300KGXW
Modulation:	GSM
Frequency:	GSM850, Tx: 824.20-848.80MHz; Rx: 869.20-893.80MHz GSM1900, Tx: 1850.20-1909.80MHz; Rx: 1930.20MHz-1989.80MHz
Rated Power:	2W for GSM850; 1W for GSM1900
Serial No.:	N.A.
Hardware Version:	P1
Software Version:	Z1700-H01-S002-CHN
EUT2	
Description:	Lithium-ion Battery
Model No.:	H11085
Serial No.:	N.A.
Manufacturer:	BYD COMPANY LIMITED
Capacitance:	750mAh
Rated Voltage:	3.7V
Charge Limit:	4.2V
EUT3	
Description:	AC/DC Adaptor (Charger)
Model No.:	H21027
Serial No.:	N.A.
Manufacturer:	NINGBO LISHUNDA ELECTRON CO., LTD.
Rated Input:	a.c. 100-240V, 50/60Hz
Rated Output:	d.c. 5.3V, 0.56mA
Length of DC cable:	180cm

NOTE:

1. The EUT is a model of GSM mobile station operating at Cellular 850 MHz and PCS 1900 MHz bands.
2. The EUT consists of Hand Telephone Set and normal options: Lithium Battery and Charger, as

listed above.

3. Please refer to Appendix I for the photographs of the EUT. For a more detailed features description about the EUT, please refer to User's Manual.

2.2 Objective

Perform EMC test according to FCC rules Part 2, Part 15, Part 22, and Part 24 for FCC ID Certification.

2.3 Test Standards and Results

The EUT has been tested according to 47 CFR

- Part 2 Frequency Allocations and Radio Treaty Matters: General Rules and Regulations (10-1-05 Edition)
- Part 15 Radio Frequency Devices (10-1-05 Edition)
- Part 22 Public Mobile Services (10-1-05 Edition)
- Part 24 Personal Communications Services (10-1-05 Edition)

Test items and the results are as bellow:

No	FCC Rules	Test Type	Test Result	Test Date
1	§15.107	Conducted Emission (Charger AC mains port)	PASS	2006.06.18
2	§15.109	Radiated Emission (Charger enclosure port)	PASS	2006.06.17
3	§2.106 §22.905 §24.229	Frequencies	PASS	2006.08.23
4	§2.1046	Conducted RF Output Power at Antenna Terminal	PASS	2006.08.23
5	§2.1049	Occupied Bandwidth	PASS	2006.08.23
6	§2.1051 §2.1057 §22.917 §24.238	Conducted Spurious Emission at Antenna Terminal	PASS	2006.08.23
7	§22.913 §24.232	Transmitter Radiated Power (EIRP/ERP)	PASS	2006.08.23
8	§2.1053 §2.1057 §22.917 §24.238	Radiated Spurious Emission	PASS	2006.08.23
9	§2.1055 §22.355 §24.235	Frequency Stability	PASS	2006.08.24

2.4 List of Equipments Used

Description	Manufacturer	Model No.	Cal. Due Date	Serial No.
Test Receiver	Schwarzbeck	FCKL1528	2007.06.05	A0304230
Test Receiver	Rohde & Schwarz	ESIB26	2007.06.05	A0304218
LISN	Schwarzbeck	NSLK8127	2007.06.05	A0304233
Loop Antenna	Rohde & Schwarz	HFH2-Z2	2007.06.05	A0304220
Ultra Broadband Ant.	Rohde & Schwarz	HL562	2007.06.05	A0304224
Horn Ant.	Rohde & Schwarz	HF906	2007.06.05	100150
Universal Radio Communication Tester	Rohde & Schwarz	CMU200	2007.06.05	A0304212
Mobile Phone Tester	Willtek	4403	2007.02.10	0811211
3G Communication Antenna	European Antennas	PSA 75301R/170	2007.05.10	A0304213
Temperature Chamber	JAPANTABAI	PSL-4G	2007.02.05	A8708056
Regulated DC Power Supply	Jiangbo	JB-305	--	A0412374
Shield Room	Nanbo Tech	Site 3	2007.03.18	A9901141
Shield Room	Nanbo Tech	Site 1	2007.01.17	A0304188
Anechoic Chamber	Albatross	EMC12.8×6.8×6.4(m)	2007.04.10	A0304210

2.5 Test Facility

Shenzhen Electronic Product Quality Testing Center (SET) is a third party testing organization accredited by China National Accreditation Committee for Laboratories (CNACL) according to ISO/IEC 17025. The accreditation certificate number is **L1659**.

The EMC chamber site No.1 (EMC12.8×6.8×6.4(m)), and the radiated and conducted Emission test equipments of SET are constructed and calibrated to meet the FCC requirements ANSI C63.4:2001 and CISPR 22/EN 55022. The FCC Registration Number is **261302**.

The EMC chamber site No.1 (EMC12.8×6.8×6.4(m)) also complies with Canada standard RSS 212, and acceptable to Industry Canada for the performance of radiated measurements. The Industry Canada Registration Number is **IC 5915**.

2.6 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

3 Conducted Emission Measurement

3.1 Limits of Conducted Emission

According to FCC §15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V), Class B digital device	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50


NOTE:

1. The lower limit shall apply at the band edges.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.2 Test Procedure

- a. The EUT was placed on a 0.8m high insulating table and kept 0.4 meters from the conducting wall of shielded room.
- b. The EUT was connected to the power mains through a line impedance stabilization network (LISN). The LISN provide 50 Ω /50 μ H of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150 kHz to 30 MHz was searched using CISPR Quasi-Peak and Average detector.

3.3 Test Setup

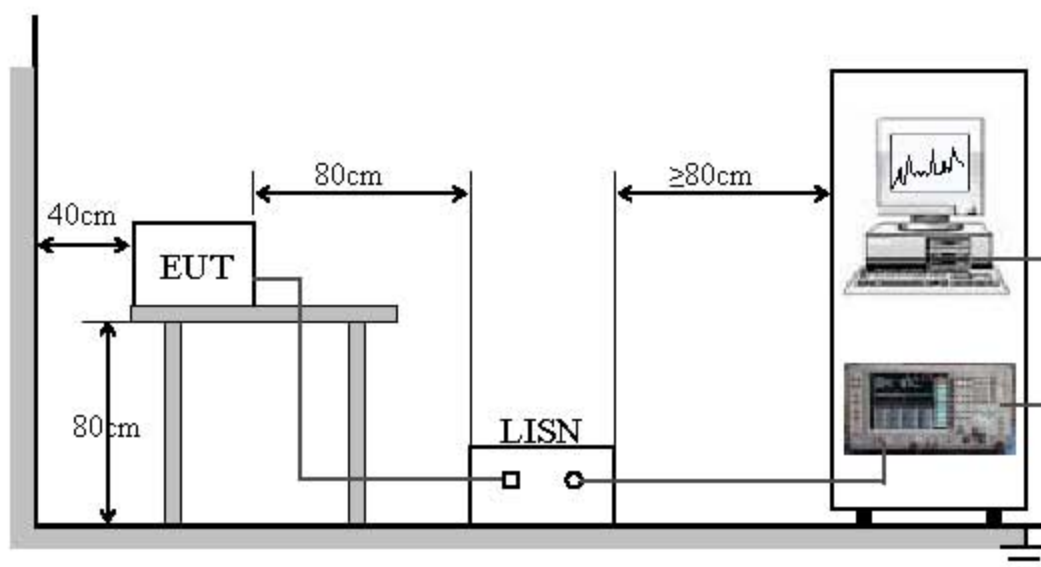

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

3.4 EUT Setup and Operating Conditions

The EUT configuration of the emission tests was MS + Battery + Charger. During the measurement, the EUT was charging empty battery. The charger was powered by 120V 60Hz AC mains supply. A communication link was also established between the MS and a System Simulator (SS). The MS operated at maximum output power.

3.5 Test Results

No.	Freq. (MHz)	Limit Value (dBμV)		Emission Level (dBμV)	
		QP	AV	QP	AV
1	0.2310	62.4	52.4	38.7	--
2	0.3615	58.7	48.7	38.1	--
3	0.6180	56.0	46.0	38.9	--
4	1.3515	56.0	46.0	36.2	--
5	8.8620	60.0	50.0	36.4	--
6	8.9160	60.0	50.0	36.6	--
7	24.0990	60.0	50.0	37.9	--


NOTE:

1. QP and AV are abbreviations of the quasi-peak and average individually.
2. If the emission levels measured with QP detector are lower than AV limits, there is unnecessary to measure with AV detector.
3. The emission levels recorded above is the larger ones of both L phase and N phase.




Test Plots

1. Mains terminal disturbance voltage, L phase

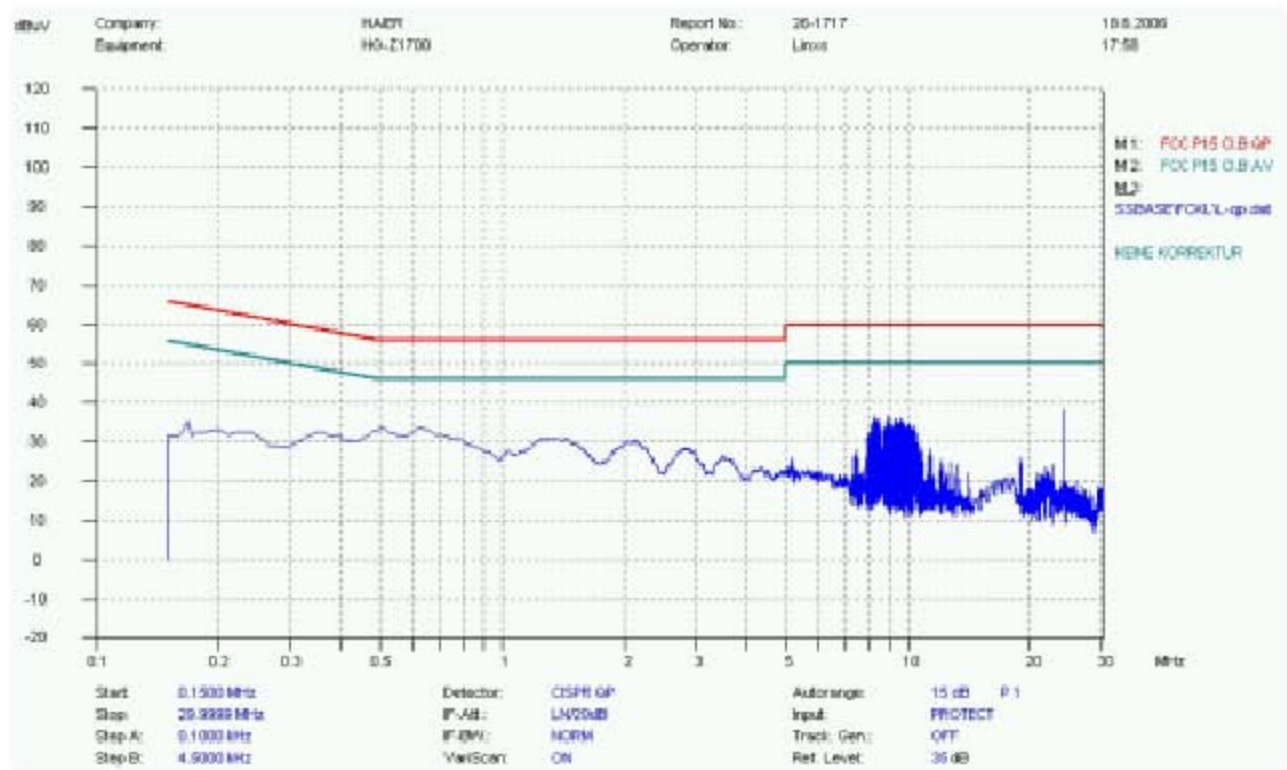

2. Mains terminal disturbance voltage, N phase

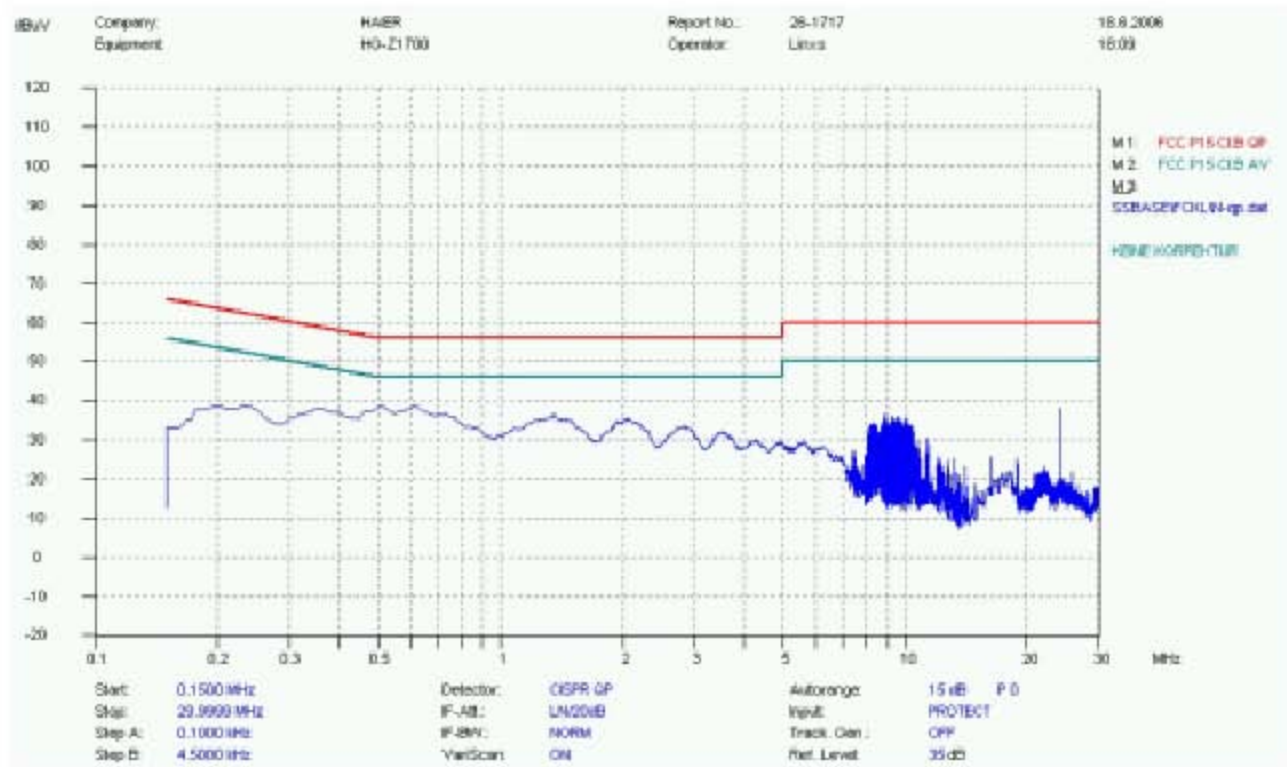

4 Radiated Emission Test

4.1 Limits of Radiated Emission

According to FCC §15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54


NOTE:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20\log$ Field Strength ($\mu\text{V/m}$).
2. In the emission tables above, the tighter limit applies at the band edges.

4.2 Test Procedure

- a. The EUT was placed on the top of a ratable 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to the heights from 1 to 4 meters and the ratable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detector Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emission that did not have 10 dB margins would be retested one by one using the quasi-peak method.

4.3 Test Setup

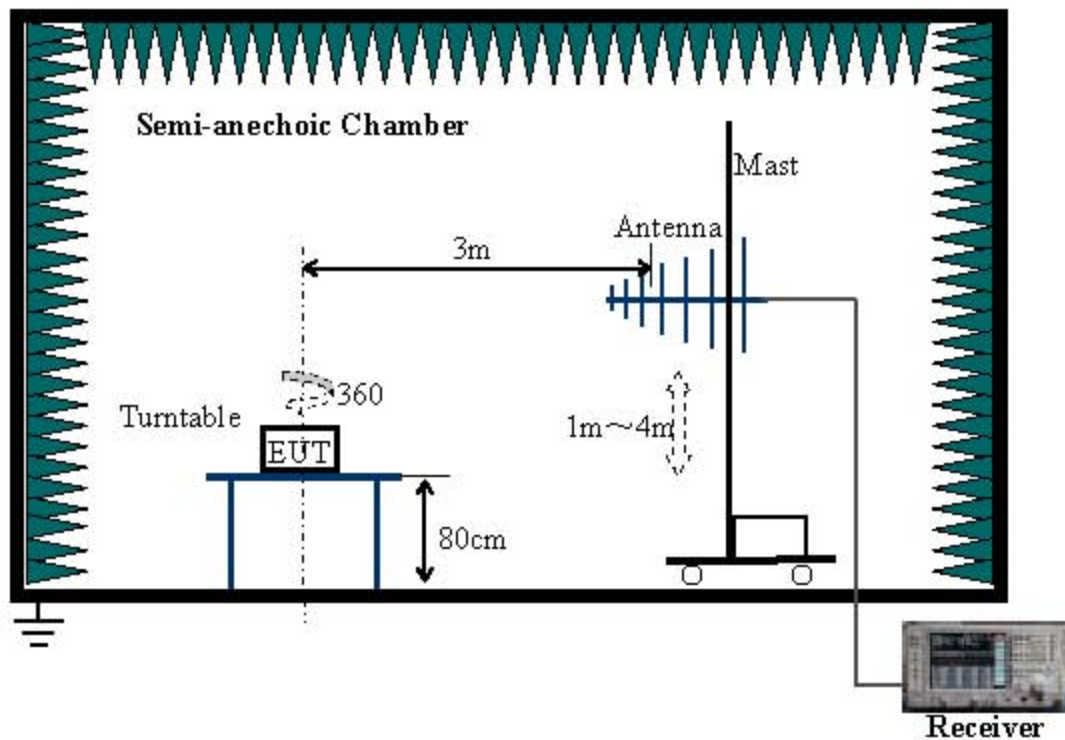

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

4.4 EUT Setup and Operating Conditions

Same as 3.4


4.5 Test Results

No.	Frequency (MHz)	Antenna Polarization	QP Limits (dB μ V/m)	Emission Level (dB μ V/m)
1	33.40	Vertical	40	33.19
2	38.00	Vertical	40	33.09
3	112.00	Vertical	43.5	24.15
4	107.36	Horizontal	43.5	23.07
5	117.32	Horizontal	443.5	23.41




Test Plots

1. Radiation disturbances, maxpeak detector, antenna polarization: Vertical

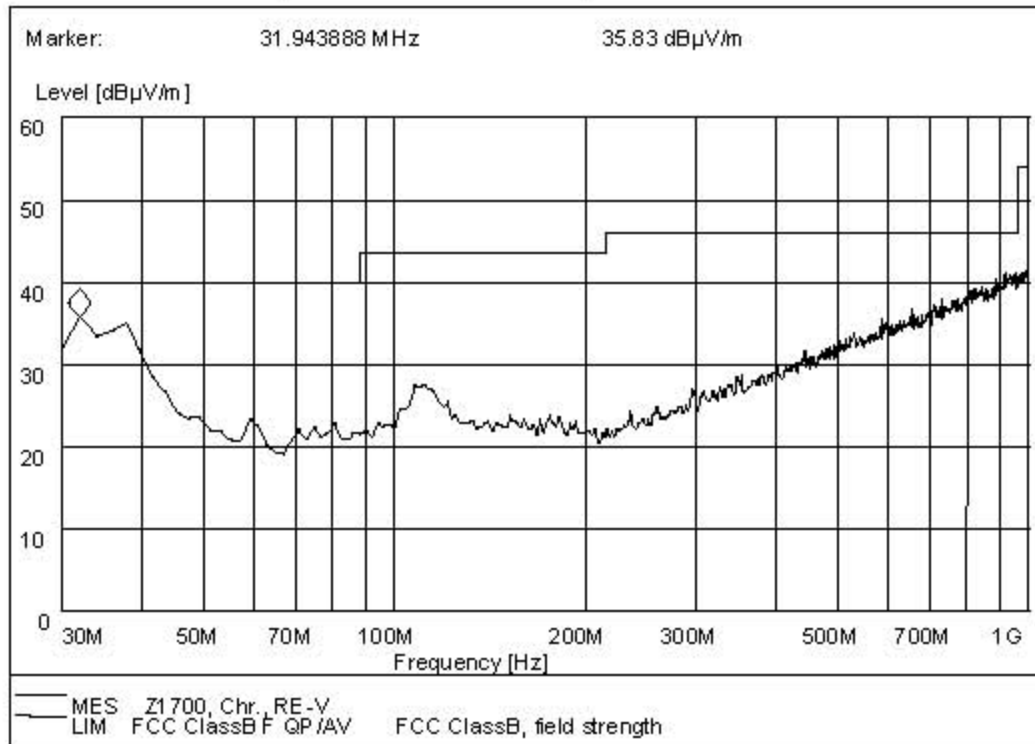

2. Radiation disturbances, maxpeak detector, antenna polarization: Horizontal

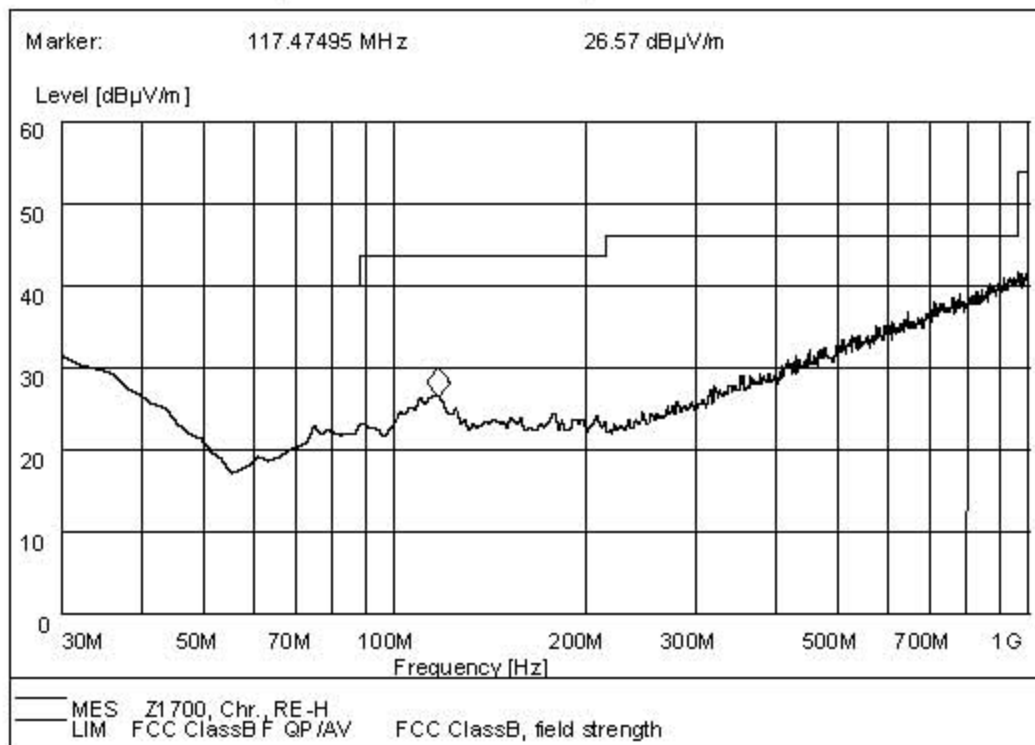

5 Frequencies

5.1 Frequency Blocks Available for Cellular Service

According to FCC §22.905, the frequencies blocks assignment for the Cellular Radiotelephone Service are listed as bellow.

Block A: Mobile 824-835 MHz, Base 869-880 MHz;
Mobile 845-846.5 MHz, Base 891.5-894 MHz;

Block B: Mobile 835-845 MHz, Base 880-890 MHz;
Mobile 846.5-849 MHz, Base 891.5-894 MHz.

5.2 Frequency Blocks Available for Broadband PCS

According to FCC §24.229, the frequencies available in the Broadband PCS service are listed as bellow, in accordance with the frequency allocations table of FCC §2.106.

(a) The following frequency blocks are available for assignment on an MTA basis:

Block A: Mobile 1850–1865 MHz, Base 1930–1945 MHz;
Block B: Mobile 1870–1885 MHz, Base 1950–1965 MHz.


(b) The following frequency blocks are available for assignment on a BTA basis:

Block C: Mobile 1895–1910 MHz, Base 1975–1990 MHz;
Block D: Mobile 1865–1870 MHz, Base 1945–1950 MHz;
Block E: Mobile 1885–1890 MHz, Base 1965–1970 MHz;
Block F: Mobile 1890–1895 MHz, Base 1970–1975 MHz.

5.3 Test Procedure

- a. The EUT was coupled to the spectrum analyzer and the base station simulator through a power divider. The lost of the cables the test system is calibrated to correct the reading.
- b. The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode.
- c. The resolution bandwidth of the spectrum analyzer was set to at least 1% of the emission bandwidth of the fundamental emission of the transmitter. For GSM signal, $VBW=RBW=3$ kHz; for CDMA signal, $VBW=RBW=30$ kHz.

5.4 Test Setup

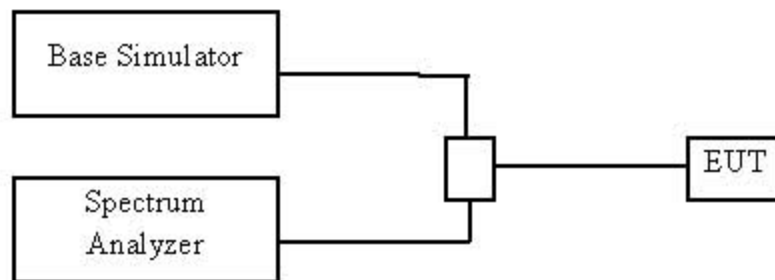

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

5.5 EUT Setup and Operating Conditions

The EUT configuration of the emission tests was MS + Battery.

A communication link was established between the MS and a System Simulator (SS).

The MS operated at the maximum output power: level 5 for GSM 850 MHz; level 0 for PCS 1900.

The lowest channel and the highest channel were measured respectively: channel No.128 (low) and 251 (high) for GSM 850 MHz; channel No.512 (low) and 810 (high) for PCS 1900 MHz.


5.6 Test Results

The mobile transmitter frequency arrangement of the GSM 850 MHz band is


$$F1(n) = 824.2 + 0.2*(n-128), 128 \leq n \leq 251$$

The frequencies of the lowest channel and the highest channel are as the following figures.

1. Lowest channel No.128

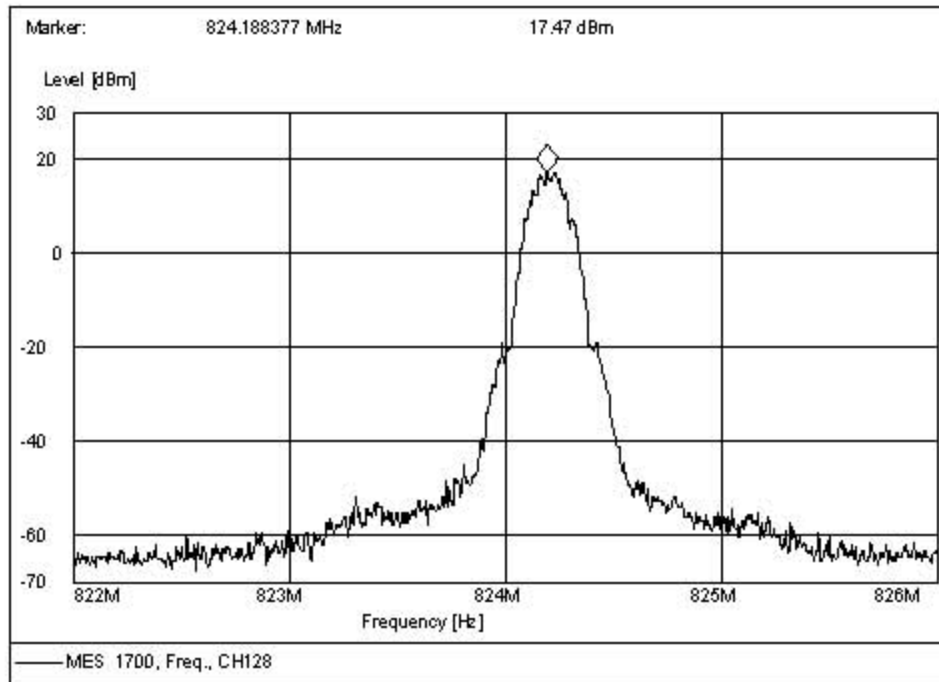

2. Highest channel No.251

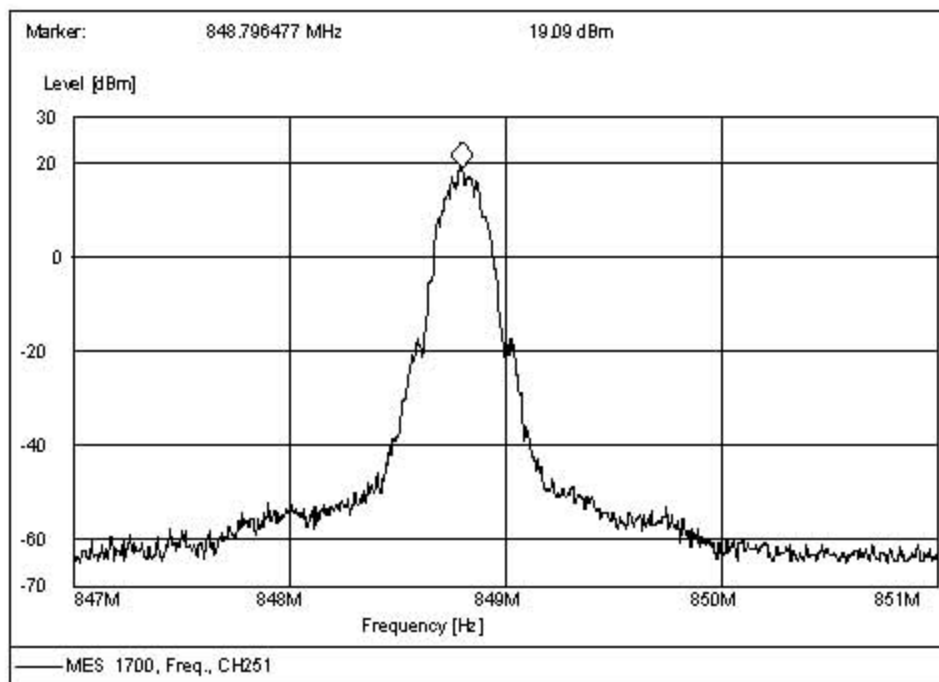


The mobile transmitter frequency arrangement of the PCS1900 band is


$$f(n) = 1850.2 + 0.2 \cdot (n - 512), \quad 512 \leq n \leq 810$$

The frequencies of the lowest channel and the highest channel are as the following figures.

1. Lowest channel No.512

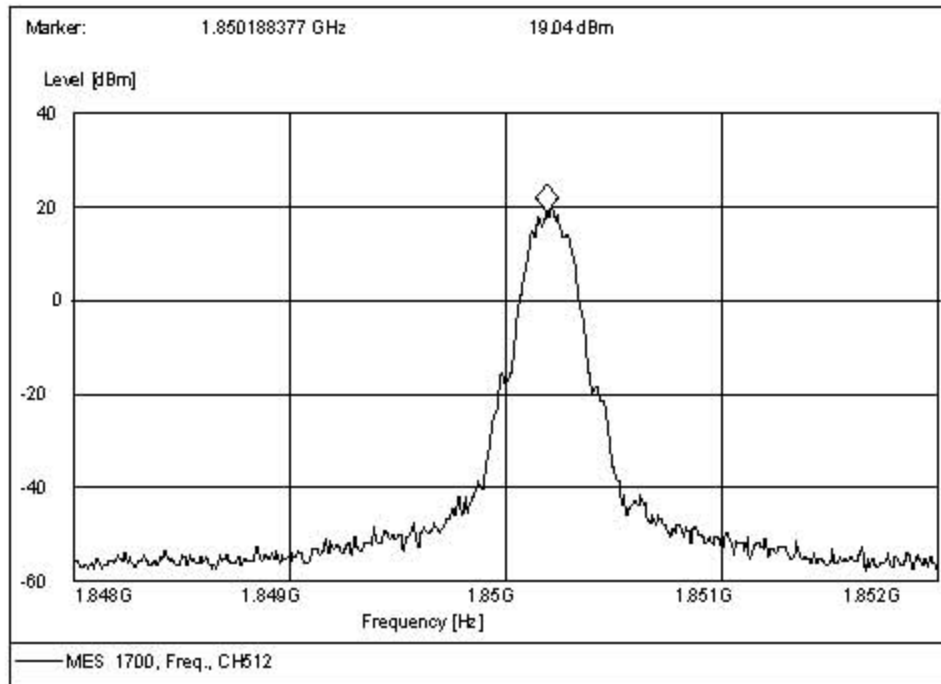

2. Highest channel No.810

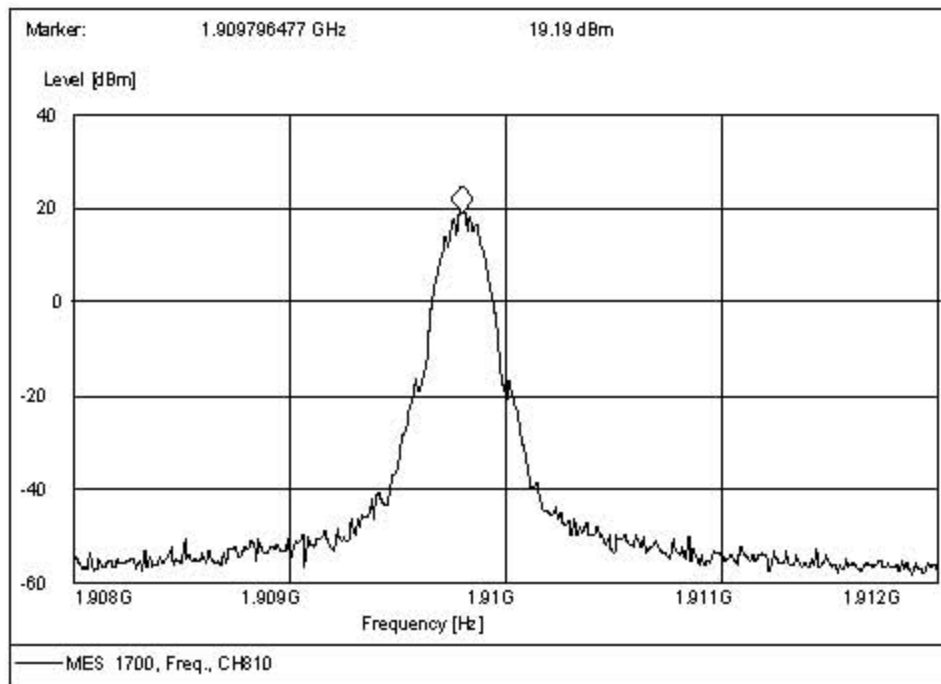

6 Conducted RF Output Power Test


6.1 RF Power Output Test Requirement

According to FCC §2.1046 (a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

6.2 Test Procedure

- The EUT was coupled to the spectrum analyzer and the base station simulator through a power divider. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables the test system is calibrated to correct the reading.
- The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode.
- The resolution bandwidth of the spectrum analyzer was comparable to the emission bandwidth. For GSM signal, VBW=RBW=1 MHz; for CDMA signal, VBW=RBW=3 MHz.

6.3 Test Setup

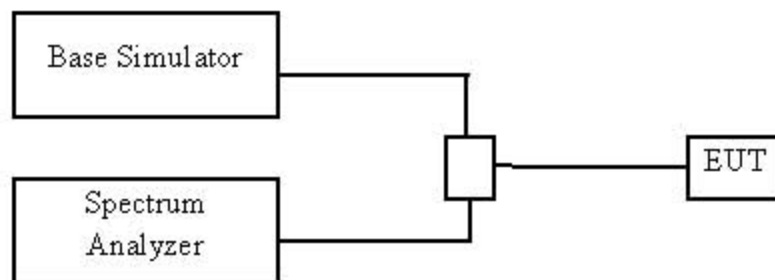

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

6.4 EUT Setup and Operating Conditions

The EUT configuration of the emission tests was MS + Battery.

A communication link was established between the MS and a System Simulator (SS).

The MS operated at the maximum output power: level 5 for GSM 850 MHz; level 0 for PCS 1900.

The low, middle and high channels were measured respectively: channel No.128 (low), 190 (middle) and 251 (high) for GSM 850 MHz; channel No.512 (low), 661 (middle) and 810 (high) for PCS 1900.


6.5 Test Results

I. GSM 850MHz Band

No.	GSM 850 Channel No.	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)
1	128	824.20	32.29	33
2	190	836.60	32.45	33
3	251	848.80	32.57	33


Test Plots

1. Lowest channel No. 128

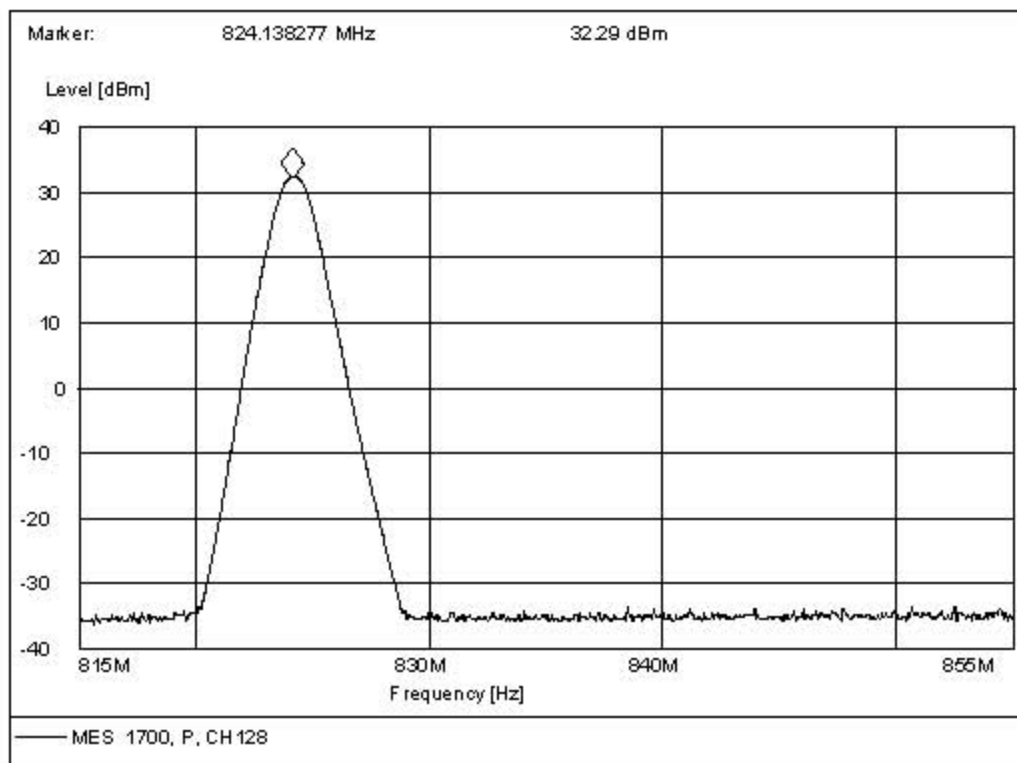




2. Middle channel No.190

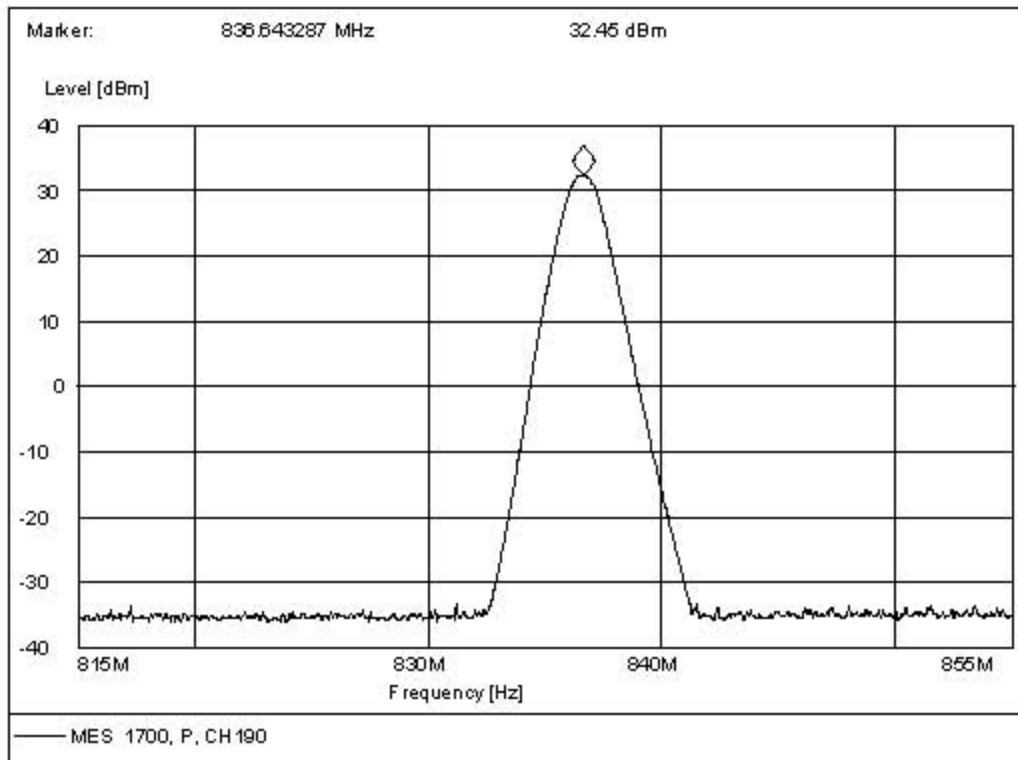

3. Highest channel No.251

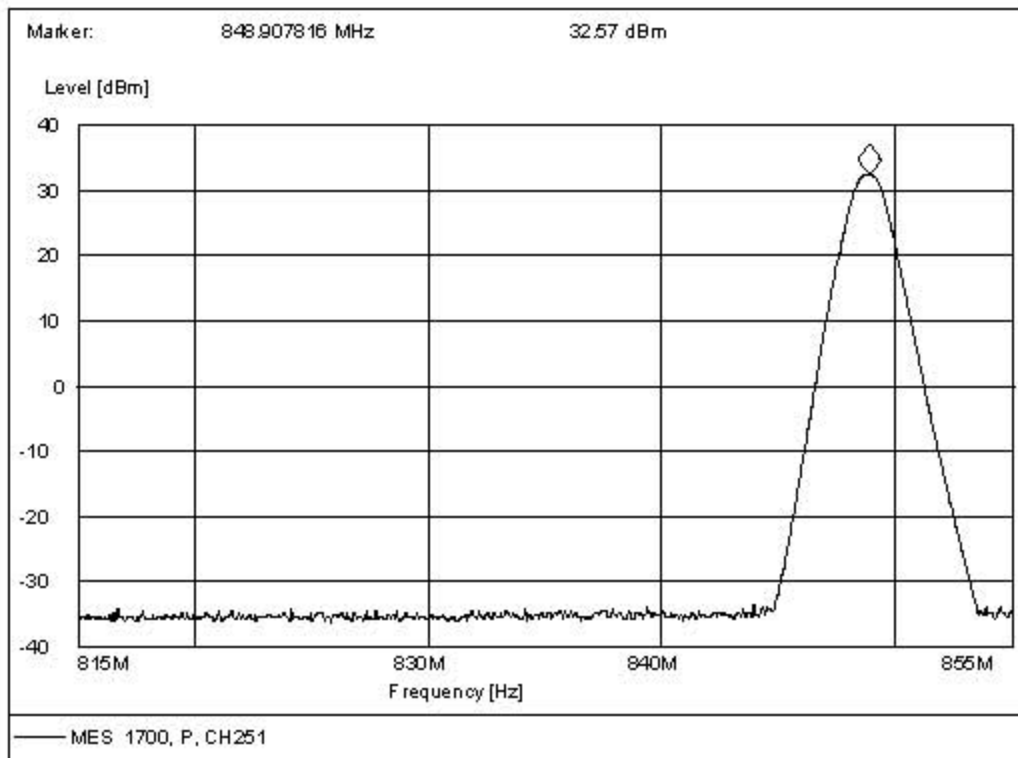


II. PCS 1900MHz Band

No.	PCS 1900 Channel No.	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)
1	512	1850.20	29.52	30
2	661	1880.00	29.30	30
3	810	1909.80	28.77	30


Test Plots

1. Lowest channel No.512

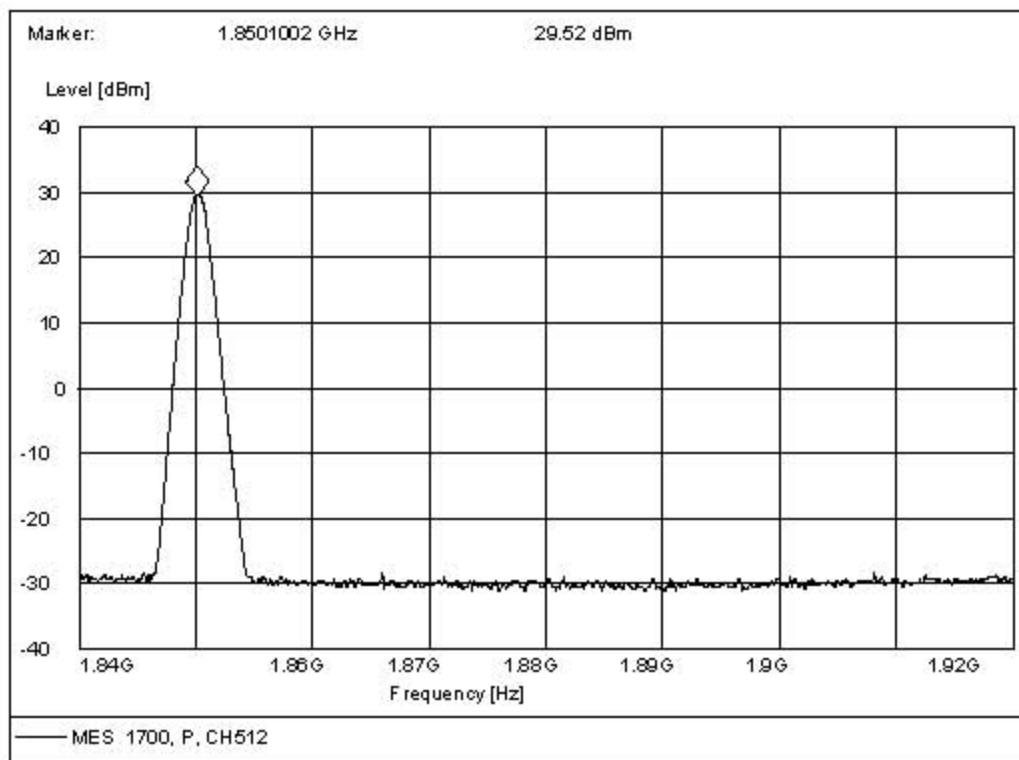




2. Middle channel No.661

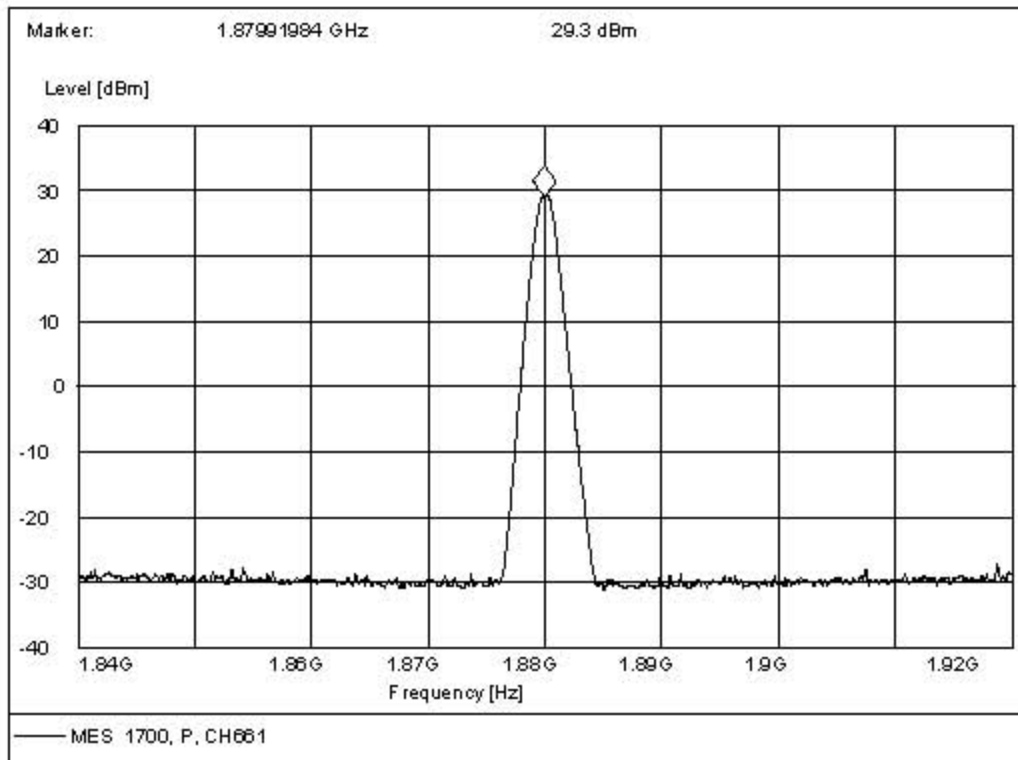

3. Highest channel No.810

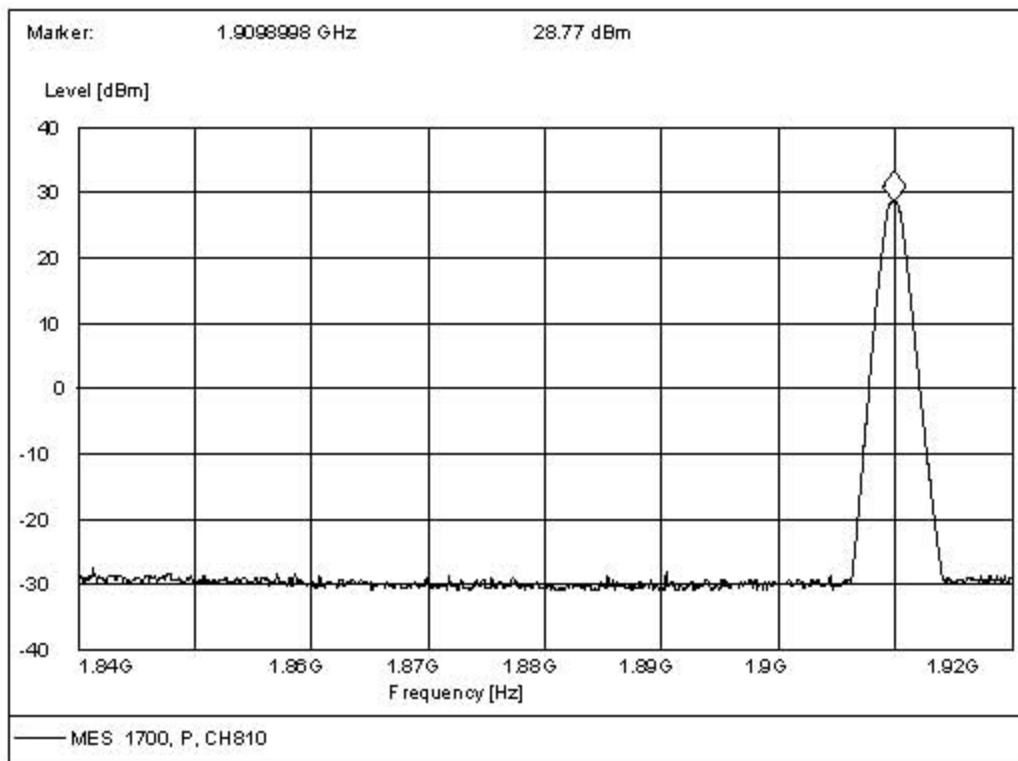

7 Occupied Bandwidth Test

7.1 Definition


According to FCC §2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth, or 20dB bandwidth ($10\log 1\%=20\text{dB}$) taking the total RF output power as reference.

7.2 Test Procedure

- The EUT was coupled to the spectrum analyzer and the base station simulator through a power divider. The loss of the cables the test system is calibrated to correct the reading.
- The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode.
- The resolution bandwidth of the spectrum analyzer was set to at least 1% of the emission bandwidth. For GSM signal, $\text{VBW}=\text{RBW}=3\text{ kHz}$; for CDMA signal, $\text{VBW}=\text{RBW}=30\text{ kHz}$.

7.3 Test Setup

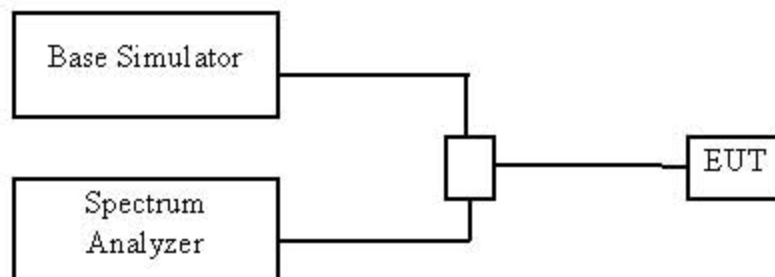

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

7.4 EUT Setup and Operating Conditions

The EUT configuration of the emission tests was MS + Battery.

A communication link was established between the MS and a System Simulator (SS).

The MS operated at the maximum output power: level 5 for GSM 850 MHz; level 0 for PCS 1900.


The low, middle and high channels were measured respectively: channel No.128 (low), 190 (middle) and 251 (high) for GSM 850 MHz; channel No.512 (low), 661 (middle) and 810 (high) for PCS 1900.




7.5 Test Results

The occupied bandwidth was measured to be about 300 kHz. Refer to the following plots.

1. GSM 850MHz band, lowest channel No.128

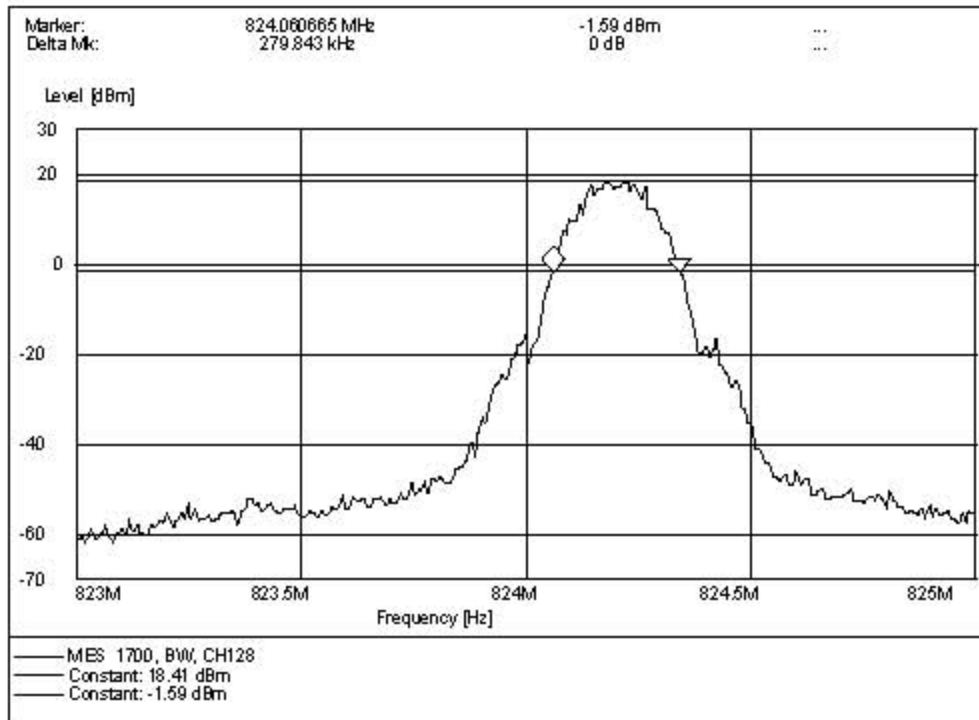


2. GSM 850MHz band, middle channel No.190

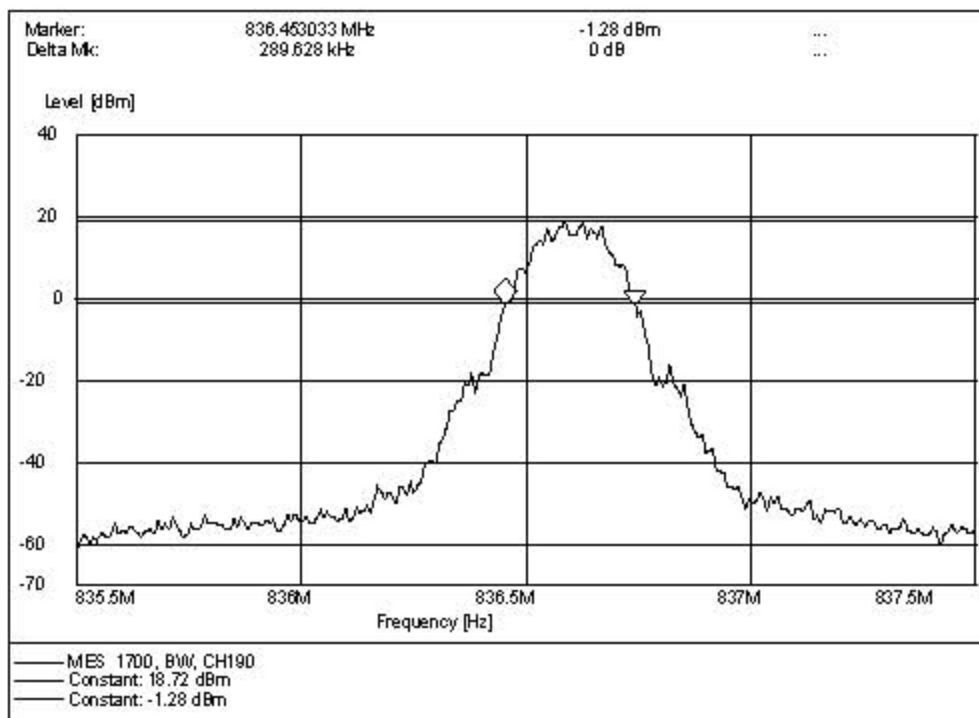




3. GSM 850MHz band, highest channel No.251

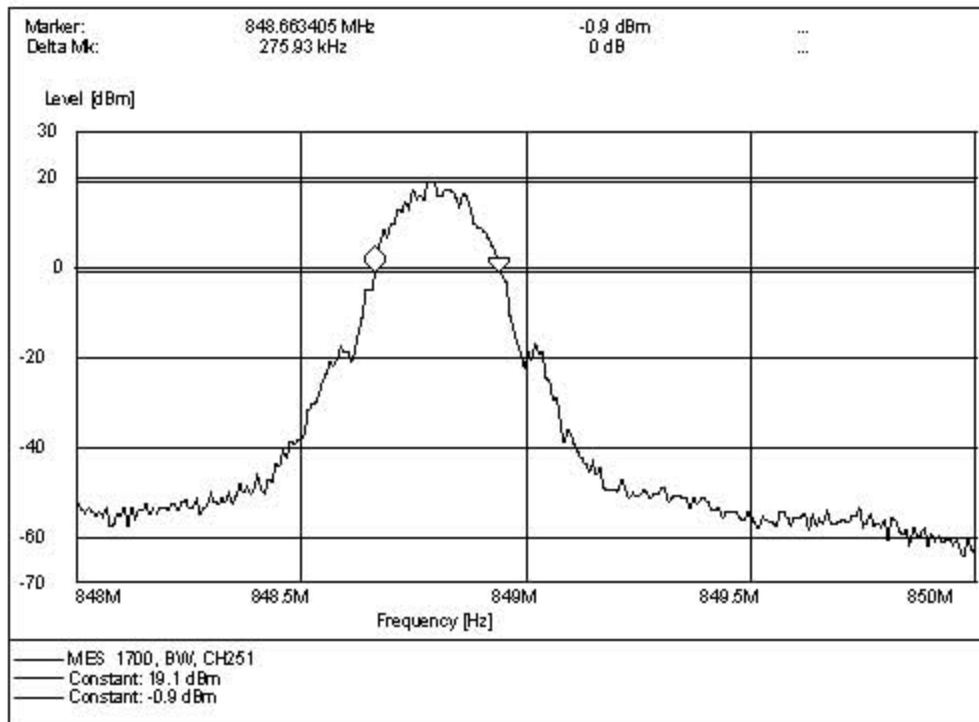


4. PCS 1900MHz band, lowest channel No.512

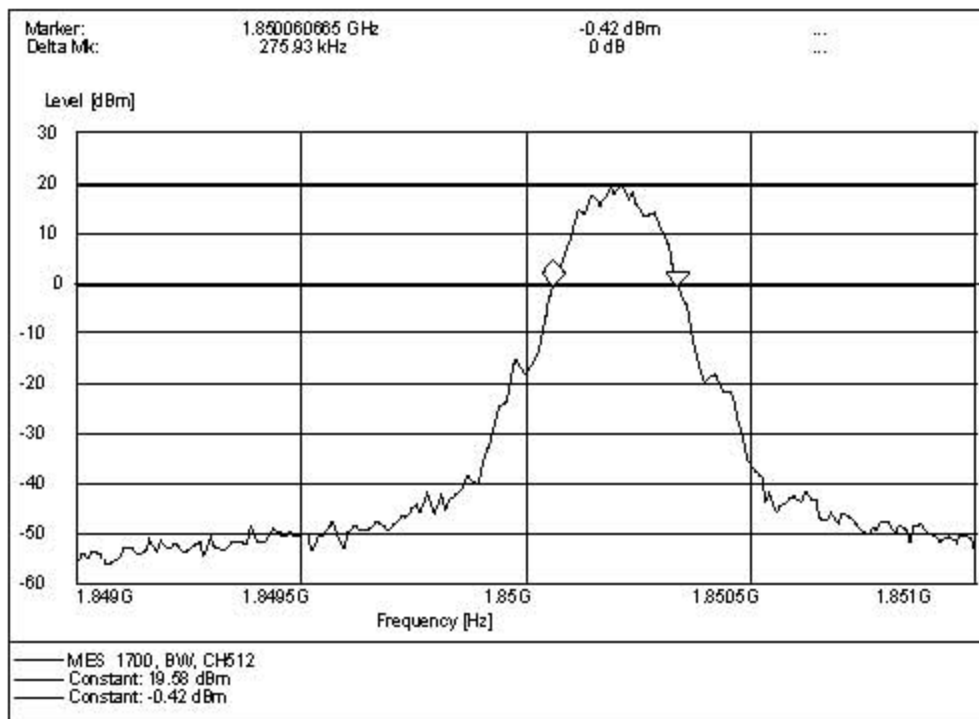



5. PCS 1900MHz band, middle channel No.661

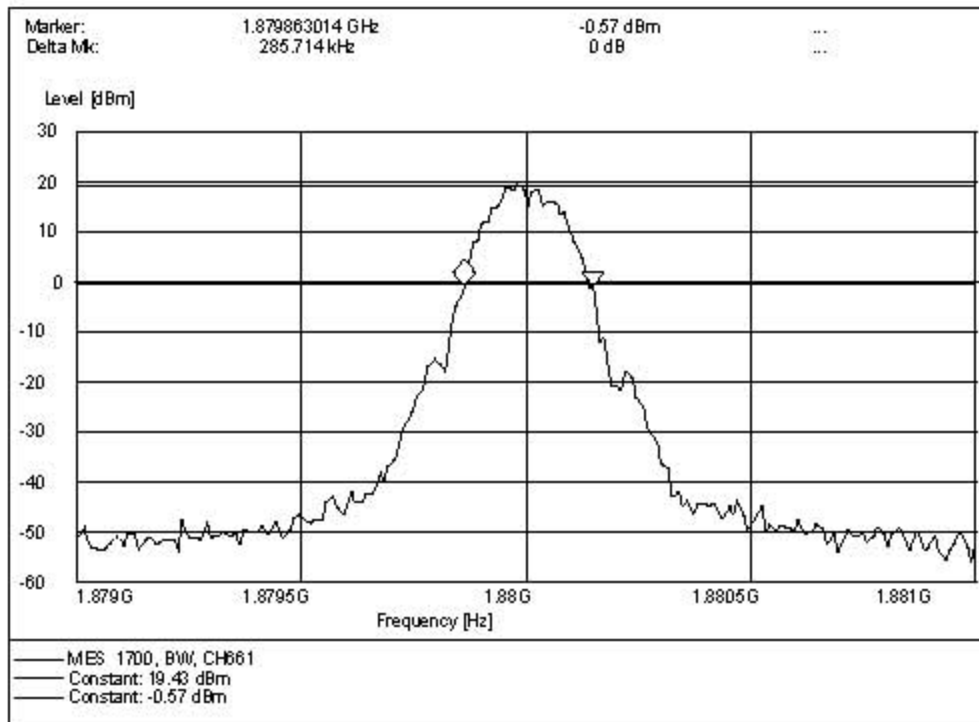

6. PCS 1900MHz band, highest channel No.810

