



FCC PART 15.247
TEST REPORT

For

**Chongqing JINOUE Science and Technology
Development Co., Ltd.**

Huaxuan Road 108# ,Hi-Tech Development Zone,Chongqing, 400041,P.R.China

FCC ID: SI8BTC-B1

Report Type: Original Report	Product Type: Bluetooth Smart Controller
Test Engineer: Leon Chen	<i>Leon Chen</i>
Report Number: R2SC130401050-00	
Report Date: 2013-04-17	
Reviewed By: Ivan Cao RF Leader	<i>Ivan Cao</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.
* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★"
(Rev.2), This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION.....	6
EUT EXERCISE SOFTWARE.....	6
EQUIPMENT MODIFICATIONS.....	6
BLOCK DIAGRAM OF TEST SETUP.....	6
SUMMARY OF TEST RESULTS.....	7
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1093- RF EXPOSURE.....	8
APPLICABLE STANDARD.....	8
FCC §15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD.....	9
ANTENNA CONNECTOR CONSTRUCTION.....	9
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	10
APPLICABLE STANDARD.....	10
MEASUREMENT UNCERTAINTY.....	10
EUT SETUP.....	10
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	11
TEST PROCEDURE.....	11
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
TEST RESULTS SUMMARY.....	12
TEST DATA.....	12
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST.....	21
APPLICABLE STANDARD.....	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST PROCEDURE.....	21
TEST DATA.....	21
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....	27
APPLICABLE STANDARD.....	27
TEST PROCEDURE.....	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA.....	27
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST.....	33
APPLICABLE STANDARD.....	33
TEST PROCEDURE.....	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA.....	33
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	37

APPLICABLE STANDARD37
TEST PROCEDURE37
TEST EQUIPMENT LIST AND DETAILS.....37
TEST DATA37

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT53
APPLICABLE STANDARD53
TEST PROCEDURE53
TEST EQUIPMENT LIST AND DETAILS.....53
TEST DATA53

FCC §15.247(d) - BAND EDGES TESTING59
APPLICABLE STANDARD59
TEST PROCEDURE59
TEST EQUIPMENT LIST AND DETAILS.....59
TEST DATA59

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Chongqing JINOU Science and Technology Development Co., Ltd.*'s product, model number: *BTC-B1 (FCC ID: S18BTC-B1)* or ("EUT") in this report is a *Bluetooth Smart Controller*, which was measured approximately: 14.8 cm (L) x 10.0 cm (W) x 5.7cm (H), rated input voltage: DC 3.7V from lithium battery.

** All measurement and test data in this report was gathered from production sample serial number: 130401050 (Assigned by BACL, Dongguan). The EUT was received on 2013-04-07.*

Objective

This report is prepared on behalf of *Chongqing JINOU Science and Technology Development Co., Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules

The tests were performed in order to determine the Bluetooth of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

The uncertainty of any RF tests which use conducted method measurement is ± 0.96 dB, the uncertainty of any radiation on emissions measurement is 30M~200MHz: 5.0 dB;200M~1GHz: 6.2 dB;1G~6GHz: 4.45 dB;6G~18GHz: 5.23 dB.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at <http://ts.nist.gov/standards/scopes/5000690.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.


EUT Exercise Software

“CSR BlueSuite” exercise software was used.

Equipment Modifications

No modification was made to the EUT tested.

Block Diagram of Test Setup

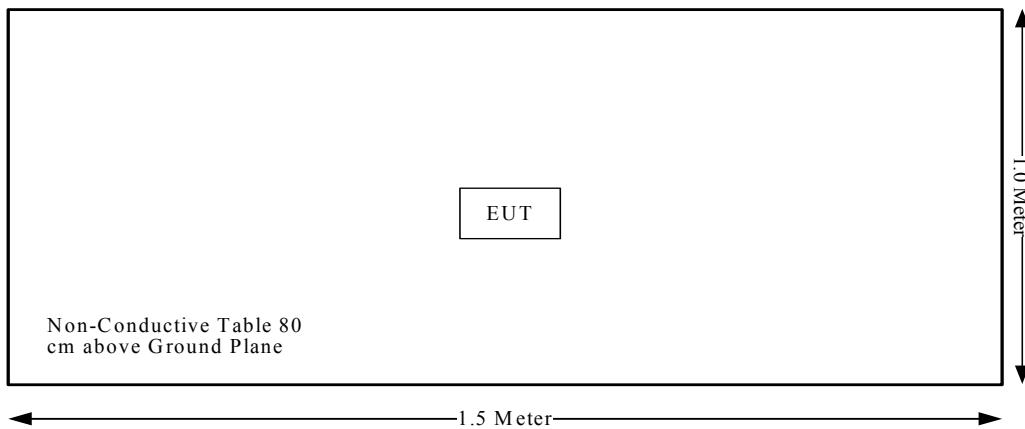

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Not Applicable
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

Not Applicable: the EUT power by battery at normal use.

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(e)(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 Mobile Portable RF Exposure V05 Appendix A, SAR can be exempted if the output power is less than the SAR exclusion threshold:

For $f=2450\text{MHz}$, the output power is less 10mW at distance of 5mm.

Measurement Result

Peak conducted output power= 3.48 dBm

Antenna gain = 0 dBi

SAR exclusion threshold 10 mW (10dBm) > 3.48 dBm

So the SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a printed antenna, which was permanently attached on the PCB, and the maximum gain was 0 dBi which complied with 15.203, please refer to the internal photos.

Result: Compliance.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:


- 30M~200MHz: 5.0 dB
- 200M~1GHz: 6.2 dB
- 1G~6GHz: 4.45 dB
- 6G~18GHz: 5.23 dB

Table 1 – Values of U_{cispr}


Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

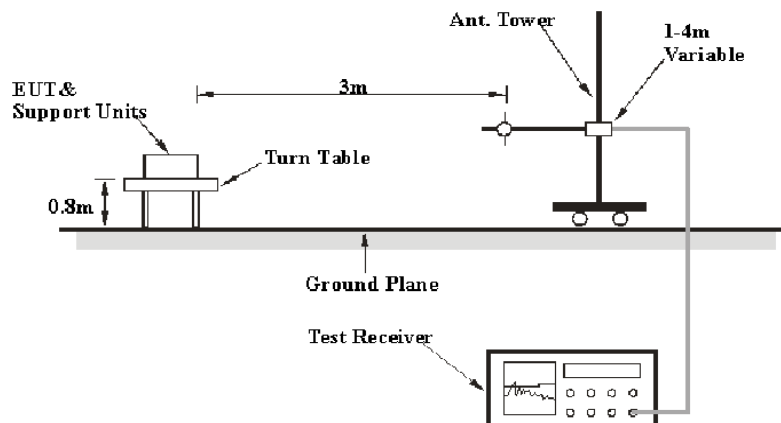

Above 1GHz:

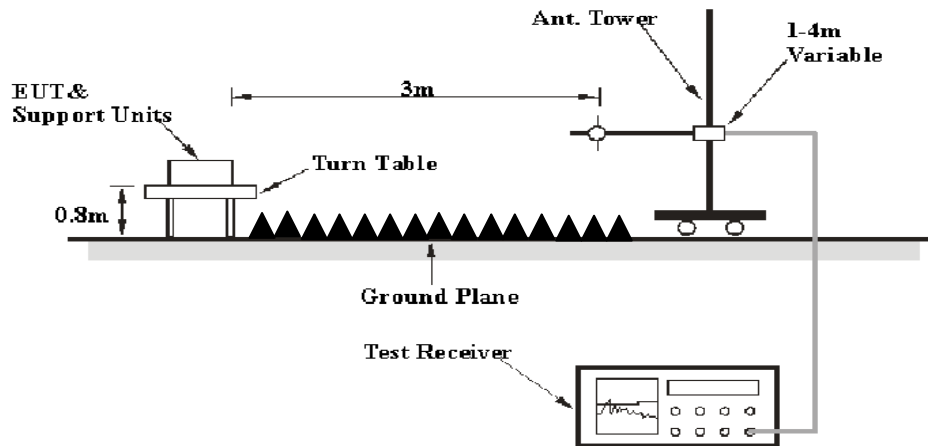

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video BW</i>	<i>Detector</i>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

Test Procedure

During the radiated emissions, the EUT was connected to the AC floor outlet and the other support equipments were connected to the second AC floor outlet. #

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECIEVER	ESCI	100224	2012-5-14	2013-5-13
Sunol Sciences	Antenna	JB3	A060611-1	2012-9-6	2013-9-5
HP	HP AMPLIFIER	8447E	2434A02181	N/A	N/A
R&S	Spectrum analyzer	FSEM 30	849016/001	2012-9-4	2013-9-3
ETS LINDGREN	horn antenna	3115	000 527 35	2012-9-6	2013-9-5
Mini-Circuits	Amplifier	ZVA-213-S+	54201245	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

10.43 dB at 4960 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	23.9 ° C
Relative Humidity:	60 %
ATM Pressure:	101.3 kPa

The testing was performed by Leon Chen on 2013-04-12.

Mode: Transmitting

BDR Mode (GFSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBµV/m)	Margin (dB)
Low Channel: 2402(MHz)									
2402	58.4	PK	H	25.65	3.90	0.00	87.95	N/A	N/A
2402	48.93	AV	H	25.65	3.90	0.00	78.48	N/A	N/A
2402	59.45	PK	V	25.65	3.90	0.00	89.00	N/A	N/A
2402	49.31	AV	V	25.65	3.90	0.00	78.86	N/A	N/A
2390	28.22	PK	V	25.61	3.84	0.00	57.67	74.00	16.33
2390	14.08	AV	V	25.61	3.84	0.00	43.53	54.00	10.47
4804	55.27	PK	V	30.59	4.67	27.26	63.27	74.00	10.73
4804	29.93	AV	V	30.59	4.67	27.26	37.93	54.00	16.07
7206	31.72	PK	V	34.09	6.50	26.30	46.01	74.00	27.99
7206	18.04	AV	V	34.09	6.50	26.30	32.33	54.00	21.67
9608	33.49	PK	V	35.96	8.75	26.22	51.98	74.00	22.02
9608	19.68	AV	V	35.96	8.75	26.22	38.17	54.00	15.83
7370	33.14	PK	V	33.52	6.07	27.25	45.48	74.00	28.52
7370	19.75	AV	V	33.52	6.07	27.25	32.09	54.00	21.91
109.98	38.82	QP	V	12.78	1.53	21.44	31.69	43.50	11.81
Middle Channel: 2441(MHz)									
2441	57.64	PK	H	25.75	3.99	0.00	87.38	N/A	N/A
2441	48.71	AV	H	25.75	3.99	0.00	78.45	N/A	N/A
2441	58.83	PK	V	25.75	3.99	0.00	88.57	N/A	N/A
2441	49.23	AV	V	25.75	3.99	0.00	78.97	N/A	N/A
4882	55.12	PK	V	30.79	4.75	27.26	63.40	74.00	10.60
4882	29.79	AV	V	30.79	4.75	27.26	38.07	54.00	15.93
7323	31.29	PK	V	34.38	6.72	26.53	45.86	74.00	28.14
7323	18.02	AV	V	34.38	6.72	26.53	32.59	54.00	21.41
9764	33.34	PK	V	36.33	8.58	25.62	52.63	74.00	21.37
9764	19.76	AV	V	36.33	8.58	25.62	39.05	54.00	14.95
4564	32.53	PK	V	29.97	5.27	27.14	40.63	74.00	33.37
4564	19.1	AV	V	29.97	5.27	27.14	27.20	54.00	26.80
7370	33.31	PK	V	33.52	6.07	27.25	45.65	74.00	28.35
7370	19.72	AV	V	33.52	6.07	27.25	32.06	54.00	21.94
109.76	39.64	QP	V	12.79	1.53	21.44	32.52	43.50	10.98
High Channel: 2480(MHz)									
2480	57.39	PK	H	25.85	3.82	0.00	87.06	N/A	N/A
2480	48.58	AV	H	25.85	3.82	0.00	78.25	N/A	N/A
2480	58.42	PK	V	25.85	3.82	0.00	88.09	N/A	N/A
2480	49.12	AV	V	25.85	3.82	0.00	78.79	N/A	N/A
2483.5	27.93	PK	V	25.86	3.80	0.00	57.59	74.00	16.41
2483.5	13.89	AV	V	25.86	3.80	0.00	43.55	54.00	10.45
4960	55.14	PK	V	31.00	4.70	27.27	63.57	74.00	10.43
4960	29.88	AV	V	31.00	4.70	27.27	38.31	54.00	15.69
7440	31.43	PK	V	34.66	6.95	26.56	46.48	74.00	27.52
7440	17.96	AV	V	34.66	6.95	26.56	33.01	54.00	20.99
9920	33.67	PK	V	36.71	8.41	25.50	53.29	74.00	20.71
9920	19.59	AV	V	36.71	8.41	25.50	39.21	54.00	14.79
7370	33.23	PK	V	33.52	6.07	27.25	45.57	74.00	28.43
7370	19.69	AV	V	33.52	6.07	27.25	32.03	54.00	21.97
108.94	37.79	QP	V	12.82	1.52	21.44	30.69	43.50	12.81

EDR Mode ($\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	FCC 15.247	
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dB μ V/m)	Margin (dB)
Low Channel: 2402(MHz)									
2402	57.14	PK	H	25.65	3.90	0.00	86.69	N/A	N/A
2402	48.27	AV	H	25.65	3.90	0.00	77.82	N/A	N/A
2402	58.16	PK	V	25.65	3.90	0.00	87.71	N/A	N/A
2402	78.84	AV	V	25.65	3.90	0.00	78.39	N/A	N/A
2390	28.22	PK	V	25.61	3.84	0.00	57.67	74.00	16.33
2390	14.08	AV	V	25.61	3.84	0.00	43.53	54.00	10.47
4804	44.31	PK	V	30.59	4.67	27.26	52.31	74.00	21.69
4804	22.83	AV	V	30.59	4.67	27.26	30.83	54.00	23.17
7206	32.12	PK	V	34.09	6.50	26.30	46.41	74.00	27.59
7206	18.03	AV	V	34.09	6.50	26.30	32.32	54.00	21.68
9608	32.29	PK	V	35.96	8.75	26.22	50.78	74.00	23.22
9608	18.27	AV	V	35.96	8.75	26.22	36.76	54.00	17.24
7370	33.05	PK	V	33.52	6.07	27.25	45.39	74.00	28.61
7370	19.72	AV	V	33.52	6.07	27.25	32.06	54.00	21.94
109.98	40.24	QP	V	12.78	1.53	21.44	33.11	43.50	10.39
Middle Channel: 2441(MHz)									
2441	57.23	PK	H	25.75	3.99	0.00	86.97	N/A	N/A
2441	48.26	AV	H	25.75	3.99	0.00	78.00	N/A	N/A
2441	58.21	PK	V	25.75	3.99	0.00	87.95	N/A	N/A
2441	48.82	AV	V	25.75	3.99	0.00	78.56	N/A	N/A
4882	44.35	PK	V	30.79	4.75	27.26	52.63	74.00	21.37
4882	22.83	AV	V	30.79	4.75	27.26	31.11	54.00	22.89
7323	32.28	PK	V	34.38	6.72	26.53	46.85	74.00	27.15
7323	18.14	AV	V	34.38	6.72	26.53	32.71	54.00	21.29
9764	32.31	PK	V	36.33	8.58	25.62	51.60	74.00	22.40
9764	18.35	AV	V	36.33	8.58	25.62	37.64	54.00	16.36
4564	32.35	PK	V	29.97	5.27	27.14	40.45	74.00	33.55
4564	19.24	AV	V	29.97	5.27	27.14	27.34	54.00	26.66
7370	32.86	PK	V	33.52	6.07	27.25	45.20	74.00	28.80
7370	19.68	AV	V	33.52	6.07	27.25	32.02	54.00	21.98
109.76	40.17	QP	V	12.79	1.53	21.44	33.05	43.50	10.45
High Channel: 2480(MHz)									
2480	57.26	PK	H	25.85	3.82	0.00	86.93	N/A	N/A
2480	28.31	AV	H	25.85	3.82	0.00	57.98	N/A	N/A
2480	58.33	PK	V	25.85	3.82	0.00	88.00	N/A	N/A
2480	28.89	AV	V	25.85	3.82	0.00	58.56	N/A	N/A
2483.5	28.45	PK	V	25.86	3.80	0.00	58.11	74.00	15.89
2483.5	13.86	AV	V	25.86	3.80	0.00	43.52	54.00	10.48
4960	44.45	PK	V	31.00	4.70	27.27	52.88	74.00	21.12
4960	22.86	AV	V	31.00	4.70	27.27	31.29	54.00	22.71
7440	32.35	PK	V	34.66	6.95	26.56	47.40	74.00	26.60
7440	18.11	AV	V	34.66	6.95	26.56	33.16	54.00	20.84
9920	32.36	PK	V	36.71	8.41	25.50	51.98	74.00	22.02
9920	18.37	AV	V	36.71	8.41	25.50	37.99	54.00	16.01
7370	33.16	PK	V	33.52	6.07	27.25	45.50	74.00	28.50
7370	19.74	AV	V	33.52	6.07	27.25	32.08	54.00	21.92
108.94	39.05	QP	V	12.82	1.52	21.44	31.95	43.50	11.55


EDR Mode (8-DPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBµV/m)	Margin (dB)
Low Channel: 2402(MHz)									
2402	57.08	PK	H	25.65	3.90	0.00	86.63	N/A	N/A
2402	48.25	AV	H	25.65	3.90	0.00	77.80	N/A	N/A
2402	57.71	PK	V	25.65	3.90	0.00	87.26	N/A	N/A
2402	48.71	AV	V	25.65	3.90	0.00	78.26	N/A	N/A
2390	27.84	PK	V	25.61	3.84	0.00	57.29	74.00	16.71
2390	13.98	AV	V	25.61	3.84	0.00	43.43	54.00	10.57
4804	44.13	PK	V	30.59	4.67	27.26	52.13	74.00	21.87
4804	22.63	AV	V	30.59	4.67	27.26	30.63	54.00	23.37
7206	31.84	PK	V	34.09	6.50	26.30	46.13	74.00	27.87
7206	17.93	AV	V	34.09	6.50	26.30	32.22	54.00	21.78
9608	32.05	PK	V	35.96	8.75	26.22	50.54	74.00	23.46
9608	17.98	AV	V	35.96	8.75	26.22	36.47	54.00	17.53
7370	32.79	PK	V	33.52	6.07	27.25	45.13	74.00	28.87
7370	19.64	AV	V	33.52	6.07	27.25	31.98	54.00	22.02
109.98	39.01	QP	V	12.78	1.53	21.44	31.88	43.50	11.62
Middle Channel: 2441(MHz)									
2441	56.98	PK	H	25.75	3.99	0.00	86.72	N/A	N/A
2441	28.02	AV	H	25.75	3.99	0.00	57.76	N/A	N/A
2441	57.86	PK	V	25.75	3.99	0.00	87.60	N/A	N/A
2441	28.51	AV	V	25.75	3.99	0.00	58.25	N/A	N/A
4882	44.17	PK	V	30.79	4.75	27.26	52.45	74.00	21.55
4882	22.64	AV	V	30.79	4.75	27.26	30.92	54.00	23.08
7323	31.88	PK	V	34.38	6.72	26.53	46.45	74.00	27.55
7323	17.89	AV	V	34.38	6.72	26.53	32.46	54.00	21.54
9764	31.89	PK	V	36.33	8.58	25.62	51.18	74.00	22.82
9764	18.23	AV	V	36.33	8.58	25.62	37.52	54.00	16.48
4564	32.21	PK	V	29.97	5.27	27.14	40.31	74.00	33.69
4564	18.99	AV	V	29.97	5.27	27.14	27.09	54.00	26.91
7370	32.36	PK	V	33.52	6.07	27.25	44.70	74.00	29.30
7370	19.47	AV	V	33.52	6.07	27.25	31.81	54.00	22.19
109.76	40.15	QP	V	12.79	1.53	21.44	33.03	43.50	10.47
High Channel: 2480(MHz)									
2480	57.02	PK	H	25.85	3.82	0.00	86.69	N/A	N/A
2480	48.19	AV	H	25.85	3.82	0.00	77.86	N/A	N/A
2480	57.88	PK	V	25.85	3.82	0.00	87.55	N/A	N/A
2480	48.47	AV	V	25.85	3.82	0.00	78.14	N/A	N/A
2483.5	28.41	PK	V	25.86	3.80	0.00	58.07	74.00	15.93
2483.5	13.8	AV	V	25.86	3.80	0.00	43.46	54.00	10.54
4960	44.34	PK	V	31.00	4.70	27.27	52.77	74.00	21.23
4960	22.84	AV	V	31.00	4.70	27.27	31.27	54.00	22.73
7440	32.19	PK	V	34.66	6.95	26.56	47.24	74.00	26.76
7440	17.97	AV	V	34.66	6.95	26.56	33.02	54.00	20.98
9920	31.87	PK	V	36.71	8.41	25.50	51.49	74.00	22.51
9920	18.19	AV	V	36.71	8.41	25.50	37.81	54.00	16.19
7370	32.83	PK	V	33.52	6.07	27.25	45.17	74.00	28.83
7370	19.53	AV	V	33.52	6.07	27.25	31.87	54.00	22.13
108.94	39.52	QP	V	12.82	1.52	21.44	32.42	43.50	11.08

Conducted Spurious Emissions at Antenna Port


BDR Mode (GFSK):

Low Channel

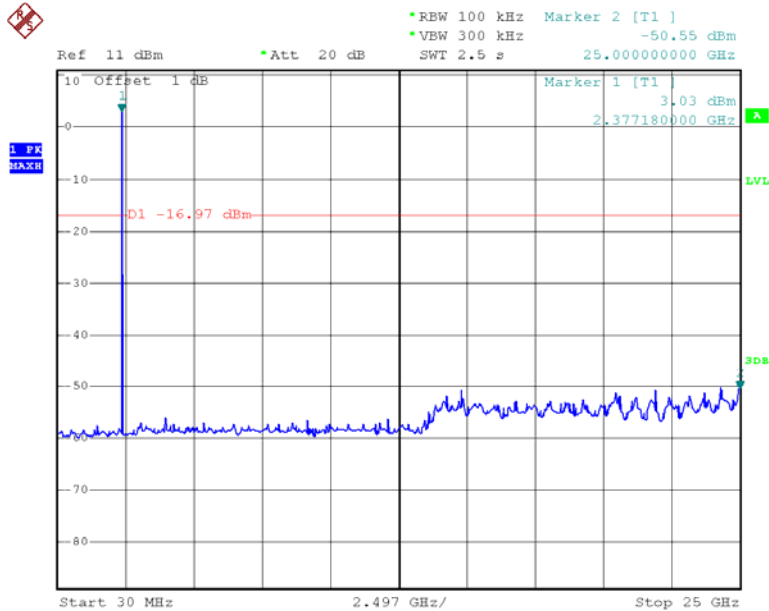


Date: 12.APR.2013 15:41:28

Middle Channel

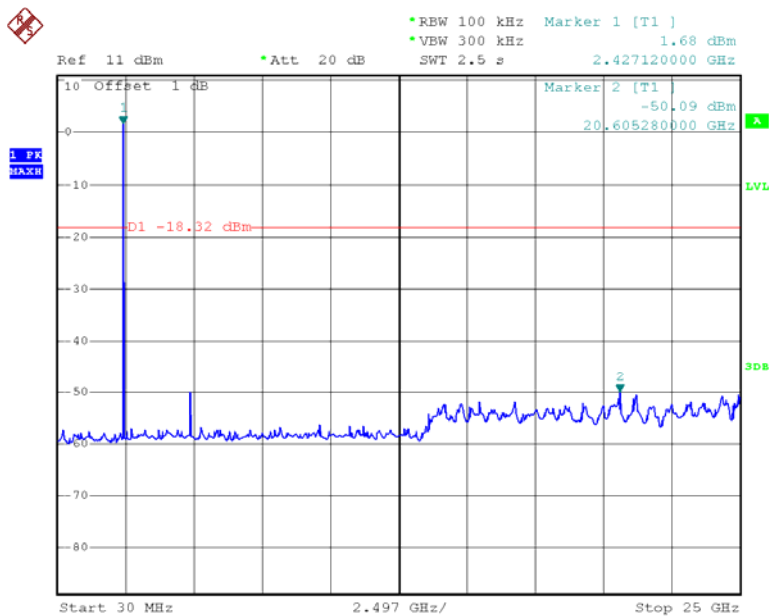

Date: 12.APR.2013 15:42:38


High Channel

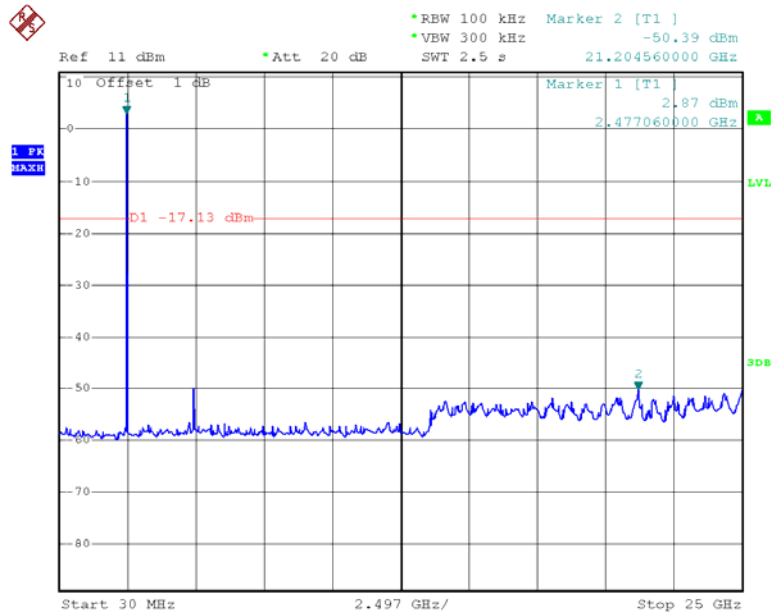

Date: 12.APR.2013 15:43:32


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

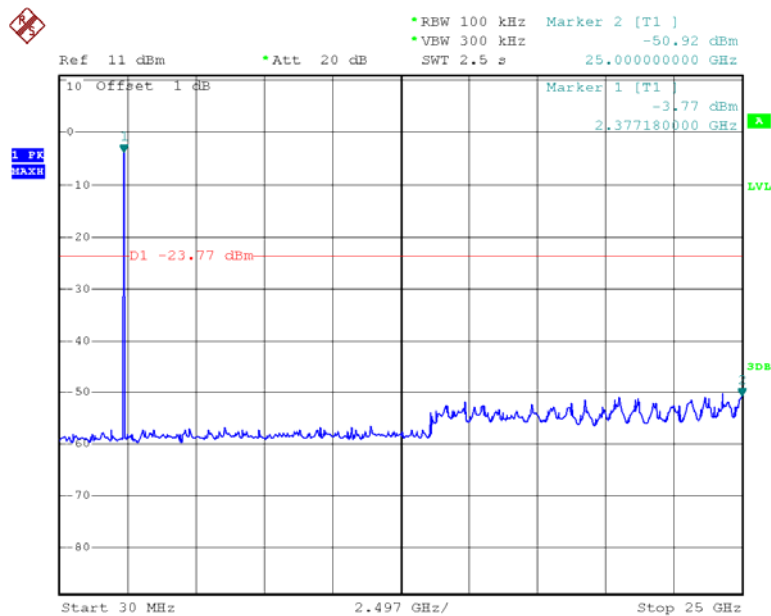


Date: 12.APR.2013 15:44:50

Middle Channel

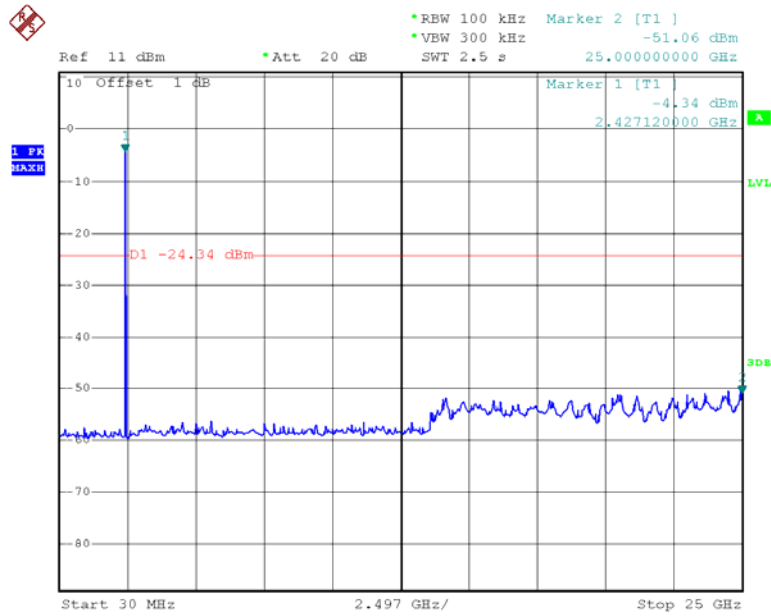

Date: 12.APR.2013 15:46:02


High Channel

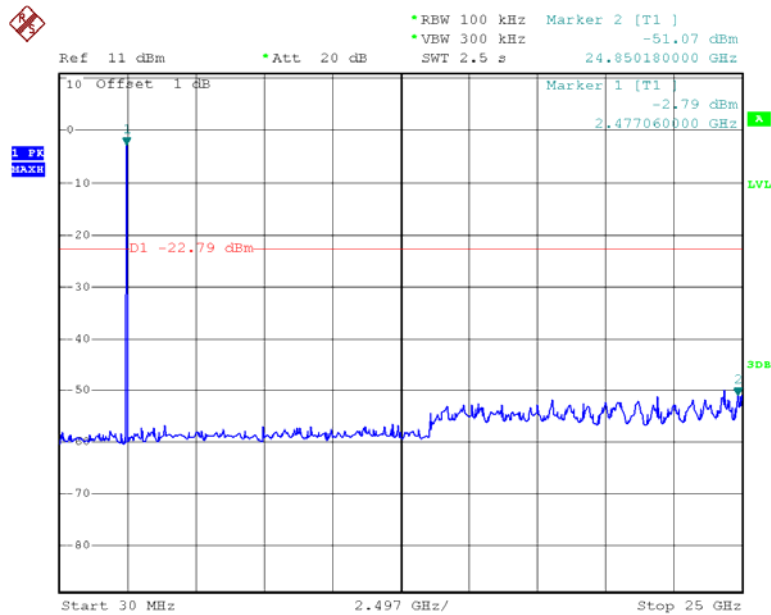

Date: 12.APR.2013 15:46:42


EDR Mode (8-DPSK):

Low Channel

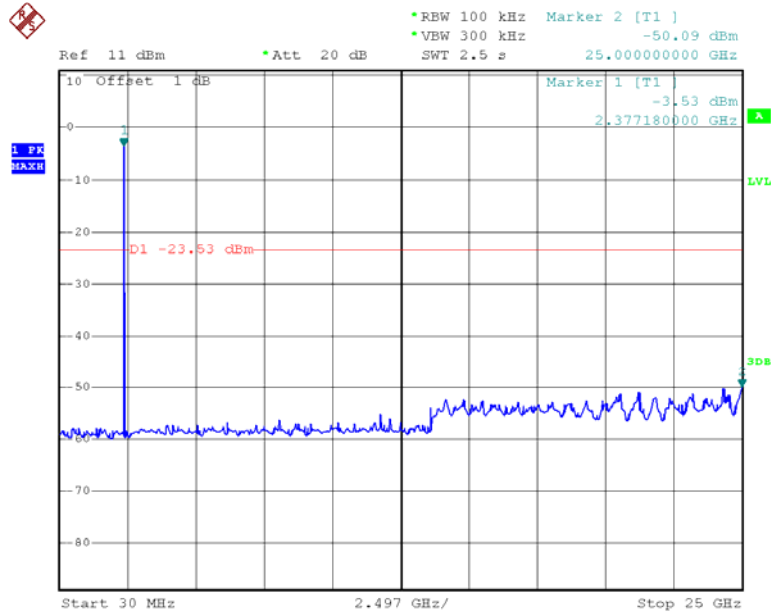


Date: 12.APR.2013 15:38:22

Middle Channel

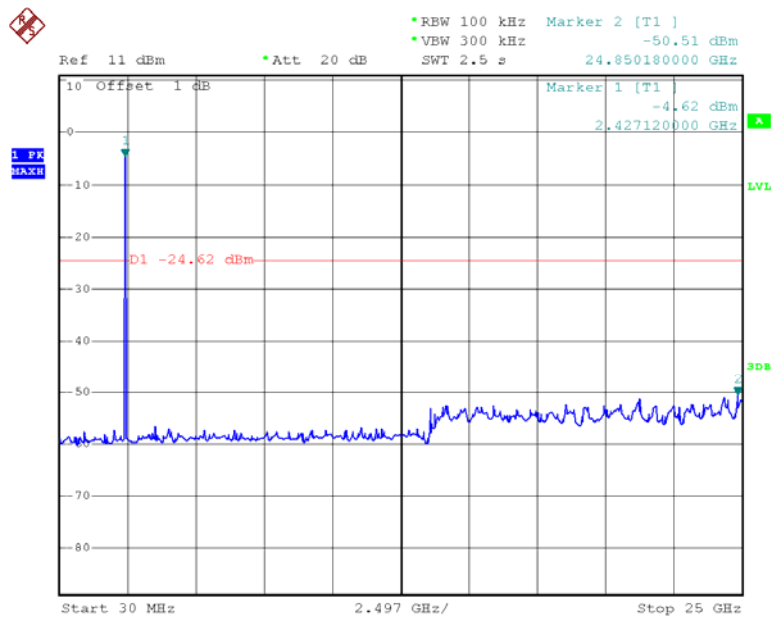

Date: 12.APR.2013 15:39:14

High Channel

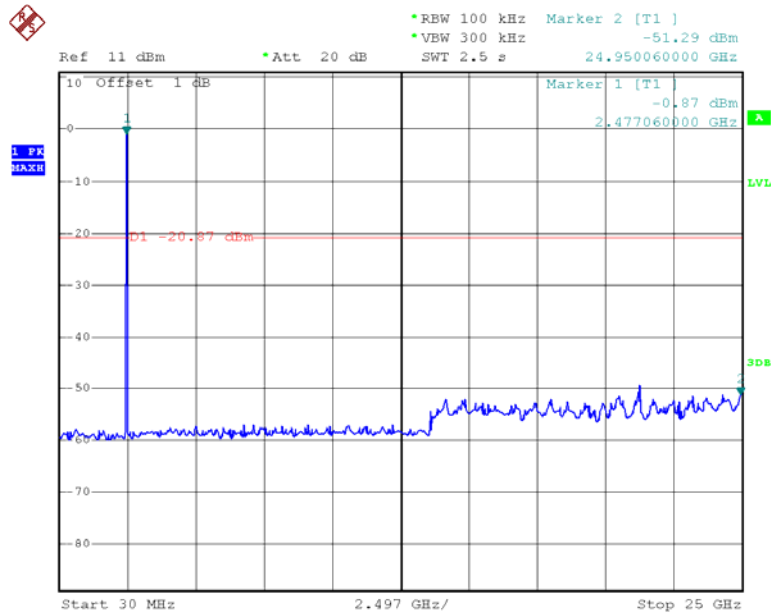

Date: 12.APR.2013 15:40:23

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	23.9 °C
Relative Humidity:	60 %
ATM Pressure:	101.3 kPa

* The testing was performed by Leon Chen on 2013-04-12.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR Mode (GFSK)	Low	2402	1.000	0.62	Pass
	Adjacent	2403			
	Middle	2441	1.000	0.62	Pass
	Adjacent	2442			
	High	2480	1.000	0.62	Pass
Adjacent	2479				
EDR Mode ($\pi/4$ -DQPSK):	Low	2402	1.000	0.82	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.82	Pass
	Adjacent	2442			
	High	2480	1.000	0.82	Pass
Adjacent	2479				
EDR Mode (8-DPSK):	Low	2402	1.004	0.81	Pass
	Adjacent	2403			
	Middle	2441	1.000	0.82	Pass
	Adjacent	2442			
	High	2480	1.000	0.81	Pass
Adjacent	2479				


BDR Mode (GFSK):

Low Channel

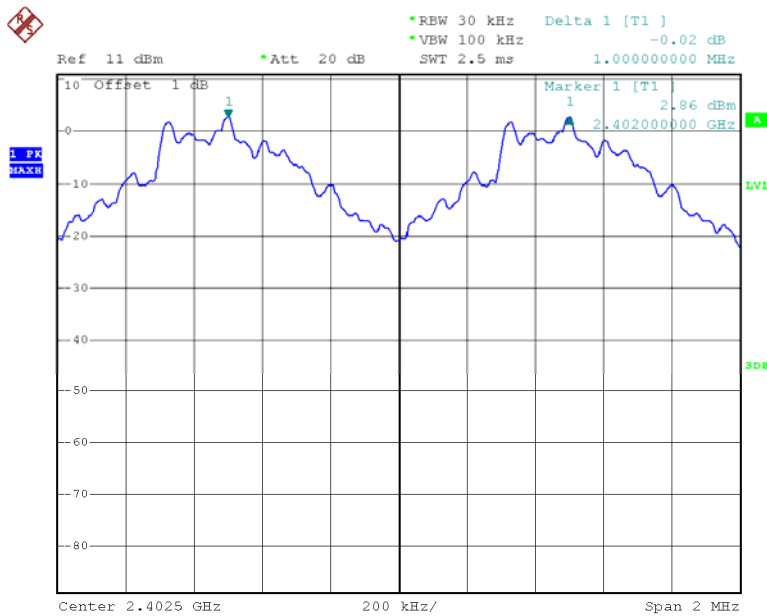


Date: 12.APR.2013 15:48:46

Middle Channel

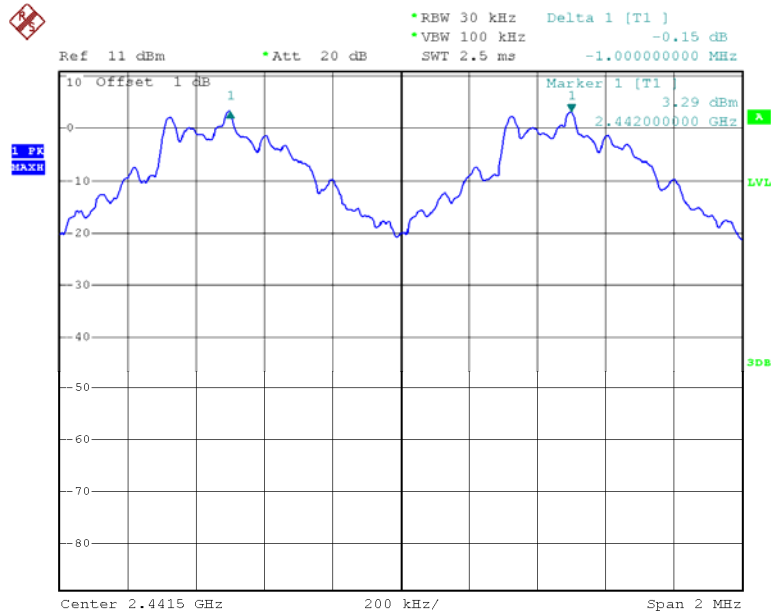

Date: 12.APR.2013 15:51:17


High Channel

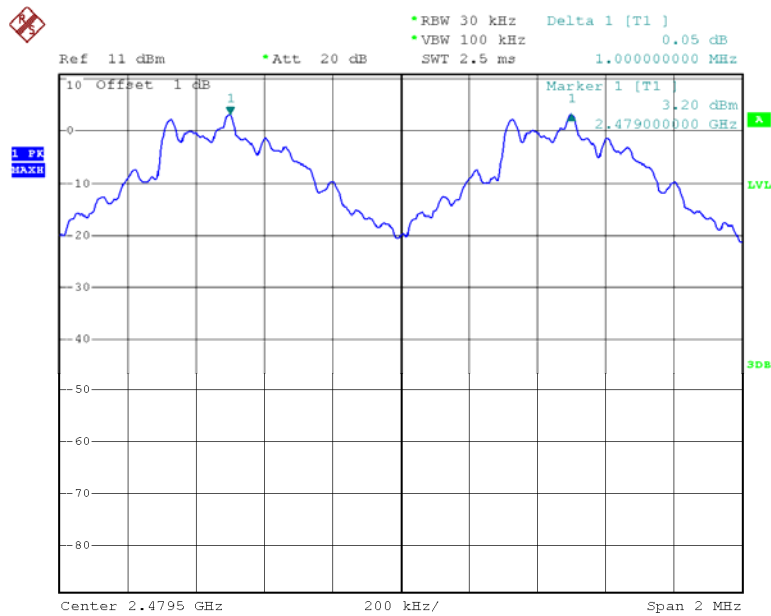

Date: 12.APR.2013 15:52:18


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

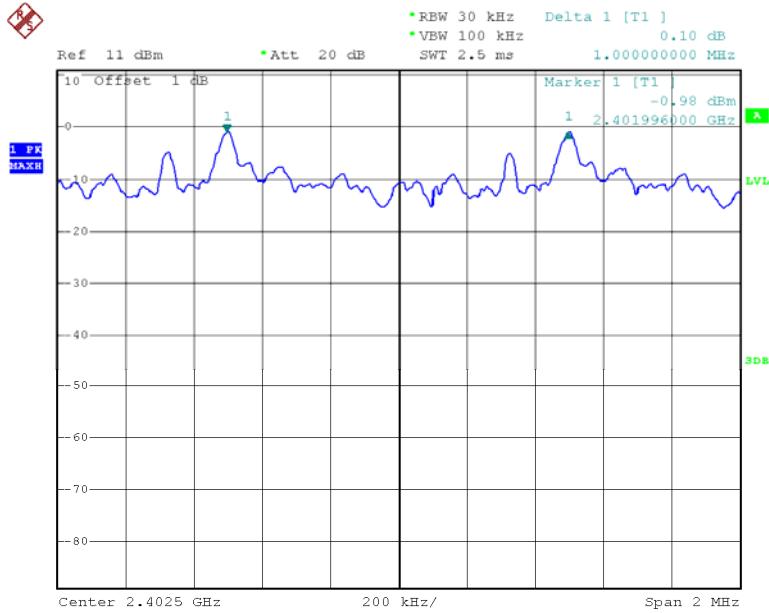


Date: 12.APR.2013 15:55:25

Middle Channel

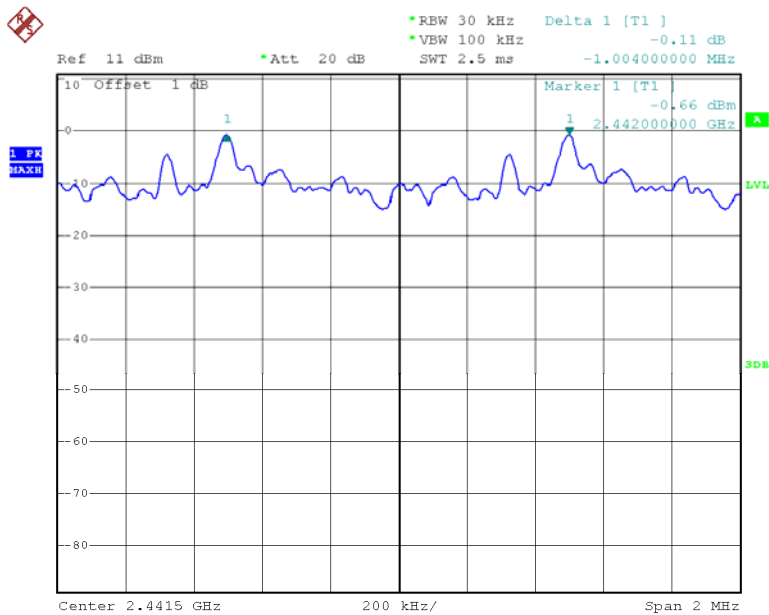

Date: 12.APR.2013 15:54:24


High Channel

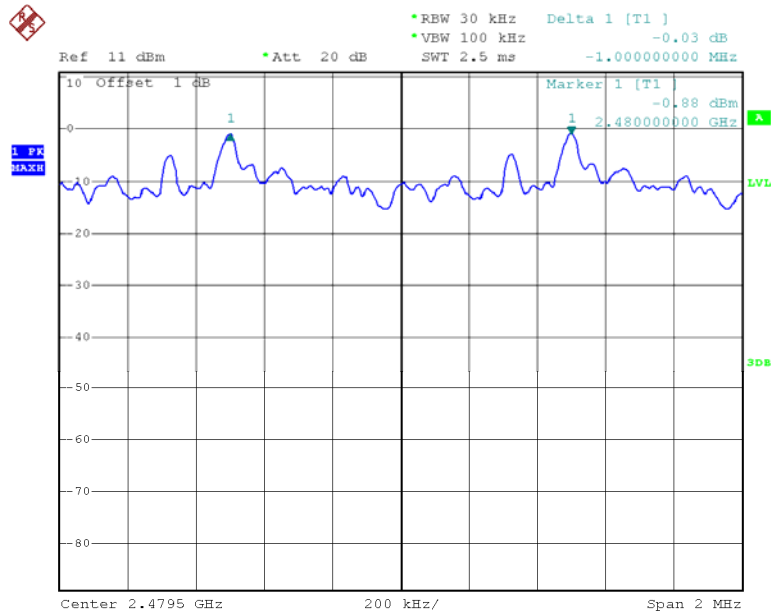

Date: 12.APR.2013 15:53:31


EDR Mode (8-DPSK):

Low Channel

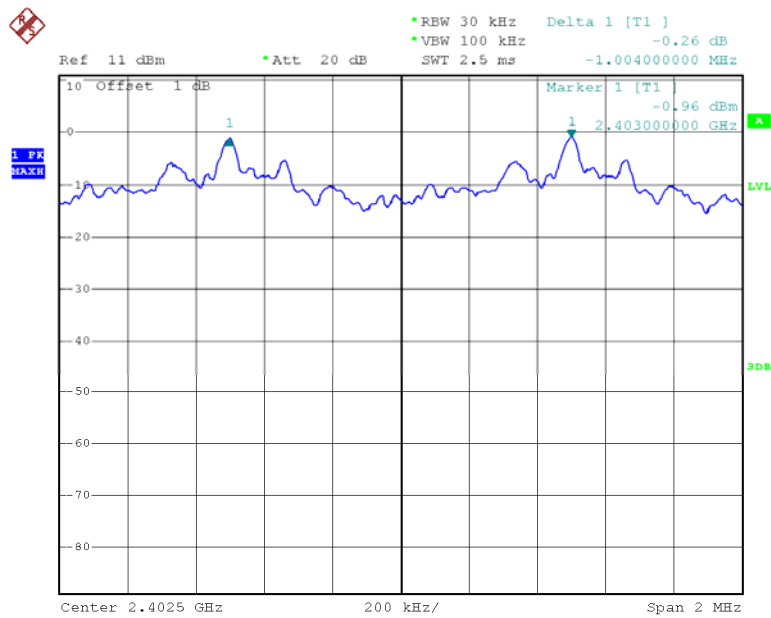


Date: 12.APR.2013 15:56:37

Middle Channel

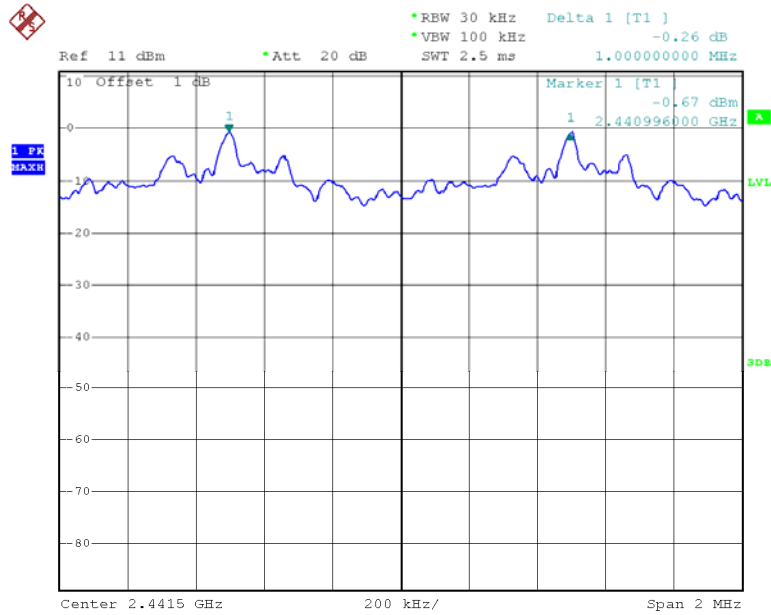

Date: 12.APR.2013 15:57:25

High Channel

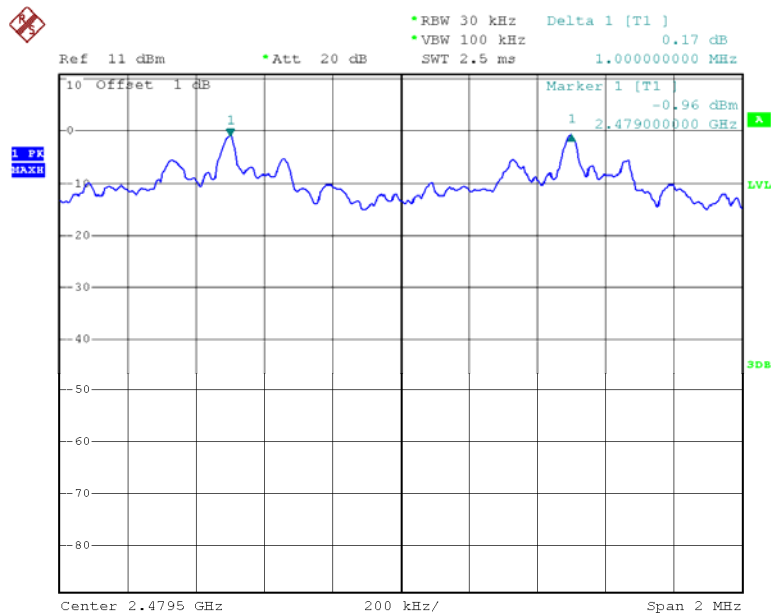

Date: 12.APR.2013 15:58:12

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23.9 °C
Relative Humidity:	60 %
ATM Pressure:	101.3 kPa

* The testing was performed by Leon Chen on 2013-04-12.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.928
	Middle	2441	0.924
	High	2480	0.924
EDR Mode ($\pi/4$ -DQPSK):	Low	2402	1.232
	Middle	2441	1.228
	High	2480	1.228
EDR Mode (8-DPSK):	Low	2402	1.220
	Middle	2441	1.224
	High	2480	1.216


Please refer to the following plots.

BDR Mode (GFSK):

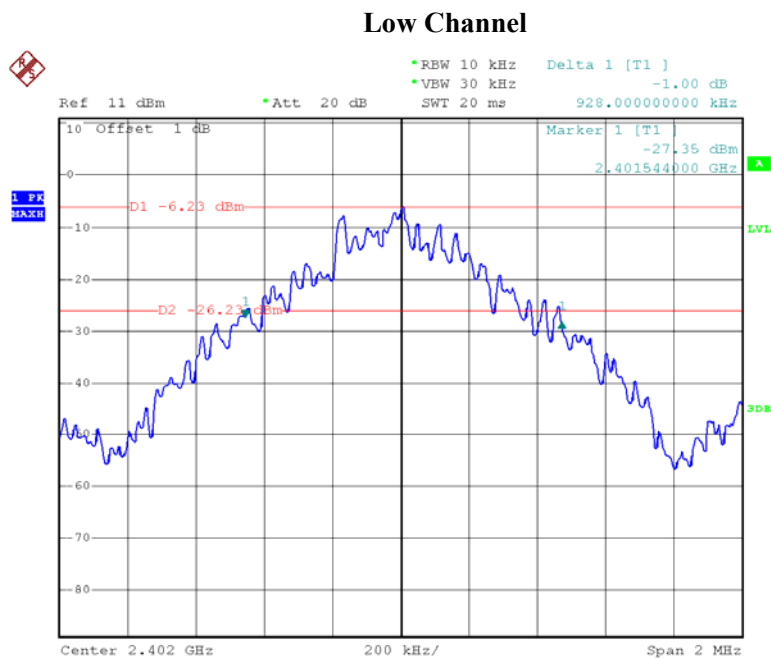


Date: 12.APR.2013 14:31:14

Middle Channel

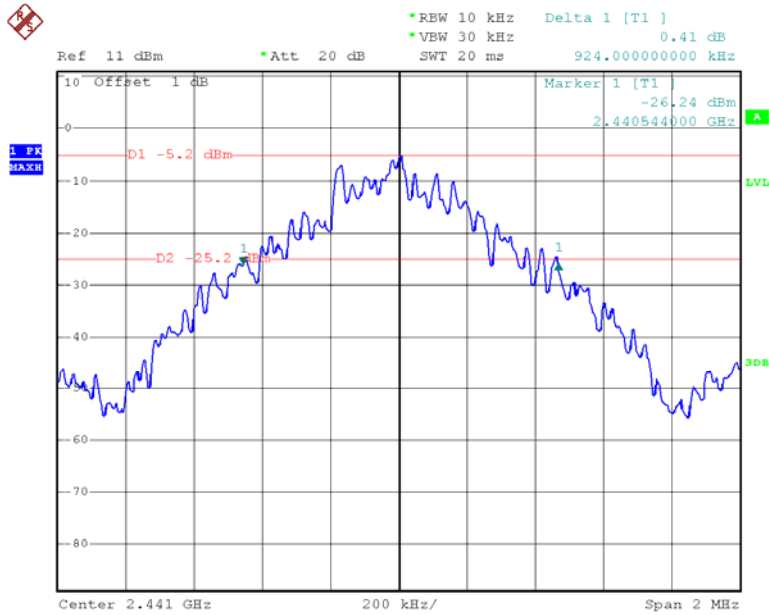

Date: 12.APR.2013 14:32:17


High Channel

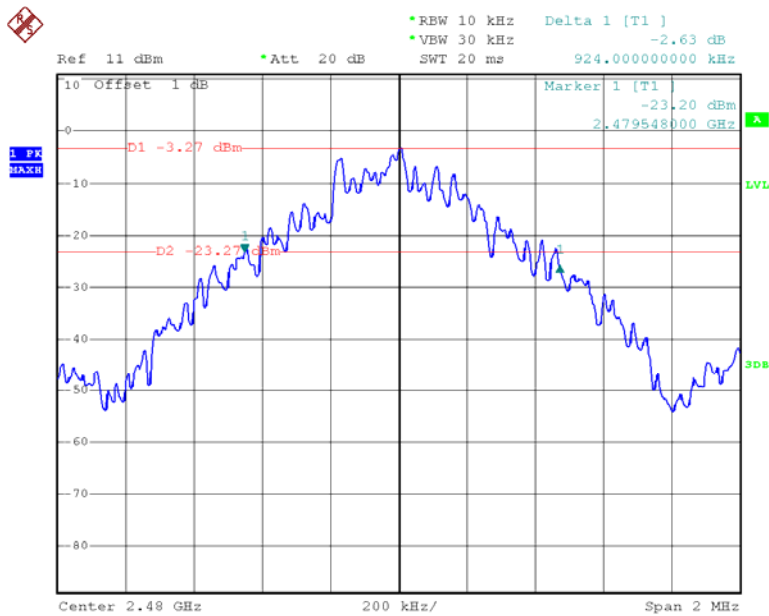

Date: 12.APR.2013 14:33:27


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

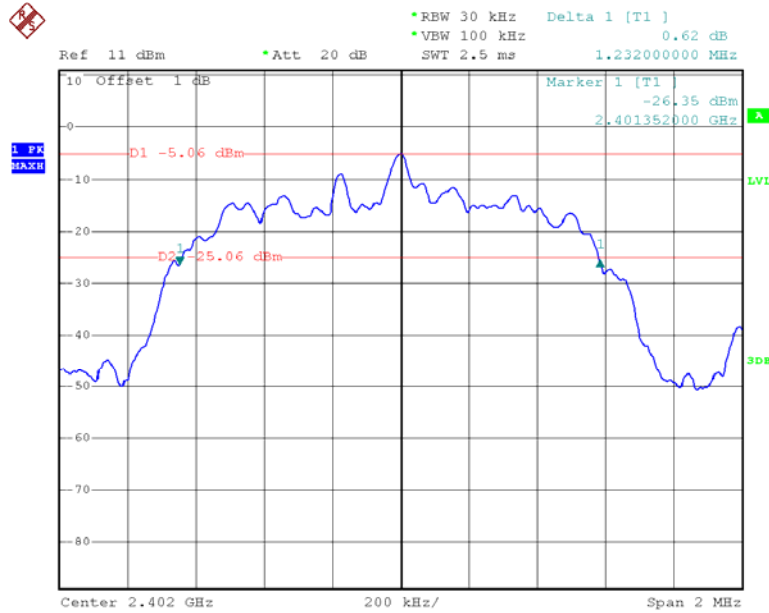


Date: 12.APR.2013 14:38:00

Middle Channel

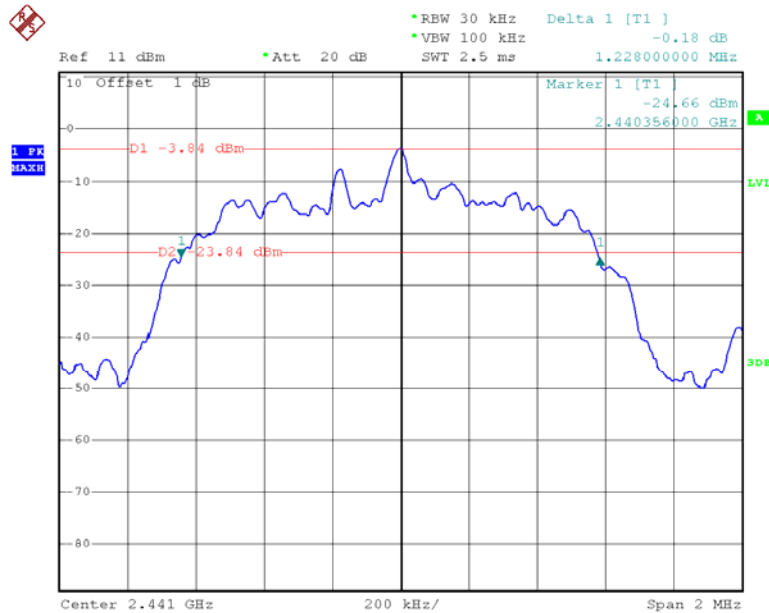

Date: 12.APR.2013 14:37:02


High Channel

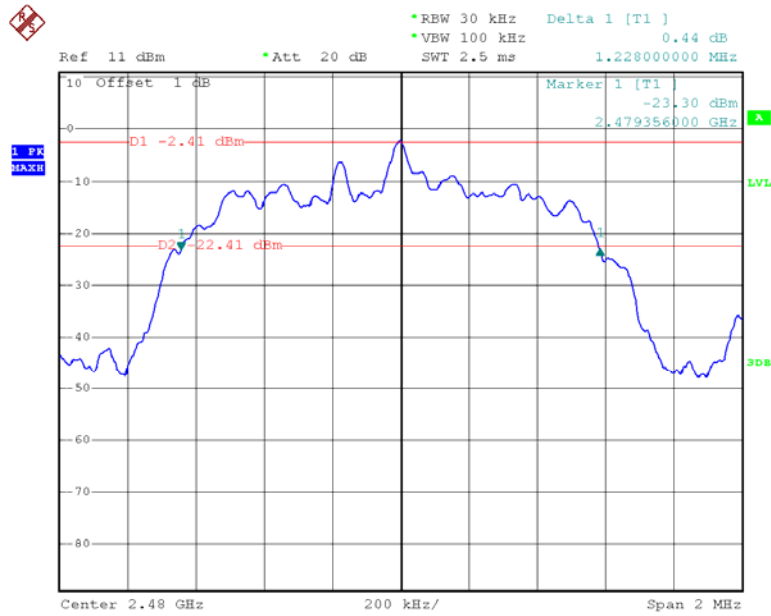

Date: 12.APR.2013 14:35:49


EDR Mode (8-DPSK):

Low Channel

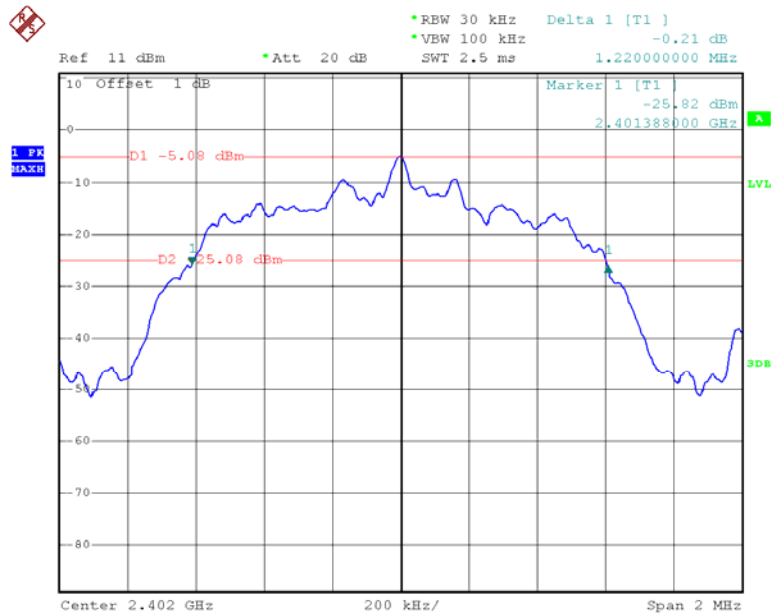


Date: 12.APR.2013 14:39:08

Middle Channel

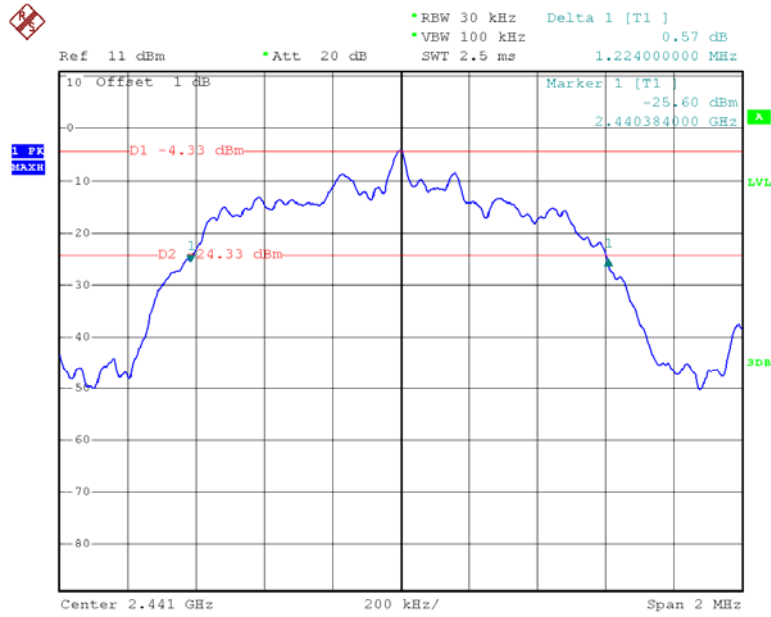

Date: 12.APR.2013 14:40:02

High Channel

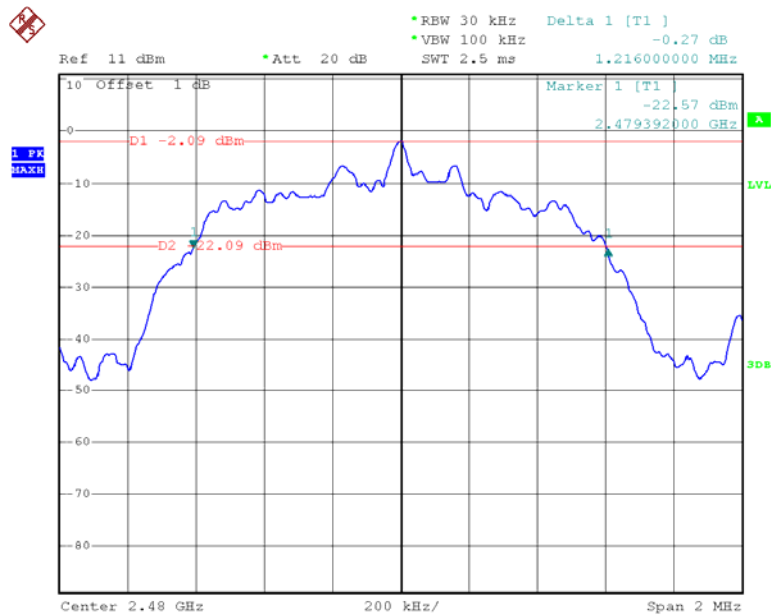

Date: 12.APR.2013 14:41:34

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23.9 °C
Relative Humidity:	60 %
ATM Pressure:	101.3 kPa

* The testing was performed by Leon Chen on 2013-04-12.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels

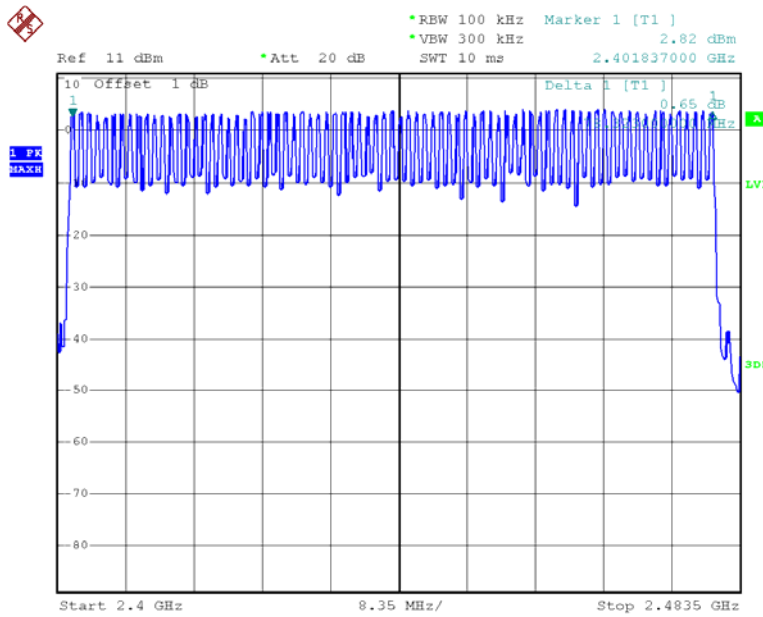


Date: 12.APR.2013 16:06:15

EDR Mode ($\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

Number of Hopping Channels

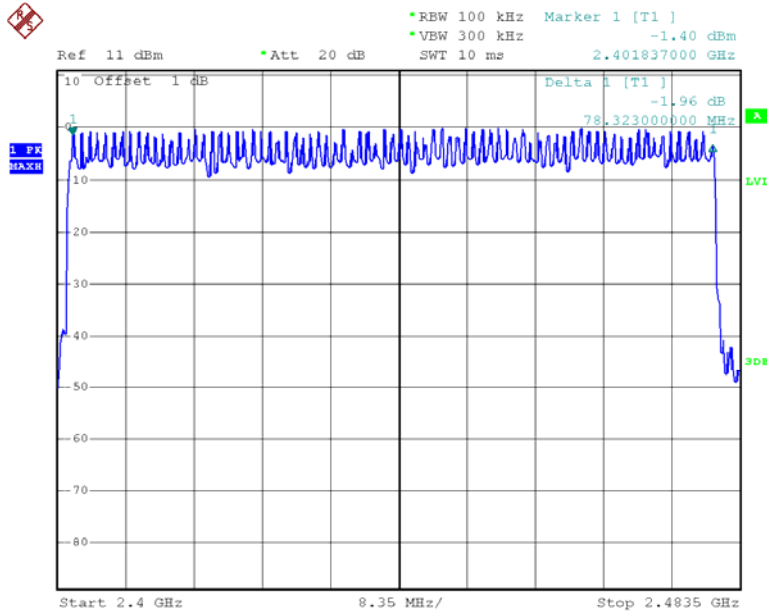


Date: 12.APR.2013 16:03:44

EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels

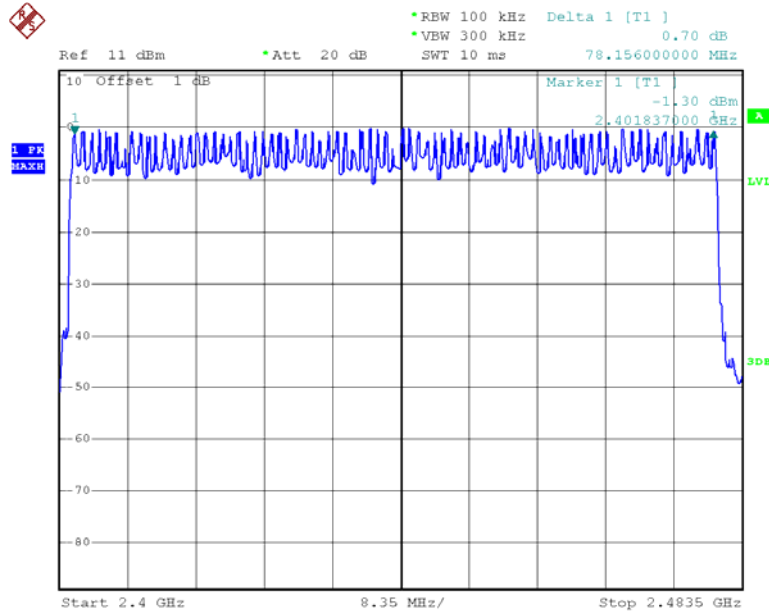

Date: 12.APR.2013 16:01:53

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 * channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s
Hop rate=1600/s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23.9°C
Relative Humidity:	60 %
ATM Pressure:	101.3kPa

* The testing was performed by Leon Chen on 2013-04-12.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.534	0.171	0.4	Pass
	Middle	0.531	0.170	0.4	Pass
	High	0.531	0.170	0.4	Pass
Note: Dwell time=Pulse time (ms) × (1.6/2/79) ×31.6 s					
DH3	Low	1.809	0.289	0.4	Pass
	Middle	1.809	0.289	0.4	Pass
	High	1.809	0.289	0.4	Pass
Note: Dwell time=Pulse time (ms) × (1.6/4/79) ×31.6 s					
DH5	Low	3.049	0.325	0.4	Pass
	Middle	3.049	0.325	0.4	Pass
	High	3.049	0.325	0.4	Pass
Note: Dwell time=Pulse time (ms) × (1.6/6/79) ×31.6 s					

DH1: Low Channel

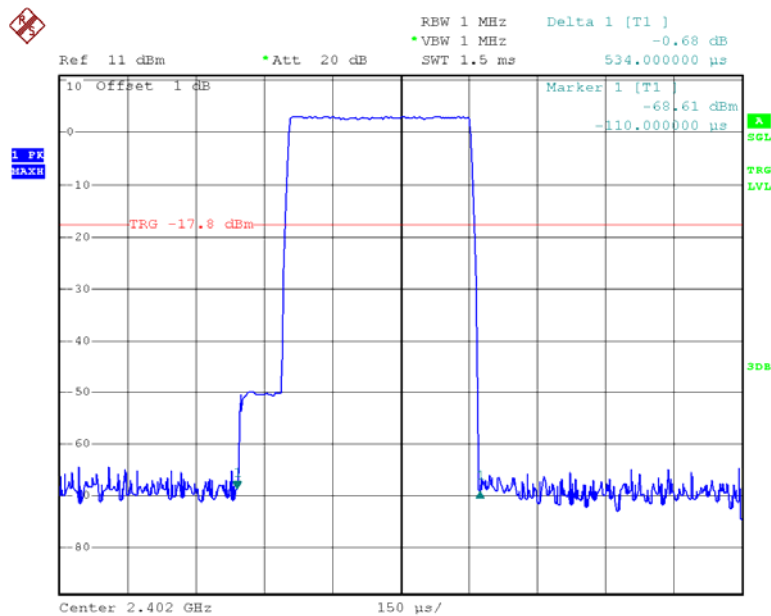


Date: 12.APR.2013 16:07:48

DH1: Middle Channel

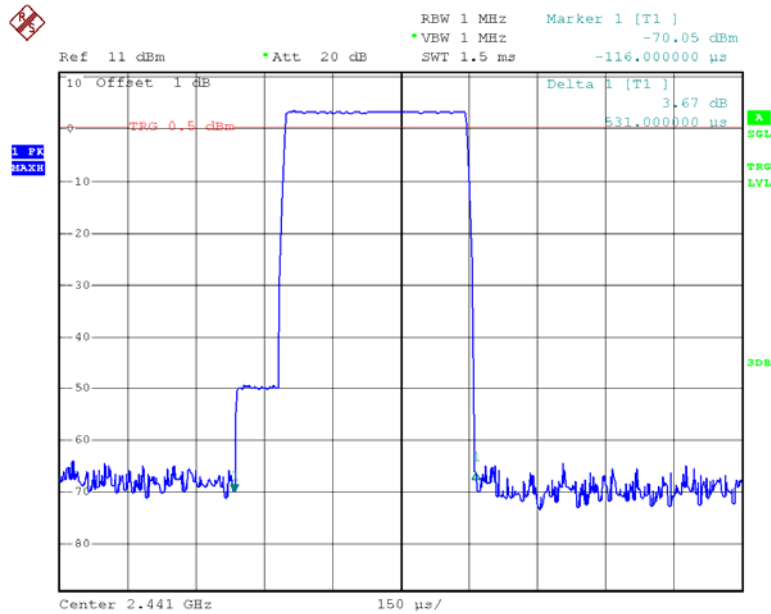


Date: 12.APR.2013 16:09:02

DH1: High Channel

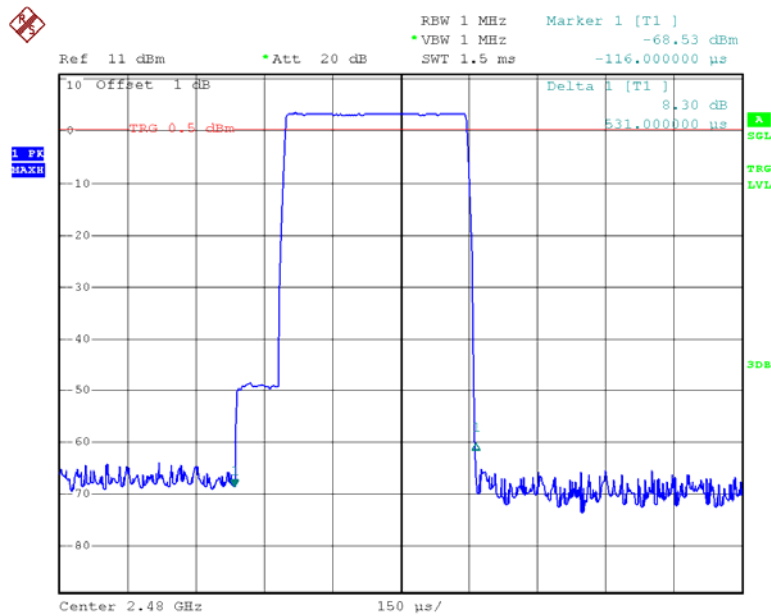


Date: 12.APR.2013 16:09:23

DH3: Low Channel

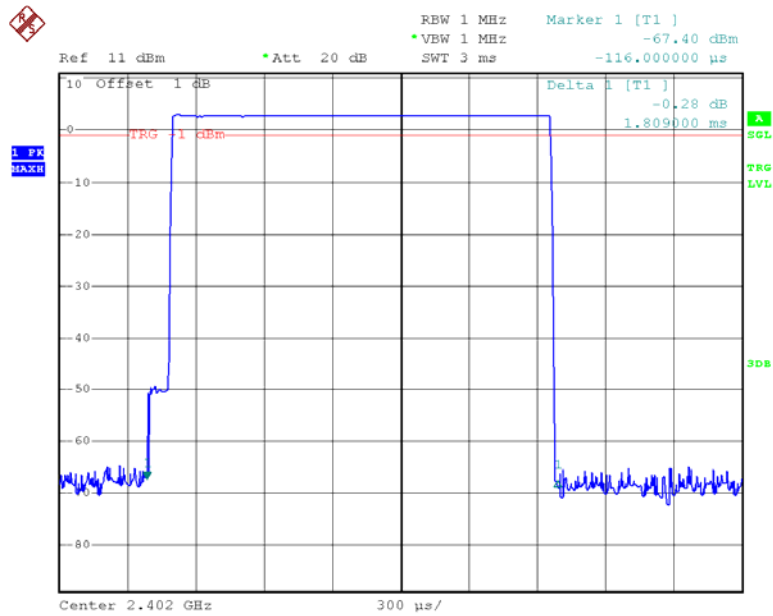


Date: 12.APR.2013 16:15:58

DH3: Middle Channel

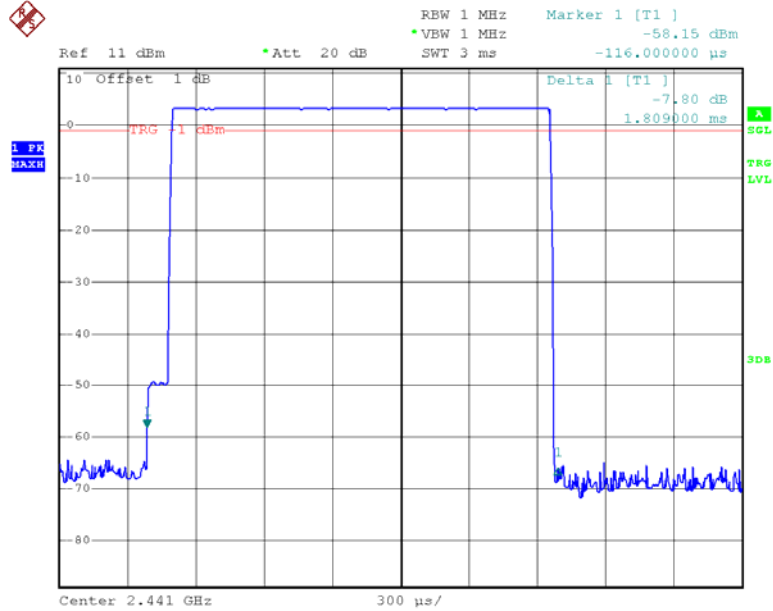


Date: 12.APR.2013 16:15:34

DH3: High Channel

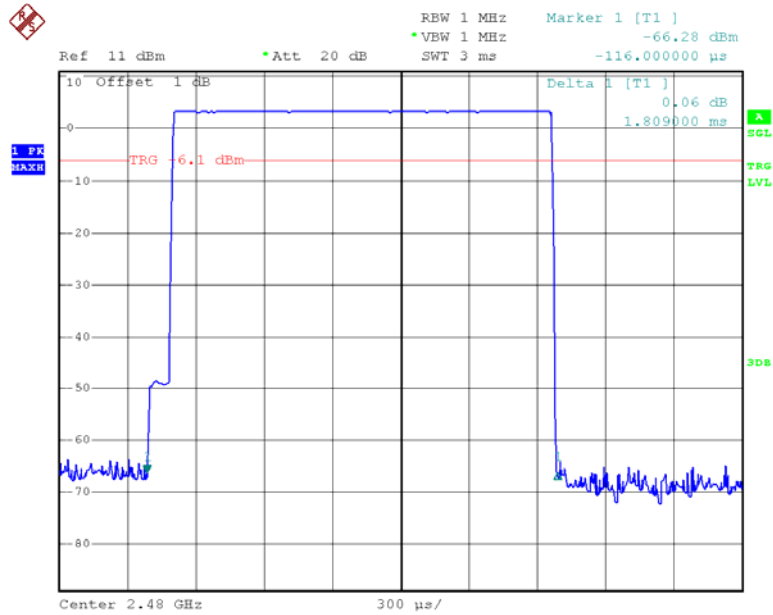


Date: 12.APR.2013 16:15:03

DH5: Low Channel

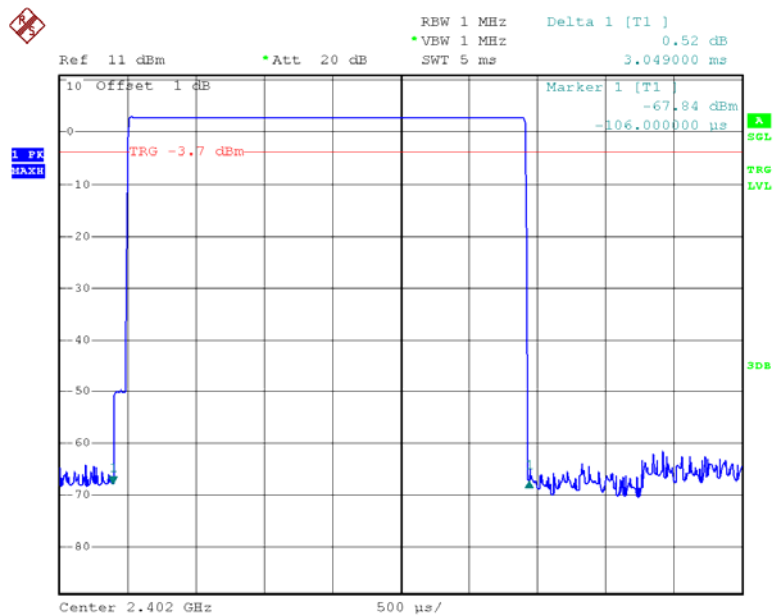


Date: 12.APR.2013 16:20:13

DH5: Middle Channel

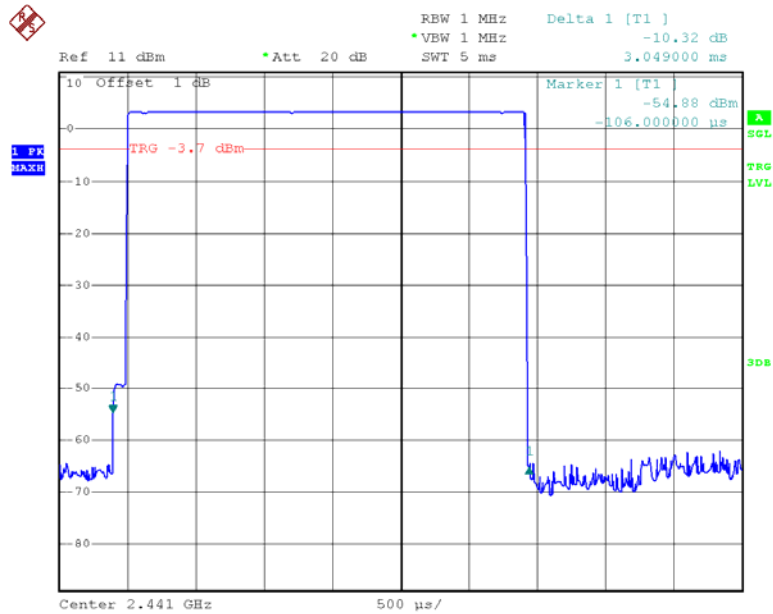

Date: 12.APR.2013 16:20:32

DH5: High Channel

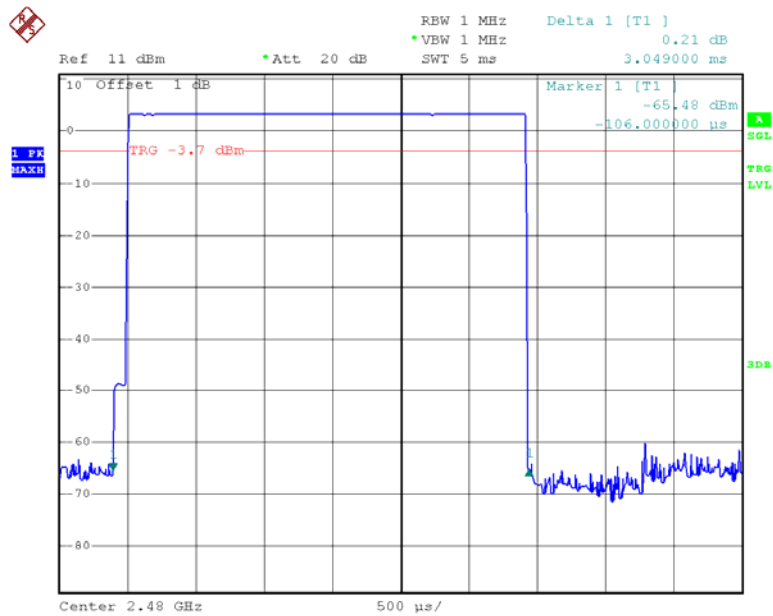


Date: 12.APR.2013 16:20:40

EDR Mode ($\pi/4$ -DQPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.543	0.174	0.4	Pass
	Middle	0.543	0.174	0.4	Pass
	High	0.543	0.174	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1.6/2/79) \times 31.6 s				
DH3	Low	1.809	0.289	0.4	Pass
	Middle	1.809	0.289	0.4	Pass
	High	1.809	0.289	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1.6/4/79) \times 31.6 s				
DH5	Low	3.059	0.326	0.4	Pass
	Middle	3.059	0.326	0.4	Pass
	High	3.059	0.326	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1.6/6/79) \times 31.6 s				

DH1: Low Channel

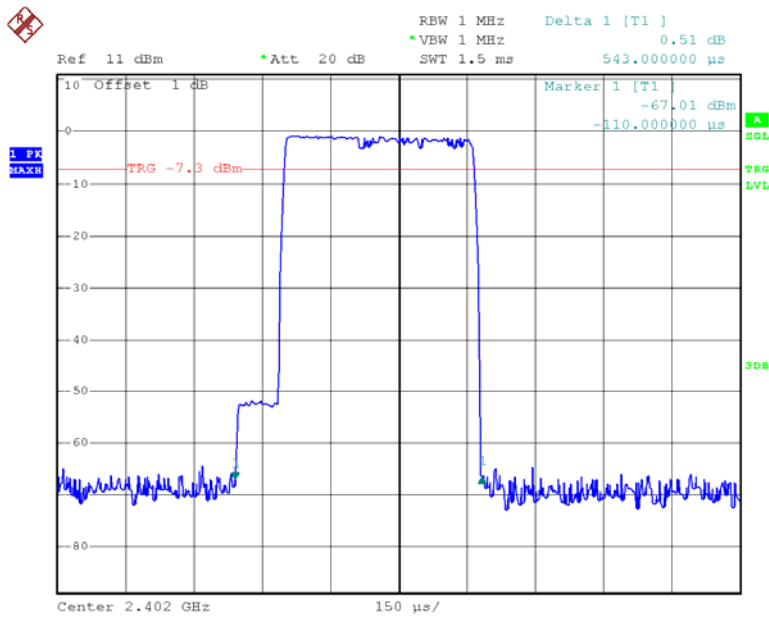


Date: 12.APR.2013 16:11:45

DH1: Middle Channel

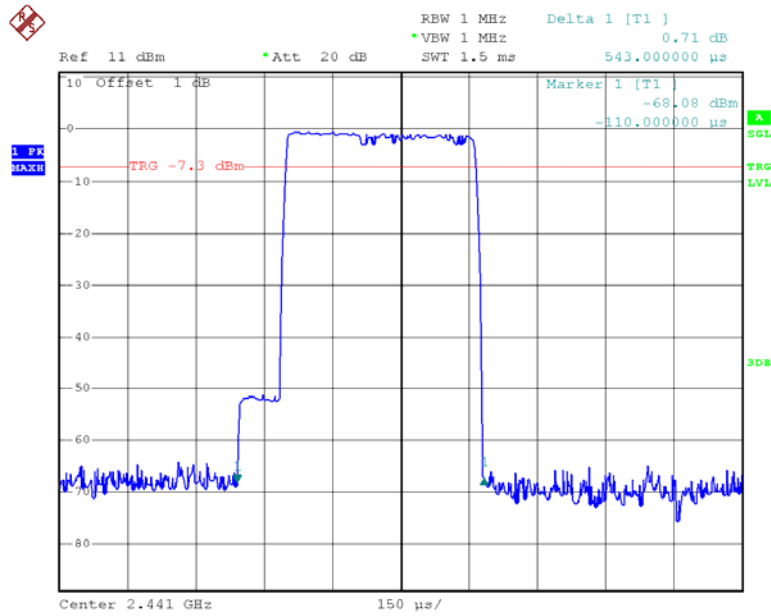


Date: 12.APR.2013 16:10:48

DH1: High Channel

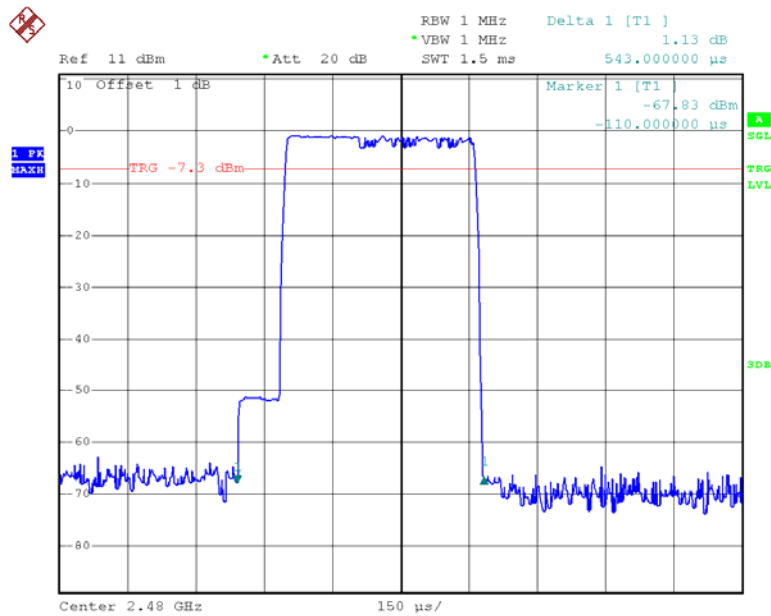


Date: 12.APR.2013 16:10:13

DH3: Low Channel

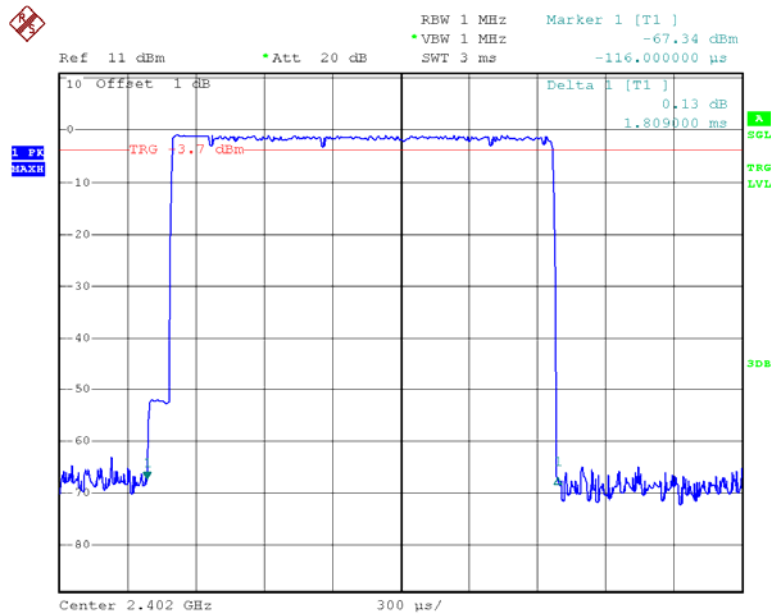


Date: 12.APR.2013 16:17:01

DH3: Middle Channel

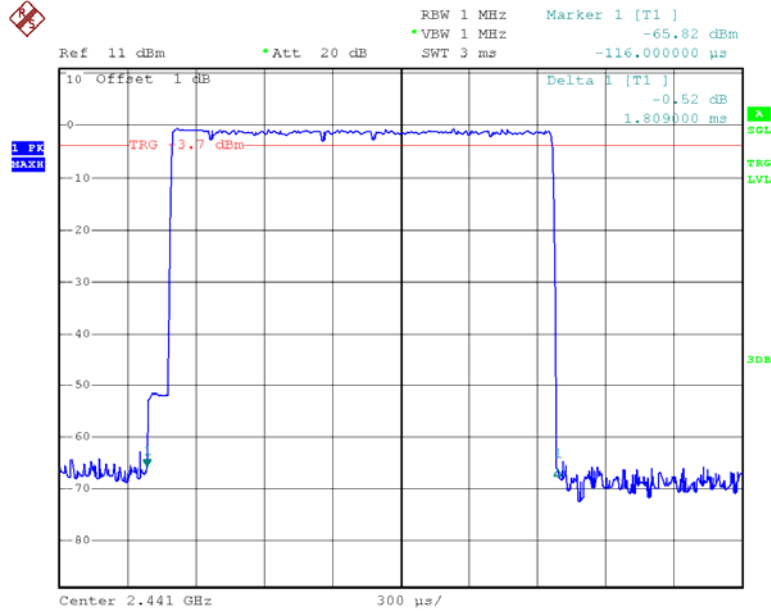


Date: 12.APR.2013 16:17:29

DH3: High Channel

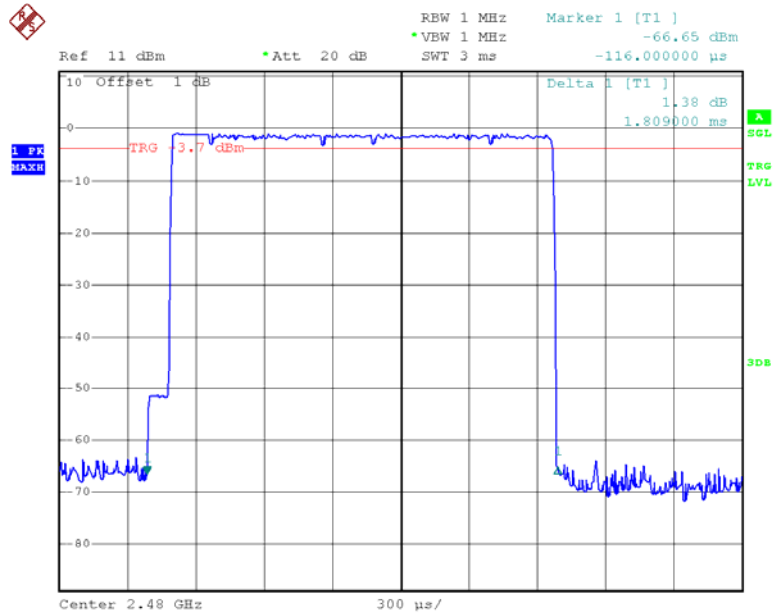


Date: 12.APR.2013 16:17:50

DH5: Low Channel

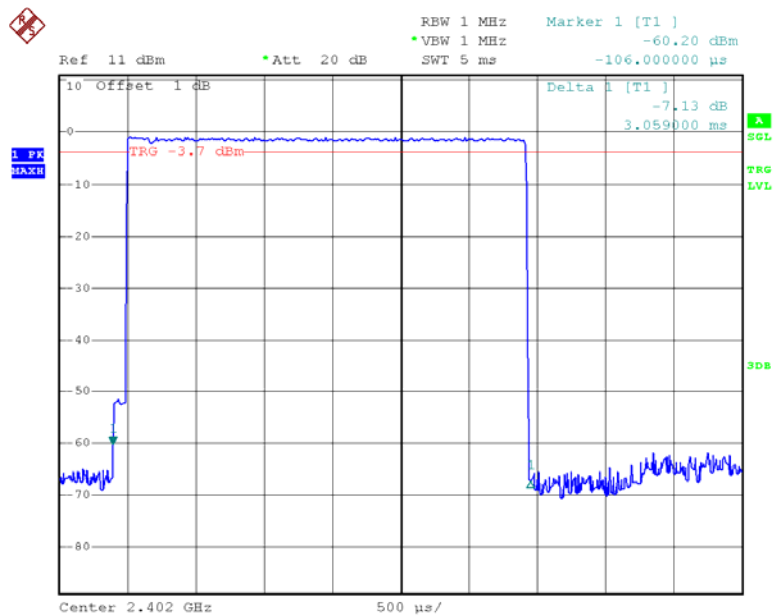


Date: 12.APR.2013 16:22:14

DH5: Middle Channel

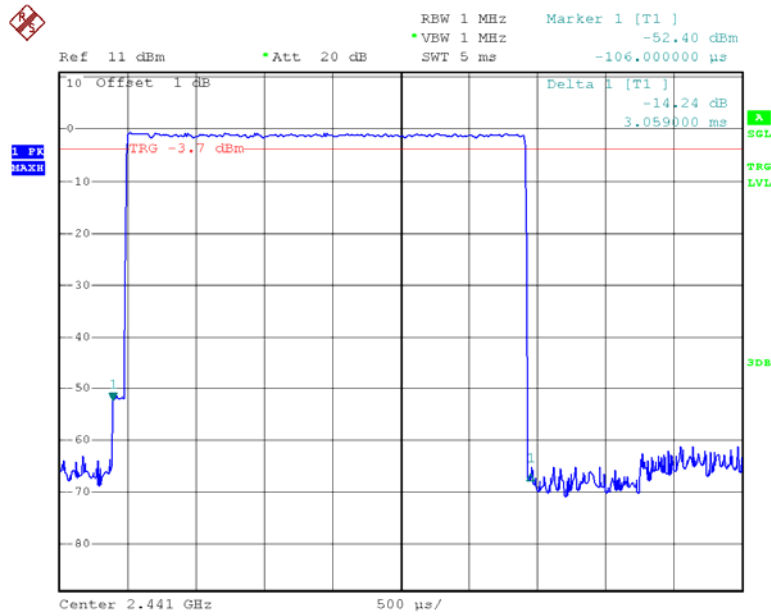

Date: 12.APR.2013 16:21:58

DH5: High Channel

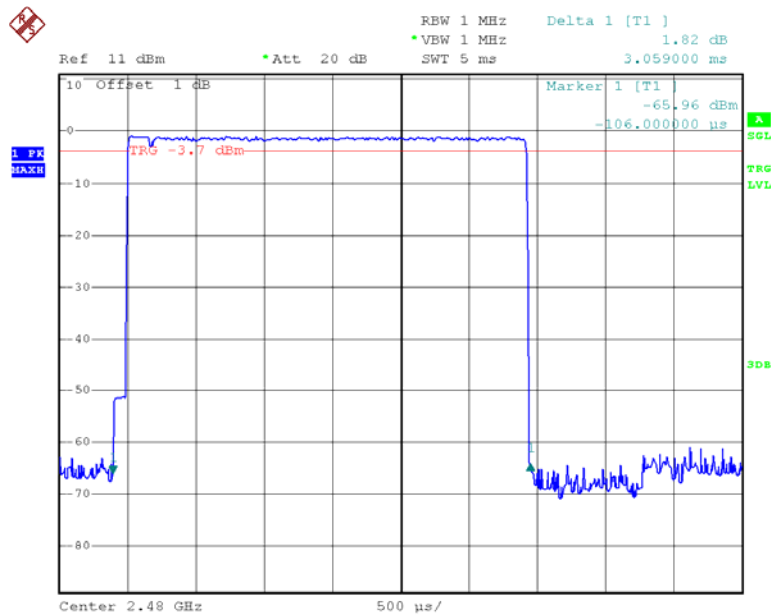


Date: 12.APR.2013 16:21:37

EDR Mode (8-DPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.543	0.174	0.4	Pass
	Middle	0.543	0.174	0.4	Pass
	High	0.543	0.174	0.4	Pass
	Note: Dwell time=Pulse time (ms) × (1.6/2/79) ×31.6 s				
DH3	Low	1.809	0.289	0.4	Pass
	Middle	1.809	0.289	0.4	Pass
	High	1.809	0.289	0.4	Pass
	Note: Dwell time=Pulse time (ms) × (1.6/4/79) ×31.6 s				
DH5	Low	3.059	0.326	0.4	Pass
	Middle	3.059	0.326	0.4	Pass
	High	3.059	0.326	0.4	Pass
	Note: Dwell time=Pulse time (ms) × (1.6/6/79) ×31.6 s				

DH1: Low Channel

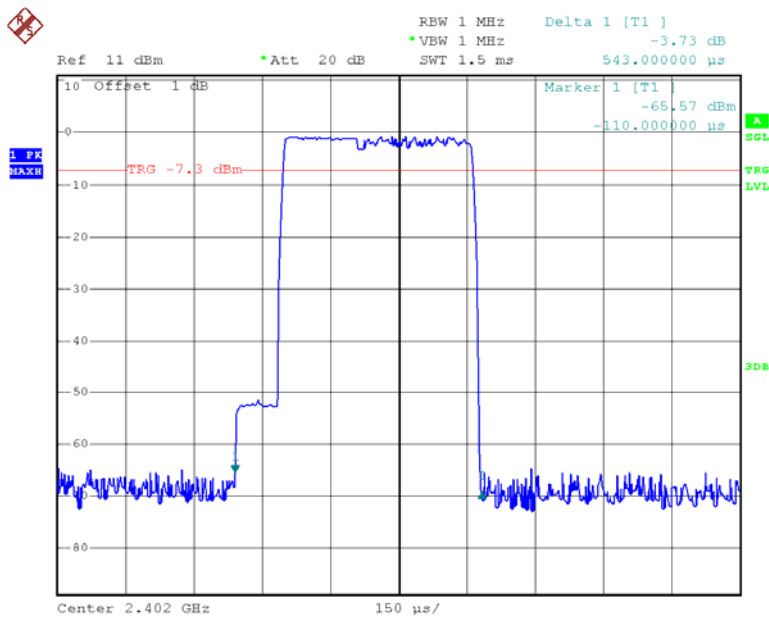


Date: 12.APR.2013 16:12:11

DH1: Middle Channel

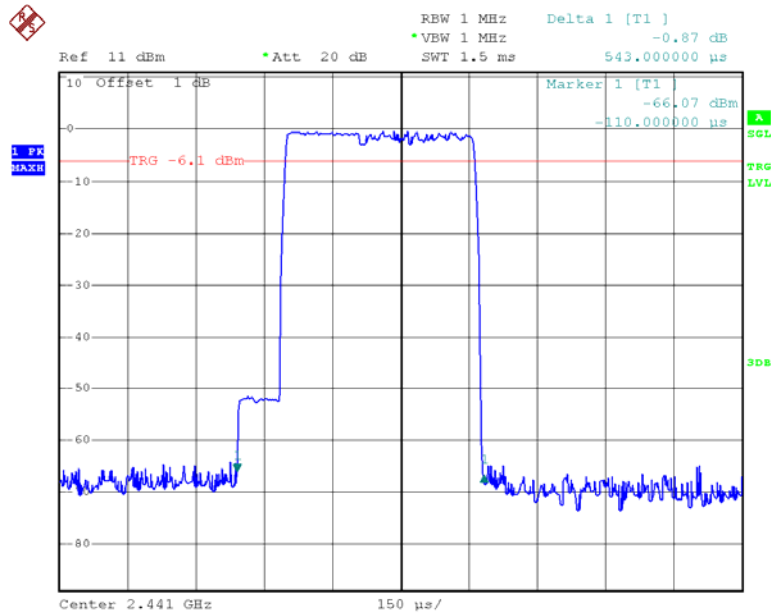


Date: 12.APR.2013 16:13:02

DH1: High Channel

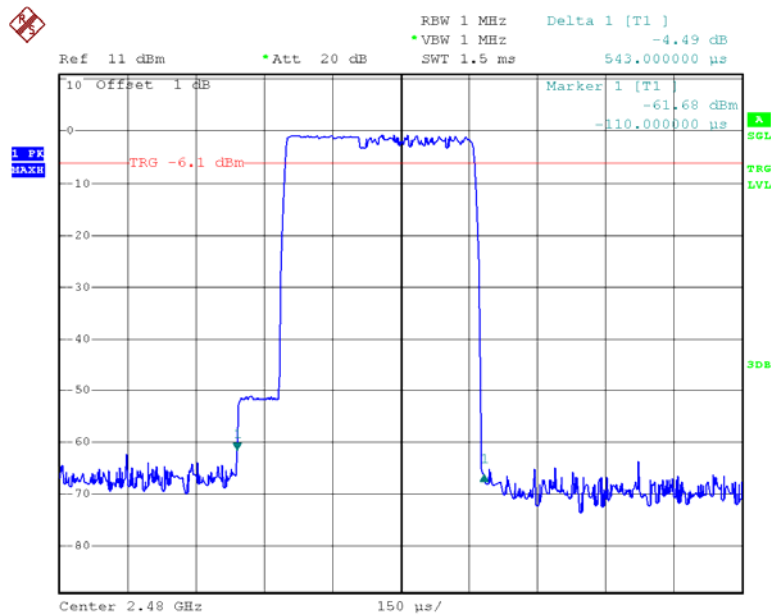


Date: 12.APR.2013 16:13:30

DH3: Low Channel

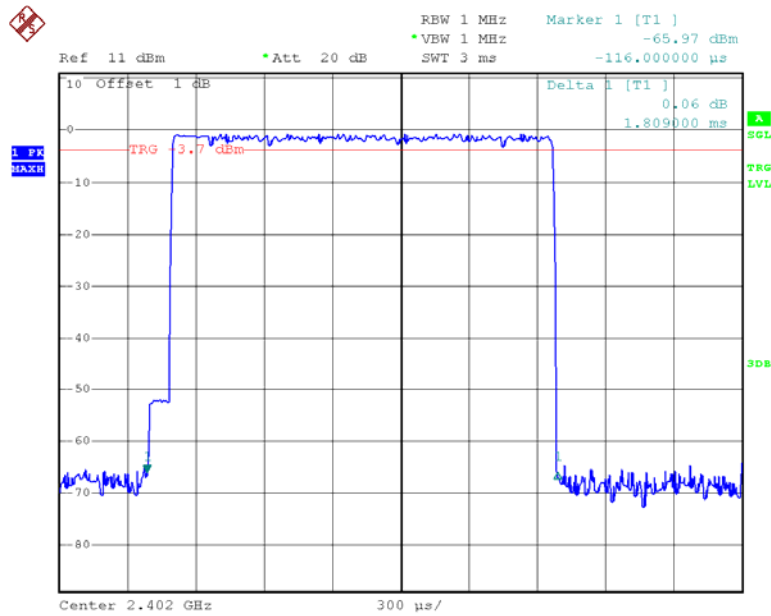


Date: 12.APR.2013 16:19:17

DH3: Middle Channel

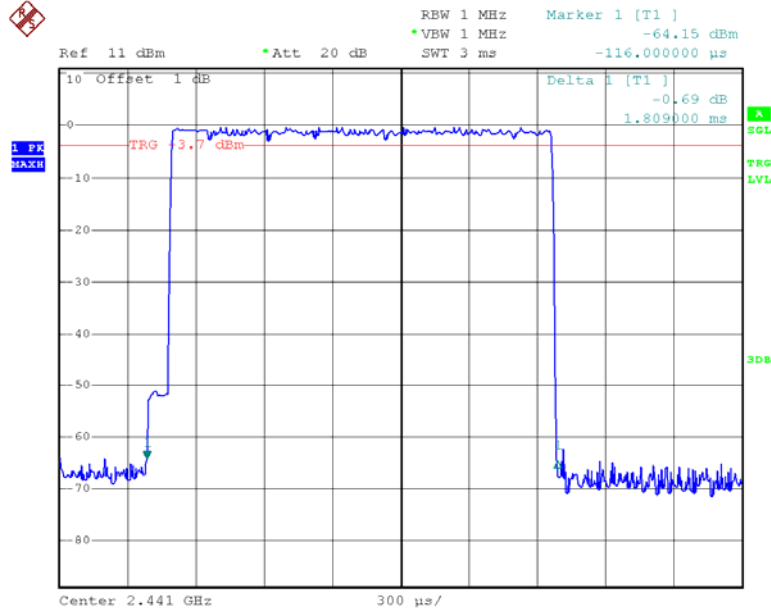


Date: 12.APR.2013 16:18:59

DH3: High Channel

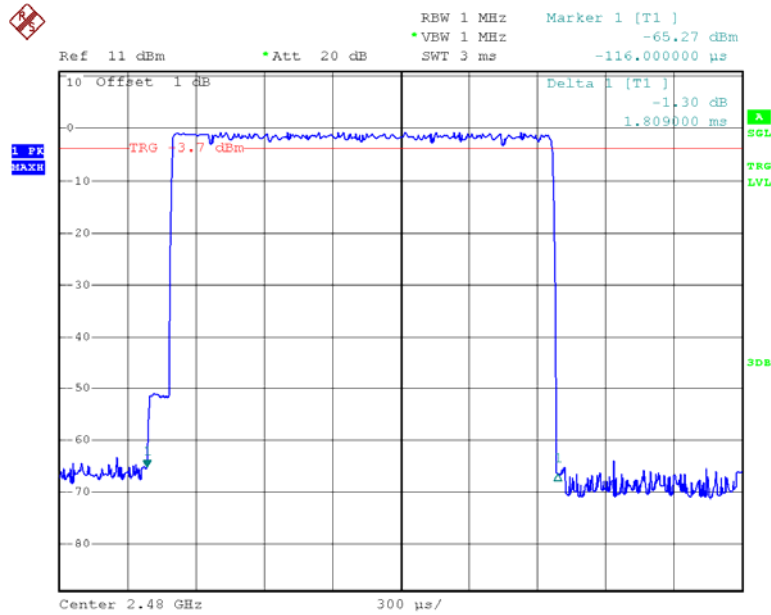


Date: 12.APR.2013 16:18:27

DH5: Low Channel

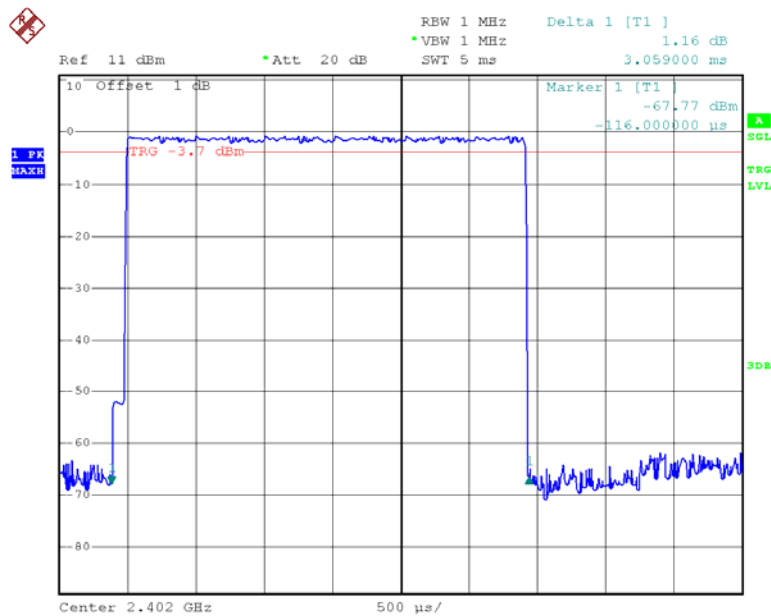


Date: 12.APR.2013 16:22:54

DH5: Middle Channel

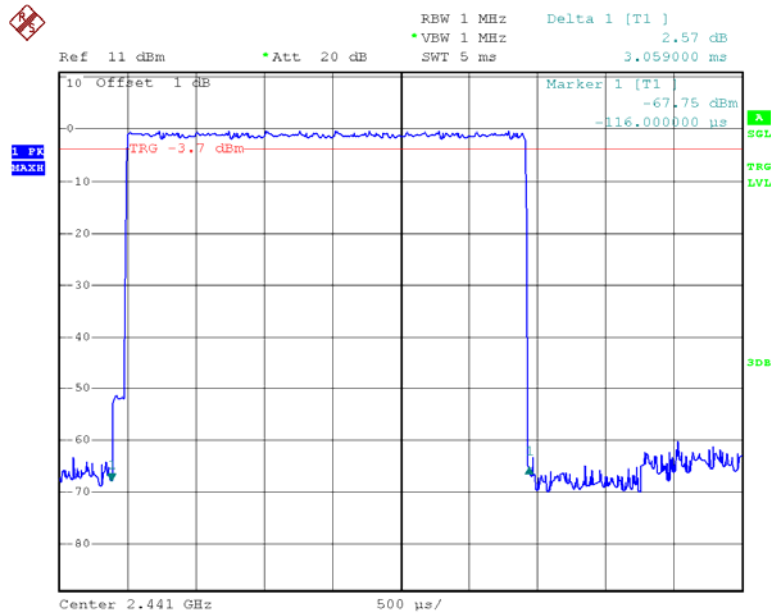

Date: 12.APR.2013 16:23:25

DH5: High Channel

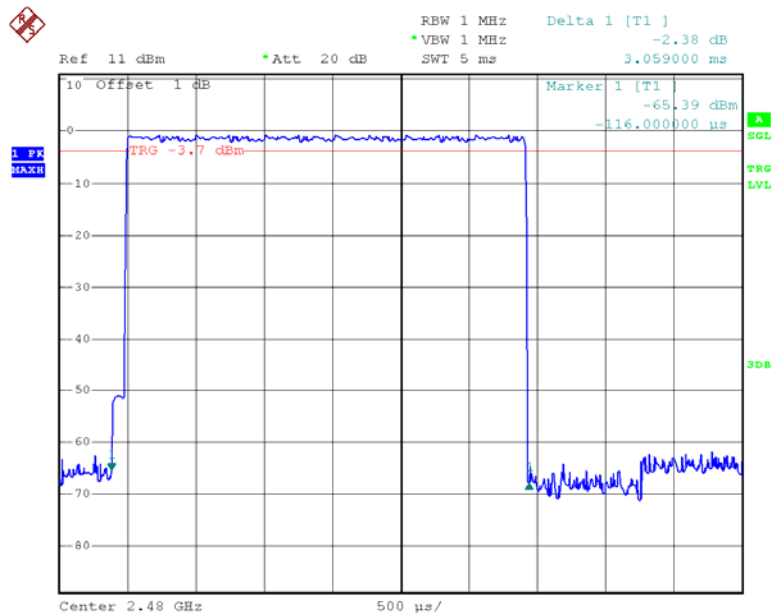

Date: 12.APR.2013 16:23:43

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23.9°C
Relative Humidity:	60 %
ATM Pressure:	101.3kPa

* The testing was performed by Leon Chen on 2013-04-12.

Test Result: Compliance.


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	Low	2402	3.03	30
	Middle	2441	3.46	30
	High	2480	3.48	30
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	-0.17	30
	Middle	2441	0.07	30
	High	2480	-0.17	30
EDR Mode (8-DPSK)	Low	2402	0.10	30
	Middle	2441	0.35	30
	High	2480	0.13	30

Note: The data above was tested in conducted mode.


BDR Mode (GFSK):

Output Power, Low

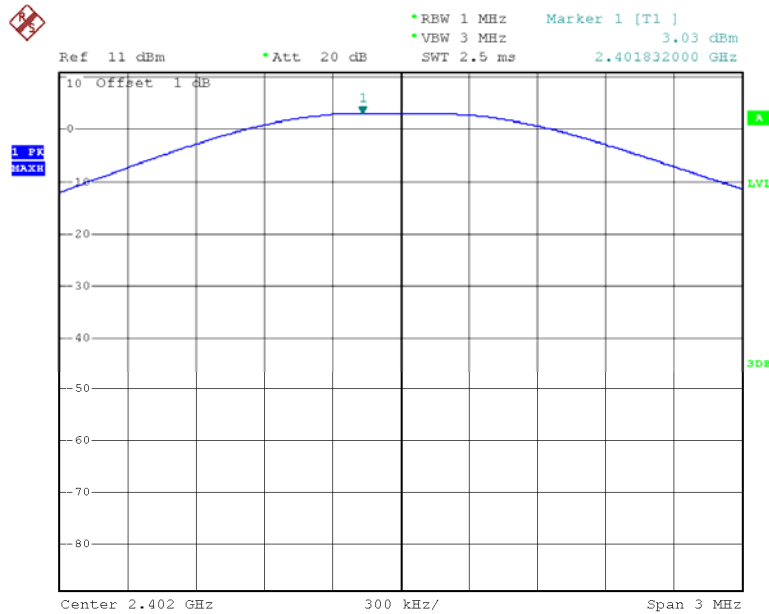


Date: 12.APR.2013 15:23:07

Output Power, Middle

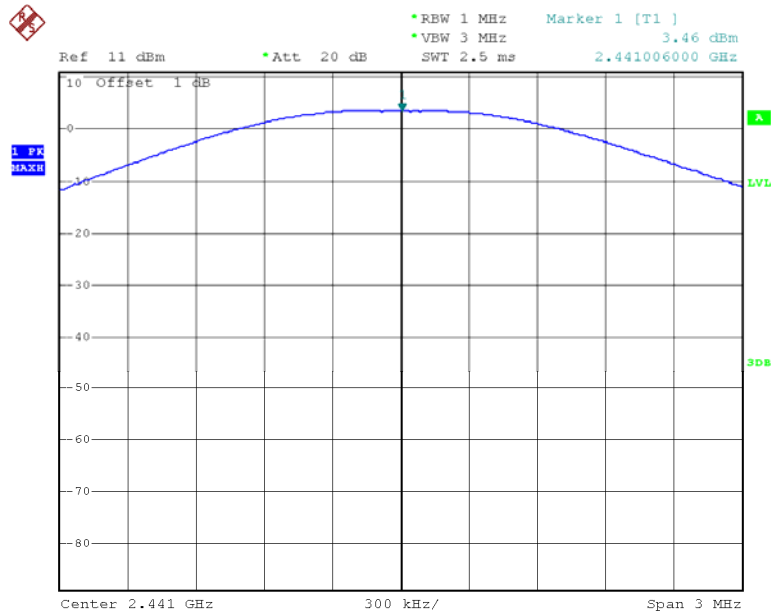

Date: 12.APR.2013 15:23:41


Output Power, High

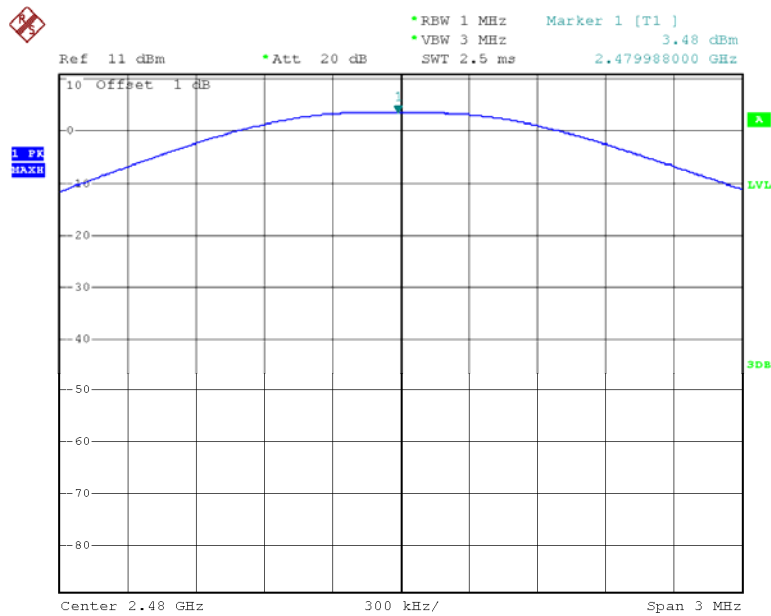

Date: 12.APR.2013 15:24:07


EDR Mode ($\pi/4$ -DQPSK):

Output Power, Low

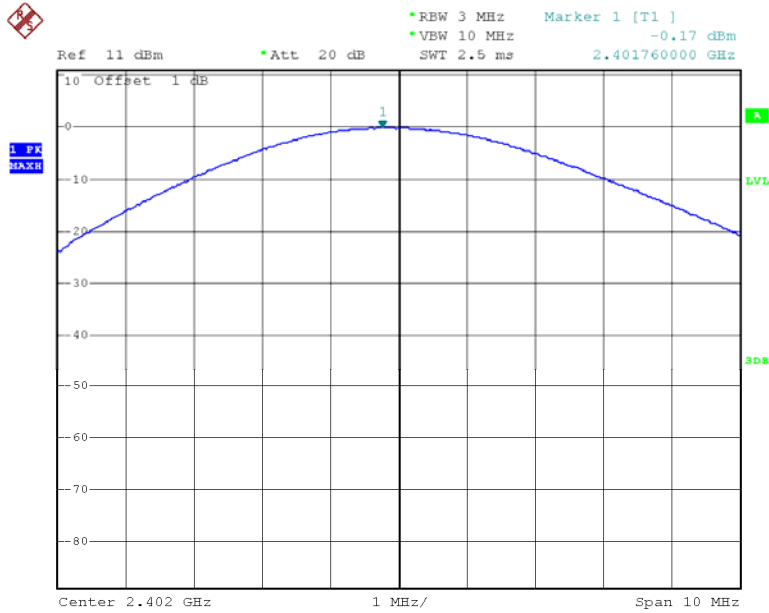


Date: 12.APR.2013 15:09:05

Output Power, Middle

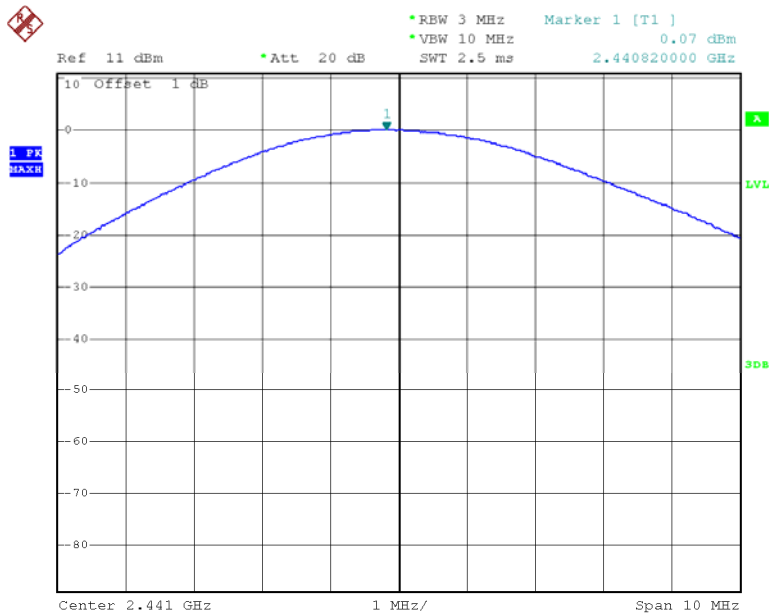

Date: 12.APR.2013 15:09:56


Output Power, High

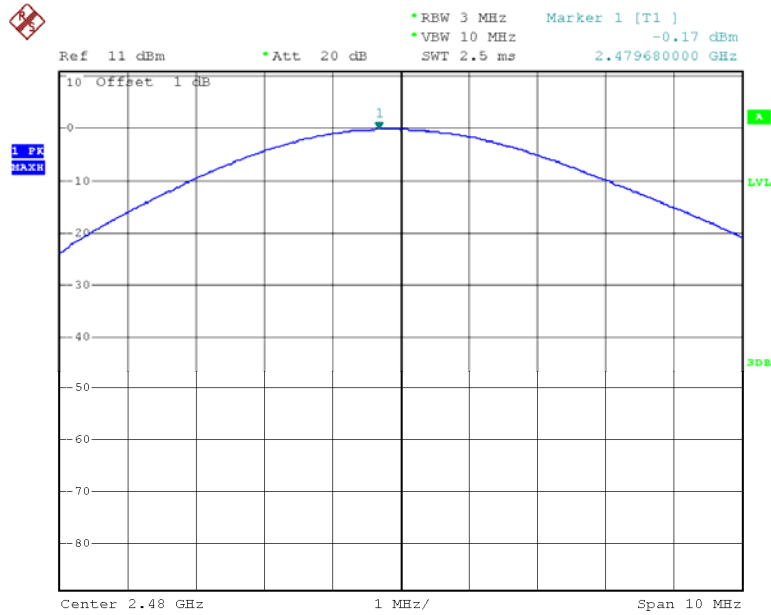

Date: 12.APR.2013 15:11:22


EDR Mode (8-DPSK):

Output Power, Low

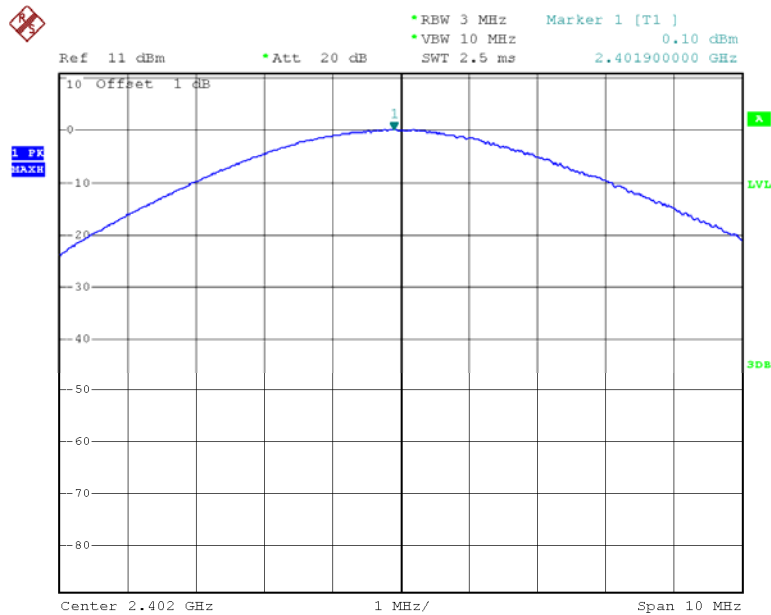


Date: 12.APR.2013 15:22:20

Output Power, Middle

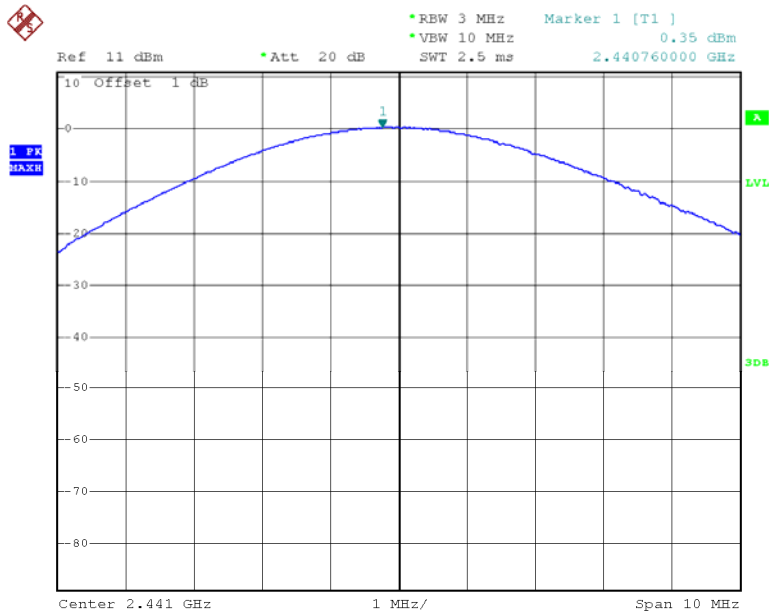

Date: 12.APR.2013 15:21:22

Output Power, High

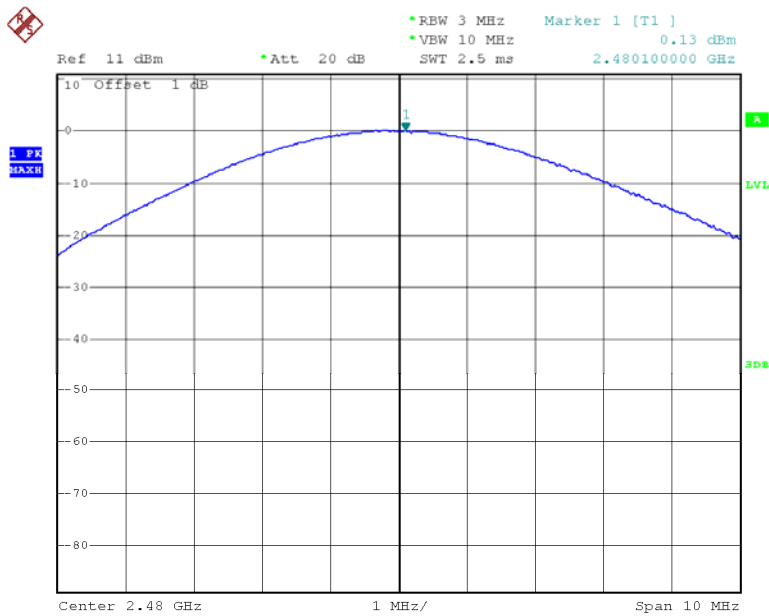

Date: 12.APR.2013 15:19:38

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	25.5°C
Relative Humidity:	56 %
ATM Pressure:	100.4kPa

* The testing was performed by Leon Chen on 2013-04-12.


Test Result: Compliance
BDR Mode (GFSK):

Band Edge, Left Side

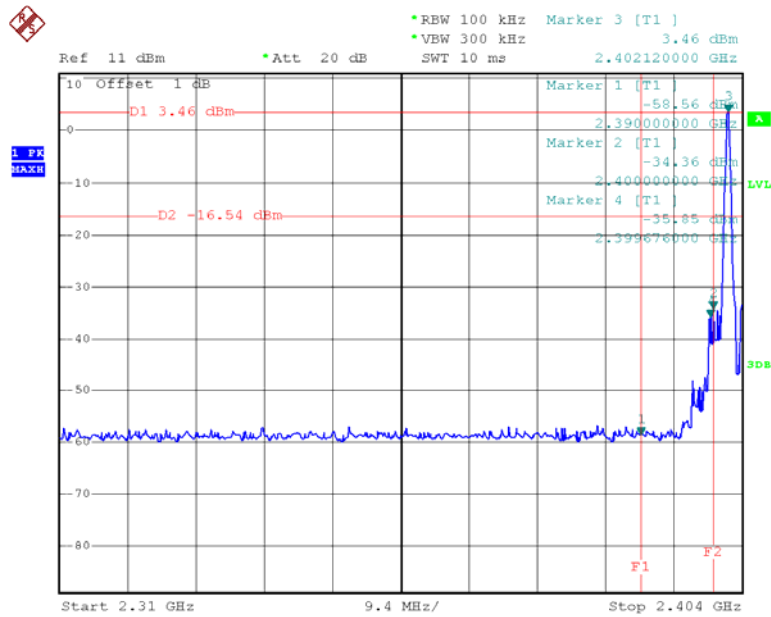

Date: 12.APR.2013 15:35:17


Band Edge, Right Side

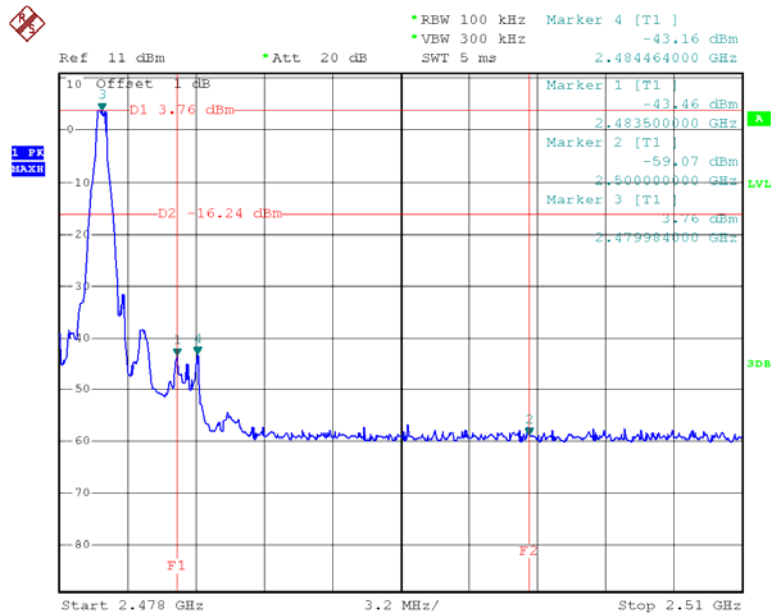

Date: 12.APR.2013 15:33:13


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

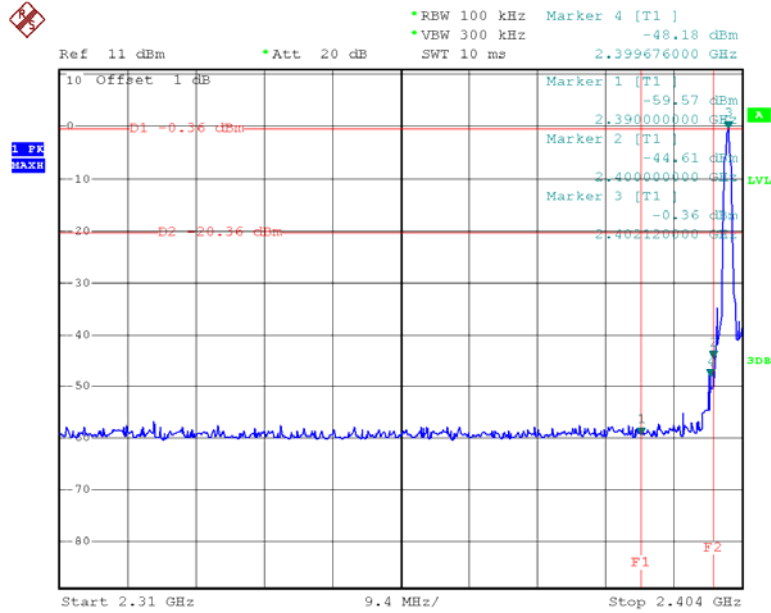

Date: 12.APR.2013 15:36:25


Band Edge, Right Side

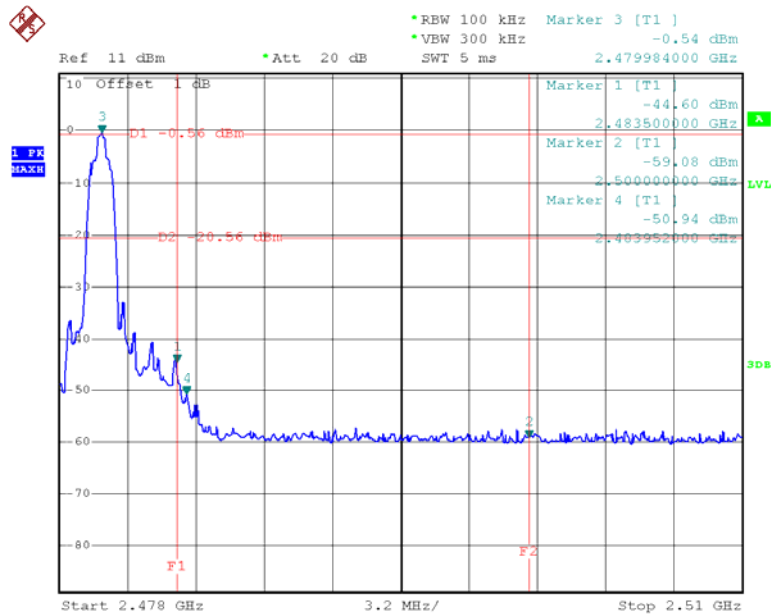

Date: 12.APR.2013 15:31:57


EDR Mode (8-DPSK):

Band Edge, Left Side

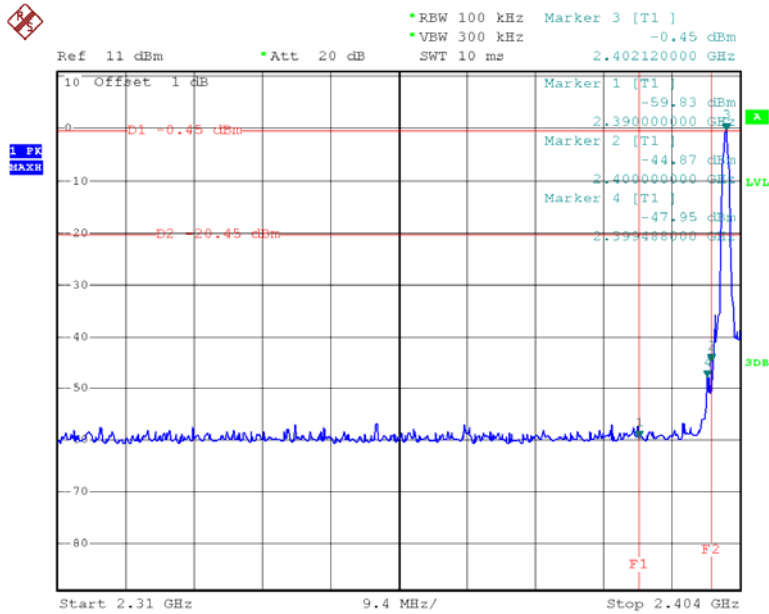

Date: 12.APR.2013 15:37:18

Band Edge, Right Side

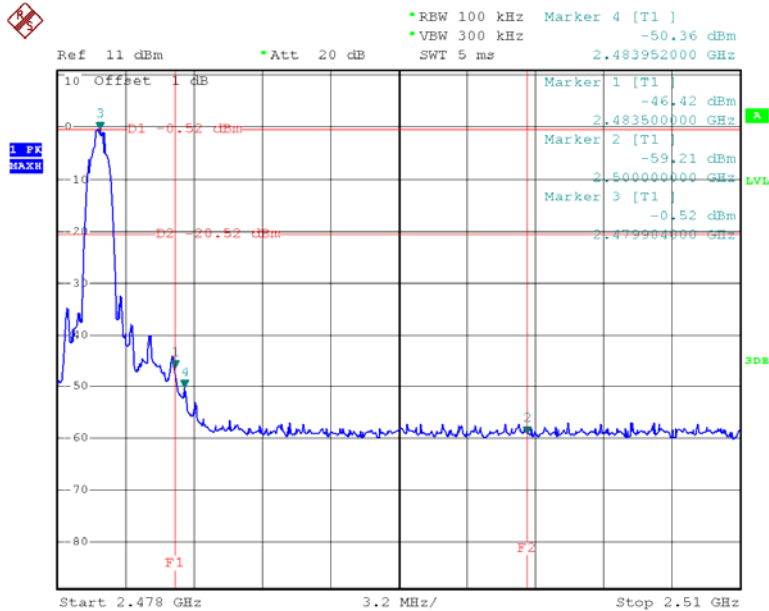

Date: 12.APR.2013 15:30:39

***** END OF REPORT *****