

FCC Radio Test Report

FCC ID: SIB-BGTAB-NV24A

This report concerns (check one): Original Grant Class II Change

Project No. : 1406C178
Equipment : dreamtab
Model Name : BGTAB-NV24A
Applicant : Foxconn International Inc
Address : NO 2 ZIYOU ST TUCHENG DISTRICT NEW
TAIPEI,236 Taiwan


Date of Receipt : Jun. 24, 2014
Date of Test : Jun. 24, 2014~ Aug. 08, 2014
Issued Date : Aug. 11, 2014
Tested by : BTL Inc.

Testing Engineer :



(David Mao)

Technical Manager :

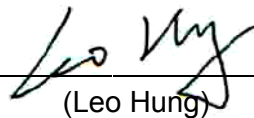

(Leo Hung)

Authorized Signatory :



(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, China.
TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	13
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.5 DESCRIPTION OF SUPPORT UNITS	15
4 . EMC EMISSION TEST	16
4.1 CONDUCTED EMISSION MEASUREMENT	16
4.1.1 POWER LINE CONDUCTED EMISSION	16
4.1.2 TEST PROCEDURE	16
4.1.3 DEVIATION FROM TEST STANDARD	16
4.1.4 TEST SETUP	17
4.1.5 EUT OPERATING CONDITIONS	17
4.1.6 EUT TEST CONDITIONS	17
4.1.7 TEST RESULTS	17
4.2 RADIATED EMISSION MEASUREMENT	18
4.2.1 RADIATED EMISSION LIMITS	18
4.2.2 TEST PROCEDURE	19
4.2.3 DEVIATION FROM TEST STANDARD	19
4.2.4 TEST SETUP	19
4.2.5 EUT OPERATING CONDITIONS	20
4.2.6 EUT TEST CONDITIONS	20
4.2.7 TEST RESULTS (9K TO 30MHz)	21
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	21
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	21
5 . 26dB SPECTRUM BANDWIDTH	22
5.1 APPLIED PROCEDURES / LIMIT	22
5.1.1 TEST PROCEDURE	22
5.1.2 DEVIATION FROM STANDARD	22
5.1.3 TEST SETUP	22
5.1.4 EUT OPERATION CONDITIONS	22
5.1.5 EUT TEST CONDITIONS	22
5.1.6 TEST RESULTS	22
6 . MAXIMUM CONDUCTED OUTPUT POWER	23

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	23
6.1.1 TEST PROCEDURE	23
6.1.2 DEVIATION FROM STANDARD	24
6.1.3 TEST SETUP	24
6.1.4 EUT OPERATION CONDITIONS	24
6.1.5 EUT TEST CONDITIONS	24
6.1.6 TEST RESULTS	24
7 .ANTENNA CONDUCTED SPURIOUS EMISSION	25
7.1 APPLIED PROCEDURES / LIMIT	25
7.1.1 TEST PROCEDURE	25
7.1.2 DEVIATION FROM STANDARD	25
7.1.3 TEST SETUP	25
7.1.4 EUT OPERATION CONDITIONS	25
7.1.5 EUT TEST CONDITIONS	25
7.1.6 TEST RESULTS	25
8 .POWER SPECTRAL DENSITY TEST	26
8.1 APPLIED PROCEDURES / LIMIT	26
8.1.1 TEST PROCEDURE	26
8.1.2 DEVIATION FROM STANDARD	26
8.1.3 TEST SETUP	26
8.1.4 EUT OPERATION CONDITIONS	26
8.1.5 EUT TEST CONDITIONS	26
8.1.6 TEST RESULTS	26
9 .FREQUENCY STABILITY MEASUREMENT	27
9.1 APPLIED PROCEDURES / LIMIT	27
9.1.1 TEST PROCEDURE	27
9.1.2 DEVIATION FROM STANDARD	27
9.1.3 TEST SETUP	28
9.1.4 EUT OPERATION CONDITIONS	28
9.1.5 EUT TEST CONDITIONS	28
9.1.6 TEST RESULTS	28
10 . MEASUREMENT INSTRUMENTS LIST	29
11 .EUT TEST PHOTOS	31
ATTACHMENTA -CONDUCTED EMISSION	35
ATTACHMENTB -RADIATED EMISSION (9KHZ TO 30MHZ)	38
ATTACHMENTC -RADIATED EMISSION (30MHZ TO 1000MHZ)	40
ATTACHMENTD -RADIATED EMISSION (ABOVE 1000MHZ)	59
ATTACHMENTE –26DB BANDWIDTH	160

Table of Contents	Page
ATTACHMENTF - MAXIMUM OUTPUT POWER	191
ATTACHMENTG - ANTENNA CONDUCTED SPURIOUS EMISSION	198
ATTACHMENTH - POWER SPECTRAL DENSITY	214
ATTACHMENTI-FREQUENCY STABILITY	245

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1406C178	Original Issue.	Aug. 11, 2014

1. CERTIFICATION

Equipment : dreamtab
Brand Name : FUHU
Model Name : BGTAB-NV24A
Applicant : Foxconn International Inc.
Manufacturer: FUHU INC.
Address : 909N., Sepulveda Blvd., Suite 540, E1 Segundo, CA 90245
Factory : HONGFUJIN Precision Electronics (Chong Qing) Co., Ltd.
Address : No.1, 1st E District RD., Shapingba District, Chongqing 401332, P.R. China
Date of Test : Jun. 24, 2014~ Aug. 08, 2014
Test Item : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.4 : 2009;
FCC KDB 789033 D01 General UNII Test Procedures Old Rulev01r04.

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc..

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1406C178) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the5150MHz~5250MHz;5250MHz~5350MHz; 5470~5725MHz Mode part of the product.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	26dB Spectrum Bandwidth	PASS	
15.407(a)	Maximum Conducted Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirements	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792
BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz~30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz~200MHz	V	3.82	
		30MHz~200MHz	H	3.60	
		200MHz~ 1,000MHz	V	3.86	
		200MHz~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	dreamtab	
Brand Name	FUHU	
Model Name	BGTAB-NV24A	
Mode Different	N/A	
Product Description	Operation Frequency	Band 1:5150MHz~5250MHz Band 2:5250MHz~5350MHz Band 3:5470MHz~5725MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	11a:6/ 9/12/18/24/36/48/54Mbps 11n:300Mbps
	Output Power (Max.)- Band 1	802.11a:13.81dBm 802.11n (20M): 15.63dBm 802.11n (40M): 15.23dBm
	Output Power (Max.)- Band 2	802.11a:13.63dBm 802.11n (20M): 15.55dBm 802.11n (40M): 15.15dBm
	Output Power (Max.)- Band 3	802.11a:13.51dBm 802.11n (20M): 15.46dBm 802.11n (40M): 15.42dBm
	More details of EUT technical specification, please refer to the User's Manual.	
Power Source	#1 DC supplied from AC Adapter. Model: ADS-65LSI-19-3 19065G #2 Supplied from rechargeable Li-ion polymer battery. Brand / Model: McNair / MLP2462113-4S	
Power Rating	#1 I/P AC 100-240V~ 50/60Hz 1.5A O/P: DC 19V 3.42A #2 DC14.8V 1650mAh 24.42Wh	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Channel List:

802.11a / 802.11n 20M							
Band 1		Band 2		Band 3			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	116	5580
40	5200	56	5280	104	5520	132	5660
44	5220	60	5300	108	5540	136	5680
48	5240	64	5320	112	5560	140	5700

802.11n 40M							
Band 1		Band 2		Band 3			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	118	5590
46	5230	62	5310	110	5550	126	5630
						134	5670

3. Antenna Specification:

The product has 2 group antenna: MAG Corporation and FOXCONN .

Group 1

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	FOXCONN	PCA-3007-25GC1-A2	Integral	N/A	-1.31	360mm
2	FOXCONN	PCA-3007-25GC1-A5	Integral	N/A	-3.46	65mm

Group 2

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	MAG Corporation	PCA-3007-25GC1-A2	Integral	N/A	2.24	360mm
2	MAG Corporation	PCA-3007-25GC1-A5	Integral	N/A	1.92	65mm

Note:

- 1.The EUT incorporates a MIMO function. Physically, the EUT provides two completed two transmitters and two receivers (2T2R).
2. Two groups of antenna were used with the same type, only differ in manufacturer and gain. Group 2 was tested and recorded as the worst case in this report.
3. ANT 1 for 1TX was found to be the worst case and recorded.

Operating Mode	1TX	2TX
TX Mode		
802.11a	V (ANT 1)	-
802.11n(20MHz)	-	V (ANT 1 + ANT 2)
802.11n(40MHz)	-	V (ANT 1 + ANT 2)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX A Mode/ CH36, CH40, CH48(Band 1) TX A Mode/ CH52, CH60, CH64(Band 2) TX A Mode/ CH100, CH116, CH140(Band 3)
Mode 2	TX N20 Mode/ CH36, CH40, CH48(Band 1) TX N20 Mode/ CH52, CH60, CH64(Band 2) TX N20 Mode/ CH100, CH116, CH140(Band 3)
Mode 3	TX N40 Mode/ CH38, CH46 (Band 1) TX N40 Mode/ CH54, CH62 (Band 2) TX N40 Mode/CH102, CH110, CH134(Band 3)
Mode 4	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 4	TX Mode

Note: For Conducted test, the Dipole antenna with external cable is found to be the worst case and recorded.

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode/ CH36, CH40, CH48(Band 1) TX A Mode/ CH52, CH60, CH64(Band 2) TX A Mode/ CH100, CH116, CH140(Band 3)
Mode 2	TX N20 Mode/ CH36, CH40, CH48(Band 1) TX N20 Mode/ CH52, CH60, CH64(Band 2) TX N20 Mode/ CH100, CH116, CH140(Band 3)
Mode 3	TX N40 Mode/ CH38, CH46 (Band 1) TX N40 Mode/ CH54, CH62 (Band 2) TX N40 Mode/CH102, CH110, CH134(Band 3)

Note: (1) For Radiated Below 1G test, the 802.11a mode is found to be the worst case and recorded.

- (2) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis. The worst case was found positioned on Z-plane. Therefore only the test data of this Z-plane was used for radiated emission measurement test.


3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

Test software version	N/A		
Frequency	5180 MHz	5200MHz	5240 MHz
A Mode	14	14	14
Frequency	5260 MHz	5300 MHz	5320 MHz
A Mode	14	14	14
Frequency	5500 MHz	5580 MHz	5700 MHz
A Mode	13	14	14

Test software version	N/A		
Frequency	5180 MHz	5200MHz	5240 MHz
N20 Mode	13	13	13
Frequency	5260 MHz	5300 MHz	5320 MHz
N20 Mode	13	13	13
Frequency	5500 MHz	5580 MHz	5700 MHz
N20 Mode	12	13	13

Test software version	N/A		
Frequency	5190MHz	5230MHz	
N40 Mode	13	13	
Frequency	5270 MHz	5310 MHz	
N40 Mode	13	13	
Frequency	5510 MHz	5550 MHz	5670 MHz
N40M Mode	13	13	14

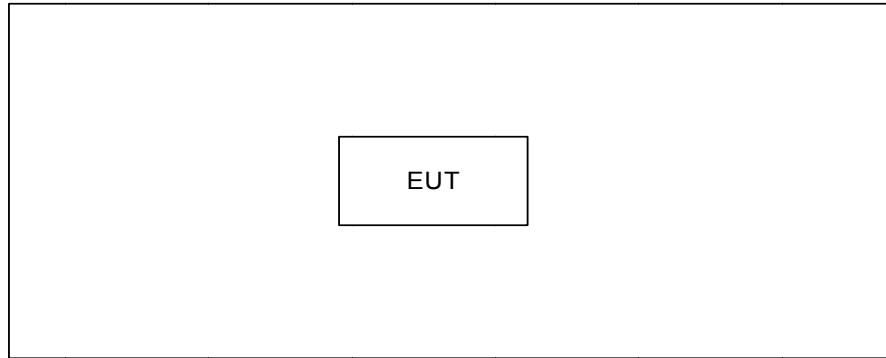3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
-	-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TESTSETUP

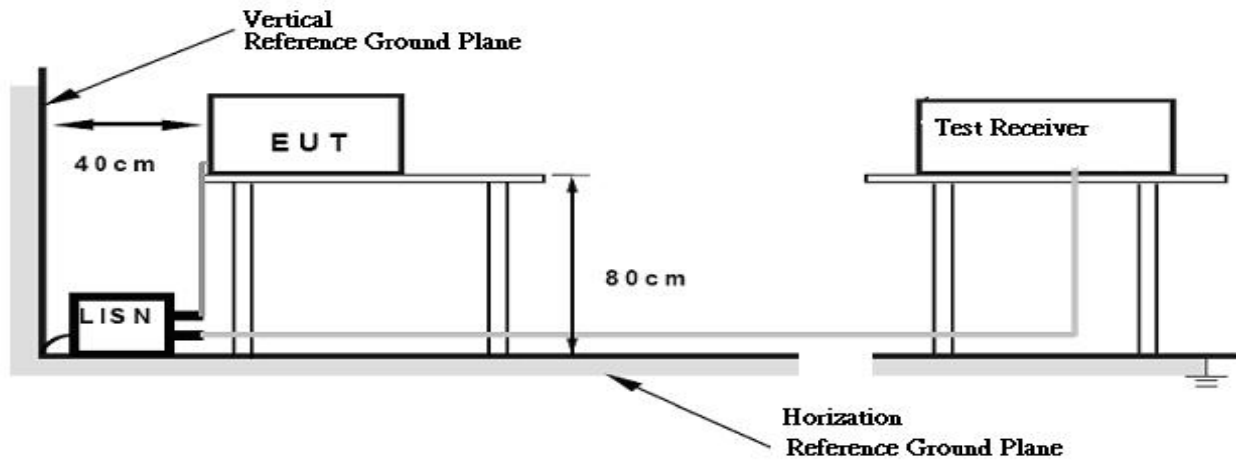

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27	68.3
	-17	78.3

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

4.2.2 TESTPROCEDURE

- a. The measuring distance of at 1.5m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

Radiated Emission Test Set-Up Frequency 30 - 1000MHz

Radiated Emission Test Set-Up Frequency Above 1 GHz

Radiated emissions below 30MHz

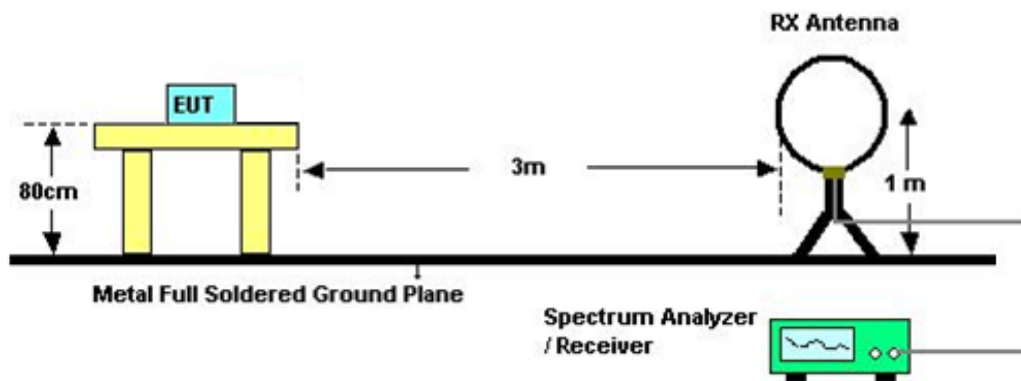

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC14.8V

4.2.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

4.2.8 TEST RESULTS(BETWEEN30 TO 1000 MHz)

Please refer to the Attachment C.

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Modewith Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz ◦
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

4.2.9 TEST RESULTS(ABOVE1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (4) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (7) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

5.26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
26 dB Bandwidth	-----	5150~5250	PASS
		5250~5350	
		5470~5725	

5.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

c. Measured the spectrum width with power higher than 26dB below carrier

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC14.8V

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Frequency Range (MHz)	Limit	Result
Conducted Output Power	5150 - 5250	not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B (FCC Part15, Subpart E)	PASS
	5250 - 5350	not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10log B	PASS
	5470 - 5725	not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10log B	PASS

Note: where “B” is the 26dB emissions bandwidth in MHz.

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) ofthe signal
RBW	= 1 MHz.
VBW	\geq 3 MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	auto

- b. Test was performed in accordance with method of KDB 789033 D01.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP**6.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC14.8V

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	-27 dBm/1MHz	5150 – 5250	PASS
		5250 – 5350	
		5470 – 5725	

7.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,


b.

Spectrum Parameter	Setting
Attenuation	Auto
RB	1000kHz
VB	1000kHz
Trace	Max Hold
Sweep Time	Auto

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

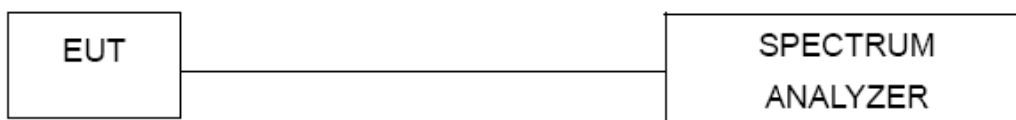

7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC14.8V

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	4dBm	5150 - 5250	PASS
	11 dBm	5250 - 5350	PASS
	11 dBm	5470 - 5725	PASS

8.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	= 1 MHz.
VB	≥ 3 MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC14.8V

8.1.6 TEST RESULTS

Please refer to the Attachment H.

9.FREQUENCY STABILITY MEASUREMENT

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E 15.407(g)			
Test Item	Limit	Frequency Range (MHz)	Result
Frequency Stability	specified in the user's manual	5150 – 5250	PASS
		5250 – 5350	PASS
		5470 – 5725	PASS

9.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10kHz
Sweep Time	Auto

c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

d. user manual temperature is 0°C~50°C.

9.1.2 DEVIATION FROM STANDARD

No deviation.

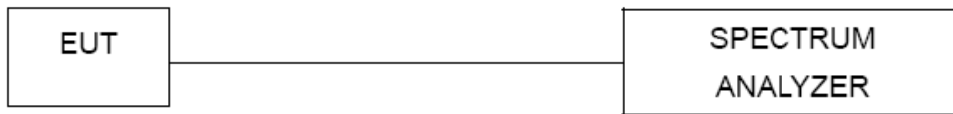9.1.3 TEST SETUP**9.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

9.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC14.8V

9.1.6 TEST RESULTS

Please refer to the Attachment I.

10. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Mar. 29,2015
2	LISN	R&S	ENV216	100087	Mar. 29,2015
3	Test Cable	N/A	C_17	N/A	Mar. 14, 2015
4	EMI TEST RECEIVER	R&S	ESCS30	826547/022	Mar. 29,2015
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 29,2015

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 29,2015
2	Amplifier	HP	8447D	2944A09673	Mar. 29,2015
3	Test Receiver	R&S	ESCI	100382	Mar. 29,2015
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 01, 2015
5	Antenna	ETS	3115	00075789	Mar. 29,2015
6	Amplifier	Agilent	8449B	3008A02274	Mar. 29,2015
7	Spectrum	Agilent	E4408B	US39240143	Nov. 09, 2014
8	Test Cable	HUBER+SUHNER	C-45	N/A	Mar. 29,2015
9	Controller	CT	SC100	N/A	N/A
10	Horn Antenna	EMCO	3115	9605-4803	Mar. 29,2015
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Mar. 29,2015
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Feb. 22, 2015

26dB Spectrum Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Maximum Conducted Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014
2	Precision Oven Tester	HOLINK	H-T-1F-D	BA03101701	May. 25, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.

11.EUT TEST PHOTOS

Conducted Measurement Photos



Radiated Measurement Photos

9KHz to 30MHz



Radiated Measurement Photos

30MHz to 1000MHz



Radiated Measurement Photos


Above 1000MHz



ATTACHMENTA -CONDUCTED EMISSION

Test Mode : TX MODE


Line

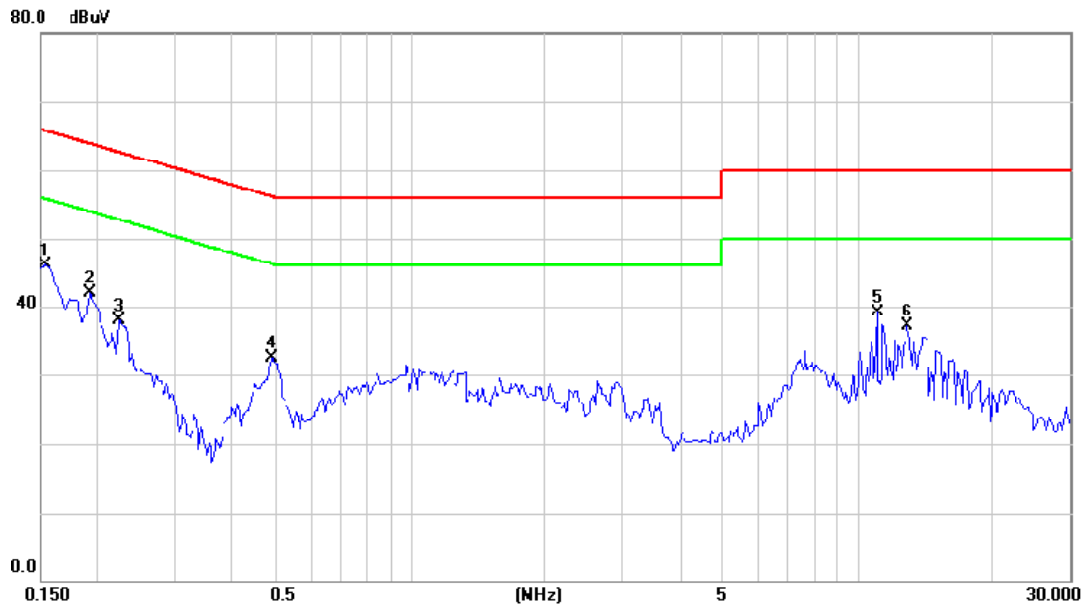

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1 *	0.1540	36.49	9.52	46.01	65.78	-19.77	peak	
2	0.1930	32.31	9.54	41.85	63.91	-22.06	peak	
3	0.2242	28.33	9.54	37.87	62.66	-24.79	peak	
4	0.4898	22.97	9.59	32.56	56.17	-23.61	peak	
5	11.0897	28.87	10.15	39.02	60.00	-20.98	peak	
6	12.9961	26.90	10.25	37.15	60.00	-22.85	peak	

Test Mode : TX MODE

Neutral

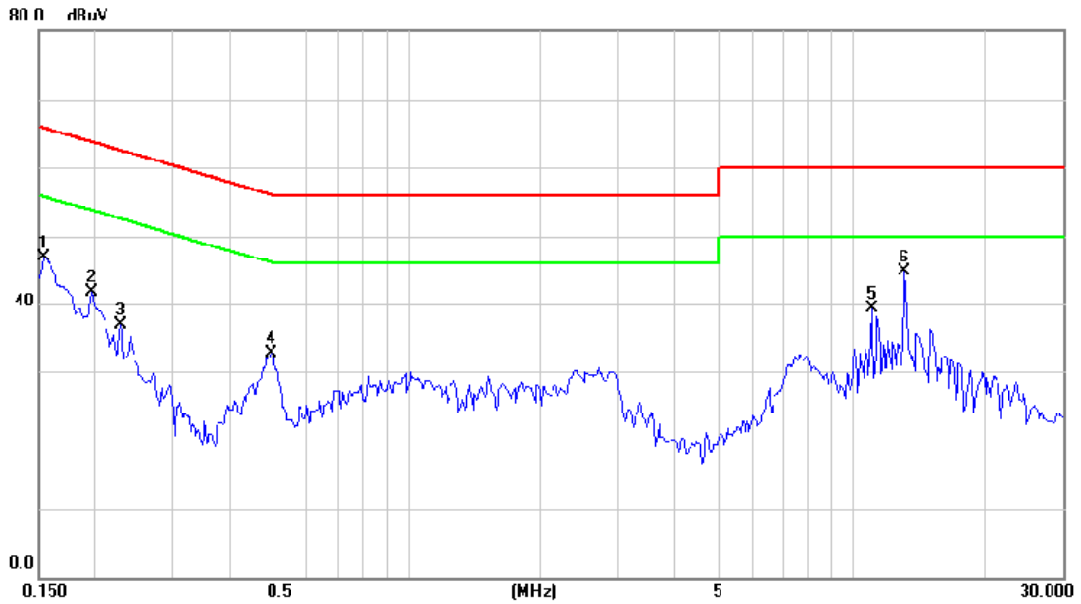

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1540	37.38	9.52	46.90	65.78	-18.88	peak	
2		0.1970	32.13	9.53	41.66	63.74	-22.08	peak	
3		0.2281	27.45	9.53	36.98	62.52	-25.54	peak	
4		0.4977	23.11	9.58	32.69	56.04	-23.35	peak	
5		11.0897	29.01	10.22	39.23	60.00	-20.77	peak	
6	*	13.2110	34.39	10.36	44.75	60.00	-15.25	peak	

ATTACHMENTB -RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX Mode
------------	---------

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0156	0°	13.43	24.58	38.01	103.74	-65.73	AVG
0.0156	0°	14.27	24.58	38.85	123.74	-84.89	PEAK
0.0311	0°	6.81	23.60	30.41	97.75	-67.34	AVG
0.0311	0°	8.03	23.60	31.63	117.75	-86.12	PEAK
0.0385	0°	4.32	23.13	27.45	95.90	-68.45	AVG
0.0385	0°	5.73	23.13	28.86	115.90	-87.04	PEAK
0.0470	0°	3.14	22.59	25.73	94.16	-68.43	AVG
0.0470	0°	4.81	22.59	27.40	114.16	-86.76	PEAK
2.0604	0°	28.74	19.46	48.20	69.54	-21.34	QP
3.3738	0°	20.39	18.94	39.33	69.54	-30.21	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0155	90°	13.18	24.30	37.48	123.80	-86.32	AVG
0.0155	90°	14.17	24.30	38.47	143.80	-105.33	PEAK
0.0311	90°	6.87	23.60	30.47	117.75	-87.28	AVG
0.0311	90°	7.79	23.60	31.39	137.75	-106.36	PEAK
0.0373	90°	5.93	23.20	29.13	116.17	-87.04	AVG
0.0373	90°	6.84	23.20	30.04	136.17	-106.13	PEAK
0.0470	90°	5.14	22.59	27.73	114.16	-86.43	AVG
0.0470	90°	6.09	22.59	28.68	134.16	-105.48	PEAK
2.0604	90°	29.63	19.46	49.09	69.54	-20.45	QP
3.2842	90°	17.12	18.93	36.05	69.54	-33.49	QP


Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

ATTACHMENTC -RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode : Band 1/TX A Mode 5180MHz


Vertical

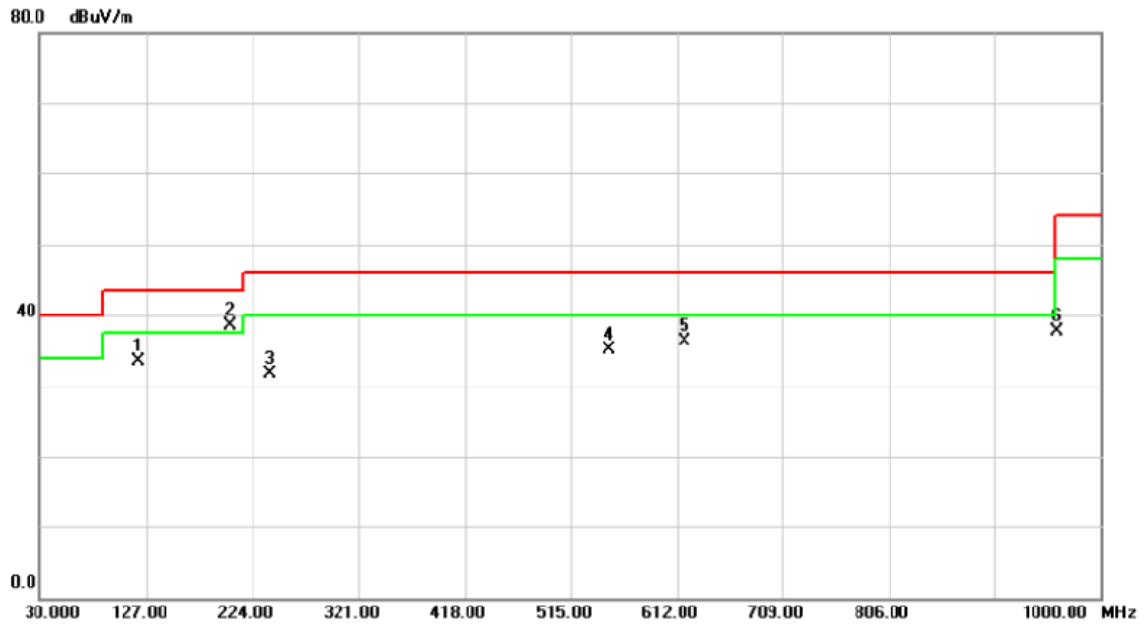

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	47.66	-14.19	33.47	43.50	-10.03	peak	
2	*	203.6300	53.58	-15.14	38.44	43.50	-5.06	peak	
3		240.4900	45.71	-14.04	31.67	46.00	-14.33	peak	
4		549.9200	43.08	-7.93	35.15	46.00	-10.85	peak	
5		618.7900	43.18	-6.88	36.30	46.00	-9.70	peak	
6		960.2300	37.95	-0.25	37.70	54.00	-16.30	peak	

Test Mode : Band 1/TX A Mode 5180MHz


Horizontal

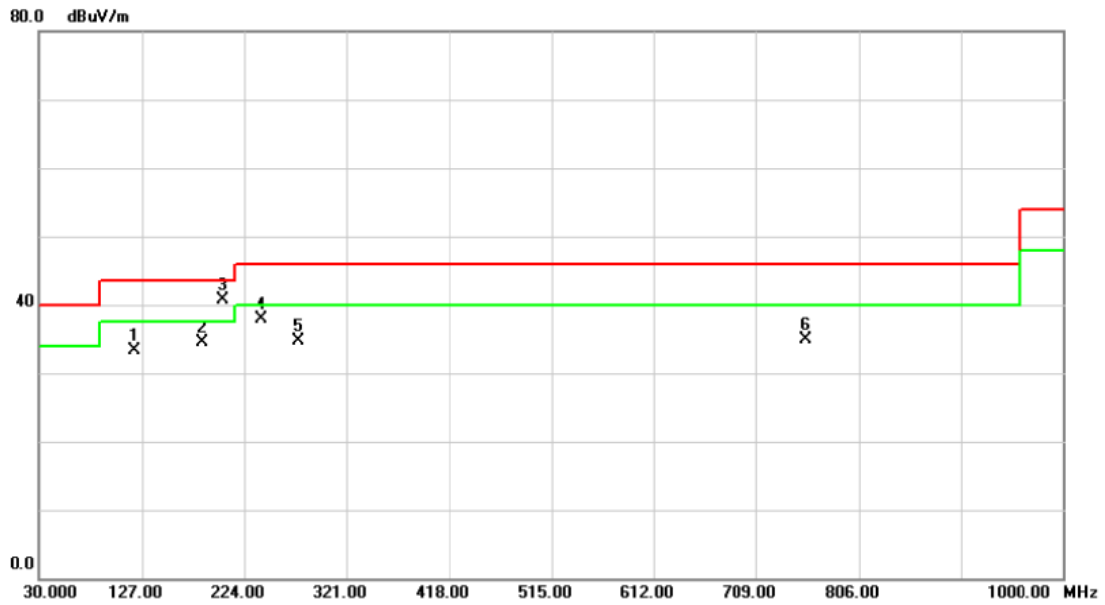

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	120.2100	47.44	-14.19	33.25	43.50	-10.25	peak	
2	184.2300	48.16	-13.57	34.59	43.50	-8.91	peak	
3 *	203.6300	55.75	-15.14	40.61	43.50	-2.89	peak	
4	240.4900	51.92	-14.04	37.88	46.00	-8.12	peak	
5	275.4100	47.42	-12.72	34.70	46.00	-11.30	peak	
6	756.5300	39.36	-4.40	34.96	46.00	-11.04	peak	

Test Mode : Band 1/TX A Mode 5200MHz


Vertical

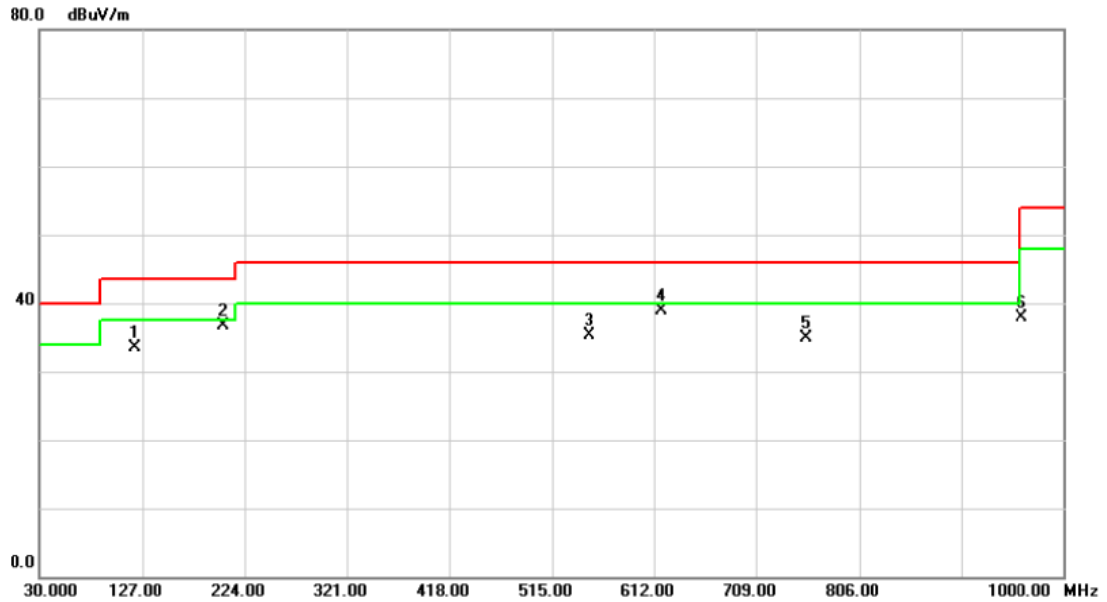

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	47.68	-14.19	33.49	43.50	-10.01	peak	
2	*	203.6300	51.85	-15.14	36.71	43.50	-6.79	peak	
3		549.9200	43.16	-7.93	35.23	46.00	-10.77	peak	
4		618.7900	45.81	-6.88	38.93	46.00	-7.07	peak	
5		756.5300	39.35	-4.40	34.95	46.00	-11.05	peak	
6		960.2300	38.12	-0.25	37.87	54.00	-16.13	peak	

Test Mode : Band 1/TX A Mode 5200MHz


Horizontal

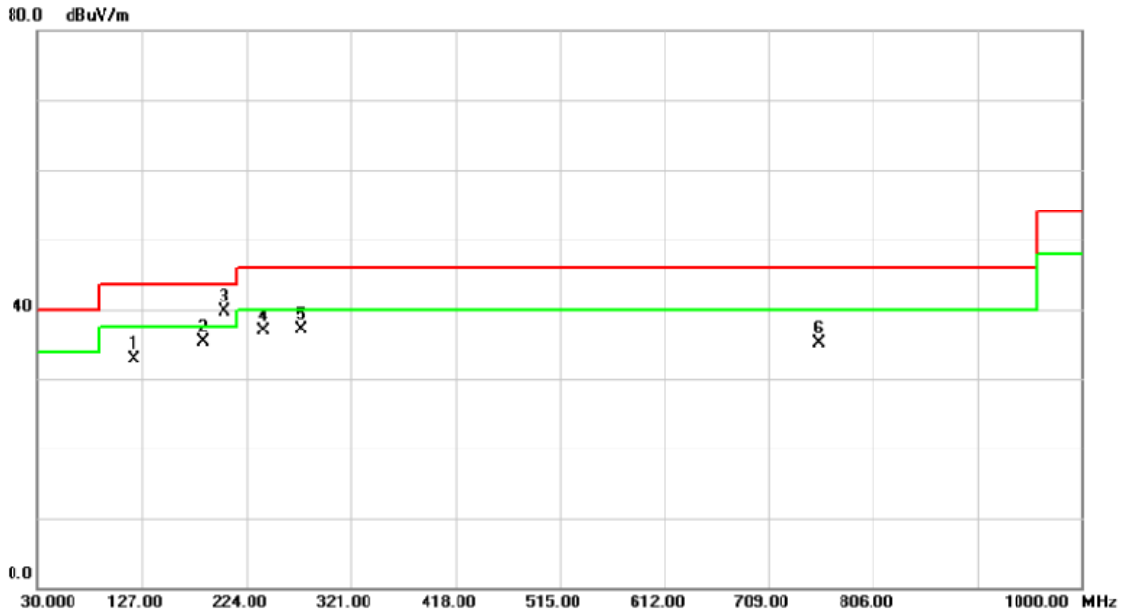

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	47.12	-14.19	32.93	43.50	-10.57	peak	
2		184.2300	48.87	-13.57	35.30	43.50	-8.20	peak	
3	*	203.6300	54.90	-15.14	39.76	43.50	-3.74	peak	
4		240.4900	50.91	-14.04	36.87	46.00	-9.13	peak	
5		275.4100	49.80	-12.72	37.08	46.00	-8.92	peak	
6		756.5300	39.44	-4.40	35.04	46.00	-10.96	peak	

Test Mode : Band 1/TX A Mode 5240MHz


Vertical

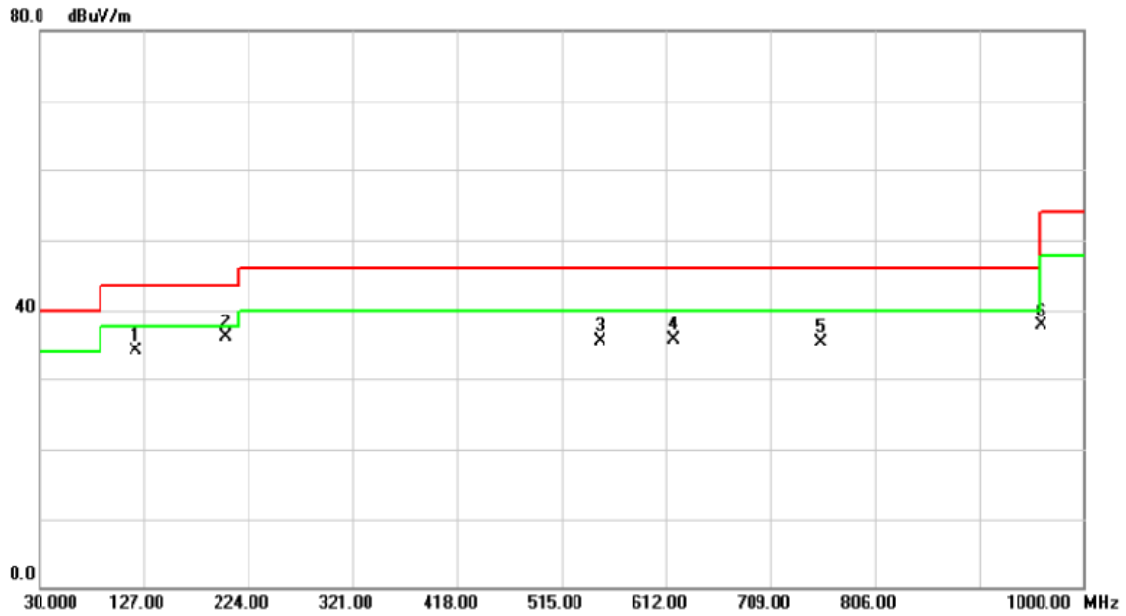

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	48.24	-14.19	34.05	43.50	-9.45	peak	
2	*	203.6300	51.31	-15.14	36.17	43.50	-7.33	peak	
3		549.9200	43.53	-7.93	35.60	46.00	-10.40	peak	
4		618.7900	42.63	-6.88	35.75	46.00	-10.25	peak	
5		756.5300	39.67	-4.40	35.27	46.00	-10.73	peak	
6		960.2300	37.95	-0.25	37.70	54.00	-16.30	peak	

Test Mode : Band 1/TX A Mode 5240MHz


Horizontal

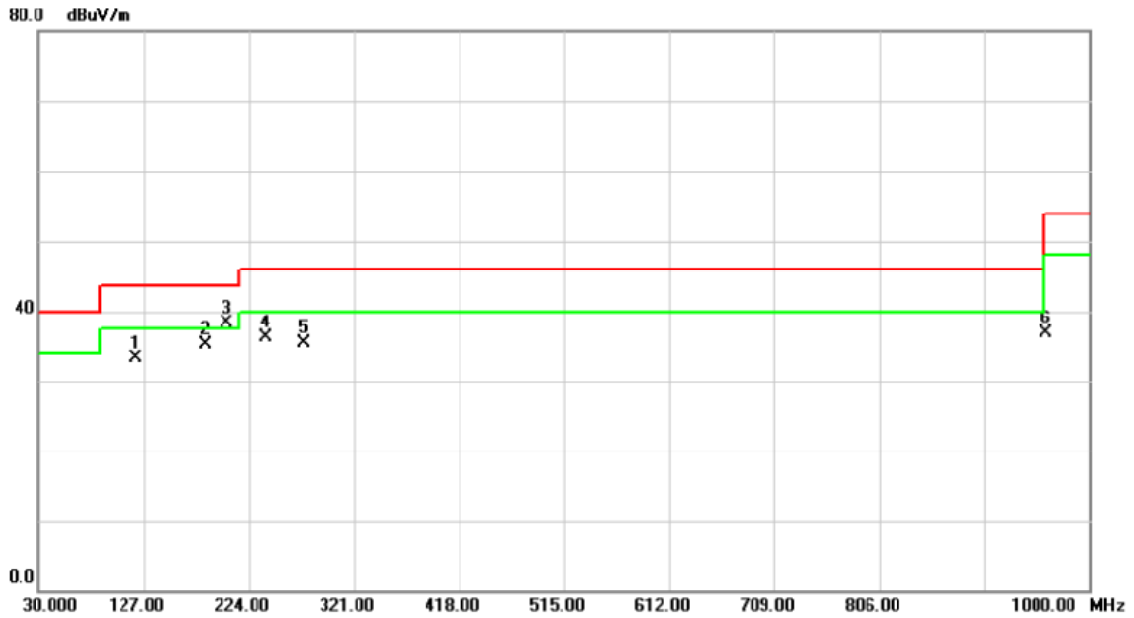

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	47.52	-14.19	33.33	43.50	-10.17	peak	
2		184.2300	48.83	-13.57	35.26	43.50	-8.24	peak	
3	*	203.6300	53.44	-15.14	38.30	43.50	-5.20	peak	
4		240.4900	50.34	-14.04	36.30	46.00	-9.70	peak	
5		275.4100	48.19	-12.72	35.47	46.00	-10.53	peak	
6		960.2300	37.09	-0.25	36.84	54.00	-17.16	peak	

Test Mode : Band 2/TX A Mode 5260MHz


Vertical

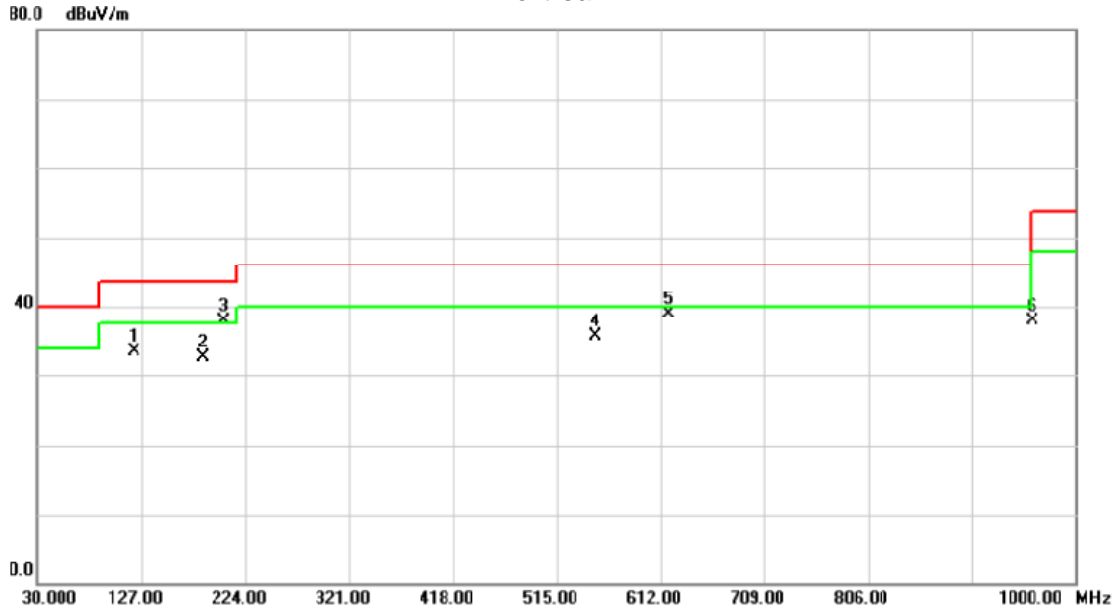

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	47.71	-14.19	33.52	43.50	-9.98	peak	
2		184.2300	46.36	-13.57	32.79	43.50	-10.71	peak	
3	*	203.6300	53.04	-15.14	37.90	43.50	-5.60	peak	
4		540.9200	43.54	7.03	35.61	46.00	10.39	peak	
5		618.7900	45.86	-6.88	38.98	46.00	-7.02	peak	
6		960.2300	38.18	-0.25	37.93	54.00	-16.07	peak	

Test Mode : Band 2/TX A Mode 5260MHz


Horizontal

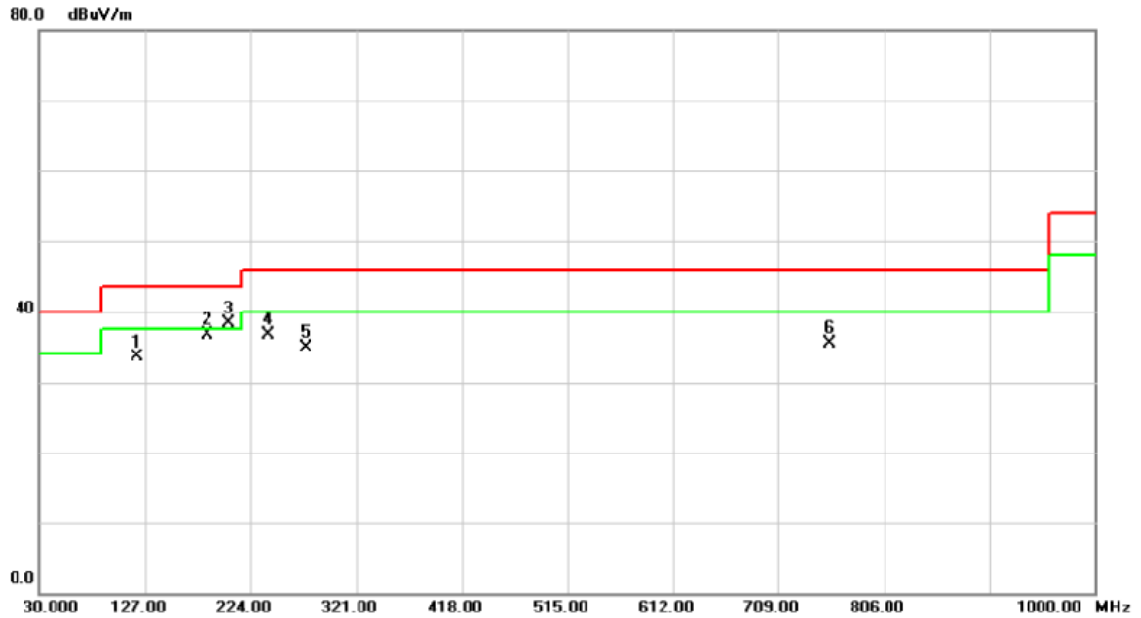

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	47.75	-14.19	33.56	43.50	-9.94	peak	
2		184.2300	50.22	13.57	36.65	43.50	6.85	pcak	
3	*	203.6300	53.40	-15.14	38.26	43.50	-5.24	peak	
4		240.4900	50.82	-14.04	36.78	46.00	-9.22	peak	
5		275.4100	47.58	-12.72	34.86	46.00	-11.14	peak	
6		756.5300	39.87	-4.40	35.47	46.00	-10.53	peak	

Test Mode : Band 2/TX A Mode 5300MHz


Vertical

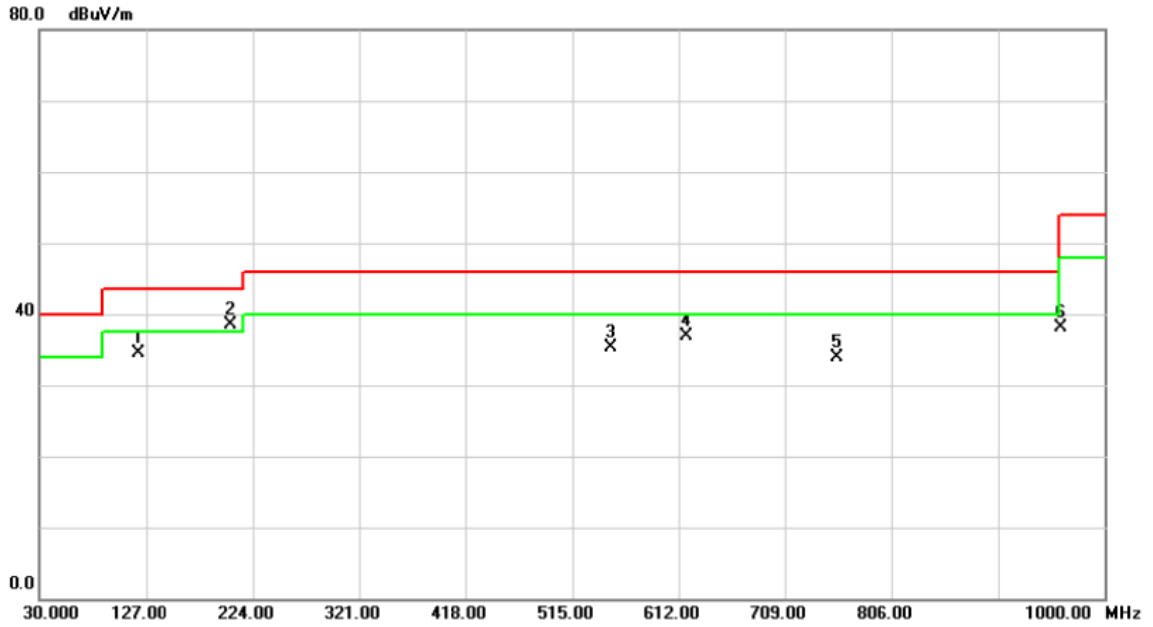

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	48.74	-14.19	34.55	43.50	-8.95	peak	
2	*	203.6300	53.67	-15.14	38.53	43.50	-4.97	peak	
3		549.9200	43.17	-7.93	35.24	46.00	-10.76	peak	
4		618.7900	43.84	-6.88	36.96	46.00	-9.04	peak	
5		756.5300	38.30	-4.40	33.90	46.00	-12.10	peak	
6		960.2300	38.36	-0.25	38.11	54.00	-15.89	peak	

Test Mode : Band 2/TX A Mode 5300MHz


Horizontal

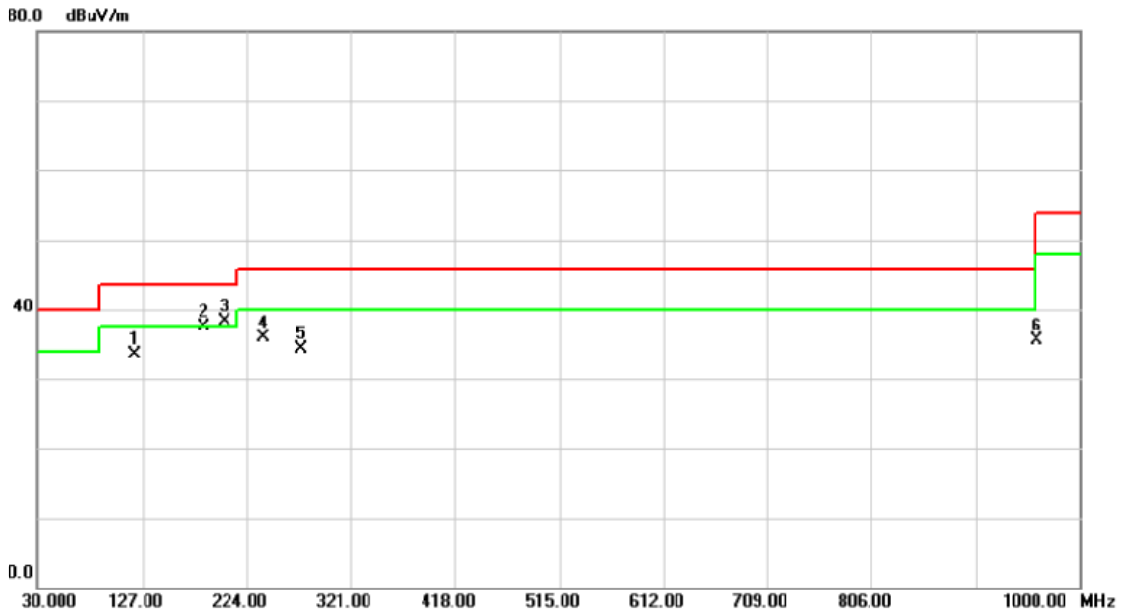

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	120.2100	47.70	-14.19	33.51	43.50	-9.99	peak	
2	184.2300	51.02	-13.57	37.45	43.50	-6.05	peak	
3 *	203.6300	53.44	-15.14	38.30	43.50	-5.20	peak	
4	240.4900	49.87	-14.04	35.83	46.00	-10.17	peak	
5	275.4100	46.95	-12.72	34.23	46.00	-11.77	peak	
6	960.2300	35.81	-0.25	35.56	54.00	-18.44	peak	

Test Mode : Band 2/TX A Mode 5320MHz


Vertical

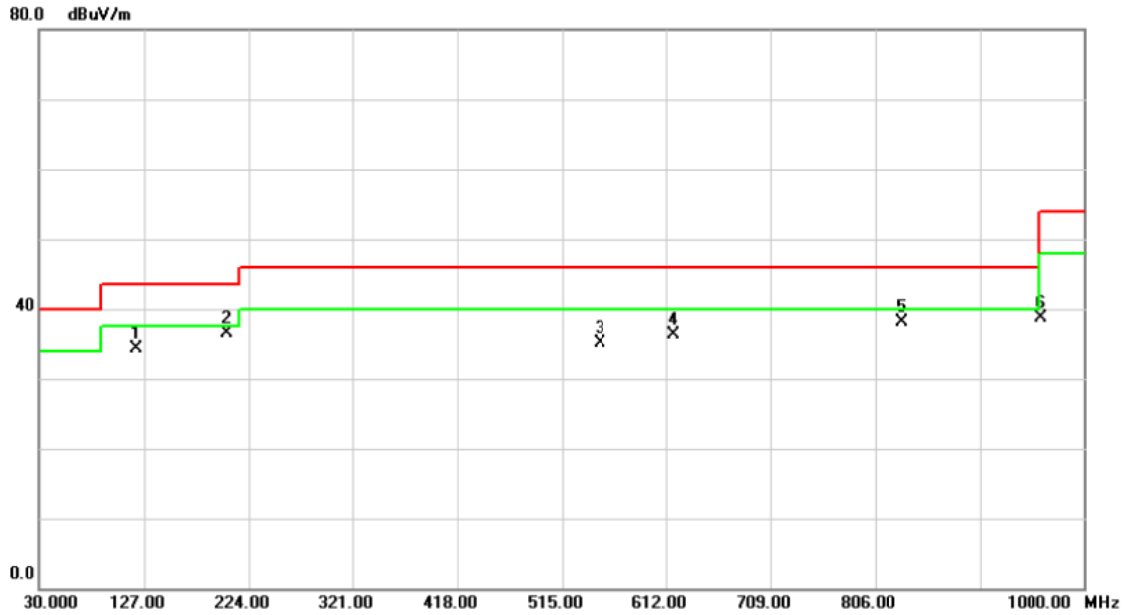

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	48.44	-14.19	34.25	43.50	-9.25	peak	
2	*	203.6300	51.60	-15.14	36.46	43.50	-7.04	peak	
3		549.9200	42.96	-7.93	35.03	46.00	-10.97	peak	
4		618.7900	43.26	-6.88	36.38	46.00	-9.62	peak	
5		831.2200	41.07	-3.05	38.02	46.00	-7.98	peak	
6		960.2300	38.95	-0.25	38.70	54.00	-15.30	peak	

Test Mode : Band 2/TX A Mode 5320MHz


Horizontal

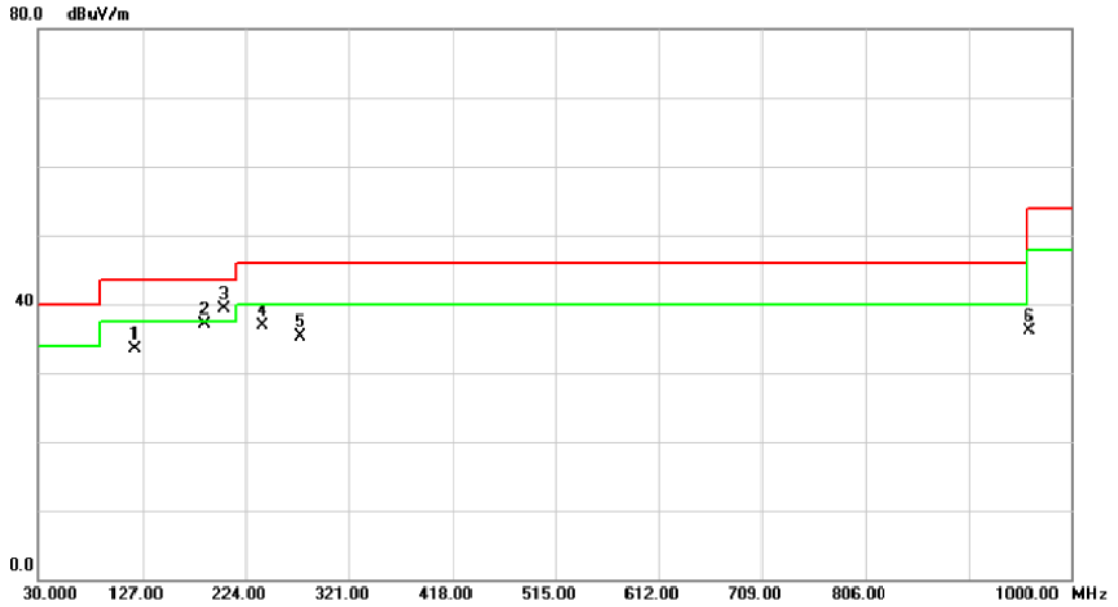

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	47.71	-14.19	33.52	43.50	-9.98	peak	
2		185.2000	50.77	-13.71	37.06	43.50	-6.44	peak	
3	*	203.6300	54.37	-15.14	39.23	43.50	-4.27	peak	
4		240.4900	51.02	-14.04	36.98	46.00	-9.02	peak	
5		275.4100	48.05	-12.72	35.33	46.00	-10.67	peak	
6		960.2300	36.37	-0.25	36.12	54.00	-17.88	peak	

Test Mode : Band 3/TX A Mode 5500MHz


Vertical

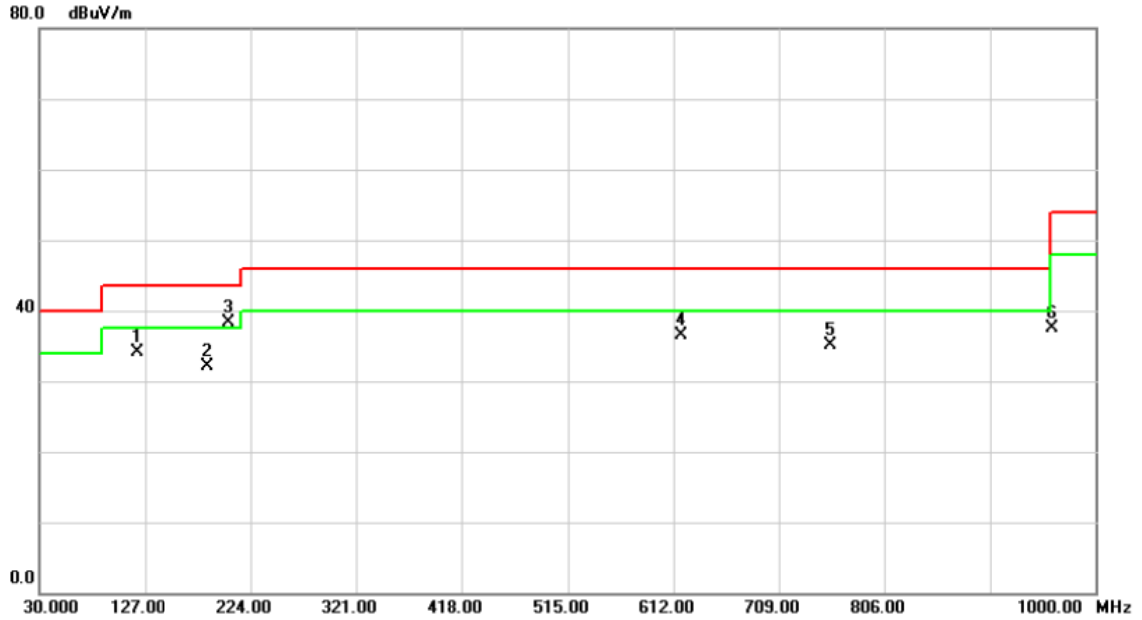

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	48.24	-14.19	34.05	43.50	-9.45	peak	
2		184.2300	45.76	-13.57	32.19	43.50	-11.31	peak	
3	*	203.6300	53.36	-15.14	38.22	43.50	-5.28	peak	
4		618.7900	43.38	-6.88	36.50	46.00	-9.50	peak	
5		756.5300	39.50	-4.40	35.10	46.00	-10.90	peak	
6		960.2300	37.74	-0.25	37.49	54.00	-16.51	peak	

Test Mode : Band 3/TX A Mode 5500MHz


Horizontal

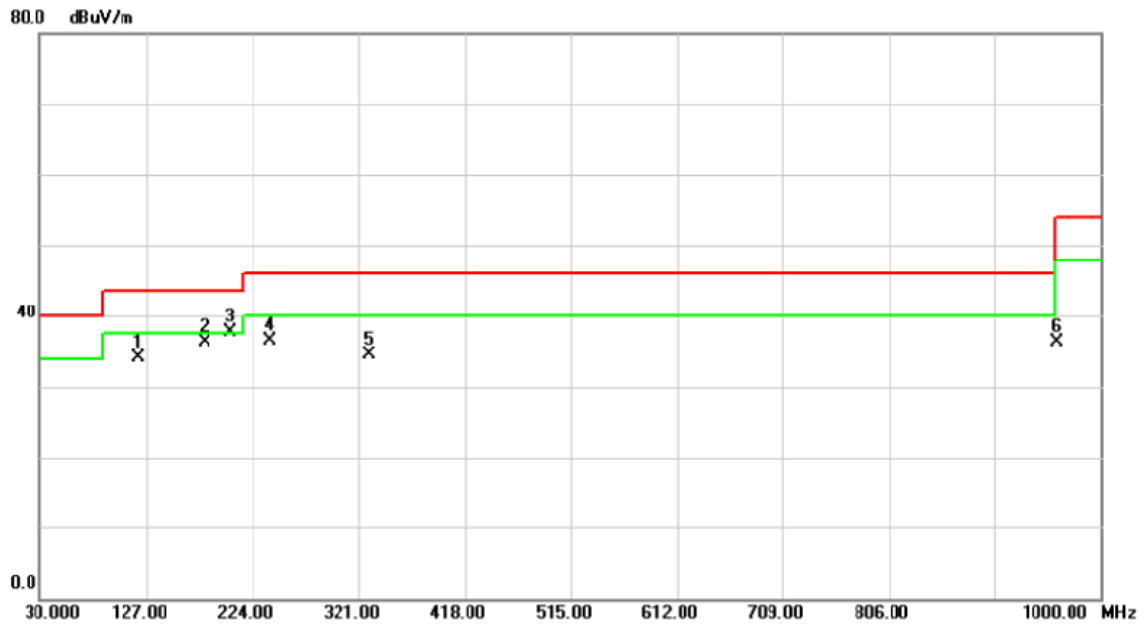

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	48.32	-14.19	34.13	43.50	-9.37	peak	
2		180.3500	49.40	-13.05	36.35	43.50	-7.15	peak	
3	*	203.6300	52.80	-15.14	37.66	43.50	-5.84	peak	
4		240.4900	50.49	-14.04	36.45	46.00	-9.55	peak	
5		330.7000	46.09	-11.49	34.60	46.00	-11.40	peak	
6		960.2300	36.60	-0.25	36.35	54.00	-17.65	peak	

Test Mode : Band 3/TX A Mode 5580MHz


Vertical

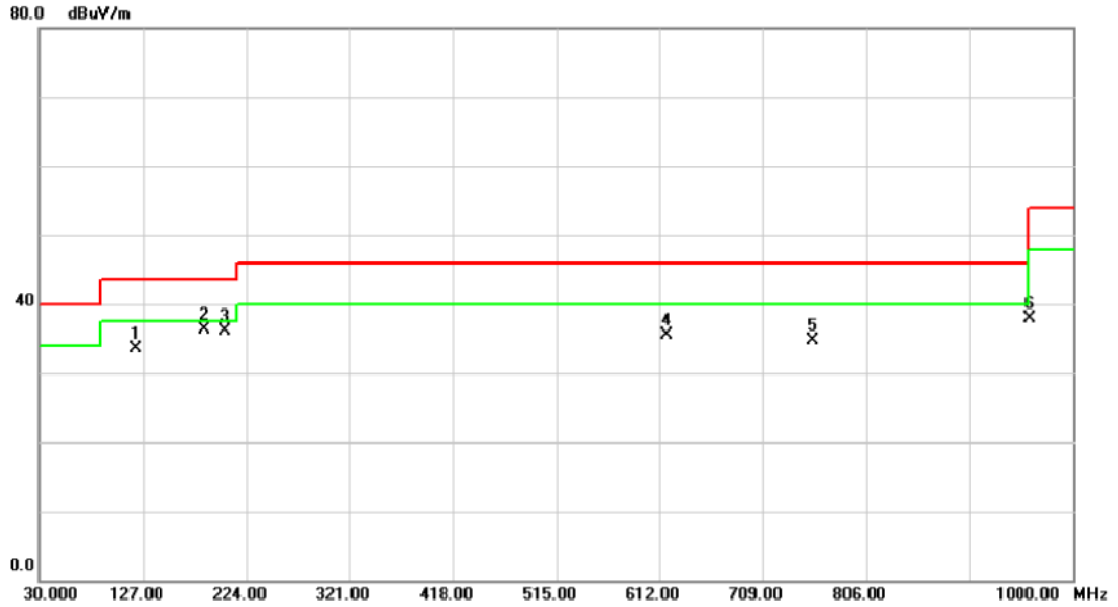

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	47.67	-14.19	33.48	43.50	-10.02	peak	
2	*	184.2300	49.97	-13.57	36.40	43.50	-7.10	peak	
3		203.6300	51.16	-15.14	36.02	43.50	-7.48	peak	
4		618.7900	42.41	-6.88	35.53	46.00	-10.47	peak	
5		756.5300	39.18	-4.40	34.78	46.00	-11.22	peak	
6		960.2300	38.20	-0.25	37.95	54.00	-16.05	peak	

Test Mode : Band 3/TX A Mode 5580MHz


Horizontal

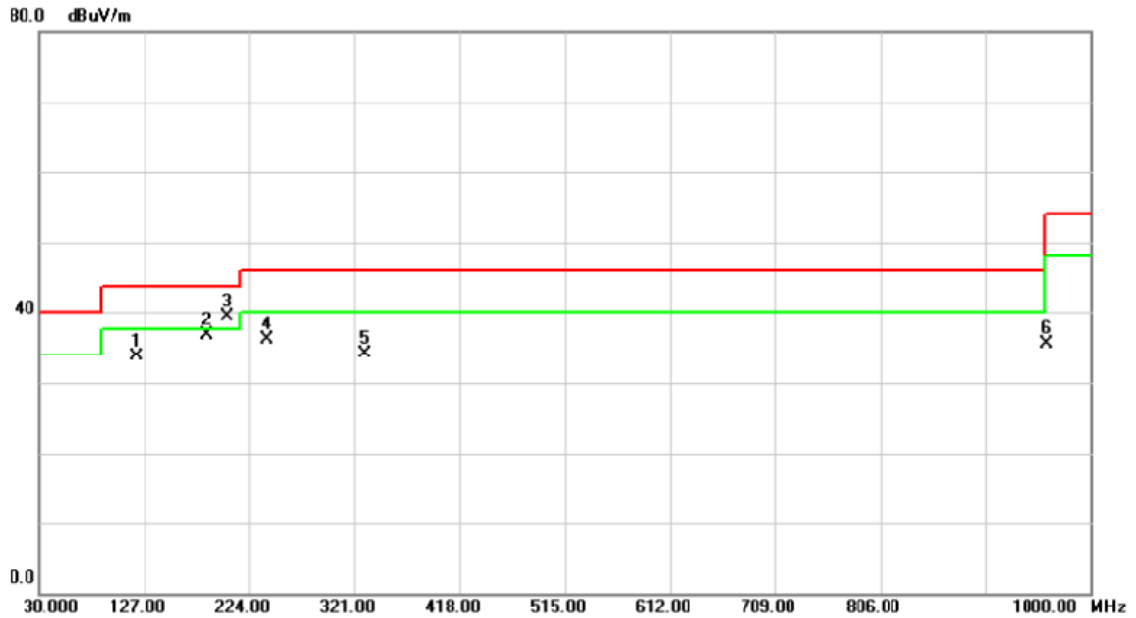

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	47.93	-14.19	33.74	43.50	-9.76	peak	
2		184.2300	50.32	-13.57	36.75	43.50	-6.75	peak	
3	*	203.6300	54.39	-15.14	39.25	43.50	-4.25	peak	
4		240.4900	50.20	-14.04	36.16	46.00	-9.84	peak	
5		330.7000	45.62	-11.49	34.13	46.00	-11.87	peak	
6		960.2300	35.84	-0.25	35.59	54.00	-18.41	peak	

Test Mode : Band 3/TX A Mode 5700MHz


Vertical

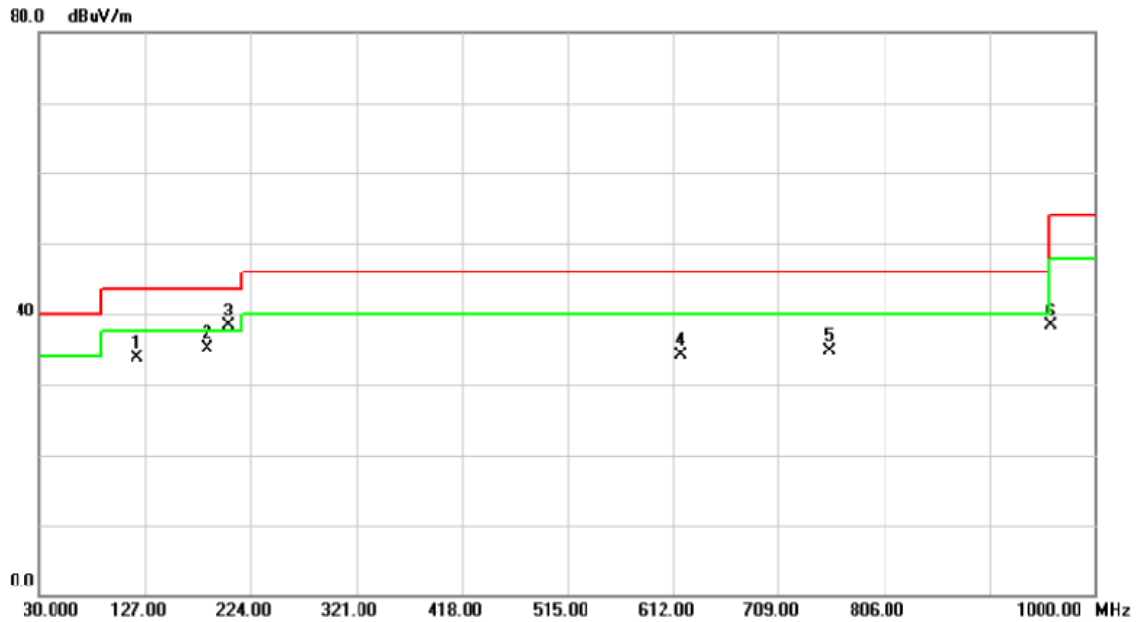

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dEuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	47.96	-14.19	33.77	43.50	-9.73	peak	
2		184.2300	48.59	-13.57	35.02	43.50	-8.48	peak	
3	*	203.6300	53.41	-15.14	38.27	43.50	-5.23	peak	
4		618.7900	40.97	-6.88	34.09	46.00	-11.91	peak	
5		756.5300	39.17	-4.40	34.77	46.00	-11.23	peak	
6		960.2300	38.51	-0.25	38.26	54.00	-15.74	peak	

Test Mode : Band 3/TX A Mode 5700MHz

Horizontal

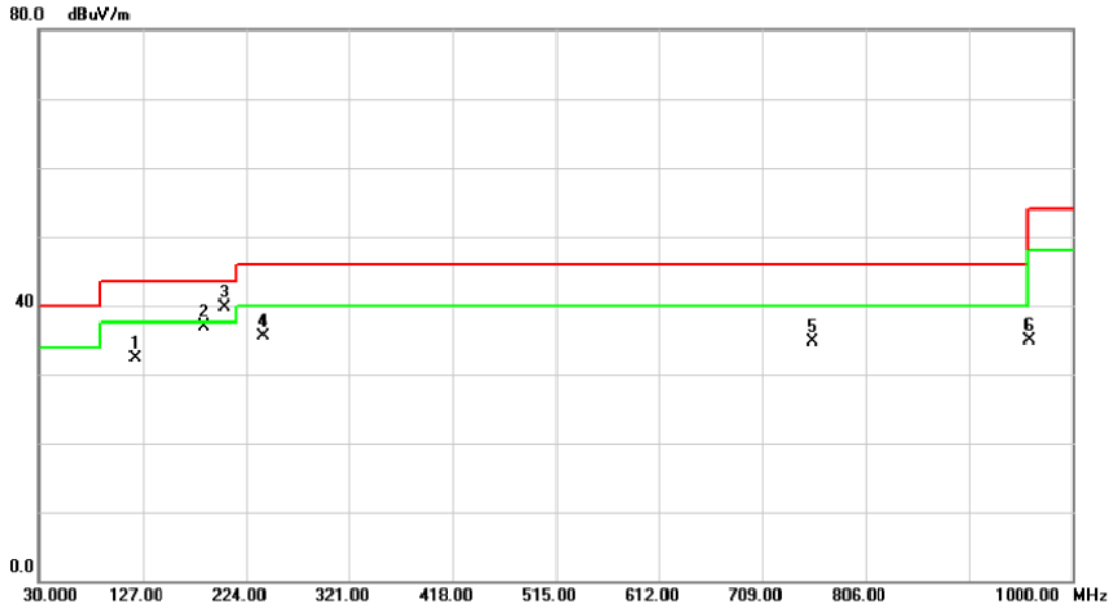


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	46.44	-14.19	32.25	43.50	-11.25	peak	
2		184.2300	50.45	-13.57	36.88	43.50	-6.62	peak	
3	*	203.6300	54.79	-15.14	39.65	43.50	-3.85	peak	
4		240.4900	49.55	-14.04	35.51	46.00	-10.49	peak	
5		756.5300	39.04	-4.40	34.64	46.00	-11.36	peak	
6		960.2300	35.17	-0.25	34.92	54.00	-19.08	peak	

ATTACHMENTD -RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis :	X
Test Mode :	Band 1/ TX A Mode 5180MHz


Vertical

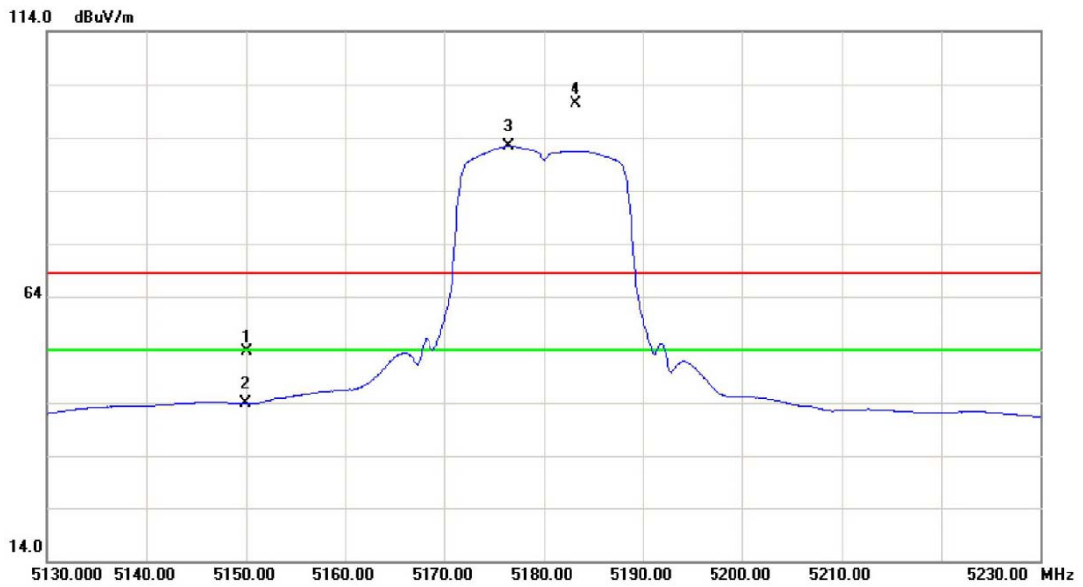

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	11.66	41.99	53.65	68.30	-14.65	peak	
2		5150.000	1.88	41.99	43.87	54.00	-10.13	AVG	
3	*	5176.400	50.23	42.10	92.33	54.00	38.33	AVG	Fundamental frequency, no limit
4	X	5183.300	58.18	42.13	100.31	68.30	32.01	peak	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	Band 1/ TX A Mode 5180MHz


Vertical

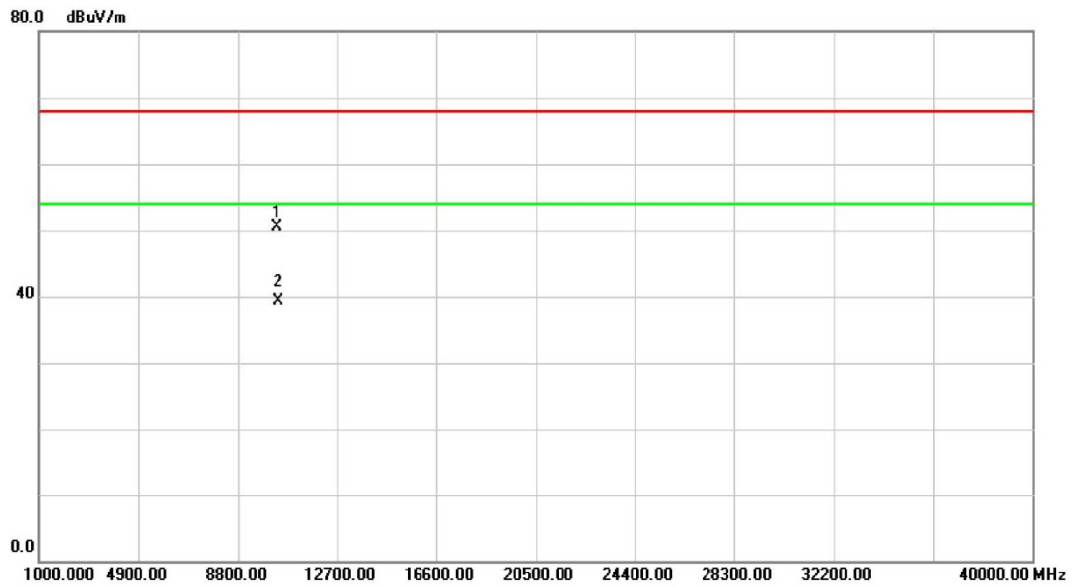

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10359.51	34.78	15.70	50.48	68.00	-17.52	peak	
2	*	10359.73	23.59	15.70	39.29	54.00	-14.71	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX A Mode 5180MHz


Horizontal

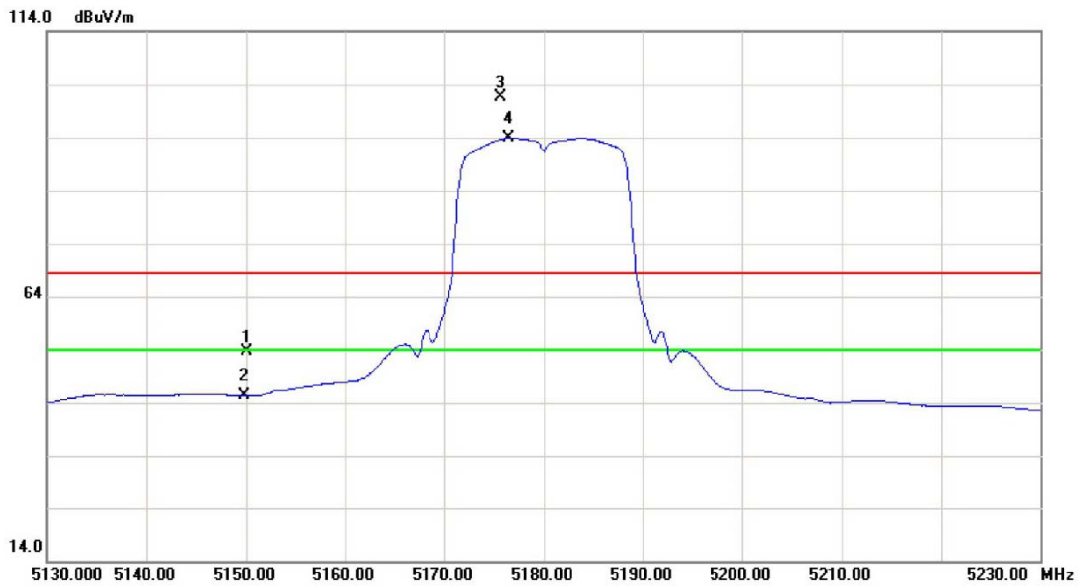

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	11.54	41.99	53.53	68.30	-14.77	peak	
2		5150.000	3.30	41.99	45.29	54.00	-8.71	AVG	
3	X	5175.700	59.63	42.09	101.72	68.30	33.42	peak	Fundamental frequency, no limit
4	*	5176.500	51.77	42.10	93.87	54.00	39.87	AVG	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	Band 1/ TX A Mode 5180MHz


Horizontal

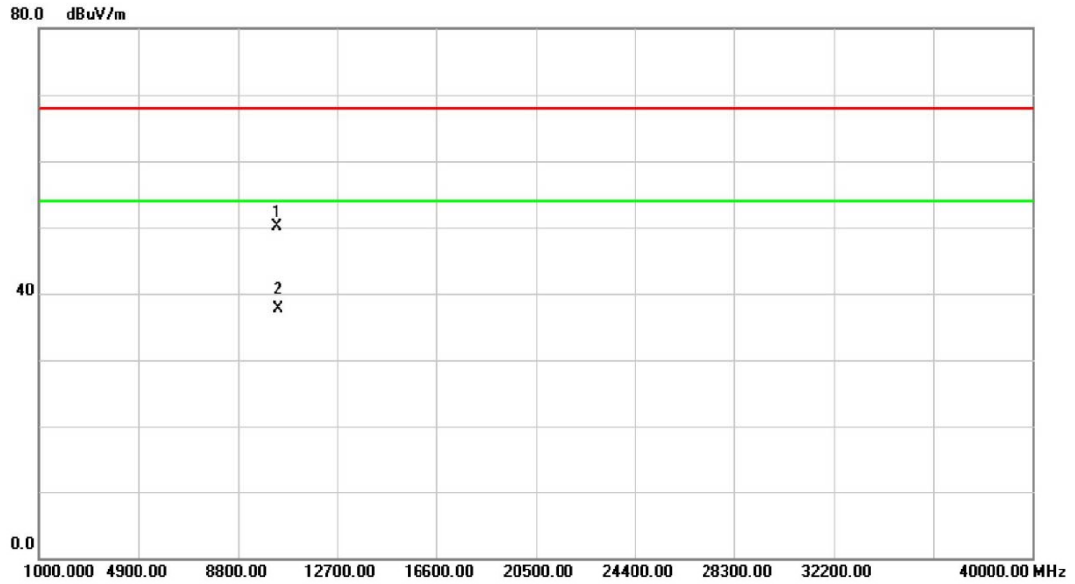

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10359.11	34.35	15.70	50.05	68.00	-17.95	peak	
2	*	10360.67	22.08	15.70	37.78	54.00	-16.22	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX A Mode 5200MHz


Vertical

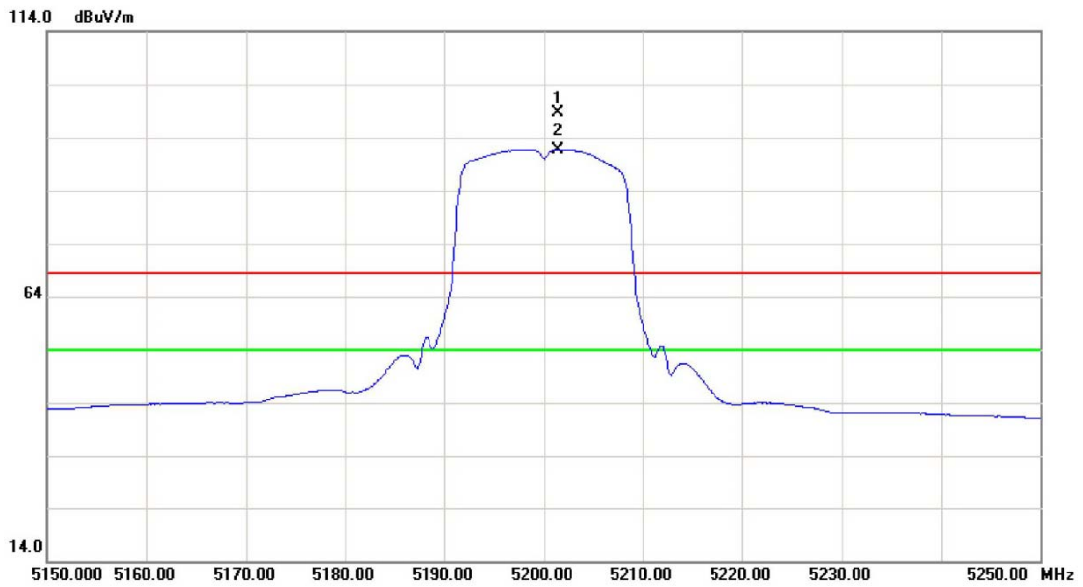

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5201.400	56.46	42.21	98.67	68.30	30.37	peak	Fundamental frequency, no limit
2	*	5201.400	49.48	42.21	91.69	54.00	37.69	AVG	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	Band 1/ TX A Mode 5200MHz


Vertical

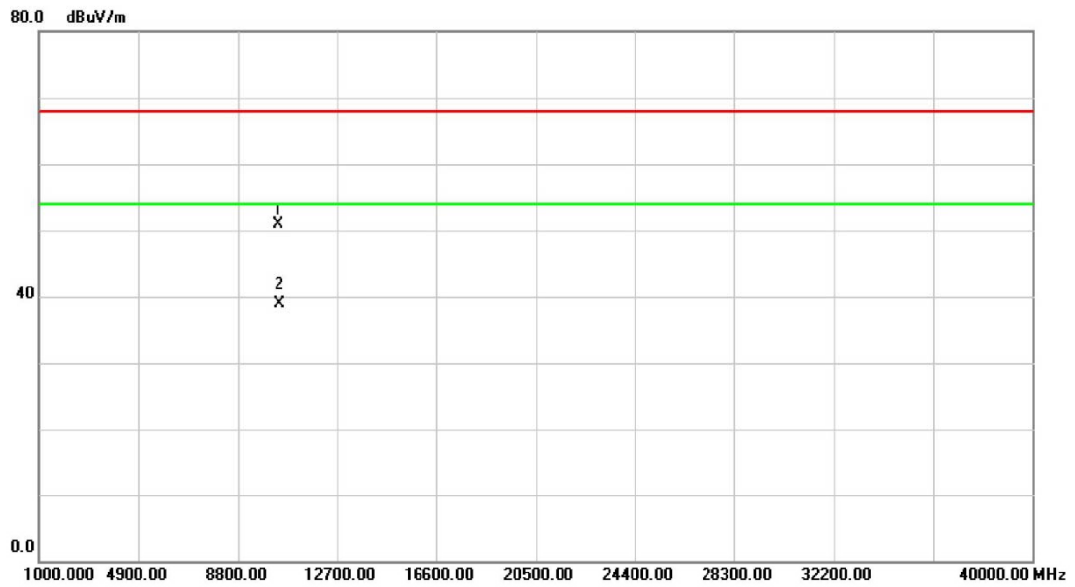

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10399.06	35.27	15.64	50.91	68.00	-17.09	peak	
2	*	10400.70	23.36	15.63	38.99	54.00	-15.01	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX A Mode 5200MHz


Horizontal

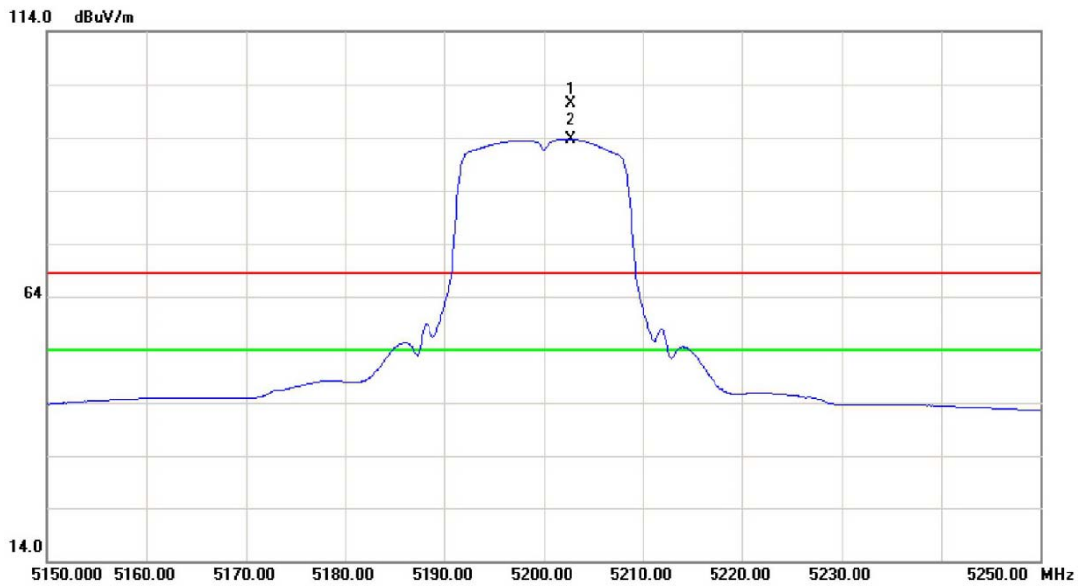

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5202.700	58.18	42.21	100.39	68.30	32.09	peak	Fundamental frequency, no limit
2	*	5202.700	51.42	42.21	93.63	54.00	39.63	AVG	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	Band 1/ TX A Mode 5200MHz

Horizontal

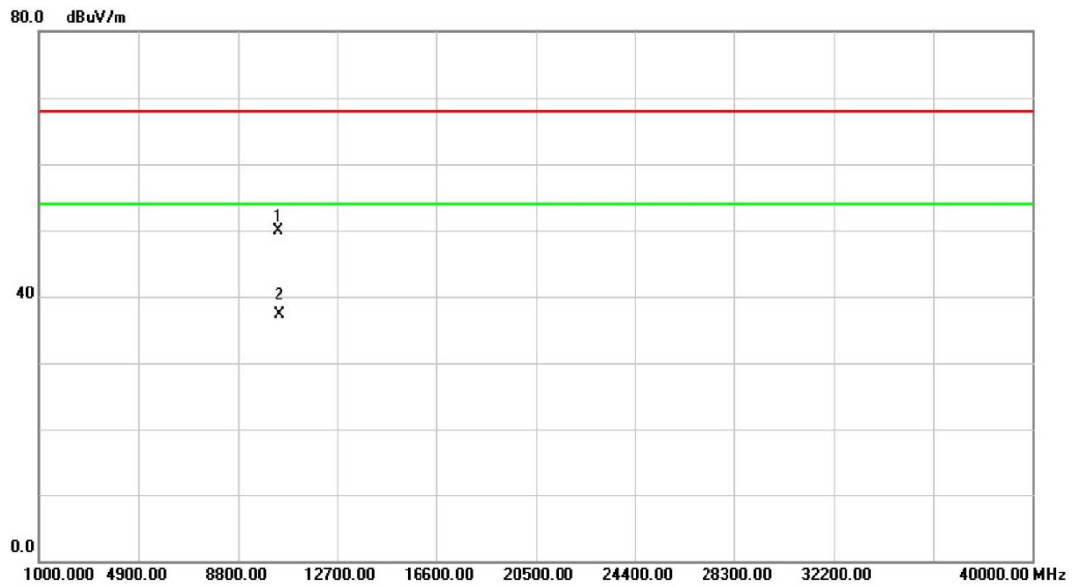

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10400.63	34.34	15.63	49.97	68.00	-18.03	peak	
2	*	10400.89	21.76	15.63	37.39	54.00	-16.61	AVG	