

TEST REPORT

Reference No...... : WTS13S1109303E
FCC ID : SJ8-TX110
Applicant..... : RDI Technology (Shenzhen) Co., Ltd.
Address..... : Building C1, Xintang Industrial Park East Baishixia, Fuyong, Baoan, Shenzhen, PRC.
Manufacturer : The same as above
Address..... : The same as above
Product Name..... : Digital Wireless Transmitter
Model No...... : TX110
Standards..... : FCC CFR47 Part 15 Section 15.247:2012
Date of Receipt sample : Nov.22, 2013
Date of Test : Nov.26,2013~Jan.15, 2013
Date of Issue..... : Jan.16, 2014
Test Result..... : **Pass ***

***Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.


Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Testing location: The same as above

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Maikou Zhang / Project Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	5
4.4 TEST FACILITY	5
4.5 TEST LOCATION.....	5
5 EQUIPMENT USED DURING TEST	6
5.1 EQUIPMENTS LIST	6
5.2 MEASUREMENT UNCERTAINTY	6
5.3 TEST EQUIPMENT CALIBRATION	6
6 CONDUCTED EMISSION	7
6.1 E.U.T. OPERATION	7
6.2 EUT SETUP.....	7
6.3 CONDUCTED EMISSION TEST RESULT	8
7 RADIATED SPURIOUS EMISSIONS.....	10
7.1 EUT OPERATION :.....	10
7.2 TEST SETUP	11
7.3 SPECTRUM ANALYZER SETUP	12
7.4 TEST PROCEDURE	13
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	13
7.6 SUMMARY OF TEST RESULTS	14
8 BAND EDGE MEASUREMENT	17
8.1 TEST RESULT:	18
9 20 DB BANDWIDTH MEASUREMENT	19
9.1 TEST PROCEDURE:	19
9.2 TEST RESULT:	19
10 MAXIMUM PEAK OUTPUT POWER	21
10.1 TEST PROCEDURE:.....	21
10.2 TEST RESULT:	21
11 HOPPING CHANNEL SEPARATION	24
11.1 TEST PROCEDURE:.....	24
11.2 TEST RESULT:	24
12 NUMBER OF HOPPING FREQUENCY.....	27
12.1 TEST PROCEDURE:.....	27
12.2 TEST RESULT:	27
13 DWELL TIME	28
13.1 TEST PROCEDURE:.....	28
13.2 TEST RESULT:	28
14 ANTENNA REQUIREMENT	31
15 RF EXPOSURE.....	32

15.1	REQUIREMENTS:.....	32
15.2	THE PROCEDURES / LIMIT	32
15.3	MPE CALCULATION METHOD	33
16	PHOTOGRAPHS – TEST SETUP	34
16.1	PHOTOGRAPH – RADIATION SPURIOUS EMISSION TEST SETUP.....	34
16.2	PHOTOGRAPH – CONDUCTED EMISSION TEST SETUP.....	35
17	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	36
17.1	EXTERNAL VIEW	36
17.2	EUT - INTERNAL VIEW	40

4 General Information

4.1 General Description of E.U.T.

Product Name	: Digital Wireless Transmitter
Model No.	: TX110
Operation Frequency	: 2408MHz ~ 2468MHz, 16 channels in total
Type of Modulation	: GFSK
Oscillator	: Crystal 16MHz
Antenna installation	: Monopole antenna
Antenna Gain	: 0dBi

4.2 Details of E.U.T.

Technical Data	: DC 9V, 600mA powered by adapter (Adapter Input: 100-240V~50/60Hz, 200mA)
Adapter	: Manufacturer: Csec M/N:CS6D090060FUF

4.3 Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2408	2	2412	3	2416	4	2420
5	2424	6	2428	7	2432	8	2436
9	2440	10	2444	11	2448	12	2452
13	2456	14	2460	15	2464	16	2468

4.4 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

4.5 Test Location

All the tests were performed at:
Waltek Services (Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen, China

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.18,2013	Sep.17,2014
2.	LISN	R&S	ENV216	101215	Nov.29,2013	Nov.28,2014
3.	Cable	Top	TYPE16(3.5M)	-	Sep.18,2013	Sep.17,2014
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.18,2013	Sep.17,2014
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.18,2013	Sep.17,2014
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.20,2013	Apr.19,2014
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.18,2013	Sep.17,2014
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.20,2013	Apr.19,2014
6	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr.07,2013	Apr.06,2014
7	Coaxial Cable (above 1GHz)	Top	1000MHZ-25GHZ	EW02014-7	Apr.20,2013	Apr.19,2014
8	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.20,2013	Apr.19,2014
Associated Equipment						
1	Camera	PANASONIC	XC203	-	-	-

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 4.74 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C

Humidity: 53 % RH

Atmospheric Pressure: 101.0kPa

EUT Operation:


The test was performed in normal linking mode with the camera, the test data were shown in the report.

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.2 EUT Setup

The EUT was placed on the test table in shielding room.

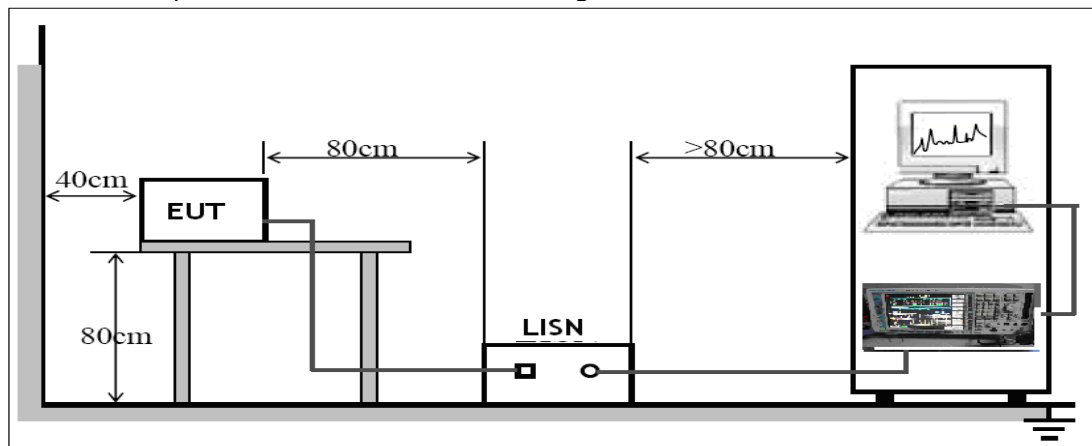


6.3 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Test mode: normal linking mode

Live line:

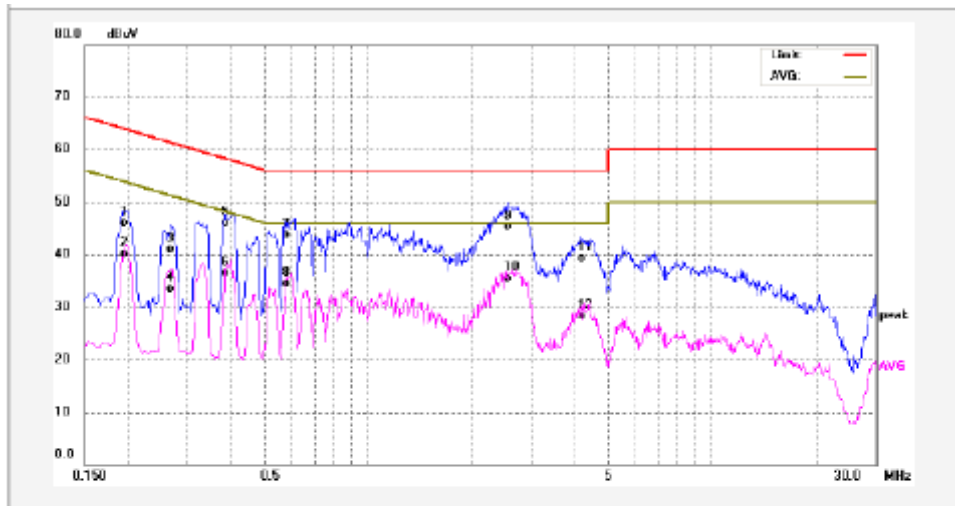

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1940	34.91	11.28	46.19	63.86	-17.67	QP	
2	0.1940	28.91	11.28	40.19	53.86	-13.67	AVG	
3	0.2700	29.64	11.30	40.94	61.12	-20.18	QP	
4	0.2700	22.22	11.30	33.52	51.12	-17.60	AVG	
5	0.3860	34.77	11.31	46.08	58.15	-12.07	QP	
6	0.3860	25.18	11.31	36.49	48.15	-11.66	AVG	
7	0.5820	32.29	11.32	43.61	56.00	-12.39	QP	
8	0.5820	23.25	11.32	34.57	46.00	-11.43	AVG	
9	2.5500	34.09	11.21	45.30	56.00	-10.70	QP	
10	2.5500	24.28	11.21	35.49	46.00	-10.51	AVG	
11	4.1620	28.01	11.23	39.24	56.00	-16.76	QP	
12	4.1620	17.01	11.23	28.24	46.00	-17.76	AVG	

Neutral line:

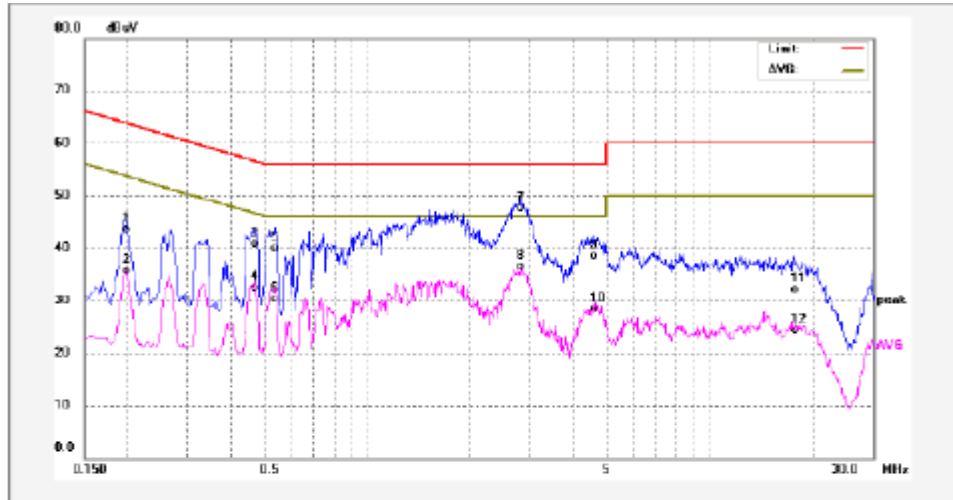

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1980	32.27	11.29	43.56	63.69	-20.13	QP	
2	0.1980	24.32	11.29	35.61	53.69	-18.08	AVG	
3	0.4700	29.36	11.31	40.67	56.51	-15.84	QP	
4	0.4700	21.10	11.31	32.41	46.51	-14.10	AVG	
5	0.5380	28.62	11.32	39.94	56.00	-16.06	QP	
6	0.5380	18.98	11.32	30.30	46.00	-15.70	AVG	
7	2.7980	36.29	11.21	47.50	56.00	-8.50	QP	
8	2.7980	25.36	11.21	36.57	46.00	-9.43	AVG	
9	4.5580	27.30	11.23	38.53	56.00	-17.47	QP	
10	4.5580	17.04	11.23	28.27	46.00	-17.73	AVG	
11	17.6220	20.63	11.48	32.11	60.00	-27.89	QP	
12	17.6220	12.87	11.48	24.35	50.00	-25.65	AVG	

7 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation :

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 101.9kPa


Operation Mode:

The EUT was tested in Transmitting mode with the camera. The test data were shown as follow.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

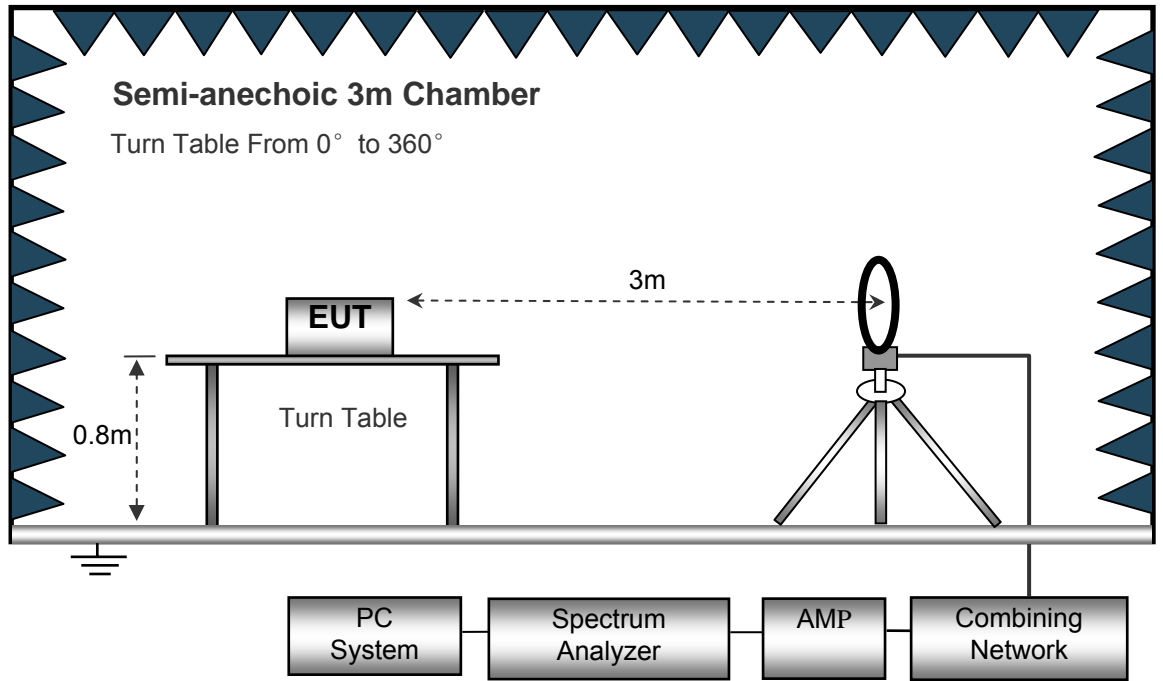

The test setup for emission measurement from 30 MHz to 1 GHz.

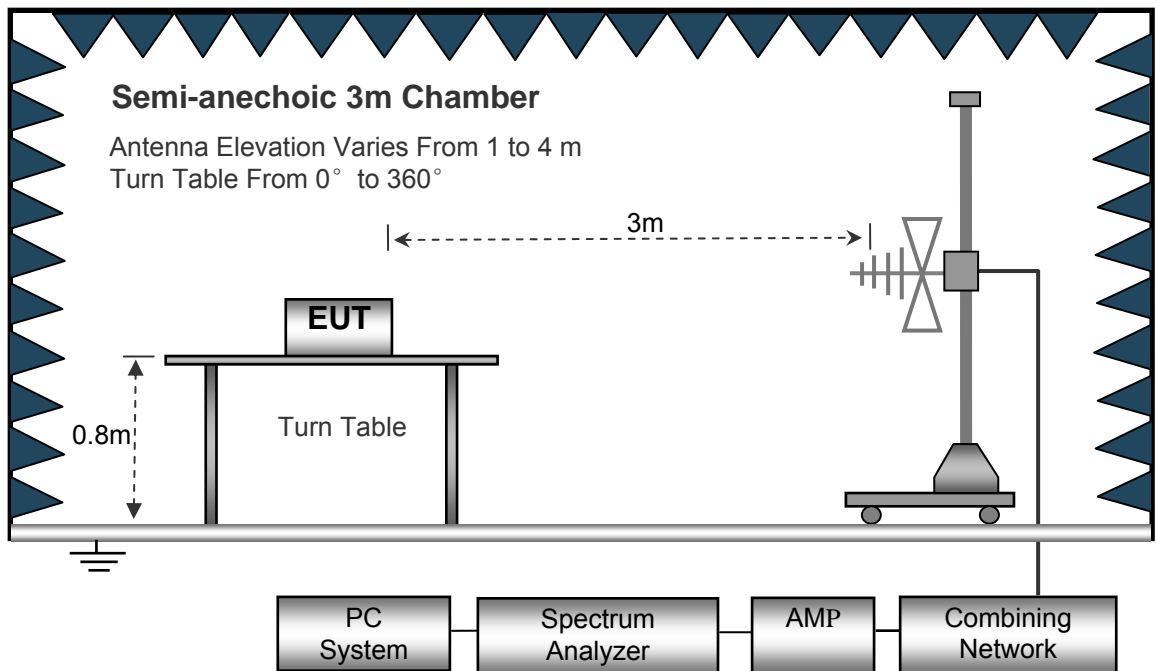

The test setup for emission measurement above 1 GHz.

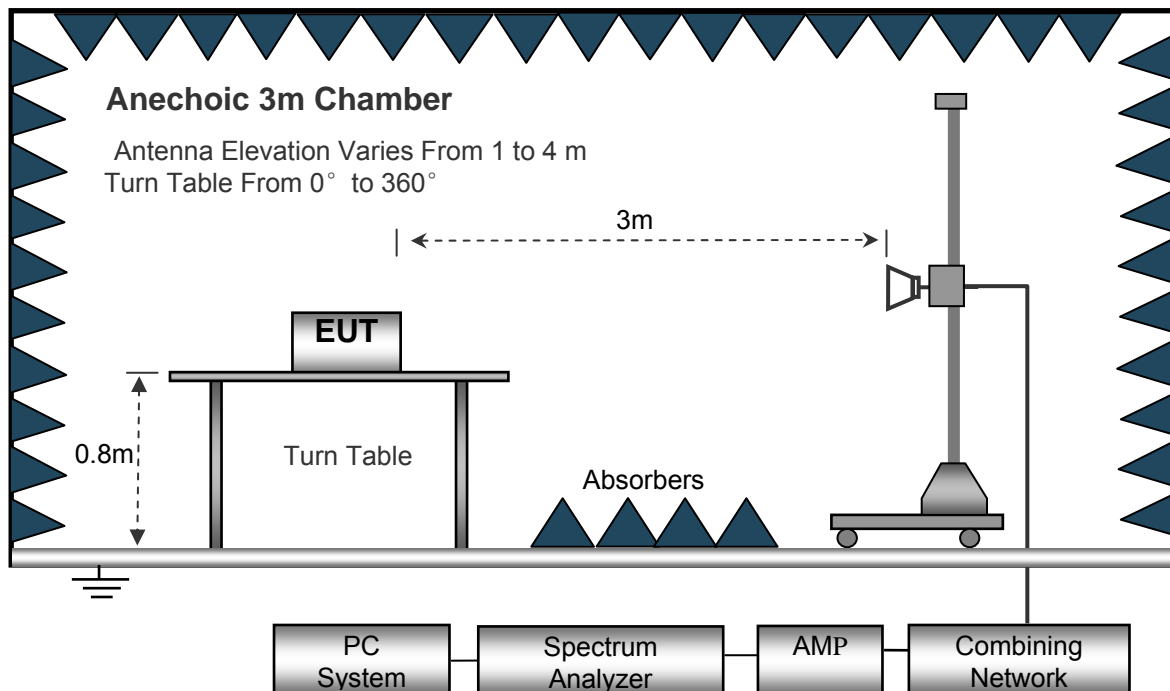

7.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 16MHz to 25000MHz.

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency: Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Test mode: transmitting mode

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part	
				Height	Polar			15.247/209/205	Limit
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
Low Channel 2408MHz									
342.50	18.71	PK	176	1.4	H	17.01	36.72	46.00	-9.28
342.50	21.22	PK	144	1.9	V	17.01	38.23	46.00	-7.77
4816.00	54.38	PK	79	1.7	V	-1.06	53.32	74.00	-20.68
4816.00	47.56	Ave	79	1.7	V	-1.06	46.50	54.00	-7.50
7224.00	49.53	PK	83	1.3	V	1.33	50.86	74.00	-23.14
7224.00	44.79	Ave	83	1.3	V	1.33	46.12	54.00	-7.88
2348.71	46.12	PK	328	1.3	V	-13.19	32.93	74.00	-41.07
2348.71	38.53	Ave	328	1.3	V	-13.19	25.34	54.00	-28.66
2382.62	44.42	PK	22	1.2	V	-13.14	31.28	74.00	-42.72
2382.62	39.38	Ave	22	1.2	V	-13.14	26.24	54.00	-27.76
2495.17	44.38	PK	80	1.3	H	-13.08	31.30	74.00	-42.70
2495.17	40.82	Ave	80	1.3	H	-13.08	27.74	54.00	-26.26

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
Middle Channel 2440MHz									
342.45	18.12	PK	93	1.2	H	17.01	35.13	46.00	-10.87
342.45	19.13	PK	173	1.8	V	17.01	36.14	46.00	-9.86
4880.00	55.23	PK	136	1.5	V	-0.62	54.61	74.00	-19.39
4880.00	48.37	Ave	136	1.5	V	-0.62	47.75	54.00	-6.25
7320.00	49.32	PK	81	2.0	V	2.21	51.53	74.00	-22.47
7320.00	44.13	Ave	81	2.0	V	2.21	46.34	54.00	-7.66
2318.44	43.63	PK	163	1.4	H	-13.19	30.44	74.00	-43.56
2318.44	38.70	Ave	163	1.4	H	-13.19	25.51	54.00	-28.49
2372.36	48.97	PK	25	1.2	V	-13.14	35.83	74.00	-38.17
2372.36	38.01	Ave	25	1.2	V	-13.14	24.87	54.00	-29.13
2495.52	42.33	PK	297	1.9	V	-13.08	29.25	74.00	-44.75
2495.52	40.65	Ave	297	1.9	V	-13.08	27.57	54.00	-26.43

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
High Channel 2468MHz									
342.47	21.90	PK	263	1.0	H	17.01	38.93	46.00	-7.07
342.47	23.72	PK	183	1.1	V	17.01	40.73	46.00	-5.27
4936.00	54.37	PK	77	1.2	V	-0.24	54.13	74.00	-19.87
4936.00	46.71	Ave	77	1.2	V	-0.24	46.47	54.00	-7.53
7404.00	49.84	PK	131	1.5	V	2.84	52.68	74.00	-21.32
7404.00	43.52	Ave	131	1.5	V	2.84	46.36	54.00	-7.64
2349.50	44.09	PK	29	1.6	H	-13.19	30.90	74.00	-43.10
2349.50	38.46	Ave	29	1.6	H	-13.19	25.27	54.00	-28.73
2383.12	46.55	PK	331	1.4	V	-13.14	33.41	74.00	-40.59
2383.12	39.10	Ave	331	1.4	V	-13.14	25.96	54.00	-28.04
2492.33	43.54	PK	109	1.4	H	-13.08	30.46	74.00	-43.54
2492.33	39.14	Ave	109	1.4	H	-13.08	26.06	54.00	-27.94

Test Frequency :Above 18GHz


The measurements were more than 20 dB below the limit and not reported

8 Band Edge Measurement


Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	DA 00-705
Measurement Distance:	3m
Limit:	40.0 dBuV/m between 30MHz & 88MHz; 43.5 dBuV/m between 88MHz & 216MHz; 46.0 dBuV/m between 216MHz & 960MHz; 54.0 dBuV/m above 960MHz. 74.0 dBuV/m for peak above 1GHz 54.0 dBuV/m for AVG above 1GHz
Detector:	For Peak value: RBW = 1 MHz for $f \geq 1$ GHz VBW \geq RBW; Sweep = auto Detector function = peak Trace = max hold For AVG value: RBW = 1 MHz for $f \geq 1$ GHz VBW = 10Hz; Sweep = auto Detector function d= AVG Trace = max hold
Test Mode:	Transmitting

8.1 Test Result:

Test result plots shown as follows:

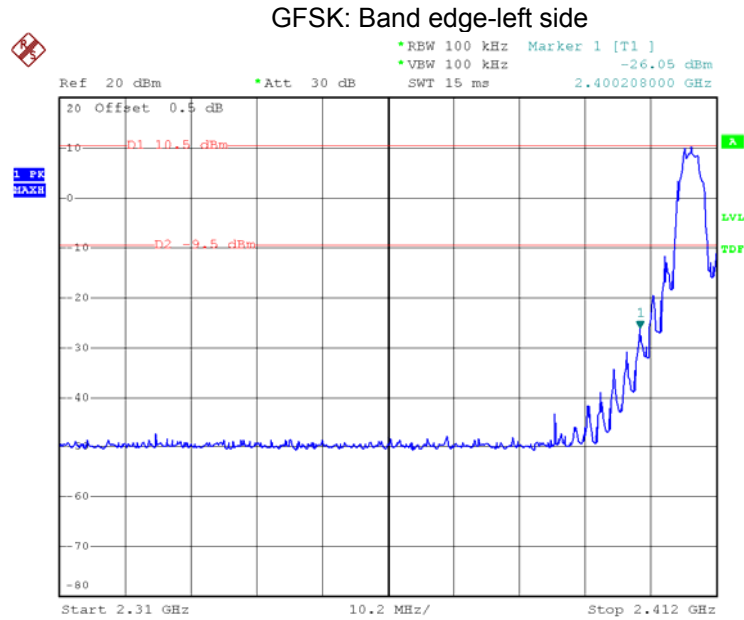

1
Date: 4.DEC.2013 09:48:11

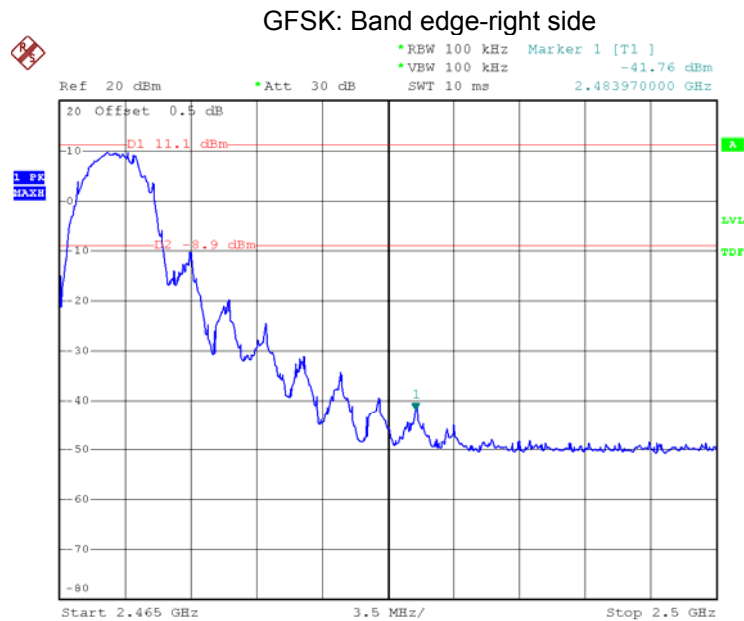

1
Date: 4.DEC.2013 09:45:19

9 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247
 Test Method: DA 00-705
 Test Mode: Test in fixing operating frequency at low, Middle, high channel.


9.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 100kHz

9.2 Test Result:


Test Channel	Bandwidth
Low	5.052MHz
Middle	5.088MHz
High	4.980MHz

Test result plot as follows:

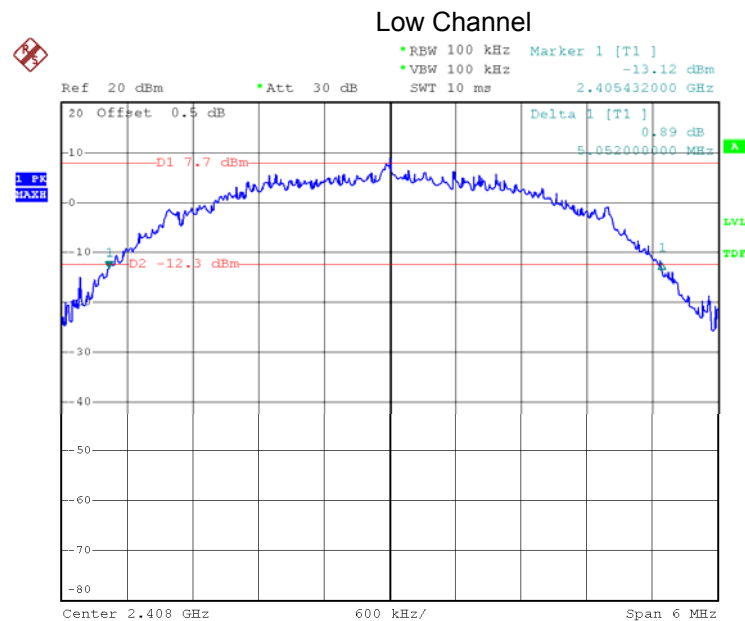


1

Date: 4.DEC.2013 09:32:12

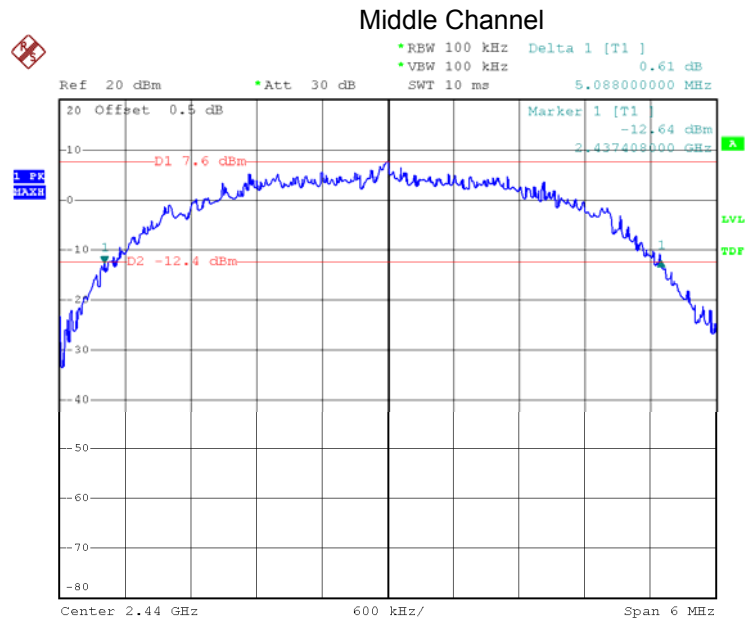

1
Date: 4.DEC.2013 09:15:35

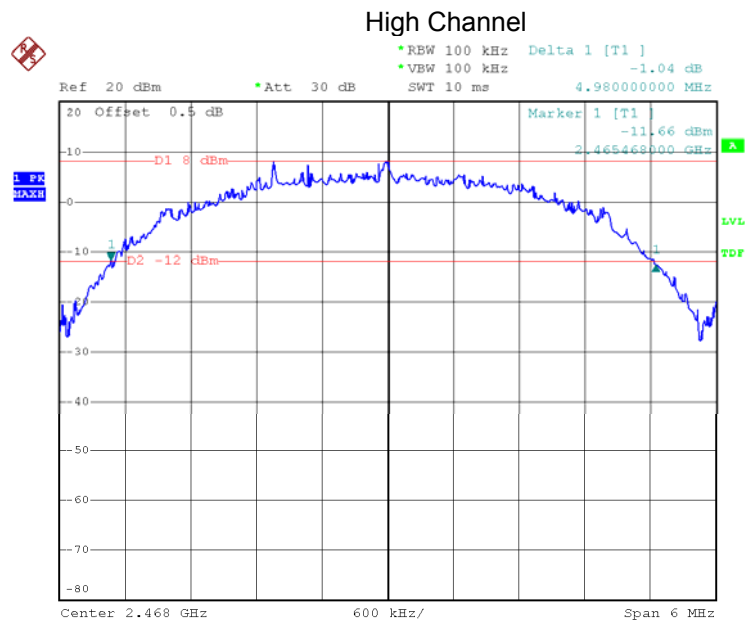

1
Date: 4.DEC.2013 09:02:57

10 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 0.125watts (20.97 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.


10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 10MHz. VBW = 10MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


10.2 Test Result:

Test Channel	Output Power (dBm)	Limit (dBm)
Low	15.34	20.97
Middle	16.05	20.97
High	15.61	20.97

Test result plot as follows:

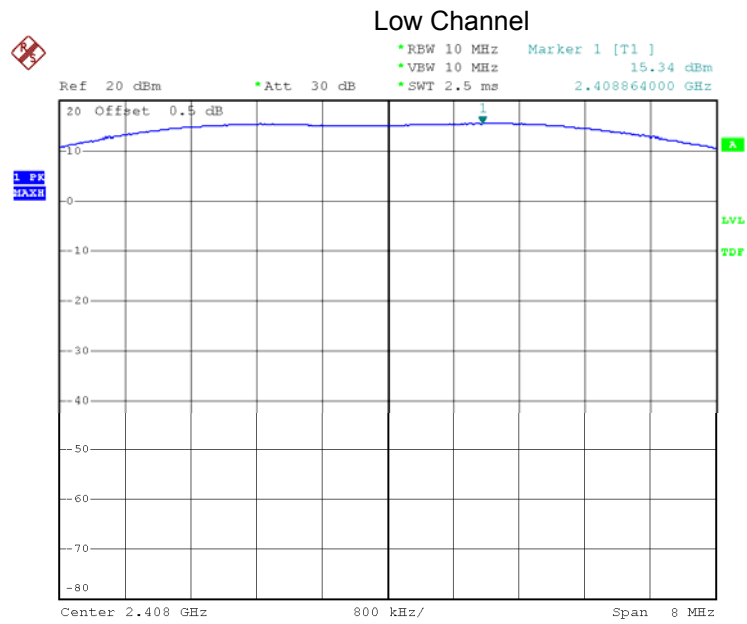


1
Date: 4.DEC.2013 08:45:15

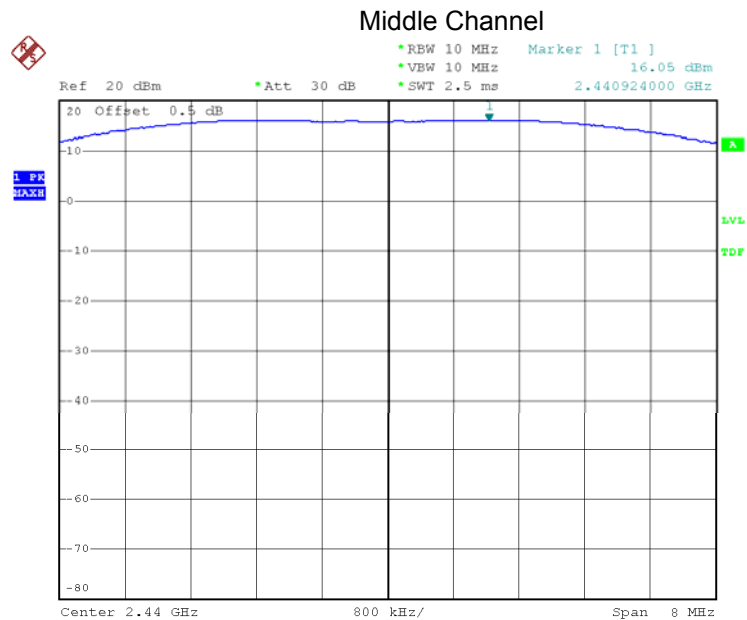

1
Date: 4.DEC.2013 08:43:12

High Channel

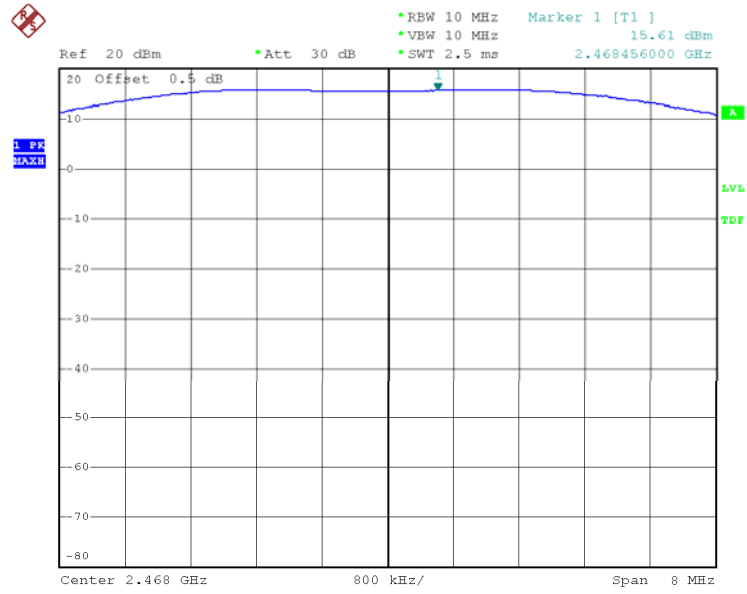

1

Date: 4.DEC.2013 08:47:06

11 Hopping Channel Separation

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Limit: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.

Test Mode: Test in hopping transmitting operating mode.


11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 100kHz , Span = 8MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


11.2 Test Result:

Test Channel	Separation (MHz)	Result
Low	4.01	PASS
Middle	4.00	PASS
High	4.00	PASS

Test result plot as follows:

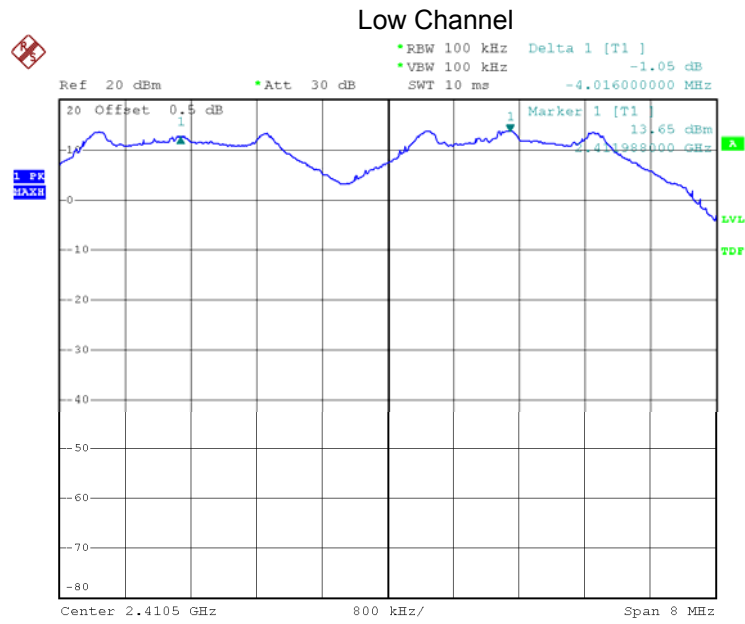


1
Date: 5.DEC.2013 15:43:19

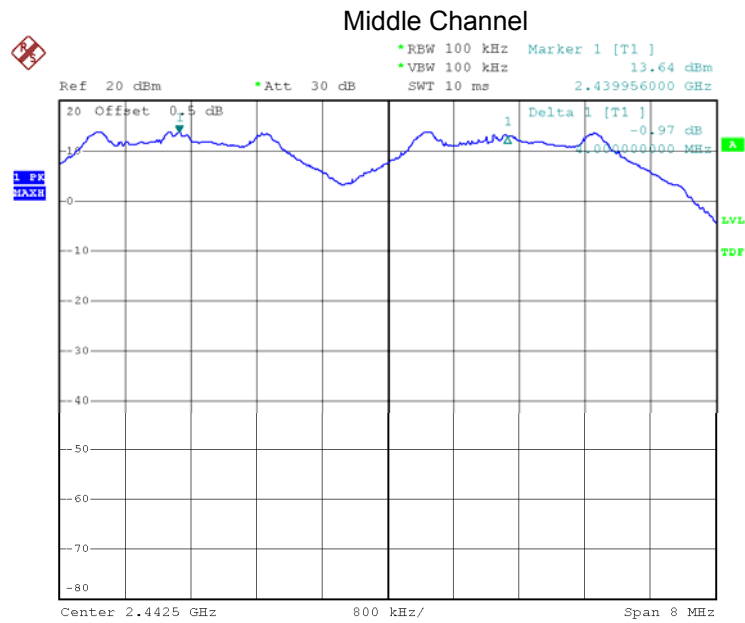

1
Date: 5.DEC.2013 15:46:25

High Channel

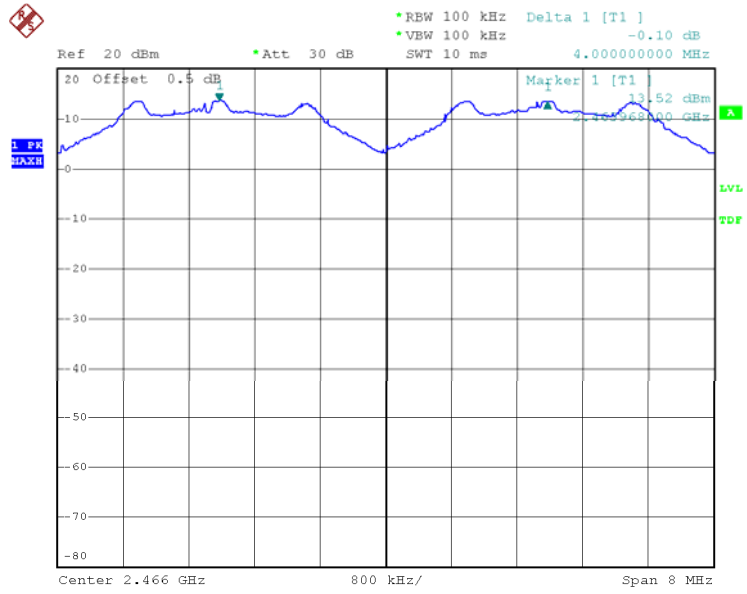

1
Date: 5.DEC.2013 15:51:24

12 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

12.2 Test Result:

Total Channels are 16 Channels.

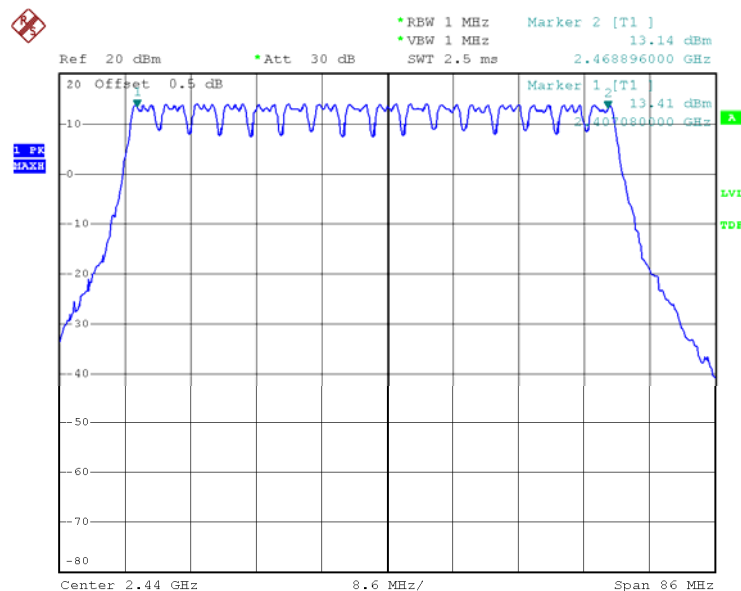

1

Date: 5.DEC.2013 15:37:30

13 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

13.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. Centred on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 1MHz.Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.2 Test Result:

The test period: $T = 0.4(s) * 16 = 6.4 (s)$

So, the Dwell Time can be calculated as follows:


Dwell Time = $7(\text{times})/0.816(s)*2.340(\text{ms})*6.4(s)=0.1285(s)$

Frequency	Mkr Delta(ms)	Dwell Time(s)	Limits(s)	Result
2408MHz	2.340	0.1285	0.400	Pass


Note :

The Low Channel, Middle Channel, High Channel were tested, the low channel data is the worst, And were recorded.


The test Mkr Delta is once pulse time.

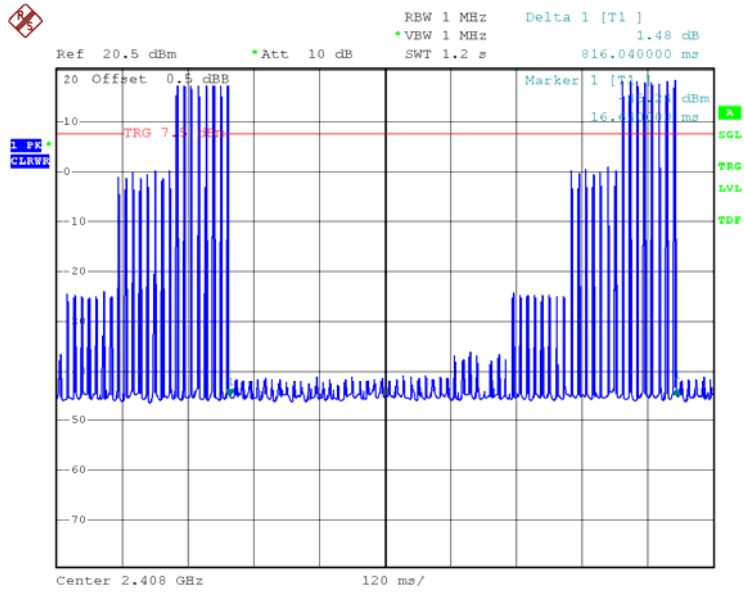

1
Date: 4.DEC.2013 12:51:58

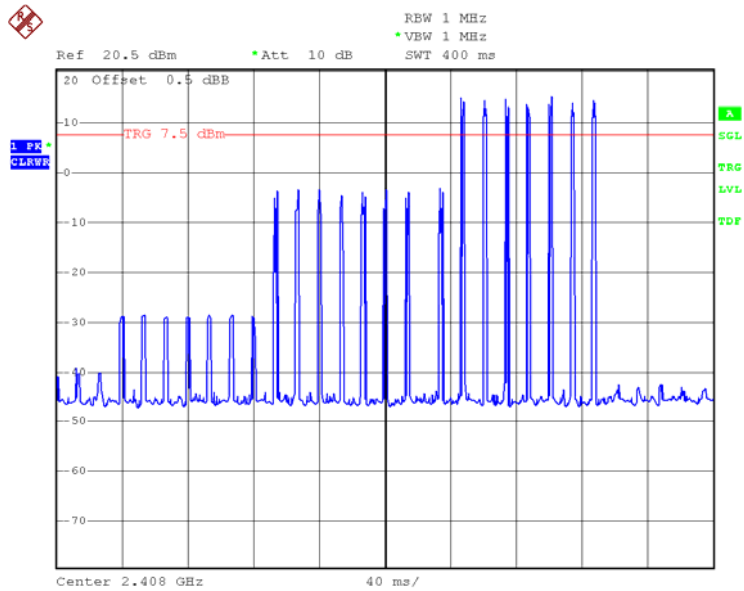

1
Date: 4.DEC.2013 12:54:27

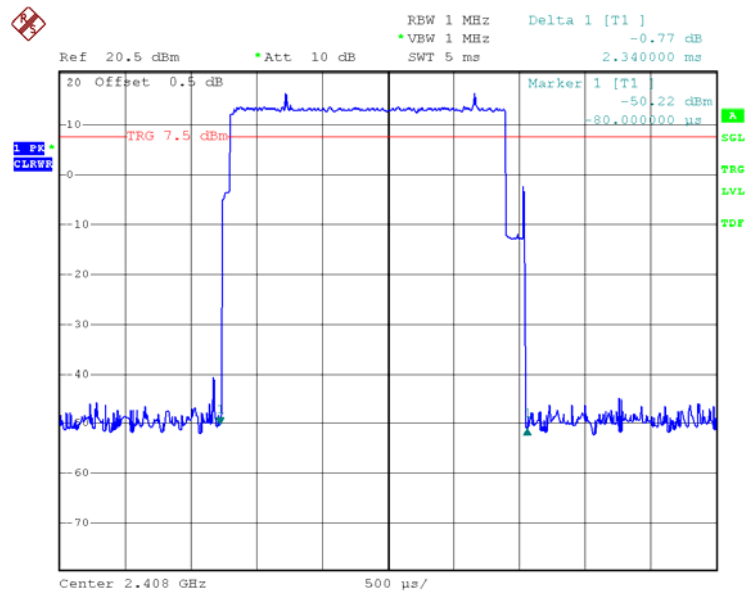

1
Date: 4.DEC.2013 12:57:02

14 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a Monopole antenna with RP SMA connector(The whorl is non-standard, it only apply to this model), fulfil the requirement of this section.

15 RF Exposure

Test Requirement: FCC Part 1.1307

Test Mode: The EUT work in test mode(Tx).

15.1 Requirements:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

15.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

15.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$


From the peak EUT RF output power, the minimum mobile separation distance, $d=0.2\text{m}$, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
1.000	16.05	40.272	0.0801	1


16 Photographs – Test Setup

16.1 Photograph – Radiation Spurious Emission Test Setup

Below 30MHz

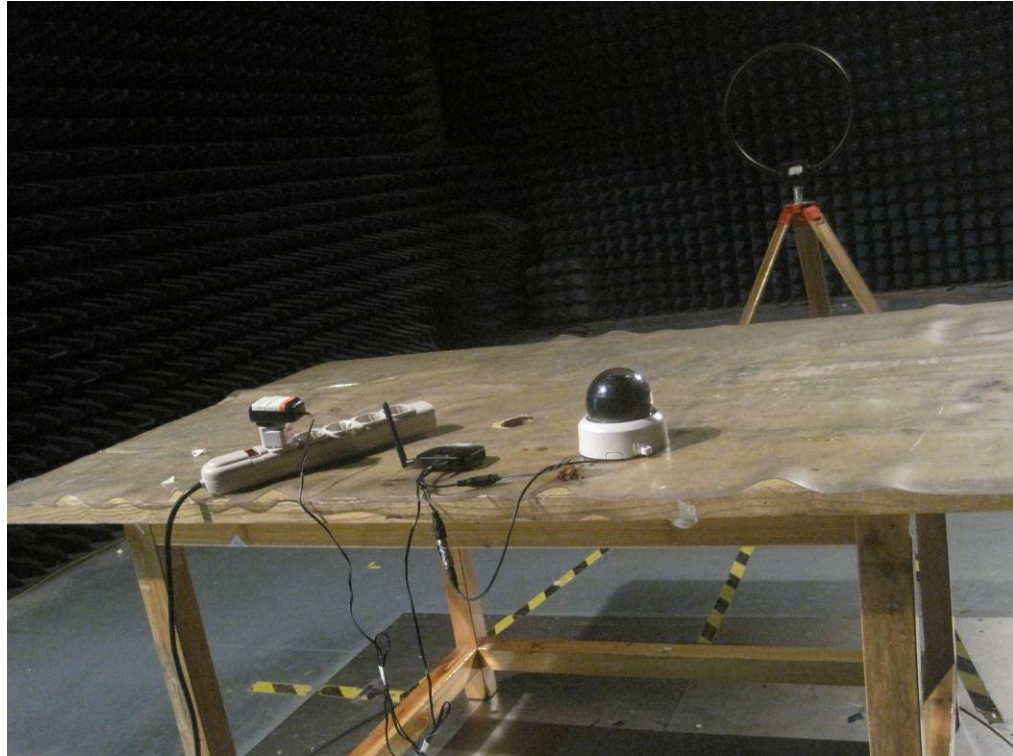

30MHz-1GHz

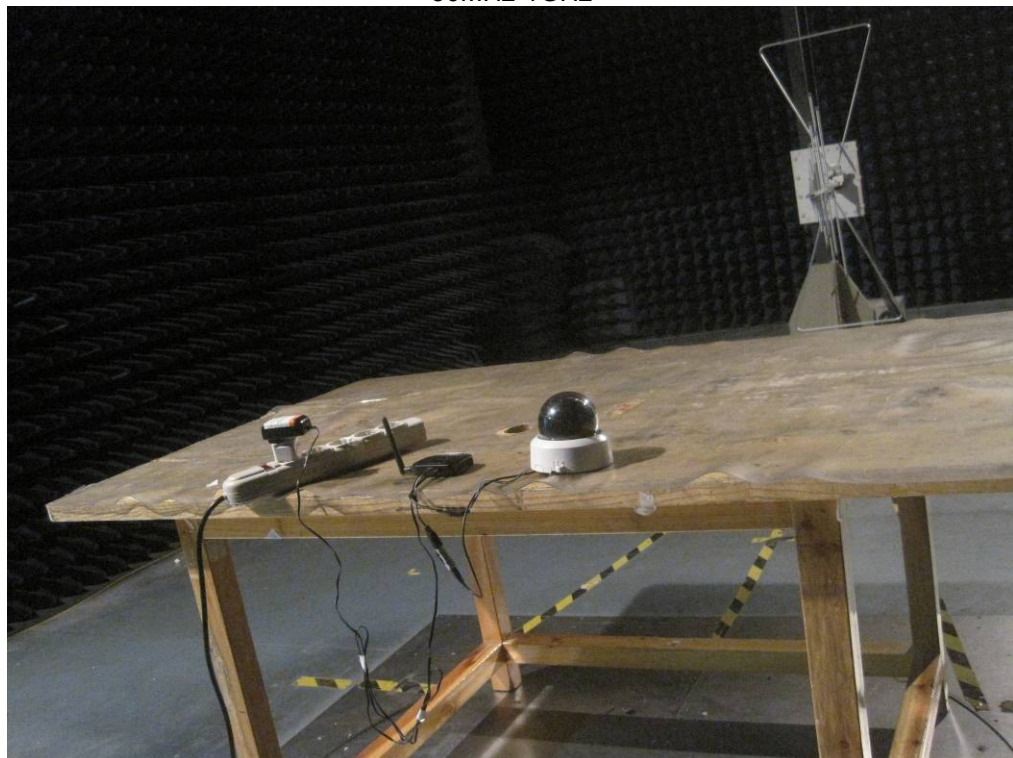

Above 1GHz



16.2 Photograph – Conducted Emission Test Setup



17 Photographs - Constructional Details

17.1 External View













17.2 EUT - Internal View



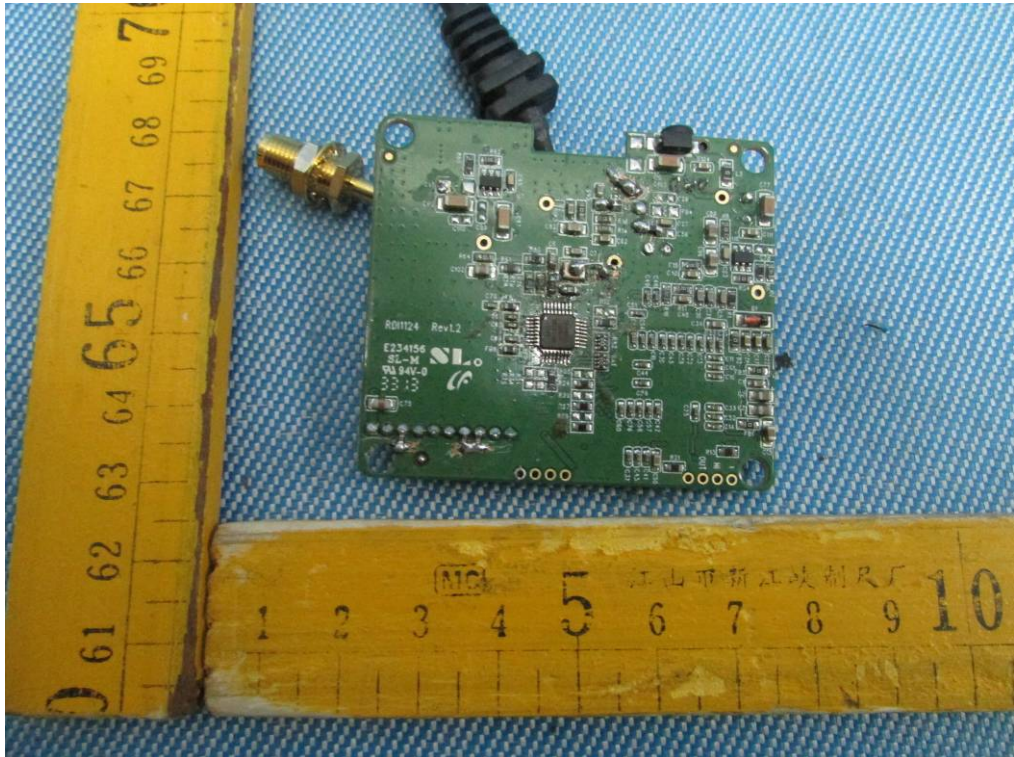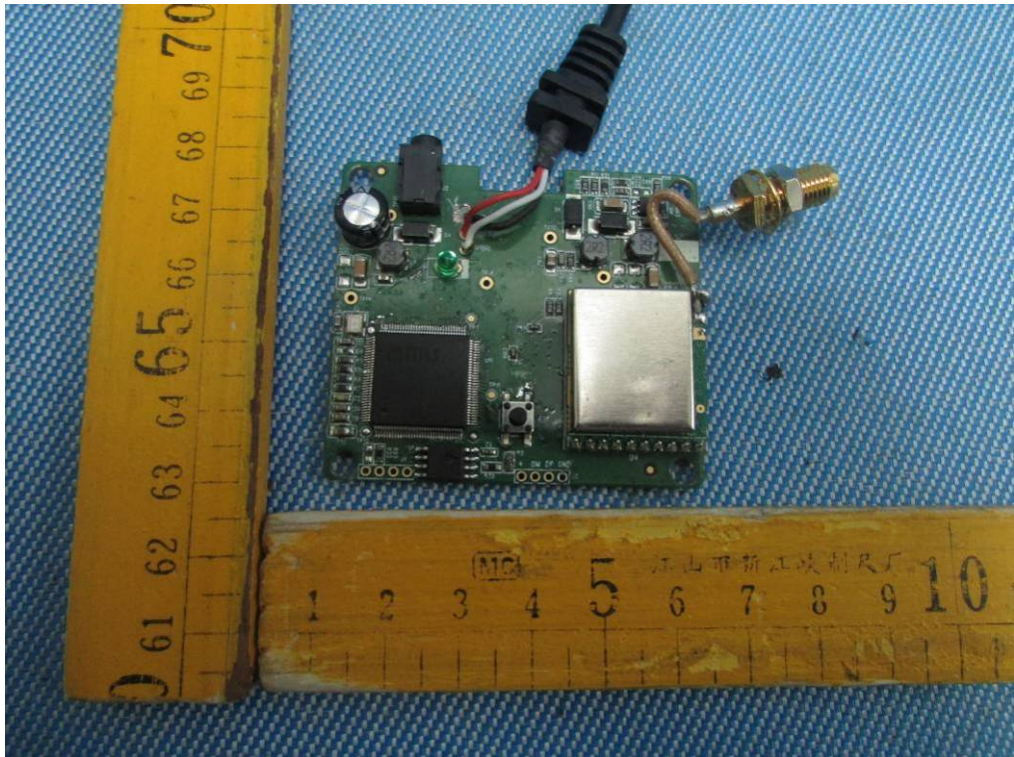

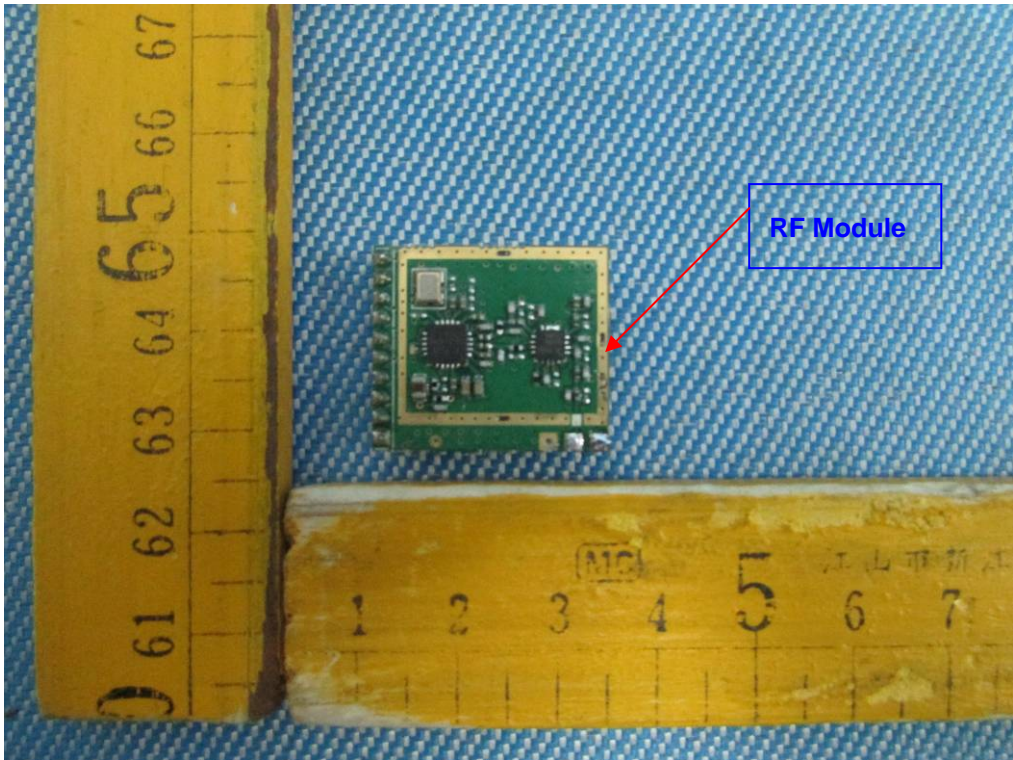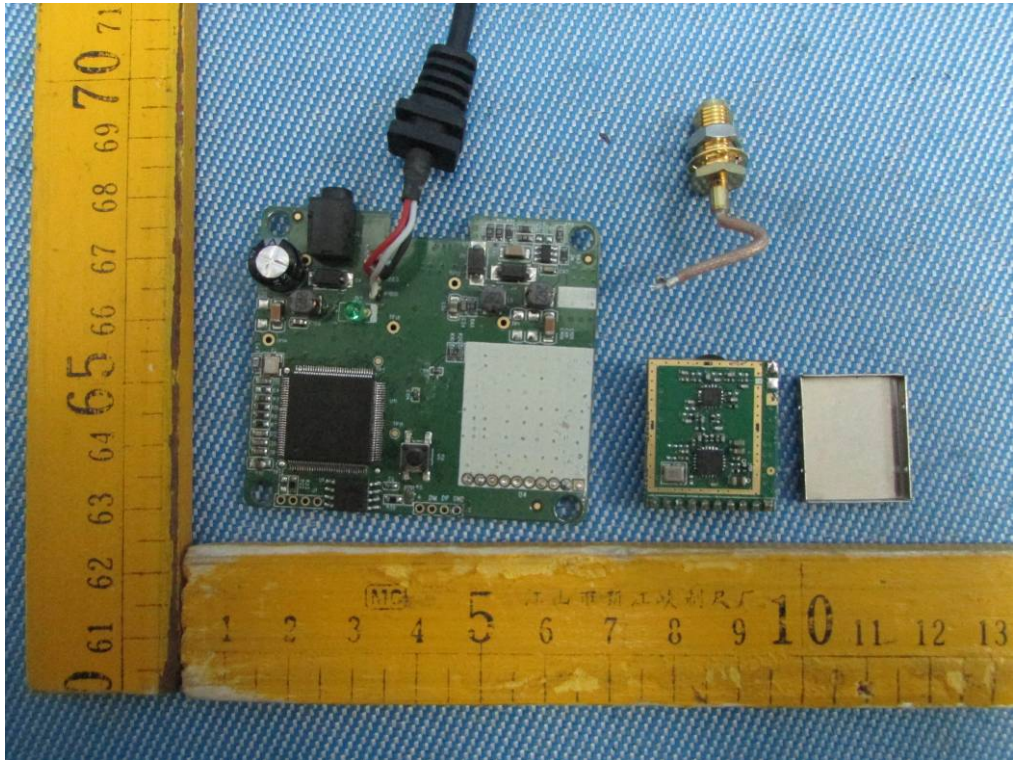





=====
===== End of Test Report =====
=====