



Report No.: SZ11030057E01
TESTING
CNAS L3572

47 CFR PART 15 C - BLUETOOTH

TEST REPORT

Issued to

PLANEX COMMUNICATIONS INC.
F Nissei Ebisu Bldg 2F. 16-3 Higashi 3-chome, Shibuya-ku,
Tokyo 150-0011. Japan (PI) - Italy

For

Bluetooth Mini Phone

Model Name: BT-Phone01
Brand Name: N/A
FCC ID: SJ9BT-PHONE01
Test Rule: 47 CFR Part 15 Subpart C
Test date: March 11,2011 – March 28, 2011

by
Shenzhen Morlab Communications Technology Co., Ltd.

Tested by Tian Junjie
Tian Junjie
Date 2011.3.31



Review by Huang Pulong
Huang Pulong
Date 2011.3.31

CTIA Authorized Test Lab
LAB CODE 20081223-00

IEEE 1725 OTA

OFTA

電訊管理局



GCF[®]
Official Observer of
Global Certification Forum

Bluetooth[®]
BQTF

FCC
Reg. No.
741109

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced either in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

TABLE OF CONTENTS

1.	GENERAL INFORMATION	4
1.1	EUT Description	4
1.2	Test Standards and Results	5
1.3	Facilities and Accreditations.....	6
1.3.1	Facilities	6
1.3.2	Test Environment Conditions.....	6
2.	47 CFR PART 15C REQUIREMENTS	7
2.1	Number of Hopping Frequency.....	7
2.1.1	Requirement	7
2.1.2	Test Description	7
2.1.3	Test Result.....	7
2.2	Peak Output Power	10
2.2.1	Requirement	10
2.2.2	Test Description	10
2.2.3	Test Result.....	10
2.3	20dB Bandwidth	17
2.3.1	Definition	17
2.3.2	Test Description	17
2.3.3	Test Result.....	17
2.4	Carried Frequency Separation.....	24
2.4.1	Definition	24
2.4.2	Test Description	24
2.4.3	Test Result.....	24
2.5	Time of Occupancy (Dwell time).....	26
2.5.1	Requirement	26
2.5.2	Test Description	26
2.5.3	Test Result.....	26
2.6	Conducted Spurious Emissions	31
2.6.1	Requirement	31
2.6.2	Test Description	31
2.6.3	Test Result.....	31



2.7 Band Edge	41
2.7.1 Requirement	41
2.7.2 Test Description	41
2.7.3 Test Result.....	42
2.8 Conducted Emission.....	50
2.8.1 Requirement.....	50
2.8.2 Test Description	50
2.8.3 Test Result.....	51
2.9 Radiated Emission	52
2.9.1 Requirement.....	52
2.9.2 Test Description	52
2.9.3 Test Result.....	53

Change History		
Issue	Date	Reason for change
1.0	March 28, 2011	First edition

1. GENERAL INFORMATION

1.1 EUT Description

EUT Type: Bluetooth Mini Phone
Serial No.....: (n.a, marked #1 by test site)
Hardware Version: N/A
Software Version: N/A
Applicant: PLANEX COMMUNICATIONS INC.
F Nissei Ebisu Bldg 2F. 16-3 Higashi 3-chome, Shibuya-ku, Tokyo
150-0011. Japan
Manufacturer: PLANEX COMMUNICATIONS INC.
F Nissei Ebisu Bldg 2F. 16-3 Higashi 3-chome, Shibuya-ku, Tokyo
150-0011. Japan
Frequency Range.....: The frequency range used is 2402MHz - 2480MHz (79 channels, at
intervals of 1MHz);
The frequency block is 2400MHz to 2483.5MHz.
Modulation Type.....: Bluetooth: FHSS (GFSK(1Mbps), $\Pi/4$ -DQPSK(EDR 2Mbps),
8-DPSK(EDR 3Mbps))
Power Supply: Battery
Model Name: BTR1238
Brand name: N/A
Capacitance: 200mAh
Rated voltage: 3.7V

Note 1: The EUT is a Bluetooth Mini Phone, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-09 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC/IC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	15.247(a)	Number of Hopping Frequency	PASS
2	15.247(b)	Peak Output Power	PASS
3	15.247(a)	20dB Bandwidth	PASS
4	15.247(a)	Carrier Frequency Separation	PASS
5	15.247(a)	Time of Occupancy (Dwell time)	PASS
6	15.247(c)	Conducted Spurious Emission	PASS
7	15.247(c)	Band Edge	PASS
8	15.207	Conducted Emission	N.A(note1)
9	15.209 15.247(c)	Radiated Emission	PASS

NOTE1: Because the EUT have not the Charger.

NOTE2: The tests were performed according to the method of measurements prescribed in DA-00-705.



1.3 Facilities and Accreditations

1.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 15C REQUIREMENTS


2.1 Number of Hopping Frequency

2.1.1 Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.1.2 Test Description

A. Test Setup:

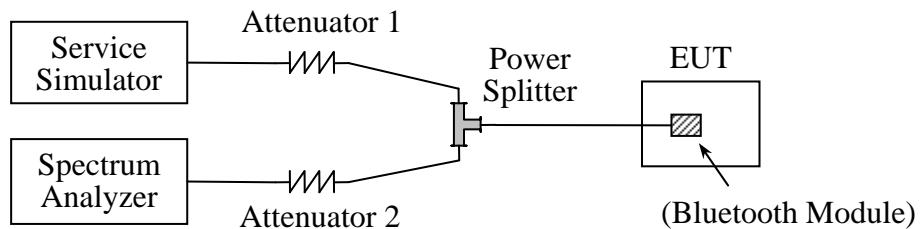

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:


Description	Manufacturer	Model	Serial No.	Cal. Date
Service Simulator	Agilent	E5515C	GB43130131	2010.09
Spectrum Analyzer	Agilent	E7405A	US44210471	2010.09
Power Splitter	Weinschel	1506A	NW521	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)

2.1.3 Test Result


The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	15	Plot A	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	Plot B	PASS
8-DPSK	2400 - 2483.5	79	15	Plot C	PASS


C. Test Plot:

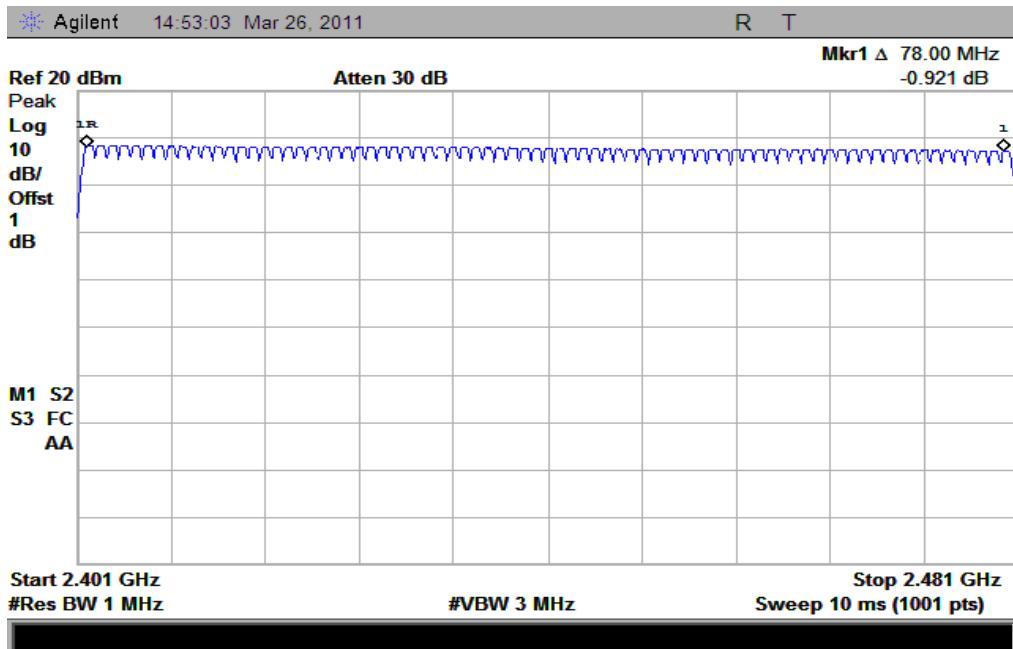

(Plot A: GFSK)

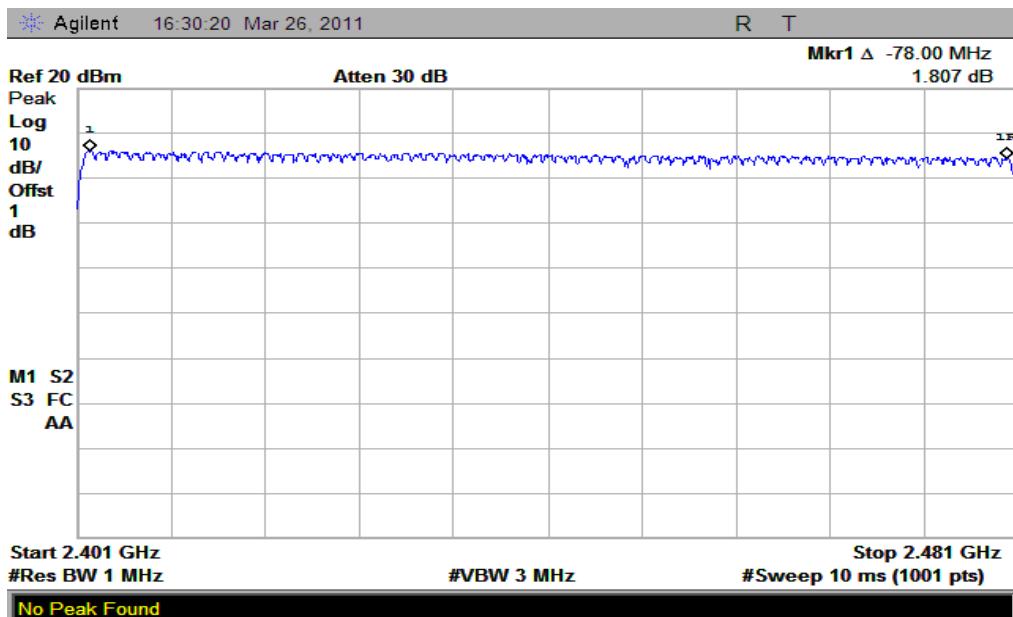

(Plot B: $\pi/4$ -DQPSK)

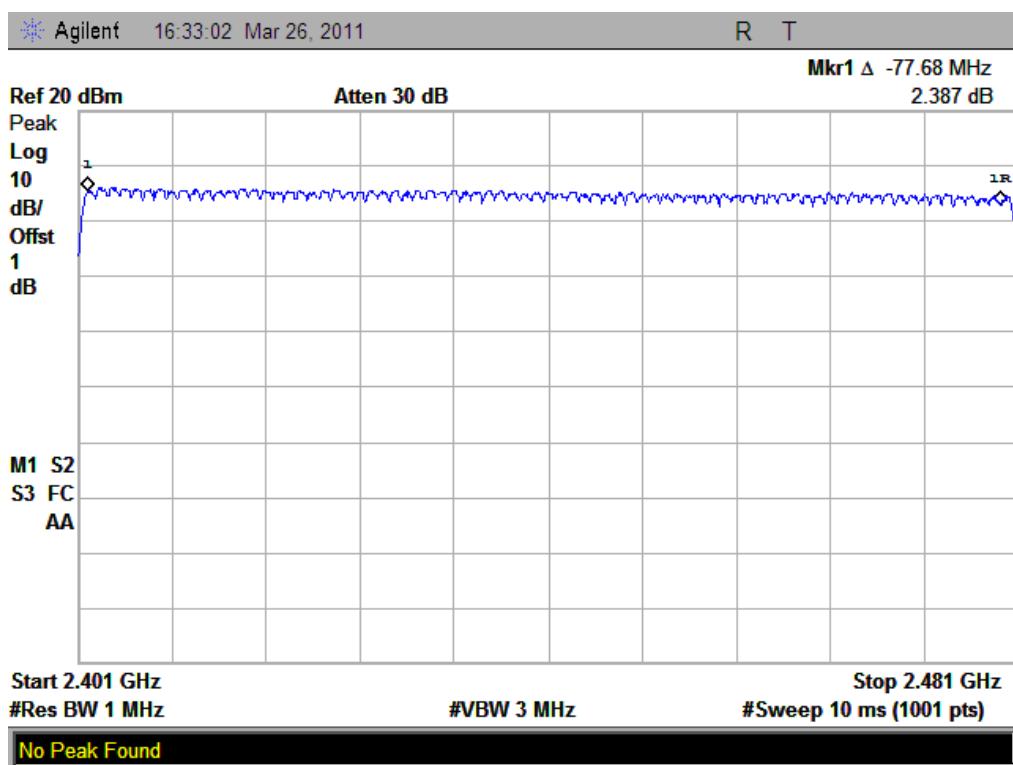

(Plot C: 8- DPSK)

2.2 Peak Output Power

2.2.1 Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.2.2 Test Description

See section 2.1.2 of this report.

2.2.3 Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

A. Test Verdict:


GFSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	8.402	0.006921	Plot A	30	1	PASS
39	2441	7.780	0.005998	Plot B			PASS
78	2480	7.222	0.005275	Plot C			PASS


B. Test Plot:

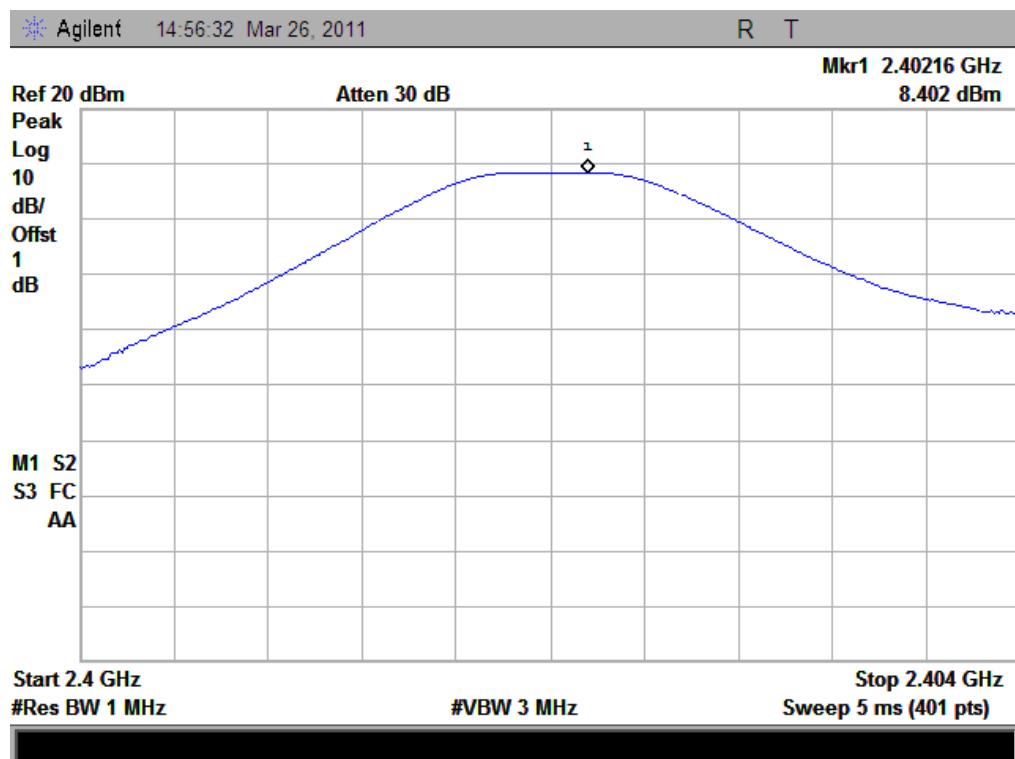

(Plot A: Channel = 2402)

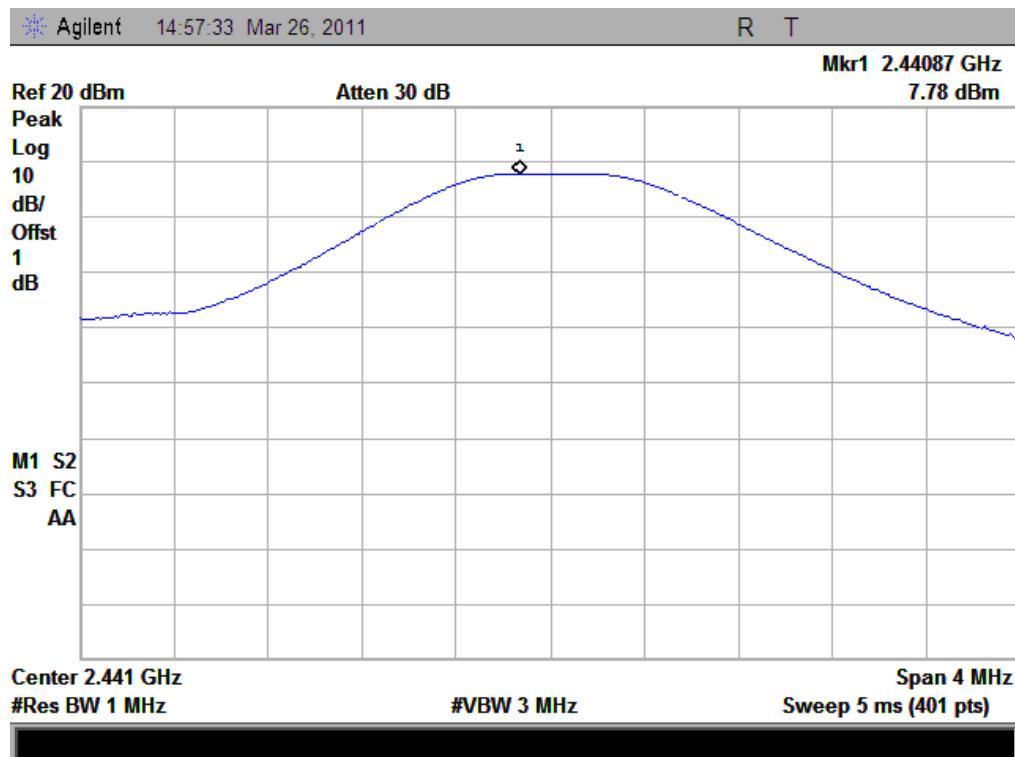

(Plot B: Channel = 2441)

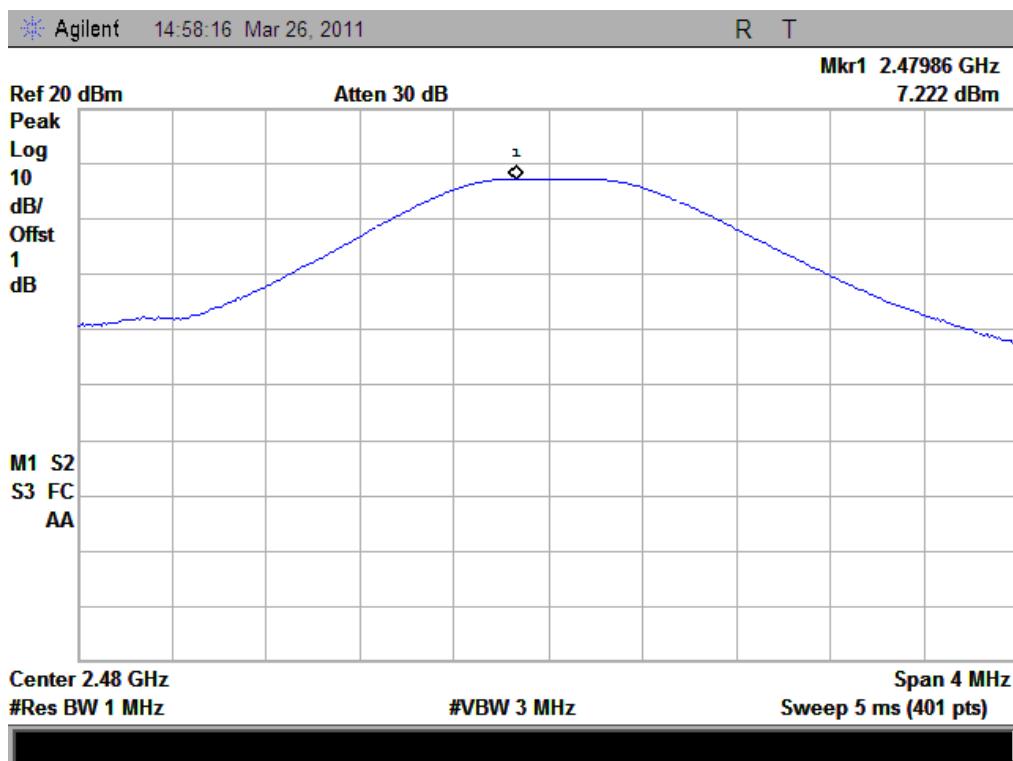


(Plot C: Channel = 2480)

C. Test Verdict:


$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	6.061	0.004037	Plot D	30	1	PASS
39	2441	5.337	0.003417	Plot E			PASS
78	2480	4.494	0.002814	Plot F			PASS


D. Test Plot:

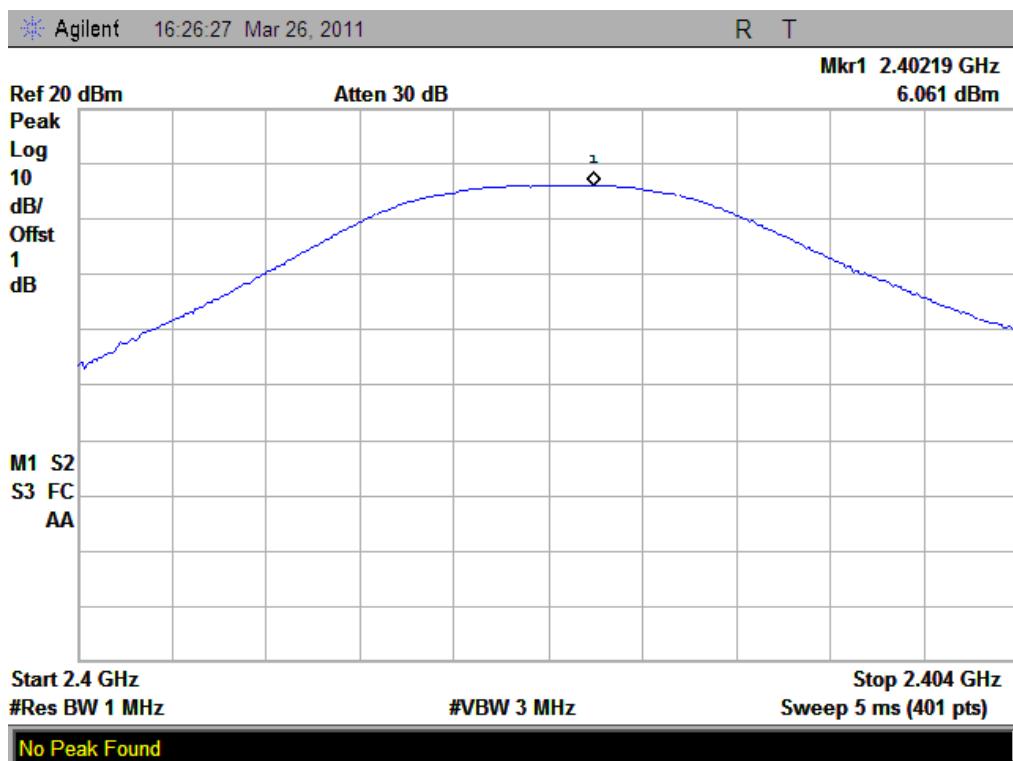

(Plot D: Channel = 2402)

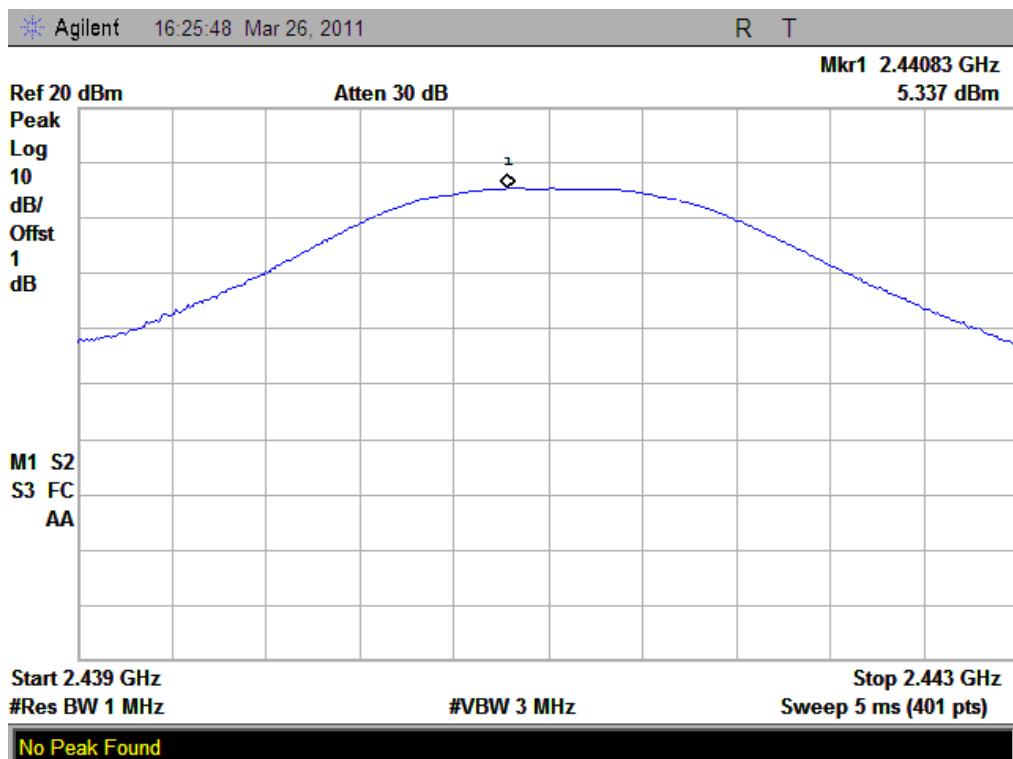

(Plot E: Channel = 2441)

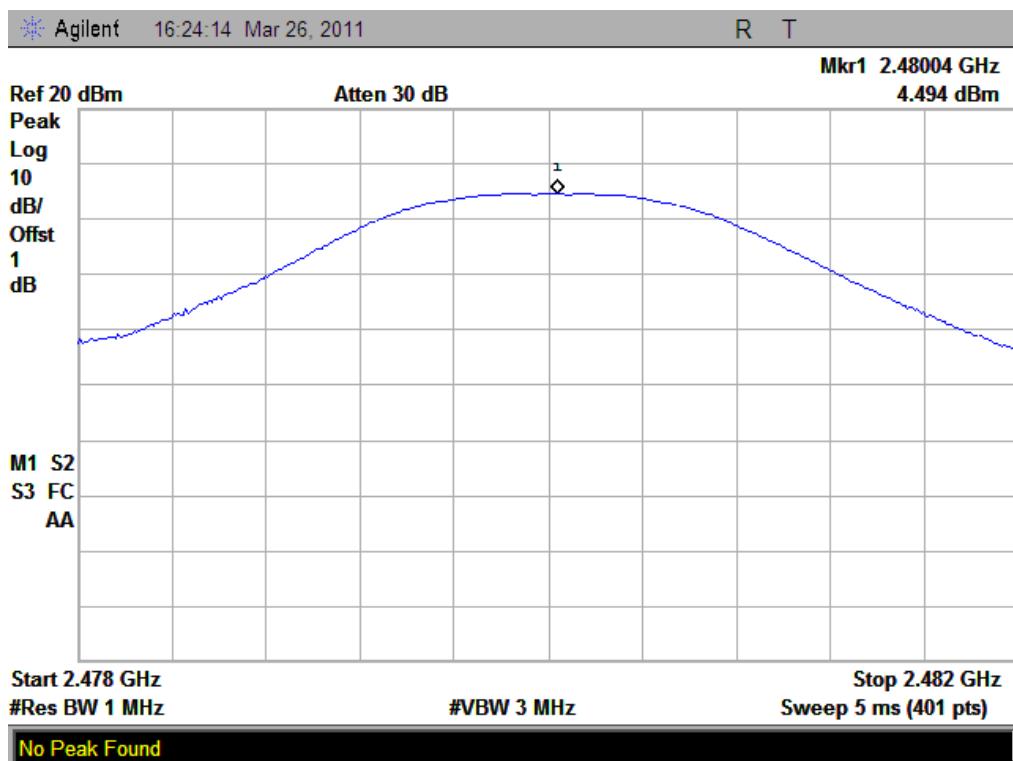


(Plot F: Channel = 2480)

E. Test Verdict:


8-DPSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	6.111	0.004084	Plot G	30	1	PASS
39	2441	5.389	0.003459	Plot H			PASS
78	2480	4.555	0.002854	Plot I			PASS


F. Test Plot:

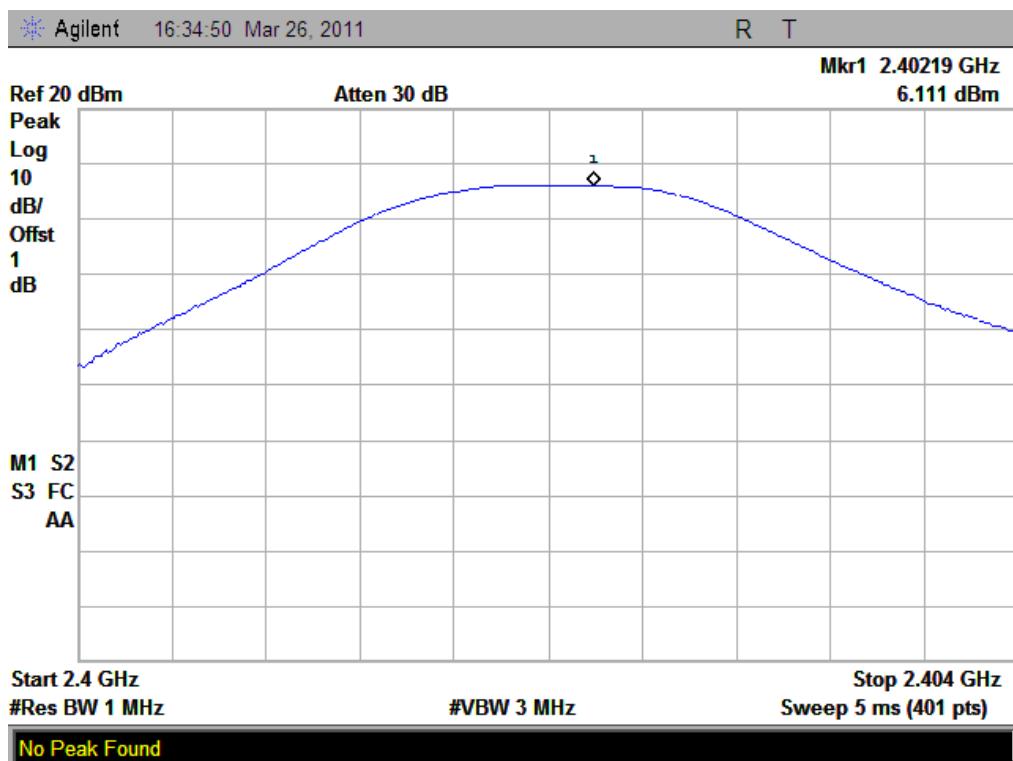

(Plot G: Channel = 2402)

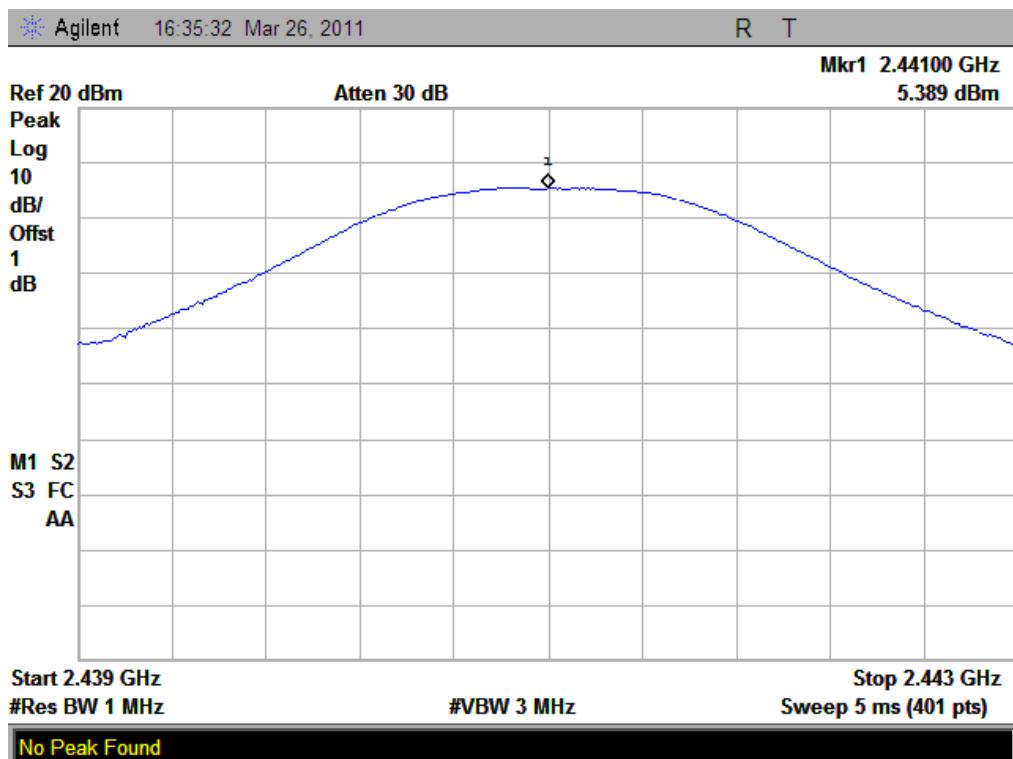

(Plot H: Channel = 2441)

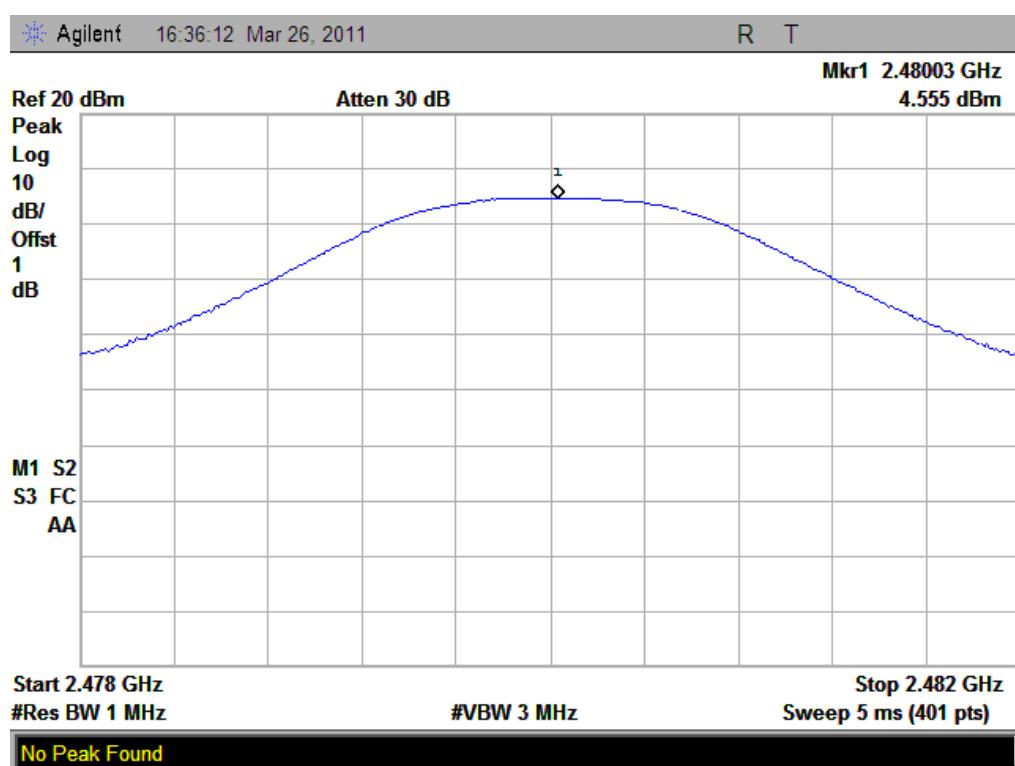

(Plot I: Channel = 2480)

2.3 20dB Bandwidth

2.3.1 Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \times \log 1\% = 20\text{dB}$) taking the total RF output power.

2.3.2 Test Description

See section 2.1.2 of this report.

2.3.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.


A. Test Verdict:

GFSK Mode


The maximum 20dB bandwidth measured is 922.50KHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (KHz)	Refer to Plot
0	2402	945.00	Plot A
39	2441	940.00	Plot B
78	2480	925.00	Plot C


B. Test Plot:

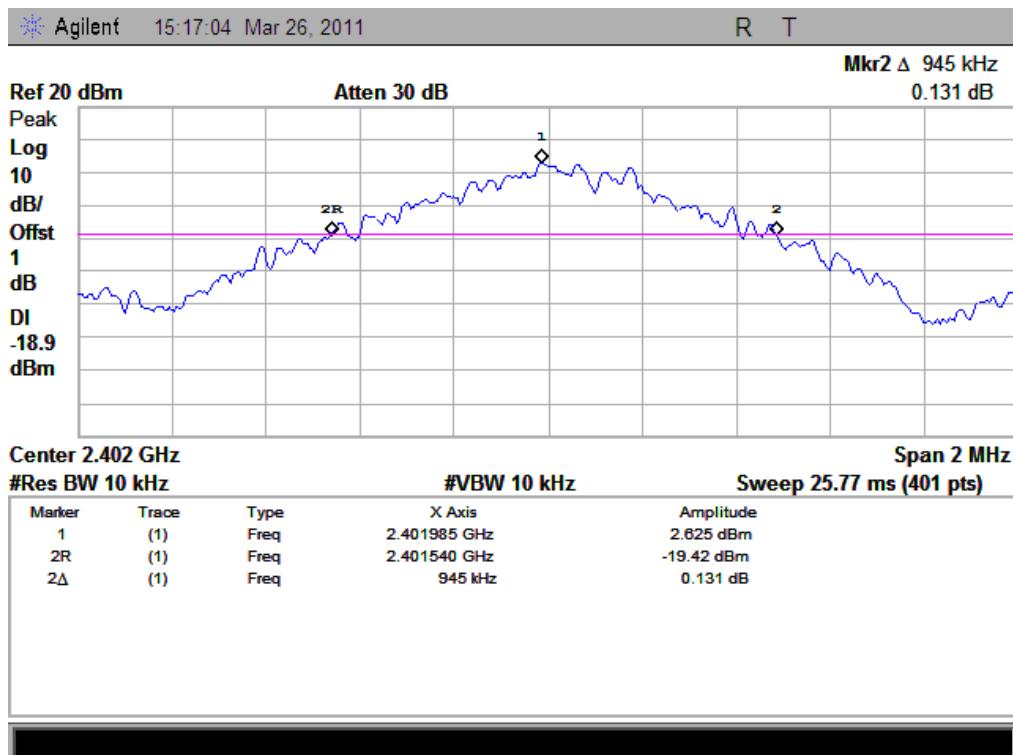

(Plot A: Channel = 2402)

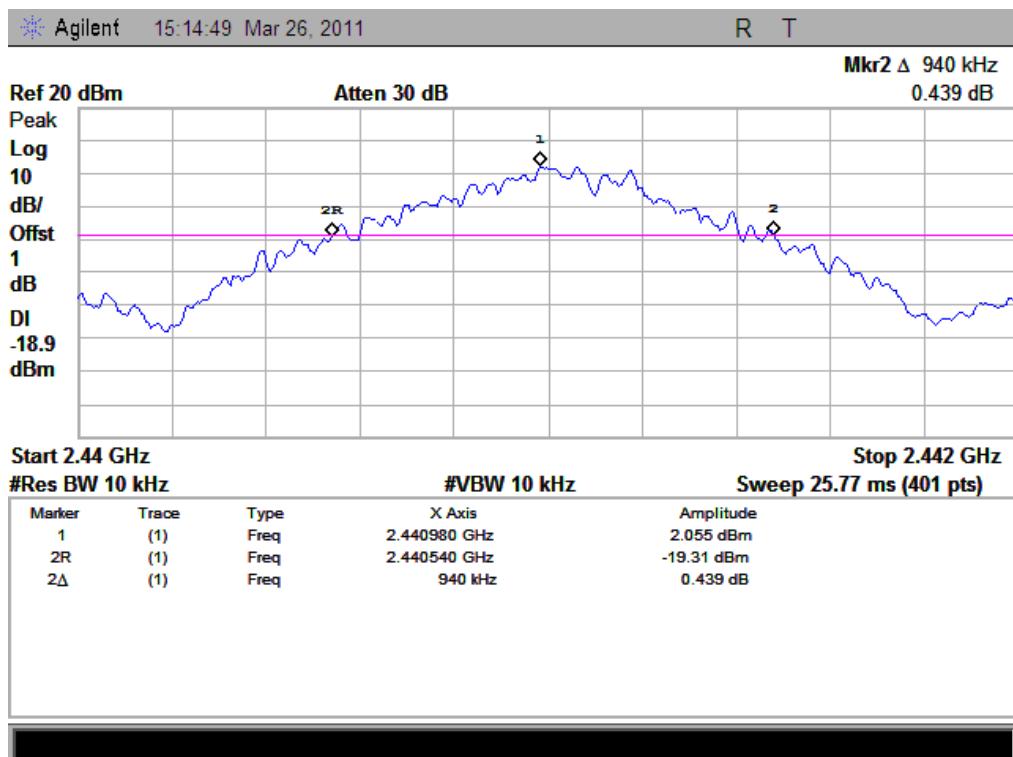

(Plot B: Channel = 2441)

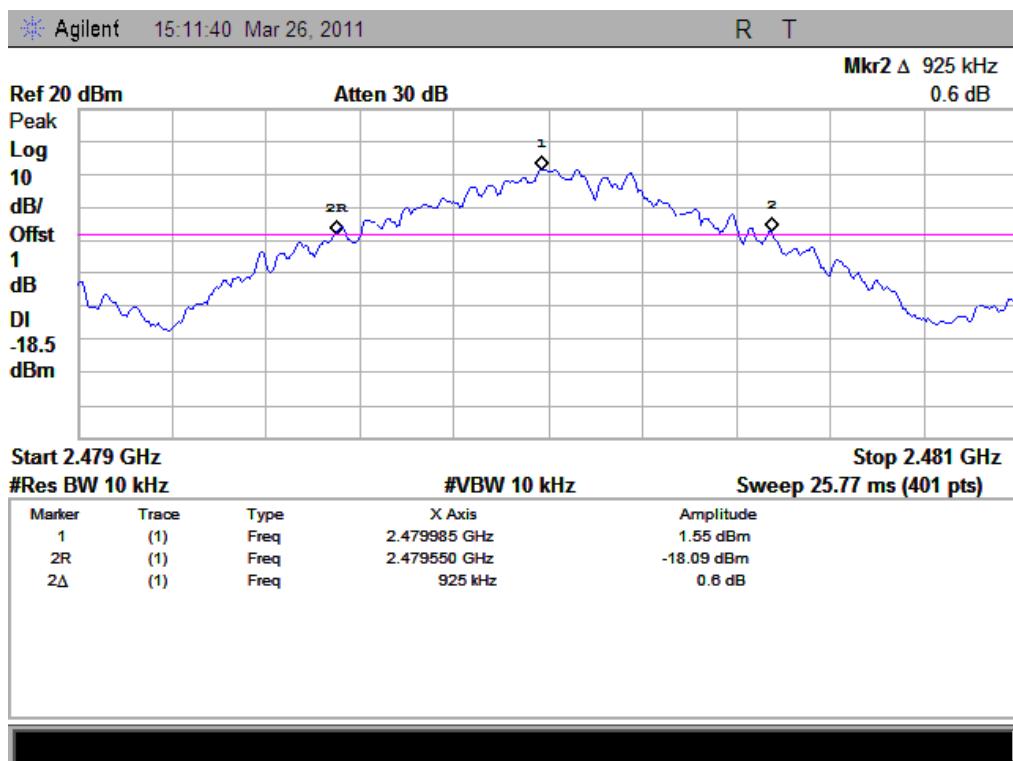

(Plot C: Channel = 2480)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


The maximum 20dB bandwidth measured is 1.290MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.290	Plot D
39	2441	1.295	Plot E
78	2480	1.260	Plot F


D. Test Plot:

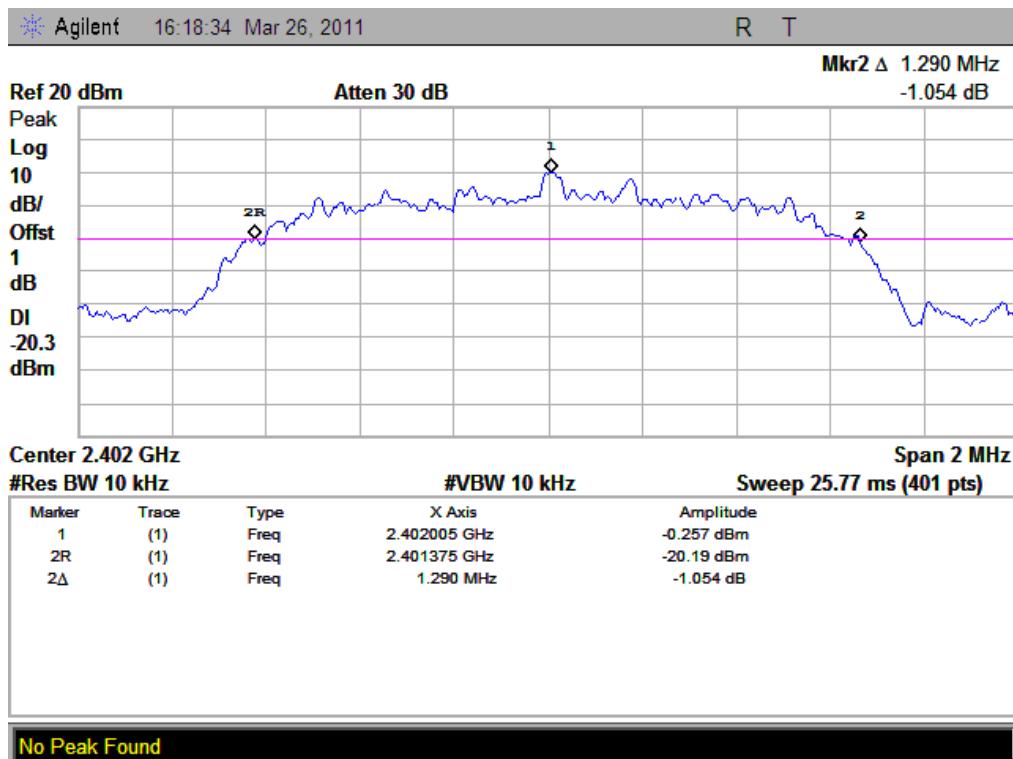

(Plot D: Channel = 2402)

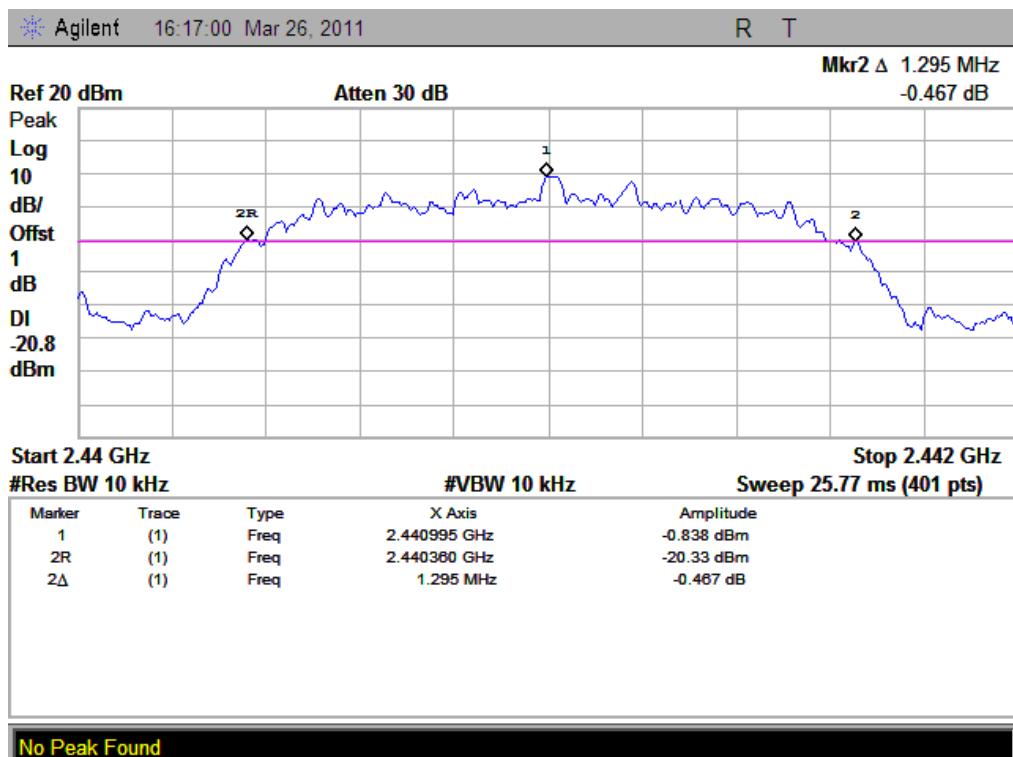

(Plot E: Channel = 2441)

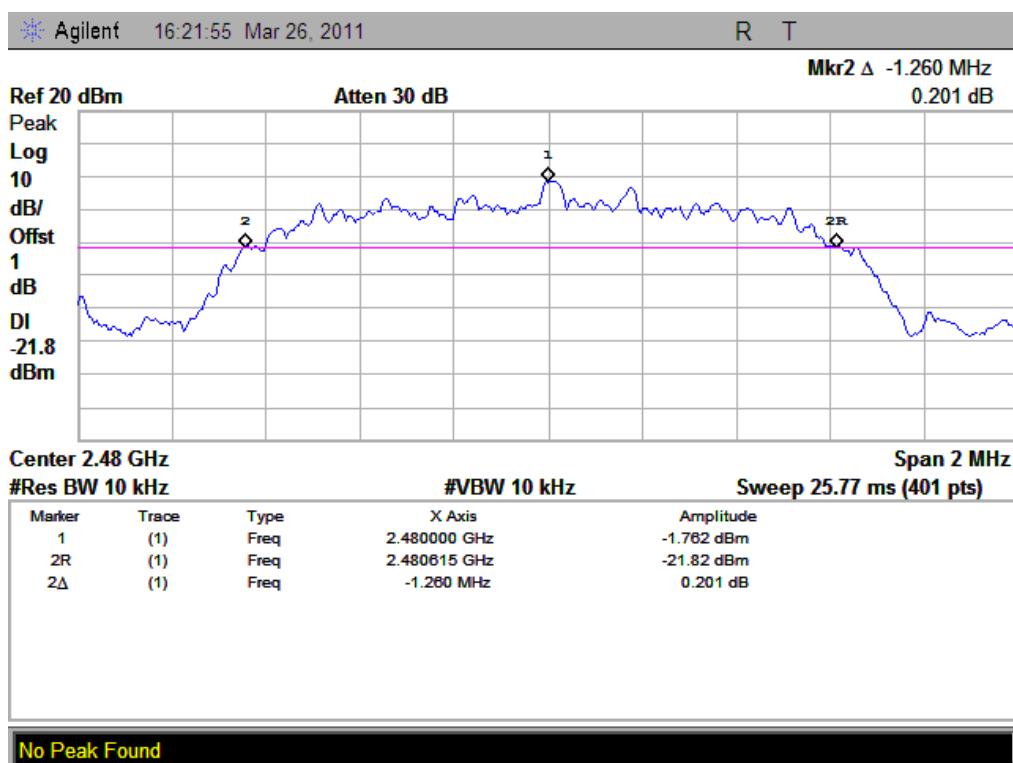

(Plot F: Channel = 2480)


E. Test Verdict:

8-DPSK Mode


The maximum 20dB bandwidth measured is 1.250MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.250	Plot G
39	2441	1.260	Plot H
78	2480	1.255	Plot I


F. Test Plot:

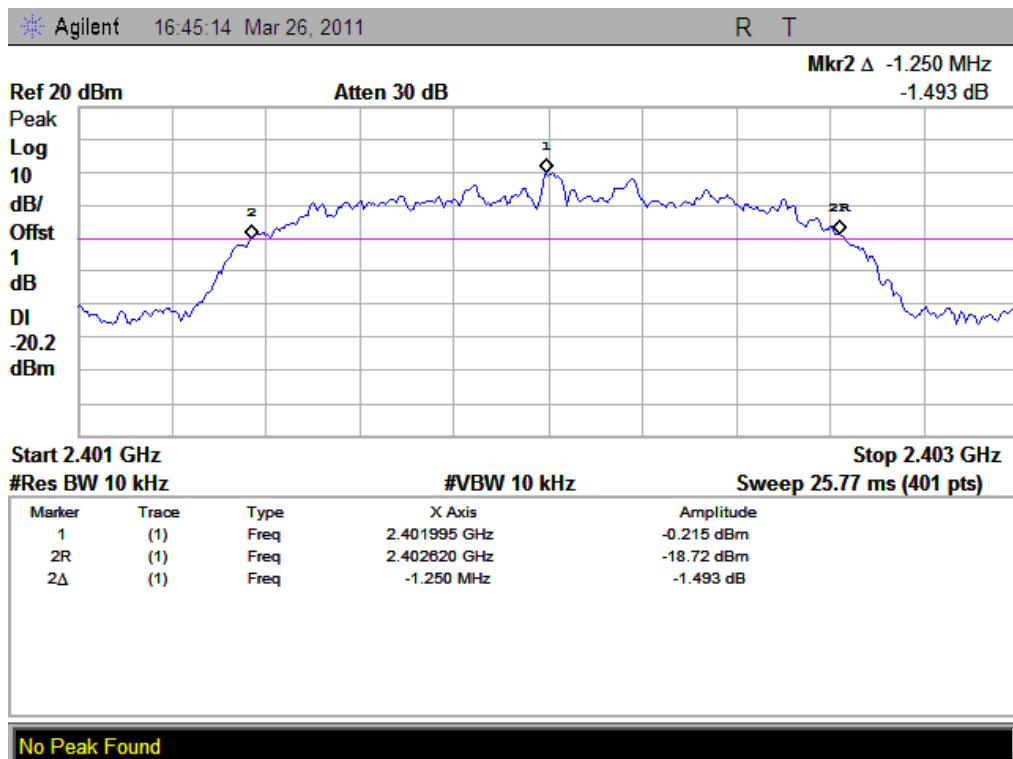

(Plot G: Channel = 2402)

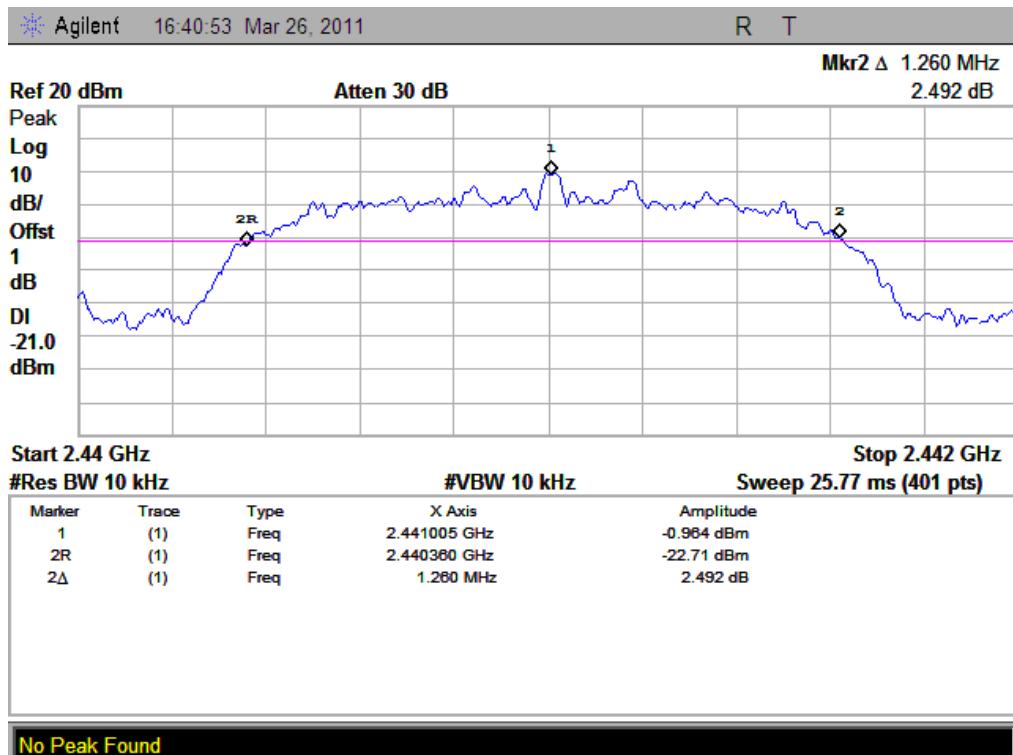

(Plot H: Channel = 2441)

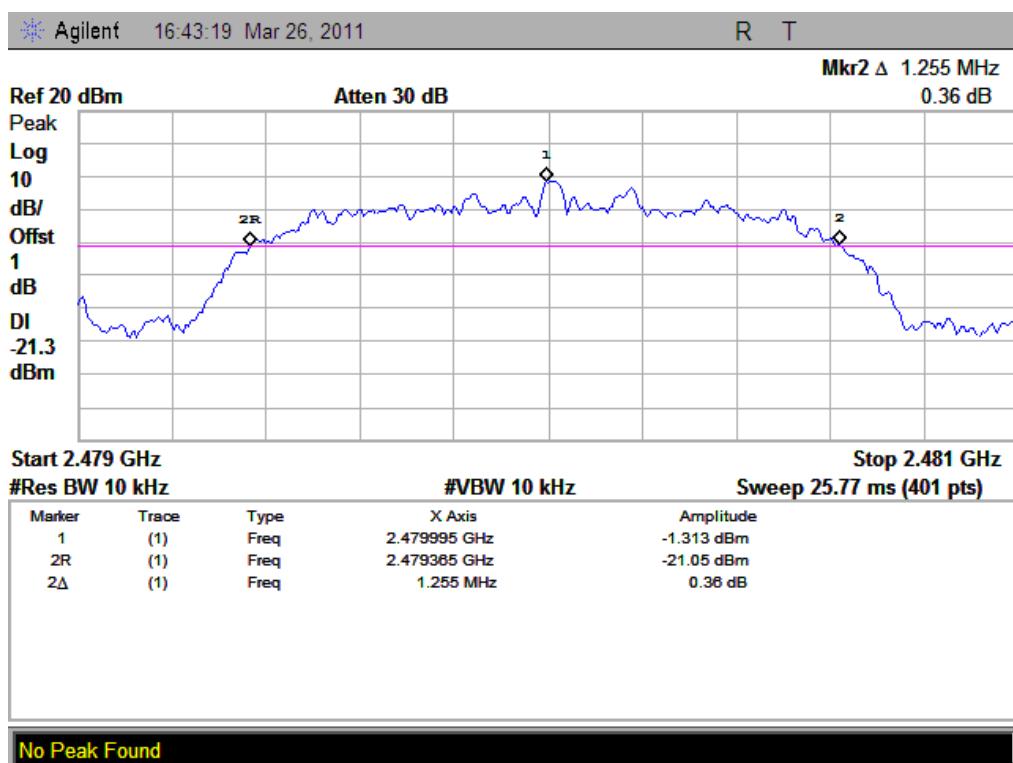

(Plot I: Channel = 2480)

2.4 Carried Frequency Separation

2.4.1 Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.


2.4.2 Test Description

See section 2.1.2 of this report.



2.4.3 Test Result

The Bluetooth Module operates at hopping-on test mode.

For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (922.50KHz for GFSK mode, 1.264MHz for $\pi/4$ -DQPSK mode and 1.223MHz for 8-DPSK mode, refer to section 2.3.3), whichever is greater. So, the verdict is PASS.

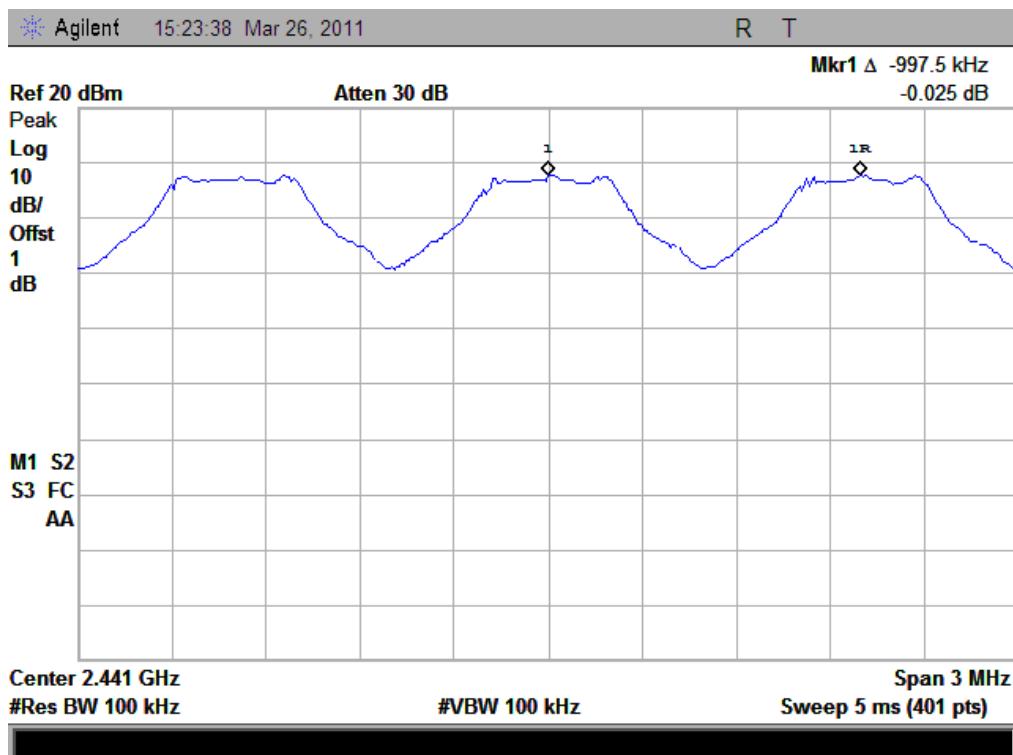

(Plot A: GFSK)

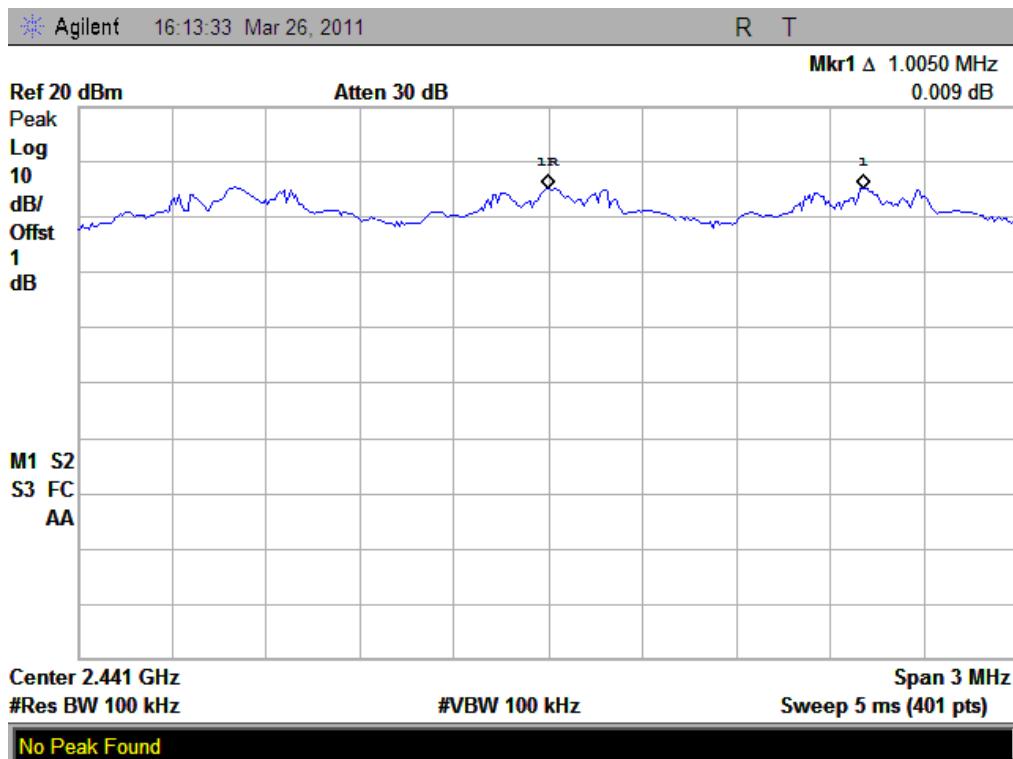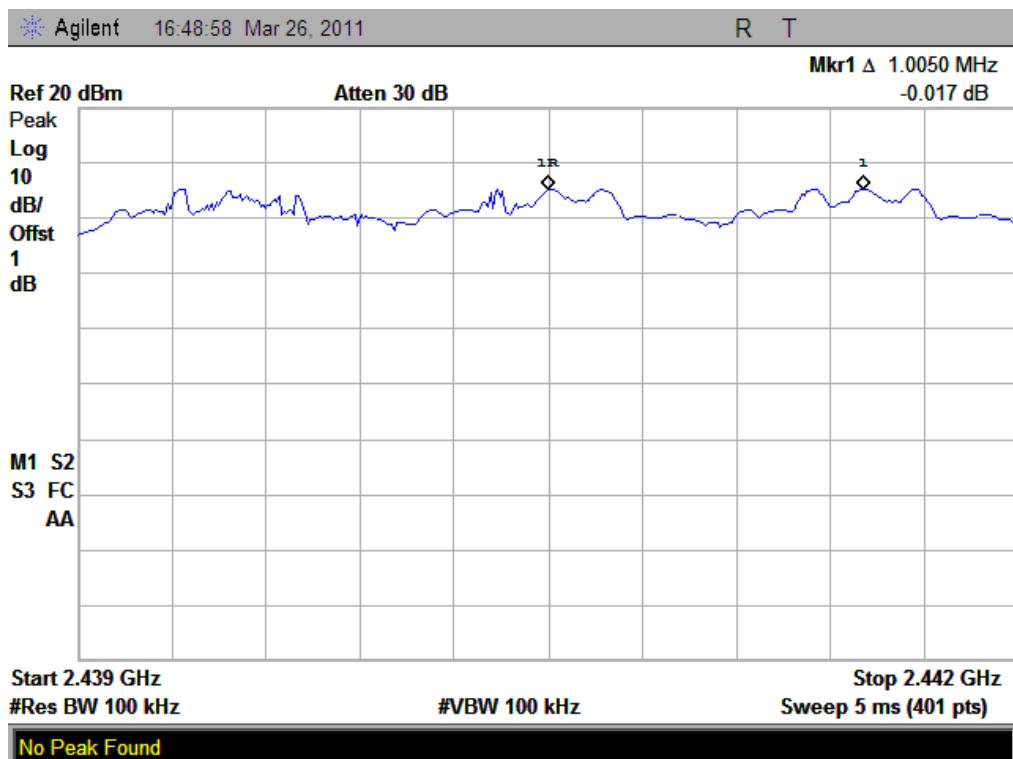
 (Plot B: $\pi/4$ -DQPSK)


(Plot C: 8-DPSK)

2.5 Time of Occupancy (Dwell time)

2.5.1 Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.5.2 Test Description

See section 2.1.2 of this report.

2.5.3 Test Result

The average time of occupancy on any channel within the Period can be calculated with formulas (for DH5 package type):

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4\text{s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.


A. Test Verdict:

GFSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.850	Plot A	304.00	400	PASS
39	2441	2.850	Plot B	304.00		PASS
78	2480	2.900	Plot C	309.33		PASS

B. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

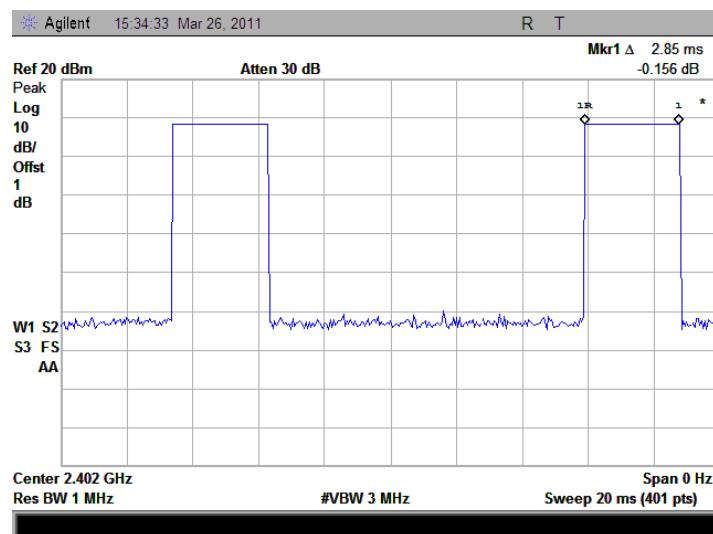

(Plot A: Channel = 2402)

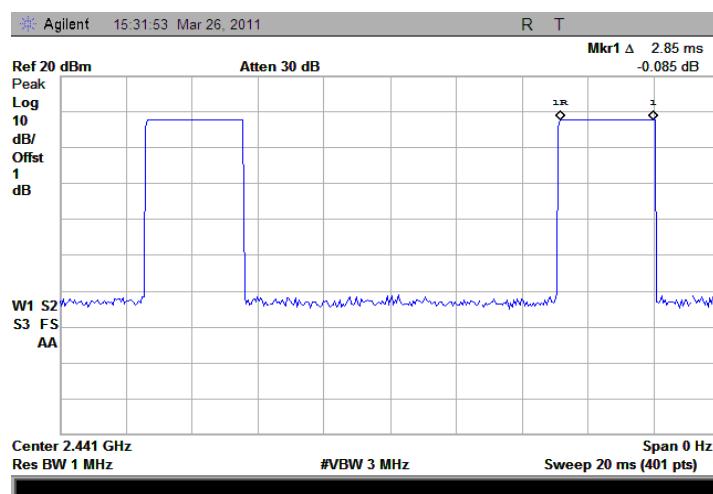

(Plot B: Channel = 2441)

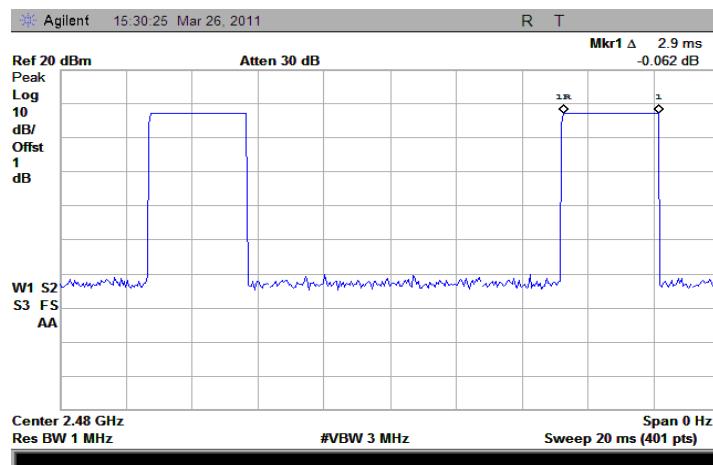

(Plot C: Channel = 2480)

C. Test Verdict:

$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.900	Plot D	309.33	400	PASS
39	2441	2.900	Plot E	309.33		PASS
78	2480	2.850	Plot F	304.00		PASS

D. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.



(Plot D: Channel = 2402)

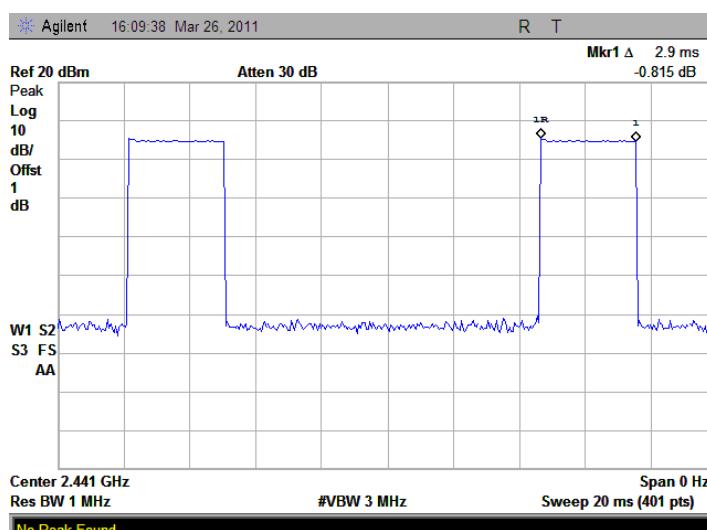

(Plot E: Channel = 2441)

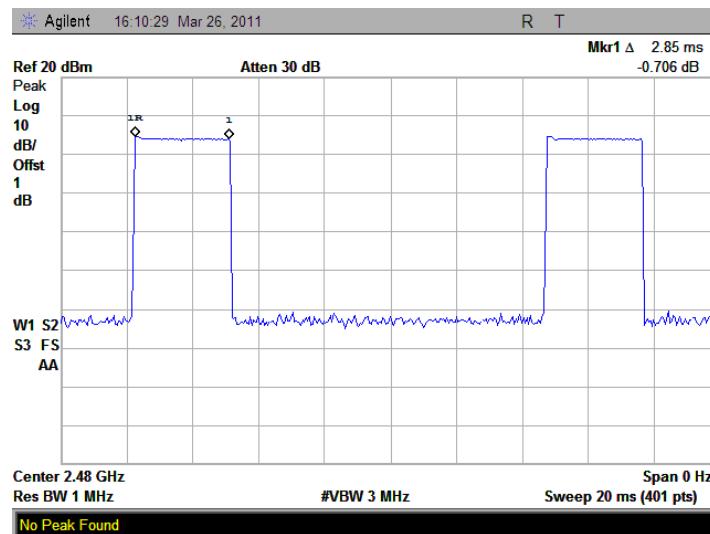

(Plot F: Channel = 2480)


E. Test Verdict (8-DPSK mode):

8-DPSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.800	Plot G	298.67	400	PASS
39	2441	2.700	Plot H	288.00		PASS
78	2480	2.850	Plot I	304.00		PASS

F. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

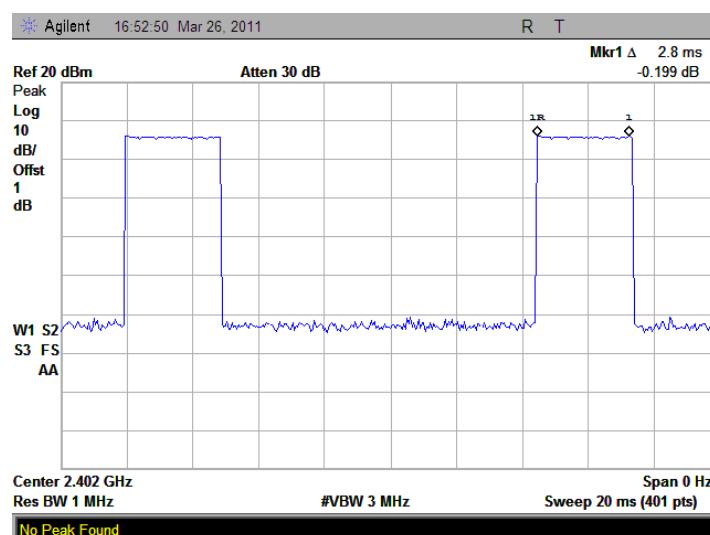

(Plot G: Channel = 2402)

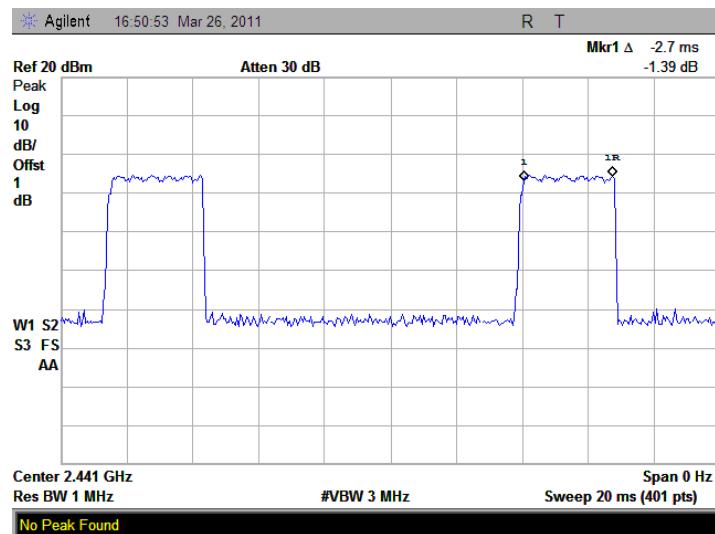

(Plot H: Channel = 2441)

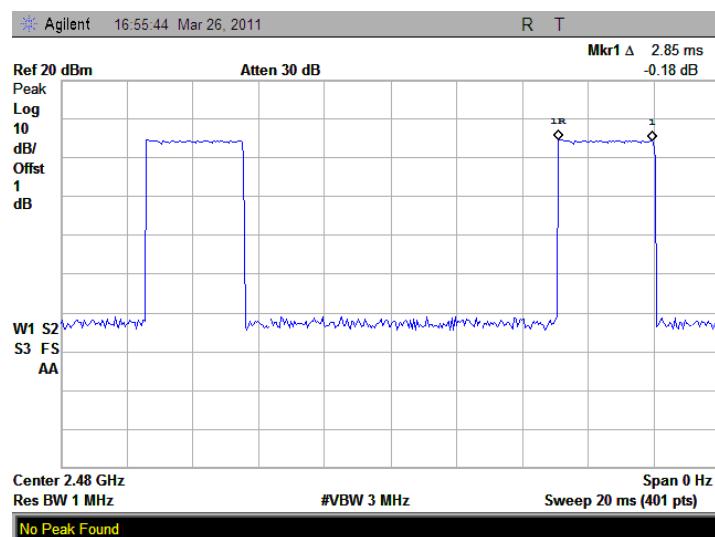

(Plot I: Channel = 2480)

2.6 Conducted Spurious Emissions

2.6.1 Requirement

According to FCC §15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.6.2 Test Description

See section 2.1.2 of this report.

2.6.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


A. Test Verdict:

GFSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBC Limit	
0	2402	-45.33	Plot A.1/A.2	7.754	-12.2	PASS
39	2441	-44.64	Plot B.1/B.2	7.911	-12.1	PASS
78	2480	-44.30	Plot C.1/C.2	7.252	-12.7	PASS

B. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

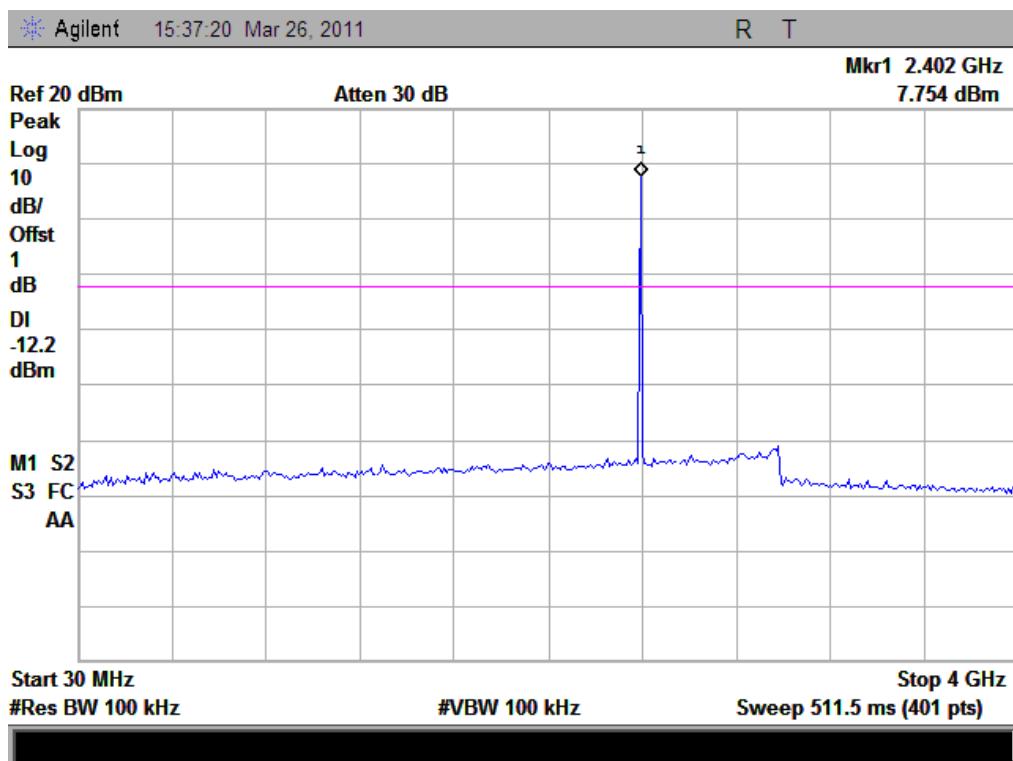


(Plot A.1: Channel = 0, 30MHz to 4GHz)

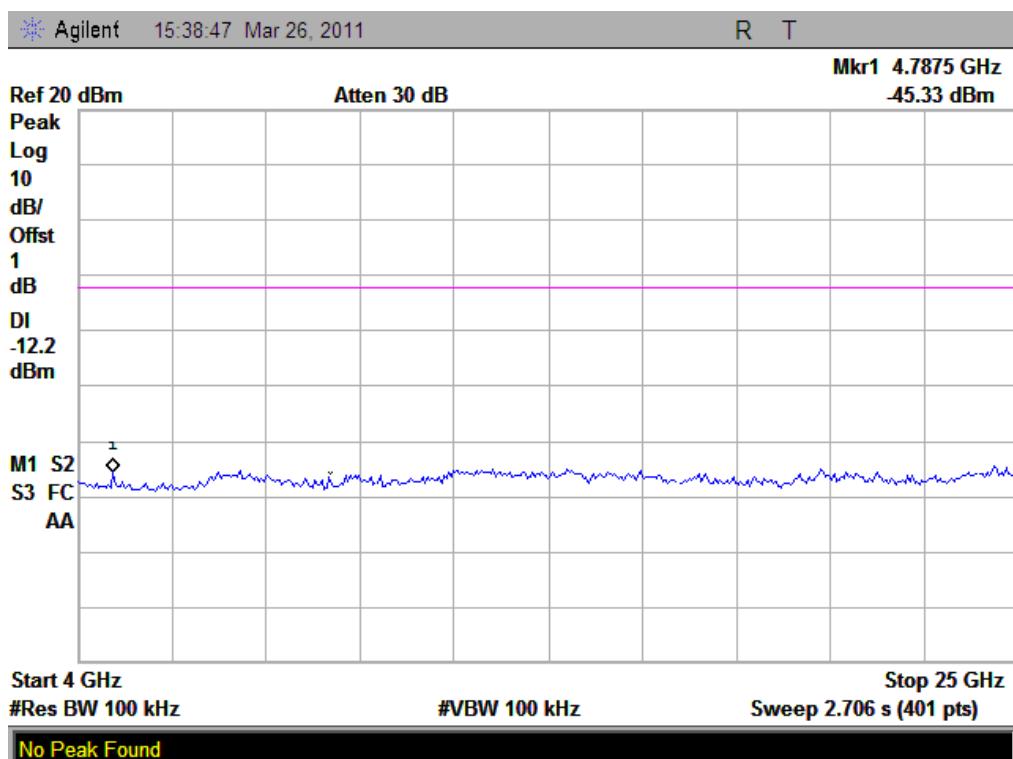



(Plot A.2: Channel = 0, 4GHz to 25GHz)

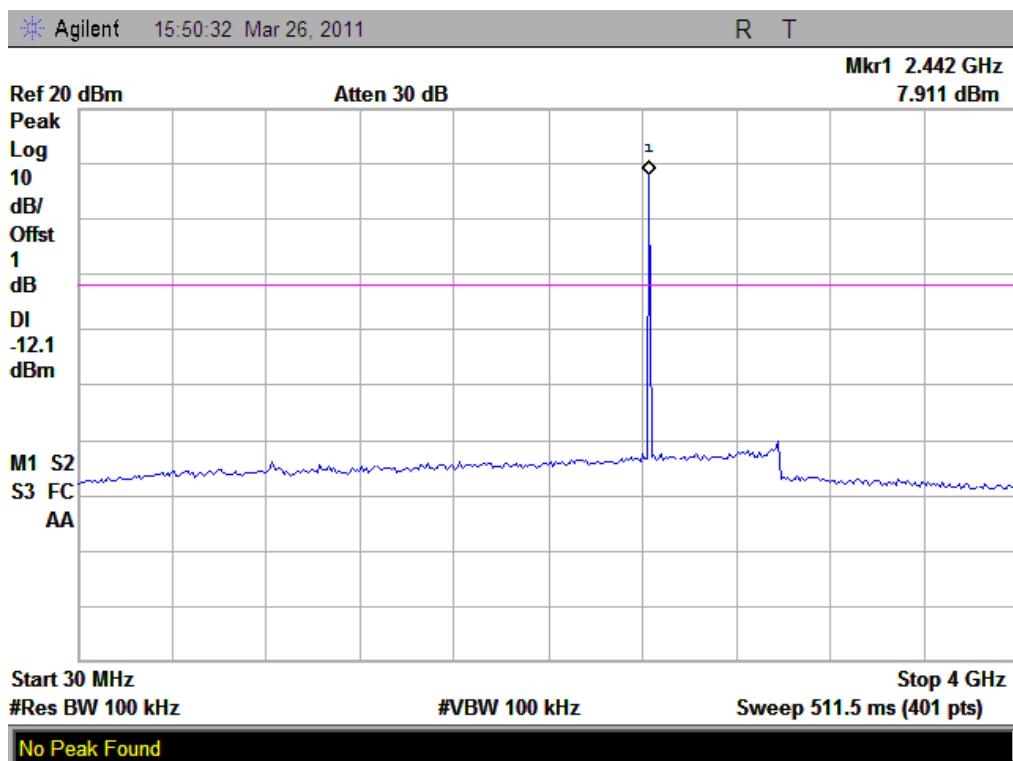

(Plot B.1: Channel = 39, 30MHz to 4GHz)

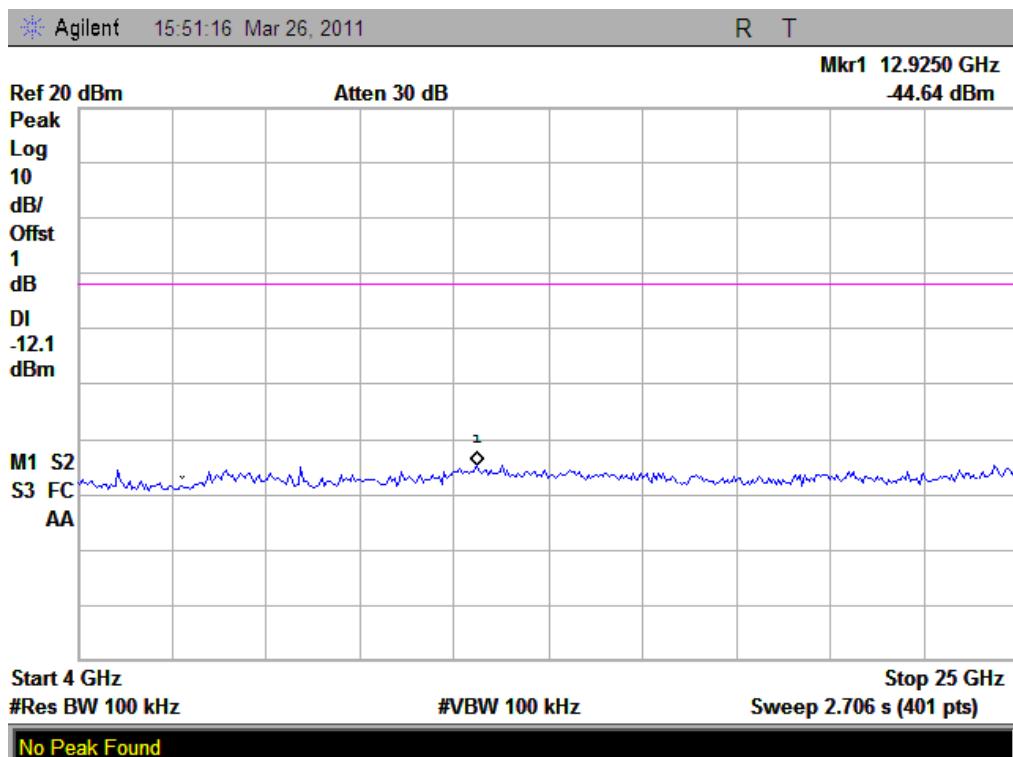

(Plot B.2: Channel = 39, 4GHz to 25GHz)

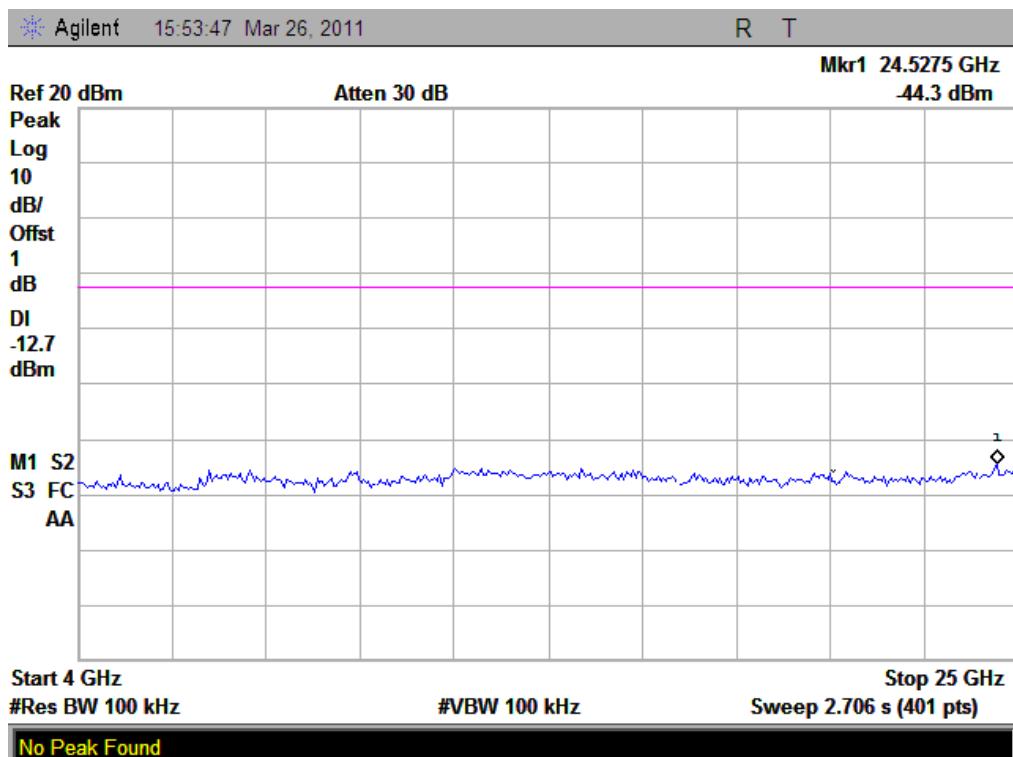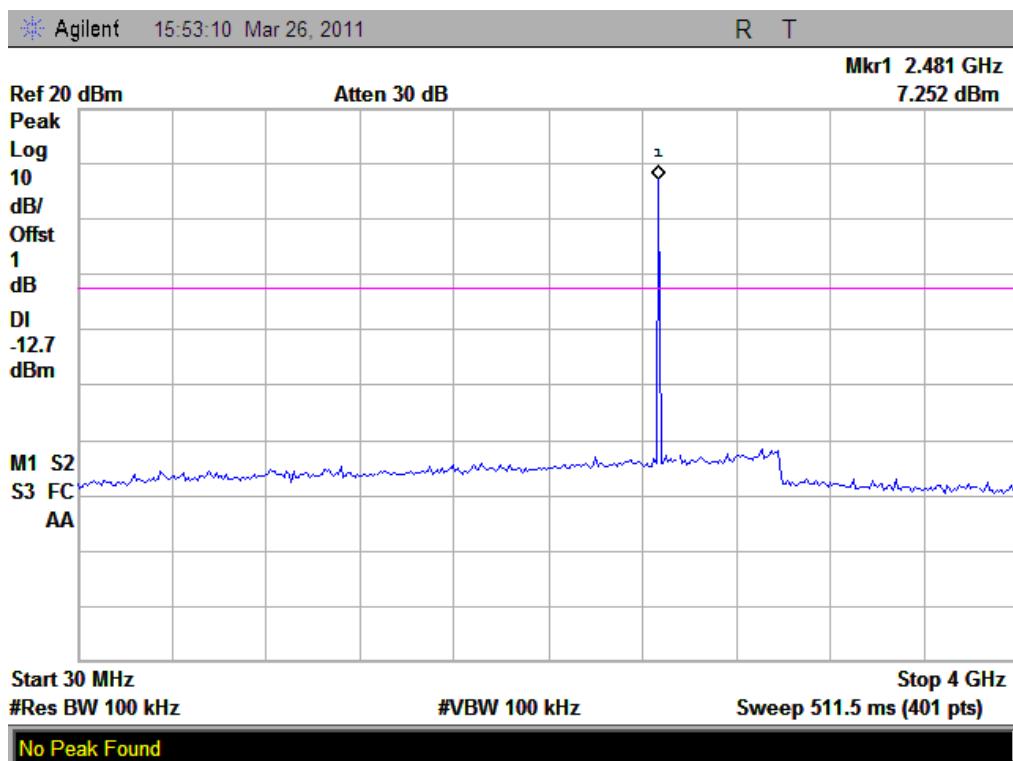


C. Test Verdict:

$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-45.89	Plot D.1/D.2	2.148	-17.9	PASS
39	2441	-45.50	Plot E.1/E.2	4.711	-15.3	PASS
78	2480	-45.24	Plot F.1/F.2	3.829	-16.1	PASS

D. Test Plot:



Note: the power of the Module transmitting frequency should be ignored.

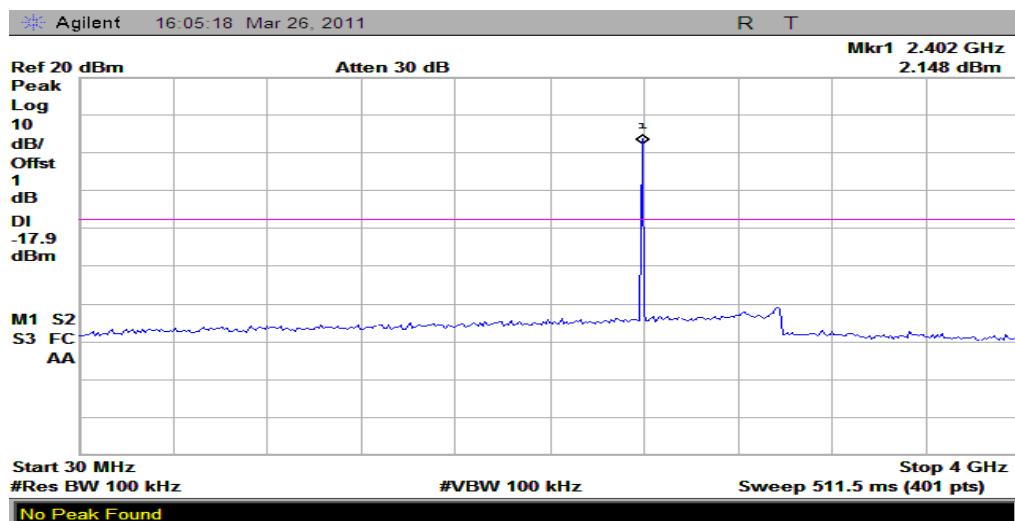


(Plot D.1: Channel = 0, 30MHz to 4GHz)

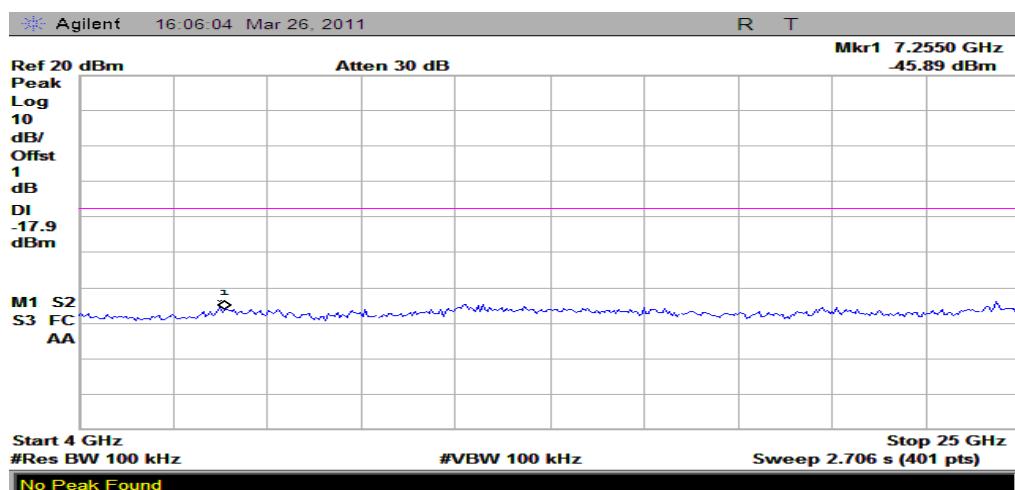


(Plot D.2: Channel = 0, 4GHz to 25GHz)

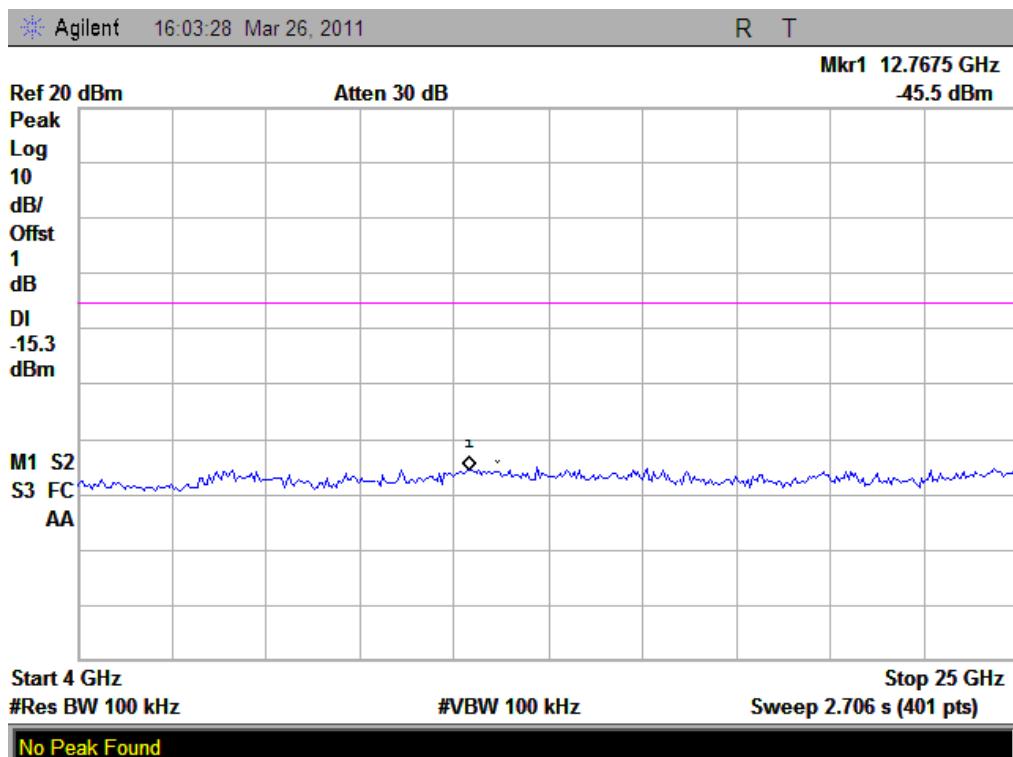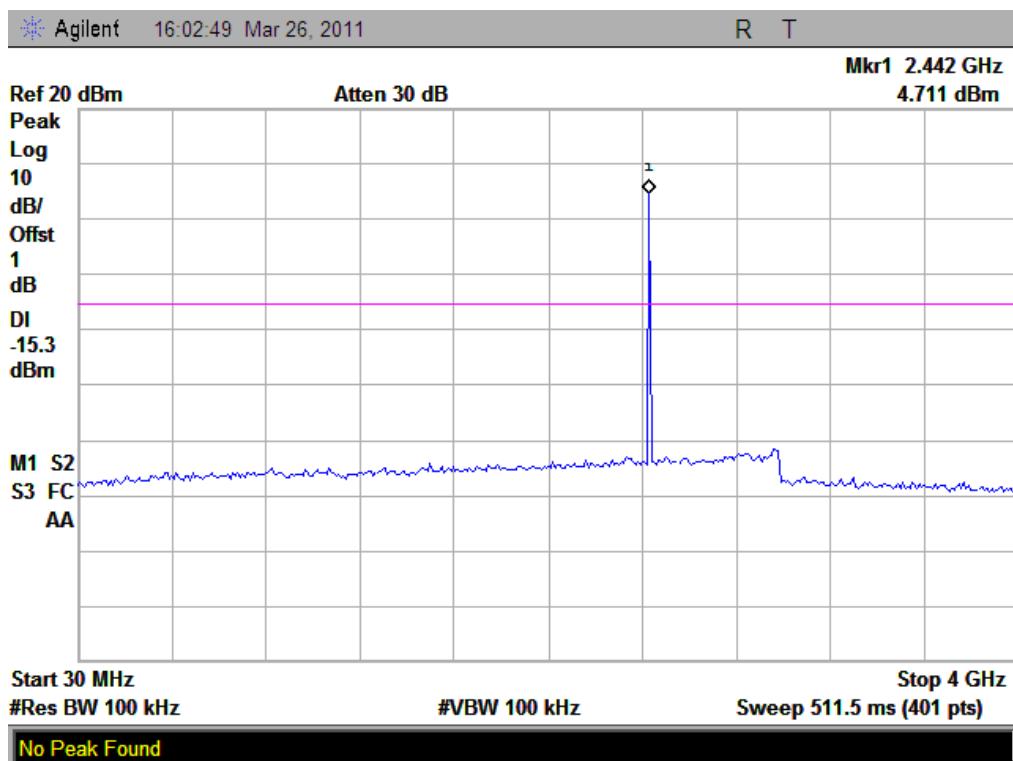

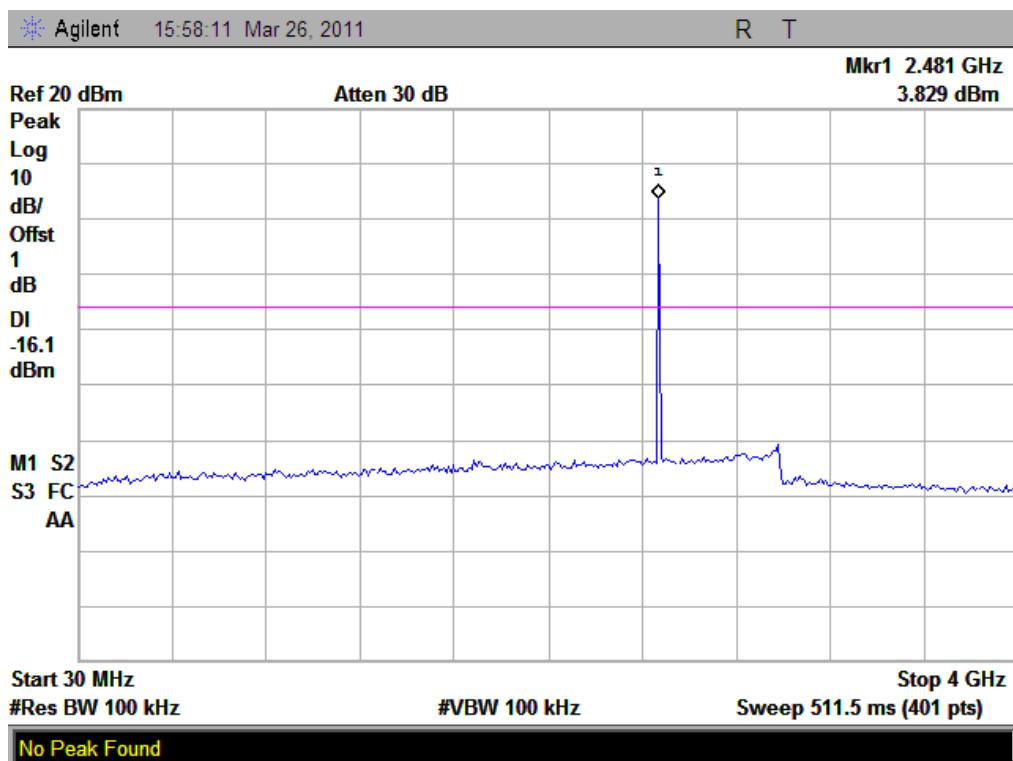

(Plot F.1: Channel = 78, 30MHz to 4GHz)

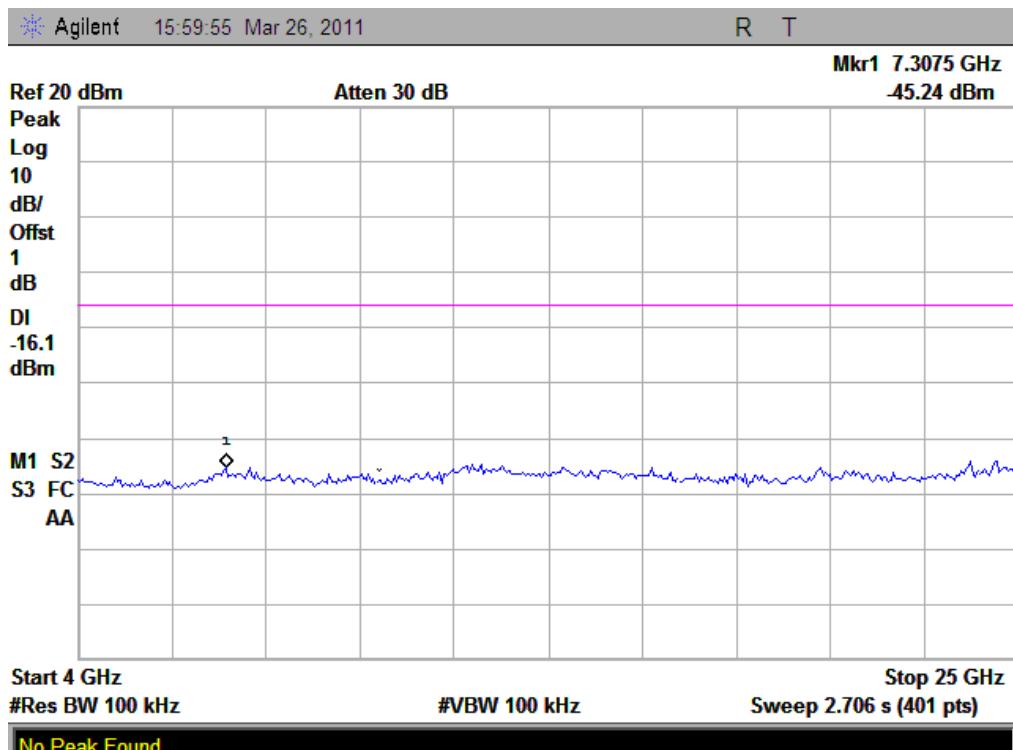

(Plot F.2: Channel = 78, 4GHz to 25GHz)


E. Test Verdict:

8-DPSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-44.39	Plot G.1/G.2	6.143	-13.9	PASS
39	2441	-44.47	Plot H.1/H.2	3.532	-16.5	PASS
78	2480	-45.65	Plot I.1/I.2	1.358	-18.6	PASS

F. Test Plot:



Note: the power of the Module transmitting frequency should be ignored.


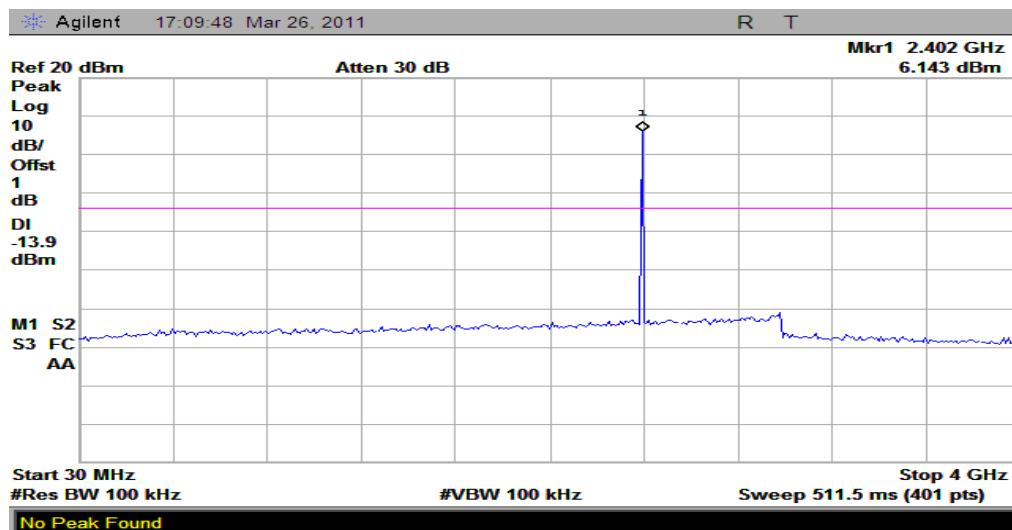


(Plot G.1: Channel = 0, 30MHz to 4GHz)

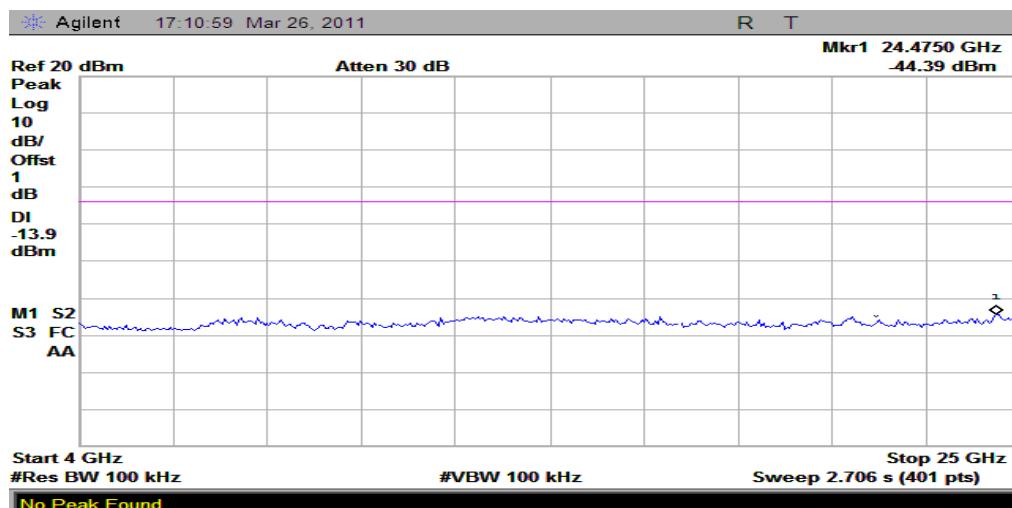

(Plot G.2: Channel = 0, 4GHz to 25GHz)

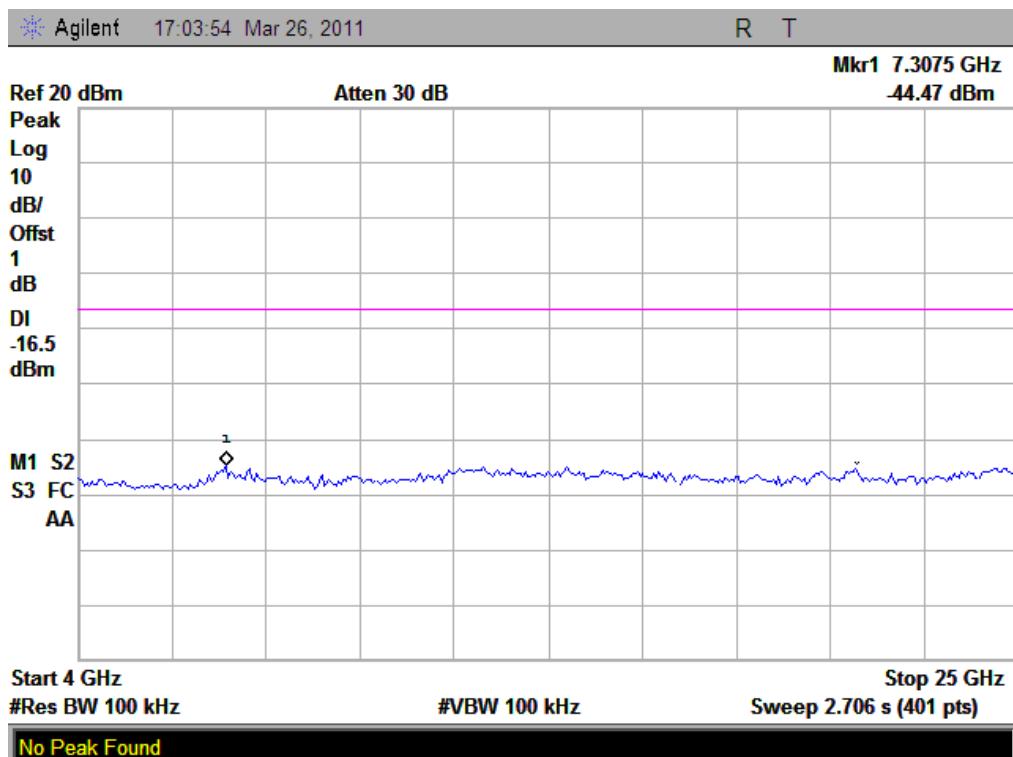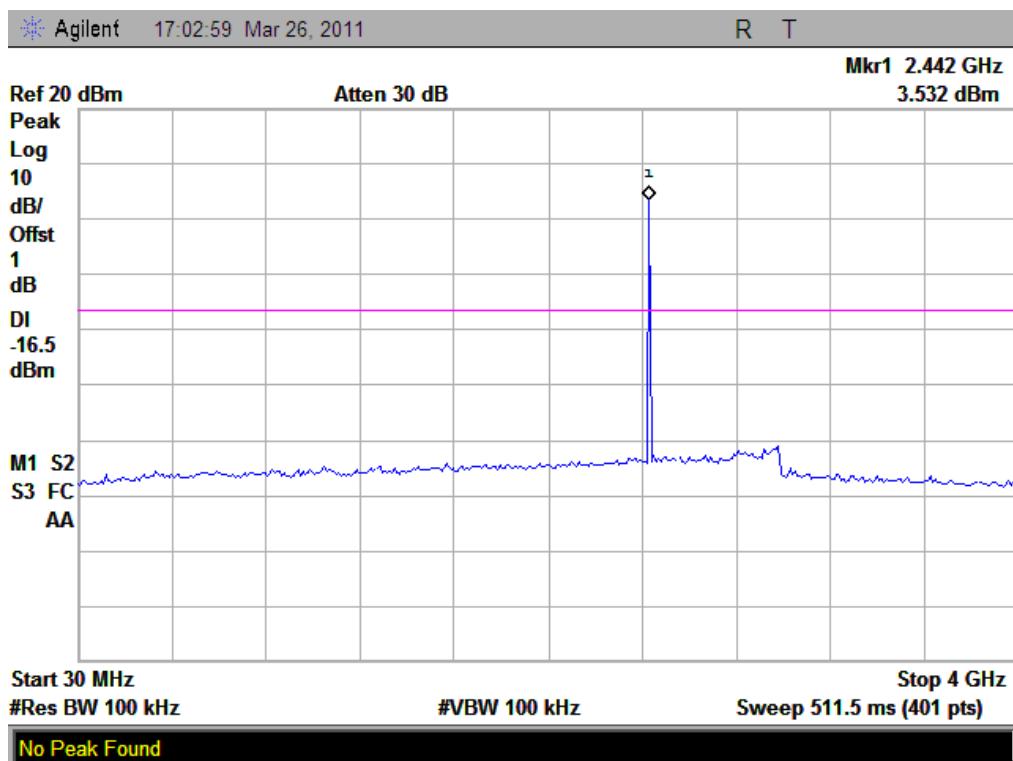

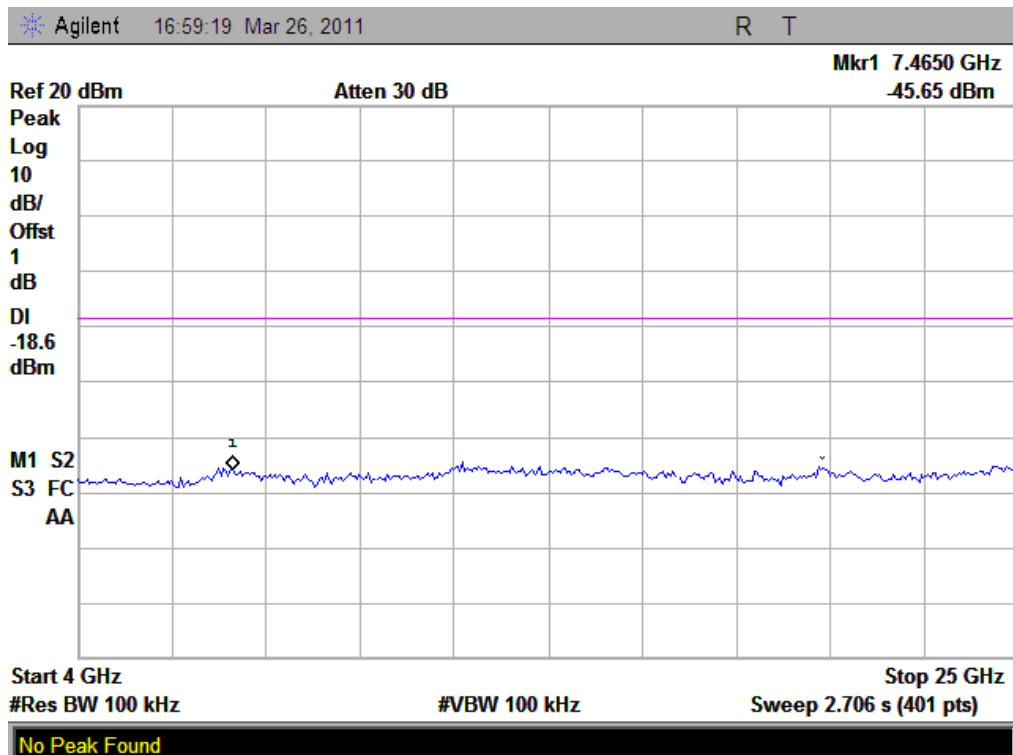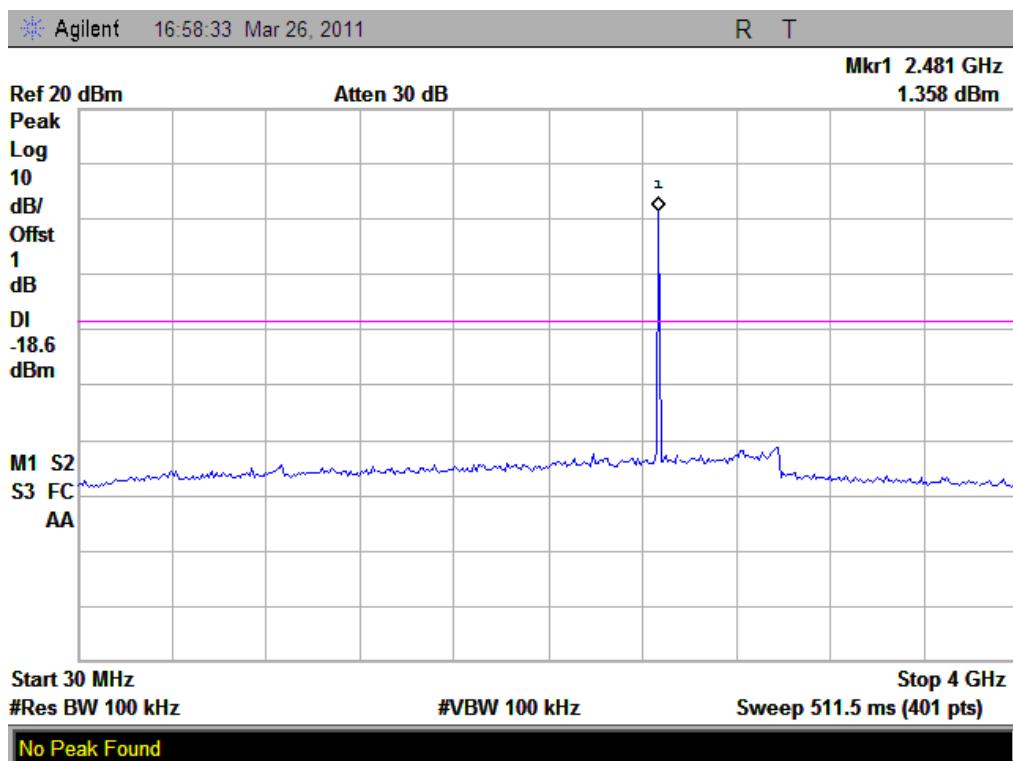


2.7 Band Edge

2.7.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2 Test Description

A. Test Setup:

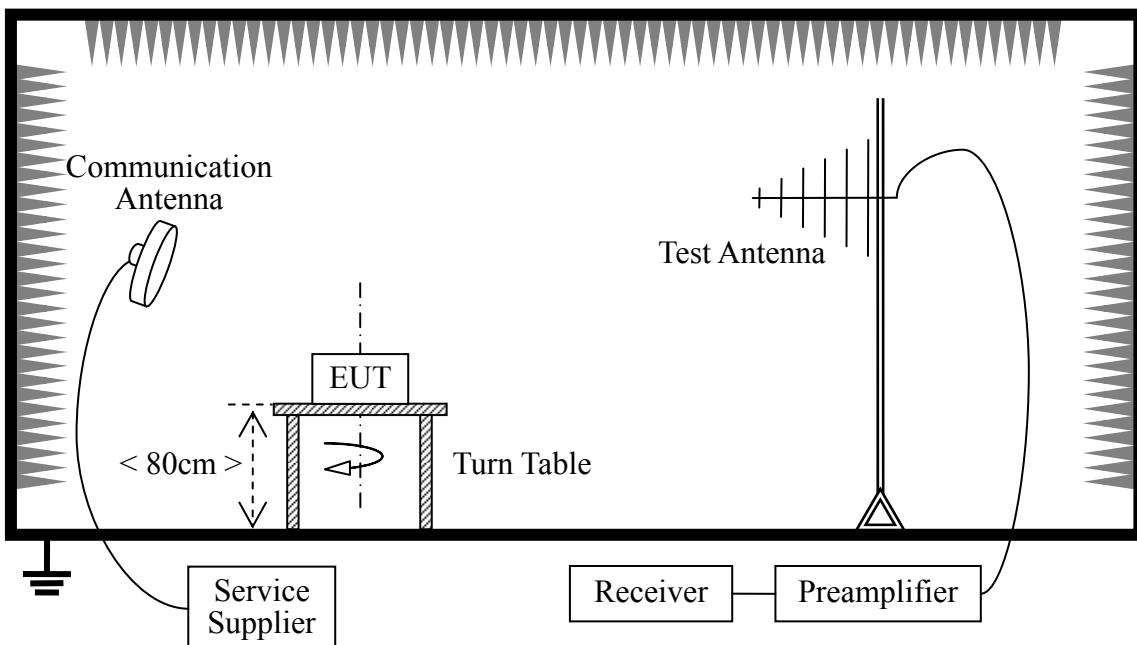

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength..

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2010.9
Receiver	Agilent	E7405A	US44210471	2010.9
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2010.9
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2010.9



2.7.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:



GFSK Mode

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	34.04	26.24	74	54	PASS
78	2480	32.01	24.75	74	54	PASS

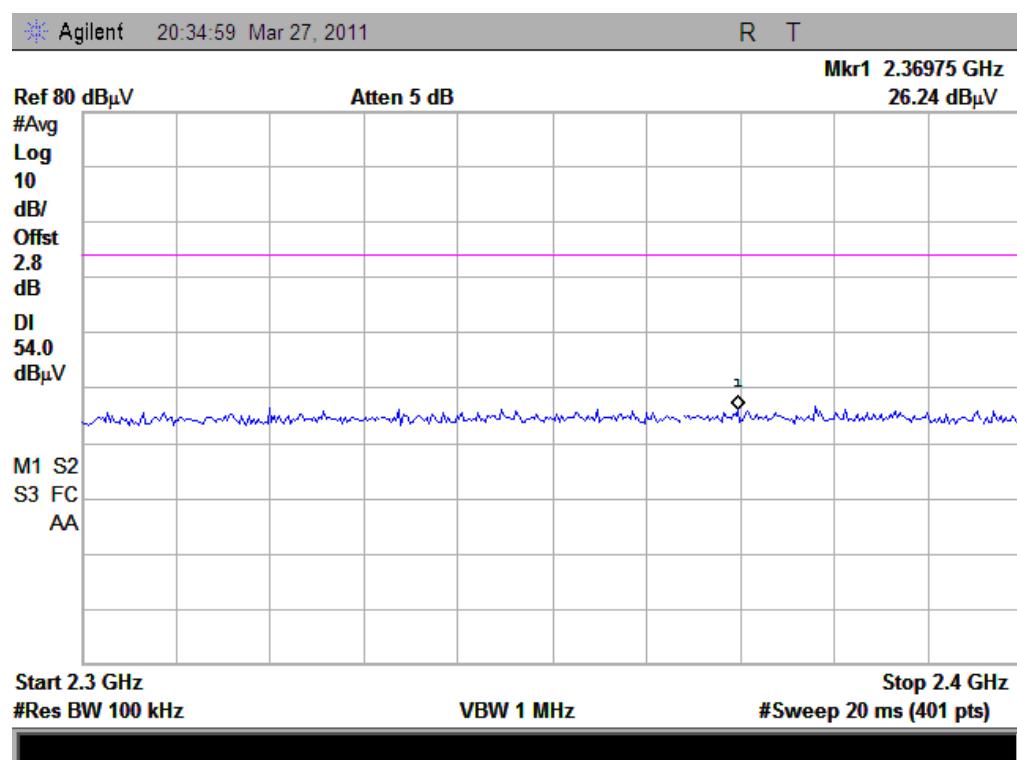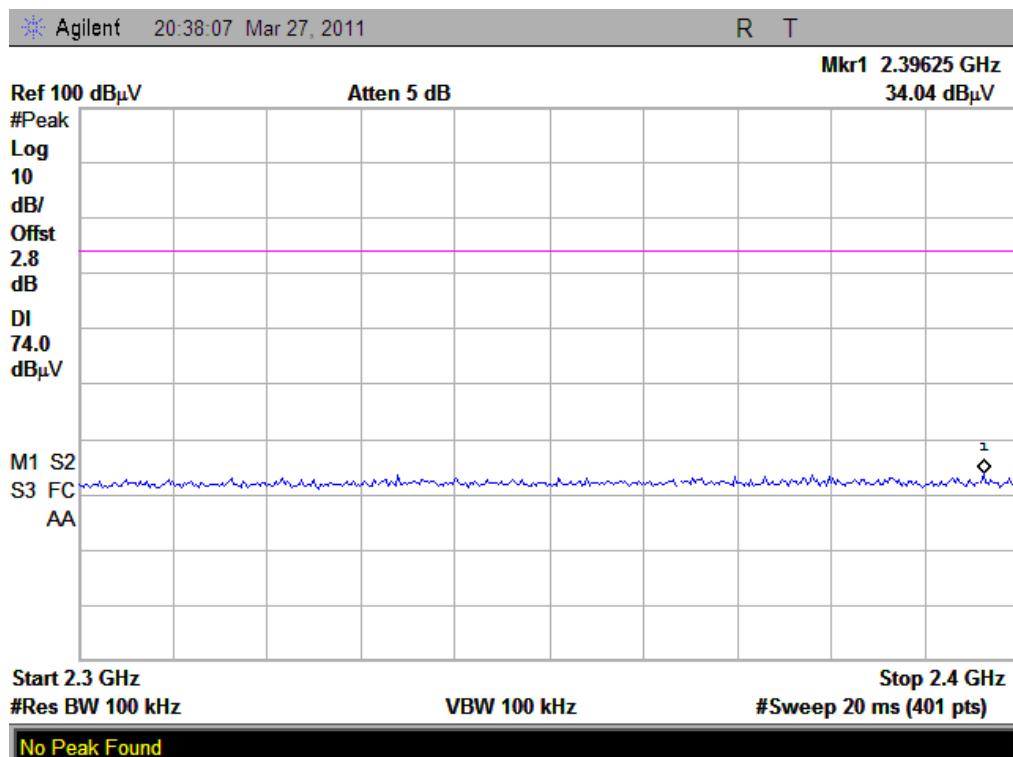B. Test Plot:




Report No.: SZ11030057E01

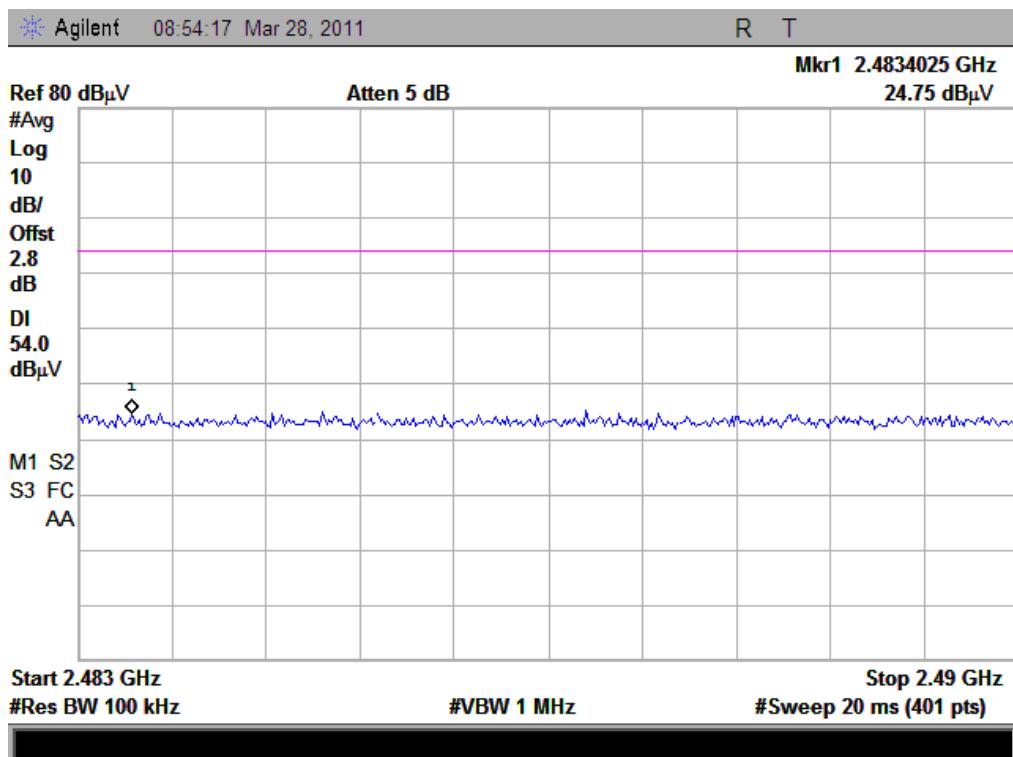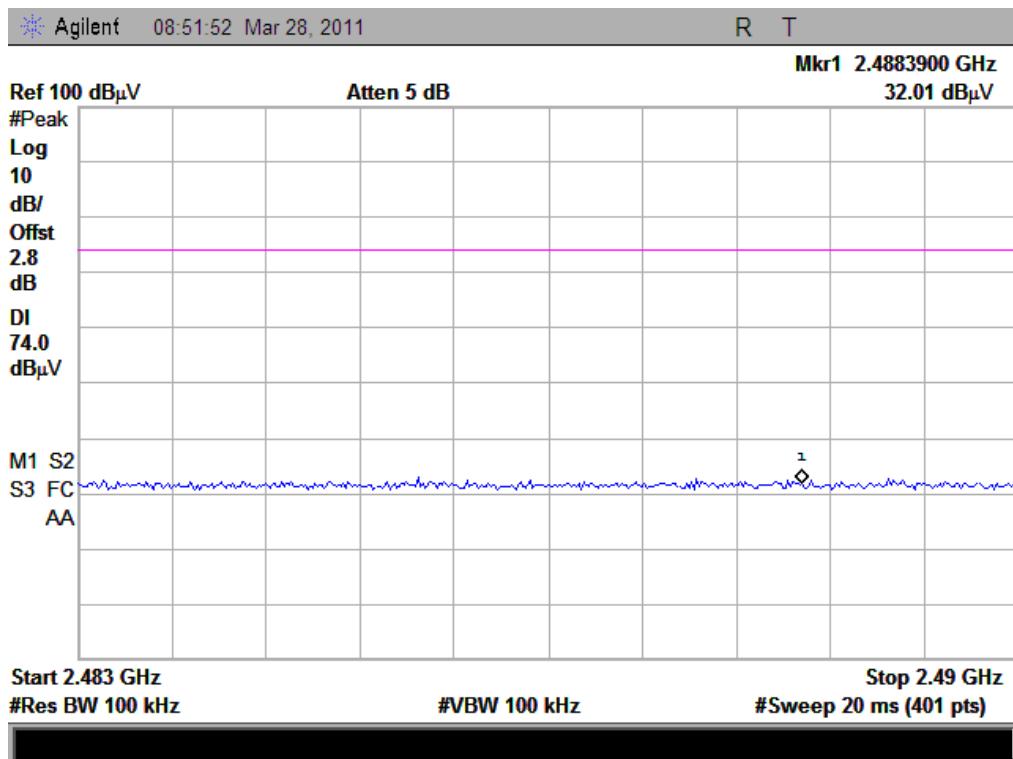


A. Test Verdict:


$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	33.49	26.94	74	54	PASS
78	2480	31.64	24.76	74	54	PASS


B. Test Plot:

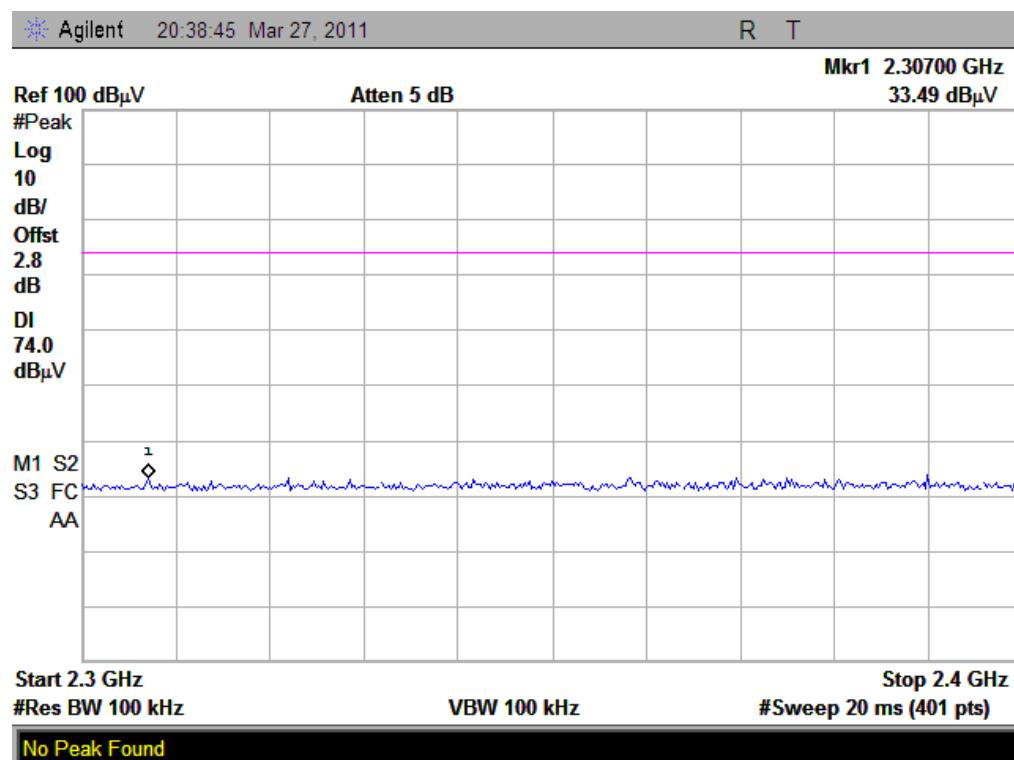


(Plot A1: Channel = 0 PEAK)

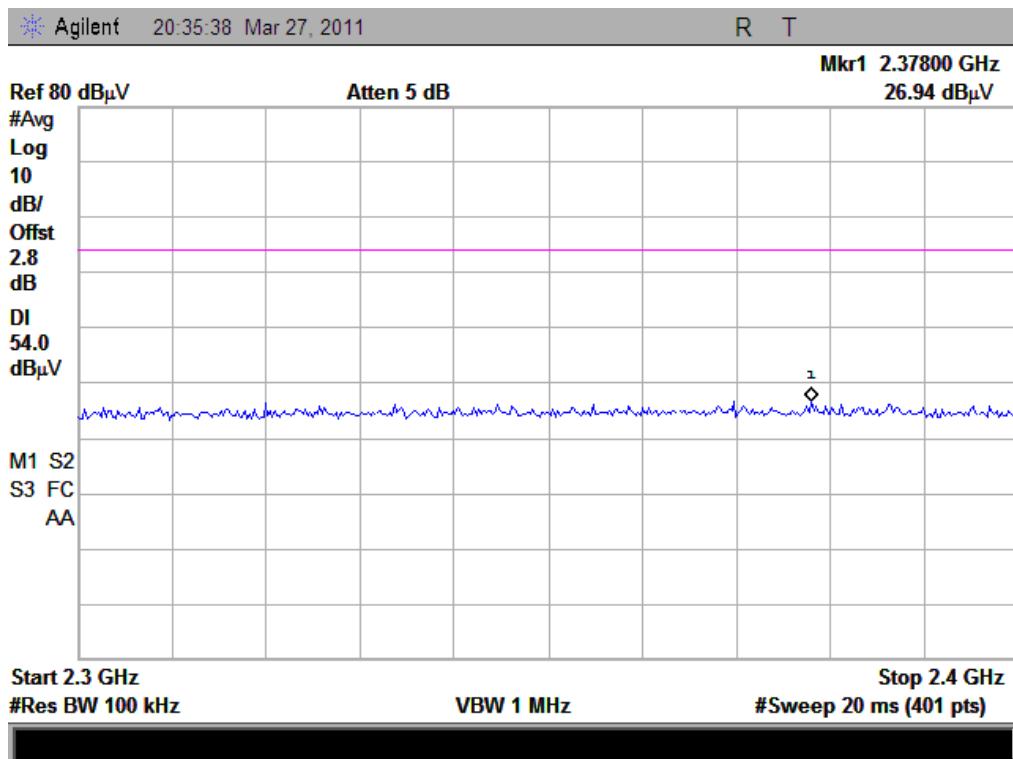

(Plot A2: Channel = 0 AVERAGE)

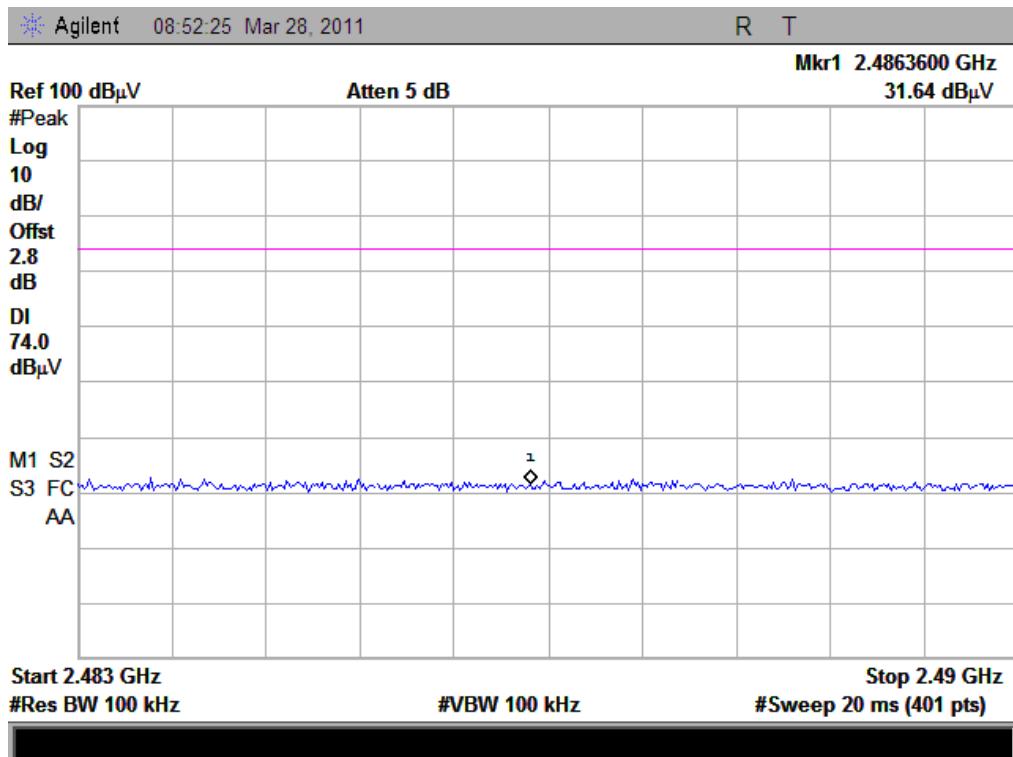

(Plot B1: Channel = 78 PEAK)

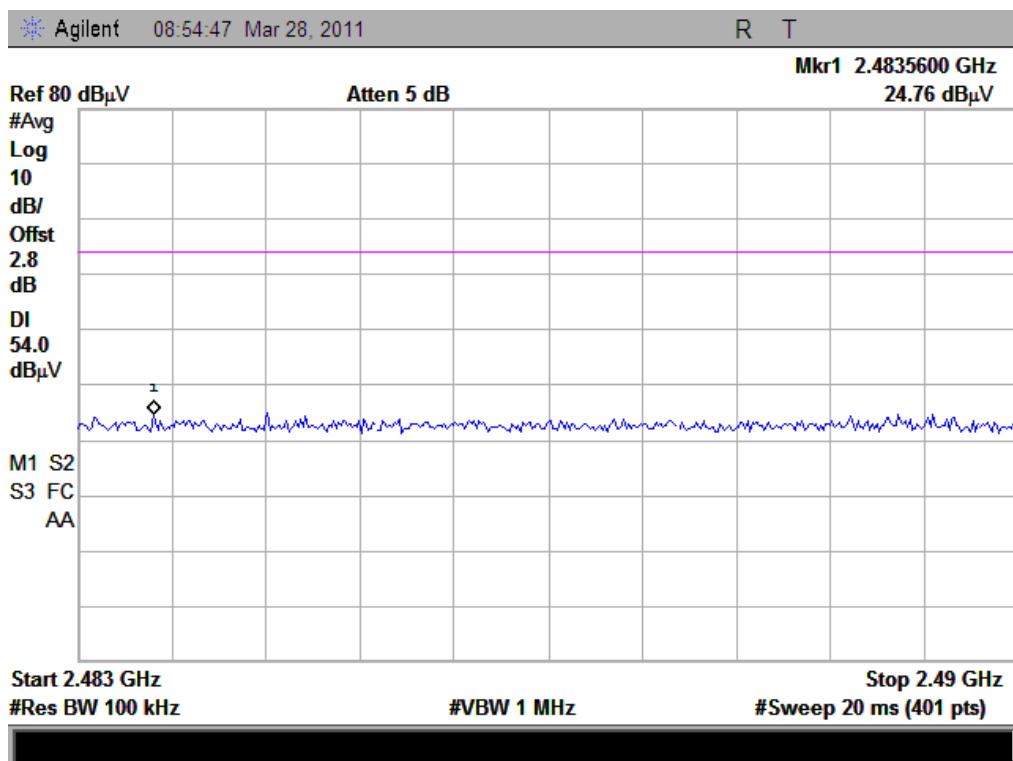



(Plot B2: Channel = 78 AVERAGE)


A. Test Verdict:

8-DPSK Mode


Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	32.74	26.87	74	54	PASS
78	2480	31.51	24.38	74	54	PASS

B. Test Plot:

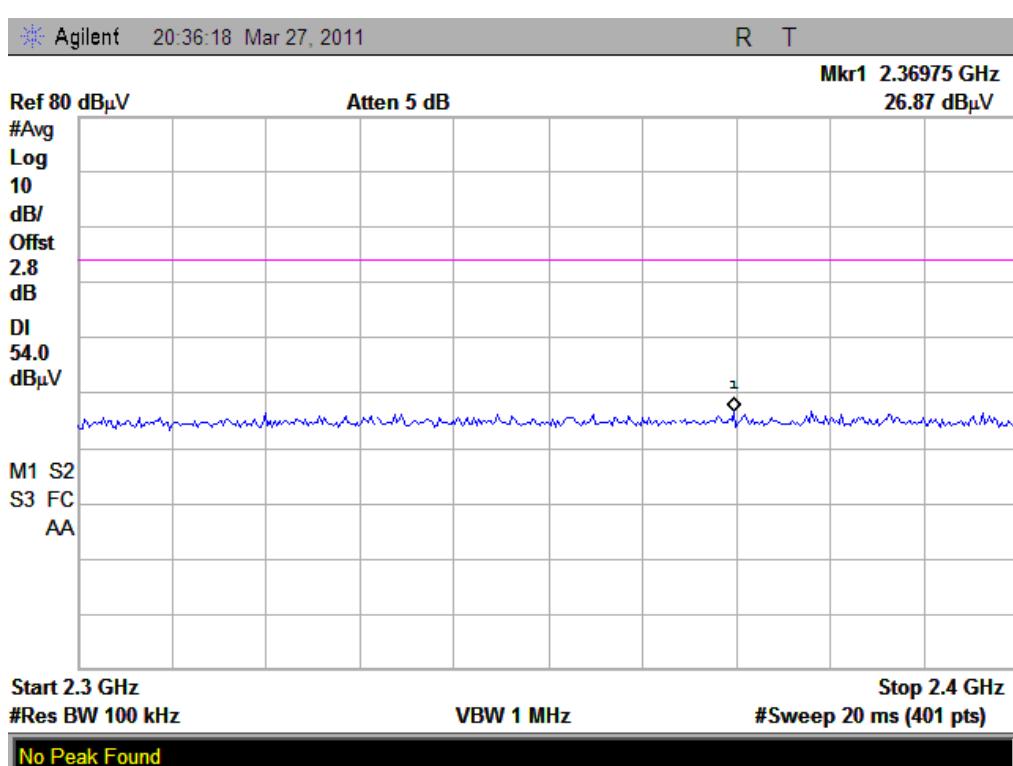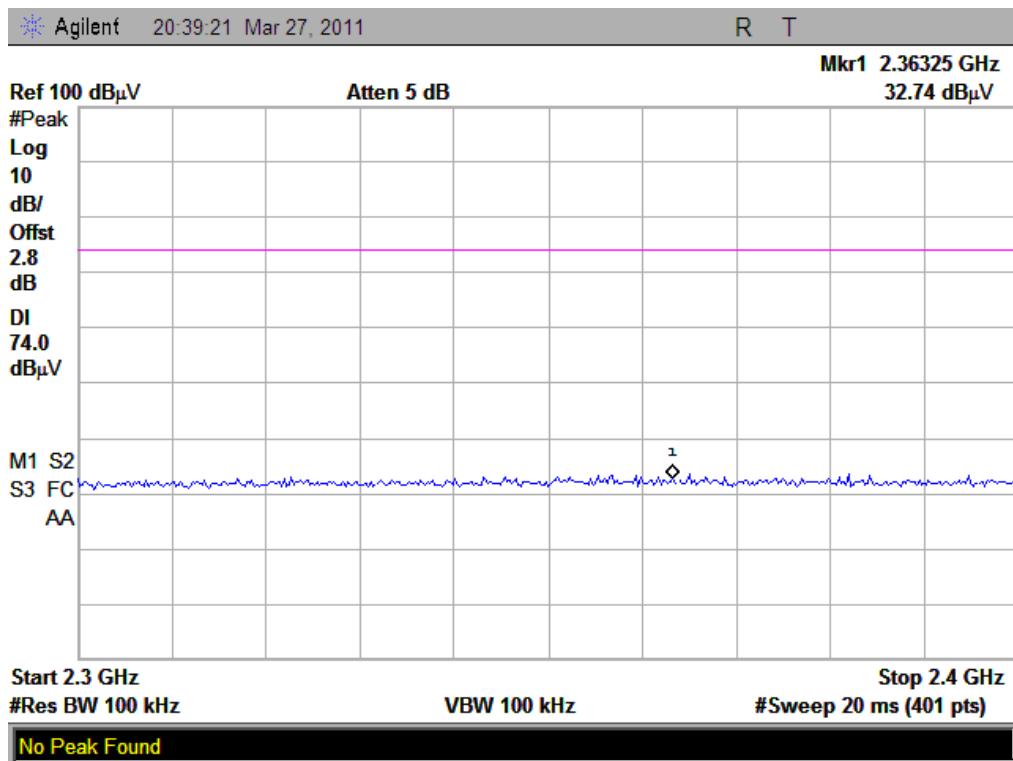

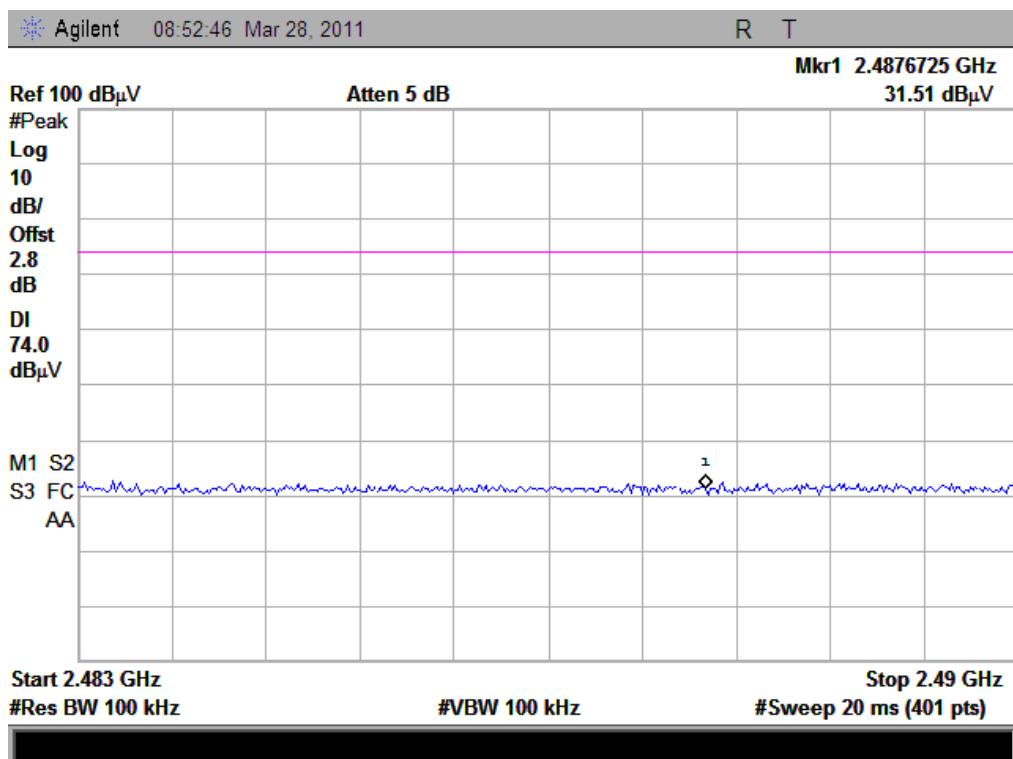

(Plot B1: Channel = 78 PEAK)

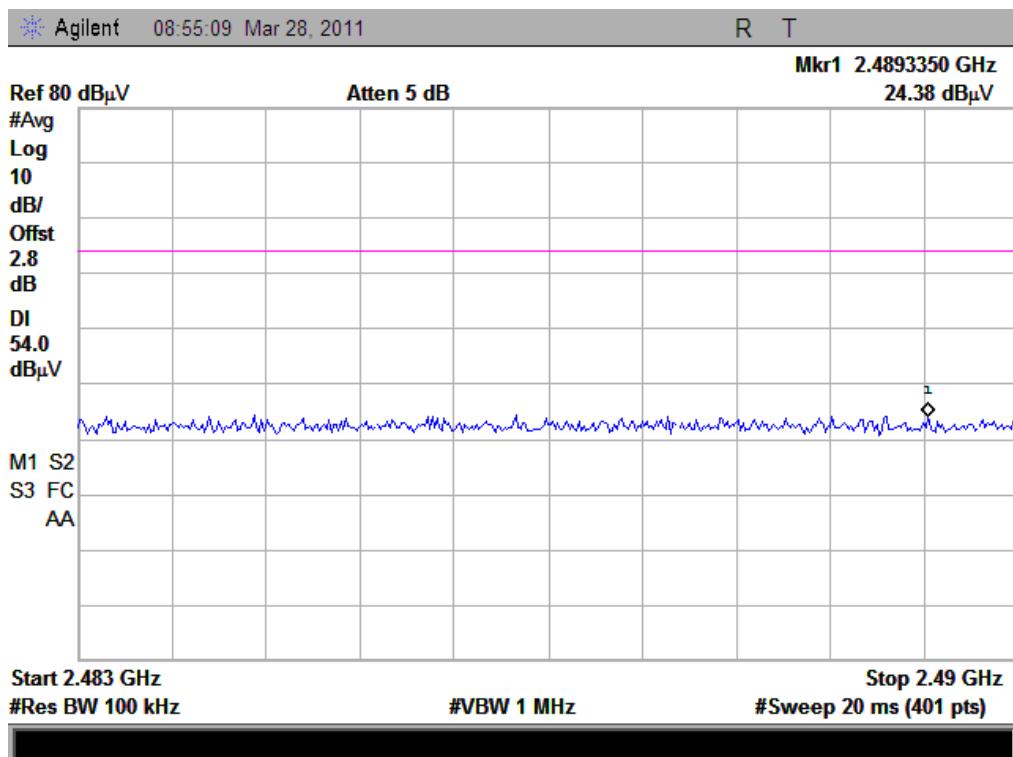

(Plot B2: Channel = 78 AVERAGE)

2.8 Conducted Emission

2.8.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2 Test Description

A. Test Setup:

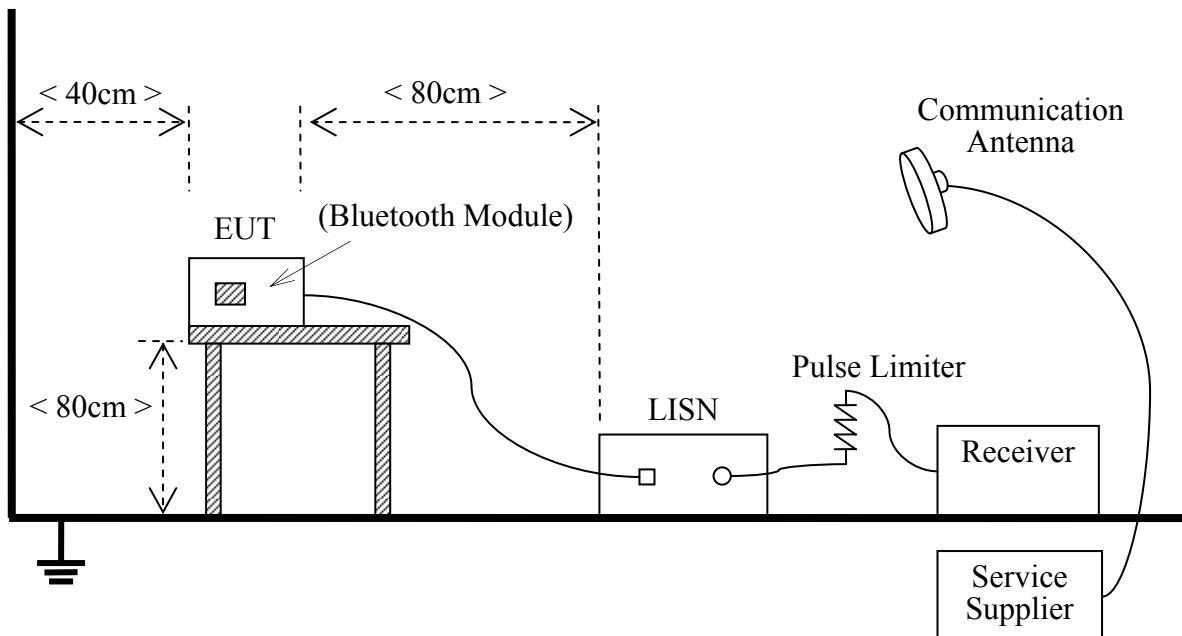

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2003



The Bluetooth Module of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
Receiver	Agilent	E7405A	US44210471	2010.09
LISN	Schwarzbeck	NSLK 8127	812744	2010.09
Service Supplier	R&S	CMU200	100448	2010.09
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)

2.8.3 Test Result

Because of the EUT have not the charger, so this test item will not be applied.

2.9 Radiated Emission

2.9.1 Requirement

According to FCC section 15.247(c) and RSS-A8.5, radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).


According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)	Detector
30 - 88	100	3	QP
88 - 216	150	3	QP
216 - 960	200	3	QP
960 - 1000	500	3	QP
Above 1000	500	3	AV

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)

2.9.2 Test Description

A. Test Setup:

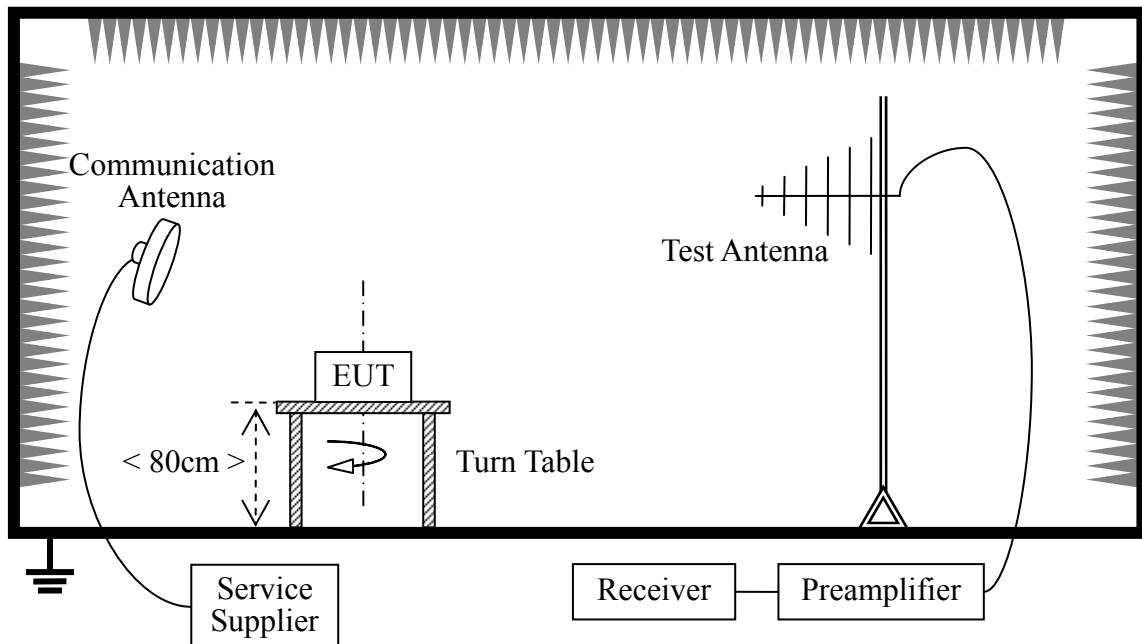

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2003). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna: In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength, the azimuth range of turntable was 0° to 360°, the receive antenna has two polarizations horizontal and vertical. When doing measurements above 1GHz, the EUT was placed within the 3dB beam width range of the horn antenna, and the EUT was tested in 3 orthogonal positions as recommended in ANSI C63.4 for Radiated Emissions and the worst-case data was presented.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2010.9
Receiver	Agilent	E7405A	US44210471	2010.9
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2010.9
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2010.9
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2010.9
Test Antenna - circular	R&S	AC004R1	0749.3000.03	2010.9

2.9.3 Test Result

GFSK Mode:

C. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	89.05	83.46	Horizontal	Plot A.1
		94.58	86.37	Vertical	Plot A.2
39	2441	89.76	83.91	Horizontal	Plot B.1
		91.57	86.79	Vertical	Plot B.2
78	2480	87.19	80.95	Horizontal	Plot C.1

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
		89.97	83.74		

The un-wanted Emissions:

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
240.5 M	28.79	46	-17.21	100	77	Horizontal
448.1 M	27.82	46	-18.18	100	55	Horizontal
1603 M	40.04	54	-13.96	100	74	Horizontal
2500 M	48.59	54	-5.41	100	340	Horizontal
3715 M	46.92	54	-7.08	100	292	Horizontal
7990 M	44.91	54	-9.09	100	360	Horizontal
66.9 M	29.78	40	-10.22	100	2	Vertical
240.5 M	28.05	46	-17.95	100	35	Vertical
960.2 M	36	54	-18	100	0	Vertical
1603 M	38.57	54	-15.43	100	116	Vertical
2928 M	48.1	54	-5.9	100	316	Vertical
8125 M	44.05	54	-9.95	100	360	Vertical

Test result of channel: 39 (2442MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
66.9 M	24.23	40	-15.77	100	57	Horizontal
240.5 M	27.9	46	-18.1	100	18	Horizontal
379.2 M	31.62	46	-14.38	100	2	Horizontal
720.6 M	29.92	46	-16.08	100	40	Horizontal
2793 M	48.97	54	-5.03	100	70	Horizontal
6572 M	44.7	54	-9.3	100	0	Horizontal
66.9 M	29.41	40	-10.59	100	2	Vertical
240.5 M	27.53	46	-18.47	100	10	Vertical
960.2 M	35.1	54	-18.9	100	21	Vertical
1627 M	37.82	54	-16.18	100	22	Vertical
2590 M	48.72	54	-5.28	100	44	Vertical
7945 M	44.81	54	-9.19	100	19	Vertical


Test result of channel: 78 (2480MHz)




Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
36.8 M	25.22	40	-14.78	100	308	Horizontal
240.5 M	30.37	46	-15.63	100	268	Horizontal
598.4 M	36.58	46	-9.42	100	207	Horizontal
2793 M	46.13	54	-7.87	100	315	Horizontal
8777 M	44.24	54	-9.76	100	315	Horizontal
36.8 M	25.44	40	-14.56	100	11	Vertical
66.9 M	30.9	40	-9.1	100	0	Vertical
240.5 M	27.12	46	-18.88	100	0	Vertical
960.2 M	35.09	54	-18.91	100	2	Vertical
2928 M	45.6	54	-8.4	100	19	Vertical
8035 M	44.05	54	-9.95	94	94	Vertical

D. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

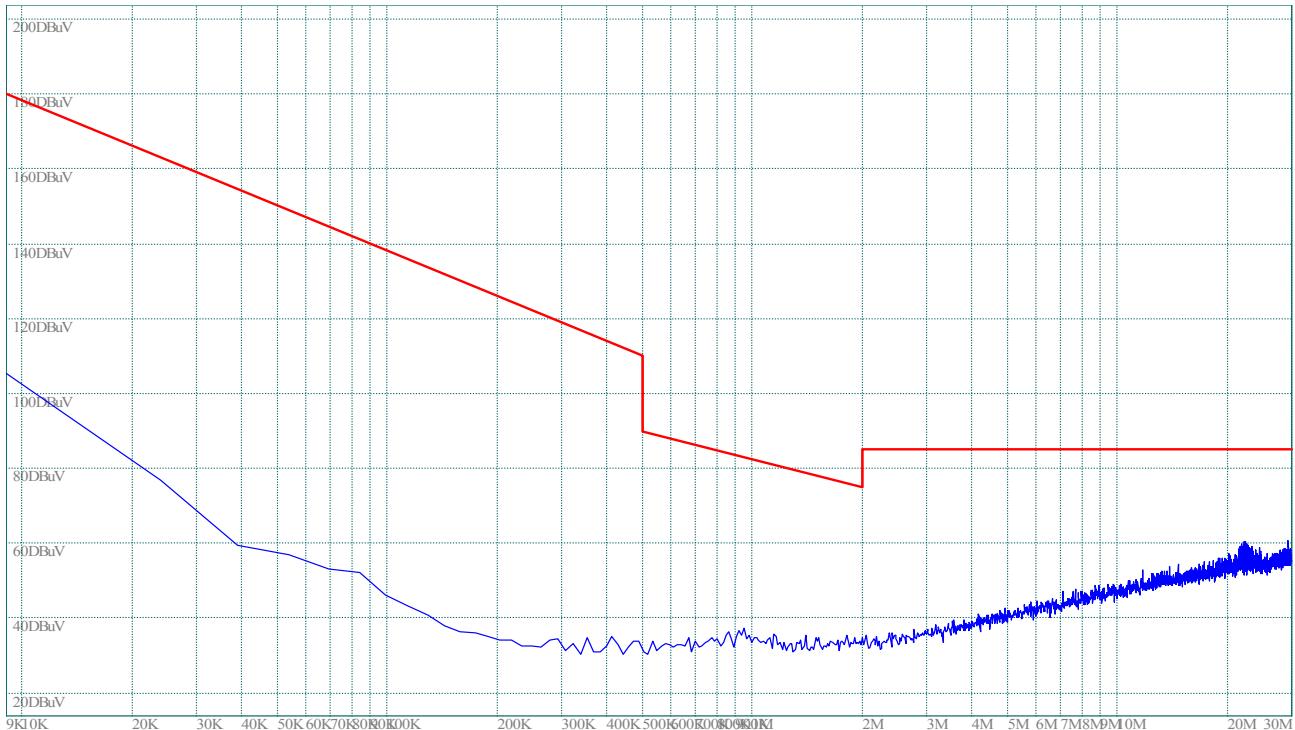

(Plot A.0: 9kHz to 30MHz)

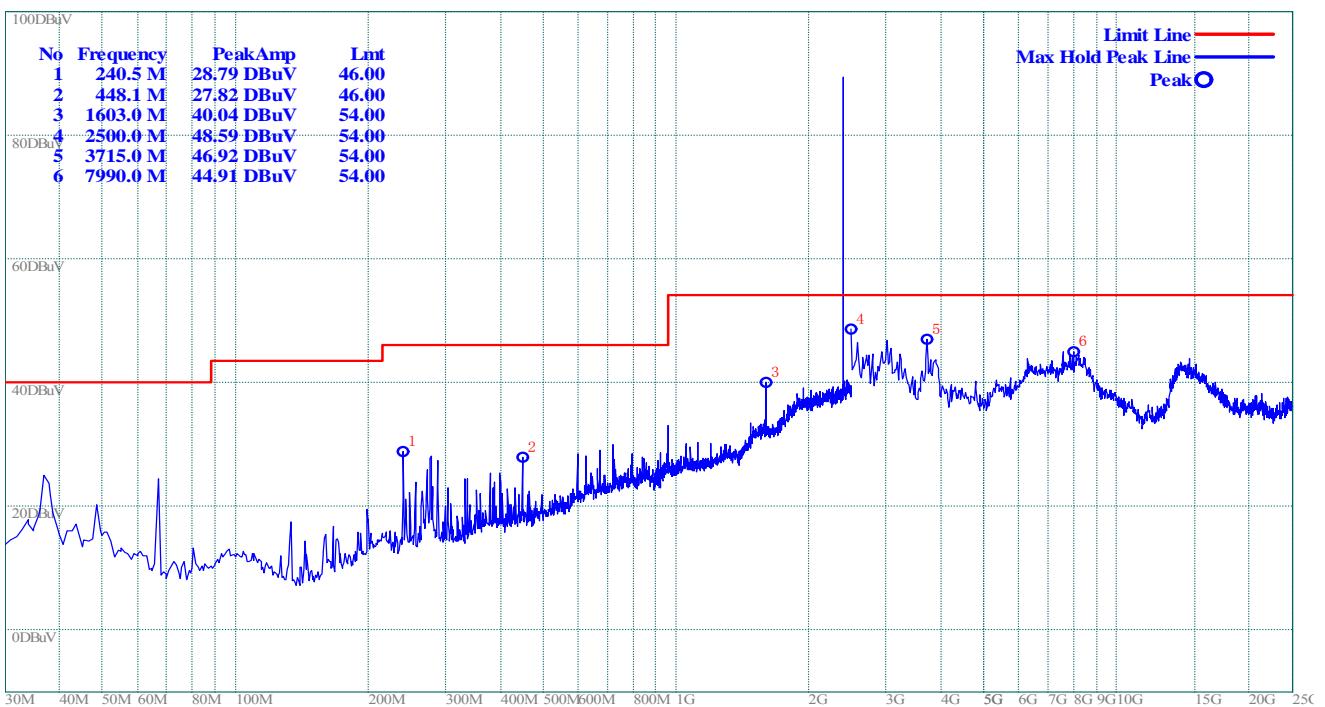


(Plot A.1: Antenna Horizontal)

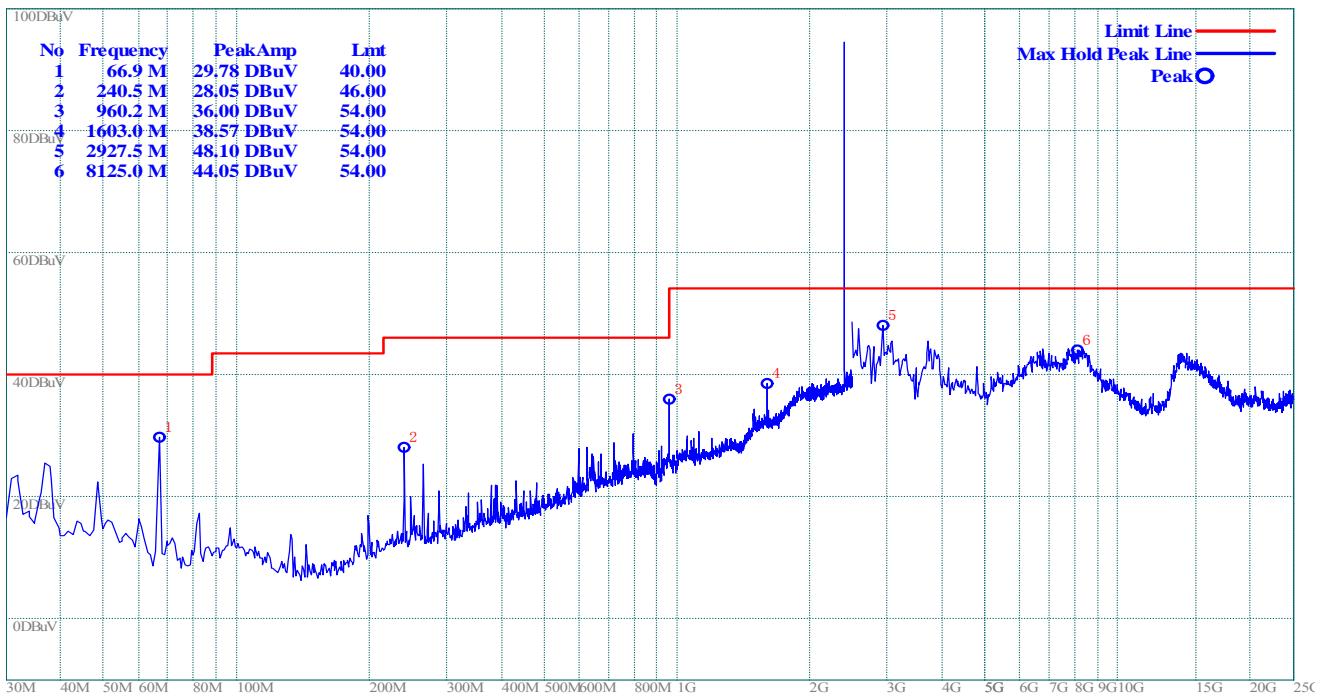


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

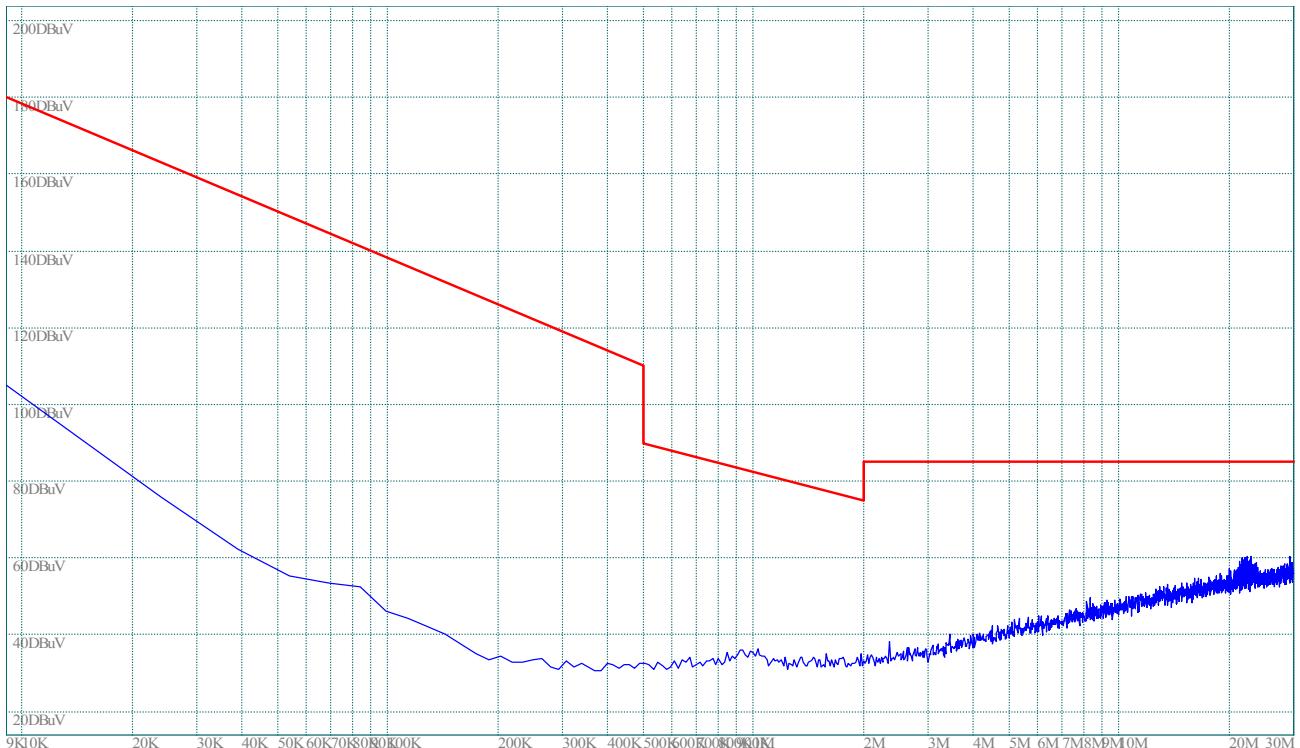

(Plot B.0: 9kHz to 30MHz)


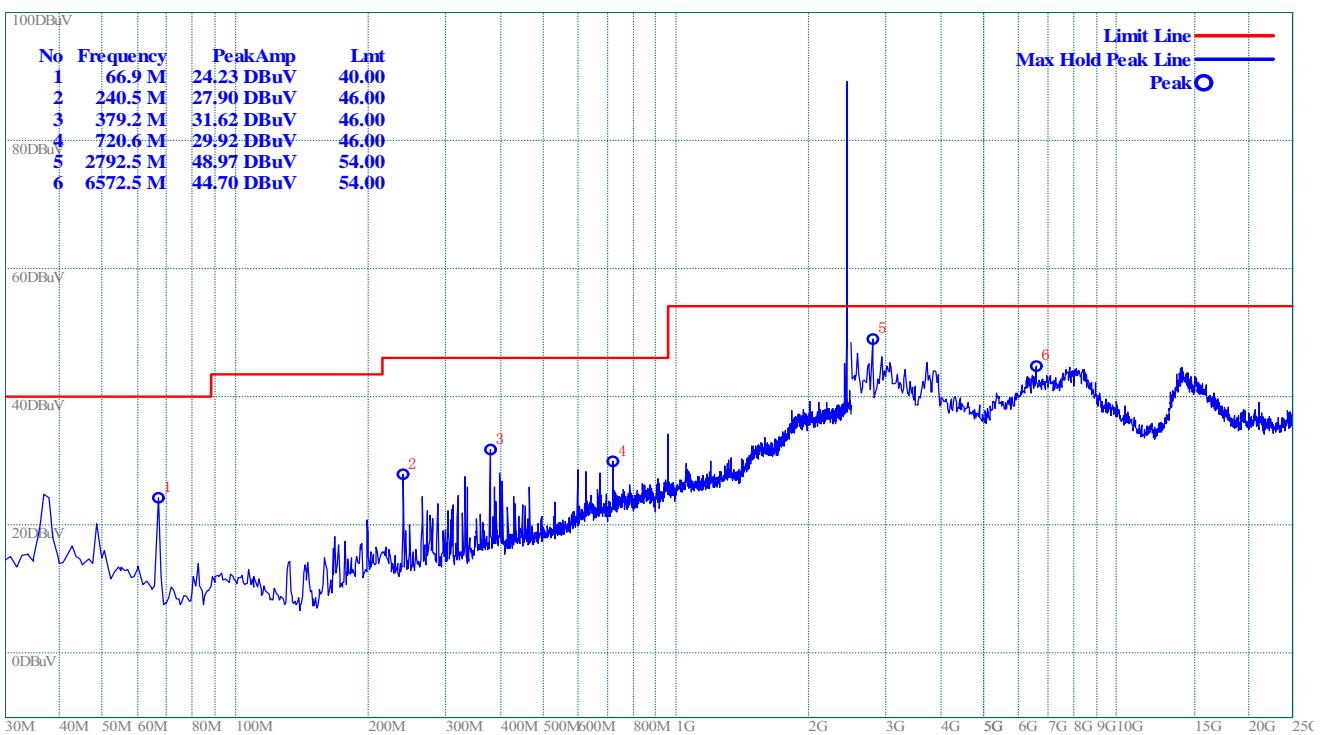



(Plot B.1: Antenna Horizontal)

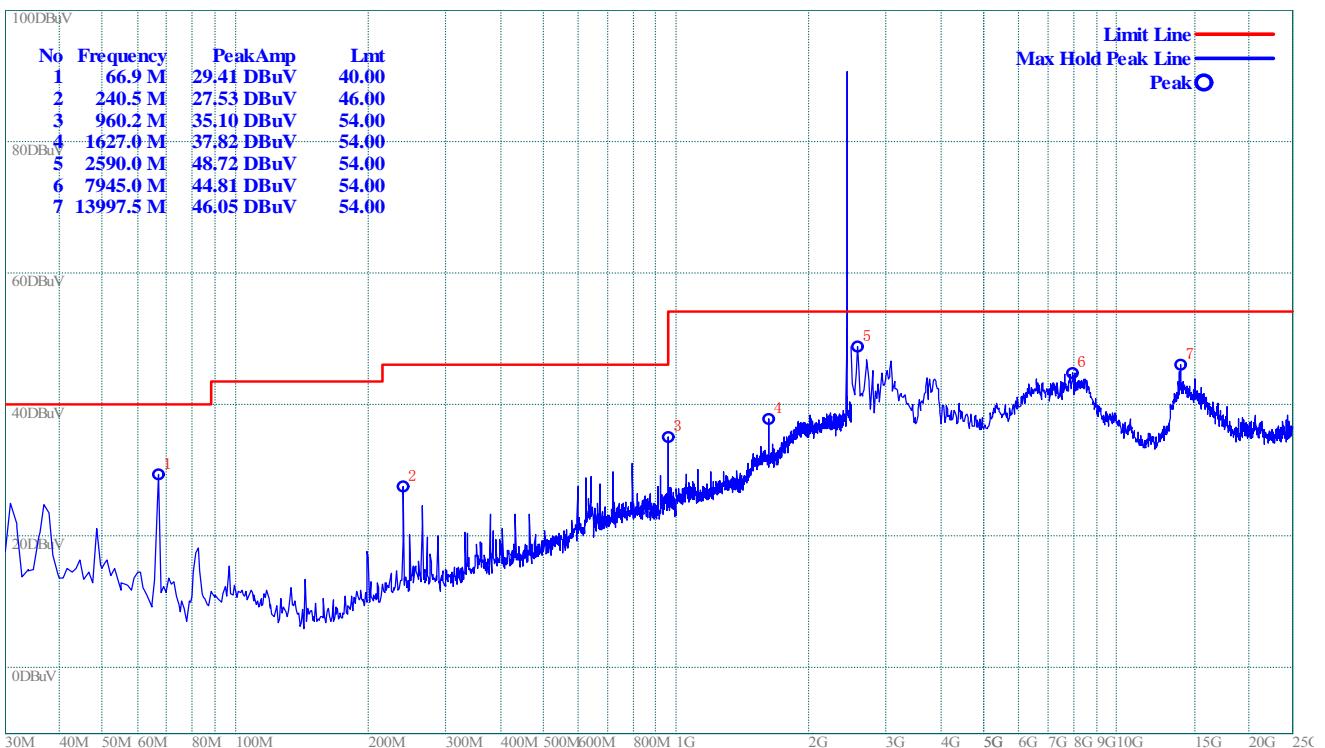

(Plot B.2: Antenna Vertical)

Plot for Channel = 78

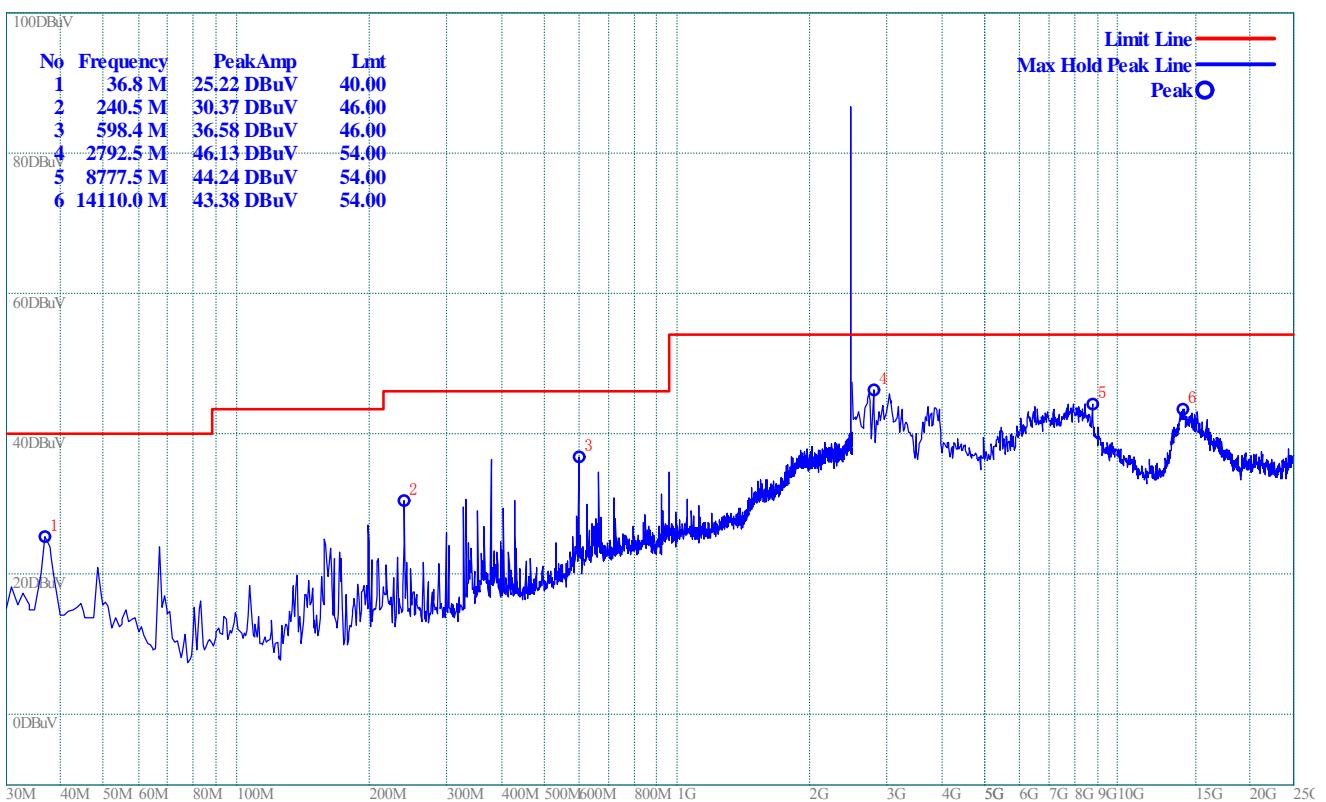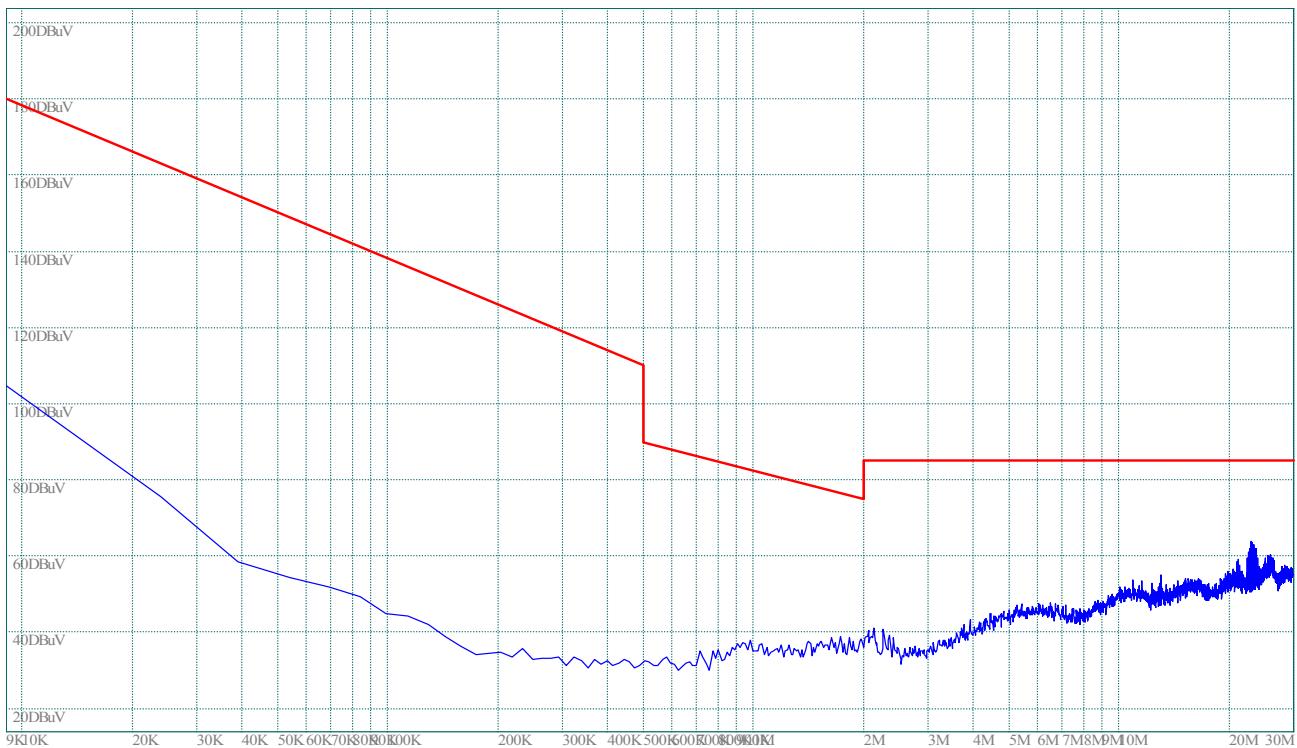

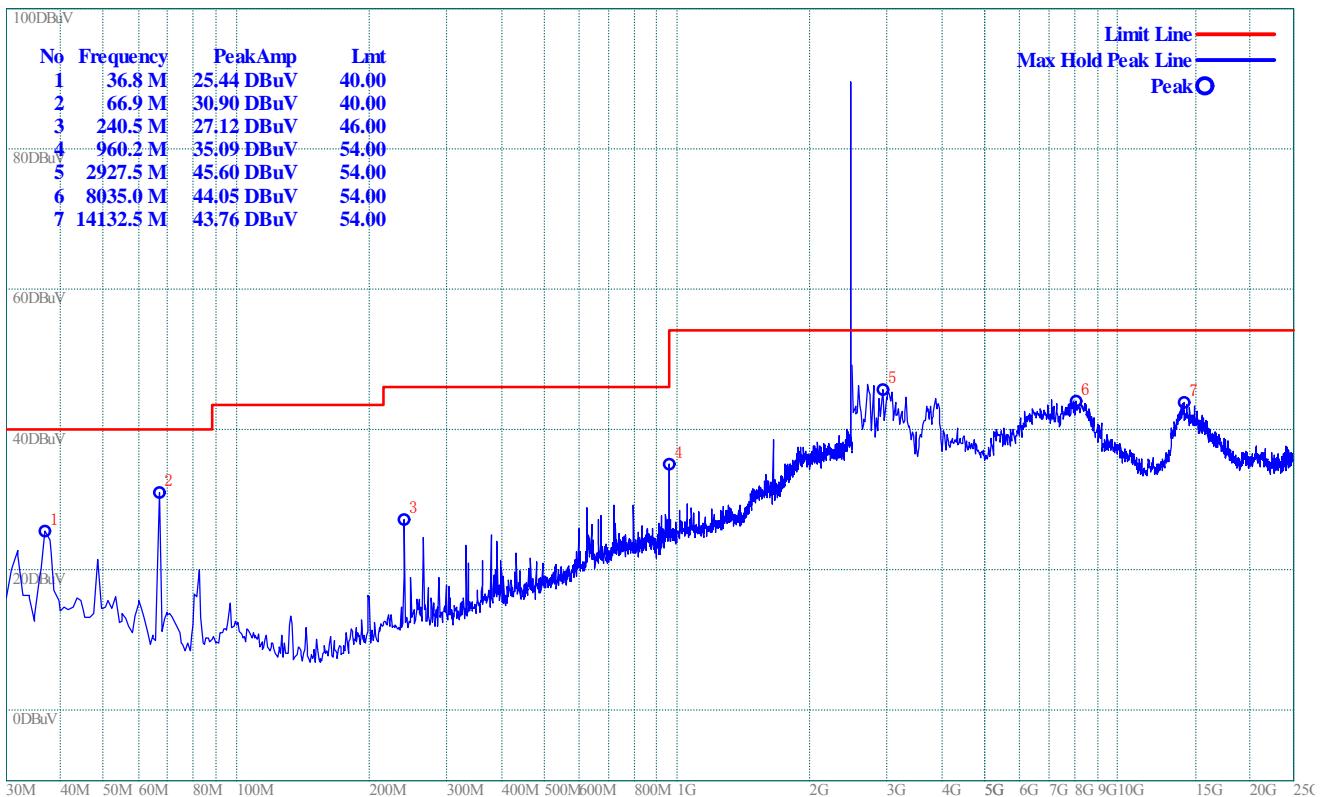

(Plot C.2: Antenna Vertical)

$\pi/4$ -DQPSK Mode:

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	84.55	79.06	Horizontal	Plot A.1
		88.86	82.24	Vertical	Plot A.2
39	2441	84.92	80.13	Horizontal	Plot B.1
		91.55	84.65	Vertical	Plot B.2
78	2480	86.03	81.24	Horizontal	Plot C.1
		86.48	81.93	Vertical	Plot C.2

The un-wanted Emissions:

Test result of channel: 0 (2402MHz)



Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
208.5 M	31.6	43.5	-11.9	100	206	Horizontal
912.7 M	34.94	46	-11.06	100	94	Horizontal
52.3 M	32.11	40	-7.89	100	73	Vertical
912.7 M	33.93	46	-12.07	100	359	Vertical

Test result of channel: 39 (2442MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
208.5 M	24.5	43.5	-19	100	0	Horizontal
912.7 M	32.49	46	-13.51	100	34	Horizontal
208.5 M	23.41	43.5	-20.09	100	111	Vertical
912.7 M	32.97	46	-13.03	100	325	Vertical

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
208.5 M	30.38	43.5	-13.12	100	203	Horizontal
912.7 M	34.18	46	-11.82	100	152	Horizontal
31.0 M	35.96	40	-4.04	100	357	Vertical
240.5 M	23.34	46	-22.66	100	306	Vertical
624.6 M	30.8	46	-15.2	100	306	Vertical
2.793 G	47.89	54	-6.11	100	271	Vertical

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0



(Plot A.0: 9kHz to 30MHz)

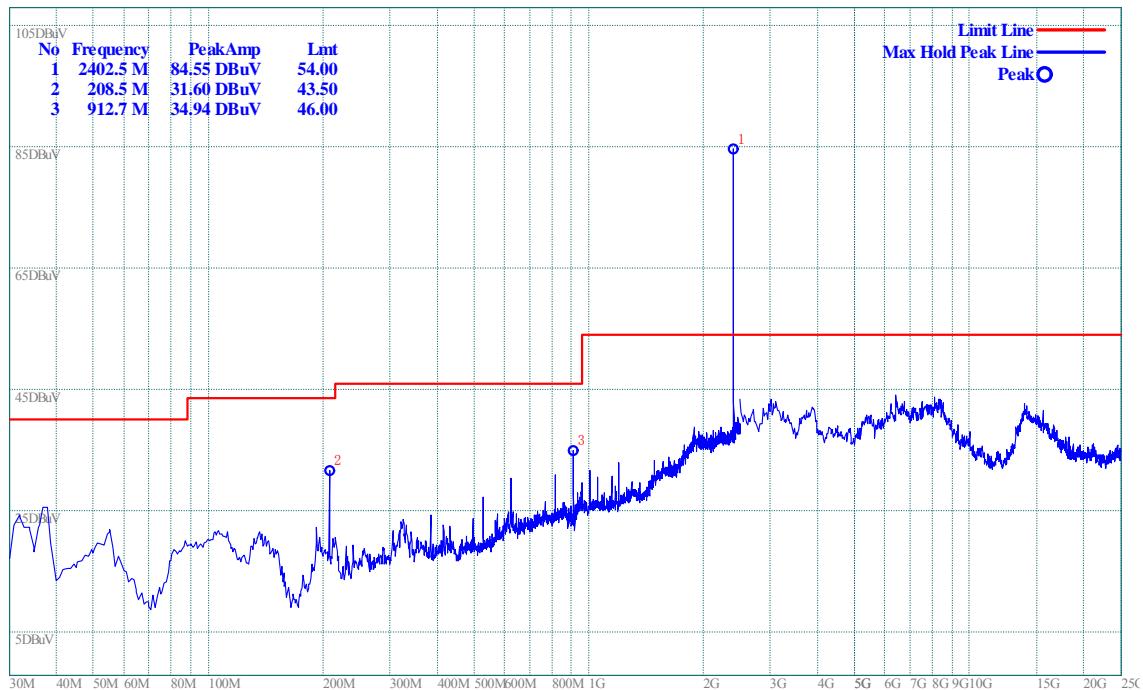

(Plot A.1: Antenna Horizontal)

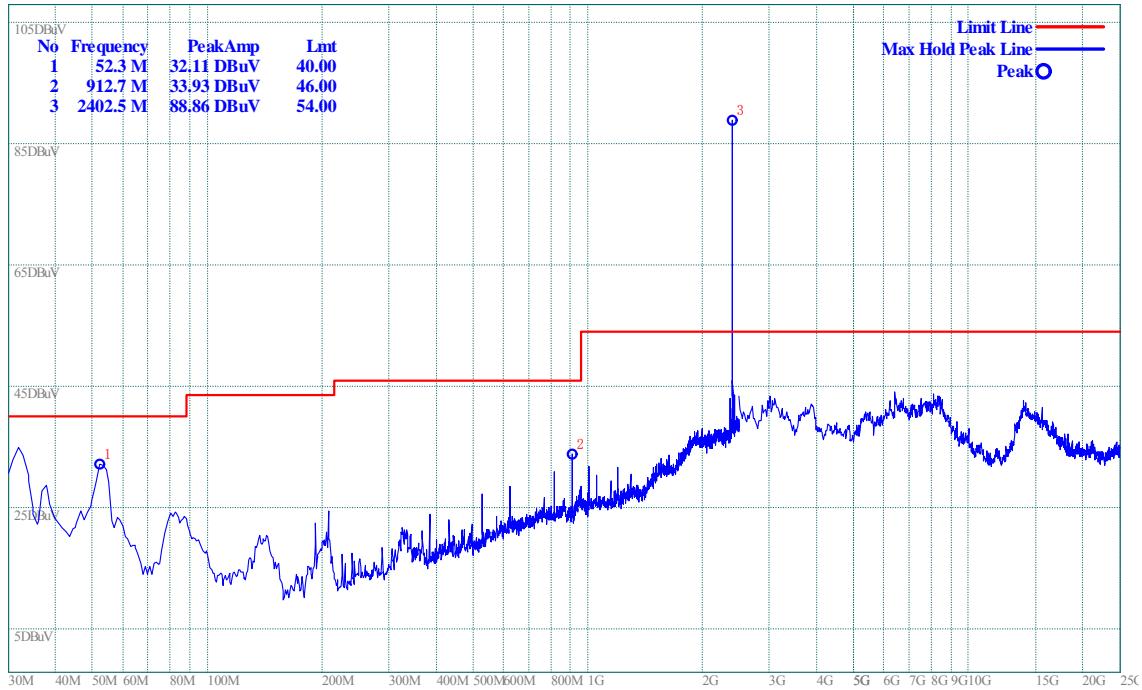


(Plot A.2: Antenna Vertical)


Plot for Channel = 39



(Plot B.0: 9kHz to 30MHz)

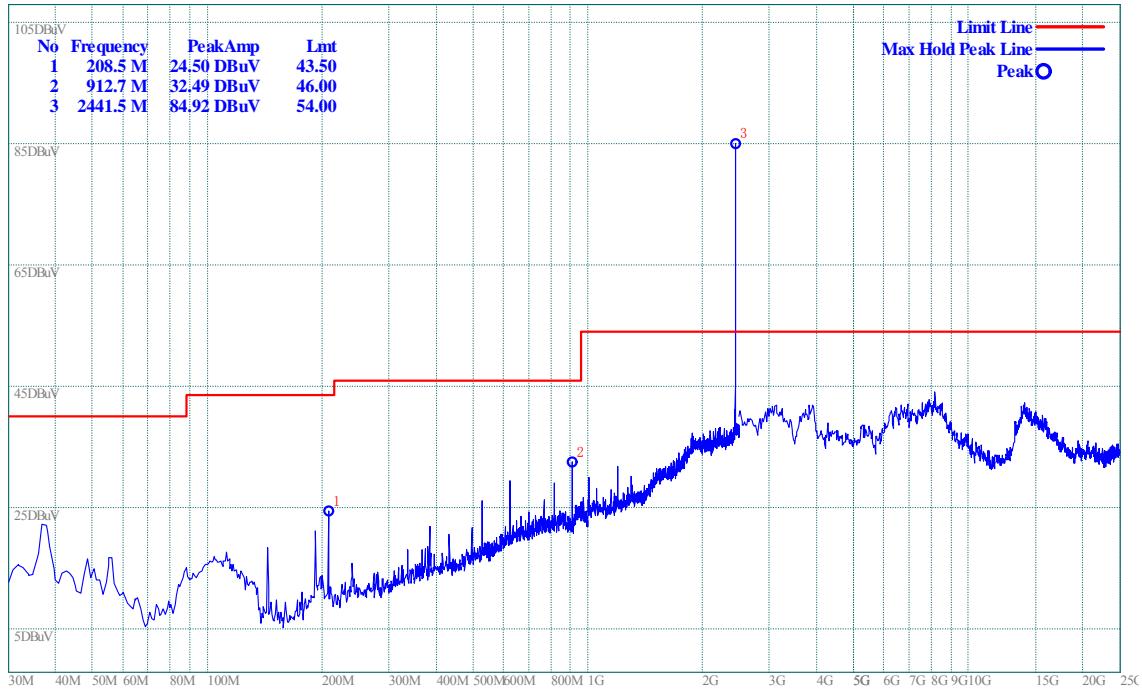


(Plot B.1: Antenna Horizontal)

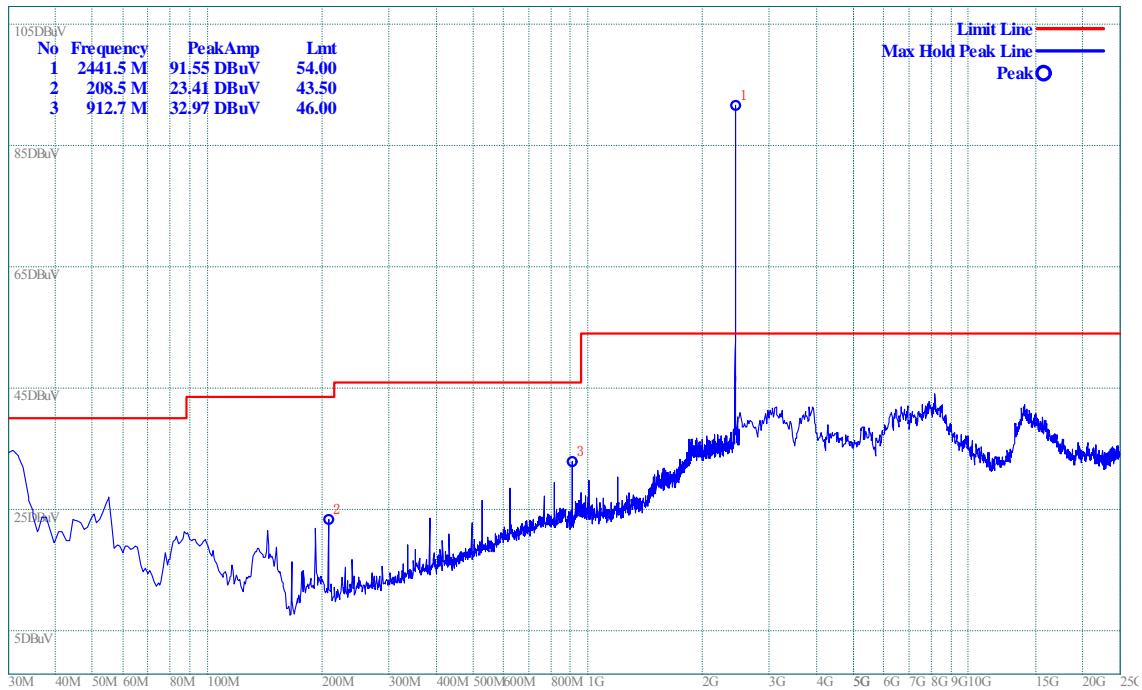


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

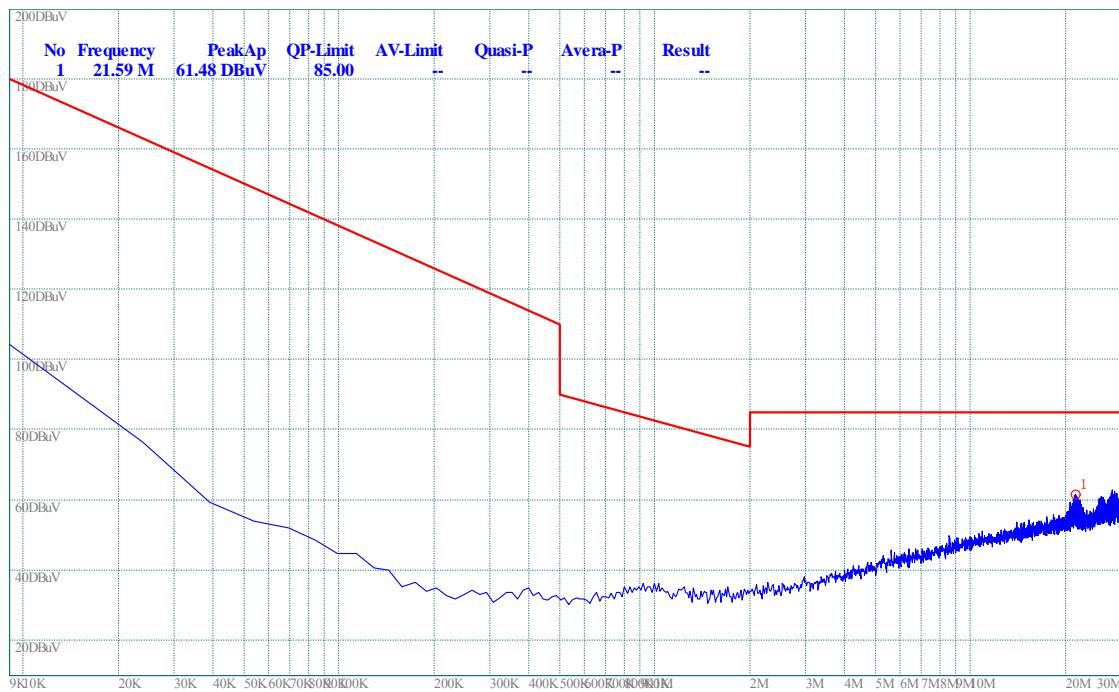

(Plot C.0: 9kHz to 30MHz)

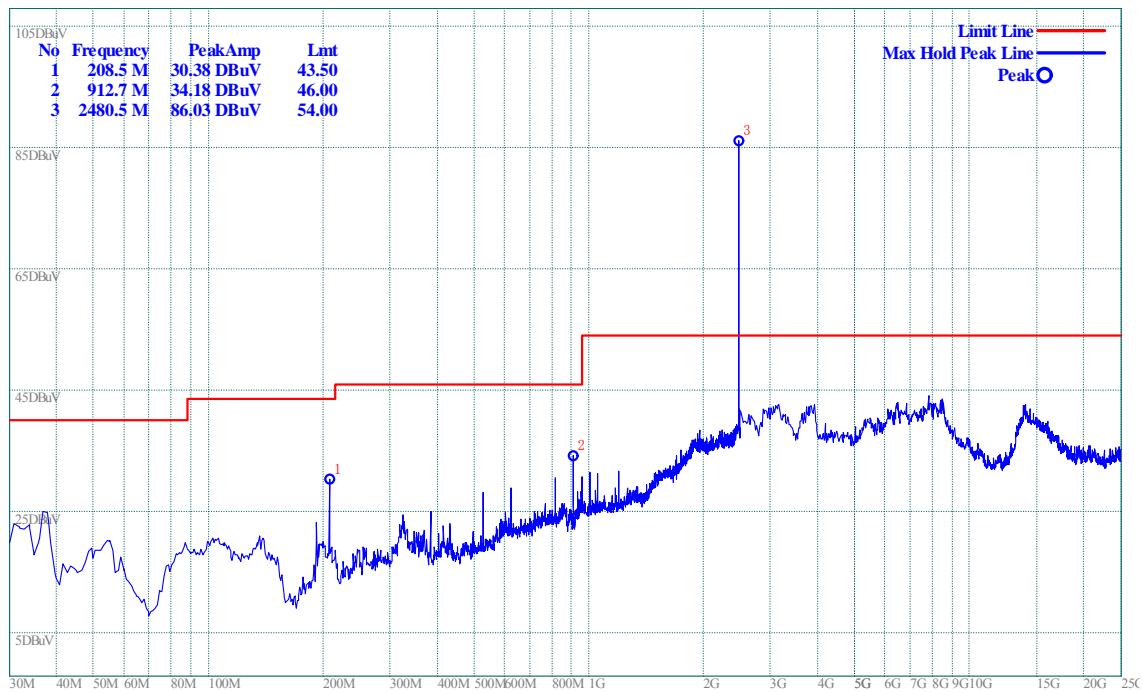

(Plot C.1: Antenna Horizontal)

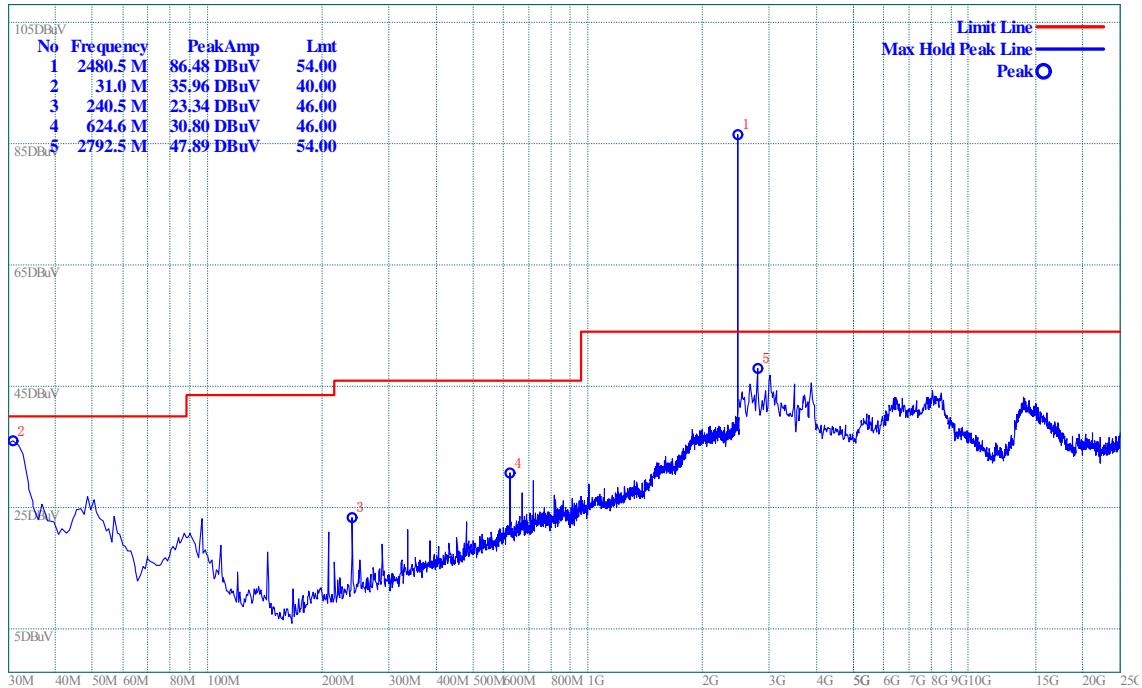

(Plot C.2: Antenna Vertical)

8-DPSK Mode:

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	84.55	79.85	Horizontal	Plot A.1
		88.86	83.21	Vertical	Plot A.2
39	2441	84.92	79.89	Horizontal	Plot B.1
		91.55	86.09	Vertical	Plot B.2
78	2480	86.03	82.55	Horizontal	Plot C.1
		86.48	83.16	Vertical	Plot C.2

The un-wanted Emissions:

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
208.5 M	31.6	43.5	-11.9	100	206	Horizontal
912.7 M	34.94	46	-11.06	100	94	Horizontal
52.3 M	32.11	40	-7.89	100	73	Vertical
912.7 M	33.93	46	-12.07	100	359	Vertical

Test result of channel: 39 (2442MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
208.5 M	24.5	43.5	-19	100	0	Horizontal
912.7 M	32.49	46	-13.51	100	34	Horizontal
208.5 M	23.41	43.5	-20.09	100	111	Vertical
912.7 M	32.97	46	-13.03	100	325	Vertical

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
208.5 M	30.38	43.5	-13.12	100	203	Horizontal
912.7 M	34.18	46	-11.82	100	152	Horizontal
31.0 M	35.96	40	-4.04	100	357	Vertical
240.5 M	23.34	46	-22.66	100	306	Vertical
624.6 M	30.8	46	-15.2	100	306	Vertical
2.793 G	47.89	54	-6.11	100	271	Vertical

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

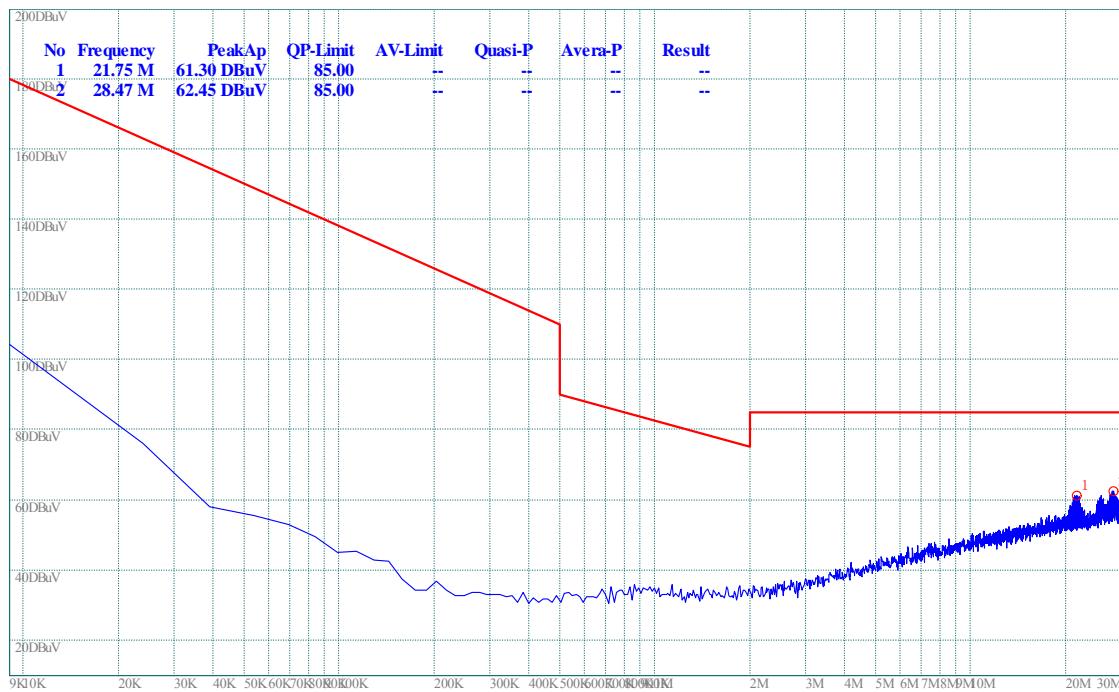

(Plot A.0: 9kHz to 30MHz)

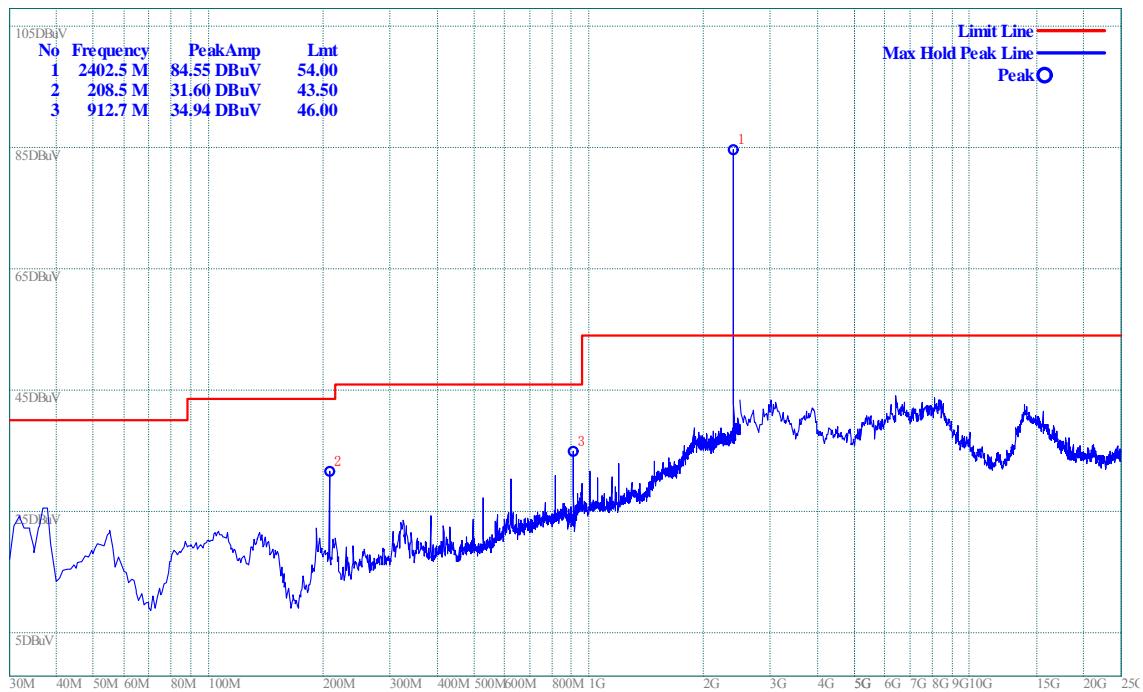

(Plot A.1: Antenna Horizontal)

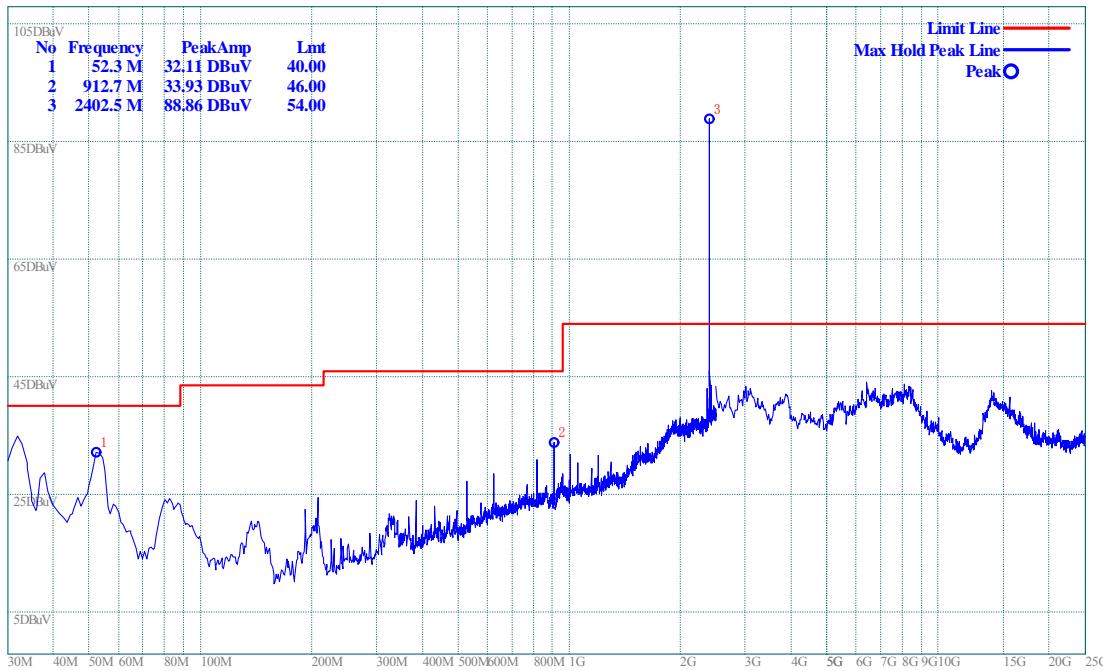


(Plot A.2: Antenna Vertical)


Plot for Channel = 39



(Plot B.0: 9kHz to 30MHz)

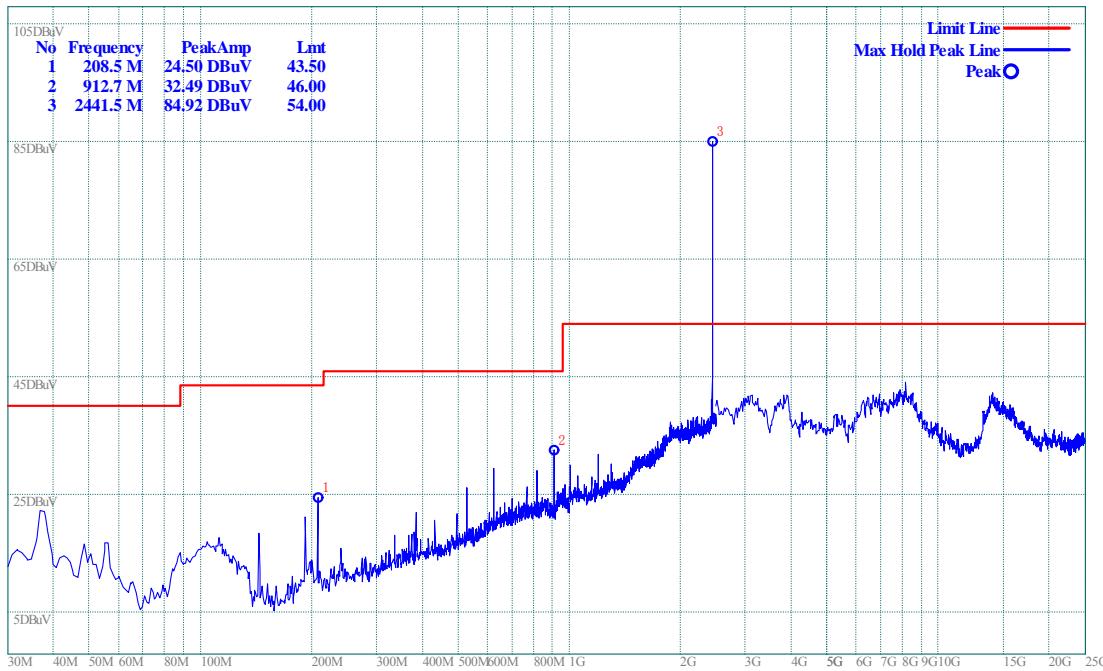

(Plot B.1: Antenna Horizontal)

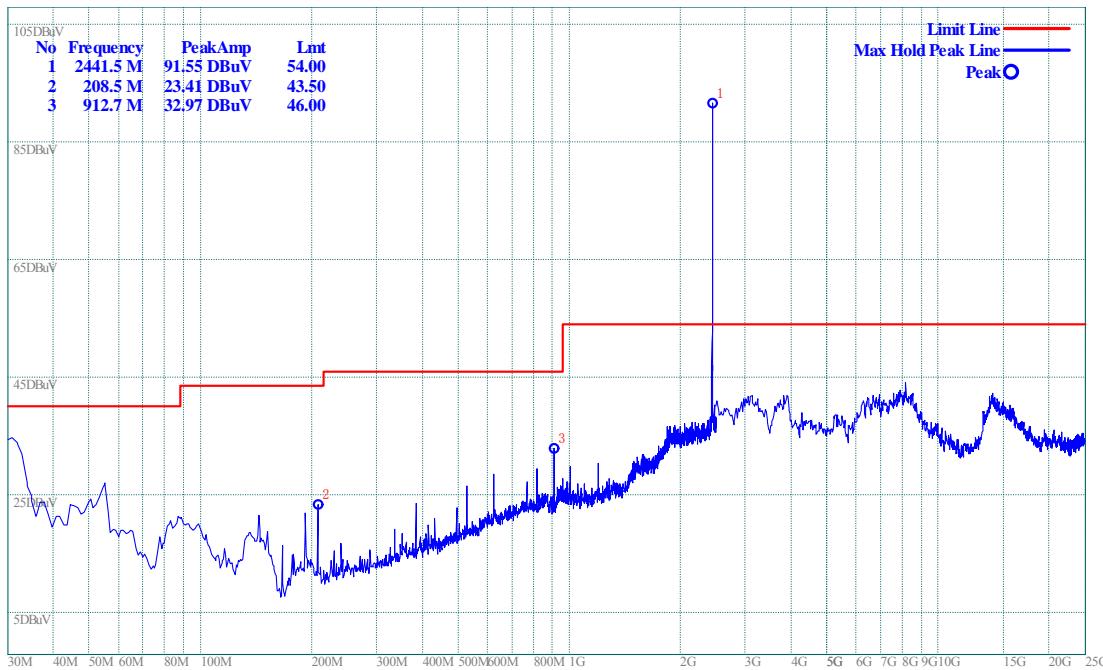


(Plot B.2: Antenna Vertical)


Plot for Channel = 78



(Plot C.0: 9kHz to 30MHz)

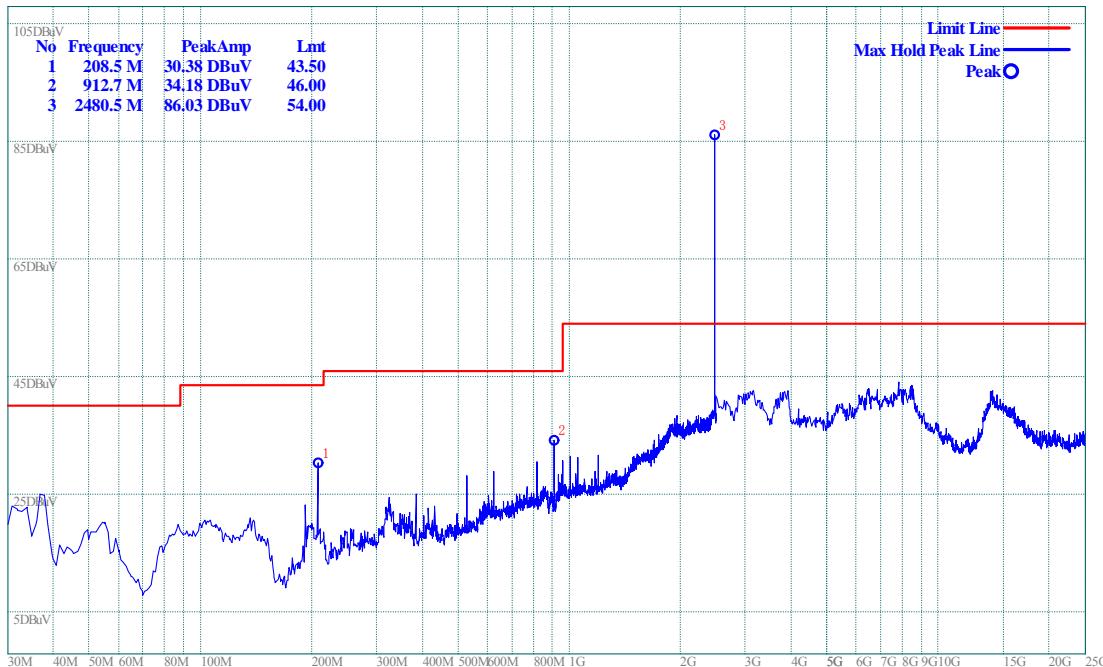

(Plot C.1: Antenna Horizontal)

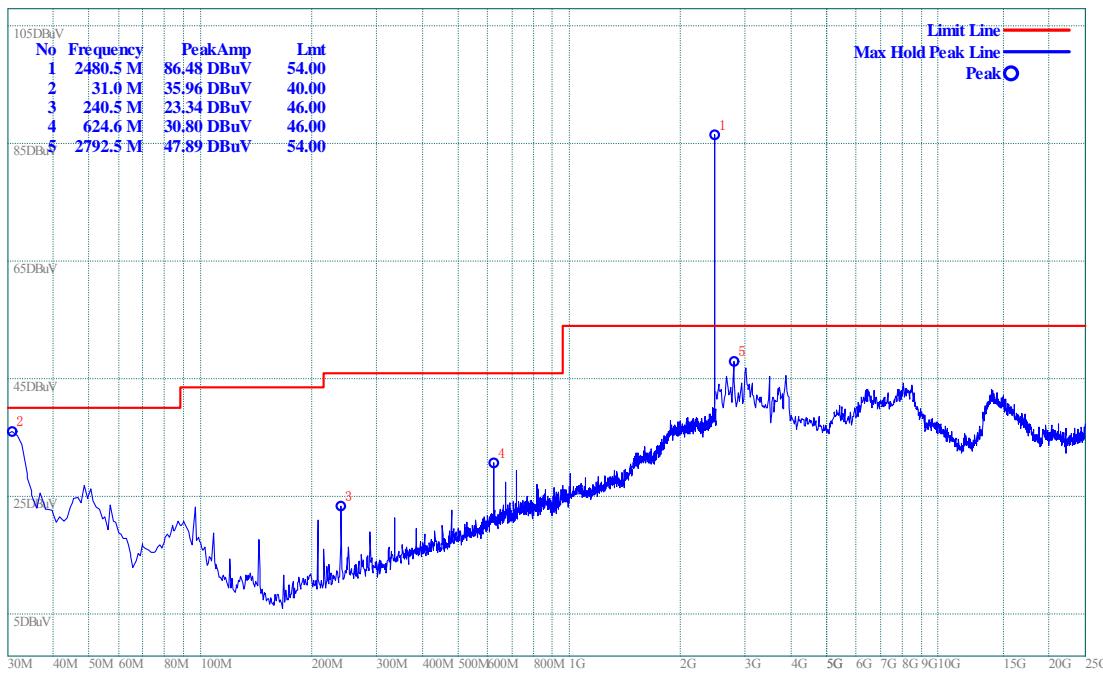

(Plot C.2: Antenna Vertical)

** END OF REPORT **