

Produkte
Products



Prüfbericht - Nr.: 14041284 001			Seite 1 von 15		
<i>Test Report No.:</i>			<i>Page 1 of 15</i>		
Auftraggeber: <i>Client:</i>		BluVision, Inc 3201 Griffin Rd Bld Suit 200 Fort lauderdale Florida United States 33312			
Gegenstand der Prüfung: <i>Test Item:</i>		USB BLE Long Range Beacon			
Bezeichnung: <i>Identification:</i>	USB-BLE-LR	Serien-Nr.: <i>Serial No.:</i>	Engineering sample		
Wareneingangs-Nr.: <i>Receipt No.:</i>	A000247850-001	Eingangsdatum: <i>Date of Receipt:</i>	28.08.2015		
Prüfört: <i>Testing Location:</i>	TÜV Rheinland Hong Kong Ltd. 8/F, First Group Centre, 14 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong Hong Kong Productivity Council HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of test item at delivery:</i>		Test samples are not damaged and suitable for testing.			
Prüfgrundlage: <i>Test Specification:</i>	FCC Part 15 Subpart C ANSI C63.4-2003				
Prüfergebnis: <i>Test Results:</i>	Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed .				
Prüflaboratorium: <i>Testing Laboratory:</i>	TÜV Rheinland Hong Kong Ltd. 8 - 10/F., Goldin Financial Global Square, 7 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong				
geprüft/ tested by:		kontrolliert/ reviewed by:			
08.07.2016	Benny Lau Senior Project Manager		08.07.2016	Sharon Li Department Manager	
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>
Sonstiges: <i>Other Aspects</i>		FCC ID: SL6-LONGRNGUSB			
Abkürzungen:		Abbreviations:			
P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet		P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	4
Manufacturers declarations	4
Product function and intended use	4
Submitted documents.....	4
Independent Operation Modes	4
Related Submittal(s) Grants	4
Remark	4
Test Set-up and Operation Mode.....	5
Principle of Configuration Selection	5
Test Operation and Test Software.....	5
Special Accessories and Auxiliary Equipment.....	5
Countermeasures to achieve EMC Compliance.....	5
Test Methodology	6
Radiated Emission	6
Field Strength Calculation.....	6
Test Setup Diagram	7
List of Test and Measurement Instruments.....	9
Measurement Uncertainty	10
Results FCC Part 15 – Subpart C	11
FCC 15.203 – Antenna Requirement 1.....	Pass..... 11
FCC 15.204 – Antenna Requirement 2.....	N/A..... 11
FCC 15.207 – Conducted Emission on AC Mains	Pass..... 11
FCC 15.247 (a)(2) – 6dB Bandwidth Measurement	Pass..... 12
FCC 15.247(b)(3) – Maximum Peak Conducted Output Power	Pass..... 12
FCC 15.247(e) – Power Spectral Density.....	Pass..... 13
FCC 15.247(d) – Spurious Conducted Emissions.....	Pass..... 13
FCC 15.205 – Radiated Emissions in Restricted Frequency Bands.....	Pass..... 14

Appendix 1 – Test protocols	14 pages
Appendix 2 – Test setup	2 pages
Appendix 3 – EUT External Photos	3 pages
Appendix 4 – EUT Internal Photos	3 pages
Appendix 5 – RF exposure information	2 pages

Product information

Manufacturers declarations

	Transceiver
Operating frequency range	2402 - 2480 MHz
Type of modulation	GFSK
Number of channels	40
Channel separation	2 MHz
Type of antenna	PCB Antenna
Antenna gain (dBi)	0 dBi
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	No
Nominal voltage	V _{nor} : 5 VDC from USB
Independent Operation Modes	Transmitting

Product function and intended use

The equipment under test (EUT) is a Bluetooth low energy device.

FCC ID: SL6-LONGRNGUSB

Models	Product description
USB-BLE-LR	USB BLE Long Range Beacon

Submitted documents

Circuit Diagram
Block Diagram
User manual
Label

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- During test, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power was selected according to the instruction given by the manufacturer. The setting of the RF output power expected by the customer shall be fixed on the firmware of the final end product.

Special Accessories and Auxiliary Equipment

- Laptop (ThinkPad); Brand: IBM; Model: 2373-72H (Provided by TÜV)
- Printer; Brand: HP; Model Q2460A (Provided by TÜV)

Countermeasures to achieve EMC Compliance

- none

Test Methodology

Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.4-2003.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.
R = Reading of Spectrum Analyzer in dBuV.
AF = Antenna Factor in dB.
CF = Cable Attenuation Factor in dB.
FA = Filter Attenuation Factor in dB.
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

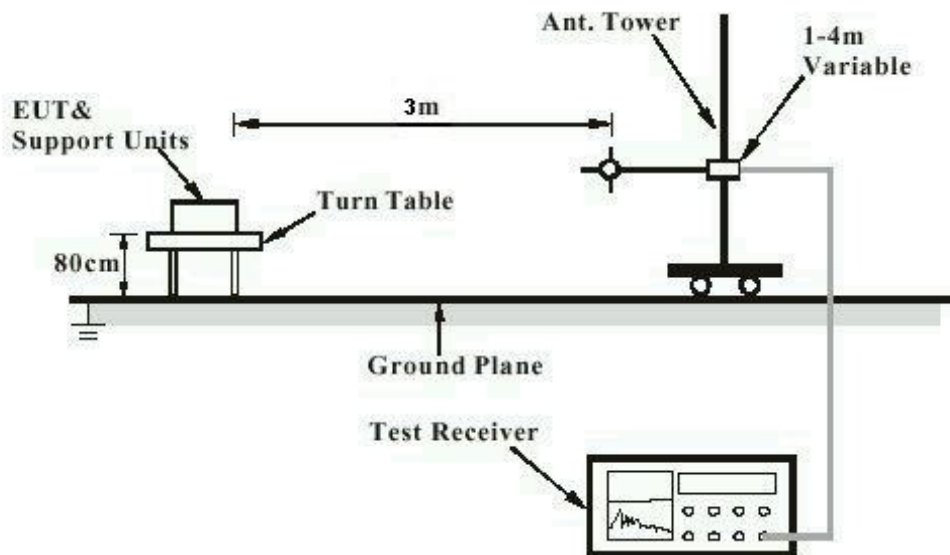

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)


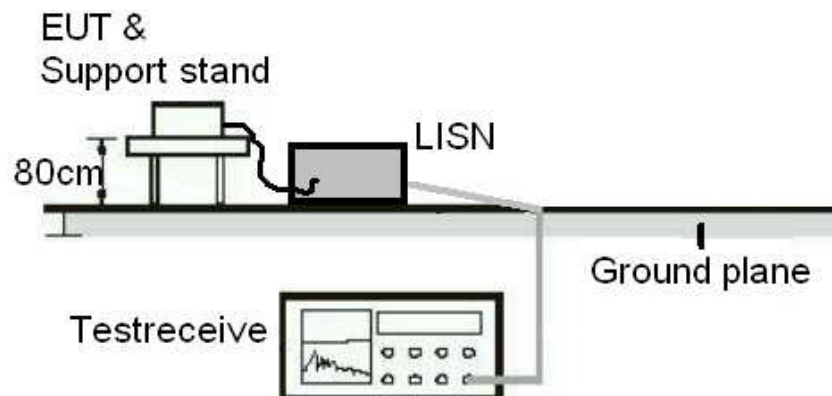


Diagram of Equipment Configuration for Antenna-port Conducted Measurement (if applicable)

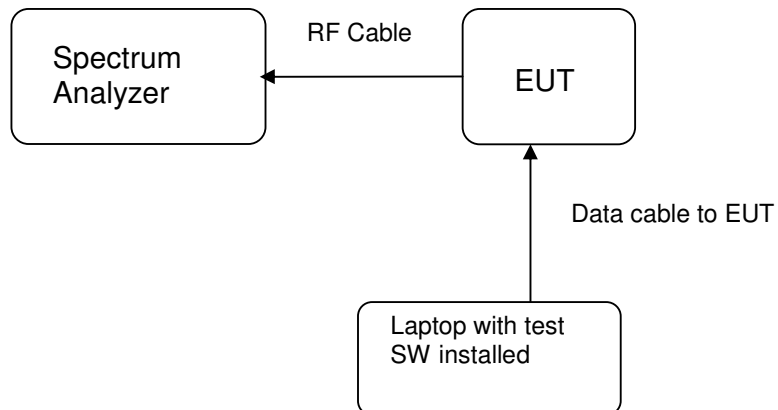

List of Test and Measurement Instruments

Hong Kong Productivity Council (Registration number: 90656)

Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	25-Apr-16	25-Apr-17
New Fully Anchoic Chamber	TDK	N/A	19-Apr-16	19-Apr-17
Cable	Hubersuhner	SUCOFLEX 104	31-Mar-16	31-Mar-18
Test Receiver	R & S	ESU26	7-Dec-15	7-Dec-16
Bi-conical Antenna	R & S	HK116	1-Sep-15	1-Sep-17
Log Periodic Antenna	R & S	HL223	1-Sep-15	1-Sep-17
Coaxial cable	Harbour	LL335	10-Jun-16	10-Jun-18
Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	17-Jul-14	17-Jul-16
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	28-Oct-15	28-Oct-17
Horn Antenna	EMCO	3115	26-Aug-15	26-Aug-17
Active Loop Antenna	EMCO	6502	15-Aug-15	15-Aug-16

TÜV Rheinland Hong Kong Ltd

AC Mains Conducted Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Test Receiver	R & S	ESR3	22-Oct-2015	22-Oct-2016
LISN	R & S	ENV216	19-Jan-2016	19-Jan-2017
EMC32	R & S	v9.20	N/A	N/A

Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSP30	12-Jan-15	12-Jan-2017

Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is $\pm 3.43\text{dB}$.

The estimated combined standard uncertainty for radiated emissions measurements is $\pm 5.10\text{dB}$ (30MHz to 200MHz) and $\pm 5.08\text{dB}$ (200MHz to 1000MHz) and is $\pm 5.10\text{dB}$ (30MHz to 200MHz) and $\pm 5.08\text{dB}$ (above 1GHz).

The estimated combined standard uncertainty for antenna conducted emission is $\pm 1.56\text{dB}$

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device		
Results:	a) Antenna type: Integral Chip antenna b) Manufacturer and model no: N/A c) Peak Gain: 0 dBi	
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2		N/A
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
Results:	Only one integral antenna can be used.	
Verdict:	N/A	

FCC 15.207 – Conducted Emission on AC Mains						Pass
Test Specification : ANSI C63.4 - 2003 Mode of operation : TX mode Port of testing : AC Mains input port of Laptop power supply Detector : Quasi-peak and Average RBW : 9 kHz Supply voltage : 120Vac 60Hz Temperature : 23°C Humidity : 50%						
Requirement:		15.207(a)				
Results:		Pass				
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dBμV	Average dBμV	Limit QP (dBμV)	Limit AV (dBμV)	Verdict
0,15 – 0,5	0.1995	52.6	45.5	66 - 56	56 - 46	Pass
> 0,5 - 5	No peak found	---	---	56	46	Pass
> 5 - 30	No peak found	---	---	60	50	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dBμV	Average dBμV	Limit QP (dBμV)	Limit AV (dBμV)	Verdict
0,15 – 0,5	0.1995	51.7	45.1	66 - 56	56 - 46	Pass
> 0,5 - 5	No peak found	---	---	56	46	Pass

> 5 - 30	No peak found	---	---	60	50	Pass
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits. For test Results plots refer to Appendix 1, page 2.						

FCC 15.247 (a)(2) – 6dB Bandwidth Measurement				Pass
FCC Requirement: Systems using digital modulation techniques may operate in the 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.				
Test Specification : KDB 558074 DTS Measurement Guidance Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100KHz/ 300KHz Supply voltage : 5 Vdc Temperature : 23°C Humidity : 50%				
Results: For test protocols please refer to Appendix 1				
Channel frequency (MHz)	6 dB left (MHz)	6 dB right (MHz)	6dB bandwidth (kHz)	
2402	2401.65	2402.32	670	
2440	2439.64	2440.33	690	
2480	2479.65	2480.33	680	

FCC 15.247(b)(3) – Maximum Peak Conducted Output Power				Pass
FCC Requirement: For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt (30dBm)				
Test Specification : KDB 558074 DTS Measurement Guidance Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 5 Vdc Temperature : 23°C Humidity : 50%				
Results: For test protocols please refer to Appendix 1				
Frequency (MHz)	Measured Output Power (dBm)	Limit (W/dBm)	Verdict	
2402	6.07	1 / 30.0	Pass	
2440	5.05	1 / 30.0	Pass	
2480	4.78	1 / 30.0	Pass	

FCC 15.247(e) – Power Spectral Density			Pass
FCC Requirement: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.			
Test Specification : KDB 558074 DTS Measurement Guidance Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak RBW/VBW : ≥ 100 KHz / $\geq 3 \times$ RBW span : $\geq 1.5 \times$ DTS BW Supply voltage : 5 Vdc Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1			
Operating frequency (MHz)	Power density (dBm)	Limit (dBm)	Verdict
2402	5.84	8.0	Pass
2440	4.90	8.0	Pass
2480	4.56	8.0	Pass

FCC 15.247(d) – Spurious Conducted Emissions					Pass
Test Specification : KDB 558074 DTS Measurement Guidance Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 5 Vdc Temperature : 23 °C Humidity : 50 %					
FCC Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Only the worst cases is shown below. For test protocols refer to Appendix 1					
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2402	2399.980	-29.51	5.84	35.35	Pass
2440	22816.000	-32.34	4.90	37.24	Pass
2480	2483.600	-38.53	4.56	43.09	Pass

FCC 15.205 – Radiated Emissions in Restricted Frequency Bands		Pass
Test Specification : KDB 558074 DTS Measurement Guidance Mode of operation : TX mode Port of testing : Enclosure Detector : Peak RBW/VBW : 100 kHz / 300 kHz for $f < 1$ GHz 1 MHz / 3 MHz for $f > 1$ GHz Supply voltage : 5 Vdc Temperature : 23°C Humidity : 50%		
FCC Requirement: In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.205(c).		
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.		
Mode: 2402MHz TX Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2390.000	62.88	74.0 / PK
2390.000	34.37	54.0 / AV
4804.000	57.44	74.0 / PK
4804.000	46.17	54.0 / AV
Mode: 2402 MHz TX Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2390.000	64.62	74.0 / PK
2390.000	34.49	54.0 / AV
4804.000	56.60	74.0 / PK
4804.000	44.83	54.0 / AV
Mode: 2440 MHz TX Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4880.000	55.32	74.0 / PK
4880.000	43.80	54.0 / AV
Mode: 2440 MHz TX Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4880.000	55.66	74.0 / PK
4880.000	43.45	54.0 / AV
Mode: 2480MHz TX Vertical Polarization		

Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	71.10	74.0 / PK
2483.500	44.26	54.0 / AV
4960.000	56.34	74.0 / PK
4960.000	45.27	54.0 / AV
Mode: 2480 MHz TX Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	73.27	74.0 / PK
2483.500	46.06	54.0 / AV
4960.000	55.08	74.0 / PK
4960.000	43.05	54.0 / AV