

## FCC PART 15.225

### TEST REPORT

For

## MAISON JOSEPH BATTAT LTD

8440 Darnely, Montreal, QC Canada H4T 1M4 Quebec, Canada

**FCC ID: SLURF1356BX1233**

<b>Report Type:</b> Original Report	<b>Product Type:</b> RFID Toy
<b>Test Engineer:</b> <u>Mike Hu</u>	<i>Mike Hu</i>
<b>Report Number:</b> <u>RSZ140617801-00B</u>	
<b>Report Date:</b> <u>2014-07-12</u>	
<b>Reviewed By:</b> <u>Sula Huang</u>	<i>Sula Huang</i>
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

**TABLE OF CONTENTS**

**GENERAL INFORMATION.....3**

    PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

    OBJECTIVE.....3

    RELATED SUBMITTAL(S)/GRANT(S).....3

    TEST METHODOLOGY.....3

    TEST FACILITY.....3

**SYSTEM TEST CONFIGURATION.....4**

    JUSTIFICATION.....4

    EUT EXERCISE SOFTWARE.....4

    SPECIAL ACCESSORIES.....4

    EQUIPMENT MODIFICATIONS.....4

    EXTERNAL I/O CABLE.....4

    BLOCK DIAGRAM OF TEST SETUP.....4

**SUMMARY OF TEST RESULTS.....5**

**FCC§15.203 - ANTENNA REQUIREMENT.....6**

    APPLICABLE STANDARD.....6

    ANTENNA CONNECTED CONSTRUCTION.....6

**FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST.....7**

    APPLICABLE STANDARD.....7

    MEASUREMENT UNCERTAINTY.....7

    EUT SETUP.....7

    EMI TEST RECEIVER SETUP.....8

    CORRECTED AMPLITUDE & MARGIN CALCULATION.....8

    TEST EQUIPMENT LIST AND DETAILS.....8

    TEST RESULTS SUMMARY.....9

    TEST DATA.....9

**FCC§15.225(E) - FREQUENCY STABILITY.....11**

    APPLICABLE STANDARD.....11

    TEST PROCEDURE.....11

    TEST EQUIPMENT LIST AND DETAILS.....11

    TEST DATA.....11

**§15.215(C) - 20DB EMISSION BANDWIDTH TESTING.....13**

    REQUIREMENT.....13

    TEST EQUIPMENT LIST AND DETAILS.....13

    TEST PROCEDURE.....13

    TEST DATA.....13

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *MAISON JOSEPH BATTAT LTD*'s product, model number: *BX1233 (FCC ID: SLURF1356BX1233)* or the "EUT" in this report was a RFID toy, *named as rockestra by applicant*, which was measured approximately: 49.0 cm (L) x 15.2 cm (W) x 6.6 cm (H), rated input voltage: DC 1.5V\*6 AA batteries.

*\*All measurement and test data in this report was gathered from production sample serial number: 1406001 (Assigned by the applicant). The EUT supplied by the applicant was received on 2014-06-17.*

### Objective

This Type approval report is prepared on behalf of *MAISON JOSEPH BATTAT LTD* in accordance with Part 2- Subpart J, and Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.207, 15.209 and 15.225.

### Related Submittal(s)/Grant(s)

No related submittal.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

### EUT Exercise Software

No exercise software.

### Special Accessories

No special accessory.


### Equipment Modifications

No modification was made to the EUT.

### External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-shielding Detachable Earphone Cable	1.1	EUT	Earphone

### Block Diagram of Test Setup

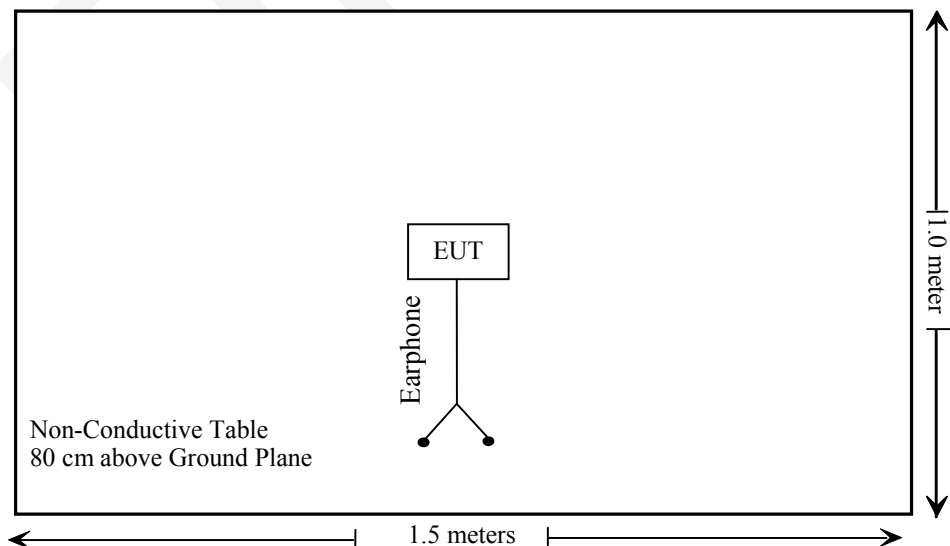

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207	AC Line Conducted Emission	Not Applicable
§15.225 §15.209 §15.205	Radiated Emission Test	Compliance
§15.225(e)	Frequency Stability	Compliance
§15.215(c)	20dB Emission Bandwidth Testing	Compliance

Not Applicable: The EUT is battery operated equipment.

---

## **FCC§15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **Antenna Connected Construction**

The EUT has an integral antenna, which was permanently attached; fulfill the requirement of this section. Please see EUT photo for details.

F I N A L

## FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST

### Applicable Standard

As per FCC Part 15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.


(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown in below table. And the uncertainty will not be taken into consideration for the test data recorded in the report

### EUT Setup

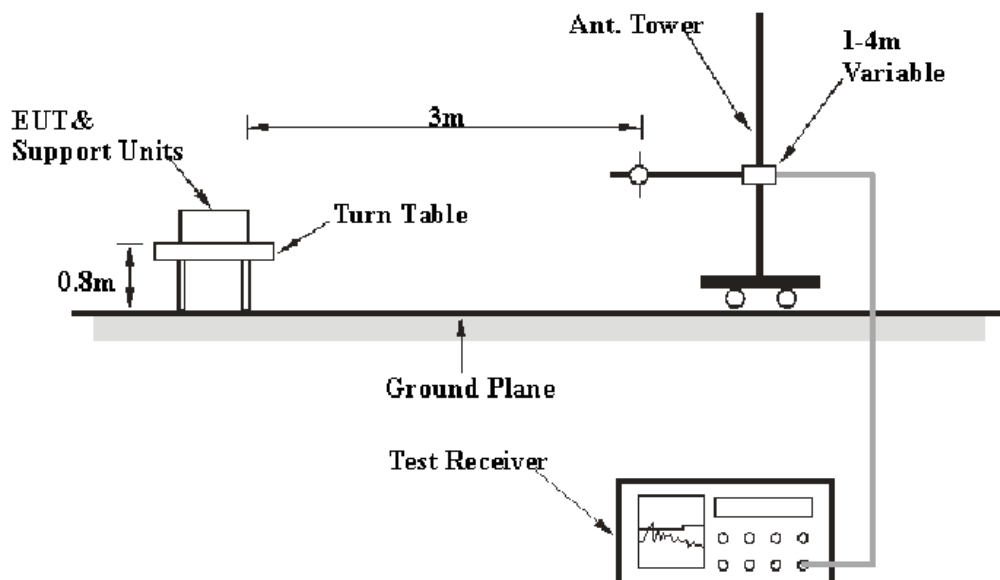

The radiated emission tests were performed in the 3-meter chamber a test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part Subpart C limits.

### EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	300 Hz	1 kHz	200 Hz	QP
150 kHz – 30 MHz	10 kHz	30 kHz	9 kHz	QP
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\begin{aligned} \text{Corrected Factor} &= \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} \\ \text{Corrected Amplitude} &= \text{Meter Reading} + \text{Corrected Factor} \end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-09-25	2014-09-25
HP	Amplifier	8447E	1937A01046	2013-09-30	2014-09-30
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2011-11-28	2014-11-27
ETS	Passive Loop Antenna	6512	00029604	2011-11-30	2014-11-29

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).



## Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 the worst margin reading as bellow:

**3.26 dB at 461.184250 MHz** in the **Horizontal** polarization

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level compliance with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

In BACL,  $U_{(L_m)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

## Test Data

### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	54 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Mike Hu on 2014-07-12.*

*Test mode: Transmitting*

*Test Result: Compliance*

1) Spurious Emissions (9 kHz~30 MHz):

Indicated		Table Angle Degree	Antenna Height (m)	Detector PK/QP/Ave.	Correction Factor			Corrected Amplitude (dBµV/m) @3m	FCC Part 15.225\15.209	
Frequency (MHz)	Maximum Reading (dBµV)				Ant. Factor (dB)	Cable Loss (dB)	Pre-Amp. Gain (dB)		Limit (dBµV/m) @3m	Margin (dB)
0.134	0.50	156	1.2	QP	64.6	0.21	0	65.31	105.06	39.75
27.15	7.5	61	1.3	QP	30.5	0.21	0	38.21	69.54	31.33

2) Fundamental:

Indicated			Table Angle Degree	Antenna Height (m)	Detector PK/QP/Ave.	Correction Factor			Corrected Amplitude (dBµV/m) @3m	FCC Part 15.225	
Frequency Range (MHz)	Mark point (MHz)	Maximum Reading (dBµV)				Ant. Factor (dB)	Cable Loss (dB)	Pre-Amp. Gain (dB)		Limit (dBµV/m) @3m	Margin (dB)
13.110-13.410	13.256	15.23	0	1.4	QP	32.1	0.21	0	47.54	80.5	32.96
13.410-13.553	13.520	15.73	0	1.4	QP	32.1	0.21	0	48.04	90.5	42.46
13.553-13.567	13.564	46.41	0	1.6	QP	32.1	0.21	0	78.72	124	45.28
13.567-13.710	13.625	19.90	0	1.5	QP	32.1	0.21	0	52.21	90.5	38.29
13.710-14.010	13.868	18.06	0	1.6	QP	32.1	0.21	0	50.37	80.5	30.13

3) Spurious Emissions (30 MHz-1000 MHz)

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Detector PK/QP/Ave.	Antenna Height (m)	Antenna Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
393.354875	41.86	QP	1.0	H	148	-10.7	46	4.14
461.184250	42.74	QP	1.0	H	114	-9.2	46	3.26
488.308375	41.14	QP	1.5	H	56	-8.6	46	4.86
623.945500	42.43	QP	1.0	V	242	-7.1	46	3.57

## FCC§15.225(e) - FREQUENCY STABILITY

### Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### Test Procedure

Frequency Stability vs. Temperature: The equipment under test was powered by new battery and placed inside the temperature chamber. To monitor the variable frequency, loop antenna was connected to a Spectrum Analyzer.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to 85% to 115% of the rated supply voltage. The output frequency was recorded for each voltage.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-09-25	2014-09-25
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2013-11-01	2014-11-01

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	54 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Mike Hu on 2014-07-12.*

*Test Mode: Transmitting*

*Test Result: Compliance*

Power Supply (V <sub>DC</sub> )	Temperature (°C)	Measured Frequency (MHz)	Frequency Error	Part 15.225 Limit
9	-20	13.55948	-0.00383%	±0.01%
	-10	13.55950	-0.00369%	±0.01%
	0	13.55952	-0.00354%	±0.01%
	10	13.55951	-0.00361%	±0.01%
	20	13.55952	-0.00354%	±0.01%
	30	13.55956	-0.00324%	±0.01%
	40	13.55957	-0.00317%	±0.01%
	50	13.55951	-0.00361%	±0.01%

## §15.215(c) - 20dB EMISSION BANDWIDTH TESTING

### Requirement

Per 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-09-25	2014-09-25
ETS	Passive Loop Antenna	6512	00029604	2011-11-30	2014-11-29

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

### Test Data

#### Environmental Conditions


<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	54 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Mike Hu on 2014-07-12.*

*Test Mode: Transmitting*

Test Result: Pass

### 20 dB Emission Bandwidth

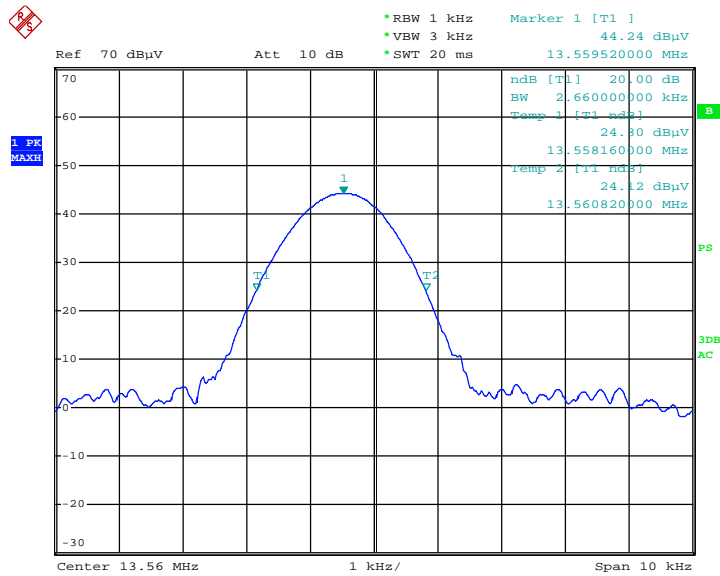

EUT

Date: 12.JUL.2014 01:36:12

\*\*\*\*\* END OF REPORT \*\*\*\*\*