

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6




4.5.7 TEST RESULTS (A)


EUT	Carrier Grade Embeddable Access Point	MODEL	WAPC11g
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.81	8	PASS
6	2437	-8.46	8	PASS
11	2462	-8.39	8	PASS




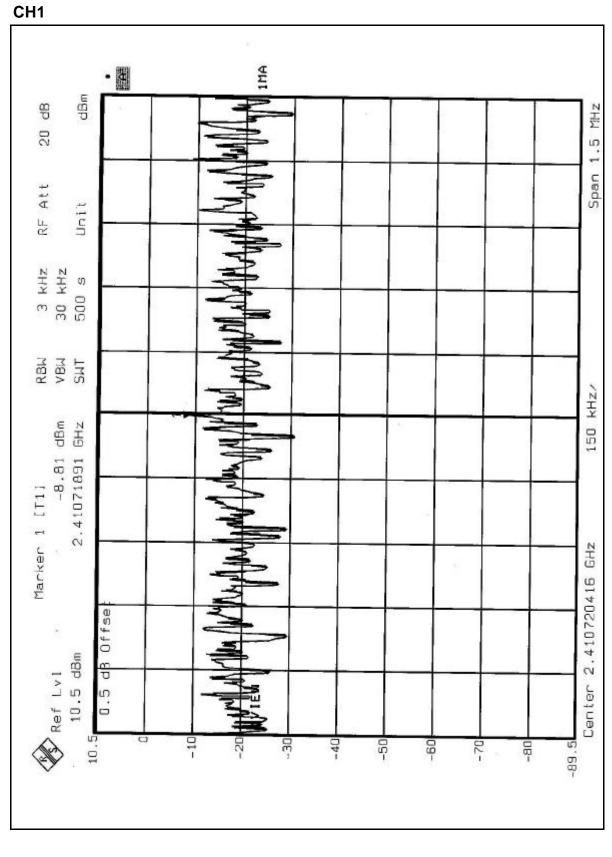



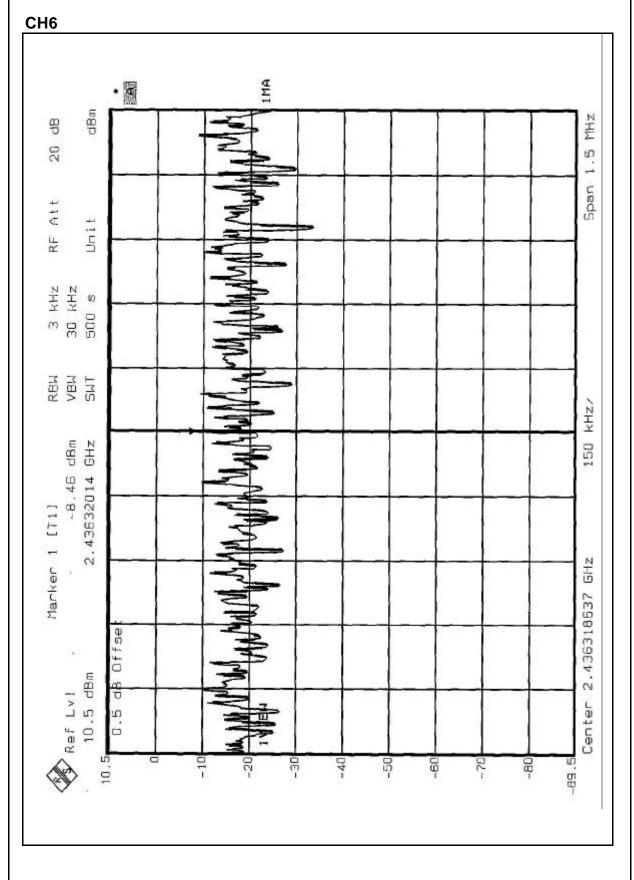



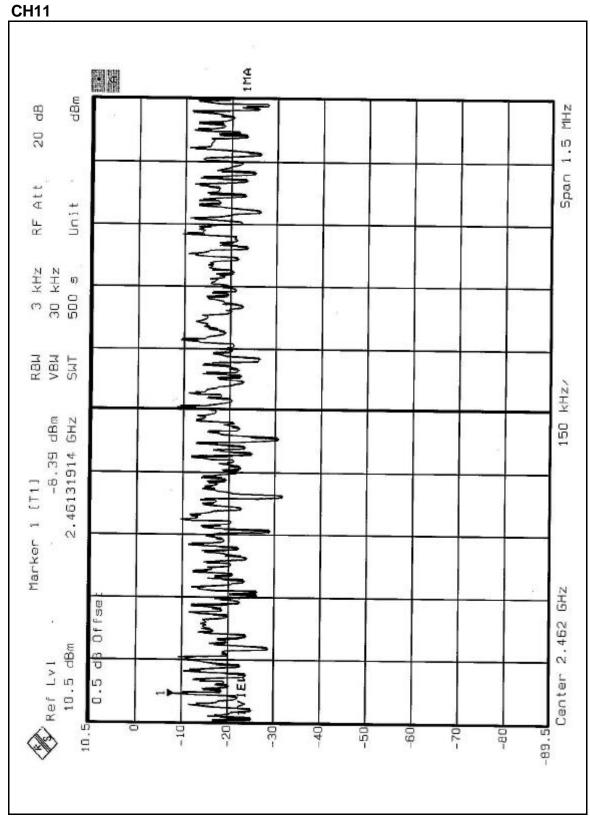




4.5.8 TEST RESULTS (B)

EUT	Carrier Grade Embeddable Access Point	MODEL	WAPC11g
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg. C, 64% RH, 991 hPa
TESTED BY	Leo Hung		


CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.65	8	PASS
6	2437	-15.13	8	PASS
11	2462	-15.71	8	PASS




CH1

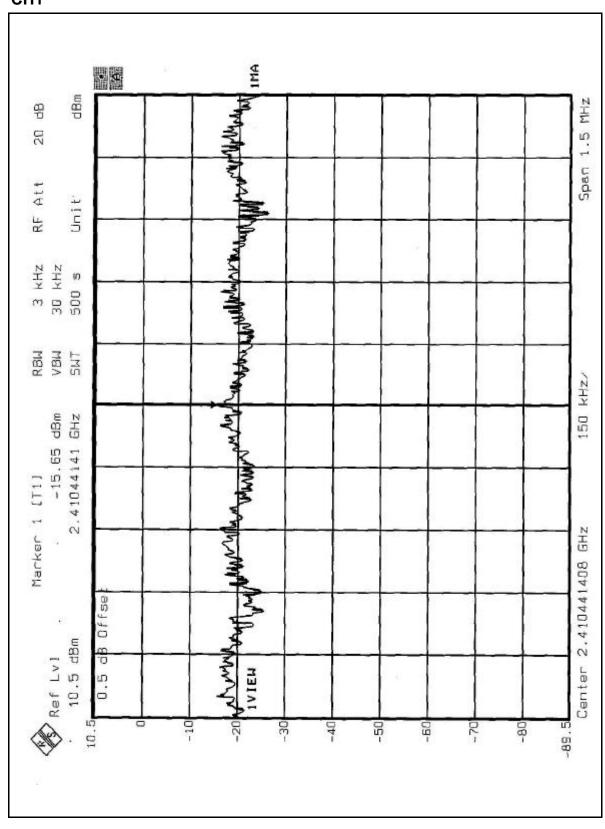



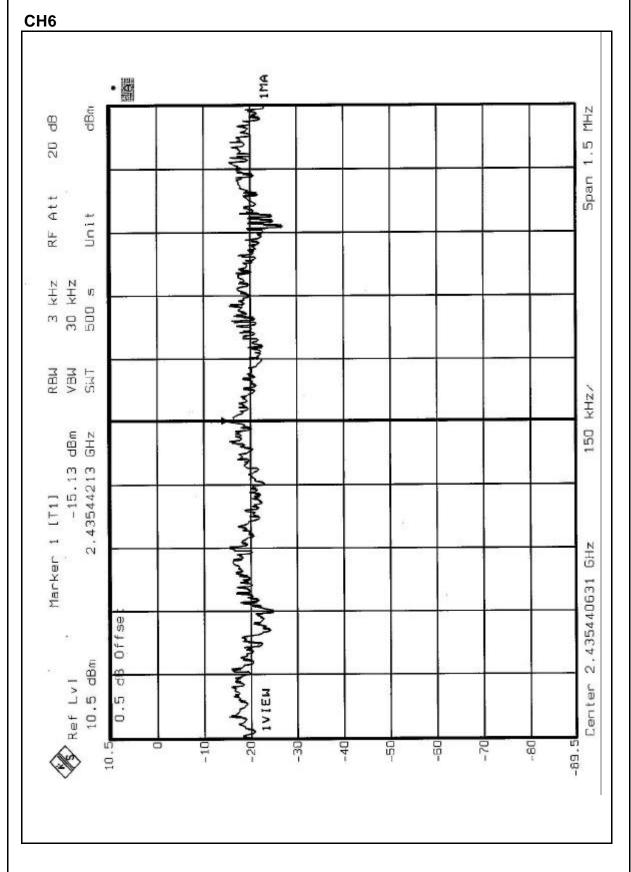



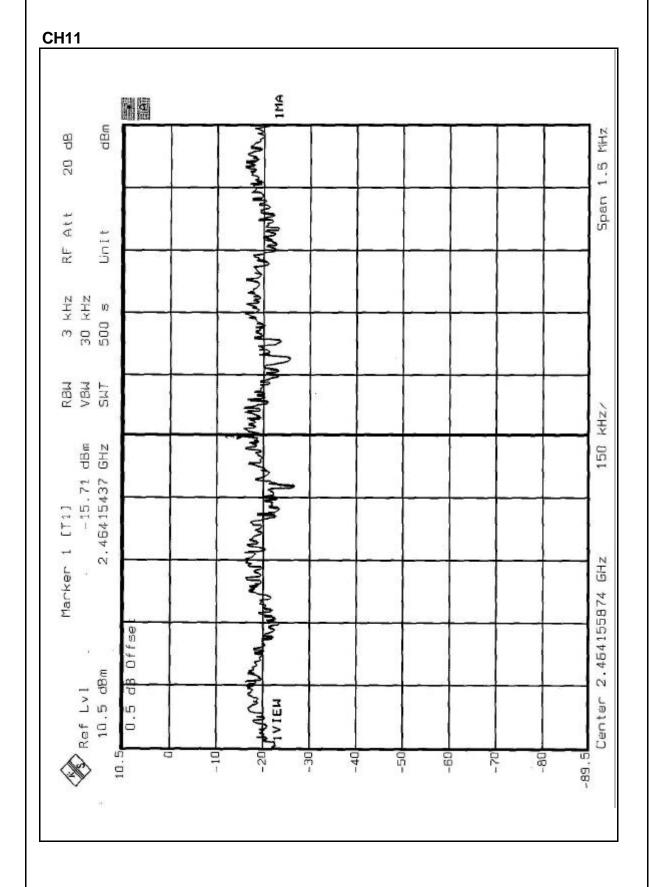



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until	
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005	

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 8 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

4.6.7 TEST RESULTS(A)

NOTE:

The band edge emission plot of CCK technique on the following 1~2 pages show 58.81dB delta between carrier maximum power and local maximum emission in restrict band (2.3735GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 107.68dBuV/m, so the maximum field strength in restrict band is 107.68-58.81=48.87dBuV/m which is under 54dBuV/m limit.

The band edge emission plot of CCK technique on the following 3~4 pages show 56.17dB delta between carrier maximum power and local maximum emission in restrict band (2.4999GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 106.13dBuV/m, so the maximum field strength in restrict band is 106.13-56.17=49.96dBuV/m which is under 54dBuV/m limit.


4.6.8 TEST RESULTS(B)

NOTE:


The band edge emission plot of OFDM technique on the following 5~6 pages show 49.23dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 103.01dBuV/m, so the maximum field strength in restrict band is 103.01-49.23=53.78dBuV/m which is under 54dBuV/m limit.

The band edge emission plot of OFDM technique on the following 7~8 pages show 49.75dB delta between carrier maximum power and local maximum emission in restrict band (2.4851GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 100.89dBuV/m, so the maximum field strength in restrict band is 100.89-49.75=51.14dBuV/m which is under 54dBuV/m limit.




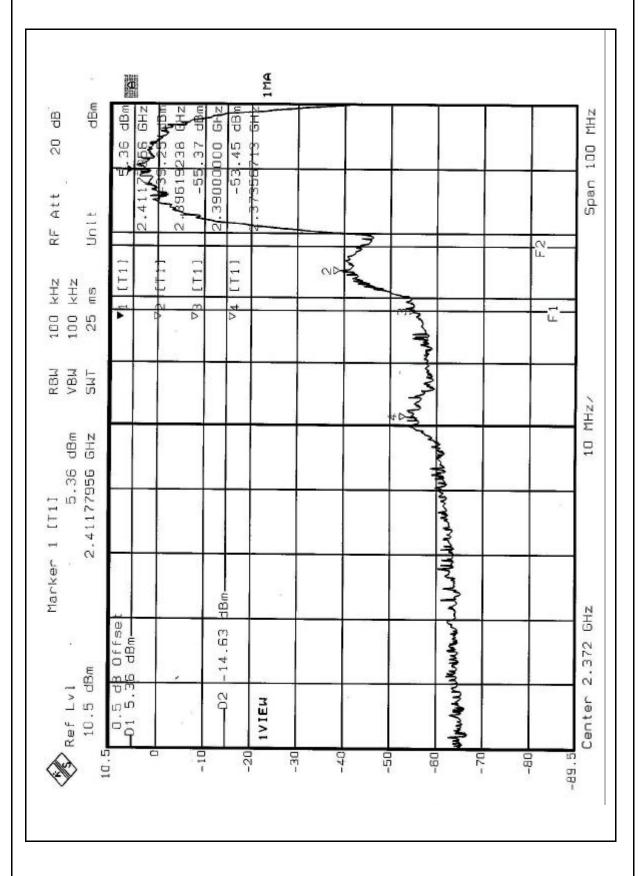




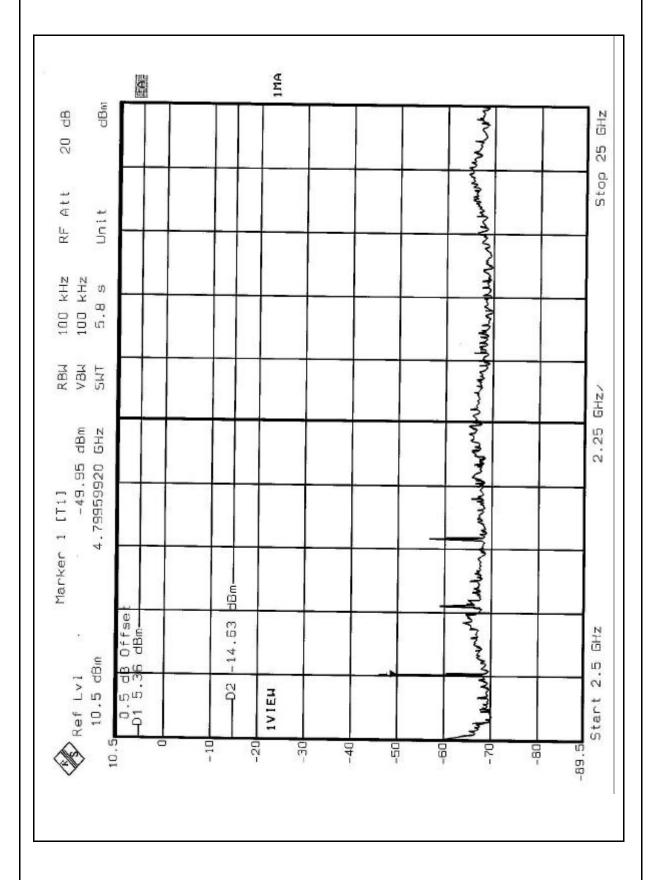




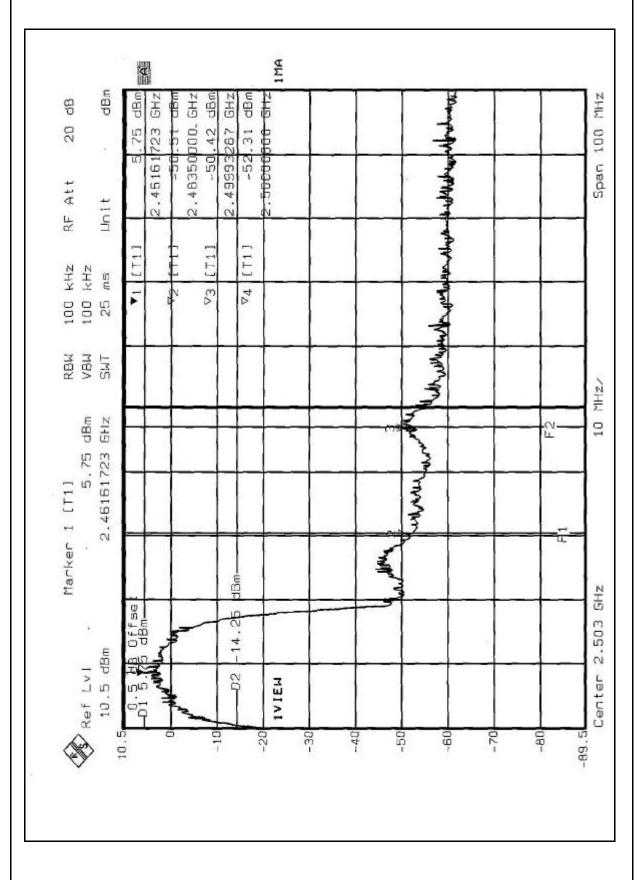




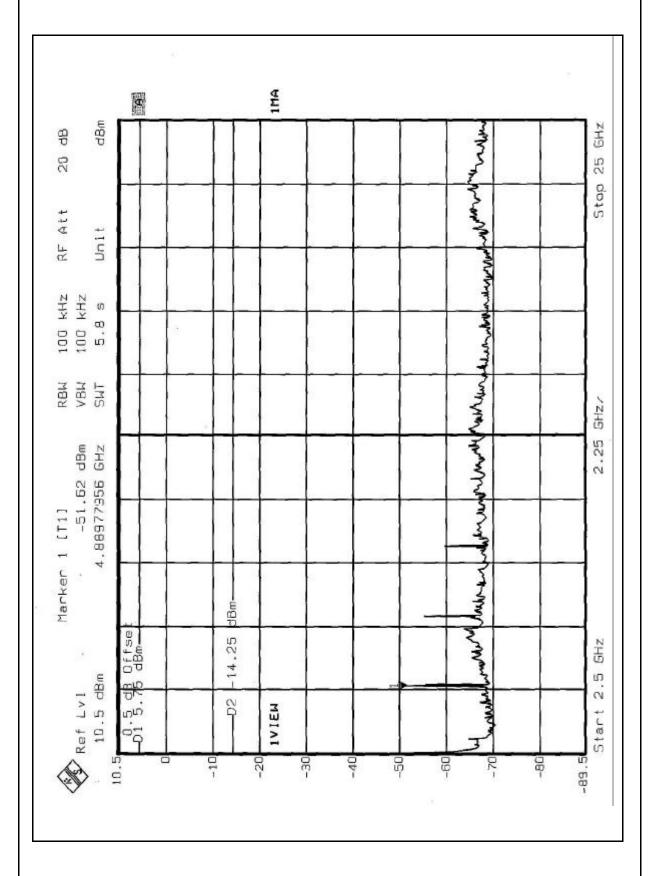




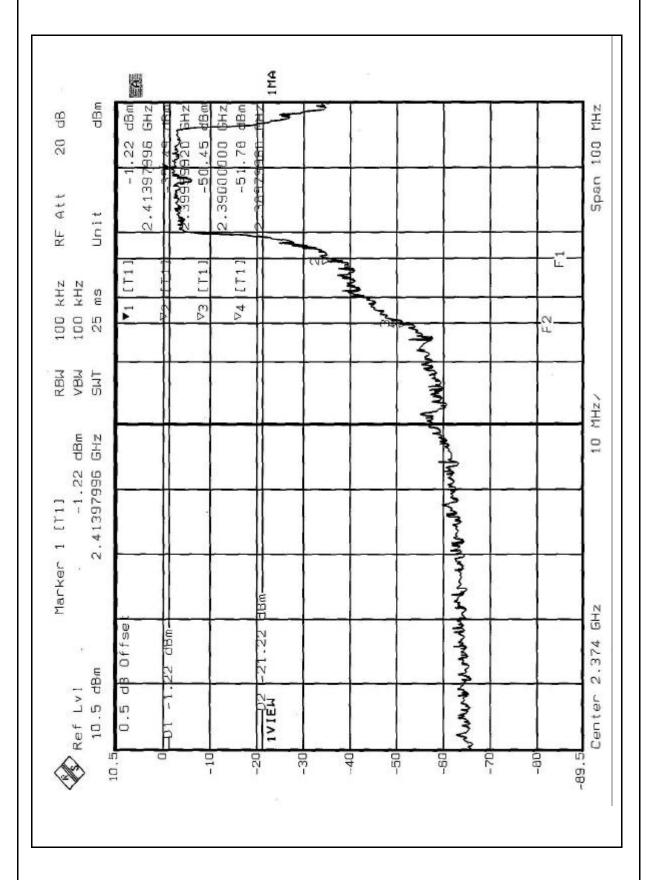




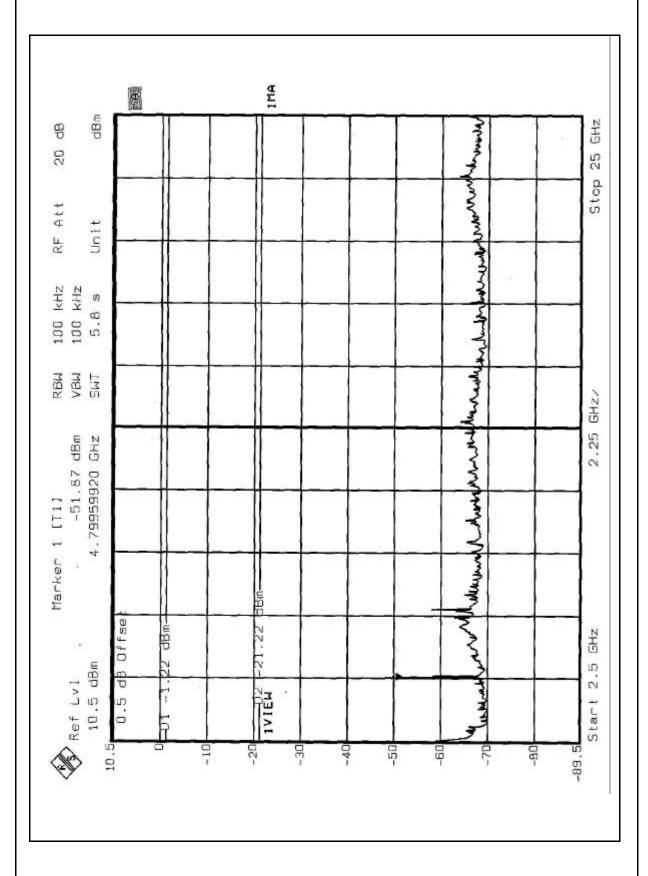



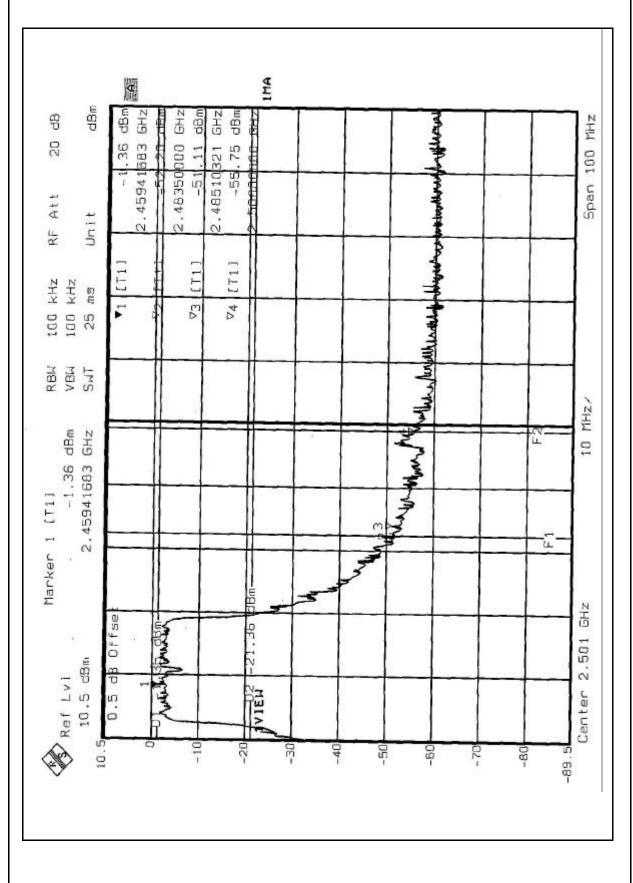



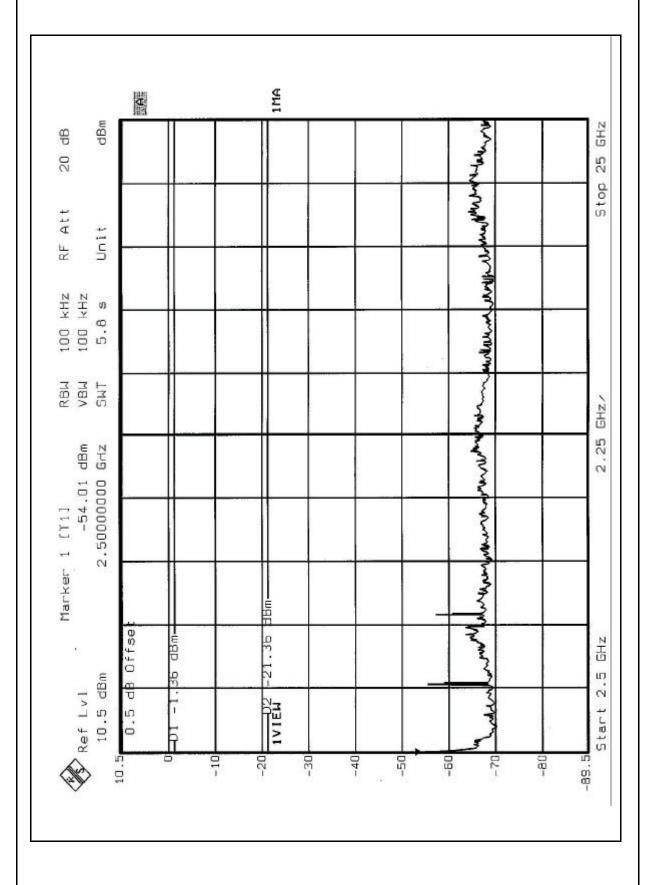



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this p	product is Patch ant	tenna with F	RSMA connec	ctor. And the
maximum Gain of this ante	enna is 8dBi.			



5 PHOTOGRAPHS OF THE TEST CONFIGURATION


CONDUCTED EMISSION TEST








RADIATED EMISSION TEST

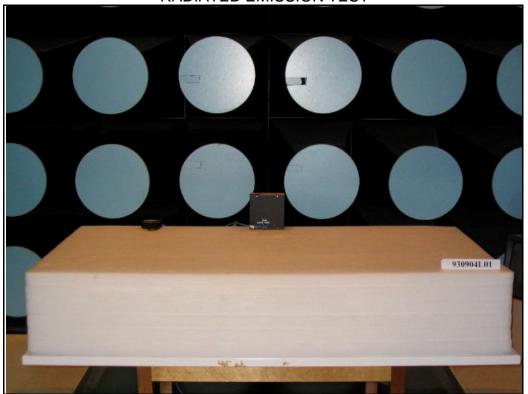

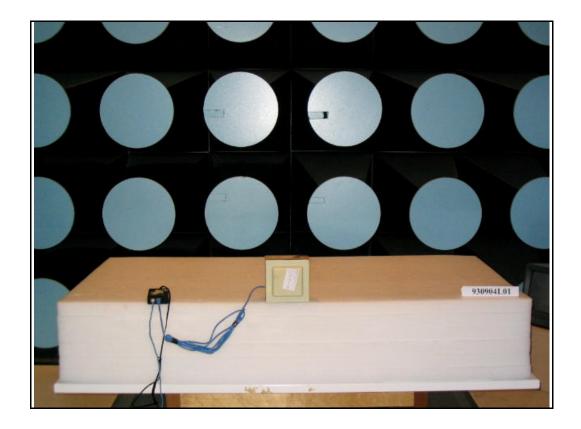



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA FCC, NVLAP, UL, A2LA

Germany TUV Rheinland

Japan VCCI Norway NEMKO

Canada INDUSTRY CANADA, CSA

R.O.C. CNLA, BSMI, DGT

Netherlands Telefication

Singapore PSB , GOST-ASIA(MOU)

Russia CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

<u>www.adt.com.tw/index.5/phtml</u>. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab: Hsin Chu EMC/RF Lab:

Tel: 886-2-26052180 Tel: 886-3-5935343 Fax: 886-2-26052943 Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab: Linko RF Lab. Tel: 886-3-3183232 Tel: 886-3-3270910

Fax: 886-3-3185050 Fax: 886-3-3270892

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.5