



Washington Laboratories, Ltd.

FCC Certification Test Report
For the
Mueller Systems
MINODE-C&I Transmitter Module

FCC ID: SM6-MINODE-CI

WLL JOB# 11151
November 30, 2009

Prepared for:

Mueller Systems
48 Leona Drive
Middleboro, MA, 02346

Prepared By:

Washington Laboratories, Ltd.
7560 Lindbergh Drive
Gaithersburg, Maryland 20879



Testing Certificate 2675.01

FCC Certification Test Report
for the
Mueller Systems
MINODE-C&I Transmitter Module
FCC ID: SM6-MINODE-CI

November 30, 2009

WLL JOB# 11151

Prepared by:



Steven Dovell
Compliance Engineer

Reviewed by:



Steven D. Koster
EMC Operations Manager

Abstract

This report has been prepared on behalf of Mueller Systems to support the attached Application for Equipment Authorization. The test report and application are submitted for a Frequency Hopping Spread Spectrum Transmitter under Part 15.247 (7/2008) of the FCC Rules. This Certification Test Report documents the test configuration and test results for a Mueller Systems MINODE-C&I Transmitter Module.

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. The Industry Canada OATS numbers are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by the American Association for Laboratory Accreditation (A2LA) under Certificate 2675.01 as an independent FCC test laboratory.

The Mueller Systems MINODE-C&I Transmitter Module complies with the limits for a Frequency Hopping Spread Spectrum Transmitter device under FCC Part 15.247.

Table of Contents

Abstract.....	ii
1 Introduction.....	1
1.1 Compliance Statement	1
1.2 Test Scope.....	1
1.3 Contract Information.....	1
1.4 Test Dates	1
1.5 Test and Support Personnel	1
1.6 Abbreviations.....	2
2 Equipment Under Test.....	3
2.1 EUT Identification & Description	3
2.2 Test Configuration	4
2.3 Testing Algorithm.....	4
2.4 Test Location	4
2.5 Measurements	4
2.6 Measurement Uncertainty.....	5
3 Test Equipment.....	7
4 Test Summary	8
5 Test Results.....	9
5.1 Duty Cycle and Time of Occupancy.....	9
5.2 RF Power Output: (FCC Part §2.1046)	11
5.3 Occupied Bandwidth: (FCC Part §2.1049).....	15
5.4 Channel Spacing and Number of Hop Channels (FCC Part §15247(a)(1)).....	18
5.5 Conducted Spurious Emissions at Antenna Terminals (FCC Part §2.1051)	22
5.6 Radiated Spurious Emissions: (FCC Part §2.1053).....	39
5.7 AC Conducted Emissions (FCC Pt.15.207).....	44

List of Tables

Table 1. Device Summary.....	3
Table 2: Expanded Uncertainty List.....	6
Table 3: Test Equipment List.....	7
Table 4: Test Summary Table.....	8
Table 5. RF Power Output	11
Table 6. Occupied Bandwidth Results.....	18
Table 7 Channel spacing and number of hopping channels summary.....	18
Table 8: Radiated Emission Test Data, Low Frequency Data (<1GHz)	40
Table 9: Radiated Emission Test Data, High Frequency Data (>1GHz).....	41
Table 10: Conducted Emissions Data, Transmit On 120VAC	45

List of Figures

Figure 5-1. Duty Cycle Plot.....	10
Figure 5-2, Time Of Occupancy Plot.....	11
Figure 5-3. RF Peak Power, Low Channel	12
Figure 5-4. RF Peak Power, Mid Channel.....	13
Figure 5-5. RF Peak Power, High Channel	14
Figure 5-6. Occupied Bandwidth, Low Channel	15
Figure 5-7. Occupied Bandwidth, Mid Channel.....	16
Figure 5-8. Occupied Bandwidth, High Channel	17
Figure 5-9, Channel Spacing	19
Figure 5-10, Number of Channels (1 – 25).....	20
Figure 5-11, Number of Channels (26 – 50).....	21
Figure 5-12. Lower Band Edge Plot, Low Channel	23
Figure 5-13. Upper Band Edge Plot, High Channel	24
Figure 5-14. Lower Band Edge Plot, Hopping Mode.....	25
Figure 5-15. Upper Band Edge Plot, Hopping Mode	26
Figure 5-16. Conducted Spurious Emissions, Low Channel 30 - 890MHz	27
Figure 5-17. Conducted Spurious Emissions, Low Channel 890-1000MHz	28
Figure 5-18. Conducted Spurious Emissions, Low Channel 1-5GHz	29
Figure 5-19. Conducted Spurious Emissions, Low Channel 5 -10GHz	30
Figure 5-20. Conducted Spurious Emissions, Mid Channel 30 - 890MHz	31
Figure 5-21. Conducted Spurious Emissions, Mid Channel 890-1000MHz	32
Figure 5-22. Conducted Spurious Emissions, Mid Channel 1-5GHz.....	33
Figure 5-23. Conducted Spurious Emissions, Mid Channel 5 – 10GHz	34
Figure 5-24. Conducted Spurious Emissions, High Channel 30 - 890MHz.....	35
Figure 5-25. Conducted Spurious Emissions, High Channel 890-1000MHz.....	36
Figure 5-26. Conducted Spurious Emissions, High Channel 1-5GHz	37
Figure 5-27. Conducted Spurious Emissions, High Channel 5-10GHz	38

1 Introduction

1.1 Compliance Statement

The Mueller Systems MINODE-C&I Transmitter Module complies with the limits for a Frequency Hopping Spread Spectrum Transmitter device under FCC Part 15.247 (7/2008).

1.2 Test Scope

Tests for radiated and conducted (at antenna terminal) emissions were performed. All measurements were performed in accordance with FCC Public Notice DA 00-705, "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems". The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation.

1.3 Contract Information

Customer: Mueller Systems
48 Leona Drive
Middleboro, MA, 02346

Quotation Number: 65126

1.4 Test Dates

Testing was performed on the following date(s): 11/23/09 – 11/24/09

1.5 Test and Support Personnel

Washington Laboratories, LTD Steve Dovell
Client Representative Dave Splitz

1.6 Abbreviations

A	Ampere
ac	alternating current
AM	Amplitude Modulation
Amps	Amperes
b/s	bits per second
BW	BandWidth
CE	Conducted Emission
cm	centimeter
CW	Continuous Wave
dB	deciBel
dc	direct current
EMI	Electromagnetic Interference
EUT	Equipment Under Test
FM	Frequency Modulation
G	giga - prefix for 10⁹ multiplier
Hz	Hertz
IF	Intermediate Frequency
k	kilo - prefix for 10³ multiplier
LISN	Line Impedance Stabilization Network
M	Mega - prefix for 10⁶ multiplier
m	meter
μ	micro - prefix for 10⁻⁶ multiplier
NB	Narrowband
QP	Quasi-Peak
RE	Radiated Emissions
RF	Radio Frequency
rms	root-mean-square
SN	Serial Number
S/A	Spectrum Analyzer
V	Volt

2 Equipment Under Test

2.1 EUT Identification & Description

The Mueller MiNode is an ISM band 902.5 to 927 MHz frequency hopping transceiver module. Mueller Tech radio enabled products utilize “Master/Slave” communication methodology. The Modules are completely self-contained, including the processor, radio, water meter interface and battery. A cable containing 3-wires that are intended to connect to a water meter register are the only available external connections to the device. All of the RF components are located under a metal shield.

Table 1. Device Summary

ITEM	DESCRIPTION
Manufacturer:	Mueller Systems
FCC ID:	SM6-MINODE-C&I
Model:	MINODE-C&I Transmitter Module
FCC Rule Parts:	§15.247
Frequency Range:	902.5-927MHz
Maximum Output Power: (conducted at antenna port)	505.82mW (27.04dBm)
Modulation:	FM
Occupied Bandwidth:	94.643 kHz
Keying:	Automatic
Type of Information:	Data
Number of Channels:	50
Power Output Level	Fixed
Antenna Connector	MMCX
Antenna Type	2.7dBi dipole
Interface:	10pin dual row socket (power & data), 10pin dual row socket (programming port),
Power Source & Voltage:	120VAC

2.2 Test Configuration

The MINODE-C&I Transmitter Module receives 120VAC power. The module was tested as a stand-alone unit. Commands were sent to the MINODE-C&I Transmitter Module using a programming port connected to a support laptop using Windows HyperTerminal program. This connection was removed after programming the module for testing.

2.3 Testing Algorithm

The MINODE-C&I Transmitter Module was programmed via a maintenance port on the EUT to a RS232 port on the support laptop. The support laptop used HyperTerminal to command the EUT to transmit on the lowest, center, and highest channels. Commands were also sent to allow the unit to transmit in a hopping fashion. The unit was preloaded with a typical data payload to transmit. This connection was removed after programming the module for testing.

Worst case emission levels are provided in the test results data.

2.4 Test Location

All measurements herein were performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. The Industry Canada OATS numbers are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by the American Association for Laboratory Accreditation (A2LA) under Certificate 2675.01 as an independent FCC test laboratory.

2.5 Measurements

2.5.1 References

FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation

2.6 Measurement Uncertainty

All results reported herein relate only to the equipment tested. The basis for uncertainty calculation uses ANSI/NCSL Z540-2-1997 with a type B evaluation of the standard uncertainty. Elements contributing to the standard uncertainty are combined using the method described in Equation 1 to arrive at the total standard uncertainty. The standard uncertainty is multiplied by the coverage factor to determine the expanded uncertainty which is generally accepted for use in commercial, industrial, and regulatory applications and when health and safety are concerned (see Equation 2). A coverage factor was selected to yield a 95% confidence in the uncertainty estimation.

Equation 1: Standard Uncertainty

$$u_c = \pm \sqrt{\frac{a^2}{div_a^2} + \frac{b^2}{div_b^2} + \frac{c^2}{div_c^2} + \dots}$$

where u_c = standard uncertainty

a, b, c, \dots = individual uncertainty elements

$div_{a, b, c}$ = the individual uncertainty element divisor based on the probability distribution

divisor = 1.732 for rectangular distribution

divisor = 2 for normal distribution

divisor = 1.414 for trapezoid distribution

Equation 2: Expanded Uncertainty

$$U = ku_c$$

where U = expanded uncertainty

k = coverage factor

$k \leq 2$ for 95% coverage (ANSI/NCSL Z540-2 Annex G)

u_c = standard uncertainty

The measurement uncertainty complies with the maximum allowed uncertainty from CISPR 16-4-2. Measurement uncertainty is not used to adjust the measurements to determine compliance.

The expanded uncertainty values for the various scopes in the WLL accreditation are provided in Table 2 below.

Table 2: Expanded Uncertainty List

Scope	Standard(s)	Expanded Uncertainty
Conducted Emissions	CISPR11, CISPR22, CISPR14, FCC Part 15	2.63 dB
Radiated Emissions	CISPR11, CISPR22, CISPR14, FCC Part 15	4.55 dB

3 Test Equipment

Table 3 shows a list of the test equipment used for measurements along with the calibration information.

Table 3: Test Equipment List

Test Name: Conducted Antenna Port		Test Date: 11/23/09	
Asset #	Manufacturer/Model	Description	Cal. Due
74	HP, 8593A	Analyzer, Spectrum	3/4/2010
528	Agilent, E4446A	Analyzer, Spectrum	9/4/2010

Test Name: Radiated Emissions		Test Date: 11/24/09	
Asset #	Manufacturer/Model	Description	Cal. Due
644	Sunol Science JB1	BiConalog Antenna	12/29/2009
69	HP, 85650A	Adapter, QP	06/28/2010
73	HP, 8568B	Analyzer, Spectrum	06/28/2010
71	HP, 85685A	Preselector, RF	06/28/2010
425	ARA, DRG-118/A	Antenna, DRG, 1-18GHz	09/09/2011
66	HP, 8449B	Pre-Amplifier, RF. 1-26.5GHz	07/21/2010
337	WLL, 1.2-5GHz	Filter, Band Pass	02/19/2010
281	ITC, 21A-3A1	Waveguide 4.51-10.0GHz	02/19/2010

Test Name: Conducted Emissions Voltage		Test Date: 11/24/09	
Asset #	Manufacturer/Model	Description	Cal. Due
69	HP, 85650A	Adapter, QP	06/28/2010
73	HP, 8568B	Analyzer, Spectrum	06/28/2010
124	Solar, 8012-50-R-24-BNC	LISN	07/08/2010
125	Solar, 8028-50-TS-24-BNC	LISN	07/17/2010
53	HP, 11947A	Limiter, Transient	03/09/2010

4 Test Summary

The Table Below shows the results of testing for compliance with a Frequency Hopping System in accordance with FCC Part 15.247:2007. Full results are shown in section 5.

Table 4: Test Summary Table

TX Test Summary (Frequency Hopping Spread Spectrum)		
FCC Rule Part	Description	Result
15.247 (a)(1)(iii)	Time of Occupancy	Pass
15.247 (b)(1)	Transmit Output Power	Pass
15.247 (a)(1)(iii)	20dB Bandwidth	Pass
15.247 (a)(1)	Channel Separation	Pass
15.247 (a)(1)(iii)	Number of Channels	Pass
15.247 (d)	Occupied BW / Out-of-Band Emissions (Band Edge @ 20dB below)	Pass
15.209	General Field Strength Limits (Restricted Bands)	Pass
15.207	AC Conducted Emissions	Pass
RX/Digital Test Summary (Frequency Hopping Spread Spectrum)		
FCC Rule Part	Description	Result
15.207	AC Conducted Emissions	Covered in a separate End Product Declaration of Conformity
15.209	General Field Strength Limits	Covered in a separate End Product Declaration of Conformity

5 Test Results

5.1 Duty Cycle and Time of Occupancy

In accordance with the FCC Public Notice the spurious radiated emissions measurements may be adjusted if using a duty cycle correction factor if the dwell time per channel of the hopping signal is less than 100 ms.

The duty cycle correction factor is calculated by:

$$20 \times \text{LOG} (\text{dwell time}/100 \text{ ms})$$

As the Maximum Dwell time of this device is 9.948ms. $20 \times \text{LOG} (9.948\text{ms}/100\text{ms}) = -20\text{dB}$ of duty cycle correction is allowed.

The unit makes a single hop transmission in 1.03 seconds. FCC part 15.247 requires that for hopping signals with an occupied bandwidth less than 250 kHz the limit is 0.4 seconds dwell time per 20 seconds

The following figures show the plot of the dwell time and time of occupancy for the transmitter. Based on this plot, the dwell time per hop is 9.948ms. As the unit is on a channel only once in a 1.03 second period the time of occupancy is also 9.948ms, thus complying with the 0.4 second requirement.

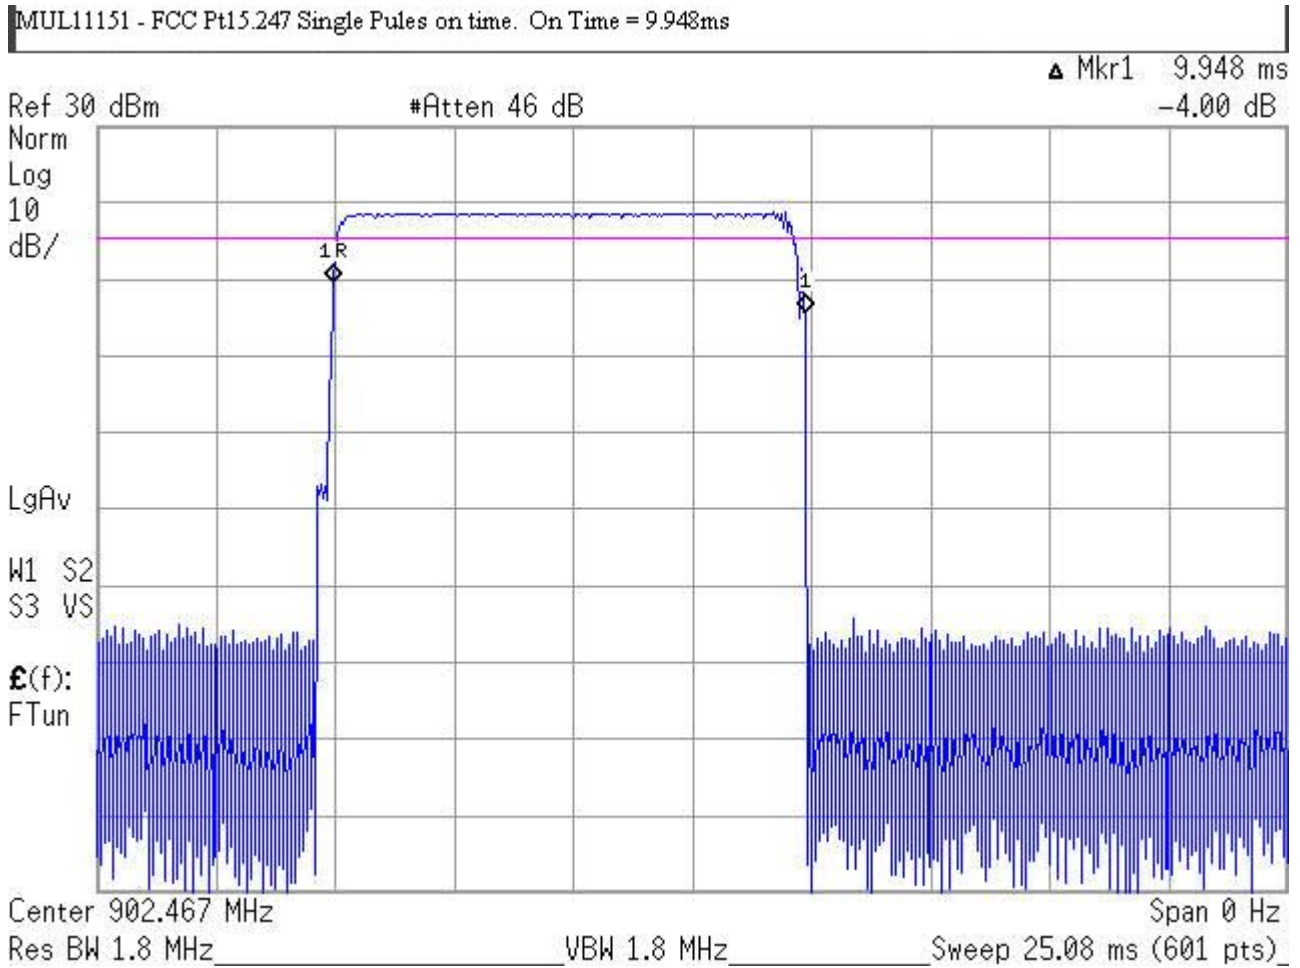


Figure 5-1. Duty Cycle Plot

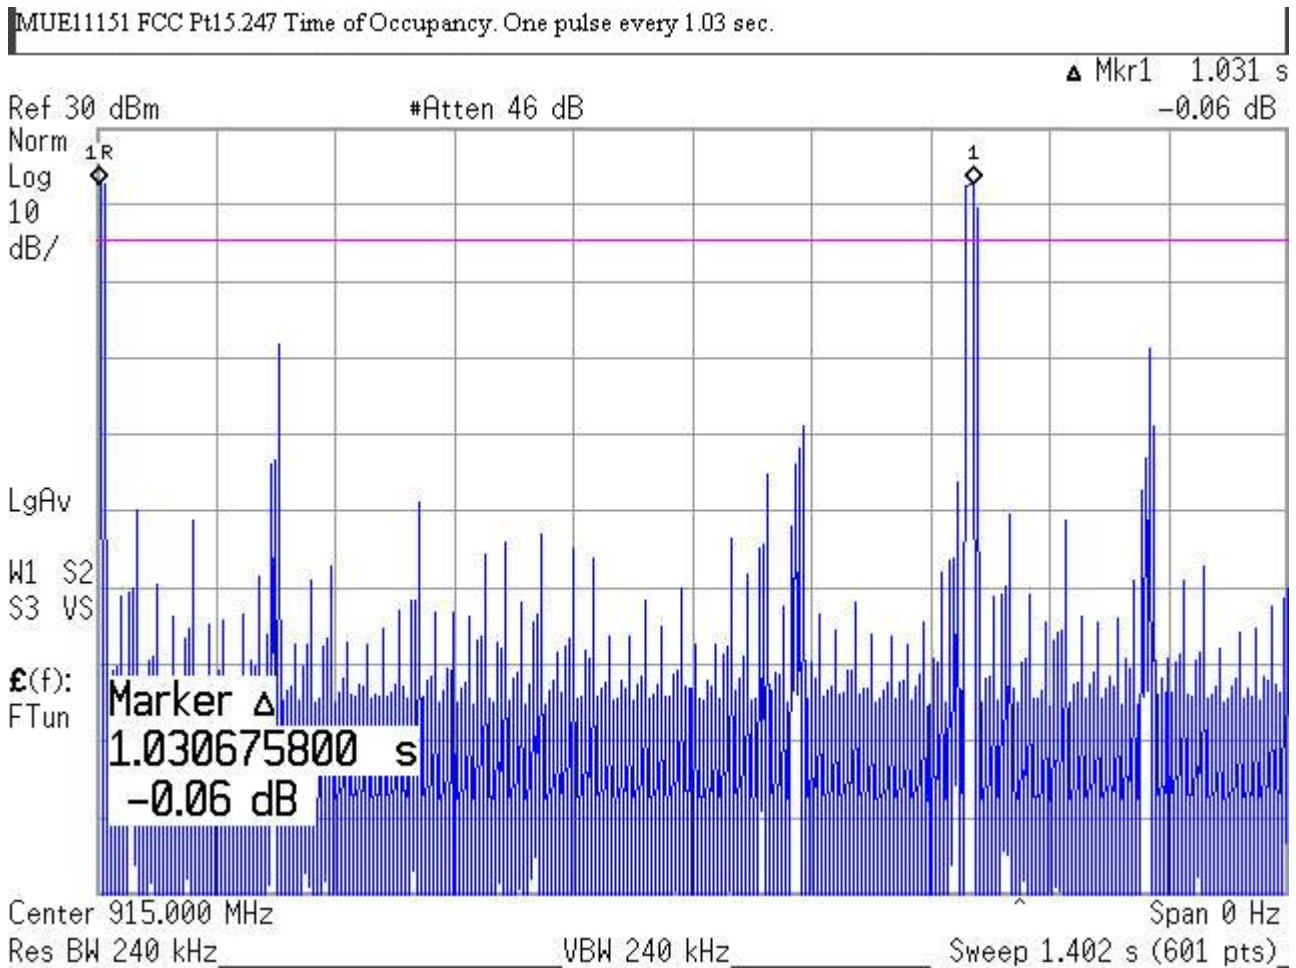


Figure 5-2, Time Of Occupancy Plot

5.2 RF Power Output: (FCC Part §2.1046)

To measure the output power the hopping sequence was stopped while the frequency dwelled on the lowest, middle and highest channel. The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer. The analyzer offset was adjusted to compensate for the attenuator, cable, and other losses in the system.

Table 5. RF Power Output

Frequency	Level	Limit	Pass/Fail
Low Channel: 902.5MHz	27.04	30dBm	Pass
Mid Channel: 915.0MHz	26.99	30dBm	Pass
High Channel: 927.0MHz	26.95	30dBm	Pass

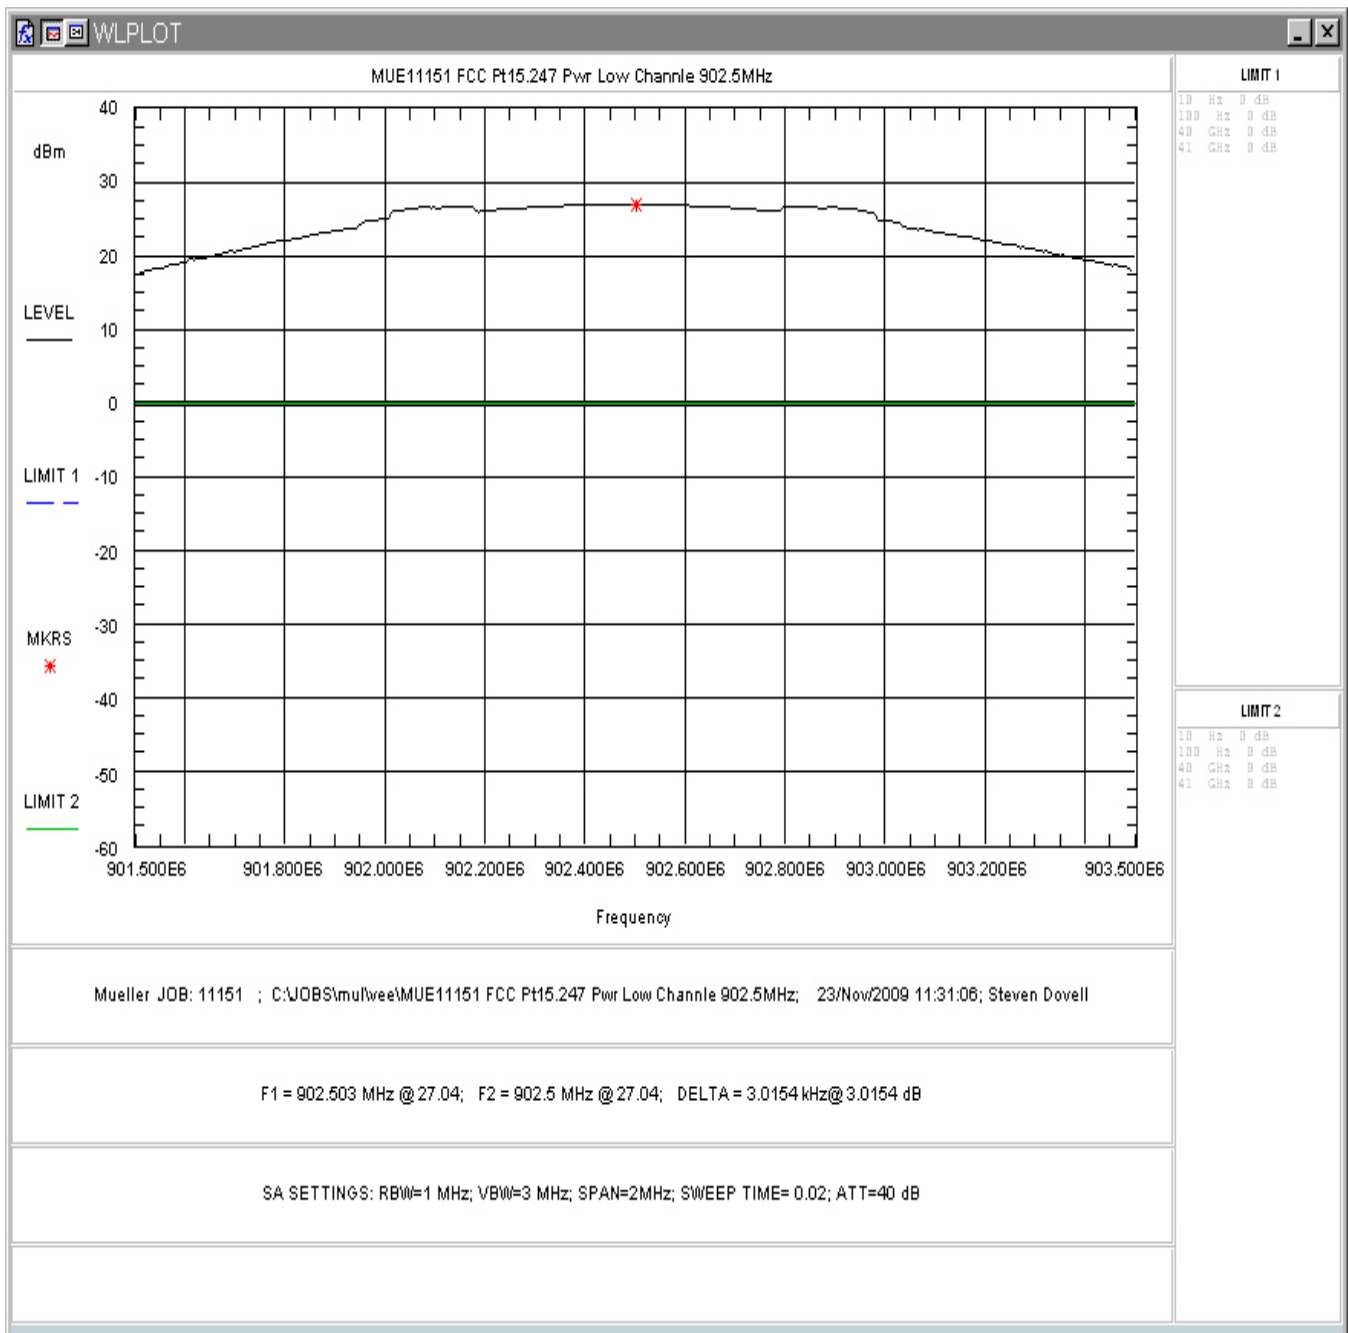


Figure 5-3. RF Peak Power, Low Channel

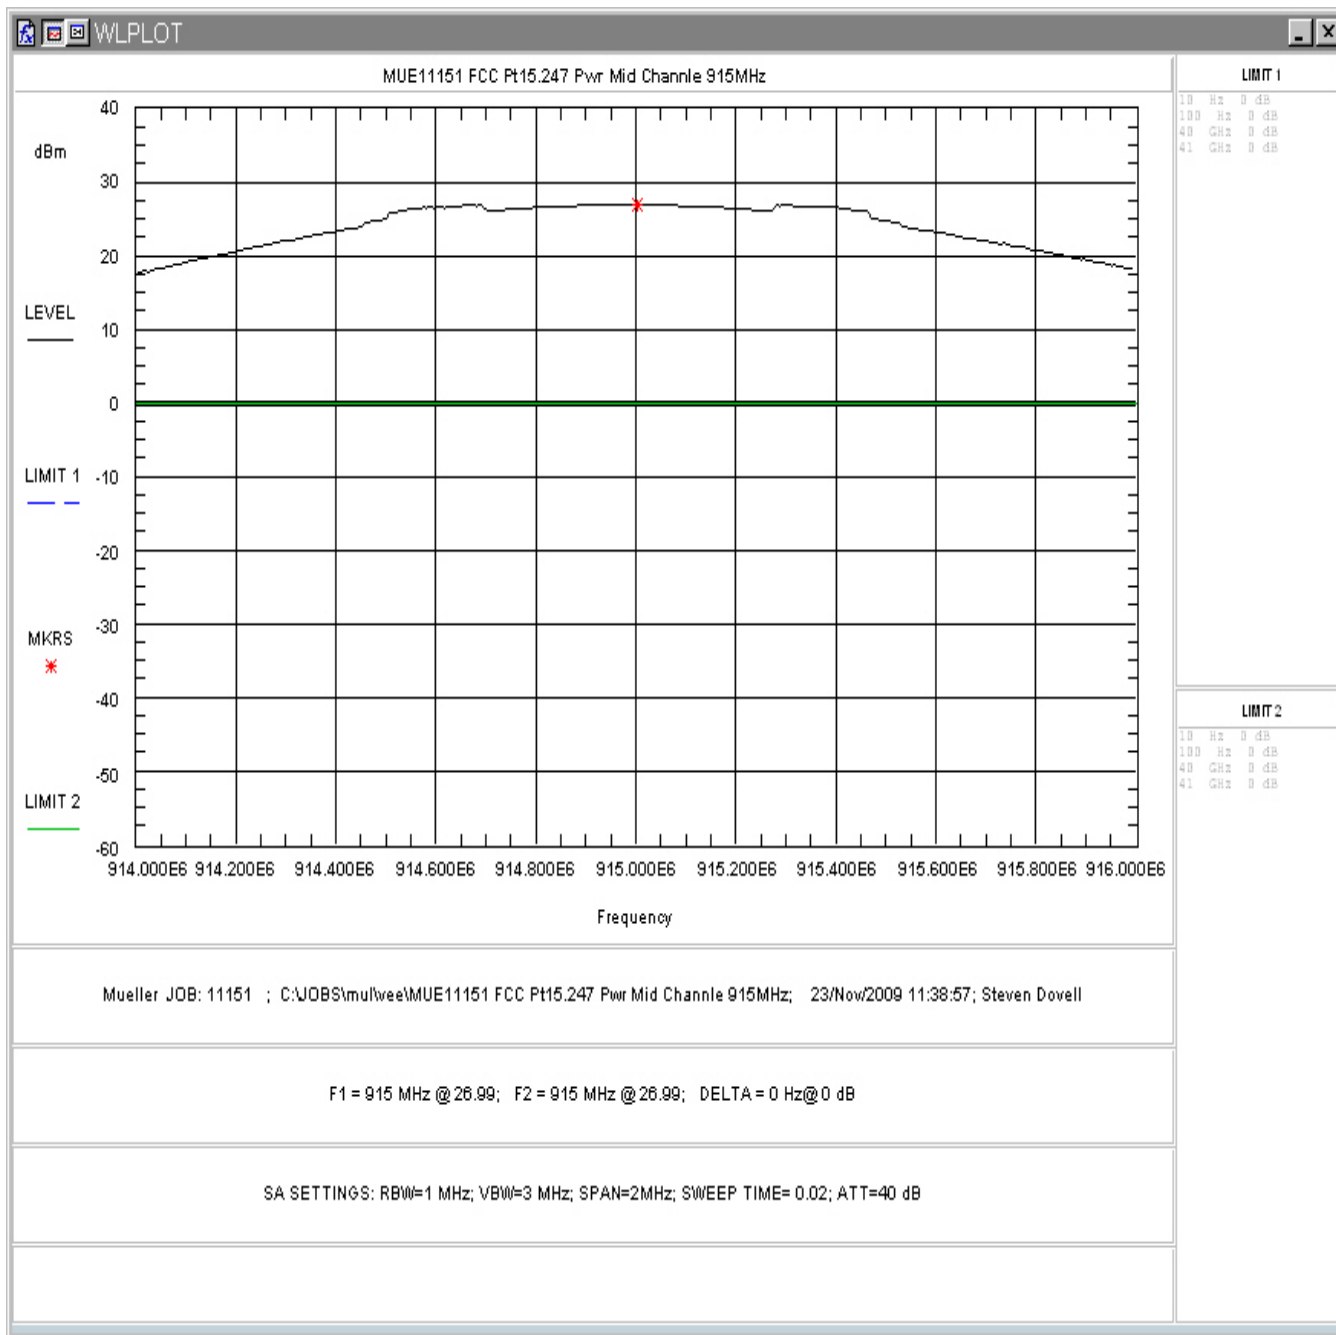


Figure 5-4. RF Peak Power, Mid Channel

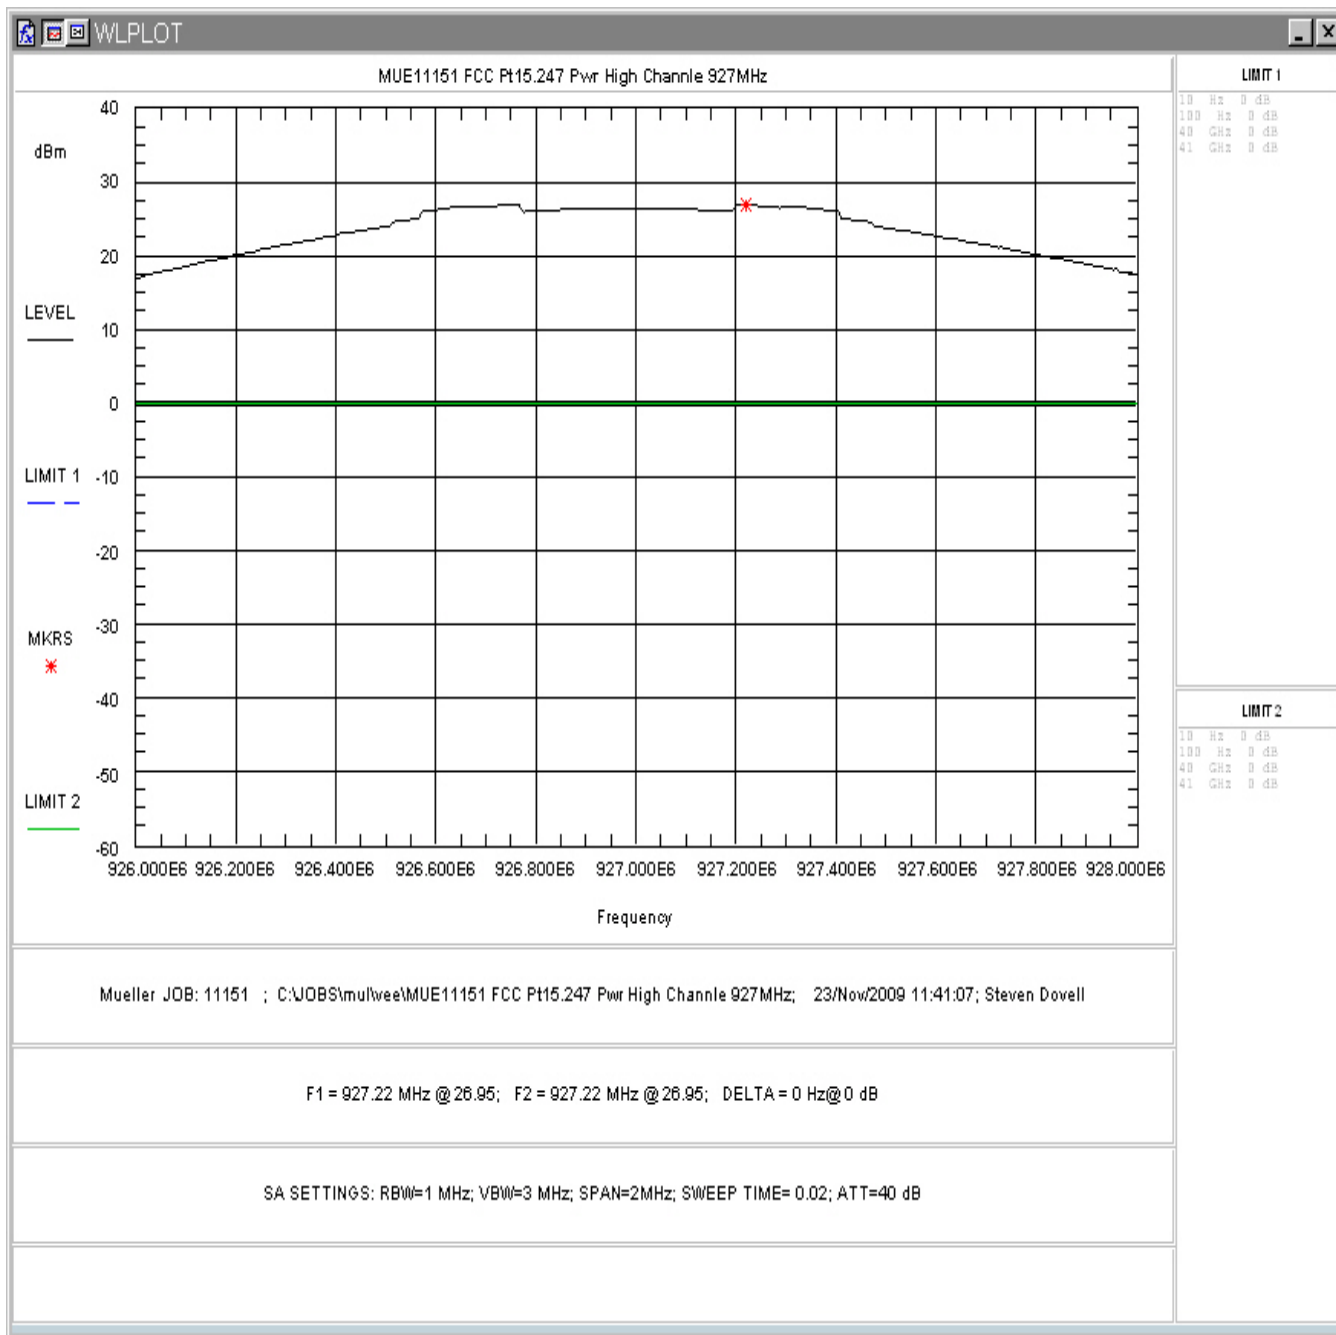


Figure 5-5. RF Peak Power, High Channel

5.3 Occupied Bandwidth: (FCC Part §2.1049)

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

For Frequency Hopping Spread Spectrum Systems, operating in the 902-928MHz frequency range, FCC Part 15.247 requires that devices with occupied bandwidths less than 250kHz have a minimum of 50 hopping channels.

At full modulation, the occupied bandwidth was measured as shown:

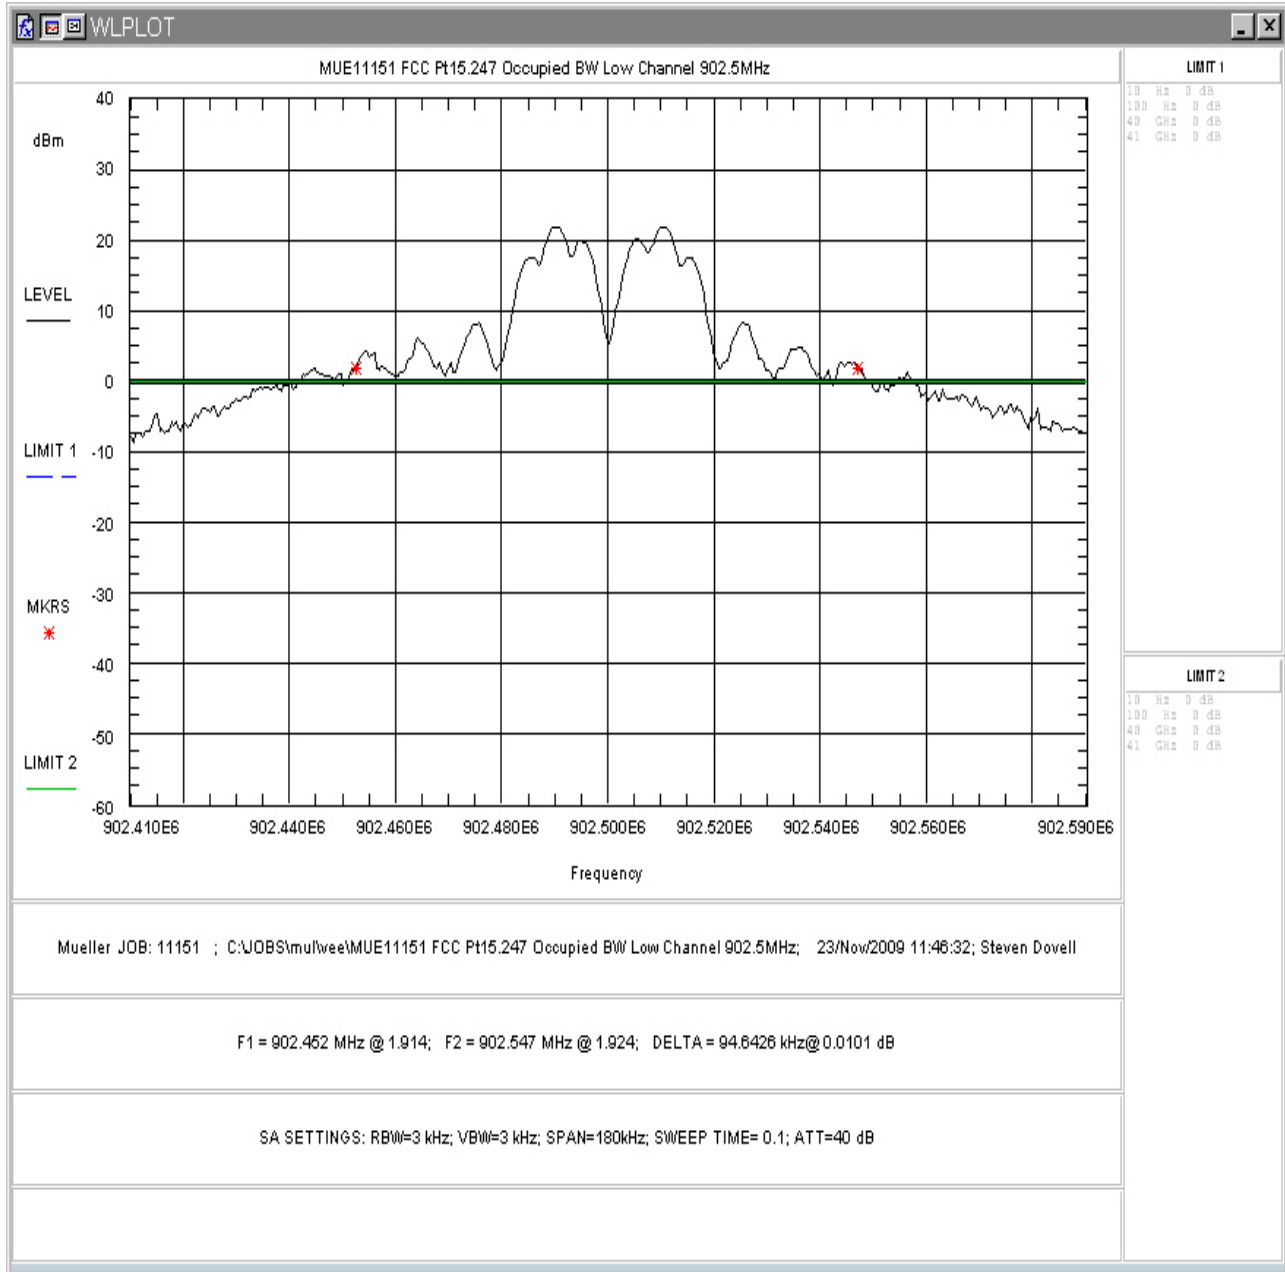


Figure 5-6. Occupied Bandwidth, Low Channel

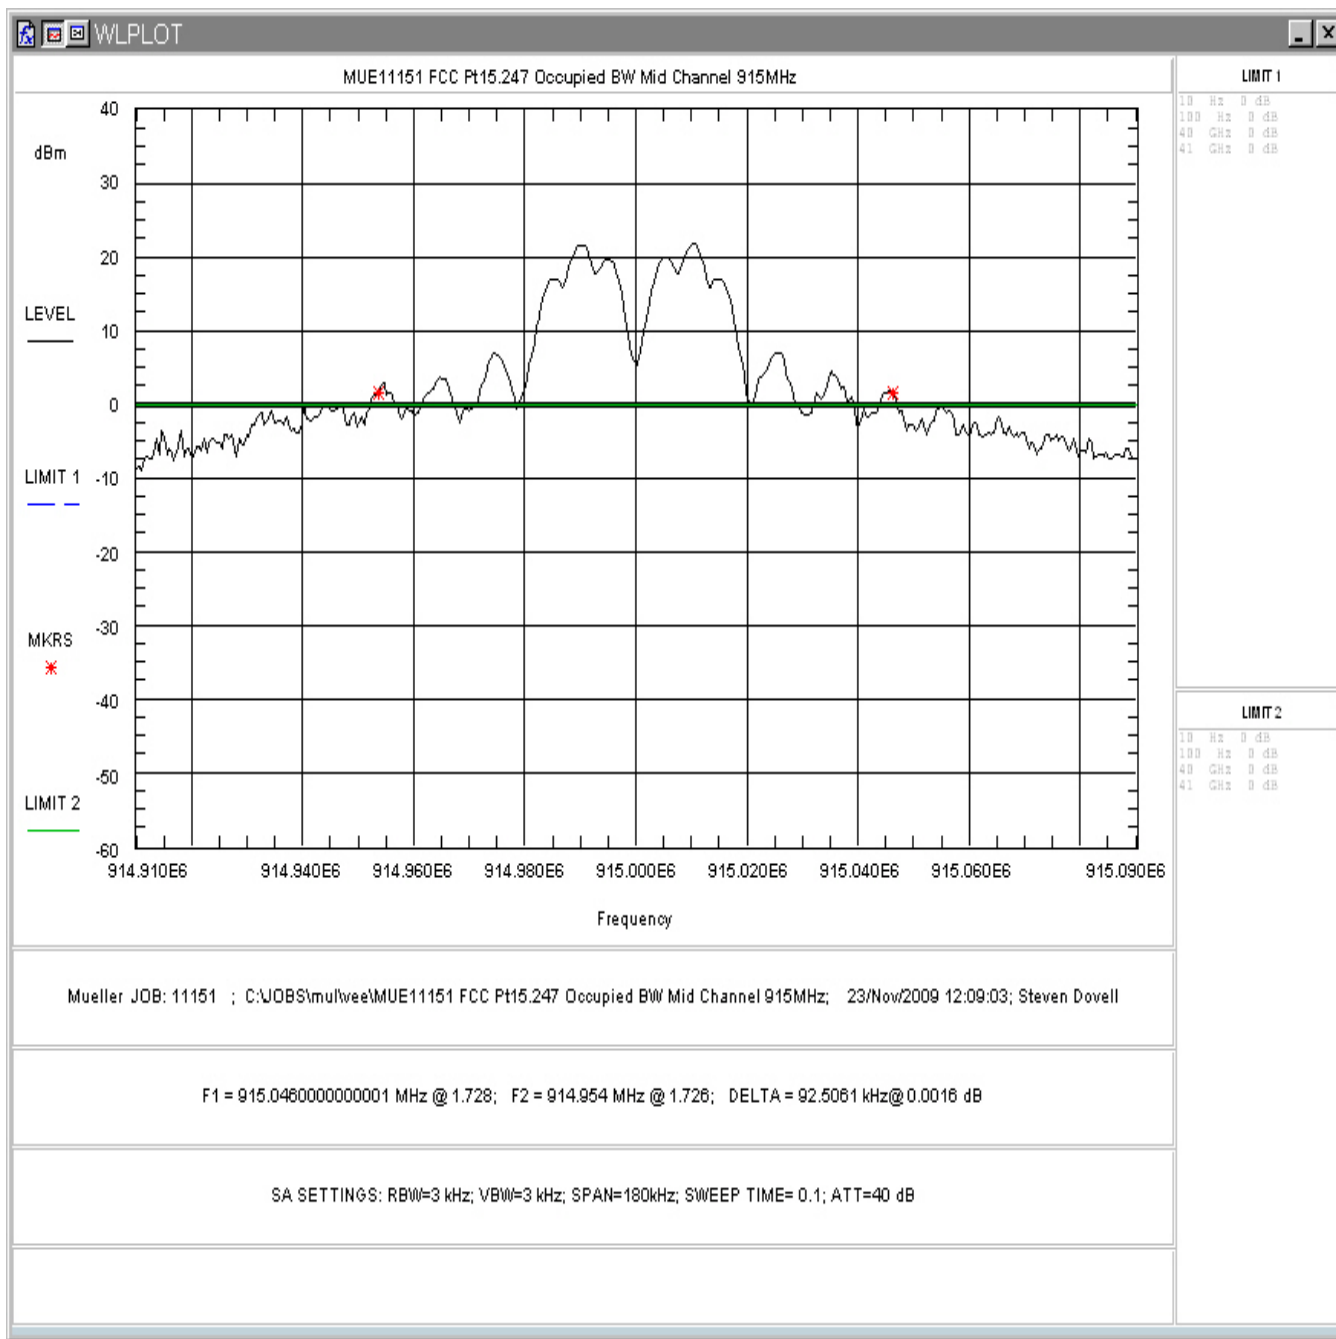


Figure 5-7. Occupied Bandwidth, Mid Channel

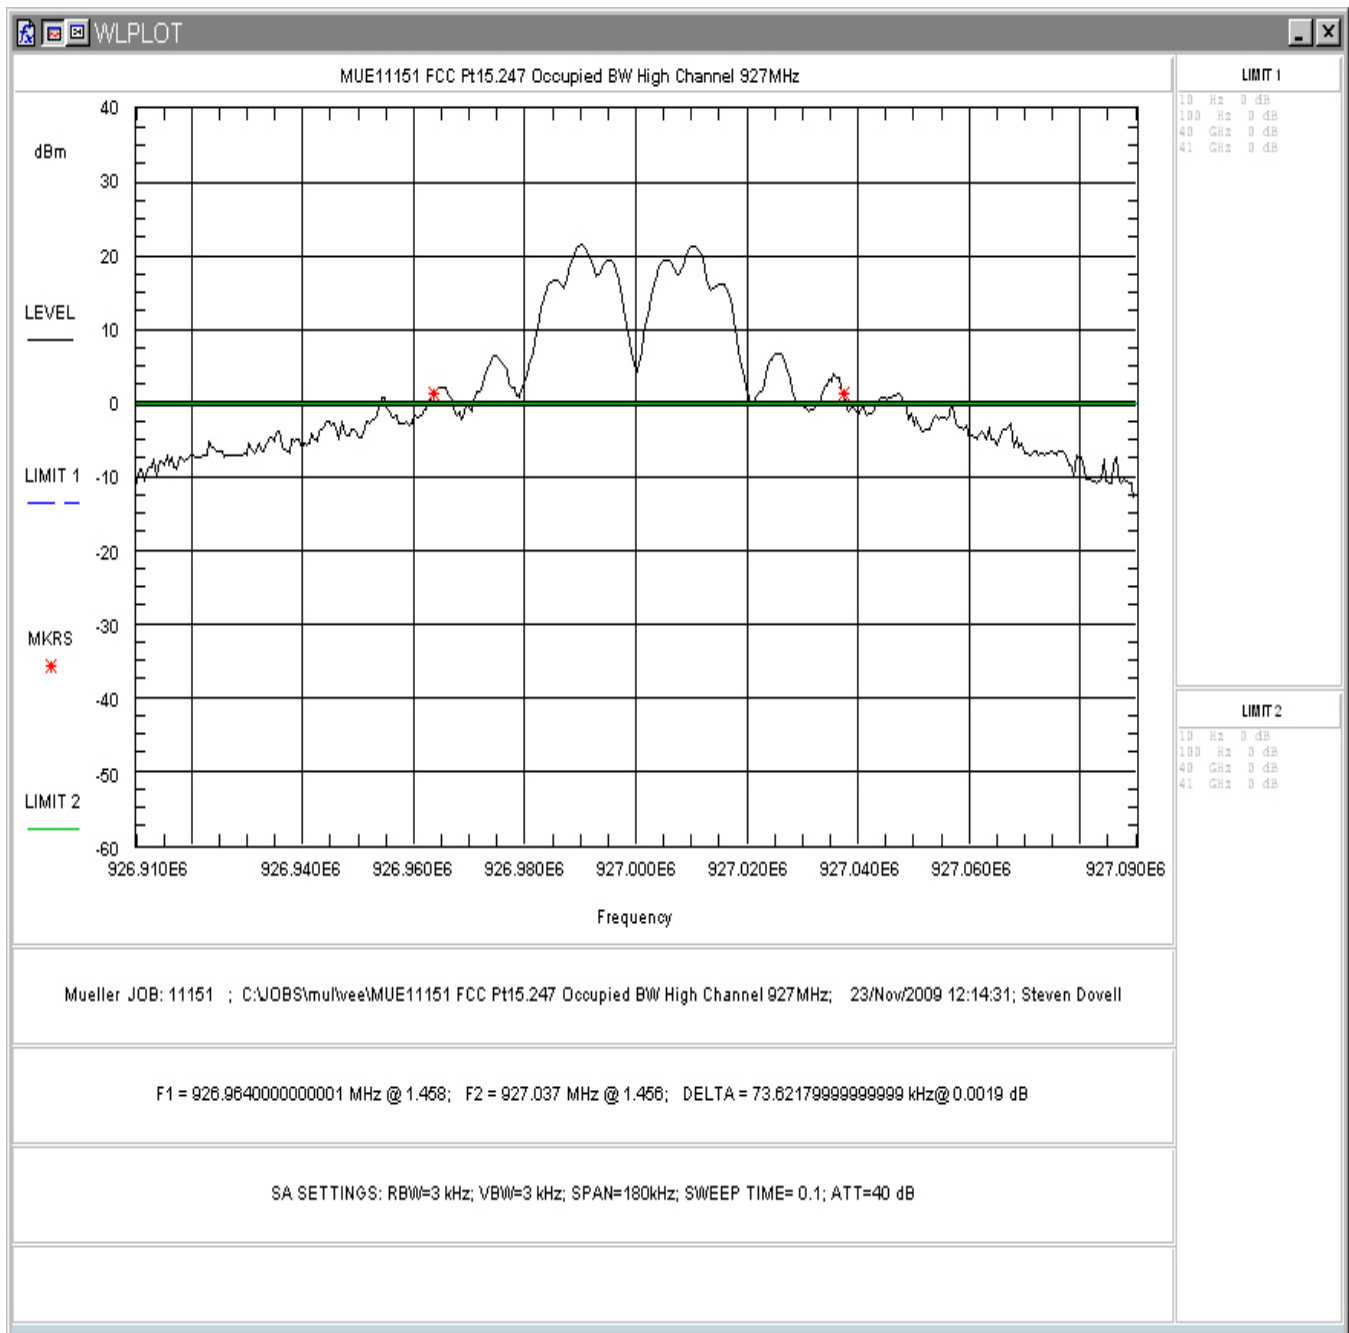


Figure 5-8. Occupied Bandwidth, High Channel

Table 6 provides a summary of the Occupied Bandwidth Results.

Table 6. Occupied Bandwidth Results

Frequency	Bandwidth
Low Channel: 902.5MHz	94.642kHz
Mid Channel: 915.0MHz	92.506kHz
High Channel: 927.0MHz	73.621kHz

5.4 Channel Spacing and Number of Hop Channels (FCC Part §15247(a)(1))

Per the FCC requirements, frequency hopping systems operating in the 902-928MHz shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth, whichever is greater. The maximum 20dB bandwidth measured is 94.643kHz so the channel spacing must be more than 94.643kHz. In addition, Part 15.247 requires that devices with occupied bandwidths less than 250kHz have a minimum of 50 hopping channels.

The EUT antenna was removed and the cable was connected directly into a spectrum analyzer through a calibrated cable and attenuator. An offset was programmed into the spectrum analyzer to compensate for the loss of the external attenuator/cable. The spectrum analyzer resolution bandwidth was set to 100 kHz and the video bandwidth was set to 300 kHz. The channel spacing of 2 adjacent channels was measured using a spectrum analyzer span setting of 2MHz. Also, the number of hopping channels was measured within the 902-928MHz frequency range.

The following are plots of the channel spacing and number of hopping channels data. The channel spacing was measured to be 500kHz and the number of hopping channels is 50.

Table 7 Channel spacing and number of hopping channels summary

Test	Result	Limit	Pass/Fail
Channel spacing	251.19kHz	94.643kHz Minimum	Pass
Number of Channels	50 channels	50 channels minimum	Pass

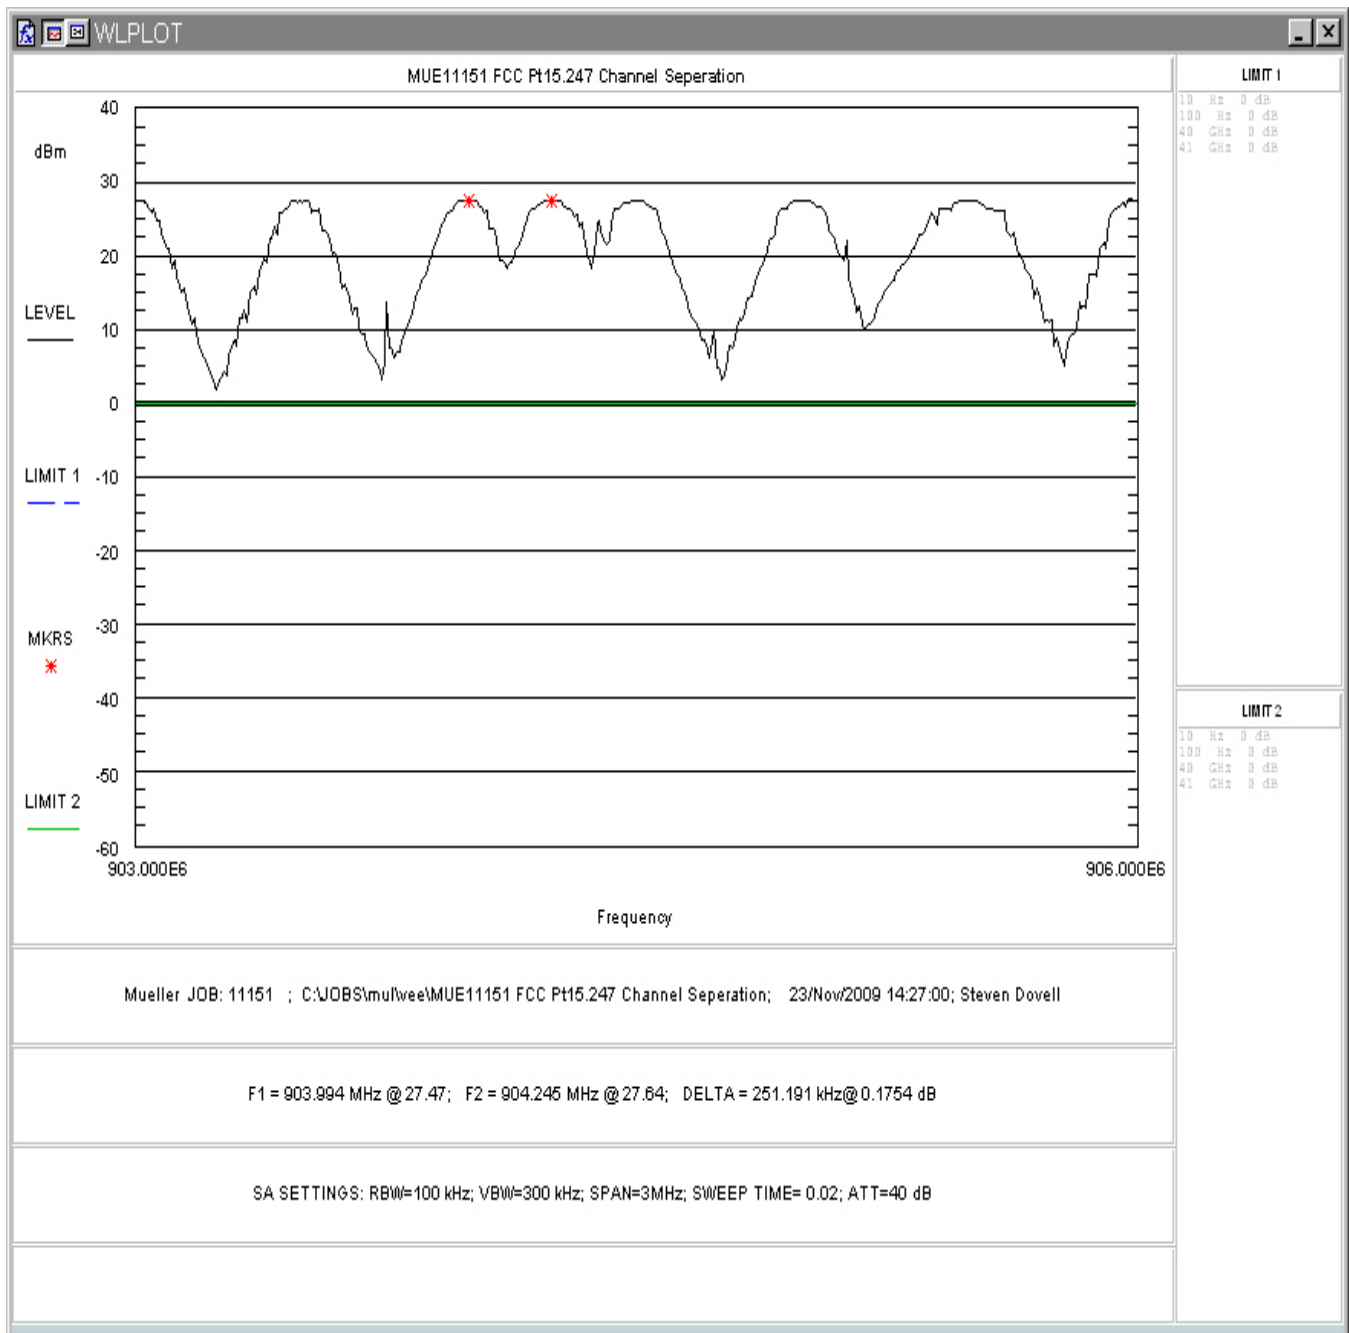


Figure 5-9, Channel Spacing

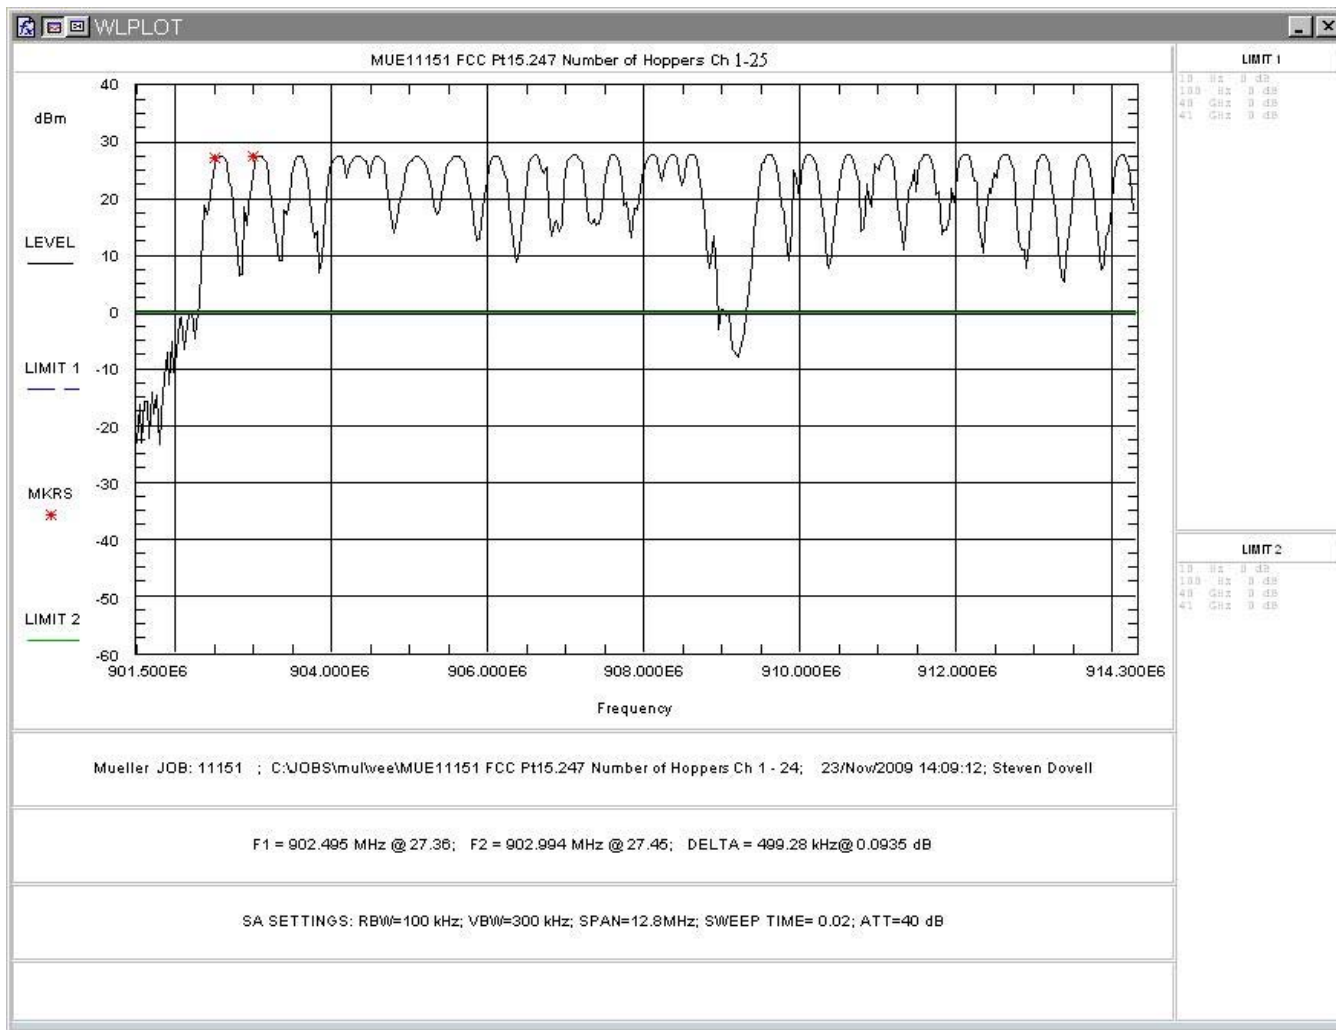


Figure 5-10, Number of Channels (1 – 25)

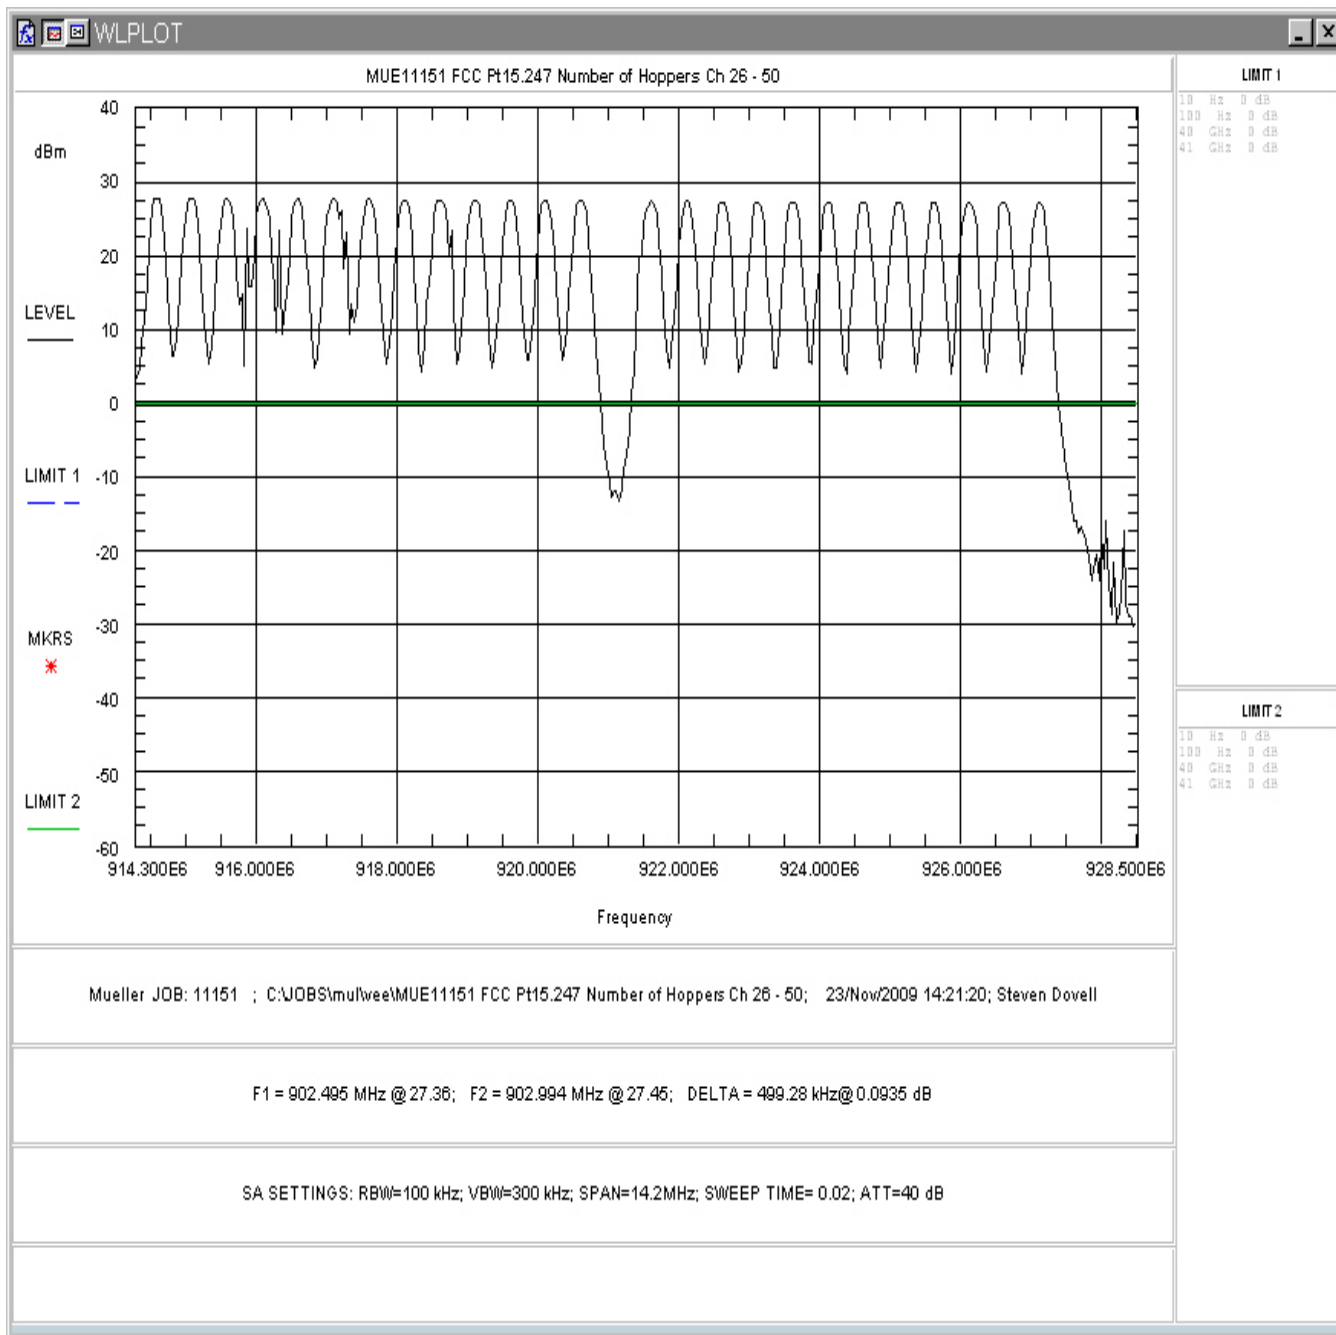


Figure 5-11, Number of Channels (26 – 50)

5.5 Conducted Spurious Emissions at Antenna Terminals (FCC Part §2.1051)

The EUT must comply with requirements for spurious emissions at the antenna terminal. Per §15.247(c) all spurious emissions in any 100 kHz bandwidth outside the frequency band in which the device is operating shall be attenuated 20 dB below the highest power level in any 100 kHz bandwidth within the band containing the highest level of the desired power.

The EUT antenna was removed and the cable was connected directly into a spectrum analyzer through a suitable attenuator. An offset was programmed into the spectrum analyzer to compensate for the loss of the external attenuator. The spectrum analyzer resolution bandwidth was set to 100 kHz and the video bandwidth was set to 300 kHz. The amplitude of the EUT carrier frequency was measured to determine the emissions limit (20 dB below the maximum modulated transmit frequency amplitude). The emissions outside of the allocated frequency band were then scanned from 30 MHz up to the tenth harmonic of the carrier.

Close-up plots of the 902-928MHz band edges are provided in both the hopping and non-hopping modes to show compliance at both of these points.

The following are plots of the conducted spurious emissions data.

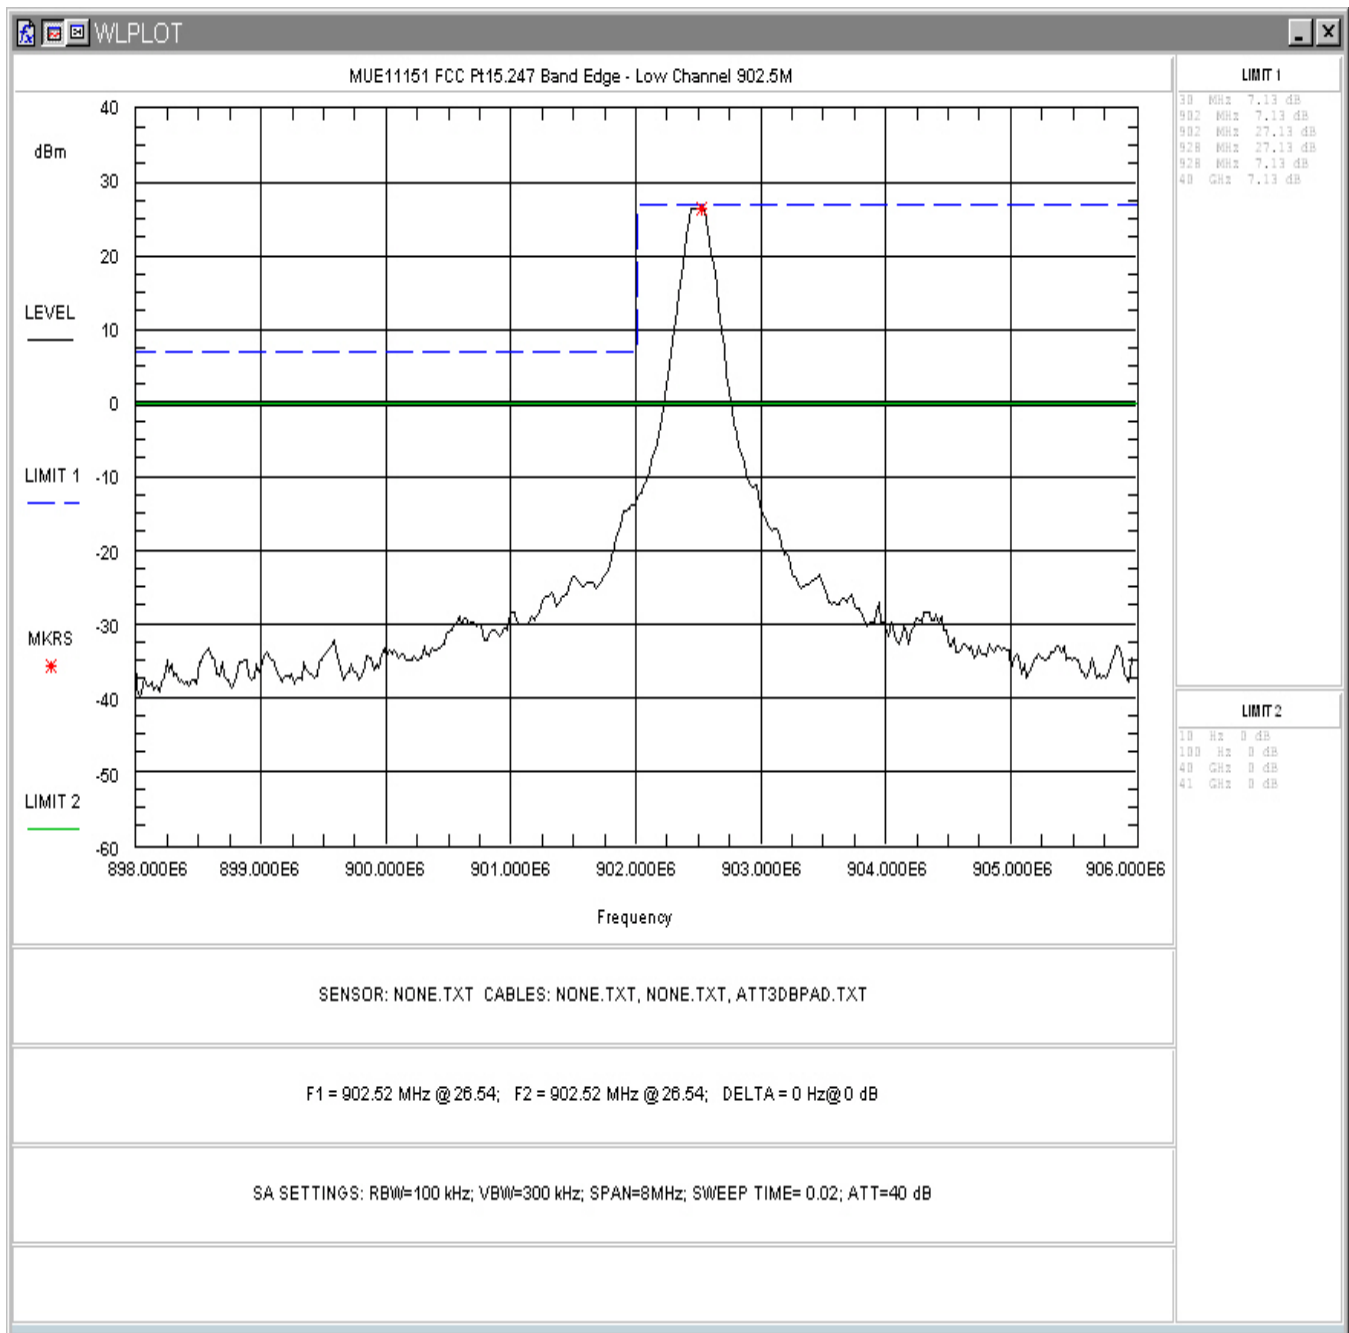


Figure 5-12. Lower Band Edge Plot, Low Channel

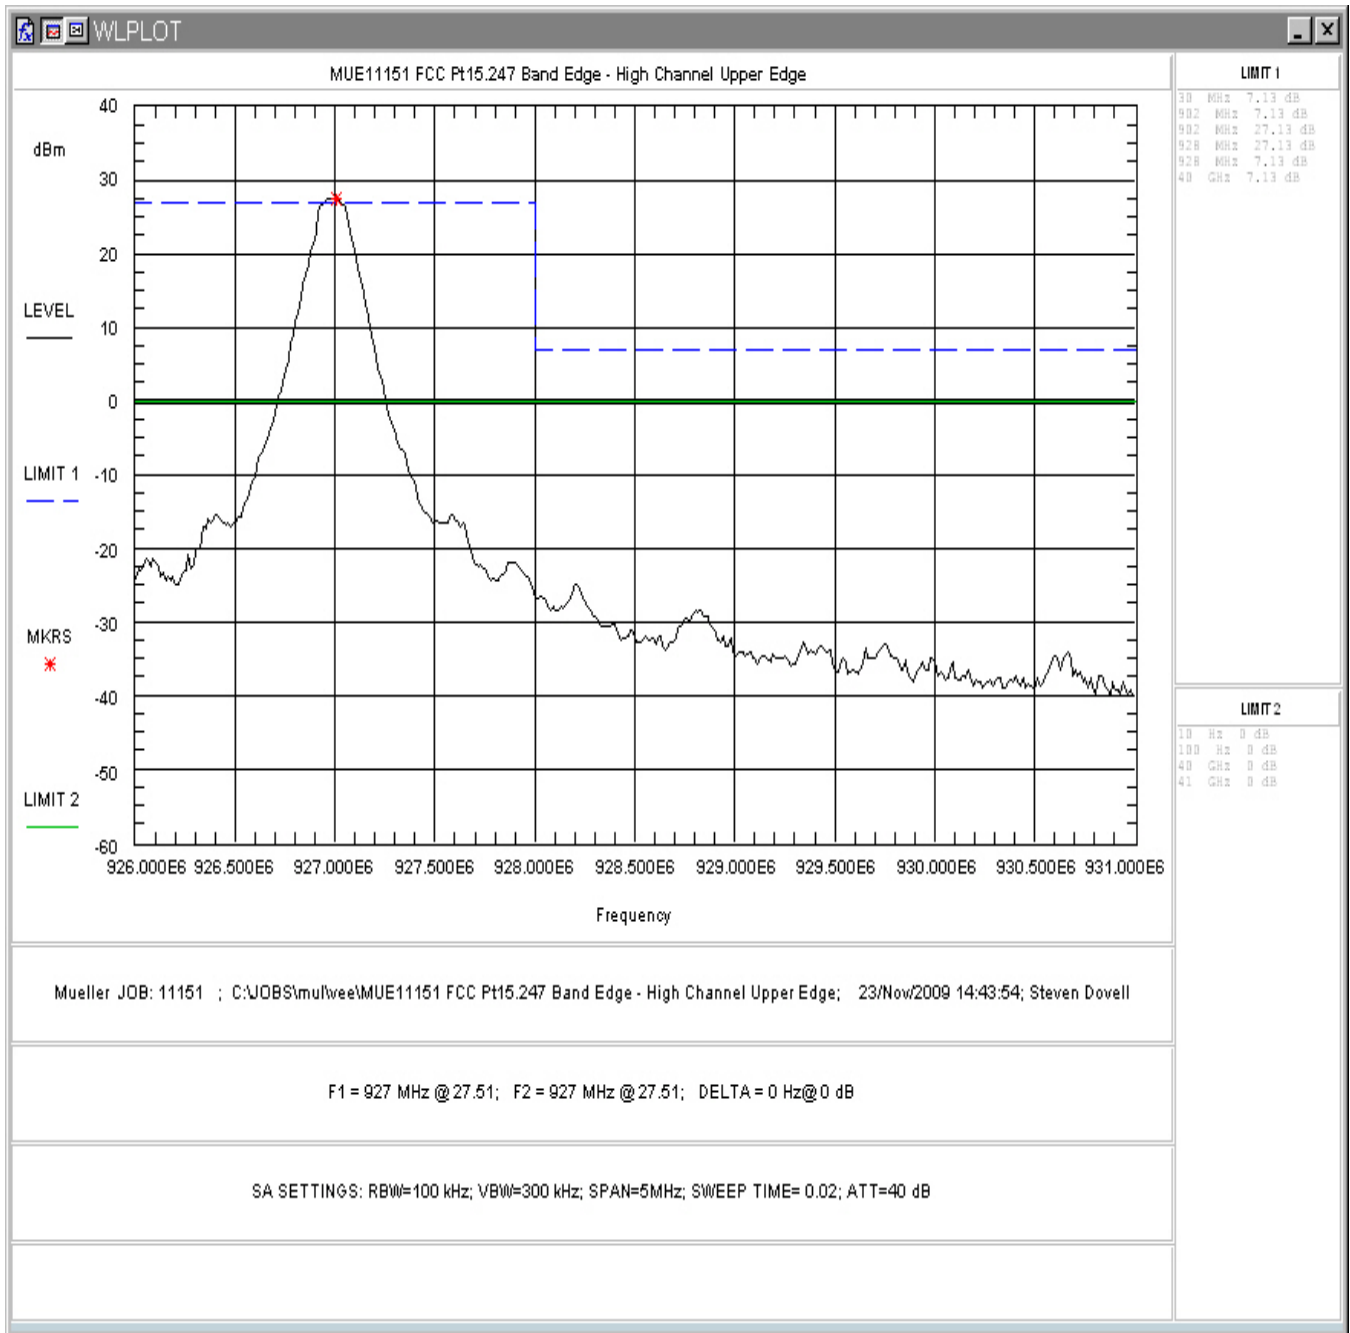


Figure 5-13. Upper Band Edge Plot, High Channel

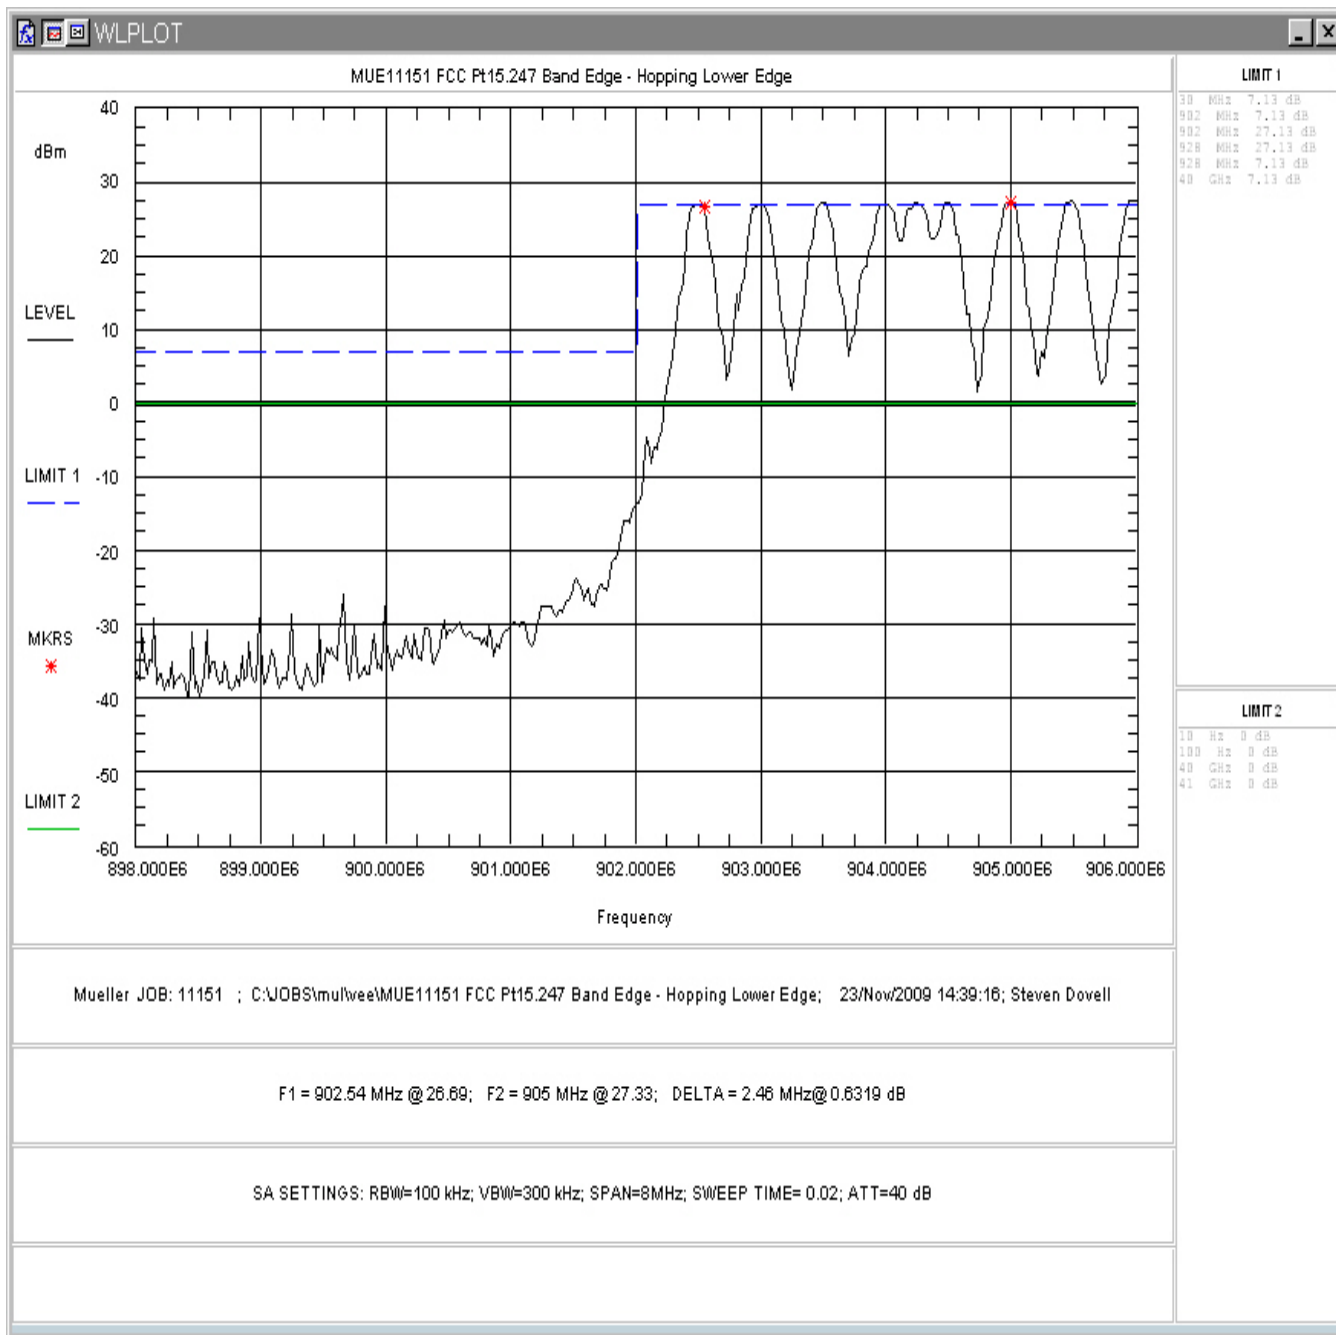


Figure 5-14. Lower Band Edge Plot, Hopping Mode

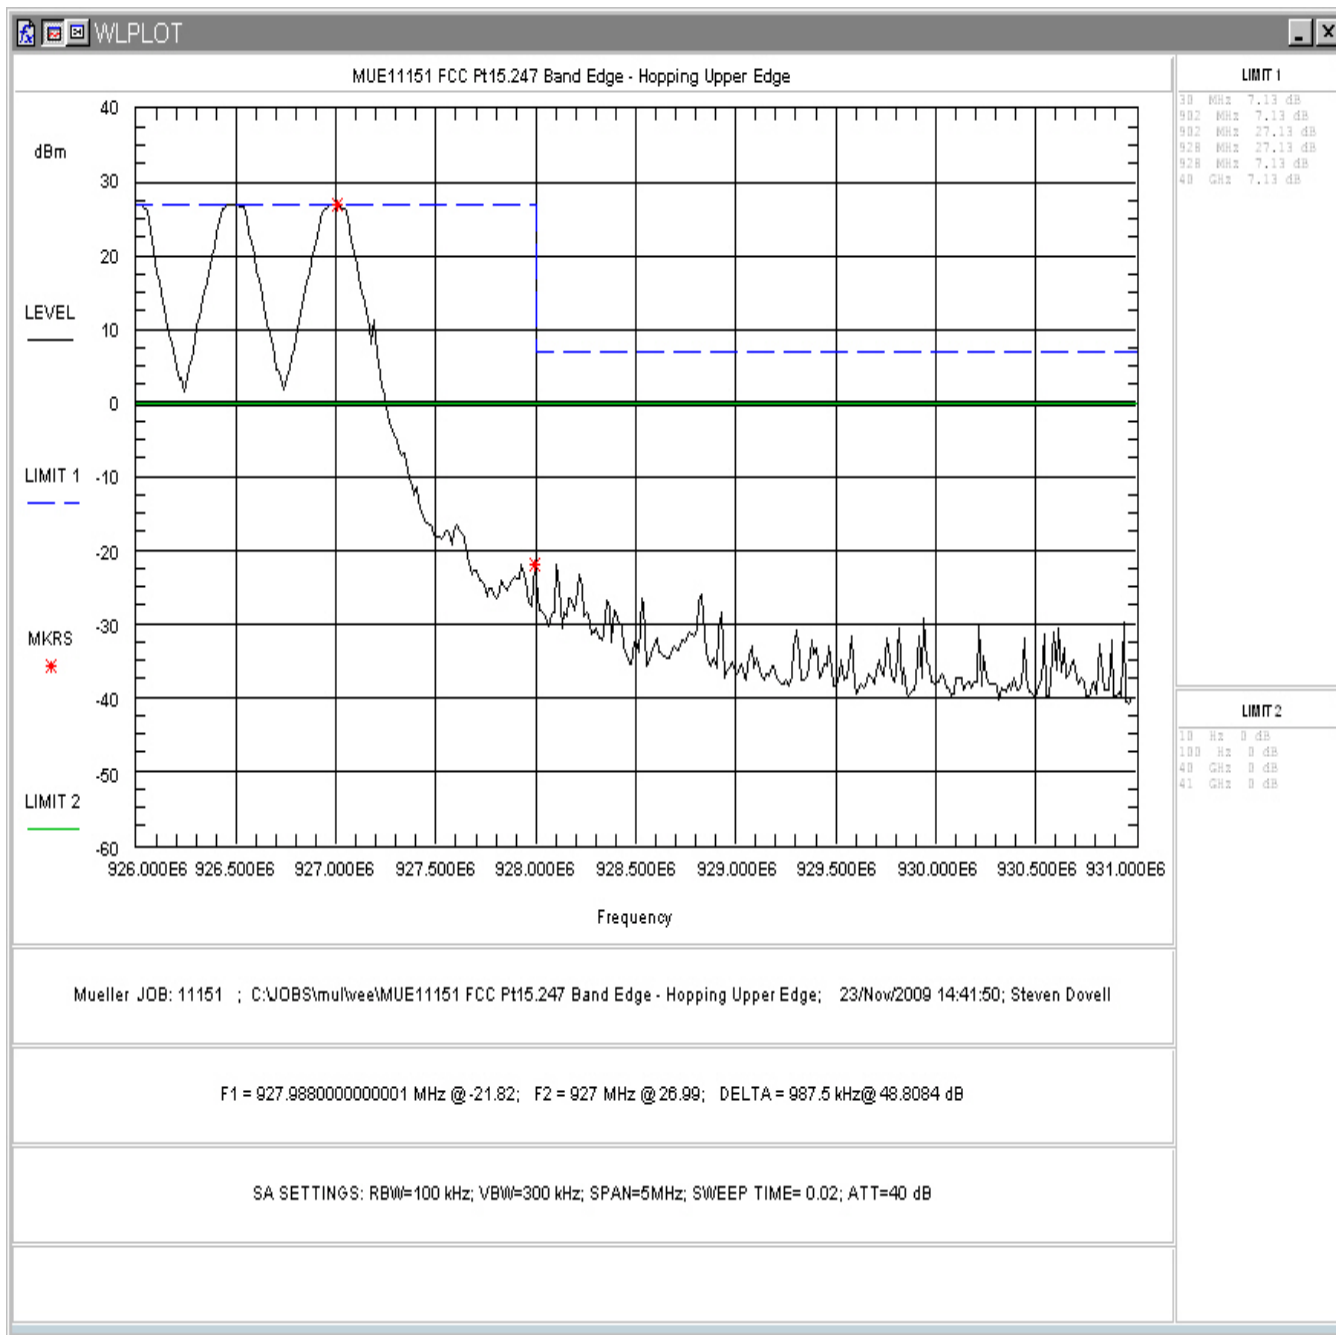


Figure 5-15. Upper Band Edge Plot, Hopping Mode

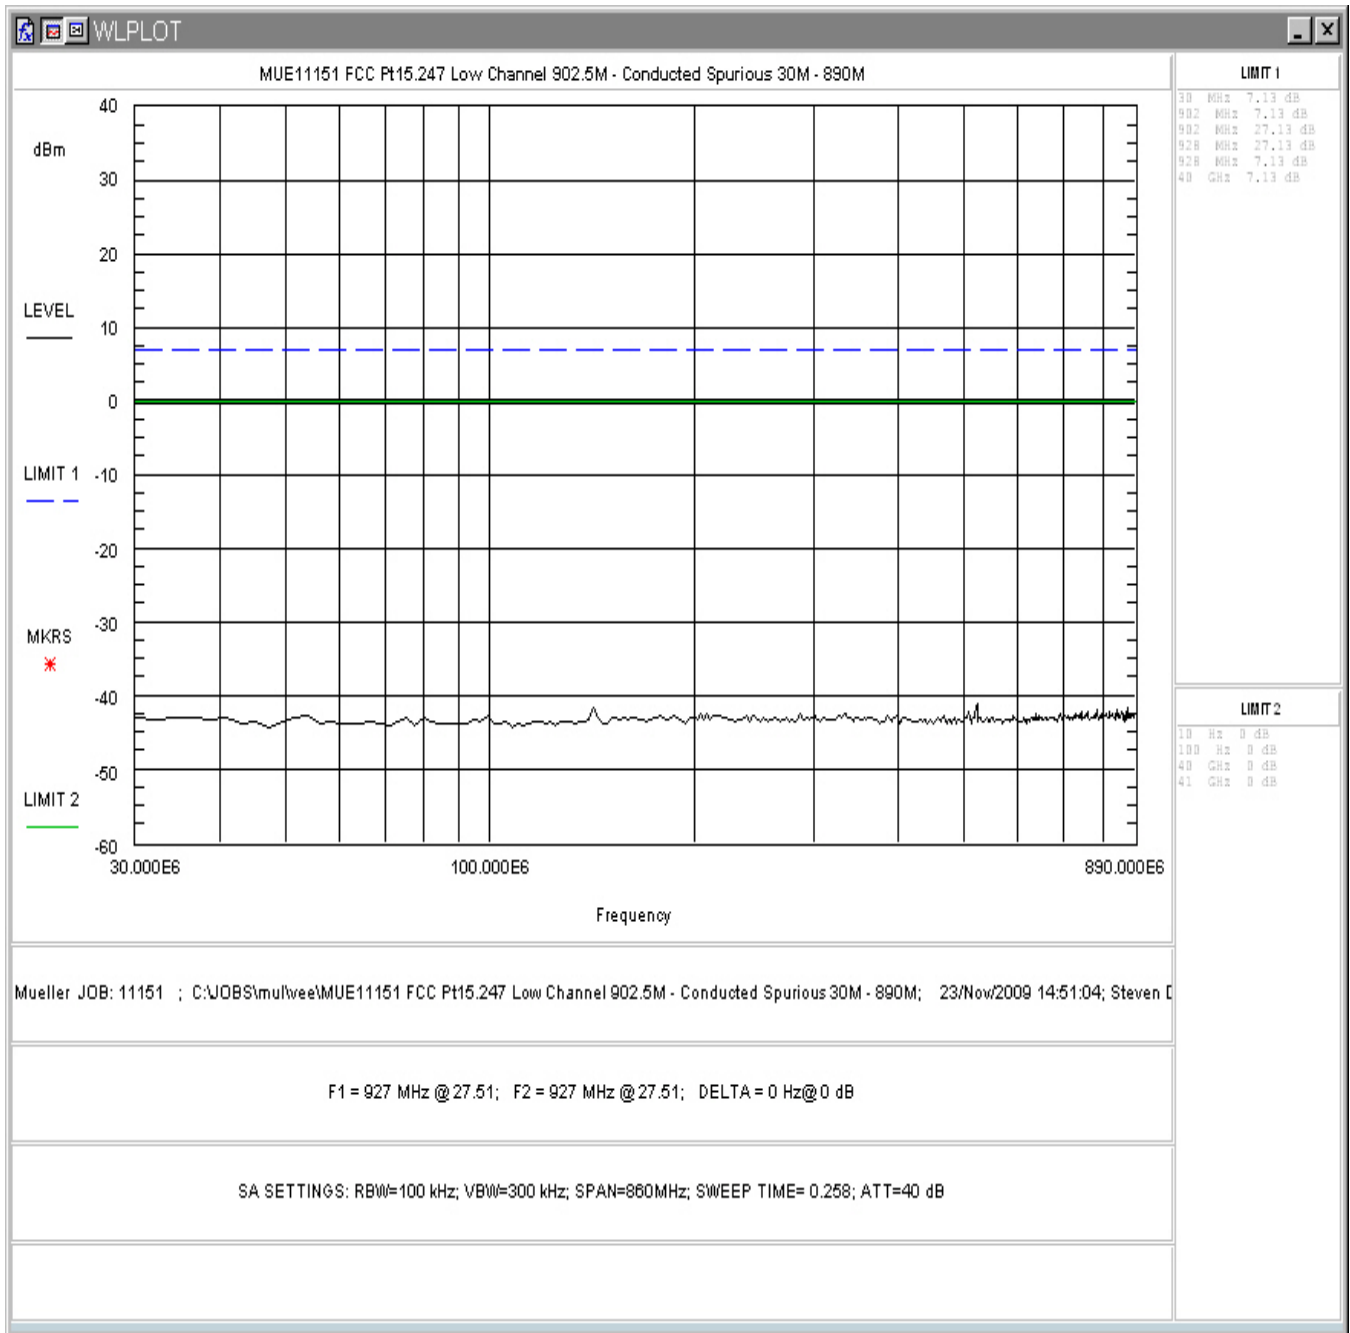


Figure 5-16. Conducted Spurious Emissions, Low Channel 30 - 890MHz

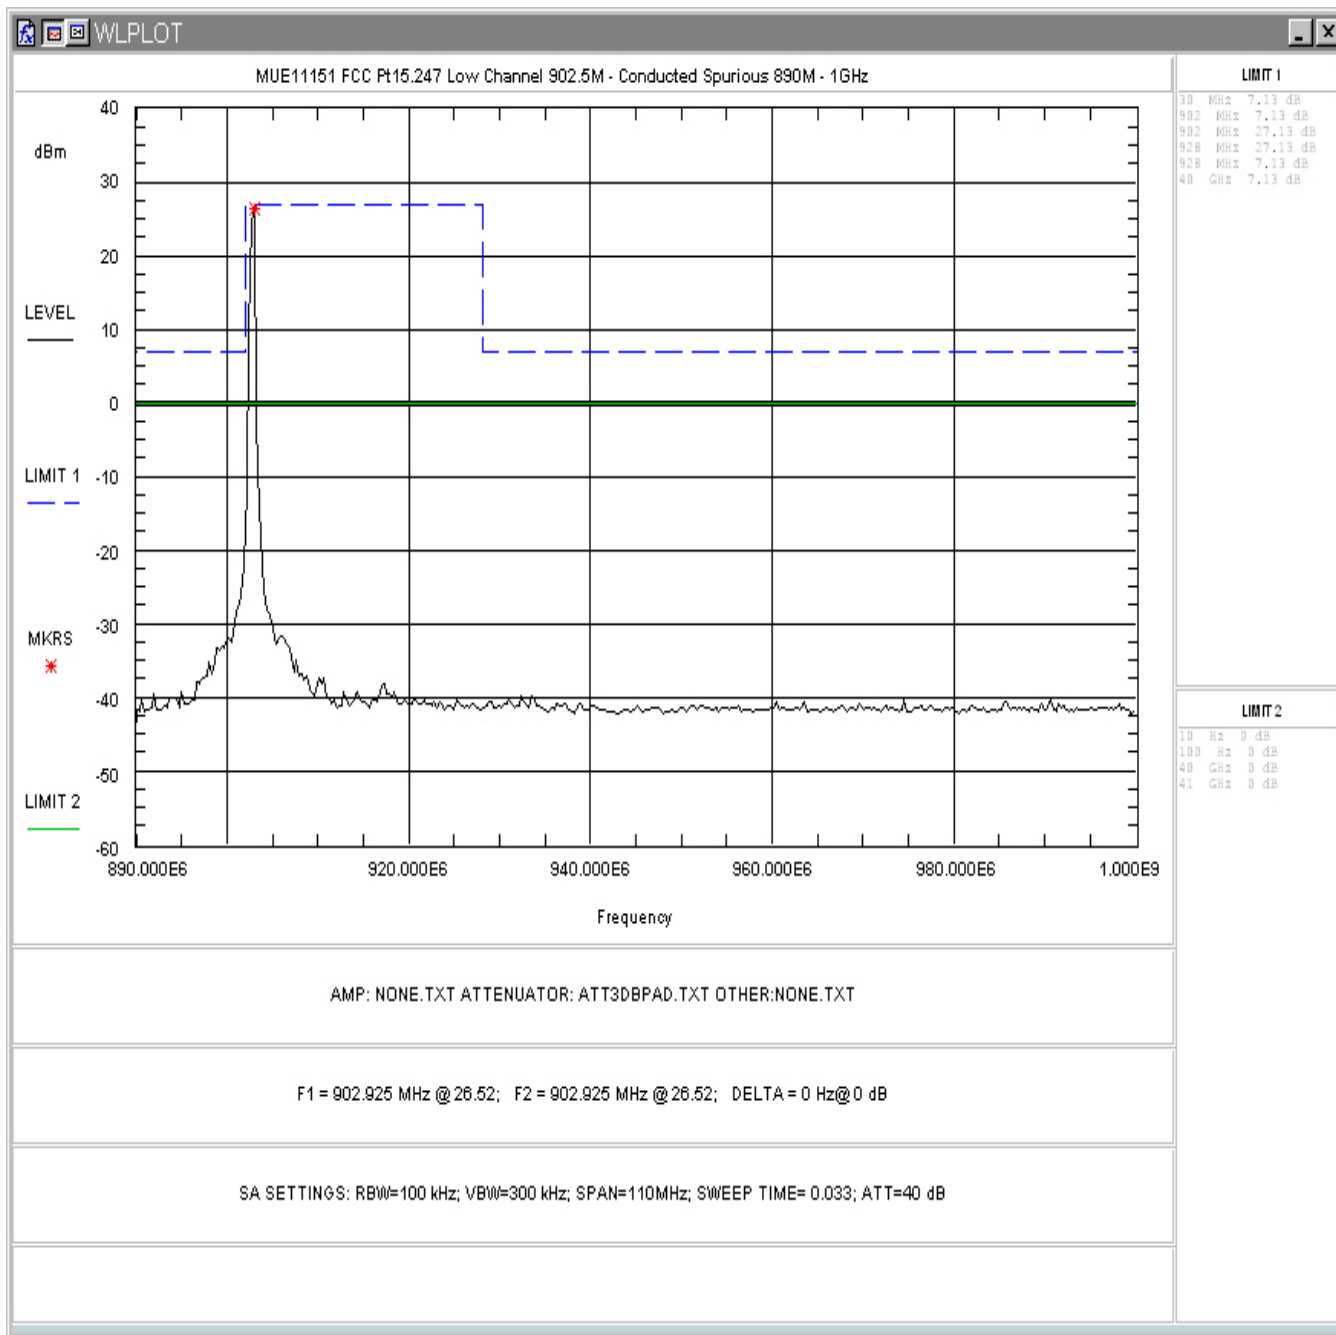


Figure 5-17. Conducted Spurious Emissions, Low Channel 890-1000MHz

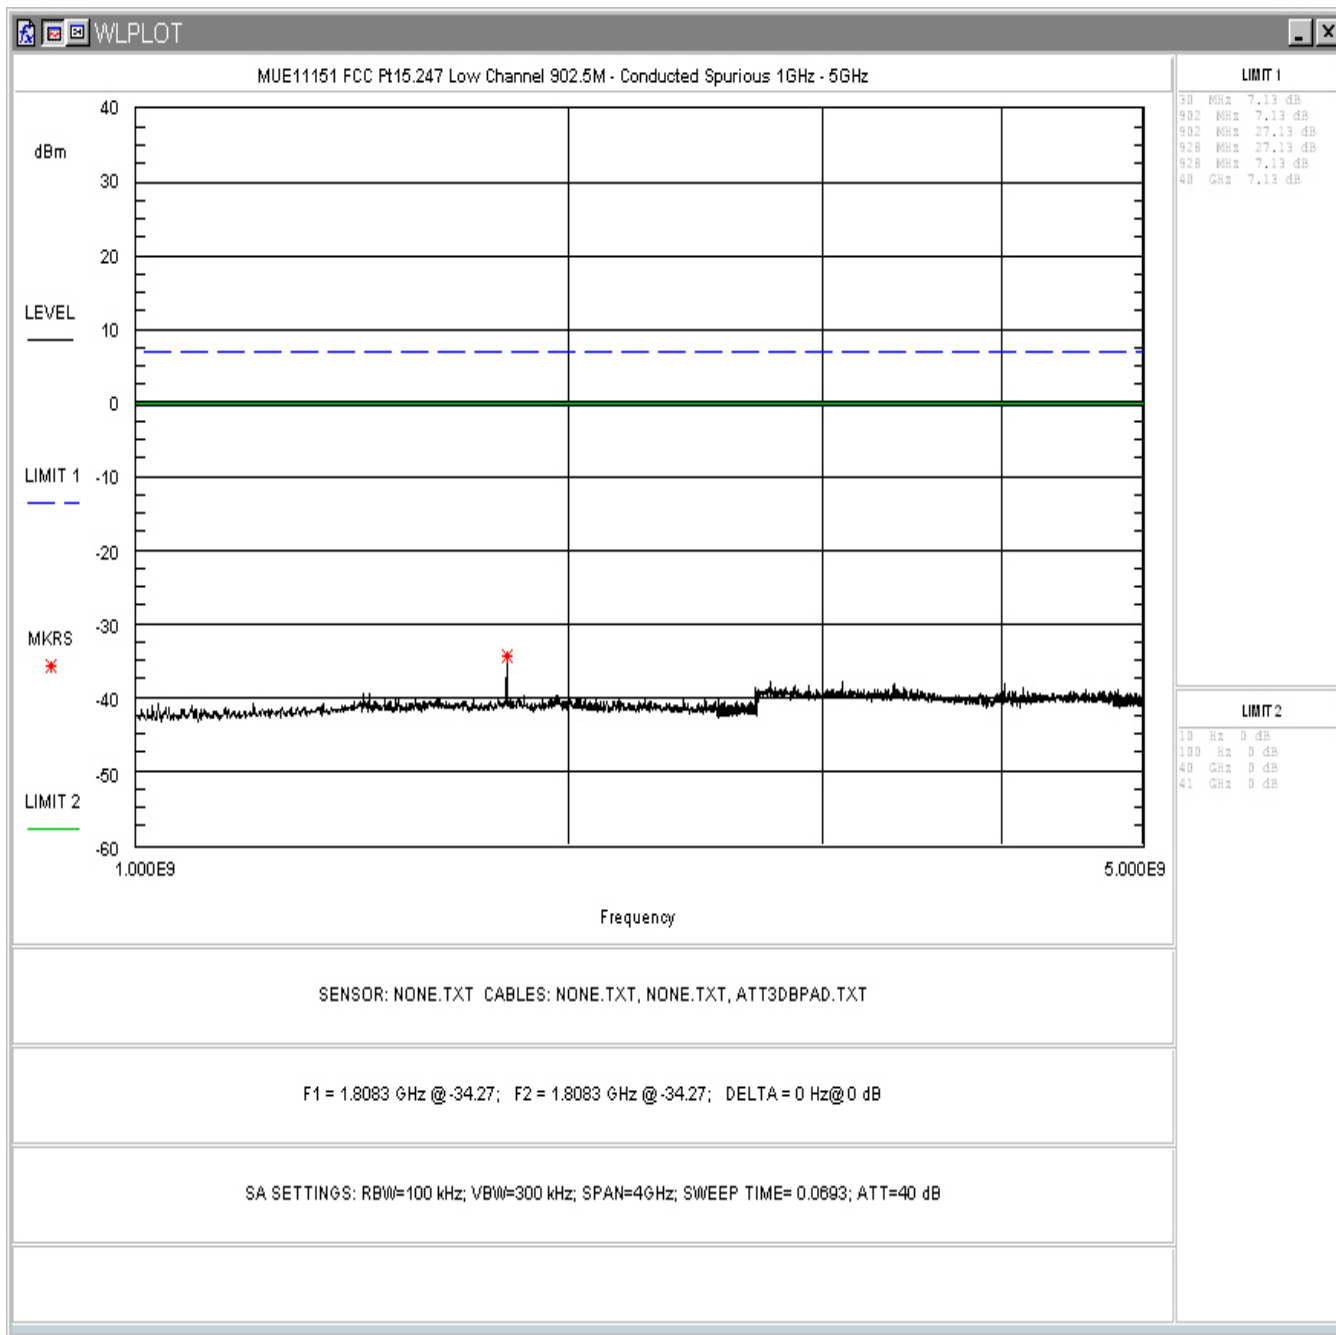


Figure 5-18. Conducted Spurious Emissions, Low Channel 1-5GHz

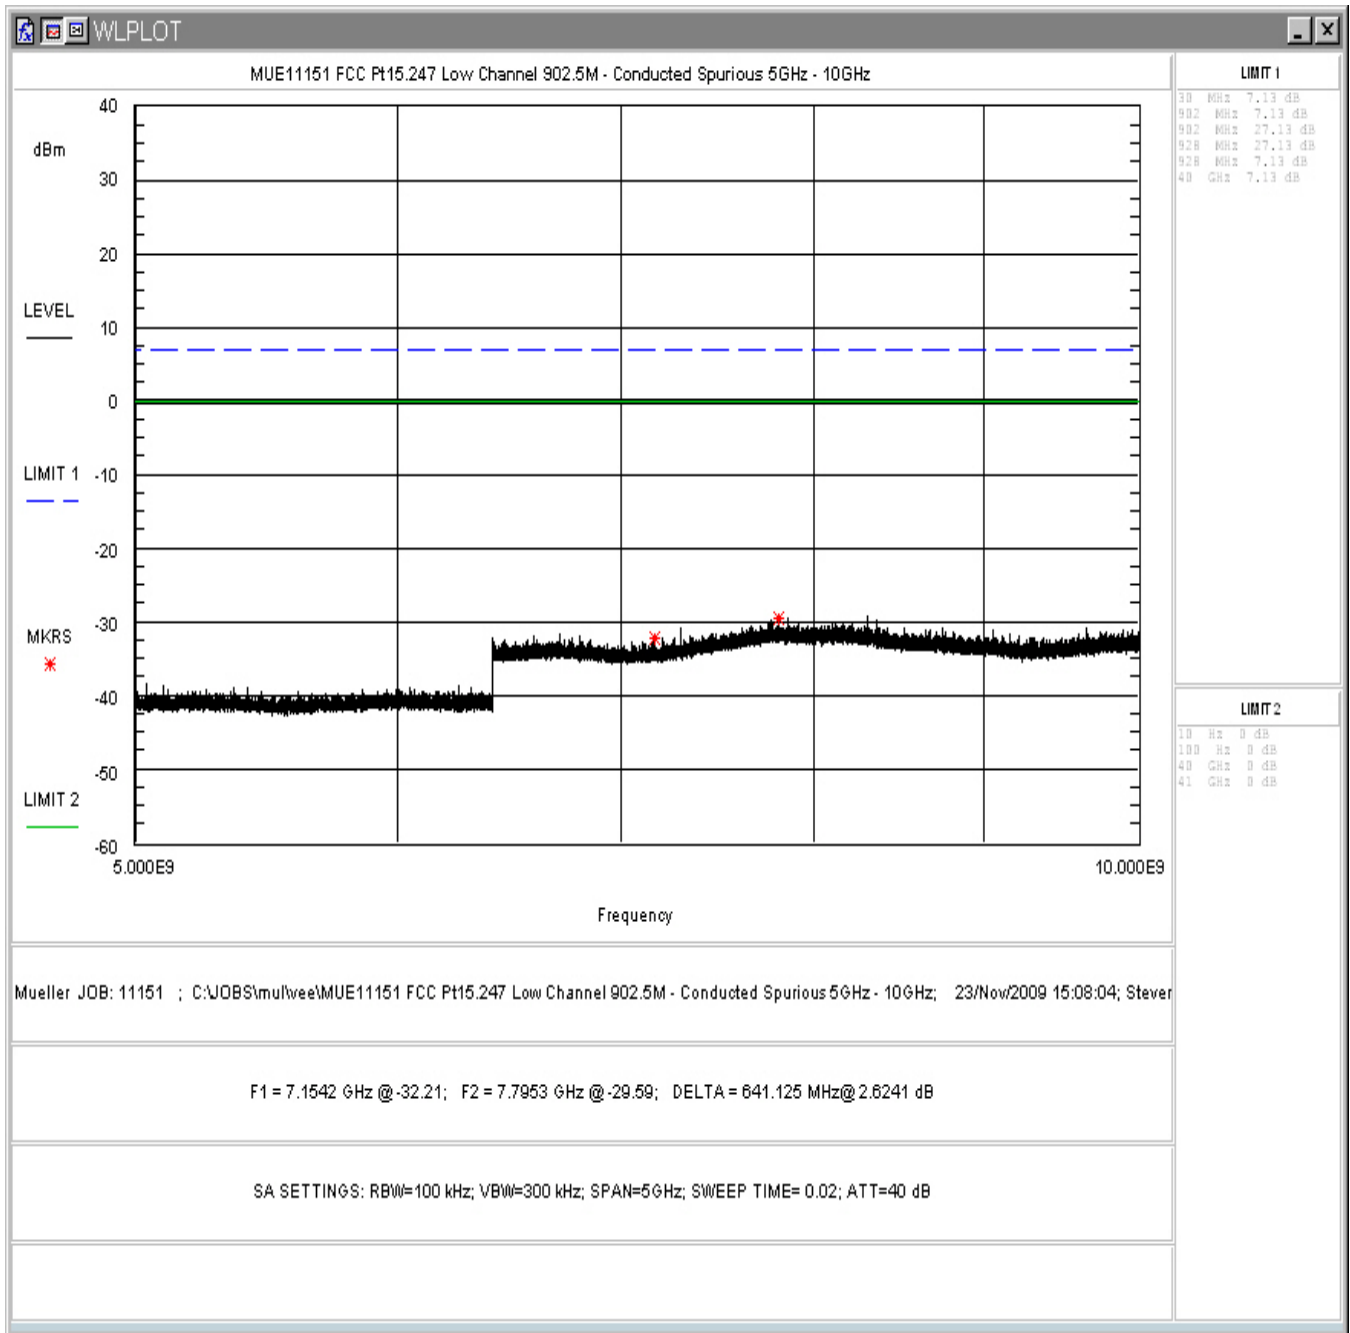


Figure 5-19. Conducted Spurious Emissions, Low Channel 5 -10GHz

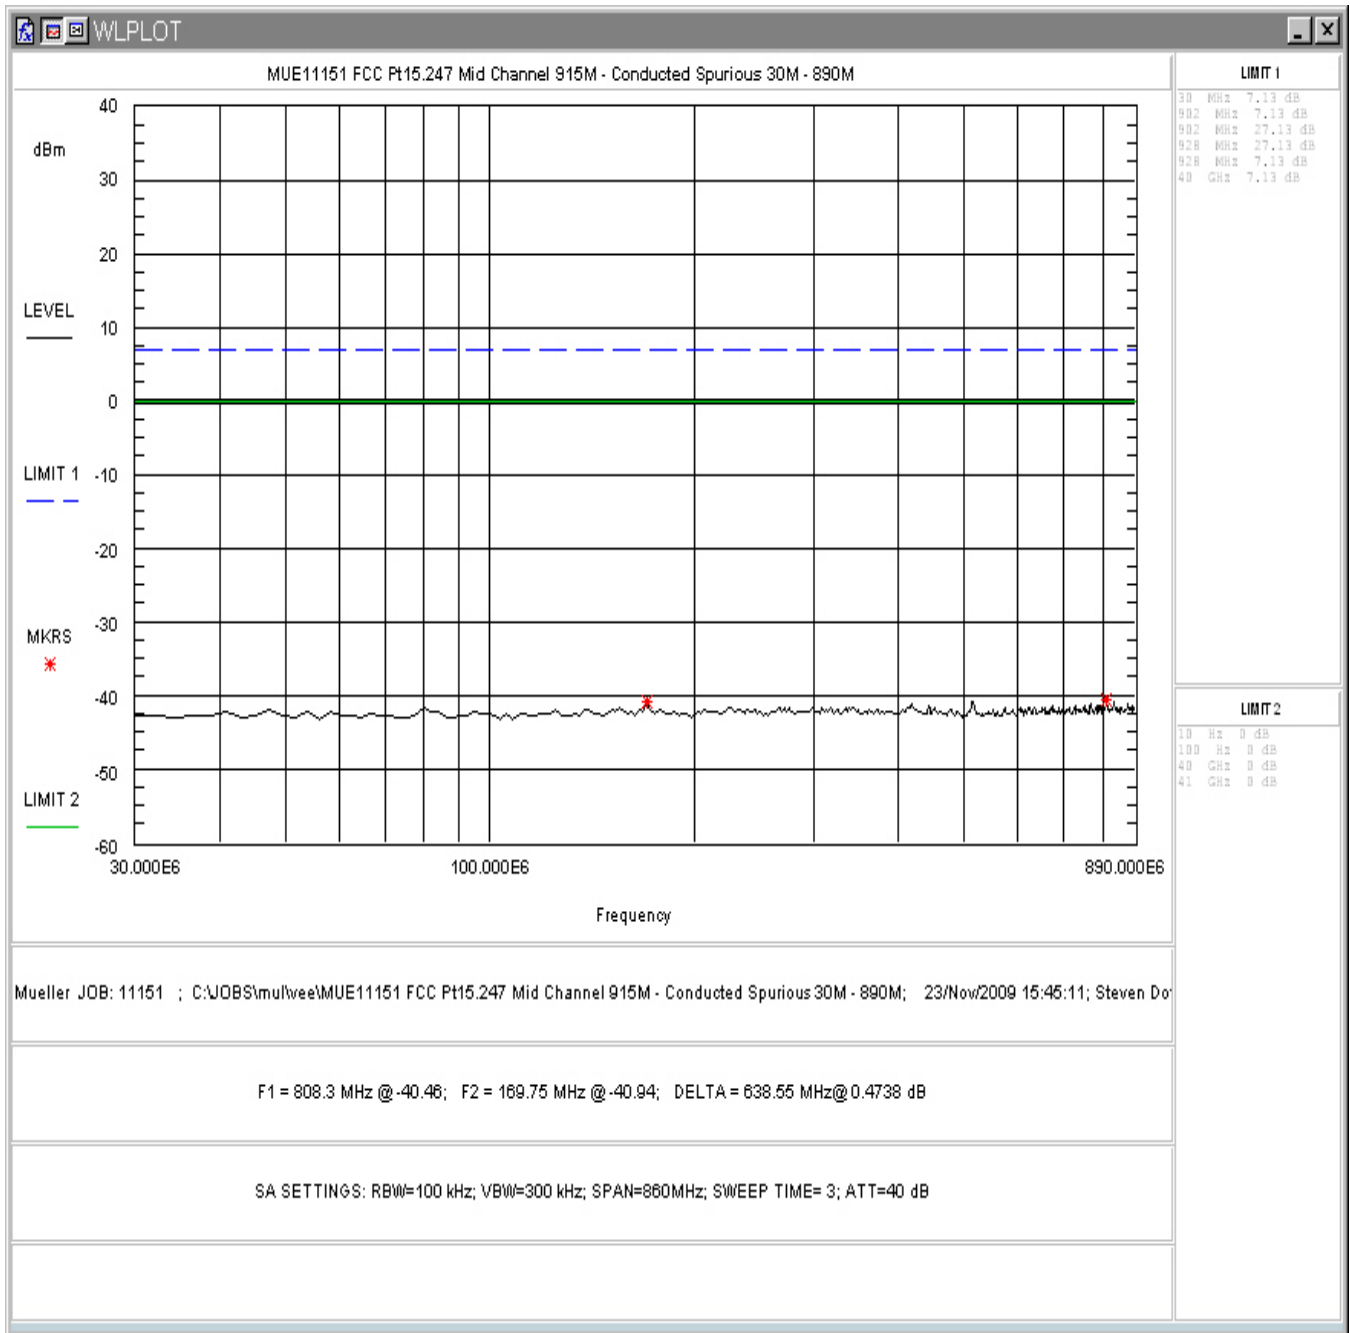


Figure 5-20. Conducted Spurious Emissions, Mid Channel 30 - 890MHz

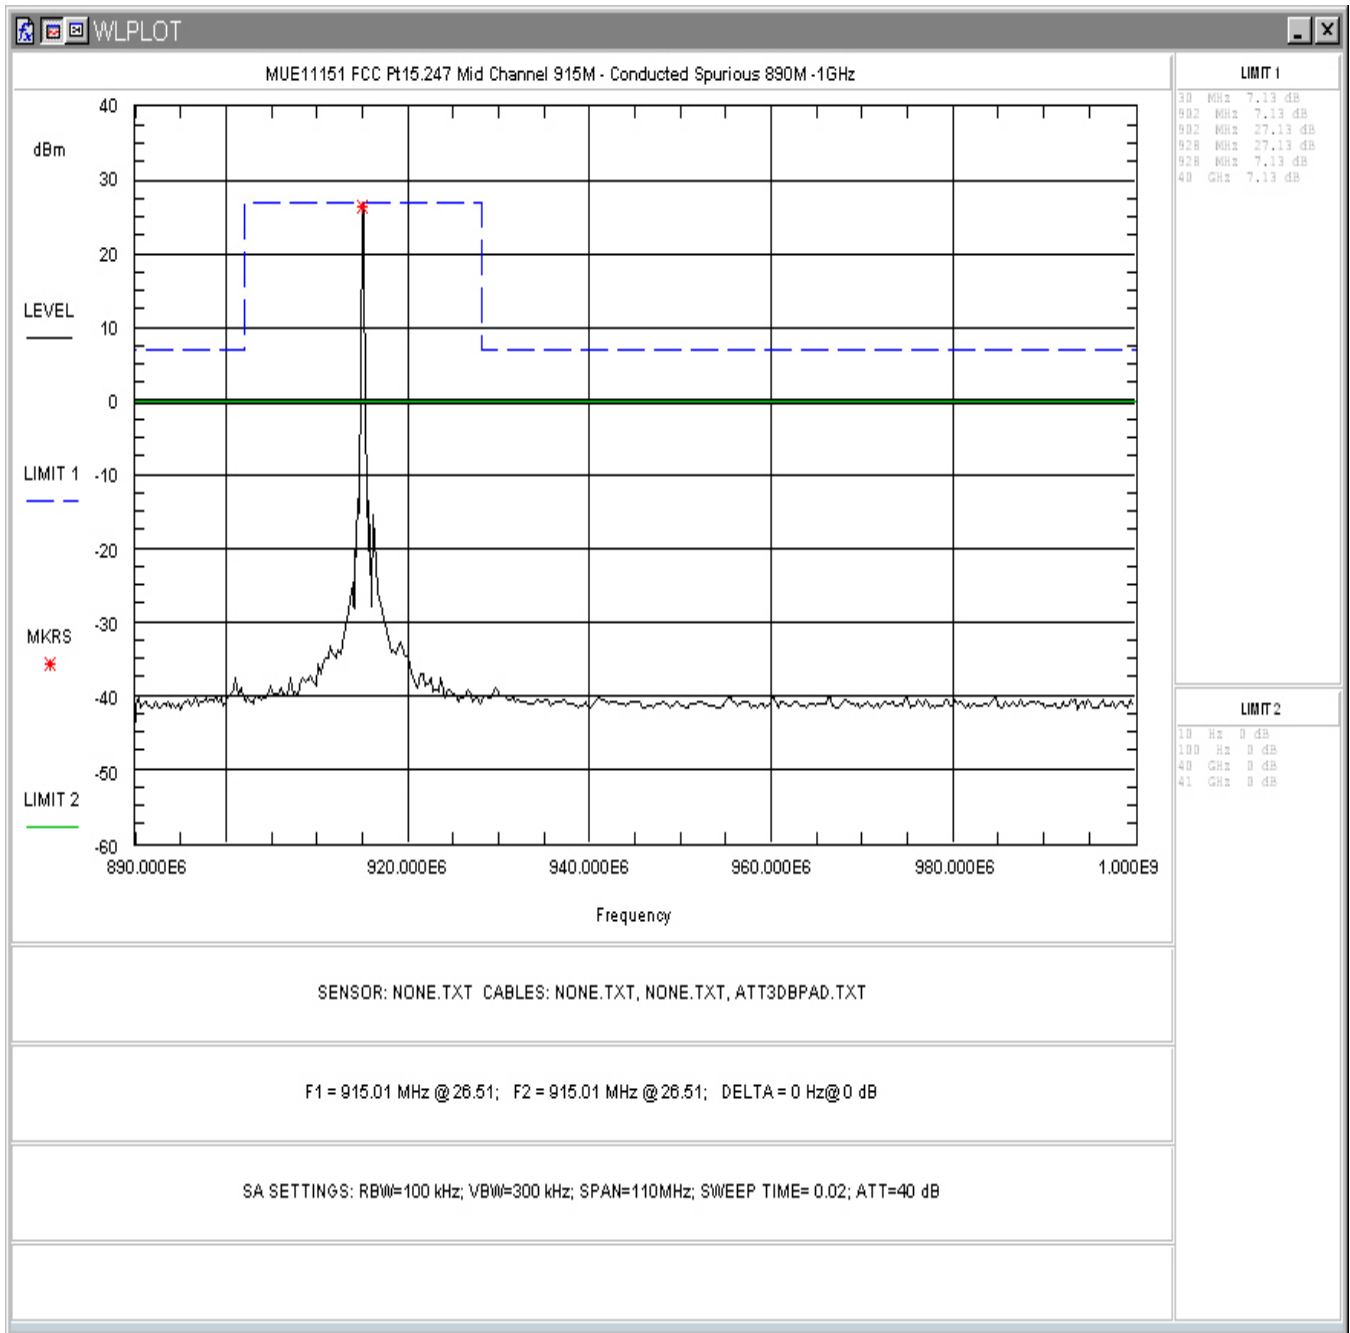


Figure 5-21. Conducted Spurious Emissions, Mid Channel 890-1000MHz

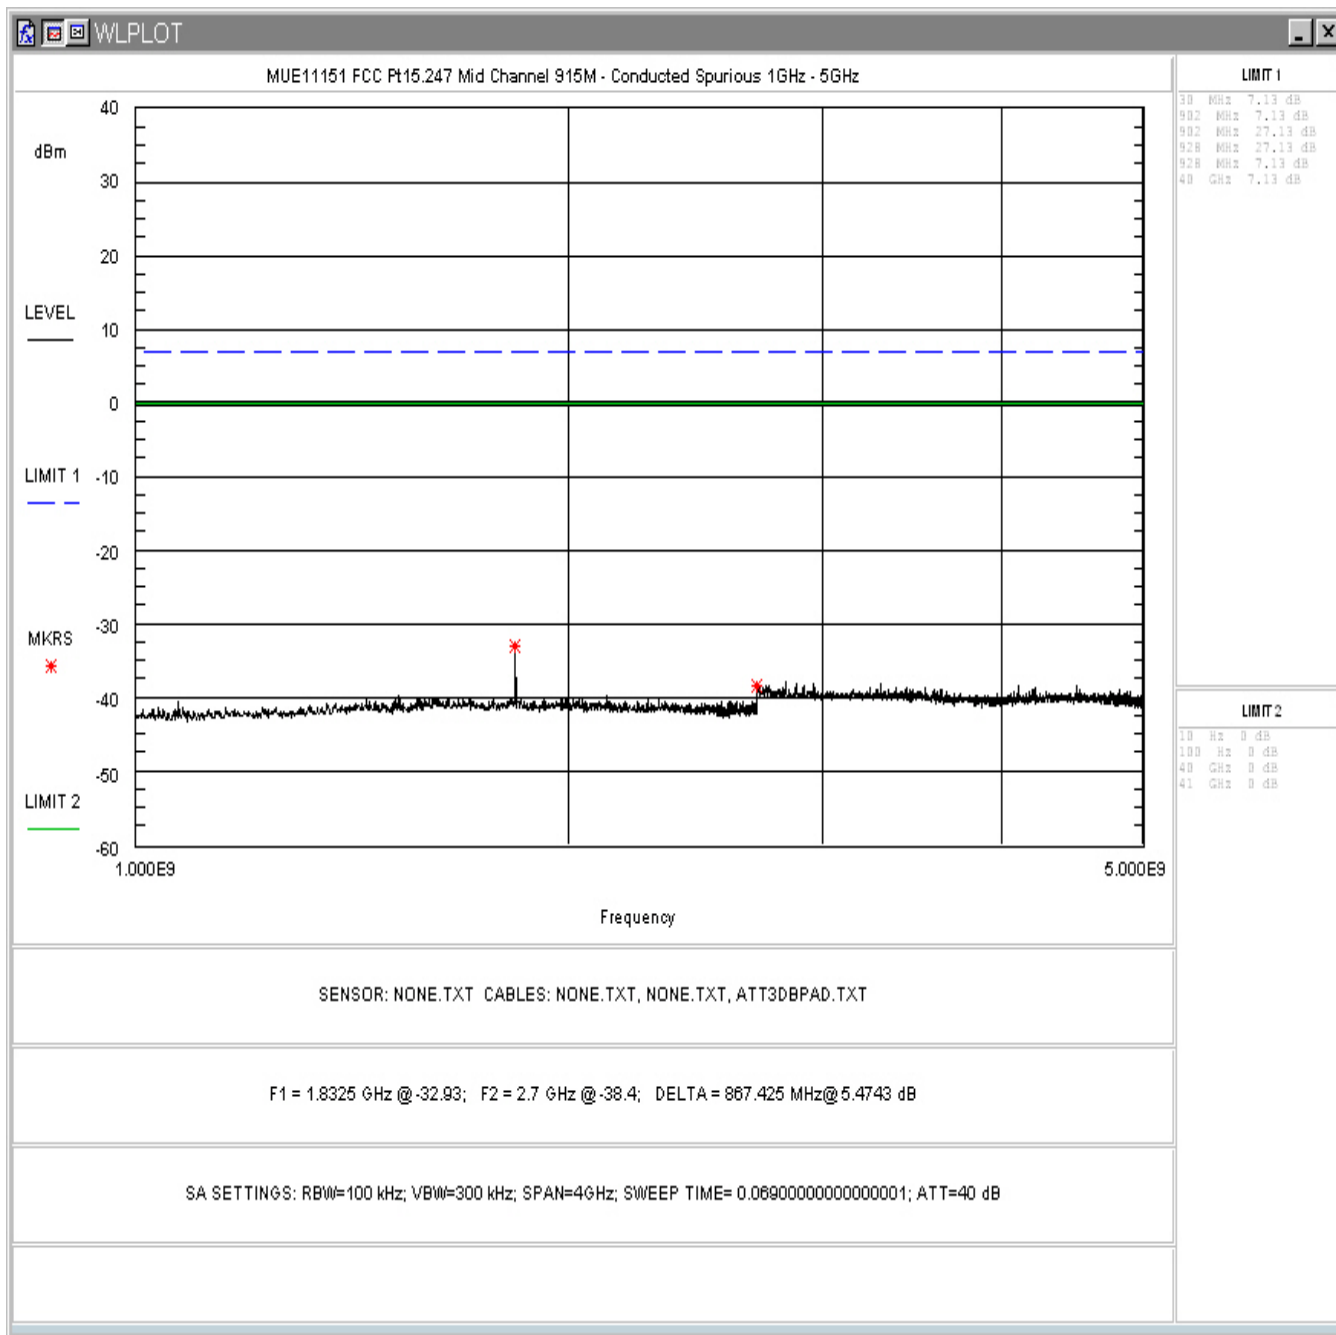


Figure 5-22. Conducted Spurious Emissions, Mid Channel 1-5GHz

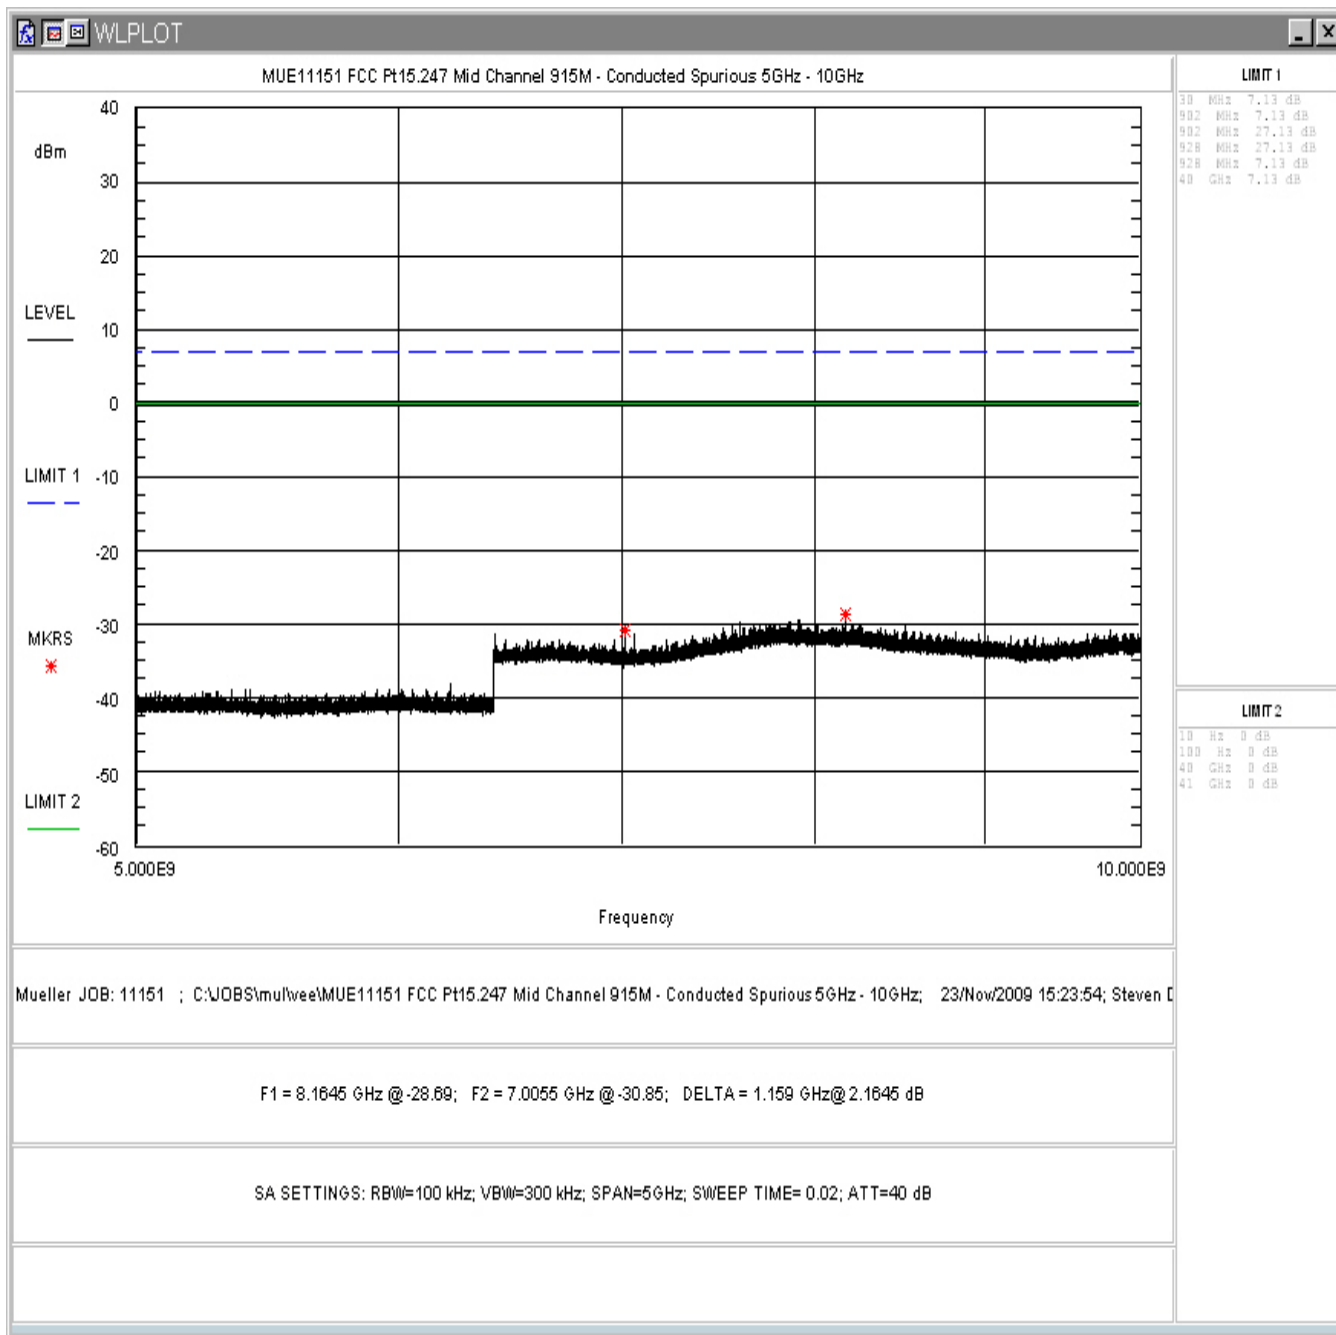


Figure 5-23. Conducted Spurious Emissions, Mid Channel 5 – 10GHz

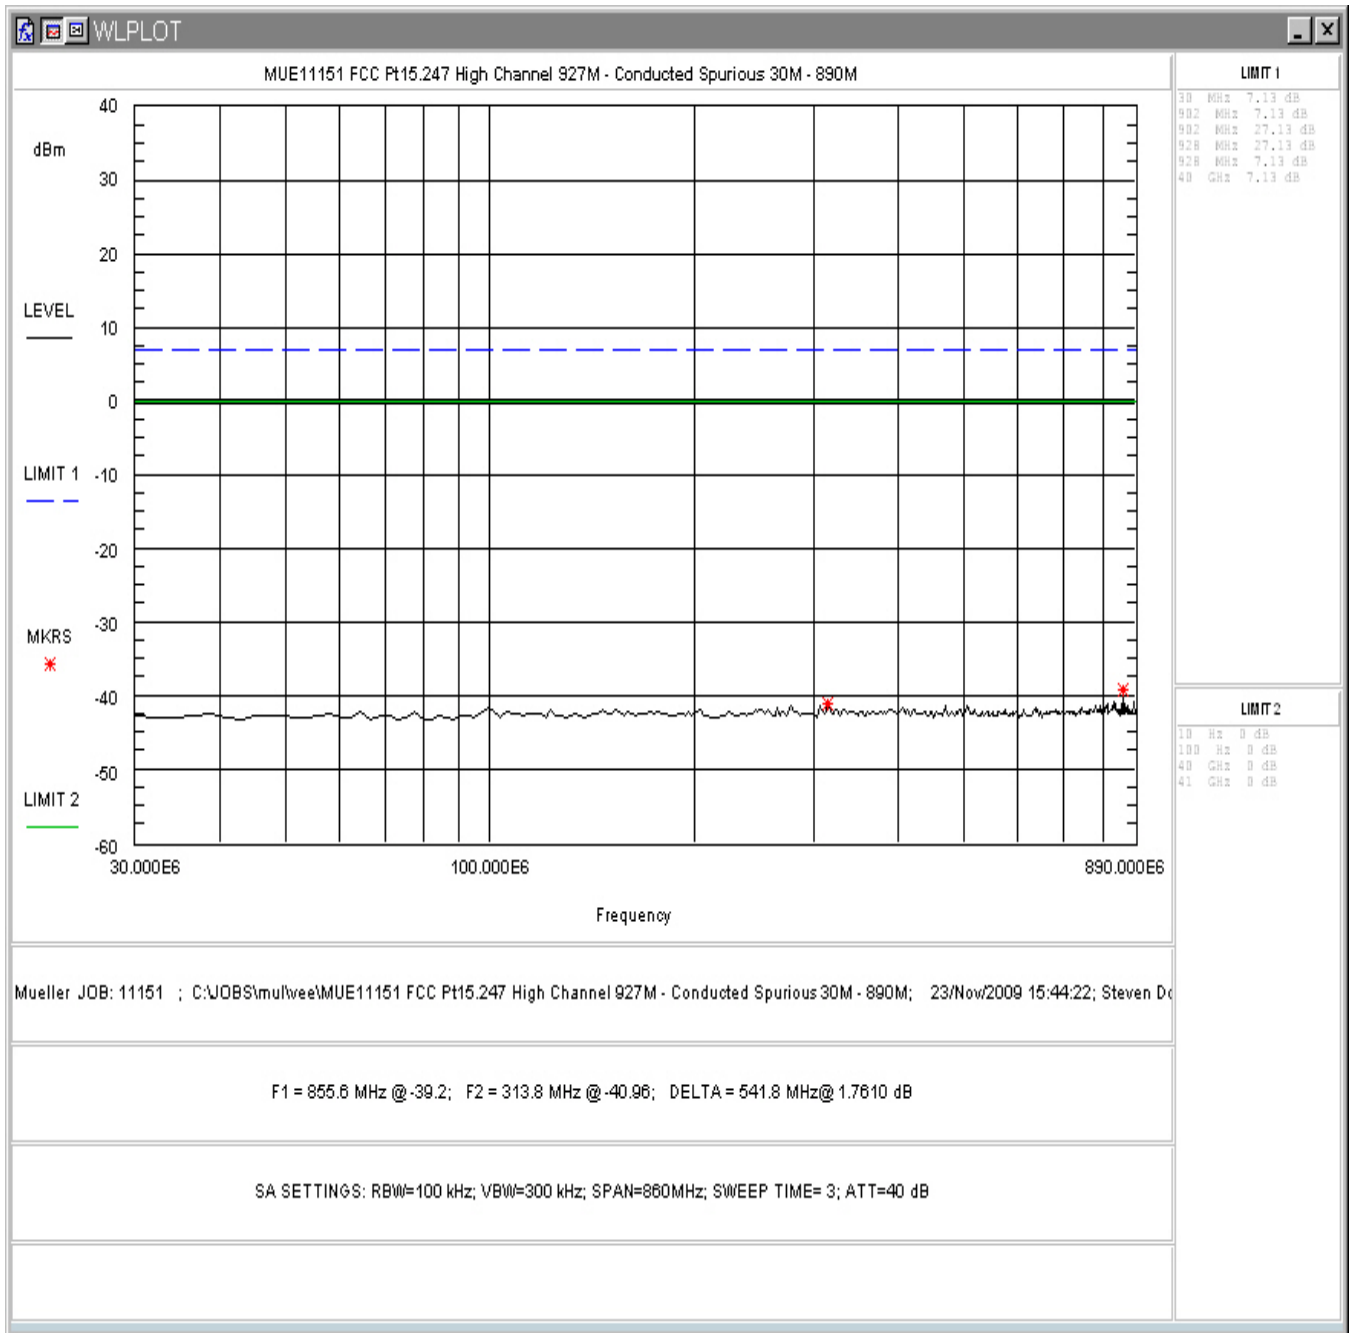


Figure 5-24. Conducted Spurious Emissions, High Channel 30 - 890MHz

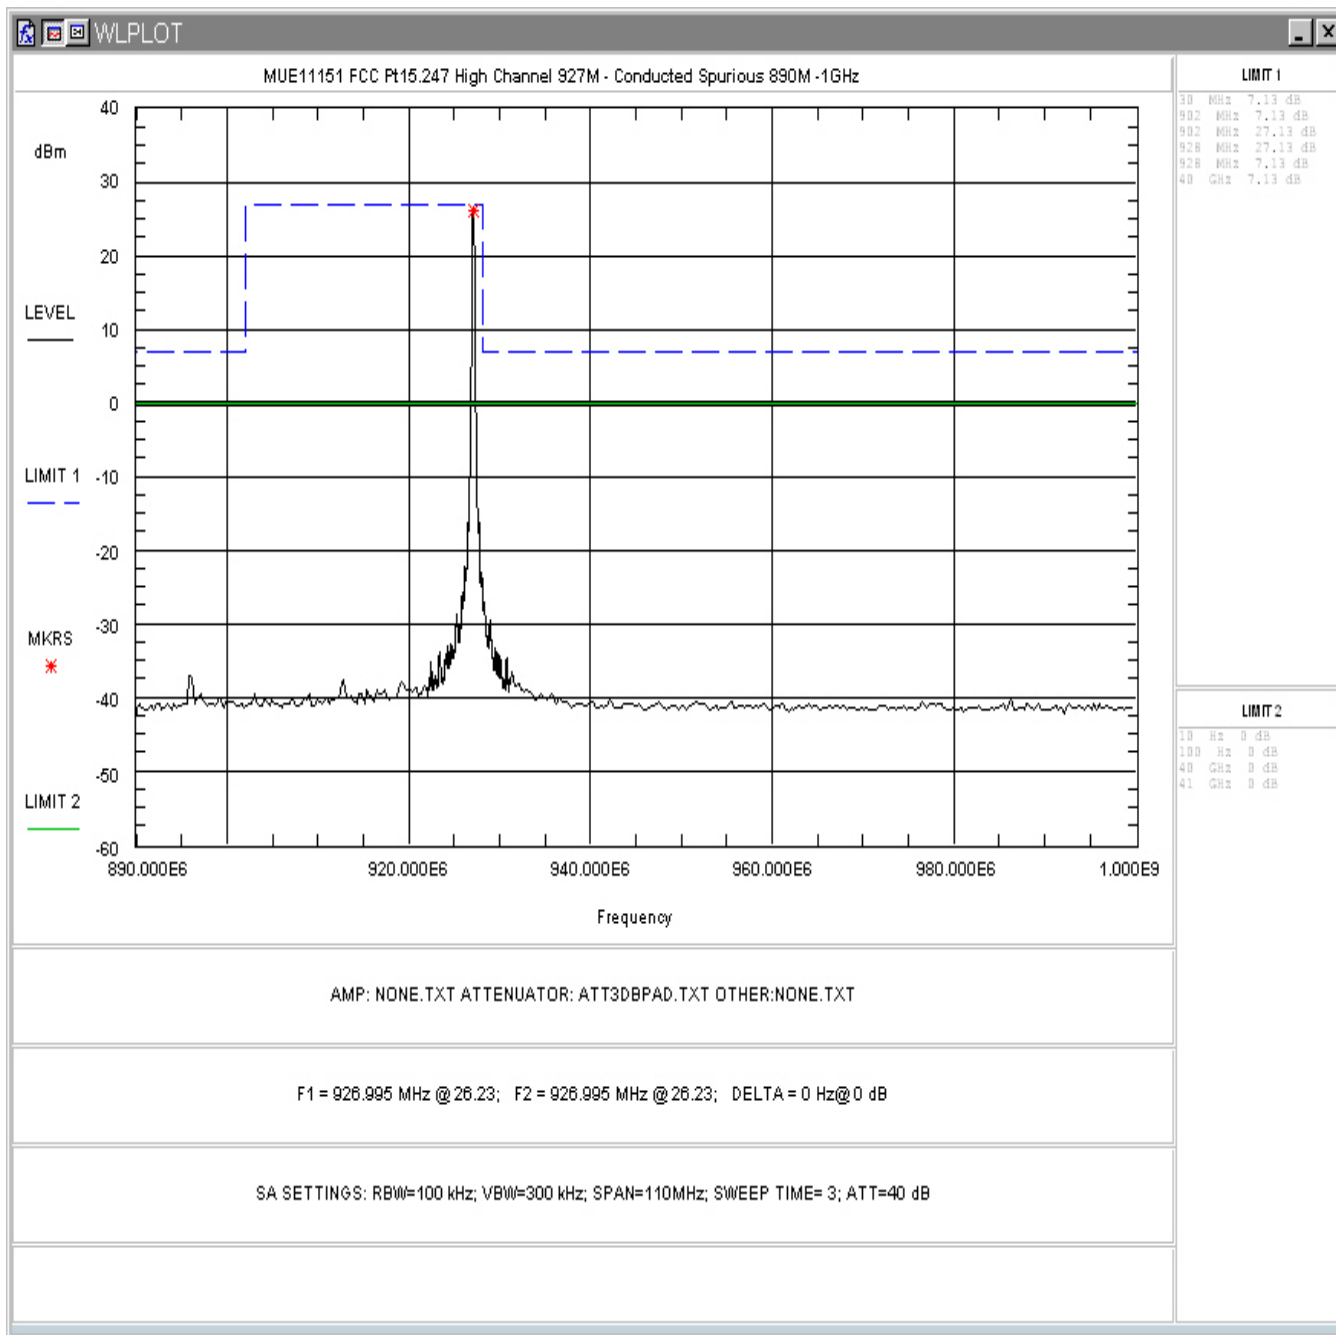


Figure 5-25. Conducted Spurious Emissions, High Channel 890-1000MHz

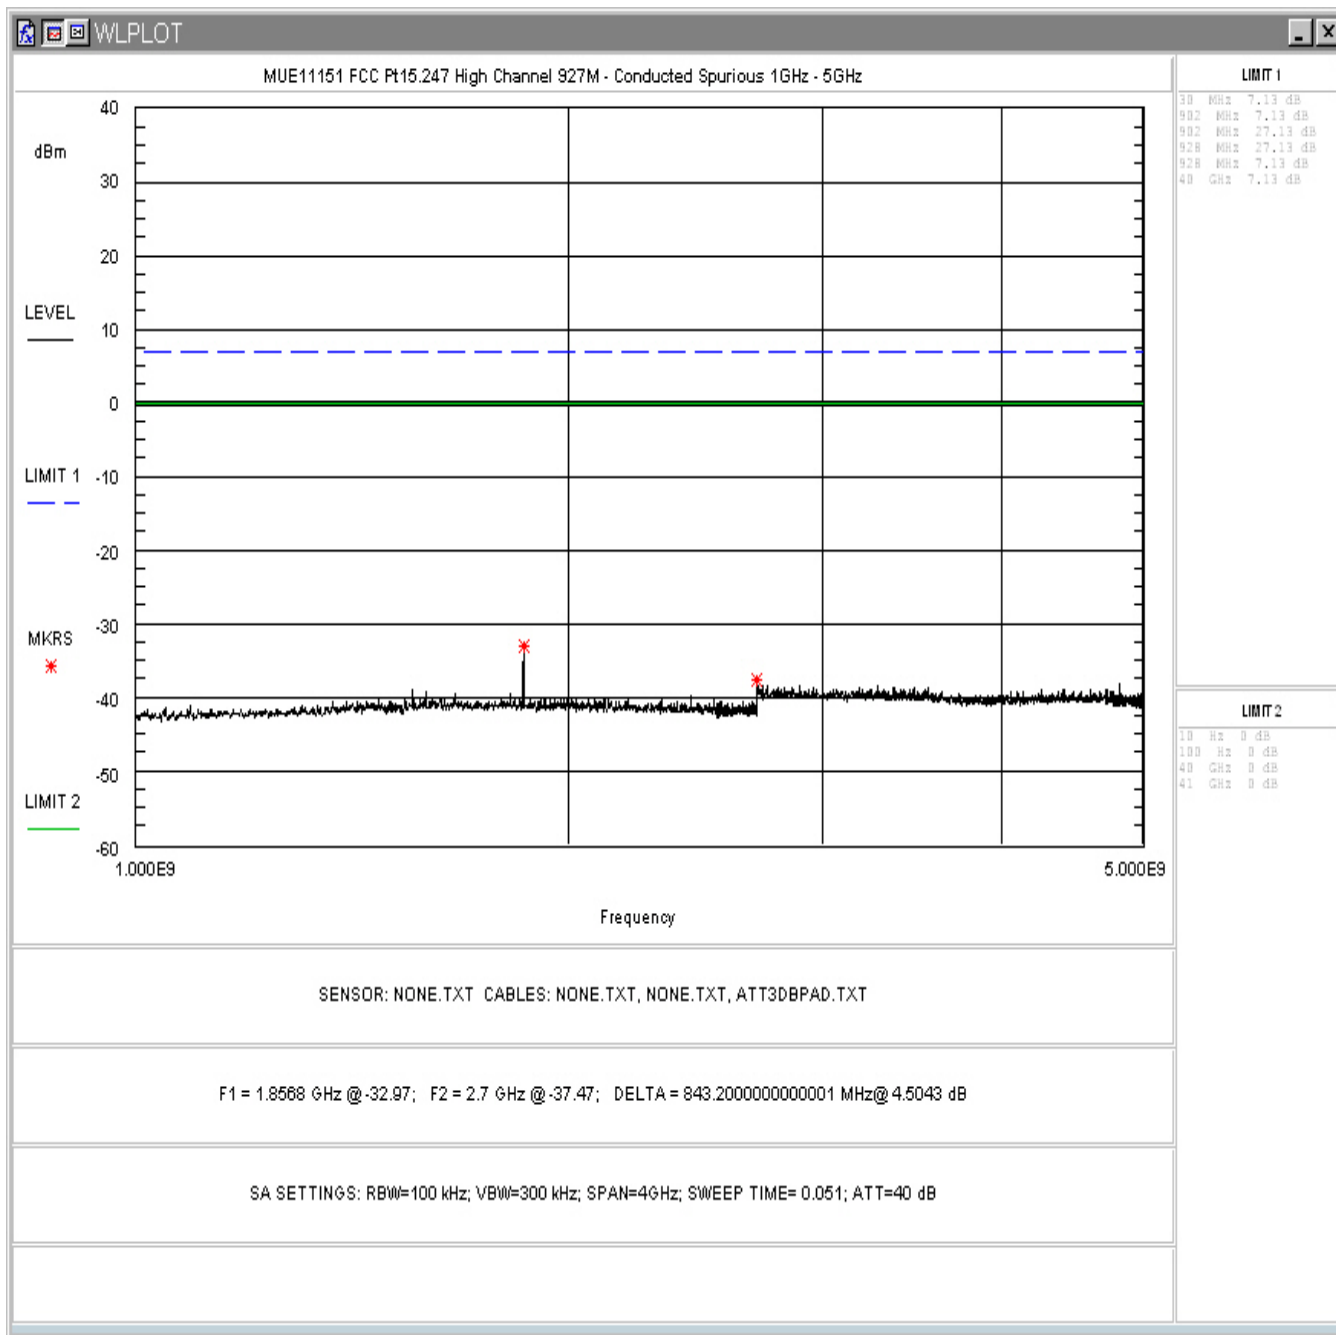


Figure 5-26. Conducted Spurious Emissions, High Channel 1-5GHz

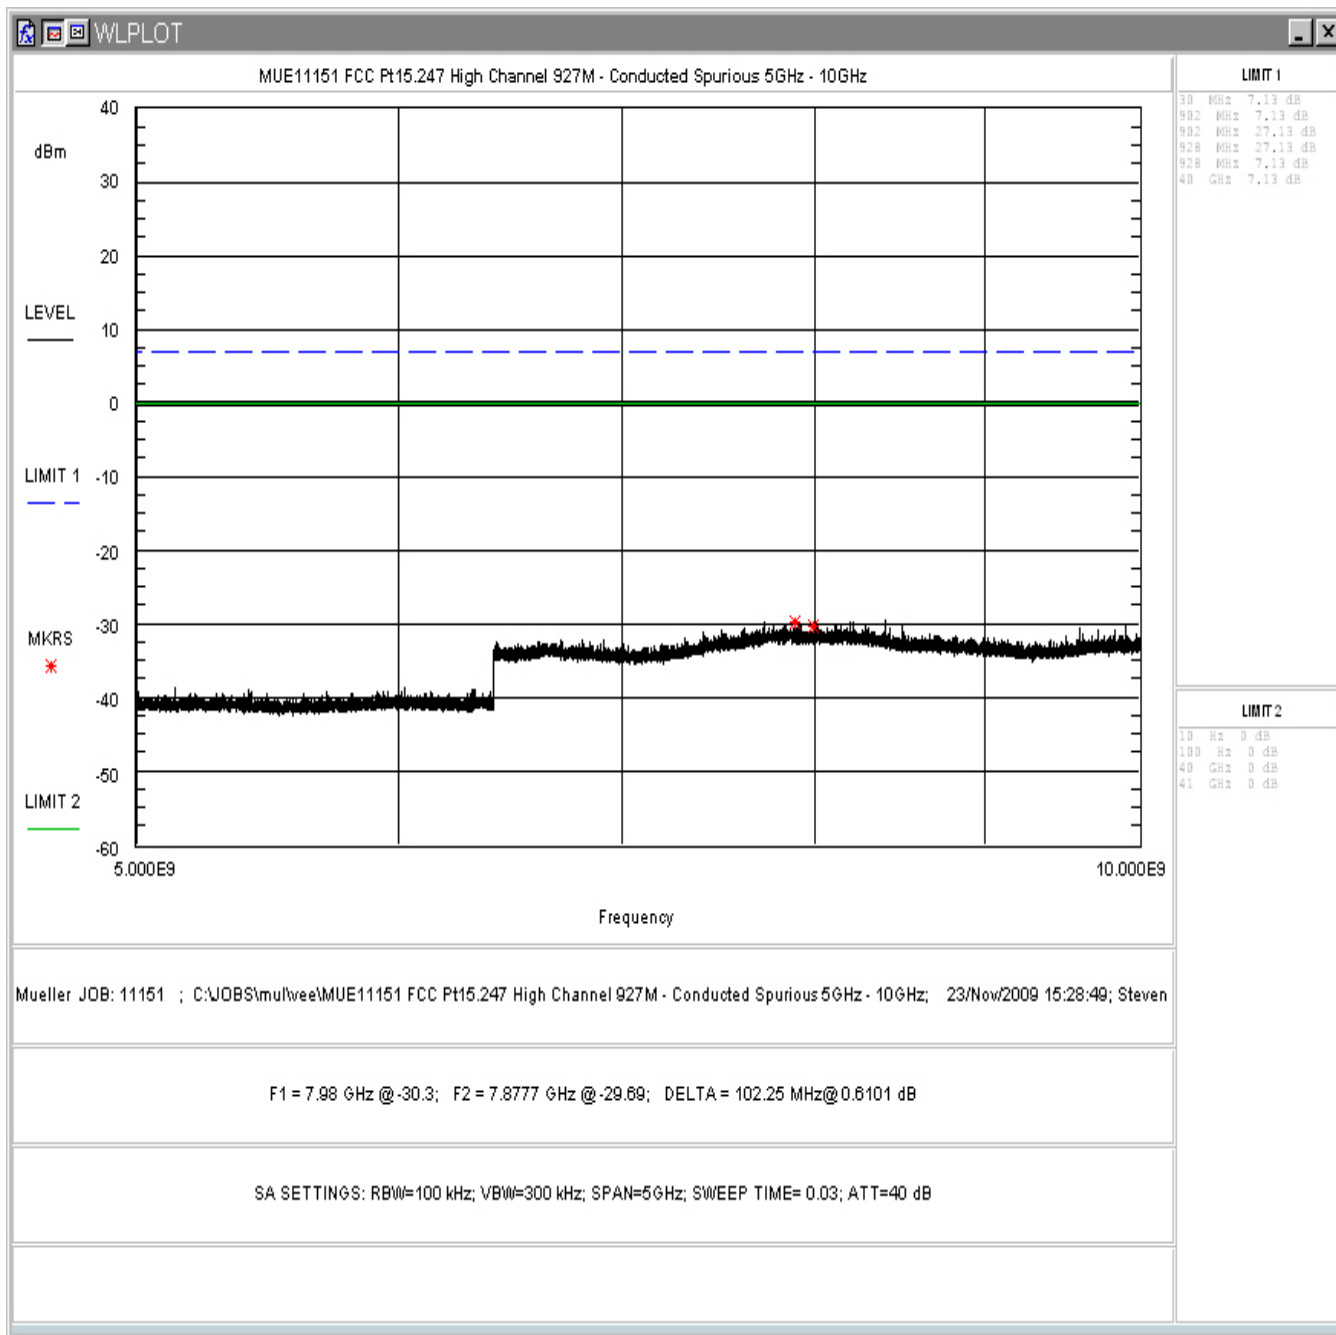


Figure 5-27. Conducted Spurious Emissions, High Channel 5-10GHz

5.6 Radiated Spurious Emissions: (FCC Part §2.1053)

The EUT must comply with the requirements for radiated spurious emissions that fall within the restricted bands. These emissions must meet the limits specified in §15.209 and §15.35(b) for peak measurements.

5.6.1 Test Procedure

The EUT was placed on a motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The EUT was tested in 3 orthogonal with the worst case readings provided. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

The emissions were measured using the following resolution bandwidths:

Frequency Range	Resolution Bandwidth	Video Bandwidth
30MHz-1000 MHz	120kHz	>100 kHz
>1000 MHz	1 MHz	10 Hz (Avg.) 1MHz (Peak)

A Duty Cycle Correction of 20dB was added to the correction factors for the Average readings for harmonic frequencies > 1GHz.

Table 8: Radiated Emission Test Data, Low Frequency Data (<1GHz)

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)
39.42	V	0.00	1.00	3.50	15.1	8.5	100.0	-21.4
47.66	V	0.00	1.00	10.80	10.1	11.1	100.0	-19.1
76.85	V	185.00	1.00	14.10	9.6	15.3	100.0	-16.3
84.16	V	180.00	1.00	18.60	9.9	26.6	100.0	-11.5
89.62	V	180.00	1.00	14.60	9.3	15.7	150.0	-19.6
114.81	V	225.00	1.00	24.20	13.2	73.7	150.0	-6.2
195.68	V	350.00	1.68	9.80	13.4	14.5	150.0	-20.3
314.53	V	270.00	1.41	11.60	16.9	26.5	200.0	-17.5
467.23	V	180.00	1.35	10.00	20.7	34.3	200.0	-15.3
614.00	V	0.00	1.00	4.20	23.2	23.5	200.0	-18.6
960.00	V	180.00	1.00	16.00	28.5	167.9	500.0	-9.5
55.16	H	180.00	4.00	9.00	7.7	6.8	100.0	-23.3
82.28	H	0.00	4.00	22.60	9.8	41.9	100.0	-7.6
89.60	H	5.00	4.00	23.00	9.3	41.4	150.0	-11.2
110.33	H	90.00	4.00	18.80	12.7	37.5	150.0	-12.0
195.64	H	95.00	3.00	5.30	13.4	8.6	150.0	-24.8
314.52	H	90.00	3.12	11.50	16.9	26.2	200.0	-17.6
469.05	H	180.00	2.82	11.90	20.8	43.2	200.0	-13.3
614.00	H	0.00	1.00	4.00	23.2	23.5	200.0	-18.8
960.00	V	180.00	1.00	16.00	28.5	167.9	500.0	-9.5

**Table 9: Radiated Emission Test Data, High Frequency Data (>1GHz)
(Restricted Bands)**

Low Channel-902.5MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2707.50	V	350.00	2.30	47.30	-4.0	145.7	5000.0	-30.7	Peak
3610.00	V	0.00	2.30	46.30	-2.9	147.4	5000.0	-30.6	Peak
4512.50	V	180.00	2.30	43.00	-2.1	110.9	5000.0	-33.1	Peak
5415.00	V	180.00	2.30	39.00	0.8	97.2	5000.0	-34.2	Peak
8122.50	V	185.00	2.30	44.50	3.4	249.7	5000.0	-26.0	Peak
9025.00	V	180.00	2.30	45.00	5.3	326.2	5000.0	-23.7	Peak
2707.50	V	350.00	2.30	42.30	-24.0	8.2	500.0	-35.7	Average
3610.00	V	0.00	2.30	36.30	-22.9	4.7	500.0	-40.6	Average
4512.50	V	180.00	2.30	35.30	-22.1	4.6	500.0	-40.8	Average
5415.00	V	180.00	2.30	27.80	-19.2	2.7	500.0	-45.4	Average
8122.50	V	185.00	2.30	32.50	-16.6	6.3	500.0	-38.0	Average
9025.00	V	180.00	2.30	32.00	-14.7	7.3	500.0	-36.7	Average
2707.50	H	185.00	1.75	52.00	-4.0	250.3	5000.0	-26.0	Peak
3610.00	H	175.00	1.75	43.60	-2.9	108.1	5000.0	-33.3	Peak
4512.50	H	170.00	1.75	44.00	-2.1	124.4	5000.0	-32.1	Peak
5415.00	H	0.00	1.75	37.20	0.8	79.0	5000.0	-36.0	Peak
8122.50	H	120.00	1.75	44.00	3.4	235.8	5000.0	-26.5	Peak
9025.00	H	0.00	1.75	41.00	5.3	205.8	5000.0	-27.7	Peak
2707.50	H	185.00	1.75	50.30	-24.0	20.6	500.0	-27.7	Average
3610.00	H	175.00	1.75	39.50	-22.9	6.7	500.0	-37.4	Average
4512.50	H	170.00	1.75	40.20	-22.1	8.0	500.0	-35.9	Average
5415.00	H	0.00	1.75	28.30	-19.2	2.8	500.0	-44.9	Average
8122.50	H	120.00	1.75	36.30	-16.6	9.7	500.0	-34.2	Average
9025.00	H	0.00	1.75	32.30	-14.7	7.6	500.0	-36.4	Average

Center Channel – 915MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2745.00	V	130.00	2.00	55.00	-4.1	349.9	5000.0	-23.1	Peak
3660.00	V	180.00	1.93	42.00	-3.0	89.3	5000.0	-35.0	Peak
4575.00	V	190.00	1.93	46.60	-2.0	169.8	5000.0	-29.4	Peak
7320.00	V	195.00	1.90	41.20	3.8	177.0	5000.0	-29.0	Peak
8235.00	V	200.00	1.90	46.00	3.5	300.2	5000.0	-24.4	Peak
9150.00	V	180.00	1.90	41.00	4.8	195.5	5000.0	-28.2	Peak
2745.00	V	130.00	2.00	54.30	-24.1	32.3	500.0	-23.8	Average
3660.00	V	180.00	1.93	35.50	-23.0	4.2	500.0	-41.5	Average
4575.00	V	190.00	1.93	43.80	-22.0	12.3	500.0	-32.2	Average
7320.00	V	195.00	1.90	32.00	-16.2	6.1	500.0	-38.2	Average
8235.00	V	200.00	1.90	40.20	-16.5	15.4	500.0	-30.2	Average
9150.00	V	180.00	1.90	31.70	-15.2	6.7	500.0	-37.5	Average
2745.00	H	200.00	1.68	54.00	-4.1	311.8	5000.0	-24.1	Peak
3660.00	H	190.00	1.68	42.30	-3.0	92.4	5000.0	-34.7	Peak
4575.00	H	190.00	1.68	44.80	-2.0	138.0	5000.0	-31.2	Peak
7320.00	H	185.00	1.57	43.00	3.8	217.8	5000.0	-27.2	Peak
8235.00	H	180.00	1.57	47.00	3.5	336.9	5000.0	-23.4	Peak
9150.00	H	180.00	1.57	41.00	4.8	195.5	5000.0	-28.2	Peak
2745.00	H	200.00	1.68	53.20	-24.1	28.4	500.0	-24.9	Average
3660.00	H	190.00	1.68	36.20	-23.0	4.6	500.0	-40.8	Average
4575.00	H	190.00	1.68	42.00	-22.0	10.0	500.0	-34.0	Average
7320.00	H	185.00	1.57	36.20	-16.2	10.0	500.0	-34.0	Average
8235.00	H	180.00	1.57	42.30	-16.5	19.6	500.0	-28.1	Average
9150.00	H	180.00	1.57	31.80	-15.2	6.8	500.0	-37.4	Average

High Channel-927MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2781.00	V	200.00	1.90	57.50	-4.2	462.0	5000.0	-20.7	Peak
3708.00	V	195.00	1.77	42.20	-3.0	90.7	5000.0	-34.8	Peak
4635.00	V	190.00	1.80	45.00	-1.8	145.3	5000.0	-30.7	Peak
7416.00	V	180.00	1.80	40.00	3.7	152.4	5000.0	-30.3	Peak
8343.00	V	190.00	1.80	44.50	3.6	255.0	5000.0	-25.8	Peak
2781.00	V	200.00	1.90	57.20	-24.2	44.6	500.0	-21.0	Average
3708.00	V	195.00	1.77	35.80	-23.0	4.3	500.0	-41.2	Average
4635.00	V	190.00	1.80	41.70	-21.8	9.9	500.0	-34.0	Average
7416.00	V	180.00	1.80	31.00	-16.3	5.4	500.0	-39.3	Average
8343.00	V	190.00	1.80	36.20	-16.4	9.8	500.0	-34.1	Average
2781.00	H	175.00	2.00	50.30	-4.2	201.7	5000.0	-27.9	Peak
3708.00	H	180.00	2.00	43.00	-3.0	99.5	5000.0	-34.0	Peak
4635.00	H	180.00	2.00	47.00	-1.8	182.9	5000.0	-28.7	Peak
7416.00	H	185.00	1.90	43.50	3.7	228.1	5000.0	-26.8	Peak
8343.00	H	200.00	1.87	50.50	3.6	508.8	5000.0	-19.8	Peak
2781.00	H	175.00	2.00	48.20	-24.2	15.8	500.0	-30.0	Average
3708.00	H	180.00	2.00	36.20	-23.0	4.5	500.0	-40.8	Average
4635.00	H	180.00	2.00	43.50	-21.8	12.2	500.0	-32.2	Average
7416.00	H	185.00	1.90	36.80	-16.3	10.5	500.0	-33.5	Average
8343.00	H	200.00	1.87	47.80	-16.4	37.3	500.0	-22.5	Average

5.7 AC Conducted Emissions (FCC Pt.15.207)

5.7.1 Requirements

Test Arrangement: Table Top

Compliance Standard: FCC Class B

FCC Compliance Limits		
Frequency	Quasi-peak	Average
0.15 - 0.5MHz	66 to 56dB μ V	56 to 46dB μ V
0.5 - 5MHz	56dB μ V	46dB μ V
5 - 30MHz	60dB μ V	50dB μ V

5.7.2 Test Procedure

The EUT was placed on an 80 cm high 1 X 1.5 m non-conductive table above a ground plane. Power to the EUT was provided through a Solar Corporation 50 Ω /50 μ H Line Impedance Stabilization Network bonded to a 3 X 2 meter ground plane. The LISN has its AC input supplied from a filtered AC power source. Power was supplied to the peripherals through a second LISN. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Power and data cables were moved about to obtain maximum emissions.

The 50 Ω output of the LISN was connected to the input of the spectrum analyzer and the emissions in the frequency range of 150 kHz to 30 MHz were measured. The detector function was set to quasi-peak, peak, or average as appropriate, and the resolution bandwidth during testing was at least 9 kHz, with all post-detector filtering no less than 10 times the resolution bandwidth. For average measurements the post-detector filter was set to 10 Hz.

At frequencies where quasi-peak or peak measurements comply with the average limit, no average measurements need be performed. The Conducted emissions level to be compared to the FCC limit is calculated as shown in the following example.

Example:

Spectrum Analyzer Voltage: VdB μ V

LISN Correction Factor: LISN dB

Cable Correction Factor: CF dB

Electric Field: EdB μ V = V dB μ V + LISN dB + CF dB

5.7.3 Test Data

The EUT complied with the Class B Conducted Emissions requirements. Table 10 provides the test results for phase and neutral line power line conducted emissions.

Table 10: Conducted Emissions Data, Transmit On 120VAC

NEUTRAL

Frequency (MHz)	Level QP (dBµV)	Level AVG (dBµV)	Cable Loss (dB)	LISN Corr (dB)	Level QP Corr (dBµV)	Level Corr Avg (dBµV)	Limit QP (dBµV)	Limit AVG (dBµV)	Margin QP (dB)	Margin AVG (dB)
0.169	32.3	32.3	10.1	0.6	43.1	43.1	65.0	55.0	-22.0	-12.0
0.329	28.5	28.5	10.2	0.7	39.5	39.5	59.5	49.5	-20.0	-10.0
1.309	26.2	26.2	10.5	0.3	37.0	37.0	56.0	46.0	-19.0	-9.0
6.240	11.7	11.7	11.2	0.4	23.3	23.3	60.0	50.0	-36.7	-26.7
19.050	10.8	10.8	12.0	0.8	23.6	23.6	60.0	50.0	-36.4	-26.4
29.400	17.3	17.3	12.7	0.4	30.4	30.4	60.0	50.0	-29.6	-19.6

PHASE

Frequency (MHz)	Level QP (dBµV)	Level AVG (dBµV)	Cable Loss (dB)	LISN Corr (dB)	Level QP Corr (dBµV)	Level Corr Avg (dBµV)	Limit QP (dBµV)	Limit AVG (dBµV)	Margin QP (dB)	Margin AVG (dB)
0.155	32.4	32.4	10.1	0.3	42.8	42.8	65.7	55.7	-22.9	-12.9
0.509	24.7	24.7	10.3	0.4	35.4	35.4	56.0	46.0	-20.6	-10.6
1.314	25.5	25.5	10.5	0.4	36.3	36.3	56.0	46.0	-19.7	-9.7
5.670	10.6	10.6	11.1	0.5	22.2	22.2	60.0	50.0	-37.8	-27.8
13.820	10.4	10.4	11.7	0.6	22.8	22.8	60.0	50.0	-37.2	-27.2
29.640	11.9	11.9	12.7	0.5	25.1	25.1	60.0	50.0	-34.9	-24.9