



Product Service

## EMC TEST REPORT

Report Number : **68/760.9.099.01** Date of Issue: 22 Jun 2009

Model : **PC-81006N**

Product Type : Notebook

Applicant : Wanlida Group Co., Ltd.

Address : No. 618 Jiahe Road, Wanlida Industry Zone,  
Xiamen Fujian, China 361006

Production Facility : Wanlida Group Co., Ltd.

Address : Wanlida Industry Zone, Nanjing, Fujian, China 363601

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including  
Appendices : 17

*Jiangsu TÜV Product Service Ltd. – Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.*

*Jiangsu TÜV Product Service Ltd. – Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. Jiangsu TÜV Product Service Ltd. – Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from Jiangsu TÜV Product Service Ltd. – Shenzhen Branch issued reports.*

*This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval*



## 1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards.....	5
5	Summary of Test Results.....	6
6	General Remarks.....	7
7	Technical Requirements.....	8
7.1	Conducted Emission AC Power Port.....	8
7.2	Radiated emissions.....	12



Product Service

## 2 Details about the Test Laboratory

### Details about the Test Laboratory

Company name: Jiangsu TÜV Product Service Ltd. – Shenzhen Branch  
6th Floor, H Hall,  
Century Craftwork Culture Square,  
No. 4001, Fuqiang Road,  
Futian District 518048,  
Shenzhen, P.R.C.

Telephone: 86 755 8828 6998  
Fax: 86 755 8828 5299

Company name: China Shenzhen Academy of Metrology and Quality Inspection,  
Metrology and Quality Inspection building,  
Central Section of LongZhu Road,  
Nan Shan,  
Shenzhen,

Telephone: 86 755 2694 1599  
Fax: 86 755 2694 1545

### 3 Description of the Equipment Under Test

#### Description of the Equipment Under Test

Product: Notebook

Model no.: PC-81006N

Serial number: NIL

Options and accessories: NIL

Rating: DC 12V 3A, 36W  
AC Adaptor:  
Model: MPA-12030  
Input: 100-240V ~ 50/60Hz 1A MAX  
Output: +12V DC 3A

Antenna: Integral antenna inside enclosure of EUT, NOT accessible by end user

RF Transmission Frequency: 2400-2483.5MHz

Description of the EUT: NIL

#### Auxiliary Equipment and Cable Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
LCD monitor	Lenovo	9227-AE1	V1TDB38
Keyboard	Lenovo	SK-8825 (L)	02553778
Mouse	Lenovo	MO28UOL	4418011108
Headphone	Ouyun	OH601	----
USB flash drive	Kingston	Data Traveller	----
SD card	Kingston	SD4/4GBFE	----
VGA cable	Lenovo	Shield	140cm
AC Power cable	Lenovo	Unshield	180cm



Product Service

## 4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart B	PART 15 - RADIO FREQUENCY DEVICES Subpart B - Unintentional Radiators



Product Service

## 5 Summary of Test Results

Technical Requirements				
FCC Part 15 Subpart B				
Test Condition	Pages	Test Result		
		Pass	Fail	N/A
15.107 Conducted Emission AC Power Port	8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15.109 Spurious radiated emissions	12	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>



Product Service

## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: SMFPC81006N filing to comply with Section 15.107, 15.109 of the FCC Part 15, Subpart B Rules.

The product [PC-81006N] uses 2 provided hard disks: Model WD2500BEVT-22ZCT0 and Model MHZ2160BH G2. Full test was applied on PC-81006N with hard disk WD2500BEVT-22ZCT0, additional test Radiated Emission was applied on PC-81006N with hard disk MHZ2160BH G2, and it is deemed to fulfill relevant EMC requirement without further testing.

### SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: Jun 10 2009

Testing Start Date: Jun 11 2009

Testing End Date: Jun 20 2009

- Jiangsu TÜV Product Service Ltd. – Shenzhen Branch -

Reviewed by:

Prepared by:

Paul Yu  
EMC Project Manager

Ken Li  
EMC Test Engineer

## 7 Technical Requirement

### 7.1 Conducted Emission

#### Test Method

- 1 The EUT was placed on a table, which is 0.8m above ground plane
- 2 The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
- 3 Maximum procedure was performed to ensure EUT compliance
- 4 A EMI test receiver (R&S Test Receiver ESCS30) is used to test the emissions from both sides of AC line

#### Test Mode

##### Run Test Program

-The test program BIT.exe exercises all the drive and ports of the EUT, and displaying scrolling H on the screen.

#### Limit

Frequency MHz	QP Limit dB $\mu$ V	AV Limit dB $\mu$ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency




## Conducted Emission

Test with Hard disk WD2500BEVT-22ZCT0:

### Conducted Disturbance

EUT: M/N: PC-81006N  
Op Cond: Run test program  
Test Spec: L  
Comment: AC 120V/60Hz

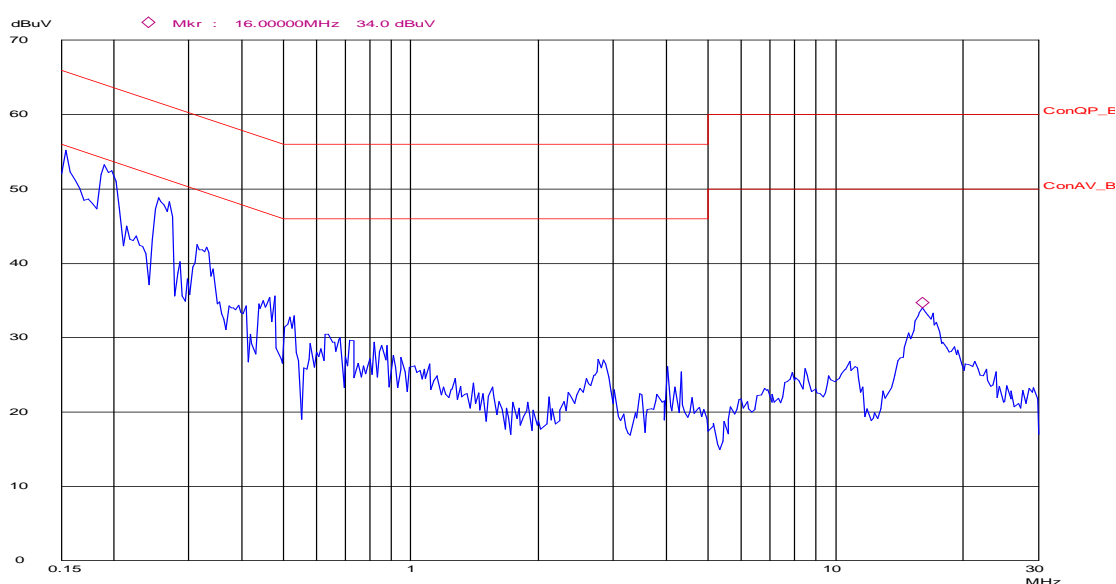

Frequency MHz	Cable Loss dB	Reading dBμV	QP Test result dBμV	QP Limit dBμV	Margin dB
0.15	9.8	34.6	44.4	66	21.6
0.162	9.8	31.5	41.3	65.4	24.1
0.198	9.8	35.9	45.7	63.7	18
0.254	9.8	30.8	40.6	61.6	21
0.322	9.8	25.1	34.9	59.7	24.8
0.47	9.8	18.4	28.2	56.5	28.3

Frequency MHz	Cable Loss dB	Reading dBμV	AV Test result dBμV	AV Limit dBμV	Margin dB
0.15	9.8	7.6	17.4	56	38.6
0.162	9.8	3.9	13.7	55.4	41.7
0.198	9.8	21.6	31.4	53.7	22.3
0.254	9.8	15.1	24.9	51.6	26.7
0.322	9.8	11.0	20.8	49.7	28.9
0.47	9.8	4.2	14.0	46.5	32.5


Remark: Test Result= Reading + Cable Loss

## Conducted Emission

Test with Hard disk WD2500BEVT-22ZCT0:

### Conducted Disturbance

EUT: M/N: PC-81006N  
Op Cond: Run test program  
Test Spec: N  
Comment: AC 120V/60Hz

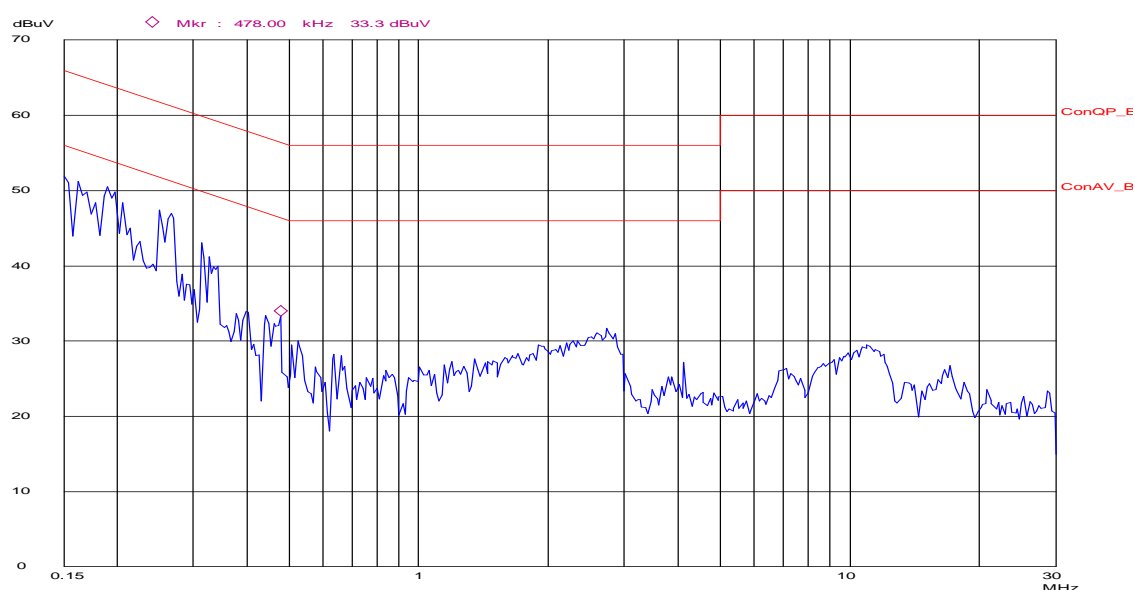

Frequency MHz	Cable Loss dB	Reading dBμV	QP Test result dBμV	QP Limit dBμV	Margin dB
0.15	9.8	34.6	44.4	66	21.6
0.194	9.8	37.2	47.0	63.9	16.9
0.266	9.8	31.6	41.4	61.2	19.8
0.314	9.8	24.9	34.7	59.9	25.2
0.386	9.8	18.5	28.3	58.1	29.8
0.47	9.8	17.6	27.4	56.5	29.1

Frequency MHz	Cable Loss dB	Reading dBμV	AV Test result dBμV	AV Limit dBμV	Margin dB
0.15	9.8	8.1	17.9	56	38.1
0.194	9.8	22.3	32.1	53.9	21.8
0.266	9.8	15.3	25.1	51.2	26.1
0.314	9.8	4.6	14.4	49.9	35.5
0.386	9.8	3.4	13.2	48.1	34.9
0.47	9.8	1.8	11.6	46.5	34.9

Remark: Test Result= Reading + Cable Loss



Product Service

## Test Equipment List

### Conducted Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESCS30	100003	Dec 23 2009
AMN	Rohde & Schwarz	ESH3-Z5	100229	Dec 23 2009
AMN	Rohde & Schwarz	ENV216	100042	Dec 23 2009

## 7.2 Radiated emissions

### Test Method

- 1 The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2 The turntable shall be rotated for 360 degrees to determine the position of maximum emission level
- 3 EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4 Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5 Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

### Test Mode

#### Run Test Program



-The test program BIT.exe exercises all the drive and ports of the EUT, and displaying scrolling H on the screen.

### Limit

Frequency MHz	Field Strength uV/m	Field Strength dBμV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

## Radiated Emission

Test with Hard disk WD2500BEVT-22ZCT0:

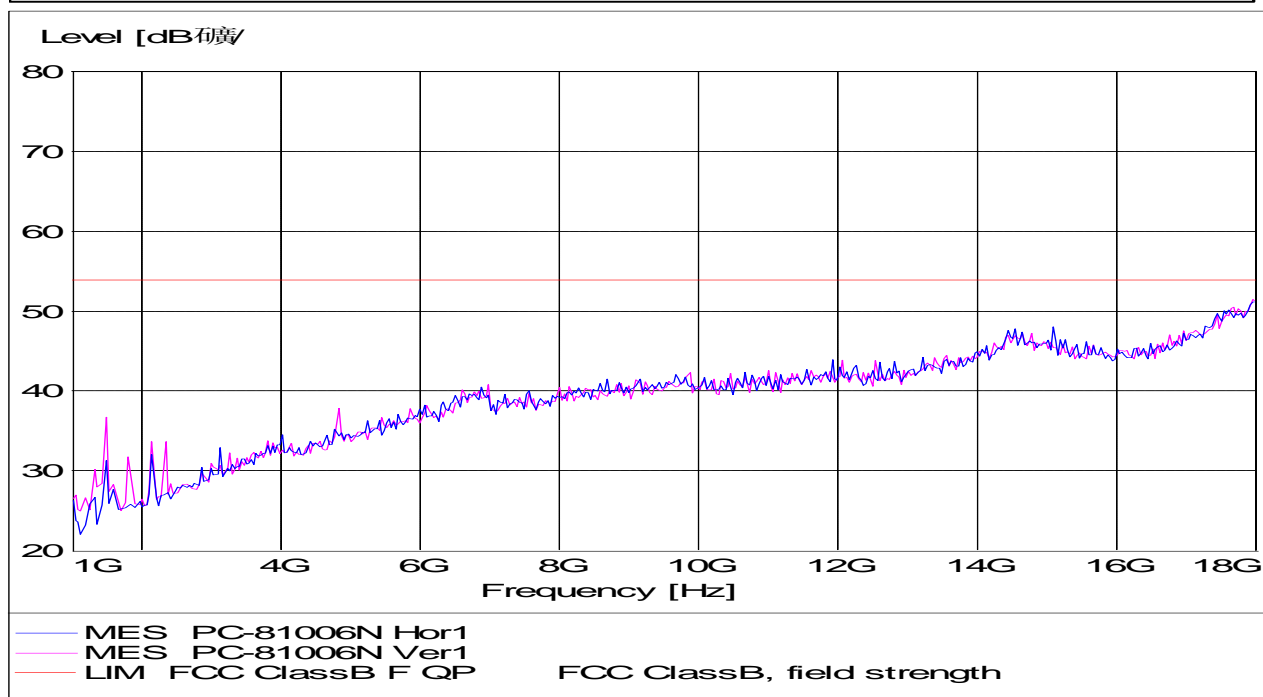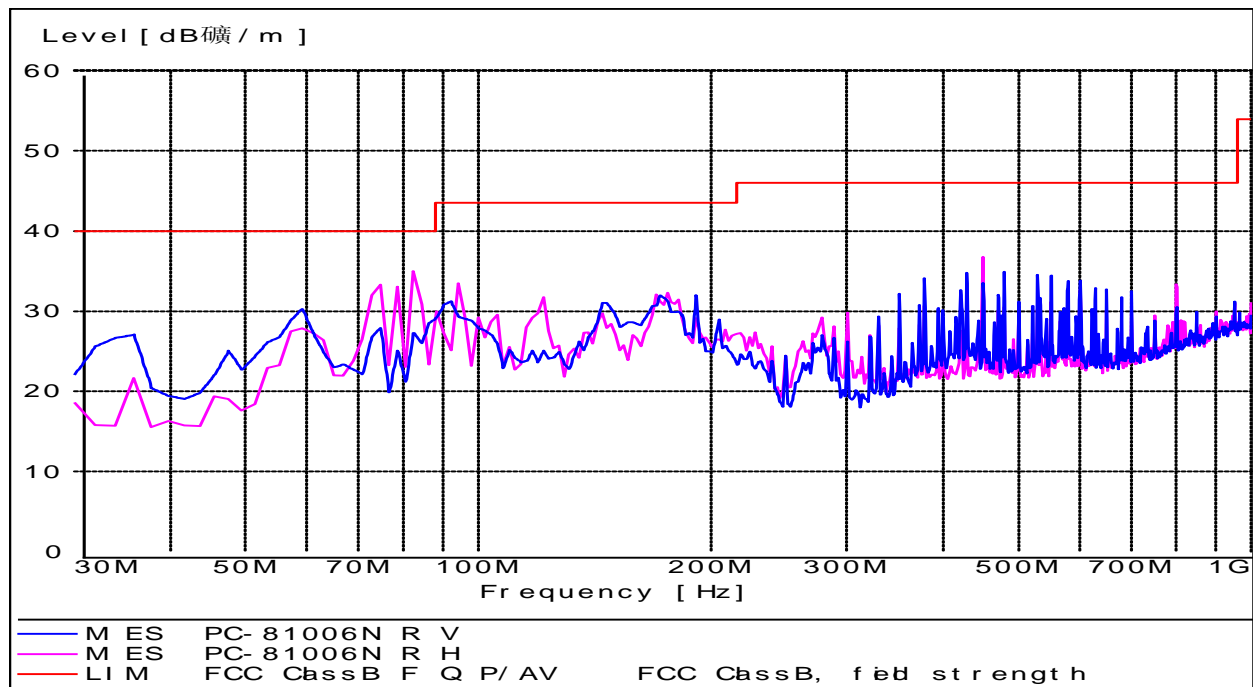


**Radiated Emission**

## Run Test Program mode Test Result

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Reading dBuV	Emission Level dBuV/m	Polarization	Limit dB $\mu$ V/m	Detector	Result
82.061	1.4	9.6	24.3	35.3	Horizontal	40.0	QP	Pass
175.791	2.2	10.1	19.9	32.2	Horizontal	43.5	QP	Pass
449.879	3.4	16.9	16.4	36.7	Horizontal	46.0	QP	Pass
1459.786	4.5	25.1	7.6	37.2	Horizontal	74.0	PK	Pass
1459.786	4.5	25.1	0.4	30.0	Horizontal	54.0	AV	Pass
59.158	1.2	5.3	23.8	30.3	Vertical	40.0	QP	Pass
171.904	2.2	10.3	19.4	31.9	Vertical	43.5	QP	Pass

## Radiated Emission

Test with Hard disk MHZ2160BH G2

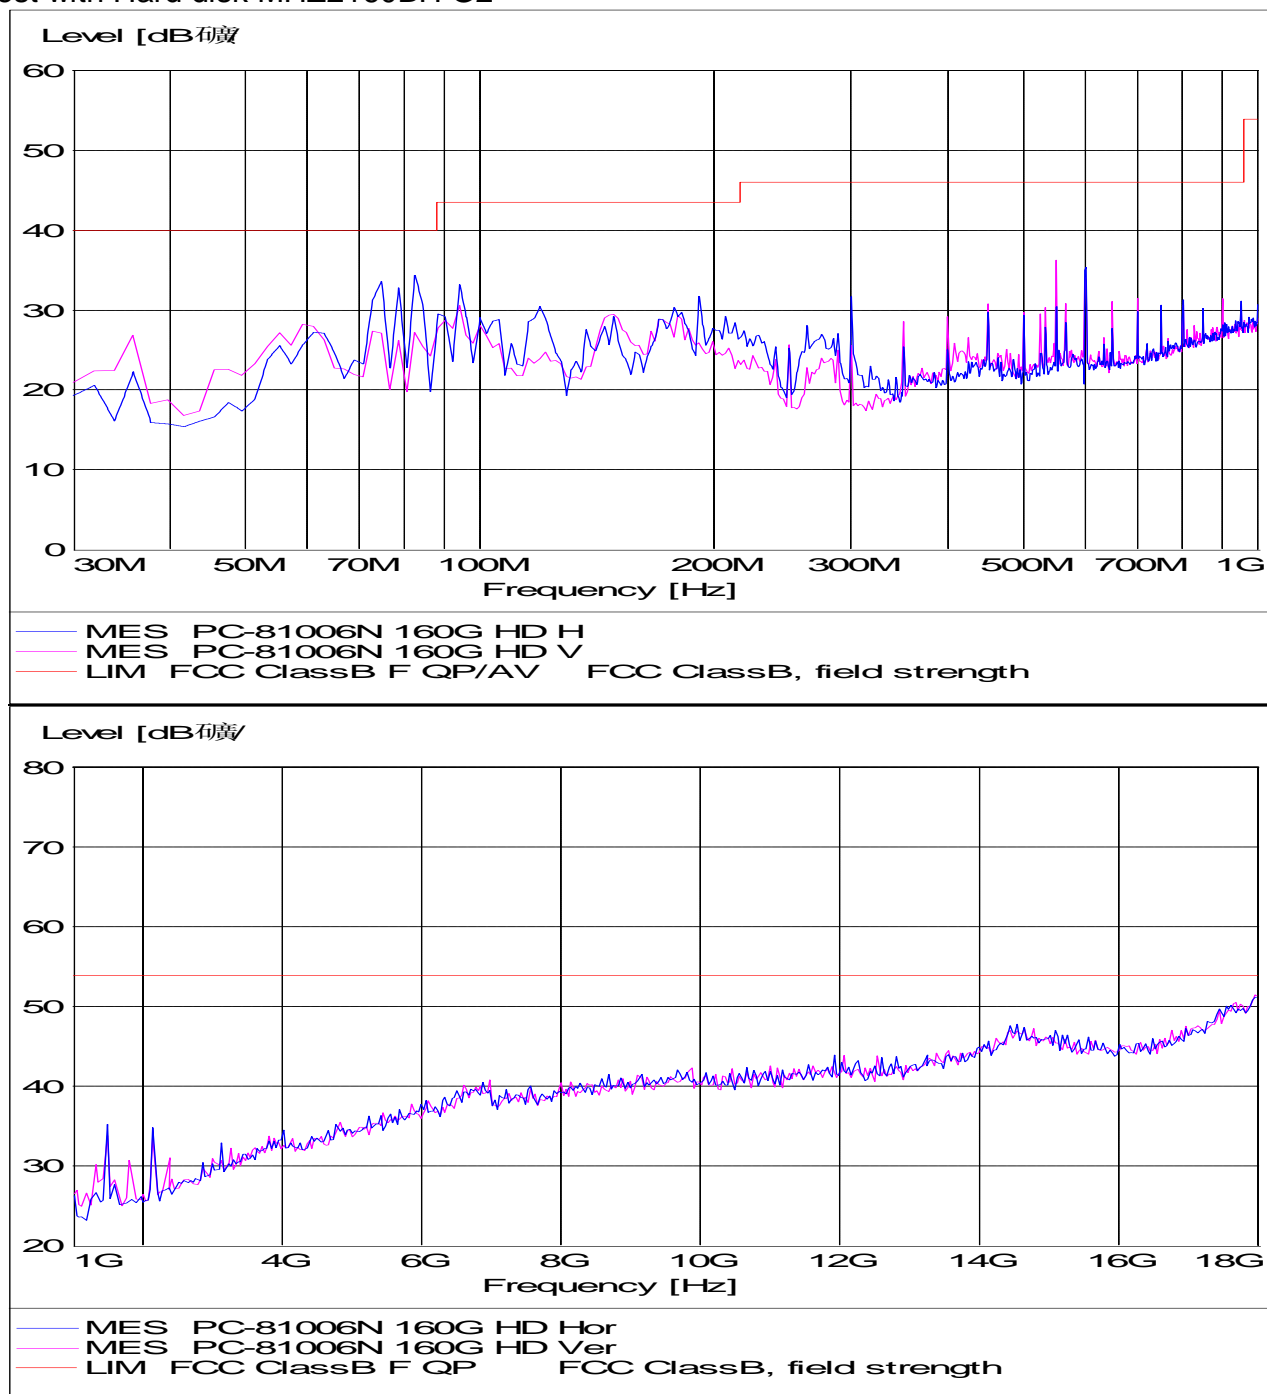

## Radiated Emission

### Run Test Program mode Test Result

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Reading dBuV	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
82.051	1.4	9.6	23.8	34.8	Horizontal	40.0	QP	Pass
94.148	1.6	11.5	20.0	33.1	Horizontal	43.5	QP	Pass
601.503	4.1	18.8	12.5	35.4	Horizontal	46.0	QP	Pass
59.158	1.2	5.3	21.7	28.2	Vertical	40.0	PK	Pass
94.148	1.6	11.5	17.5	30.6	Vertical	43.5	AV	Pass
1482.336	4.5	25.1	7.3	36.9	Vertical	74.0	QP	Pass
1482.336	4.5	25.1	-4.4	25.2	Vertical	54.0	QP	Pass





Product Service

## Test Equipment List

### Radiated Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESI26	838786/013	Dec 23 2009
Bilog Antenna	Chase	CBL6112B	2591	Dec 23 2009
Signal Generator	Rohde & Schwarz	SMR20	100047	Dec 23 2009
Antenna	Schwarzbeck	VUBA9117	115	Dec 23 2009
Horn Antenna	Rohde & Schwarz	HF906	100013	Dec 23 2009