

FCC PART 15.247

TEST REPORT

For

SVAT Electronics

4080 Montrose Rd., Niagara Falls, Ontario, L2H 1J9, Canada

FCC ID: SMH32006

| | |
|--|---|
| Report Type: Original Report | Product Type: Digital FHSS Device (Parent Unit) |
| Test Engineer: Gardon Zhang | <i>Gardon Zhang</i> |
| Report Number: RSZ121228003-00 | |
| Report Date: 2013-04-17 | |
| Reviewed By: Alvin Huang RF Leader | <i>Alvin Huang</i> |
| Test Laboratory: | Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn |

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

| | |
|--|-----------|
| GENERAL INFORMATION..... | 4 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4 |
| OBJECTIVE | 4 |
| RELATED SUBMITTAL(S)/GRANT(S)..... | 4 |
| TEST METHODOLOGY | 4 |
| TEST FACILITY | 5 |
| SYSTEM TEST CONFIGURATION..... | 6 |
| DESCRIPTION OF TEST CONFIGURATION | 6 |
| EUT EXERCISE SOFTWARE | 6 |
| EQUIPMENT MODIFICATIONS | 6 |
| EXTERNAL I/O CABLE..... | 6 |
| BLOCK DIAGRAM OF TEST SETUP | 6 |
| SUMMARY OF TEST RESULTS | 7 |
| FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) | 8 |
| APPLICABLE STANDARD | 8 |
| RESULT | 8 |
| FCC §15.203 – ANTENNA REQUIREMENT | 9 |
| APPLICABLE STANDARD | 9 |
| ANTENNA CONNECTOR CONSTRUCTION | 9 |
| FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS | 10 |
| APPLICABLE STANDARD | 10 |
| MEASUREMENT UNCERTAINTY | 10 |
| EUT SETUP | 10 |
| EMI TEST RECEIVER SETUP..... | 11 |
| TEST PROCEDURE | 11 |
| TEST EQUIPMENT LIST AND DETAILS..... | 11 |
| TEST RESULTS SUMMARY | 11 |
| TEST DATA | 11 |
| FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS..... | 14 |
| APPLICABLE STANDARD | 14 |
| MEASUREMENT UNCERTAINTY | 14 |
| EUT SETUP | 14 |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP | 15 |
| TEST PROCEDURE | 15 |
| TEST EQUIPMENT LIST AND DETAILS..... | 15 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION | 16 |
| TEST RESULTS SUMMARY | 16 |
| TEST DATA | 16 |
| FCC §15.247(a) (1)-CHANNEL SEPARATION | 19 |
| APPLICABLE STANDARD | 19 |
| TEST PROCEDURE | 19 |
| TEST EQUIPMENT LIST AND DETAILS..... | 19 |
| TEST DATA | 19 |

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....22
 APPLICABLE STANDARD22
 TEST PROCEDURE22
 TEST EQUIPMENT LIST AND DETAILS.....22
 TEST DATA22

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL25
 APPLICABLE STANDARD25
 TEST PROCEDURE25
 TEST EQUIPMENT LIST AND DETAILS.....25
 TEST DATA25

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....27
 APPLICABLE STANDARD27
 TEST PROCEDURE27
 TEST EQUIPMENT LIST AND DETAILS.....27
 TEST DATA27

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT30
 APPLICABLE STANDARD30
 TEST PROCEDURE30
 TEST EQUIPMENT LIST AND DETAILS.....30
 TEST DATA30

FCC §15.247(d) - BAND EDGES33
 APPLICABLE STANDARD33
 TEST PROCEDURE33
 TEST EQUIPMENT LIST AND DETAILS.....33
 TEST DATA34

PRODUCT SIMILARITY DECLARATION LETTER.....36

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *SVAT Electronics*'s product, model number: 31006 (FCC ID: SMH32006) (the "EUT") in this report was a parent unit of Digital FHSS Device, named as 2.4GHz Digital Video Baby Monitor by the applicant, which was measured approximately: 11.5 cm (L) x 8.0 cm (W) x 2.5 cm (H), rated input voltage: DC 3.7V battery or DC 6.0V from adapter.

Adapter Information: AC Adpater
Model: 5E-AD060080-U
Input: 100-120V~50/60 Hz 0.15A
Output: DC 6V 0.8A

Note: The product Amplified Cordless Phone, the model 31006, 32006 and 32010 are different in model number due to different combinations. The parent unit and baby unit in these models are the same, which was explained in the attached declaration letter.

** All measurement and test data in this report was gathered from production sample serial number: 1212163 (Assigned by BAACL, Shenzhen). The EUT supplied by the applicant was received on 2012-12-28.*

Objective

This report is prepared on behalf of *SVAT Electronics* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Submitted with the baby unit of a system with FCC ID: SMH32008.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode which was selected by manufacturer.

EUT Exercise Software

No exercise software was used.

Equipment Modifications


No modification was made to the EUT tested.

External I/O Cable

| Cable Description | Length (m) | From/Port | To |
|--------------------------|------------|-----------|---------|
| Un-shielding Power Cable | 1.8 | EUT | Adapter |

Block Diagram of Test Setup

For Conducted Emission

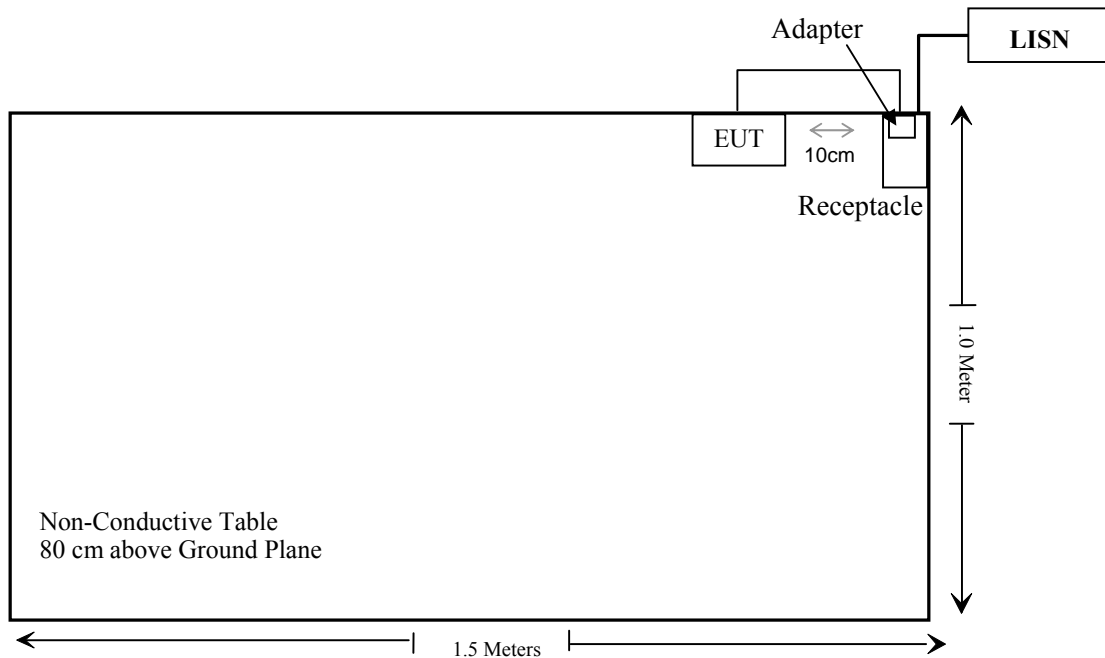

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|--------------------------------------|--------------------------------|---------------|
| §15.247 (i), §1.1307 (b)(1), §2.1093 | RF EXPOSURE | Compliance |
| §15.203 | Antenna Requirement | Compliance |
| §15.207 (a) | Conducted Emissions | Compliance |
| §15.205, §15.209, §15.247(d) | Radiated Emissions | Compliance |
| §15.247 (a)(1) | 20 dB Emission Bandwidth | Compliance |
| §15.247(a)(1) | Channel Separation | Compliance |
| §15.247(a)(1)(iii) | Time of Occupancy (Dwell Time) | Compliance |
| §15.247(a)(1)(iii) | Quantity of hopping channel | Compliance |
| §15.247(b)(1) | Peak Output Power Measurement | Compliance |
| §15.247(d) | Band Edges | Compliance |

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

| Limits for General Population/Uncontrolled Exposure | | | | |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Averaging Time (Minutes) |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100,000 | / | / | 1.0 | 30 |

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

| Frequency (MHz) | Antenna Gain | | Conducted Power | | Evaluation Distance (cm) | Power Density (mW/cm ²) | MPE Limit (mW/cm ²) |
|-----------------|--------------|-----------|-----------------|-------|--------------------------|-------------------------------------|---------------------------------|
| | (dBi) | (numeric) | (dBm) | (mW) | | | |
| 2471.625 | 2 | 1.58 | 15.39 | 34.59 | 20 | 0.01088 | 1 |

Note: To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a monopole antenna connected to RF board, which is in accordance to section 15.203, the maximum gain is 2 dBi; please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR-16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

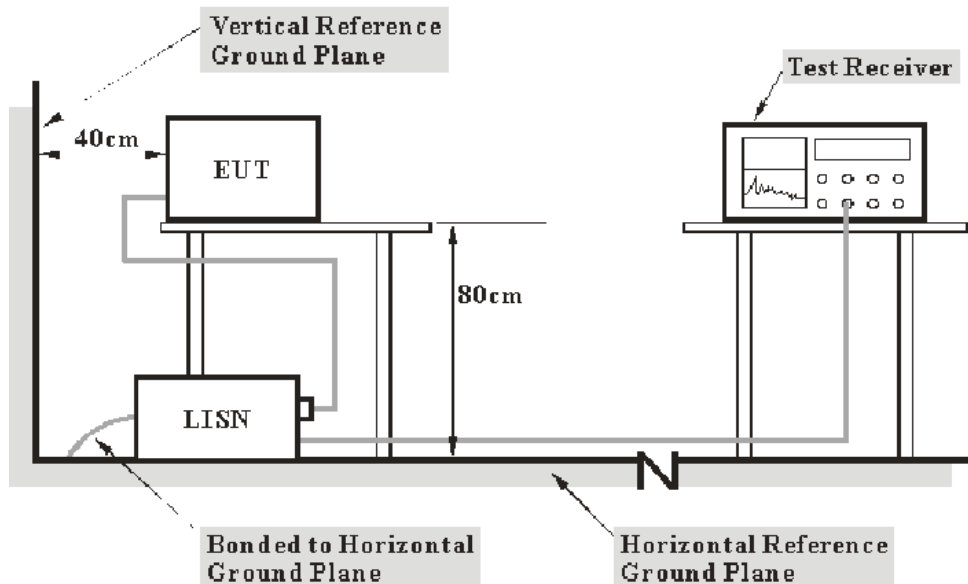

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|---------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCS30 | 100176 | 2012-11-24 | 2013-11-23 |
| Rohde & Schwarz | L.I.S.N. | ESH2-Z5 | 892107/021 | 2012-08-22 | 2013-08-21 |
| Rohde & Schwarz | Attenuator | ESH3Z2 | DE25985 | 2012-07-08 | 2013-07-07 |
| BACL | CE Test software | BACL-CE | V1.0 | - | - |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

3.24 dB at 0.325 MHz in the **Line** conducted mode

Test Data


Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0 kPa |

The testing was performed by Gardon Zhang on 2012-12-31


Test Mode: Charging & Transmitting

AC 120 V, 60 Hz, Line:

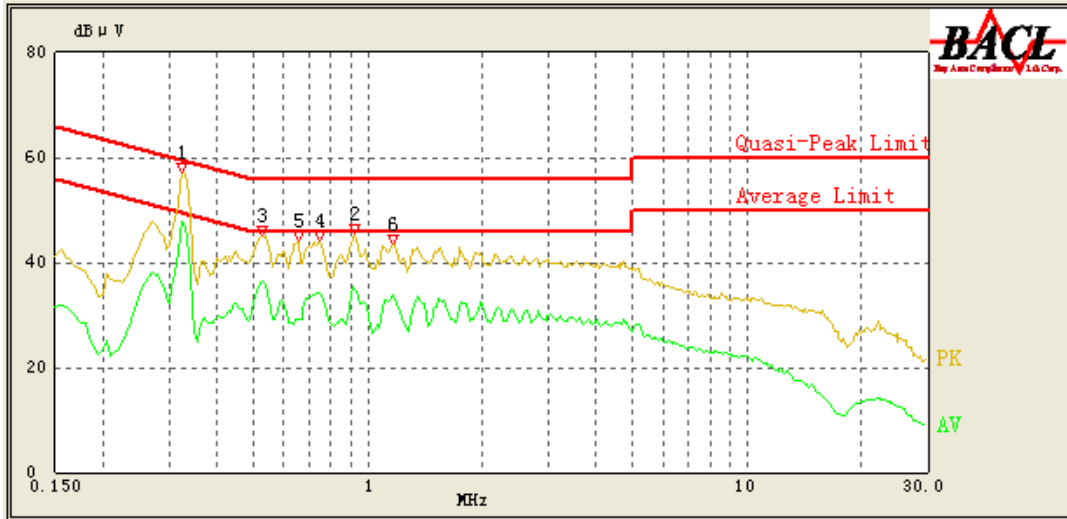

| Frequency (MHz) | Corrected Amplitude (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/QP/Ave.) |
|-----------------|----------------------------|------------------------|--------------|-------------|-----------------------|
| 0.325 | 47.76 | 10.26 | 51.00 | 3.24 | Ave. |
| 0.325 | 51.79 | 10.26 | 61.00 | 9.21 | QP |
| 0.525 | 36.52 | 10.25 | 46.00 | 9.48 | Ave. |
| 0.915 | 35.44 | 10.18 | 46.00 | 10.56 | Ave. |
| 0.745 | 34.11 | 10.21 | 46.00 | 11.89 | Ave. |
| 1.160 | 33.91 | 10.18 | 46.00 | 12.09 | Ave. |
| 0.525 | 41.24 | 10.25 | 56.00 | 14.76 | QP |
| 0.660 | 29.05 | 10.23 | 46.00 | 16.95 | Ave. |
| 0.745 | 37.81 | 10.21 | 56.00 | 18.19 | QP |
| 1.165 | 37.68 | 10.18 | 56.00 | 18.32 | QP |
| 0.920 | 37.41 | 10.18 | 56.00 | 18.59 | QP |
| 0.655 | 33.39 | 10.23 | 56.00 | 22.61 | QP |

AC 120V, 60 Hz, Neutral:

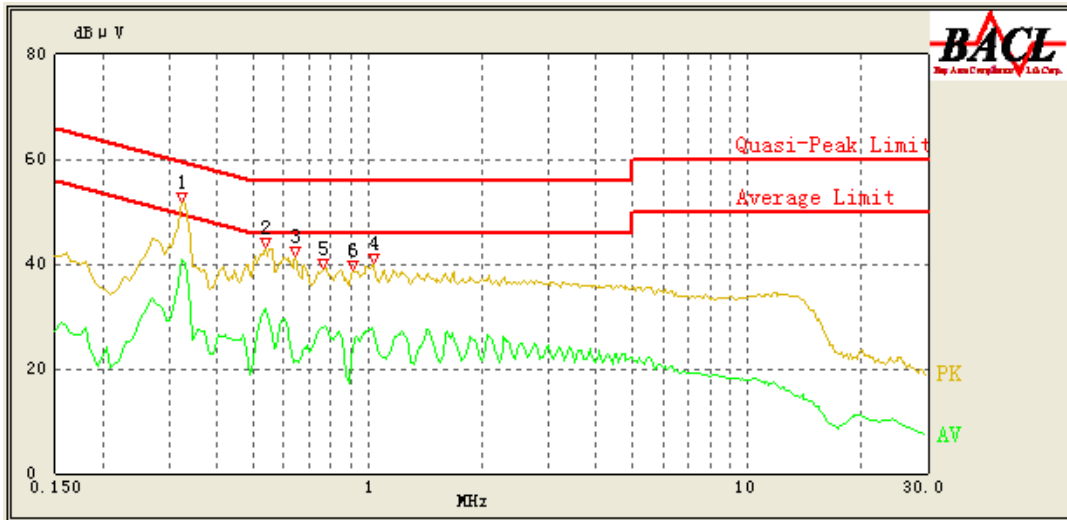

| Frequency (MHz) | Corrected Amplitude (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/QP/Ave.) |
|-----------------|----------------------------|------------------------|--------------|-------------|-----------------------|
| 0.325 | 40.73 | 10.25 | 51.00 | 10.27 | Ave. |
| 0.325 | 48.23 | 10.25 | 61.00 | 12.77 | QP |
| 0.535 | 31.53 | 10.24 | 46.00 | 14.47 | Ave. |
| 0.540 | 39.46 | 10.24 | 56.00 | 16.54 | QP |
| 0.770 | 28.33 | 10.20 | 46.00 | 17.67 | Ave. |
| 1.025 | 27.78 | 10.17 | 46.00 | 18.22 | Ave. |
| 0.920 | 25.55 | 10.18 | 46.00 | 20.45 | Ave. |
| 0.765 | 35.52 | 10.20 | 56.00 | 20.48 | QP |
| 1.035 | 35.16 | 10.17 | 56.00 | 20.84 | QP |
| 0.645 | 34.08 | 10.22 | 56.00 | 21.92 | QP |
| 0.910 | 32.59 | 10.18 | 56.00 | 23.41 | QP |
| 0.645 | 21.63 | 10.22 | 46.00 | 24.37 | Ave. |

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

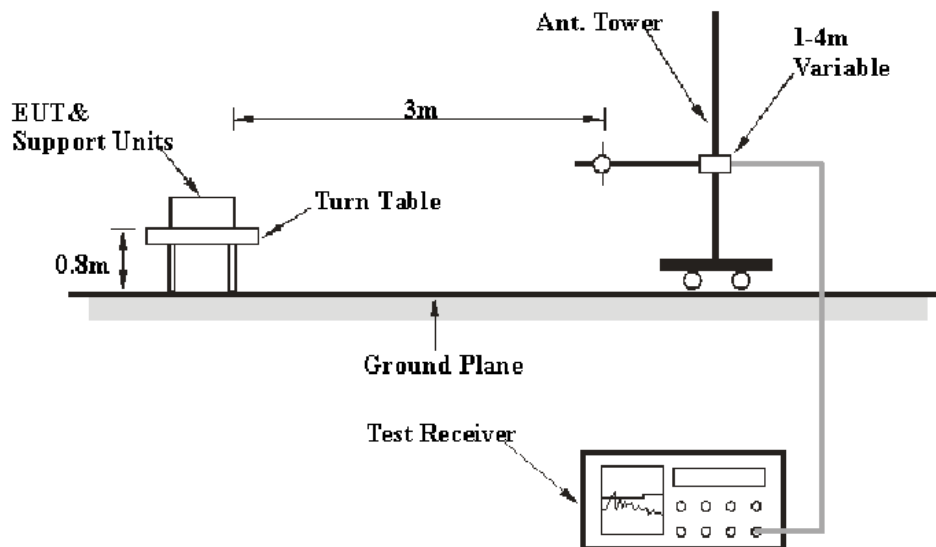

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Detector |
|------------------|---------|-----------|--------|----------|
| 30MHz – 1000 MHz | 100 kHz | 300 kHz | 120kHz | QP |
| Above 1 GHz | 1MHz | 3 MHz | / | PK |
| | 1MHz | 10 Hz | / | Ave. |

Test Procedure

For the radiated emissions test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz to 1GHz and peak and Average detection modes for frequencies above 1GHz.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------|-------------------|----------|---------------|------------------|----------------------|
| HP | Amplifier | 8447E | 1937A01046 | 2012-11-24 | 2013-11-23 |
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101122 | 2012-08-08 | 2013-08-07 |
| Sunol Sciences | Broadband Antenna | JB1 | A040904-2 | 2011-11-28 | 2014-11-27 |
| SUPER ULTRA | Amplifier | ZVA-213+ | N/A | 2012-11-24 | 2013-11-23 |
| Sunol Sciences | Horn Antenna | DRH-118 | A052304 | 2011-12-01 | 2014-11-30 |
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2012-11-24 | 2013-11-23 |
| Agilent | Spectrum Analyzer | 8564E | 3943A01781 | 2012-05-17 | 2013-05-16 |
| the electro-Mechanics Co. | Horn Antenna | 3116 | 9510-2270 | 2010-10-14 | 2013-10-13 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

3.20 dB at 200.0 MHz in the **Horizontal** polarization

Test Data

Environmental Conditions

| | |
|---------------------------|----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0kPa |

The testing was performed by Gardon Zhang on 2012-12-31.

Test mode: Transmitting (worst case at adapter power supply)

30MHz-25GHz:

| Frequency (MHz) | Receiver | | Turntable Degree | Rx Antenna | | Corrected Factor (dB) | Corrected Amplitude (dBuV/m) | FCC Part 15.247/205/209 | |
|-------------------------------|----------------|-----------------------|------------------|------------|-------------|-----------------------|------------------------------|-------------------------|-------------|
| | Reading (dBuV) | Detector (PK/QP/Ave.) | | Height (m) | Polar (H/V) | | | Limit (dBuV/m) | Margin (dB) |
| Low Channel (2410.875 MHz) | | | | | | | | | |
| 2410.9 | 98.37 | PK | 25 | 1.2 | H | 6.13 | 104.50 | / | / |
| 2410.9 | 94.56 | Ave. | 25 | 1.2 | H | 6.13 | 100.69 | / | / |
| 2410.9 | 102.87 | PK | 122 | 1.3 | V | 6.13 | 109.00 | / | / |
| 2410.9 | 98.69 | Ave. | 122 | 1.3 | V | 6.13 | 104.82 | / | / |
| 200.0 | 55.40 | QP | 187 | 1.1 | H | -15.10 | 40.30 | 43.50 | 3.20 |
| 7232.7 | 31.15 | Ave. | 115 | 1.2 | H | 16.62 | 47.77 | 54.00 | 6.23 |
| 2317.8 | 39.23 | Ave. | 15 | 1.3 | V | 5.48 | 44.71 | 54.00 | 9.29 |
| 2364.4 | 39.13 | Ave. | 63 | 1.2 | V | 5.48 | 44.61 | 54.00 | 9.39 |
| 9643.6 | 24.27 | Ave. | 42 | 1.2 | H | 19.29 | 43.56 | 54.00 | 10.44 |
| 4821.8 | 27.96 | Ave. | 96 | 1.2 | V | 12.40 | 40.36 | 54.00 | 13.64 |
| 7232.7 | 42.25 | PK | 115 | 1.2 | H | 16.62 | 58.87 | 74.00 | 15.13 |
| 2484.3 | 30.55 | Ave. | 66 | 1.1 | V | 7.21 | 37.76 | 54.00 | 16.24 |
| 9643.6 | 36.35 | PK | 42 | 1.2 | H | 19.29 | 55.64 | 74.00 | 18.36 |
| 2364.4 | 48.87 | PK | 63 | 1.2 | V | 5.48 | 54.35 | 74.00 | 19.65 |
| 4821.8 | 38.96 | PK | 96 | 1.2 | V | 12.40 | 51.36 | 74.00 | 22.64 |
| 2317.8 | 45.52 | PK | 15 | 1.3 | V | 5.48 | 51.00 | 74.00 | 23.00 |
| 2484.3 | 43.25 | PK | 66 | 1.1 | V | 7.21 | 50.46 | 74.00 | 23.54 |
| Middle Channel (2441.250 MHz) | | | | | | | | | |
| 2441.3 | 98.55 | PK | 1 | 1.1 | H | 7.21 | 105.76 | / | / |
| 2441.3 | 94.47 | Ave. | 1 | 1.1 | H | 7.21 | 101.68 | / | / |
| 2441.3 | 102.69 | PK | 85 | 1.3 | V | 7.21 | 109.90 | / | / |
| 2441.3 | 98.85 | Ave. | 85 | 1.3 | V | 7.21 | 106.06 | / | / |
| 7323.9 | 32.57 | Ave. | 63 | 1.3 | H | 16.49 | 49.06 | 54.00 | 4.94 |
| 184.0 | 54.40 | QP | 156 | 1.1 | H | -16.10 | 38.30 | 43.50 | 5.20 |
| 9765.2 | 26.69 | Ave. | 226 | 1.2 | H | 19.40 | 46.09 | 54.00 | 7.91 |
| 4882.6 | 29.36 | Ave. | 99 | 1.2 | V | 12.46 | 41.82 | 54.00 | 12.18 |
| 2364.2 | 36.13 | Ave. | 77 | 1.1 | V | 5.48 | 41.61 | 54.00 | 12.39 |
| 2317.4 | 35.69 | Ave. | 45 | 1.3 | V | 5.48 | 41.17 | 54.00 | 12.83 |
| 7323.9 | 43.36 | PK | 63 | 1.3 | H | 16.49 | 59.85 | 74.00 | 14.15 |
| 2483.7 | 30.55 | Ave. | 45 | 1.1 | V | 7.21 | 37.76 | 54.00 | 16.24 |
| 9765.2 | 38.24 | PK | 226 | 1.2 | H | 19.40 | 57.64 | 74.00 | 16.36 |
| 4882.6 | 40.51 | PK | 99 | 1.2 | V | 12.46 | 52.97 | 74.00 | 21.03 |
| 2483.7 | 43.25 | PK | 45 | 1.1 | V | 7.21 | 50.46 | 74.00 | 23.54 |
| 2364.2 | 42.25 | PK | 77 | 1.1 | V | 5.48 | 47.73 | 74.00 | 26.27 |
| 2317.4 | 41.58 | PK | 45 | 1.3 | V | 5.48 | 47.06 | 74.00 | 26.94 |

| Frequency (MHz) | Receiver | | Turntable Degree | Rx Antenna | | Corrected Factor (dB) | Corrected Amplitude (dBuV/m) | FCC Part 15.247/205/209 | |
|-----------------------------|----------------|-----------------------|------------------|------------|-------------|-----------------------|------------------------------|-------------------------|-------------|
| | Reading (dBuV) | Detector (PK/QP/Ave.) | | Height (m) | Polar (H/V) | | | Limit (dBuV/m) | Margin (dB) |
| High Channel (2471.625 MHz) | | | | | | | | | |
| 2471.6 | 99.63 | PK | 12 | 1.2 | H | 7.21 | 106.84 | / | / |
| 2471.6 | 95.14 | Ave. | 12 | 1.2 | H | 7.21 | 102.35 | / | / |
| 2471.6 | 103.25 | PK | 22 | 1.1 | V | 7.21 | 110.46 | / | / |
| 2471.6 | 99.03 | Ave. | 22 | 1.1 | V | 7.21 | 106.24 | / | / |
| 2368.4 | 45.06 | Ave. | 66 | 1.2 | V | 5.48 | 50.54 | 54.00 | 3.46 |
| 184.0 | 55.80 | QP | 148 | 1.1 | H | -16.10 | 39.70 | 43.50 | 3.80 |
| 7414.8 | 32.94 | Ave. | 55 | 1.2 | H | 15.90 | 48.84 | 54.00 | 5.16 |
| 2319.6 | 40.86 | Ave. | 32 | 1.3 | V | 5.48 | 46.34 | 54.00 | 7.66 |
| 4943.2 | 33.63 | Ave. | 22 | 1.2 | V | 12.50 | 46.13 | 54.00 | 7.87 |
| 9886.4 | 25.57 | Ave. | 45 | 1.1 | H | 19.39 | 44.96 | 54.00 | 9.04 |
| 2483.5 | 32.86 | Ave. | 53 | 1.3 | V | 7.21 | 40.07 | 54.00 | 13.93 |
| 7414.8 | 43.19 | PK | 55 | 1.2 | H | 15.90 | 59.09 | 74.00 | 14.91 |
| 9886.4 | 38.22 | PK | 45 | 1.1 | H | 19.39 | 57.61 | 74.00 | 16.39 |
| 2368.4 | 50.65 | PK | 66 | 1.2 | V | 5.48 | 56.13 | 74.00 | 17.87 |
| 4943.2 | 43.36 | PK | 22 | 1.2 | V | 12.50 | 55.86 | 74.00 | 18.14 |
| 2483.5 | 46.16 | PK | 53 | 1.3 | V | 7.21 | 53.37 | 74.00 | 20.63 |
| 2319.6 | 45.61 | PK | 32 | 1.3 | V | 5.48 | 51.09 | 74.00 | 22.91 |

FCC §15.247(a) (1)-CHANNEL SEPARATION

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in operating mode, RBW was set at 100 kHz, VBW \geq 3RBW maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101122 | 2012-08-08 | 2013-08-07 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0 kPa |

* The testing was performed by Gardon Zhang on 2013-01-05.

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

| Channel | Channel Frequency (MHz) | Channel Separation (MHz) | >Limit (MHz) | Result |
|----------|-------------------------|--------------------------|--------------|--------|
| Low | 2410.875 | 3.388 | 2.413 | Pass |
| Adjacent | 2414.250 | | | |
| Middle | 2441.250 | 3.388 | 2.400 | |
| Adjacent | 2444.625 | | | |
| High | 2471.625 | 3.388 | 2.413 | |
| Adjacent | 2468.250 | | | |

Note: limit =2/3 of bandwidth


Please refer to the following plots.

Low Channel

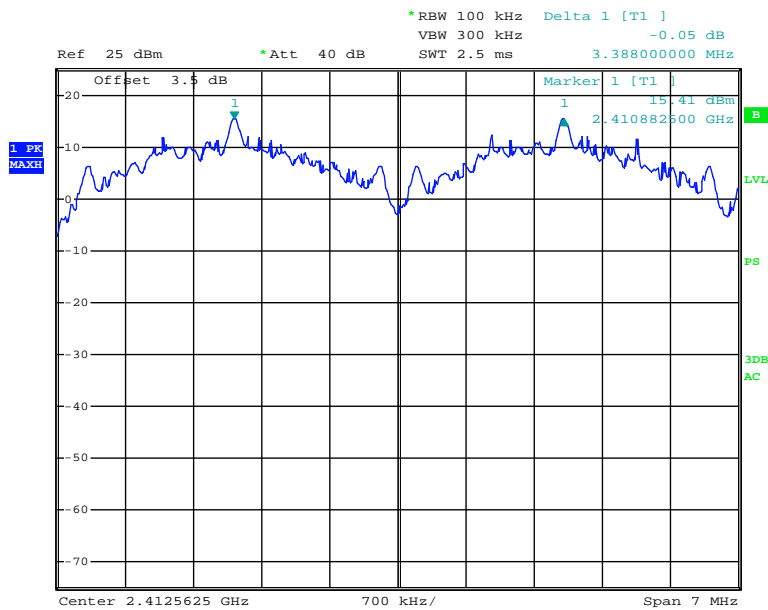


Date: 5.JAN.2013 13:28:14

Middle Channel

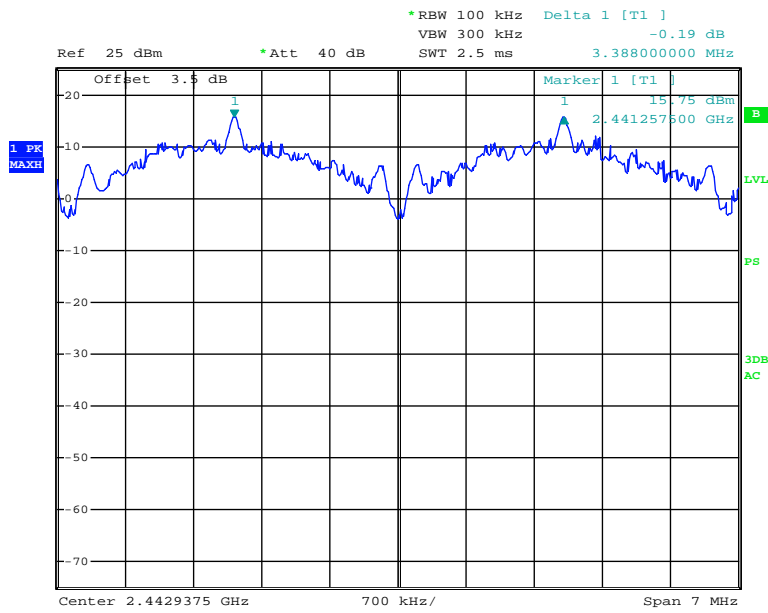

Date: 5.JAN.2013 14:34:04

High Channel

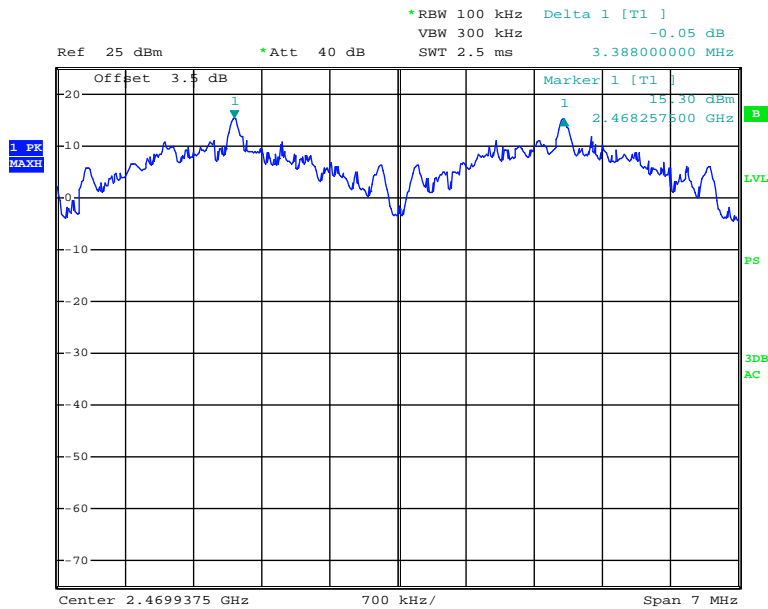

Date: 5.JAN.2013 14:36:35

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101122 | 2012-08-08 | 2013-08-07 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 24°C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 100.0 kPa |

* The testing was performed by Gardon Zhang on 2013-01-04.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

| Channel | Frequency (MHz) | 20 dB Emission Bandwidth (MHz) |
|---------|-----------------|--------------------------------|
| Low | 2410.875 | 3.620 |
| Middle | 2441.250 | 3.600 |
| High | 2471.625 | 3.620 |


Please refer to the following plots.

Low Channel

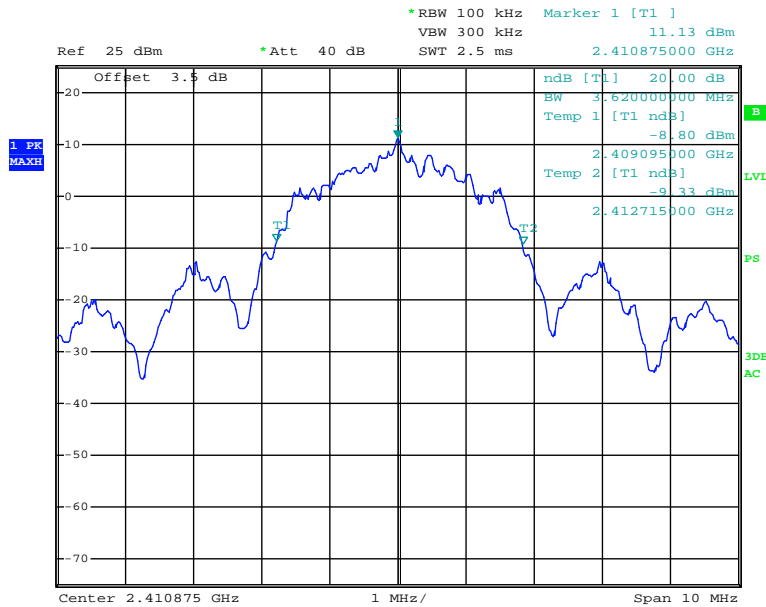


Date: 4.JAN.2013 10:55:12

Middle Channel

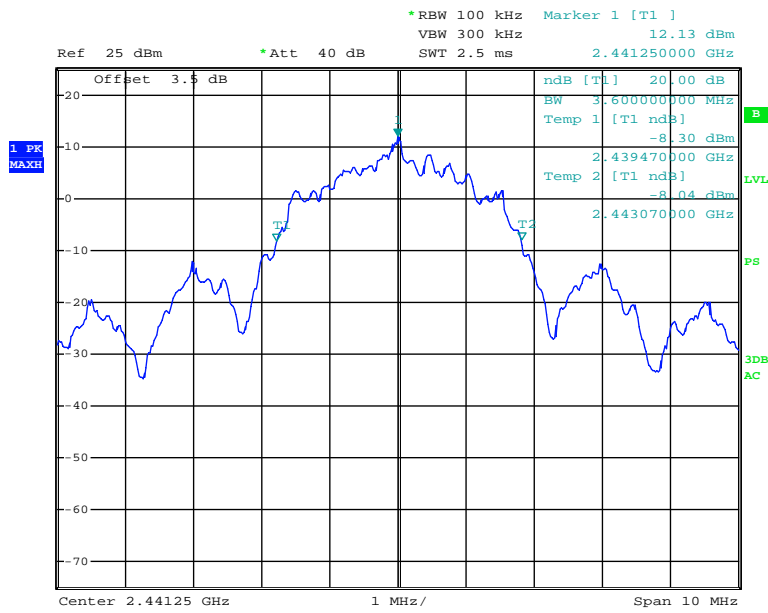

Date: 4.JAN.2013 11:13:24

High Channel

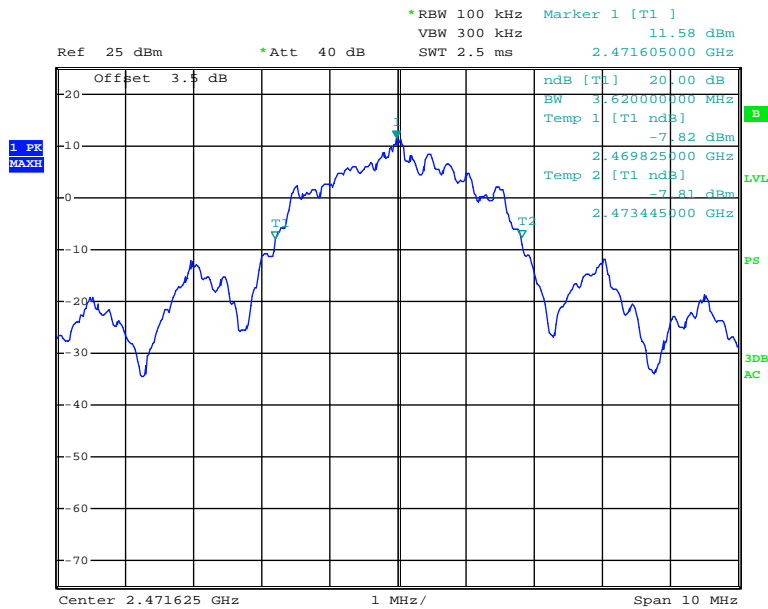

Date: 4.JAN.2013 10:50:38

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|---------------------|--------------------|--------------|----------------------|-------------------------|-----------------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101122 | 2012-08-08 | 2013-08-07 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25°C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0 kPa |

The testing was performed by Gardon Zhang on 2013-01-05.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Operating

| Frequency Range (MHz) | Number of Hopping Channel | Limit |
|-----------------------|---------------------------|-------|
| 2400-2483.50 | 19 | ≥ 15 |

Number of Hopping Channels

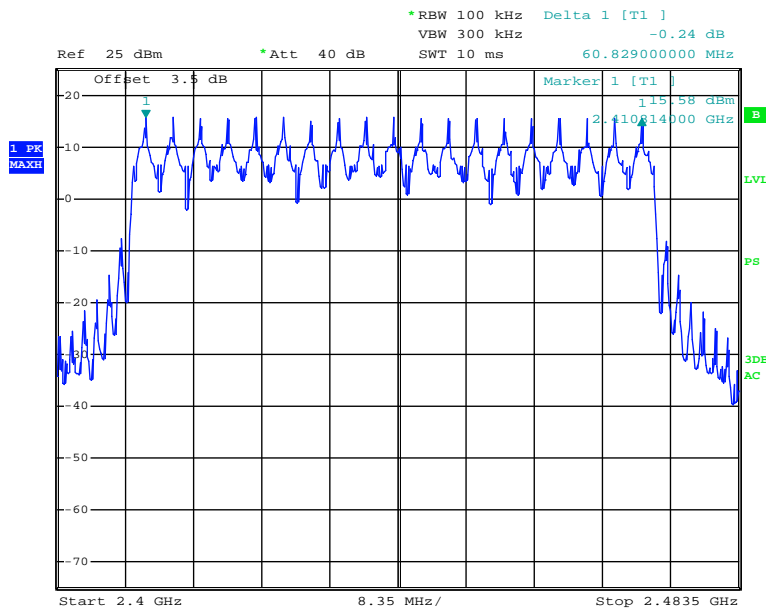

Date: 5.JAN.2013 11:52:02

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; spectrum span was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= Pulse time (ms) * hope rate/2/ number of hopping channels * hopping No.*0.4 s

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101122 | 2012-08-08 | 2013-08-07 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

| | |
|---------------------------|----------|
| Temperature: | 25°C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0kPa |

The testing was performed by Gardon Zhang on 2013-01-05.

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

| Channel | Pulse Width (ms) | Dwell Time (S) | Limit (S) | Result |
|---------|------------------|----------------|-----------|--------|
| Low | 1.074 | 0.1534 | 0.4 | Pass |
| Middle | 1.074 | 0.1534 | 0.4 | Pass |
| High | 1.074 | 0.1534 | 0.4 | Pass |

Note: Dwell time = Pulse time (ms) × (714/2/19) × 19 × 0.4 S
Hopping rate: 1000ms/1.4ms = 714


Please refer to the following plots.

Low Channel

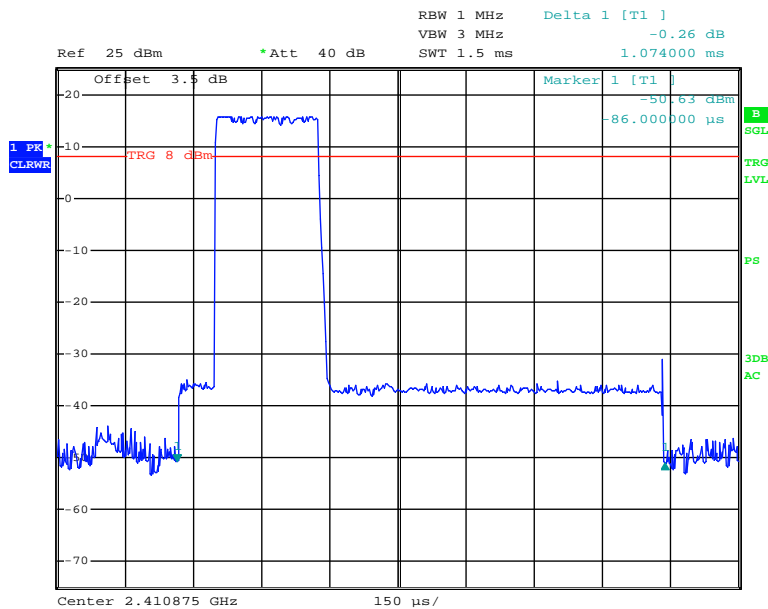


Date: 5.JAN.2013 13:19:18

Middle Channel

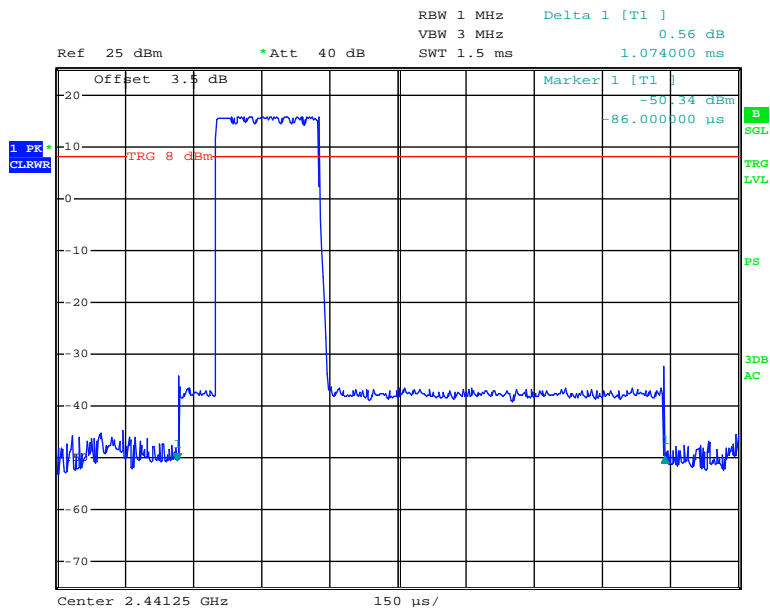

Date: 5.JAN.2013 11:59:03

High Channel

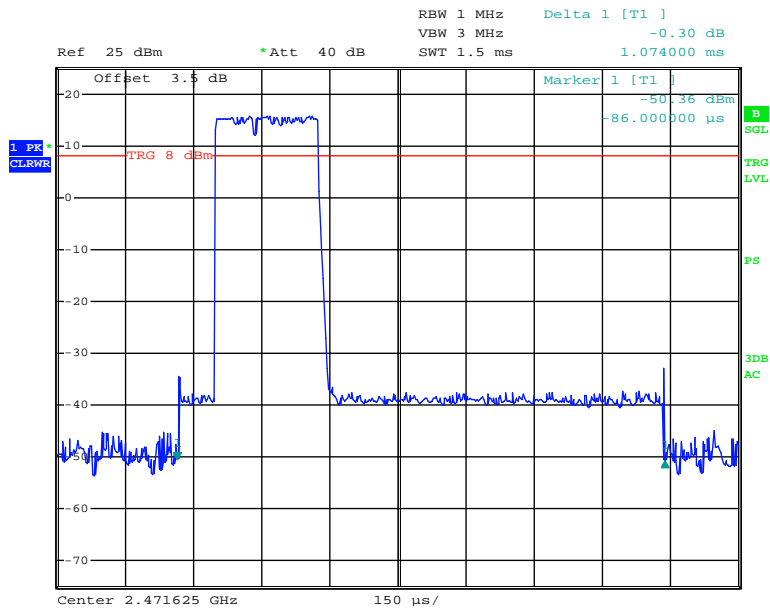

Date: 5.JAN.2013 13:22:36


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.

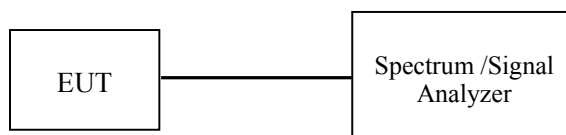

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101122 | 2012-08-08 | 2013-08-07 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|---------------------------|----------|
| Temperature: | 20~25 °C |
| Relative Humidity: | 50~56 % |
| ATM Pressure: | 100.0kPa |


* The testing was performed by Gardon Zhang from 2013-01-04 to 2013-01-05.

Test Result: Compliance.

Test Mode: Transmitting


| Channel | Channel frequency (MHz) | Conducted Peak output power (dBm) | Conducted Output Power (mW) | Limit (mW) |
|----------------|-------------------------|-----------------------------------|-----------------------------|------------|
| Low channel | 2410.875 | 14.87 | 30.69 | 125 |
| Middle channel | 2441.250 | 15.36 | 34.36 | 125 |
| High channel | 2471.625 | 15.39 | 34.59 | 125 |

Low Channel

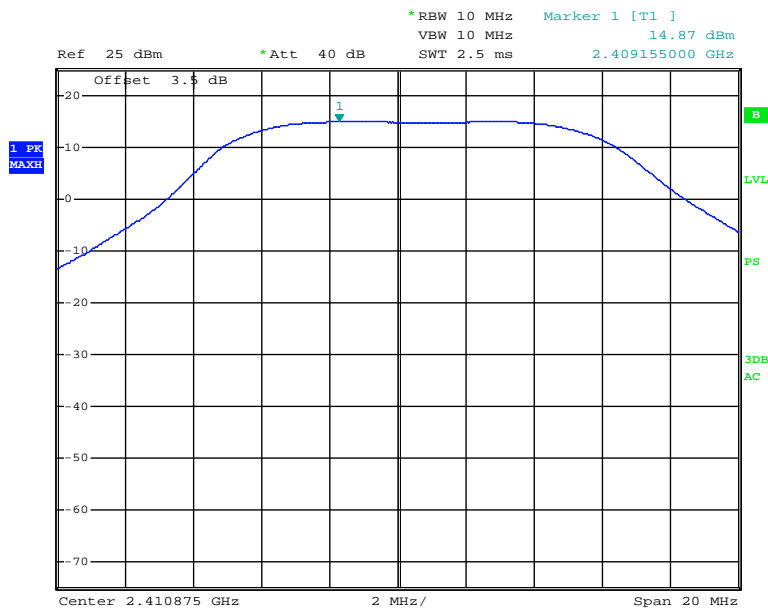


Date: 4.JAN.2013 10:20:21

Middle Channel

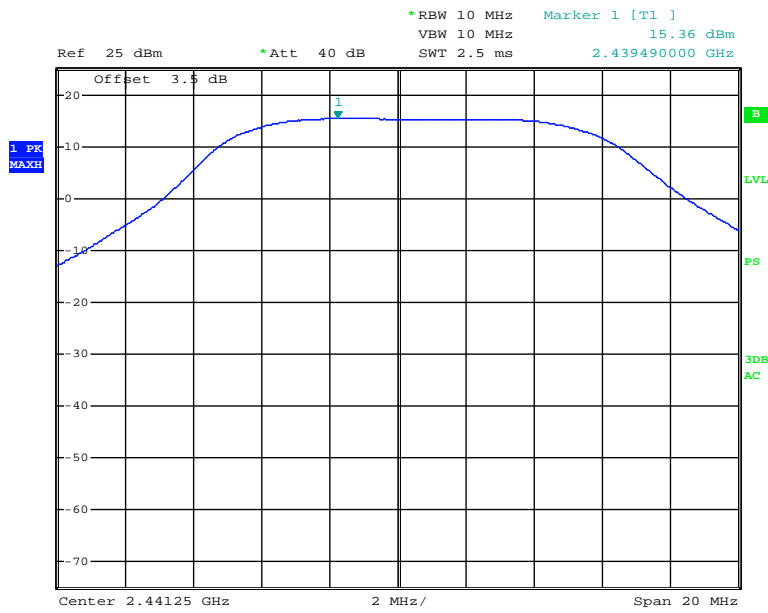

Date: 4.JAN.2013 10:23:20

High Channel

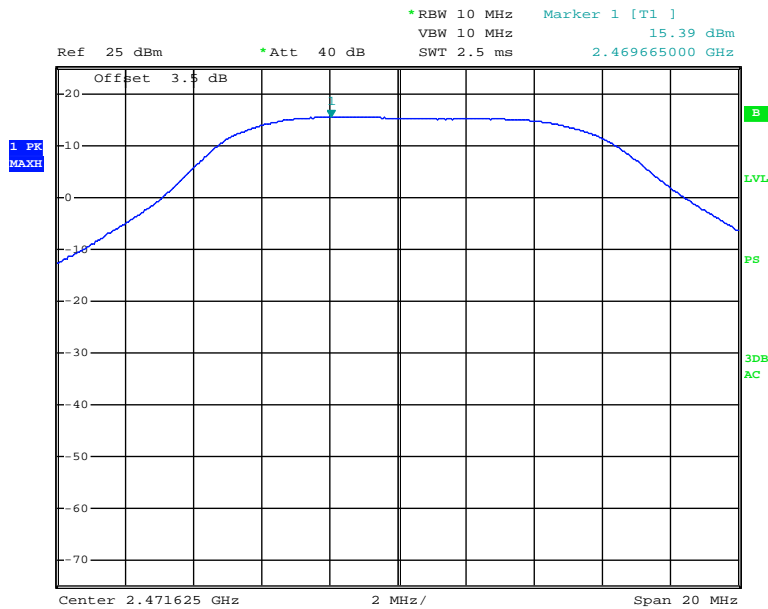

Date: 4.JAN.2013 10:36:46

FCC §15.247(d) - BAND EDGES

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in Operating mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
4. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|---------------------|--------------------|--------------|----------------------|-------------------------|-----------------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101122 | 2012-08-08 | 2013-08-07 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|---------------------------|----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0kPa |

*The testing was performed by Gardon Zhang on 2013-01-05.


Test Result: Compliance.

Test Mode: Transmitting

| Frequency Band | Delta Peak to Band Emission (dBc) | >Limit (dBc) |
|----------------|-----------------------------------|--------------|
| Left Band | 46.00 | 20 |
| Right Band | 45.25 | 20 |


Please refer to follow plots:

Band Edge: Left Side

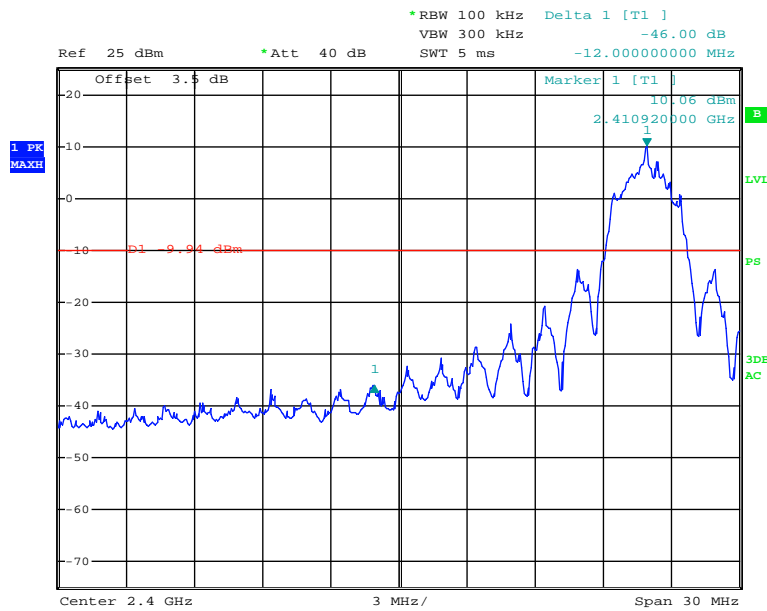

Date: 5.JAN.2013 14:46:42

Band Edge: Right Side

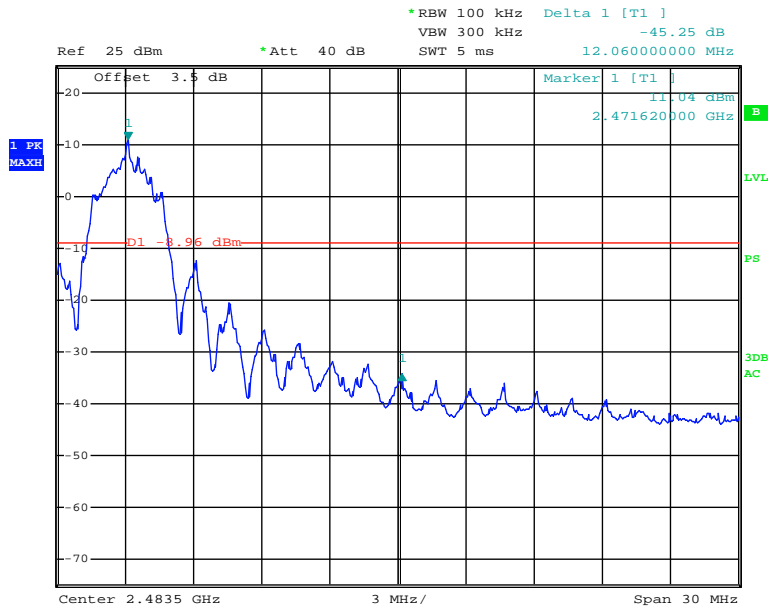

Date: 5.JAN.2013 14:57:03

PRODUCT SIMILARITY DECLARATION LETTER



SVAT ELECTRONICS

4080 Montrose Road | Niagara Falls, ON | Canada L2H 1J9 | T. 905.353.0732 | F. 905.353.1701 | www.svat.com

Company: SVAT Electronics
Add: 4080 Montrose Rd, Niagara Falls, ON, Canada
Tel: 1.905.353.0732
Fax: 1.905.353.1701

2013-2-5

Product Similarity Declaration Letter

To Whom It May Concern,

We, SVAT ELECTRONICS, hereby declare that our product 2.4GHz Digital Video Baby Monitor, the models 31006,32006 and 32010 are different in model number due to different combinations, which have the same baby unit and parent unit, details as below:

31006: 1 baby unit+1 parent unit
32006: 1 baby unit+1 parent unit with different packaging
32010: 2 baby units+1 parent unit
Please contact me if you have any question.

Signature:

A handwritten signature in blue ink, appearing to be 'Rajesh Jain'.

Rajesh Jain
Product Manager

***** END OF REPORT *****