



**CC 47 CFR PART 15 SUBPART C  
INDUSTRY CANADA RSS 210**

**CERTIFICATION TEST REPORT**

**FOR**

**INTEGRATED PATIO DOOR SENSOR**

**MODEL NUMBER: 13N90000**

**FCC ID: SO7-13N90000**

**IC: 11009A-13N90000**

**REPORT NUMBER: 16U23094-E1V4**

**ISSUE DATE: 6/15/16**

*Prepared for*  
**Pella Corporation**  
**102 Main Street**  
**Pella, IA 50219, U.S.A**

*Prepared by*  
**UL VERIFICATION SERVICES INC.**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 771-1000**  
**FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	05/20/16	Initial Issue	C.S.OOI
V2	05/31/16	Updated Section 8.1 Data	J. WU
V3	06/15/16	Updated Above 1GHz Radiated Spurious Test Data	C.S.OOI
V4	06/15/16	Changed Test Date on Page 4 and Added Note on Page 27.	C.S.OOI

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION .....</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>7</i>
5.2. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>7</i>
5.3. <i>SOFTWARE AND FIRMWARE.....</i>	<i>7</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>7</i>
5.5. <i>MODIFICATIONS .....</i>	<i>7</i>
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>8</i>
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>9</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>10</b>
7.1. <i>20 dB AND 99% BW .....</i>	<i>10</i>
7.2. <i>DUTY CYCLE.....</i>	<i>13</i>
7.3. <i>SUPERVISION TRANSMISSIONS .....</i>	<i>19</i>
7.4. <i>TRANSMISSION TIME .....</i>	<i>20</i>
<b>8. RADIATED EMISSION TEST RESULTS.....</b>	<b>21</b>
8.1. <i>TX RADIATED SPURIOUS EMISSION .....</i>	<i>21</i>
<b>9. SETUP PHOTOS.....</b>	<b>30</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** PELLA CORPORATION.  
102 MAIN ST  
PELLA, IA 50219 USA

**EUT DESCRIPTION:** INTEGRATED PATIO DOOR SENSOR

**MODEL:** 13N90000

**Serial Number:** 2320053, 2320055

**DATE TESTED:** APRIL 13 – June 14, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Pass
INDUSTRY CANADA RSS-210 Issue 8, Annex 1	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc By:



Choon Ooi  
PROJECT LEAD  
UL Verification Services Inc.

Prepared By:



JEFFERY WU  
WISE ENGINEER  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 4, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input checked="" type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 9KHz to 30 MHz	2.14 dB
Radiated Disturbance, 30 to 1000 MHz	4.98 dB
Radiated Disturbance, 1000 to 6000 MHz	3.86 dB
Radiated Disturbance, 6000 to 18000 MHz	4.23 dB
Radiated Disturbance, 18000 to 26000 MHz	5.30 dB
Radiated Disturbance, 26000 to 40000 MHz	5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

## **5. EQUIPMENT UNDER TEST**

### **5.1. DESCRIPTION OF EUT**

The EUT is a wireless sensor for installation on a door as part of a security system or home automation system. The sensor wirelessly transmits the open or closed status of the door.

### **5.2. DESCRIPTION OF AVAILABLE ANTENNAS**

The radio utilizes an internal, loop antenna, with a maximum gain of -15 dBi.

### **5.3. SOFTWARE AND FIRMWARE**

The typical factory firmware installed in the EUT during testing was ESW1113-01-A01.

The firmware installed in the EUT to allow continuous transmit during testing was 1113\_v1.00.

### **5.4. WORST-CASE CONFIGURATION AND MODE**

The EUT was investigated in each of its three orthogonal axes. All radiated testing was performed in the worse-case axis, which was found to be the "Y-axis". See photos for details.

### **5.5. MODIFICATIONS**

No modifications were made during testing.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT


NONE

### I/O CABLES

NONE

### TEST SETUP

### SETUP DIAGRAM FOR TESTS





## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-2 GHz	Sunol Sciences	JB1	T122	01/29/17
Antenna, Horn, 18GHz	ETS Lindgren	3117	T119	02/14/17
Preamplifier, 1300 MHz	Keysight	8447D	T64	08/14/16
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/16
PXA Signal Analyzer, 44 GHz	Keysight	N9030A	N/A	12/21/16
Antenna, Loop, 30 MHz	ETS Lindgren	6502	T757	05/21/16
Dipole Antenna 400MHz-1000MHz	ETS Lindgren	N/A	T416	04/18/17

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Ver 9.5, Apr 26, 2016
Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015
Antenna Port Software	UL	UL RF	Ver 4.2, Mar 7, 2016

## 7. ANTENNA PORT TEST RESULTS

### 7.1. 20 dB AND 99% BW

#### LIMITS

FCC §15.231 (c)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

IC A1.1.3

For the purpose of Section A1.1, the 99% Bandwidth shall be no wider than 0.25% of the center frequency for devices operating between 70-900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

#### TEST PROCEDURE

ANSI C63.10

The transmitter output is connected to the spectrum analyzer.

20dB Bandwidth: The RBW is set to 1% to 5% of OBW. The VBW is set to 3 times the RBW. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.

99% Bandwidth: The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

**RESULTS**

No non-compliance noted:


20dB Bandwidth

<b>Frequency (MHz)</b>	<b>20dB Bandwidth (kHz)</b>	<b>Limit (kHz)</b>	<b>Margin (kHz)</b>
433.92	98	1084.8	-986.8


99% Bandwidth

<b>Frequency (MHz)</b>	<b>99% Bandwidth (kHz)</b>	<b>Limit (kHz)</b>	<b>Margin (kHz)</b>
433.9	1046.4	1084.75	-38.35

20dB BANDWIDTH

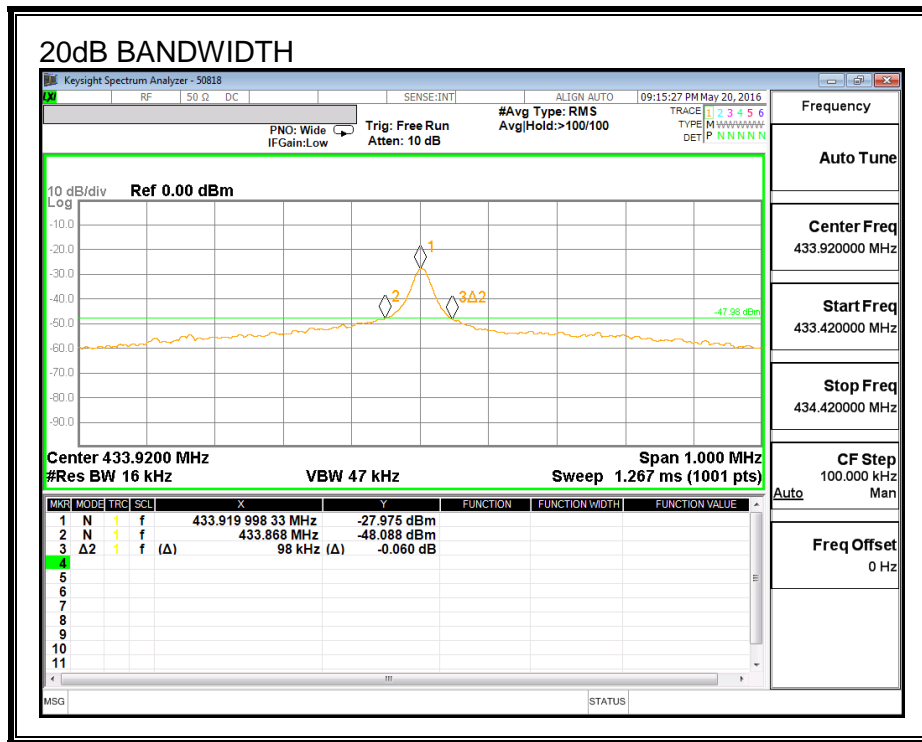

99% BANDWIDTH

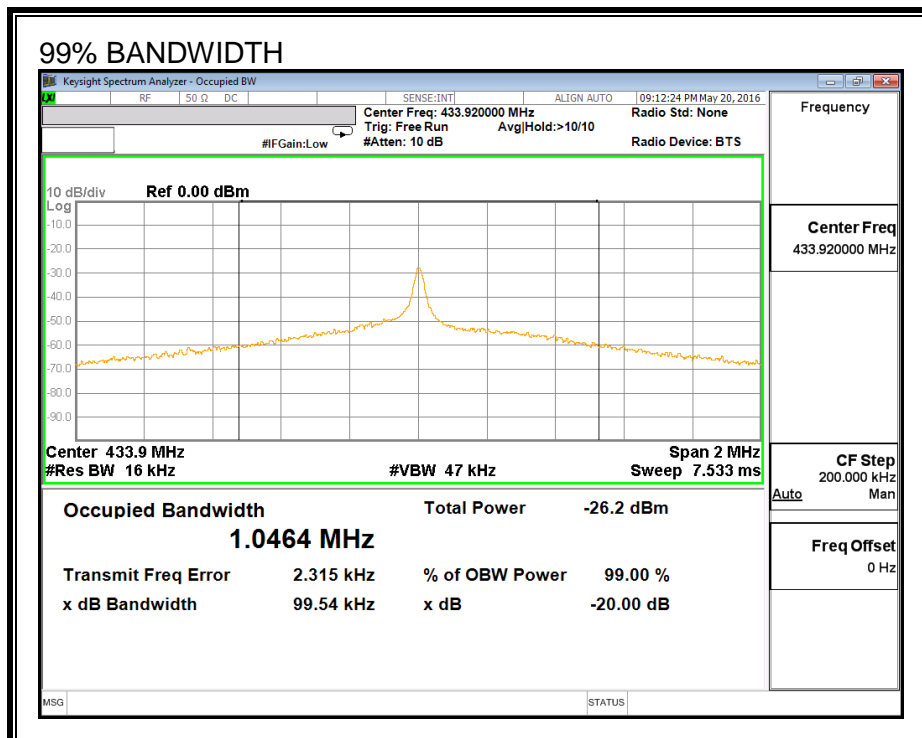

## 7.2. DUTY CYCLE

### LIMITS

FCC §15.35 (c)

The measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 1MHz and the VBW is set to 1MHz. The sweep time is coupled and the span is set to 0 Hz. The number of pulses is measured and calculated in a 100 ms scan.

### CALCULATION


Average Reading = Peak Reading (dBuV/m) + 20log (Duty Cycle), Where Duty Cycle is (# of long pulses \* long pulse width) + (# of short pulses \* short pulse width) / 100 or T

### RESULTS


No non-compliance noted:

One Period (ms)	Long Pulse Width (ms)	# of Long Pulses	Short Width (ms)	# of Short Pulses	Duty Cycle	20*Log Duty Cycle (dB)
100	0.250	15	0.125	50	0.100	-20.00


**ONE PERIOD**

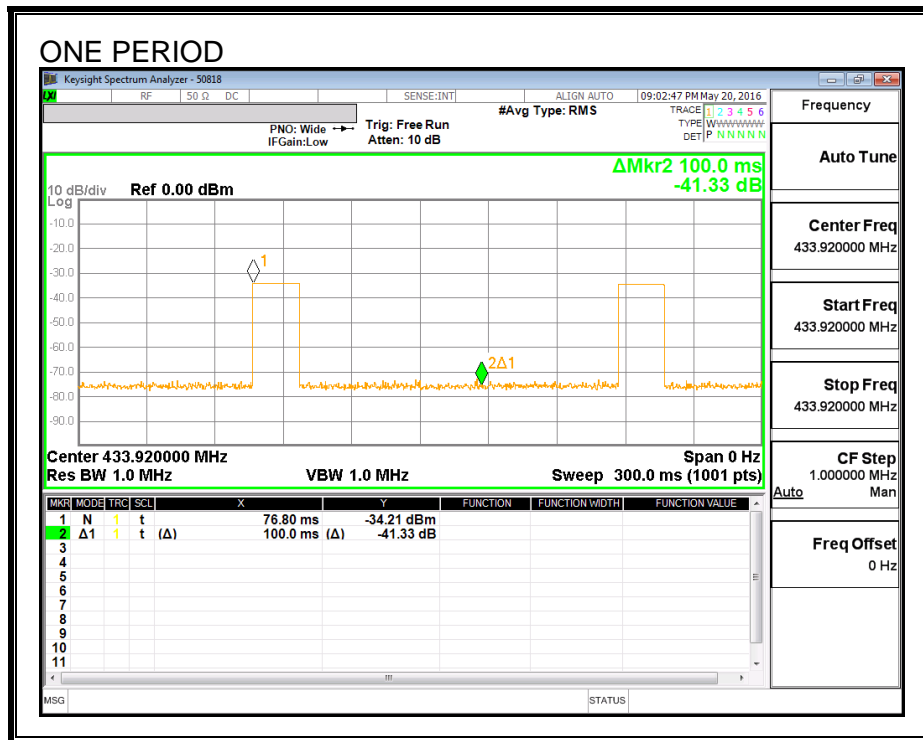

**LONG PULSE WIDTH**

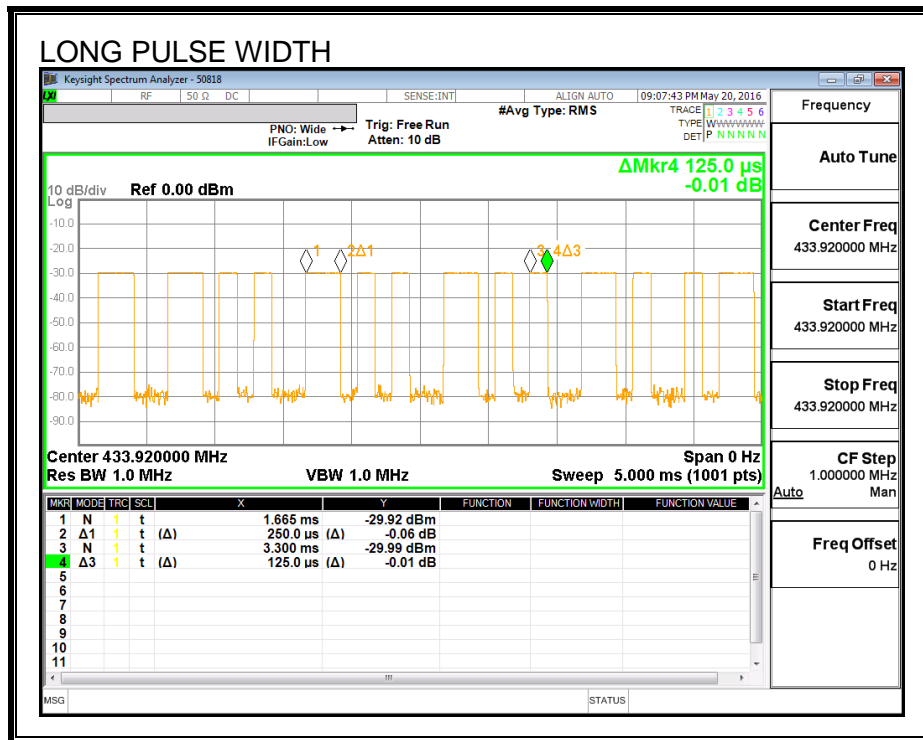


**NUMBER OF LONG PULSES**

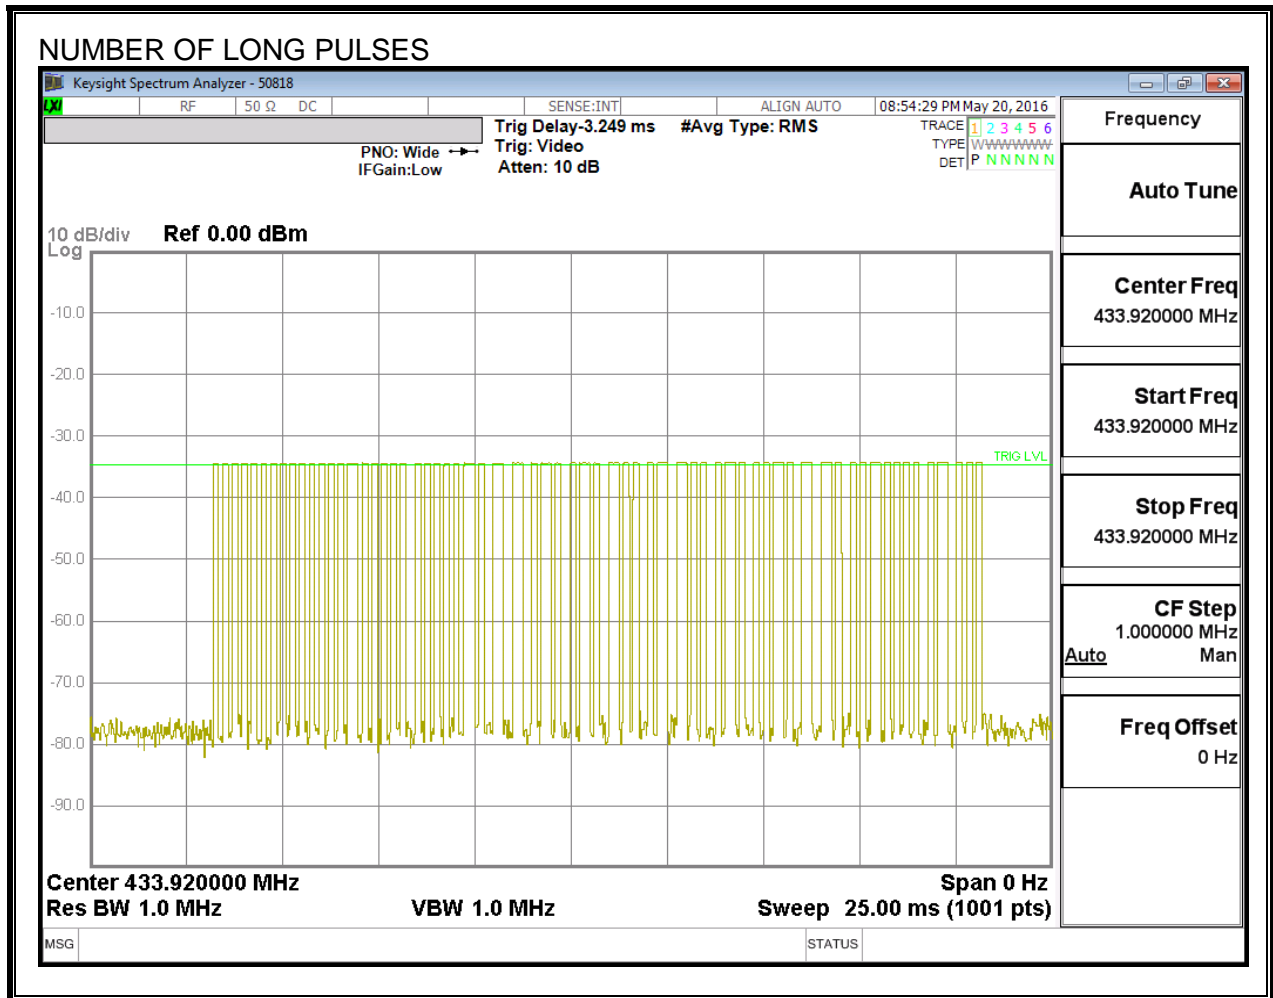




**SHORT PULSE WIDTH**

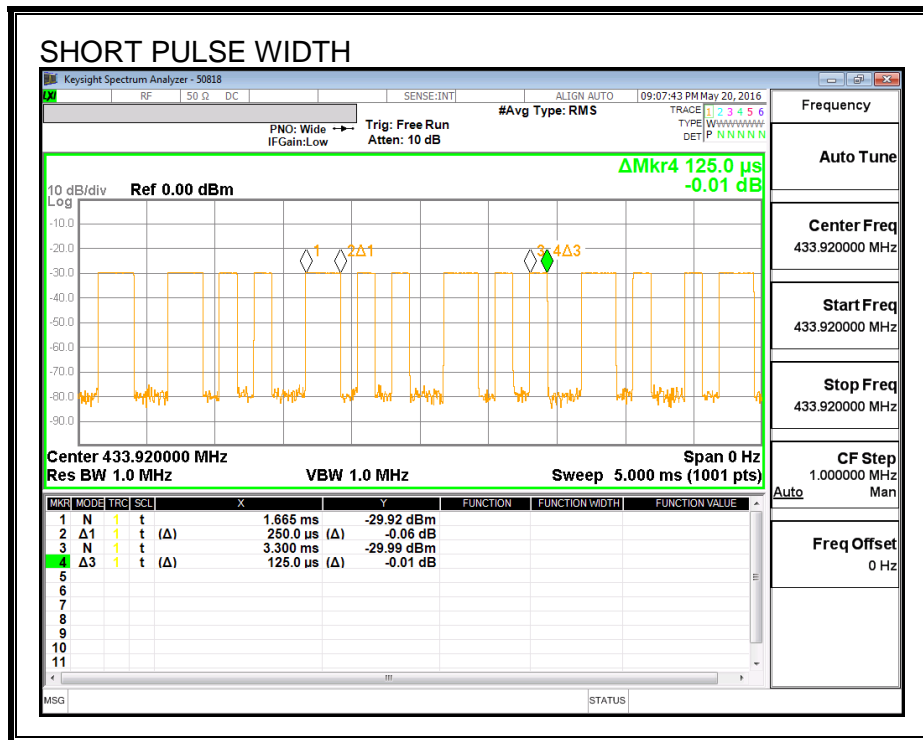

**NUMBER OF SHORT PULSES**

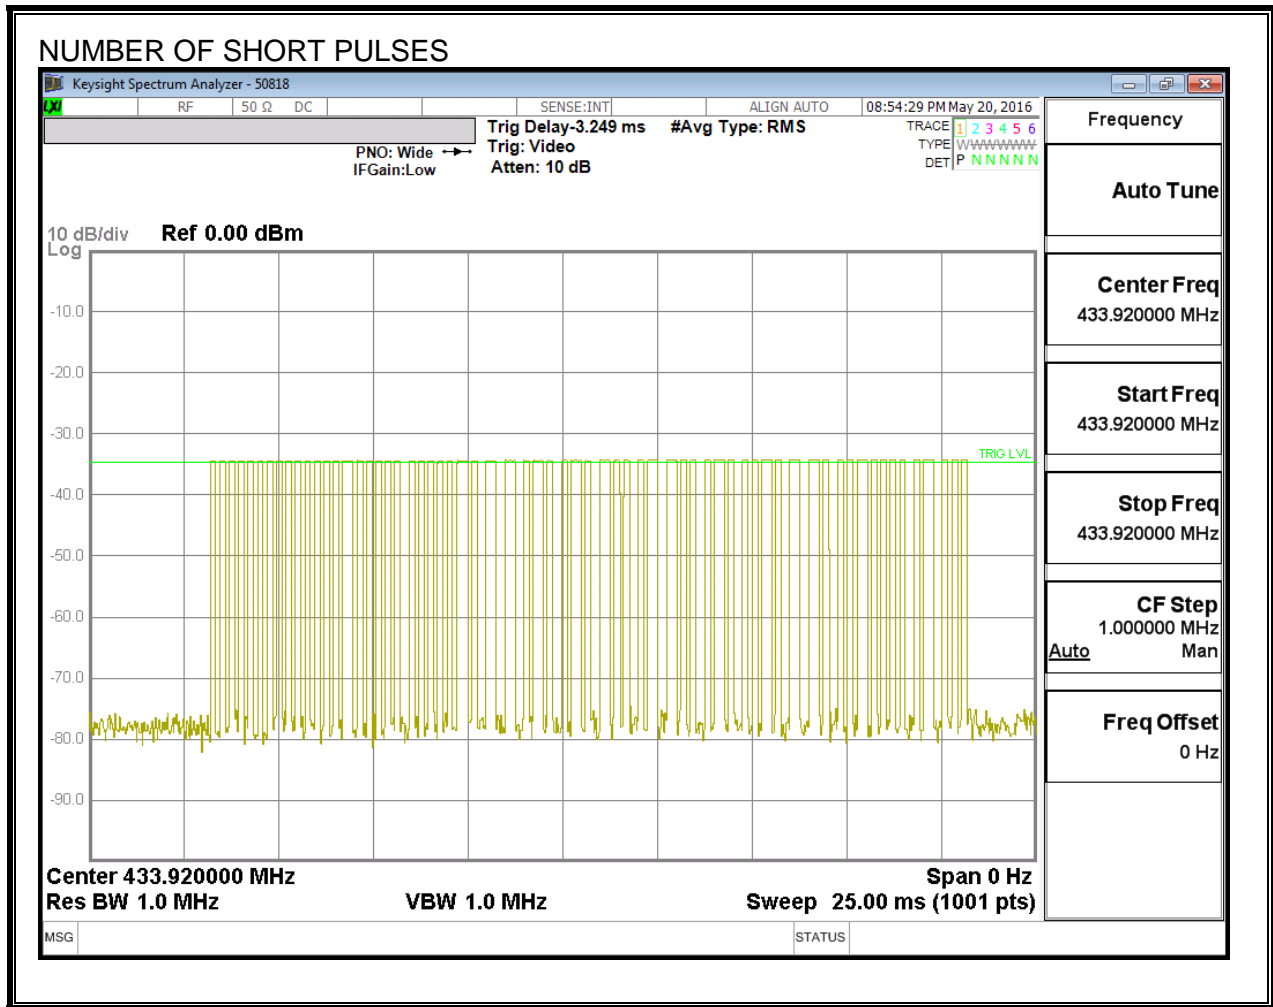

## 7.3. SUPERVISION TRANSMISSIONS

### LIMITS

FCC §15.35 (a) (3)

Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour

### Results

1. The periodic supervisory signal has the same bit period and duty cycle characteristics as the switch sensor signal.
2. According to manufacturer technical description, the device transmits brief supervisory signal at approximately 70 minutes intervals.
3. One pulse stream is  $0.25\text{ms} \times 15 + 0.125\text{ms} \times 50 = 10 \text{ ms}$ . Base on section 7.4 test plot, one transition contain 5 pulse streams which is  $10 \text{ ms} \times 5 = 50 \text{ ms}$
4. According to manufacturer technical description, the total amount of transmitter on time for supervisory signal does not exceed 2 seconds per hour.

## 7.4. TRANSMISSION TIME

### LIMITS

FCC §15.231 (a) (2)

IC A1.1.1 (b)


A transmitter activated automatically shall cease transmission within 5 seconds after activation.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 1MHz and the VBW is set to 1MHz. The sweep time is set to 10 seconds and the span is set to 0 Hz.

### RESULTS

No non-compliance noted:

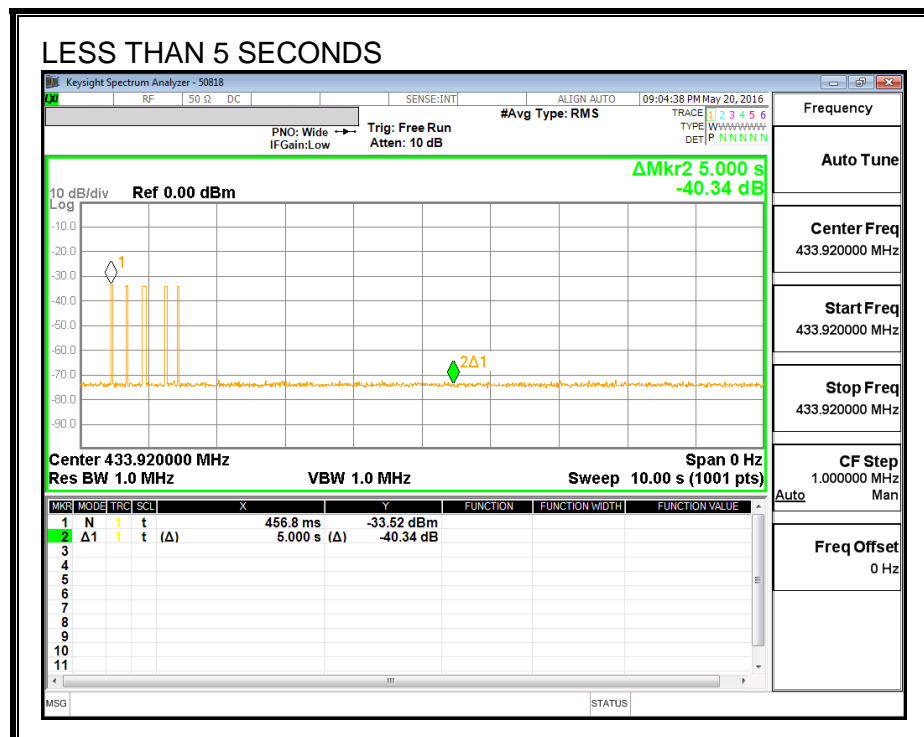

## 8. RADIATED EMISSION TEST RESULTS

### 8.1. TX RADIATED SPURIOUS EMISSION

#### LIMITS

FCC §15.231 (b)

IC A1.1.2

In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	<sup>1</sup> 1,250 to 3,750	<sup>1</sup> 125 to 375
174-260	3,750	375
260-470	<sup>1</sup> 3,750 to 12,500	<sup>1</sup> 375 to 1,250
Above 470	12,500	1,250

<sup>1</sup>Linear interpolation

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.  
 2 Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

quency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and apply DCCF for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## **RESULTS**

No non-compliance noted:

**FUNDAMENTAL, HARMONICS AND TX SPURIOUS EMISSION (30 – 1000 MHz)**

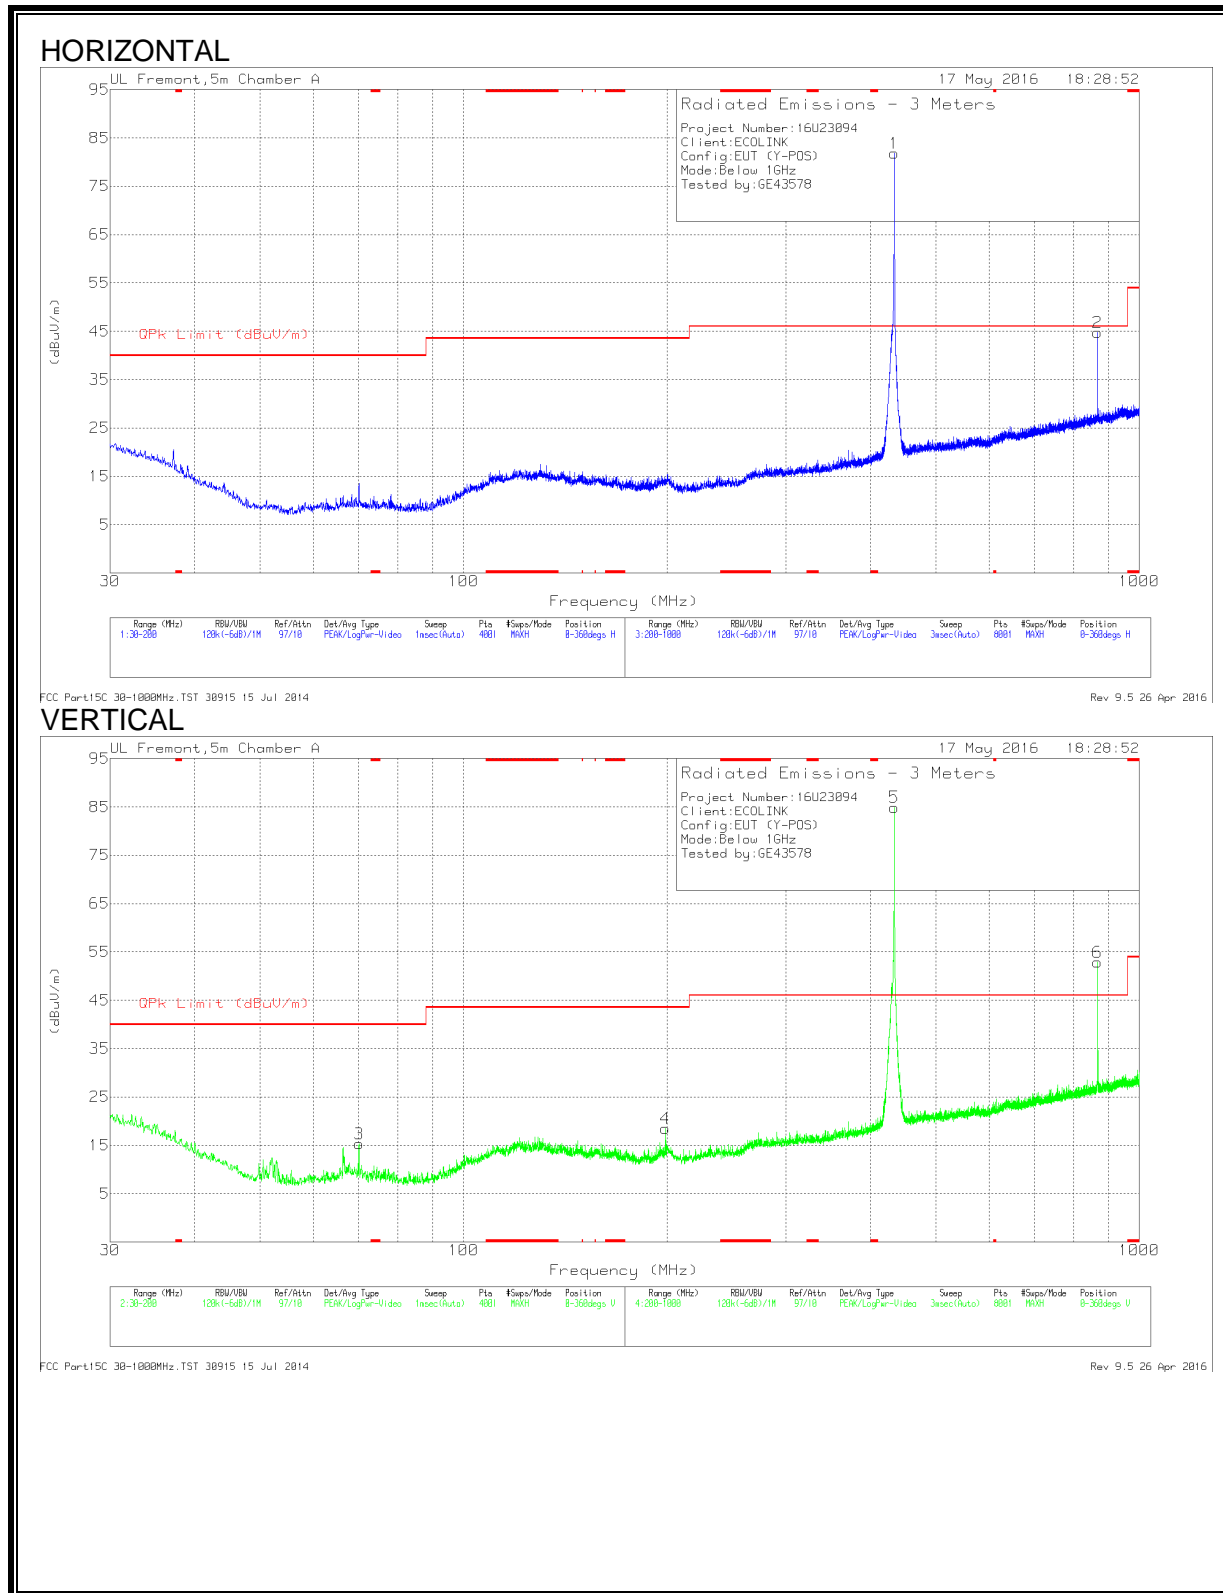



**BELOW 1GHZ RADIATED EMISSIONS**

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	70.035	34.17	Pk	11.9	-30.8	15.27	40	-24.73	0-360	100	V
4	199.065	32.01	Pk	16.4	-29.9	18.51	43.52	-25.01	0-360	100	V
1	433.9	90.18	Pk	20.6	-28.9	81.88			0-360	200	H
5	433.9	93.24	Pk	20.6	-28.9	84.94			0-360	200	V
2	867.8	46.37	Pk	26	-27.6	44.77	46.02	-1.25	0-360	100	H
6	867.9	54.47	Pk	26	-27.6	52.87			0-360	200	V

**FUNDAMENTAL AND HARMONICS SPURIOUS EMISSIONS**

Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	PK Limit (dBuV/m)	AVG Limit (dBuV/m)	PK Margin (dB)	AVG Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
433.88	92.23	Pk	20.6	-28.9	83.93	100.82	-	-16.89		218	172	H
		Av			63.93	-	80.82	-	-16.89	218	172	H
433.8568	98.02	Pk	20.6	-28.9	89.72	100.82	-	-11.1	-	305	137	V
		Av			69.72	-	80.82	-	-11.1	305	137	V
**867.86	47.79	Pk	26	-27.6	46.19	80.82		-34.63	-	297	101	H
		Av			26.19	-	60.82	-	-34.63	297	101	H
**867.9552	55.47	Pk	26	-27.6	53.87	80.82		-26.95	-	160	209	V
		Av			33.87	-	60.82	-	-26.95	160	209	V


\* Average Reading = Peak Reading (dBuV/m) + 20log (Duty Cycle), Where Duty Cycle is 0.1  
 (# of long pulses \* long pulse width) + (# of short pulses \* short pulse width) / 100 or T

Refer to section 7.2 for duty cycle factor calculation (-20dB)

Note: Radiated peak result is based on 100% duty cycle sample; average reading = peak reading + DCCF

\*\* Harmonics of fundamental 433.92MHz

**HARMONICS AND TX SPURIOUS EMISSIONS ABOVE 1GHZ**

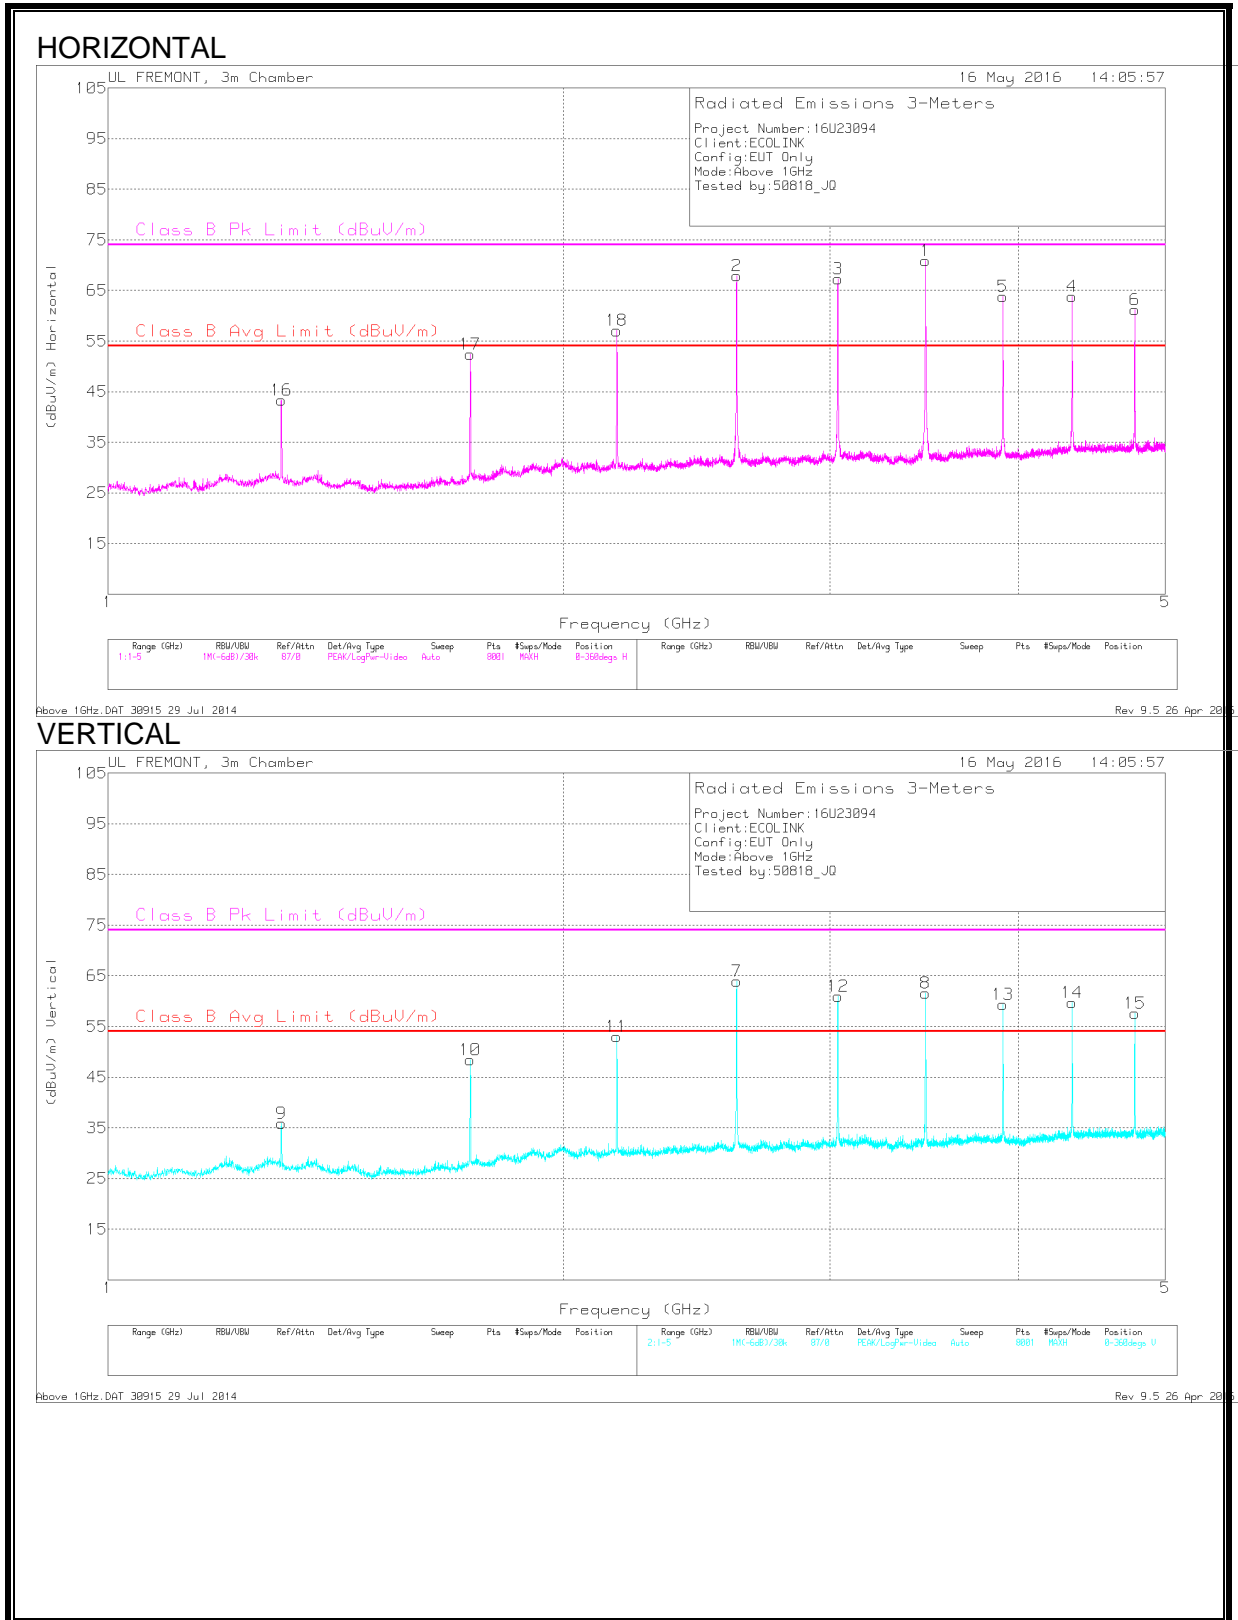

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl (dB)	Corrected Avg Reading (dBuV/m)	Class B Avg Limit (dBuV/m)	Av(CISPR) Margin (dB)	Corrected PK Reading (dBuV/m)	Class B Pk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.736	50.28	Pk	29.5	-30.7	-	-	-	49.08	80.82	-31.74	106	393	H
		Av			29.08	60.82	-31.74	-	-	-	106	393	H
1.736	54.96	Pk	29.5	-30.7	-	-	-	53.76	80.82	-27.06	5	324	V
		Av			33.76	60.82	-27.06	-	-	-	5	324	V
2.169	56.96	Pk	31.7	-30.3	-	-	-	58.36	80.82	-22.46	342	361	V
		Av			38.36	60.82	-22.46	-	-	-	342	361	V
2.17	52.22	Pk	31.7	-30.3	-	-	-	53.62	80.82	-27.20	192	195	H
		Av			33.62	60.82	-27.20	-	-	-	192	195	H
2.603	66.1	Pk	32.3	-30.1	-	-	-	68.3	80.82	-12.52	73	174	H
		Av			48.3	60.82	-12.52	-	-	-	73	174	H
2.603	62.39	Pk	32.3	-30.1	-	-	-	64.59	80.82	-16.23	243	357	V
		Av			44.59	60.82	-16.23	-	-	-	243	357	V
3.037	64.24	Pk	32.9	-29.6	-	-	-	67.54	80.82	-13.28	101	115	H
		Av			47.54	60.82	-13.28	-	-	-	101	115	H
3.037	63.5	Pk	32.9	-29.6	-	-	-	66.8	80.82	-14.02	149	101	V
		Av			46.8	60.82	-14.02	-	-	-	149	101	V
3.471	68.55	Pk	32.7	-29.2	-	-	-	72.05	80.82	-8.77	109	100	H
		Av			52.05	60.82	-8.77	-	-	-	109	100	H
3.471	60.02	Pk	32.7	-29.2	-	-	-	63.52	80.82	-17.30	316	396	V
		Av			43.52	60.82	-17.30	-	-	-	316	396	V
*1.302	46.13	Pk	29.9	-31.4	-	-	-	44.63	74	-29.37	110	151	H
		Av			24.63	54	-29.37	-	-	-	110	151	H
*1.302	47.48	Pk	29.9	-31.4	-	-	-	45.98	74	-28.02	248	202	V
		Av			25.98	54	-28.02	-	-	-	248	202	V
*3.905	61.83	Pk	33	-29.3	-	-	-	65.53	74	-8.47	125	100	H
		Av			45.53	54	-8.47	-	-	-	125	100	H
*3.905	63.03	Pk	33	-29.3	-	-	-	66.73	74	-7.27	344	288	V
		Av			46.73	54	-7.27	-	-	-	344	288	V
*4.339	59.11	Pk	33.8	-28.5	-	-	-	64.41	74	-9.59	78	101	H
		Av			44.41	54	-9.59	-	-	-	78	101	H
*4.339	60.57	Pk	33.8	-28.5	-	-	-	65.87	74	-8.13	352	241	V
		Av			45.87	54	-8.13	-	-	-	352	241	V
*4.773	56.08	Pk	34.2	-28.1	-	-	-	62.18	74	-11.82	75	100	H
		Av			42.18	54	-11.82	-	-	-	75	100	H
*4.774	58.78	Pk	34.2	-28.1	-	-	-	64.88	74	-9.12	24	308	V
		Av			44.88	54	-9.12	-	-	-	24	308	V

Pk - Peak detector

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Average Reading = Peak Reading (dBuV/m) + 20log (Duty Cycle), Where Duty Cycle is (# of long pulses \* long pulse width) + (# of short pulses \* short pulse width) / 100 or T  
 Refer to section 7.2 for duty cycle factor calculation (-20dB)

Note: Radiated peak result is based on 100% duty cycle sample; average reading = peak reading + DCCF

RBW = 1MHz, VBW = 3MHz for the final Peak and Average readings

Above 1GHz.DAT 30915 29 Jul 2014  
 Rev 9.5 26 Apr 2016

**BELOW 30MHz**

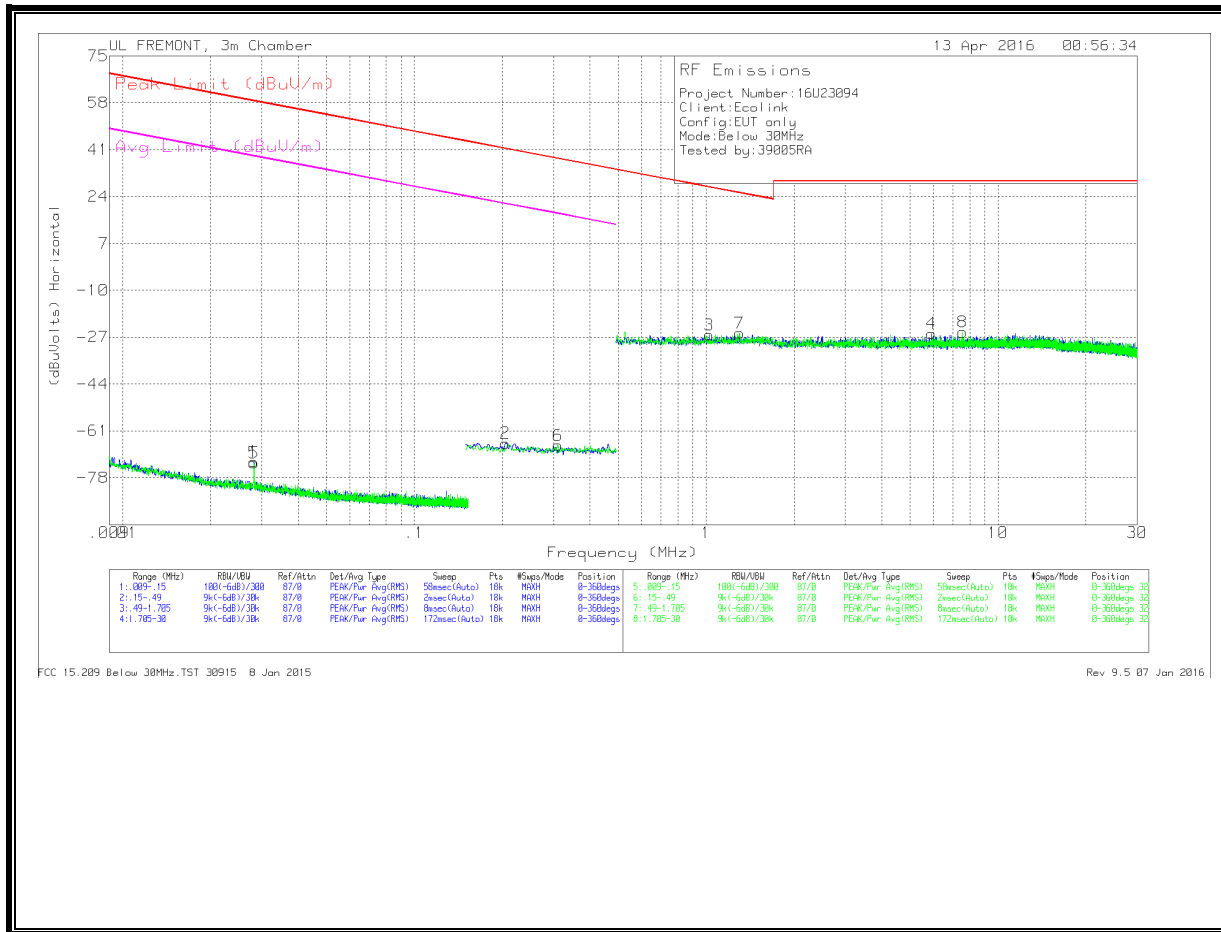

**BELOW 1GHZ RADIATED EMISSIONS**

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.02821	-7.97	Pk	14.4	1.4	-80	-72.17	58.6	-130.77	38.6	-110.77	0-360
5	.02822	-8.38	Pk	14.4	1.4	-80	-72.58	58.59	-131.17	38.59	-111.17	0-360
2	.20532	2.55	Pk	10.5	1.5	-80	-65.45	41.36	-106.81	21.36	-86.81	0-360
6	.31024	2.07	Pk	10.2	1.5	-80	-66.23	37.77	-104	17.77	-84	0-360

Pk - Peak detector

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 30m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
3	1.02429	1.86	Pk	10.4	1.5	-40	-26.24	27.4	-53.64	-	-	0-360
7	1.30077	2.52	Pk	10.4	1.5	-40	-25.58	25.32	-50.9	-	-	0-360
4	5.91796	2.34	Pk	10.5	1.5	-40	-25.66	29.54	-55.2	-	-	0-360
8	7.55756	2.85	Pk	10.5	1.5	-40	-25.15	29.54	-54.69	-	-	0-360

Pk - Peak detector