

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-22O-RWD-046
Reception No. : 2210003337
Applicant : ROBOTIS
Address : 37, Magokjungang 5-ro 1-gil, Gangseo-gu, Seoul, South Korea
Manufacturer : ROBOTIS
Address : 37, Magokjungang 5-ro 1-gil, Gangseo-gu, Seoul, South Korea
Type of Equipment : Controller
FCC ID. : SOD-RB-88
Model Name : RB-88
Multiple Model Name : RB-86
Serial number : N/A
Total page of Report : 32 pages (including this page)
Date of Incoming : October 21, 2022
Date of issue : October 28, 2022

SUMMARY


The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

This report is not correlated with the "KS Q ISO/IEC 17025 and KOLAS accreditation" of Korean Laboratory Accreditation Scheme.



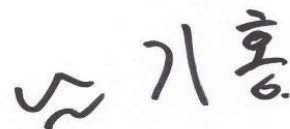

Tested by
 Joon-Woo, Kim / Assistant Manager
 ONETECH Corp.

Reviewed by
 Tae-Ho, Kim / General Manager
 ONETECH Corp.

Approved by
 Ki-Hong, Nam / General Manager
 ONETECH Corp.

CONTENTS**PAGE**

| | |
|--|-----------|
| 1. VERIFICATION OF COMPLIANCE | 5 |
| 2. TEST SUMMARY..... | 6 |
| 2.1 TEST ITEMS AND RESULTS | 6 |
| 2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS..... | 6 |
| 2.3 RELATED SUBMITTAL(S) / GRANT(S) | 6 |
| 2.4 PURPOSE OF THE TEST | 6 |
| 2.5 TEST METHODOLOGY..... | 6 |
| 2.6 TEST FACILITY..... | 6 |
| 3. GENERAL INFORMATION..... | 7 |
| 3.1 PRODUCT DESCRIPTION..... | 7 |
| 3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT..... | 7 |
| 4. EUT MODIFICATIONS..... | 7 |
| 5. SYSTEM TEST CONFIGURATION | 8 |
| 5.1 JUSTIFICATION..... | 8 |
| 5.2 PERIPHERAL EQUIPMENT | 8 |
| 5.3 MODE OF OPERATION DURING THE TEST | 8 |
| 5.4 CONFIGURATION OF TEST SYSTEM..... | 10 |
| 5.5 ANTENNA REQUIREMENT | 10 |
| 6. PRELIMINARY TEST | 10 |
| 6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS..... | 10 |
| 6.2 GENERAL RADIATED EMISSIONS TESTS | 10 |
| 7. MINIMUM 6 DB BANDWIDTH..... | 11 |
| 7.1 OPERATING ENVIRONMENT | 11 |
| 7.2 TEST SET-UP | 11 |
| 7.3 TEST DATE | 11 |
| 7.4 TEST DATA FOR 1 MBPS..... | 12 |
| 8. MAXIMUM PEAK OUTPUT POWER..... | 14 |
| 8.1 OPERATING ENVIRONMENT | 14 |
| 8.2 TEST SET-UP | 14 |
| 8.3 TEST DATE | 14 |
| 8.4 TEST DATA FOR 1 MBPS..... | 15 |
| 9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND..... | 17 |

| | |
|---|-----------|
| 9.1 OPERATING ENVIRONMENT | 17 |
| 9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT | 17 |
| 9.3 TEST SET-UP FOR RADIATED MEASUREMENT..... | 17 |
| 9.4 TEST DATE | 17 |
| 9.5 TEST DATA FOR CONDUCTED EMISSION | 18 |
| 9.5.1 TEST DATA FOR 1 MBPS | 18 |
| 9.6 TEST DATA FOR RADIATED EMISSION..... | 23 |
| 9.6.1 Radiated Emission which fall in the Restricted Band..... | 23 |
| 9.6.2 Spurious & Harmonic Radiated Emission..... | 24 |
| 10. PEAK POWER SPECTRAL DENSITY | 25 |
| 10.1 OPERATING ENVIRONMENT | 25 |
| 10.2 TEST SET-UP | 25 |
| 10.3 TEST DATE | 25 |
| 10.4 TEST DATA FOR 1 MBPS | 26 |
| 11. RADIATED EMISSION TEST | 28 |
| 11.1 OPERATING ENVIRONMENT | 28 |
| 11.2 TEST SET-UP | 28 |
| 11.3 TEST DATE | 29 |
| 11.4 TEST DATA FOR 30 MHz ~ 1 000 MHz | 30 |
| 11.5 TEST DATA FOR BELOW 30 MHz | 31 |
| 11.6 TEST DATA FOR ABOVE 1 GHz | 31 |
| 12. LIST OF TEST EQUIPMENT | 32 |

Revision History

| Rev. No. | Issue Report No. | Issued Date | Revisions | Section Affected |
|----------|------------------|------------------|-----------------|------------------|
| 0 | OT-22O-RWD-046 | October 28, 2022 | Initial Release | All |
| | | | | |
| | | | | |

1. VERIFICATION OF COMPLIANCE

Applicant : ROBOTIS
 Address : 37, Magokjungang 5-ro 1-gil, Gangseo-gu, Seoul, South Korea
 Contact Person : Eunsung Lee / Research Engineer
 Telephone No. : +82-70-8671-2600
 FCC ID : SOD-RB-88
 Model Name : RB-88
 Brand Name : -
 Serial Number : N/A
 Date : October 28, 2022

| | |
|--|--|
| EQUIPMENT CLASS | DTS – DIGITAL TRNSMISSION SYSTEM |
| E.U.T. DESCRIPTION | Controller |
| THIS REPORT CONCERNS | Original Grant |
| MEASUREMENT PROCEDURES | ANSI C63.10: 2013 |
| TYPE OF EQUIPMENT TESTED | Pre-Production |
| KIND OF EQUIPMENT AUTHORIZATION REQUESTED | Certification |
| EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S) | FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02 |
| Modifications on the Equipment to Achieve Compliance | None |
| Final Test was Conducted On | 3 m, Semi Anechoic Chamber |

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

| SECTION | TEST ITEMS | RESULTS |
|----------------|---|------------------------|
| 15.247 (a) (2) | Minimum 6 dB Bandwidth | Met the Limit / PASS |
| 15.247 (b) (3) | Maximum Peak Conducted Output Power | Met the Limit / PASS |
| 15.247 (d) | 100 kHz Bandwidth Outside the Frequency Band | Met the Limit / PASS |
| 15.247 (d) | Radiated Emission which fall in the Restricted Band | Met the Limit / PASS |
| 15.247 (e) | Peak Power Spectral Density | Met the Limit / PASS |
| 15.209 | Radiated Emission Limits | Met the Limit / PASS |
| 15.207 | Conducted Limits | N/A (See Note) |
| 15.203 | Antenna Requirement | Met requirement / PASS |

Note: This test is not performed because the EUT is operated by DC Power.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The ROBOTIS, Model RB-88 (referred to as the EUT in this report) is a Controller. The product specification described herein was obtained from product data sheet or user’s manual.

| | |
|--|-----------------------|
| Device Type | Controller |
| Temperature Range | -5 °C ~ +70 °C |
| Operating Frequency | 2 402 MHz ~ 2 480 MHz |
| RF Output Power | -0.22 dBm |
| Number of Channel | 40 Channel |
| Modulation Type | DSSS Modulation(GFSK) |
| Antenna Type | PCB Antenna |
| Antenna Gain | -2.23 dBi |
| Electrical Rating | DC 4.50 V |
| List of each Osc. or crystal Freq.(Freq. >= 1 MHz) | 16 MHz |

3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

| Model Name | Differences | Tested |
|------------|---|-------------------------------------|
| RB-88 | Basic Model | <input checked="" type="checkbox"/> |
| RB-86 | The model is identical to basic model except for the model name only. | <input type="checkbox"/> |

Note: 1. Applicant consigns only basic model to test. Therefore this test report just guarantees the units, which have been tested.

2. The Applicant/manufacturer is responsible for the compliance of all variants.

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

| DEVICE TYPE | MANUFACTURER | MODEL/PART NUMBER | FCC ID |
|-------------|--------------|---------------------|--------|
| Main Board | ROBOTIS | DC20-G01-E001(REV7) | N/A |
| Motor | N/A | N/A | N/A |

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

| Model | Manufacturer | Description | Connected to |
|----------|--------------|------------------|--------------|
| RB-88 | ROBOTIS | Controller (EUT) | - |
| PROBOOK | LG | Notebook PC | Test JIG |
| Test JIG | N/A | N/A | EUT |

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.

- . Frequency / Channel Operations

| Channel | Frequency |
|---------|-----------|
| 0 | 2 402 |
| 19 | 2 440 |
| 39 | 2 480 |


- Duty Cycle

| Mode | Tx On Time [ms] | Tx Off Time [ms] | Duty Cycle [%] | Correction Factor [dB] |
|----------------------------|----------------------|-----------------------|---------------------|-----------------------------|
| Bluetooth LE [1 Mbps] | 0.39 | 0.62 | 62.50 | 2.04 |

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

- Test Plot

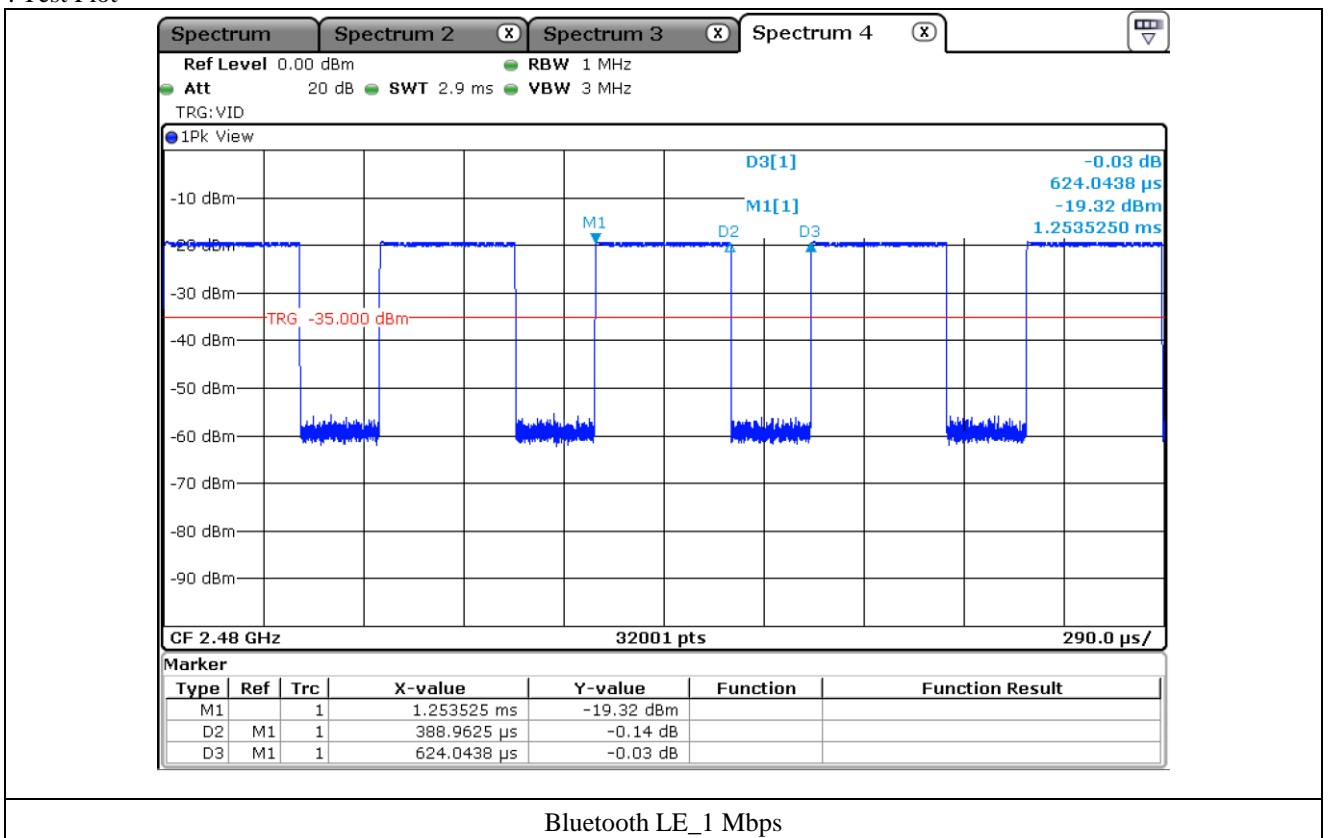

5.4 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC Power.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a PCB Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

| Operation Mode | The Worse operating condition (Please check one only) |
|--|---|
| It is not need to test this requirement, because the power of the EUT is supplied by DC Power. | |

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

| Operation Mode | The Worse operating condition (Please check one only) |
|-------------------|---|
| Transmitting Mode | X |


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 23.1 °C
 Relative humidity : 49.6 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

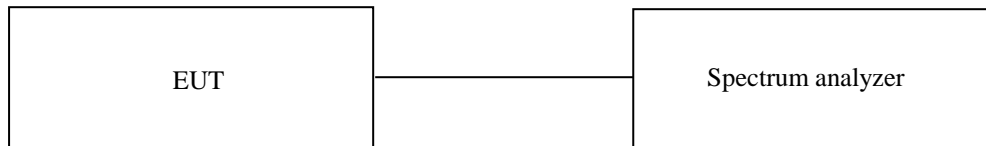


7.3 Test Date


October 26, 2022

7.4 Test data for 1 Mbps


| CHANNEL | FREQUENCY(MHz) | MEASURED VALUE (kHz) | LIMIT (kHz) | MARGIN (kHz) |
|---------|----------------|----------------------|-------------|--------------|
| Low | 2 402.00 | 714.30 | 500.00 | 214.30 |
| Middle | 2 440.00 | 709.30 | 500.00 | 209.30 |
| High | 2 480.00 | 714.30 | 500.00 | 214.30 |

Remark. Margin = Measured Value - Limit

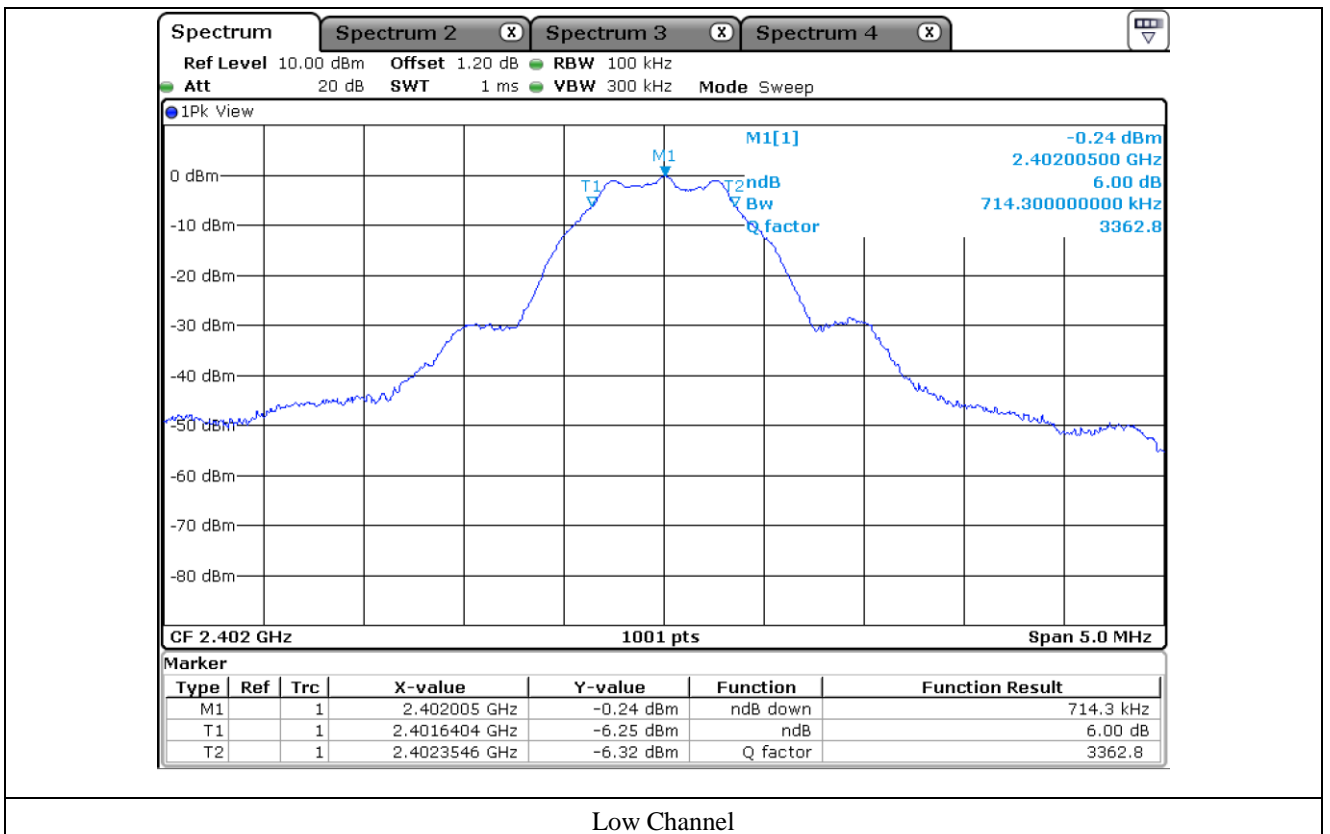

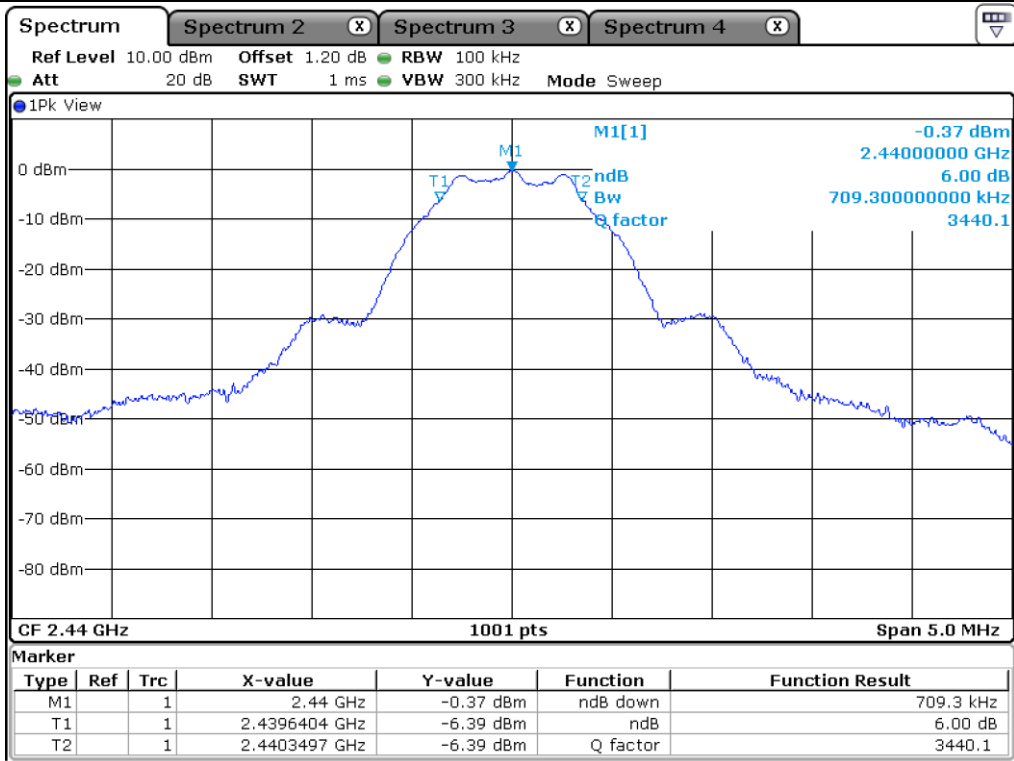

Middle Channel

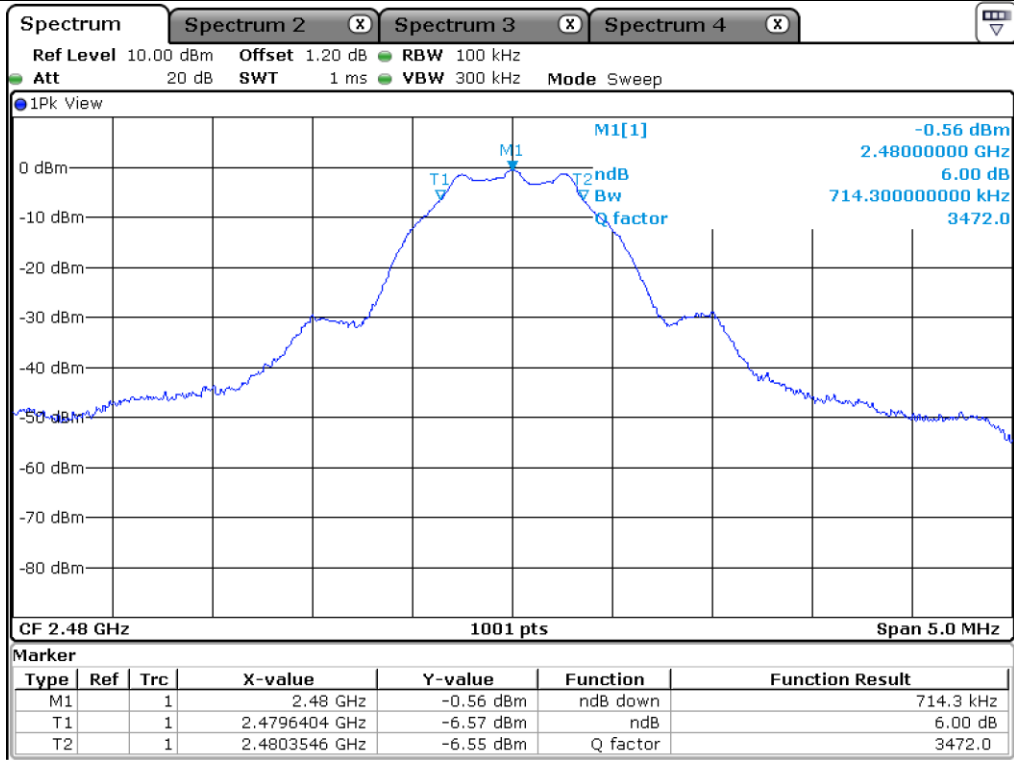

High Channel

8. MAXIMUM PEAK OUTPUT POWER


8.1 Operating environment

Temperature : 23.1 °C
 Relative humidity : 49.6 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to \geq DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

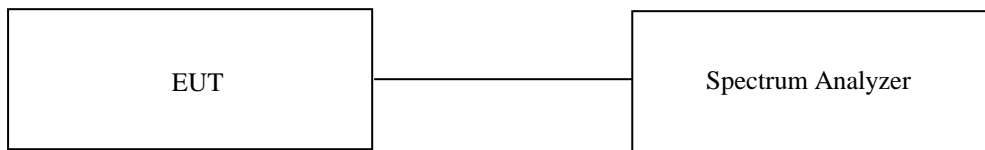

8.3 Test Date


October 26, 2022


8.4 Test data for 1 Mbps

-. Test Result : Pass


| CHANNEL | FREQUENCY (MHz) | MEASURED VALUE (dBm) | LIMIT (dBm) | MARGIN (dB) |
|---------|-----------------|----------------------|-------------|-------------|
| LOW | 2 402.00 | -0.22 | 30.00 | 30.22 |
| MIDDLE | 2 440.00 | -0.34 | 30.00 | 30.34 |
| HIGH | 2 480.00 | -0.52 | 30.00 | 30.52 |

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

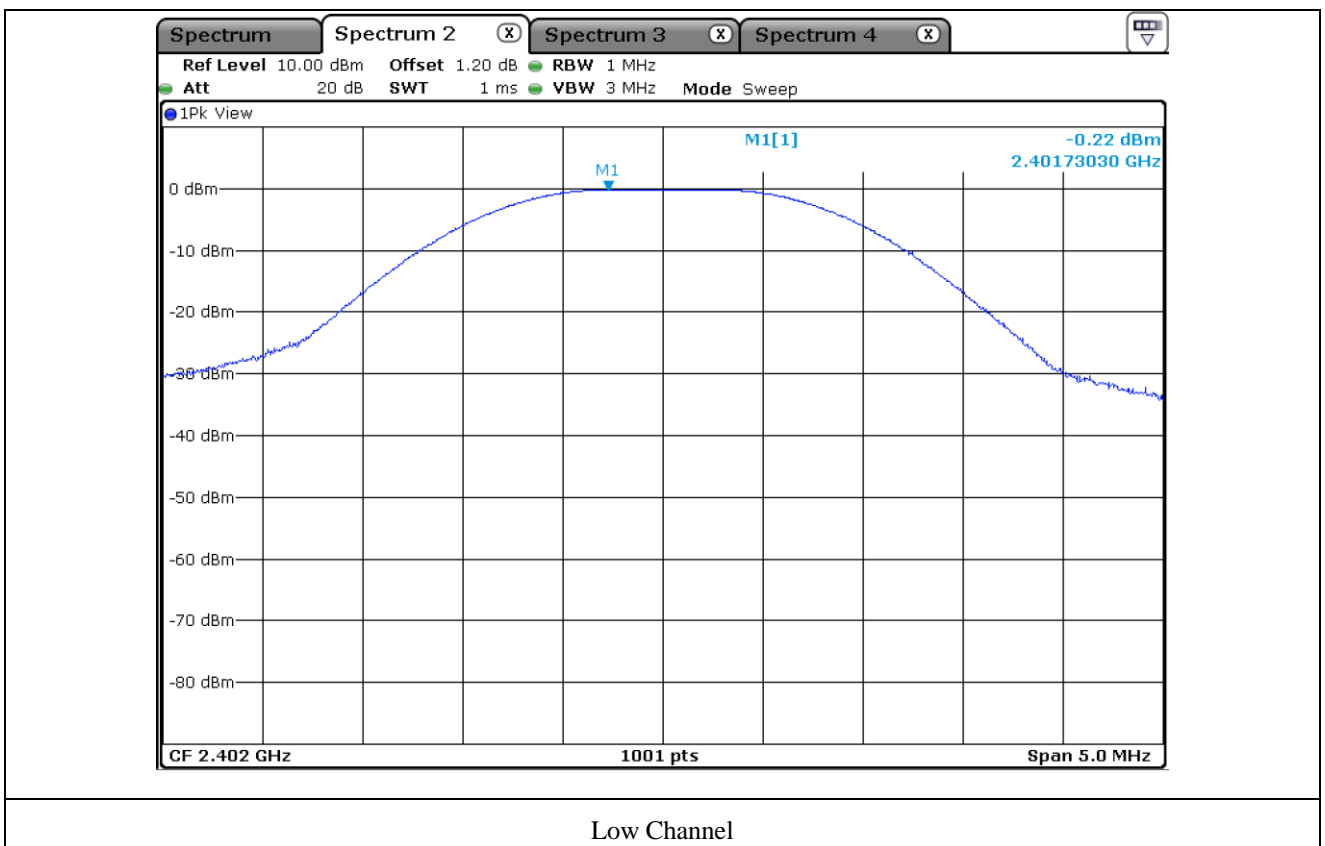

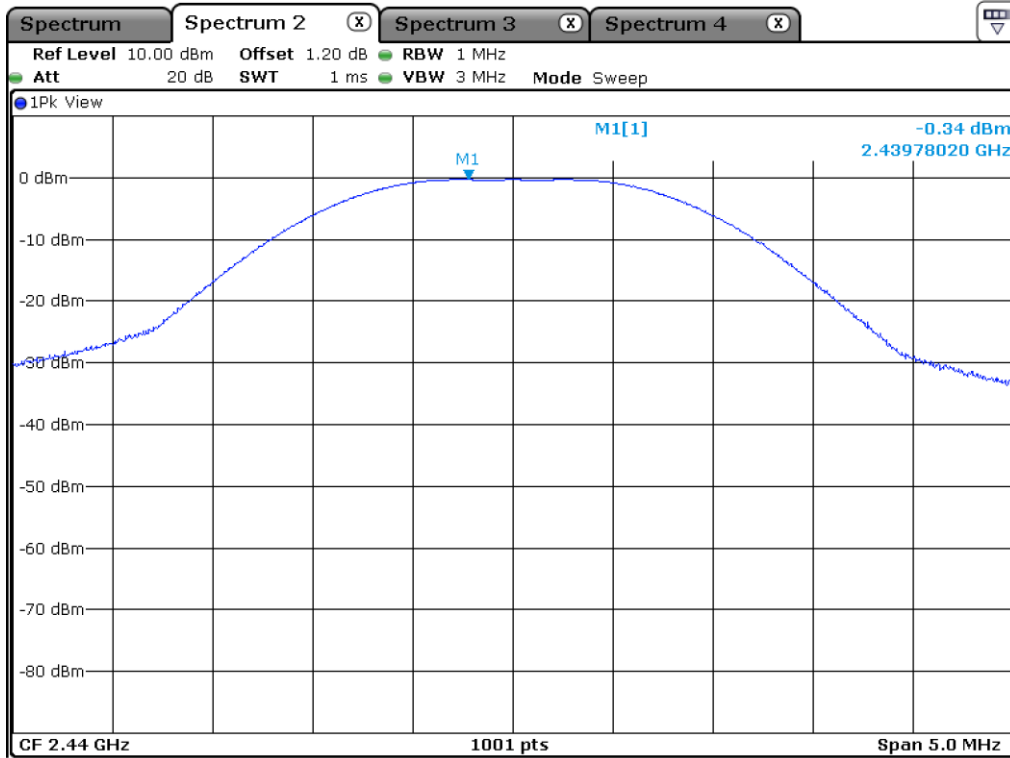

Middle Channel

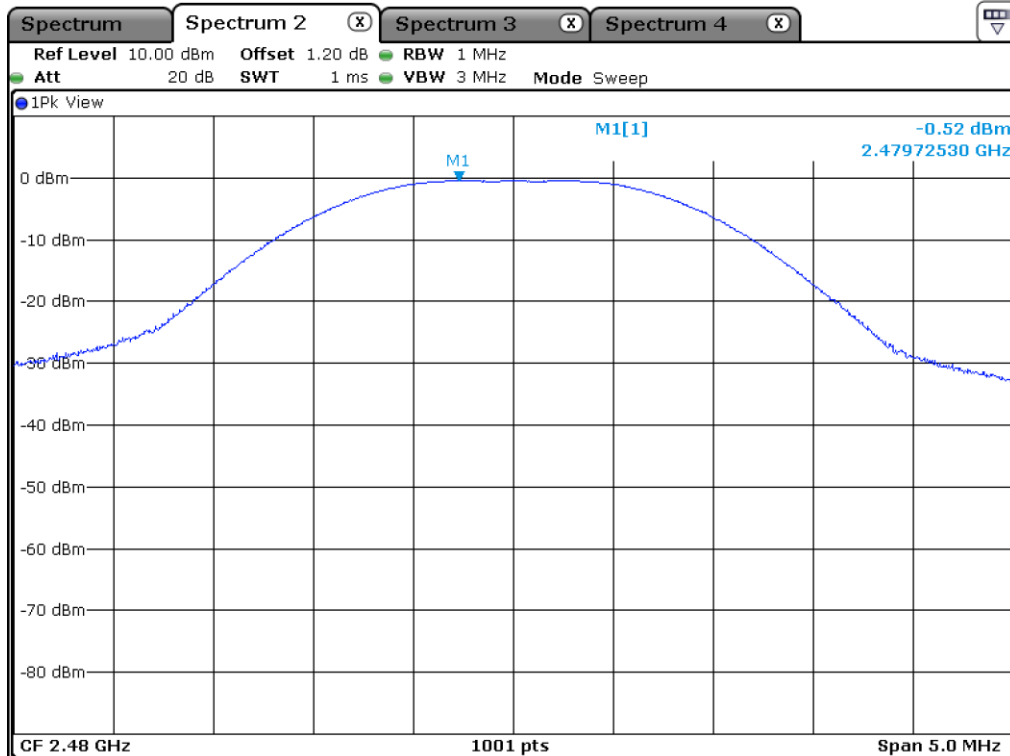

High Channel


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 23.1 °C
 Relative humidity : 49.6 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, the video bandwidth is set to 3 times the resolution bandwidth and peak detection was used.

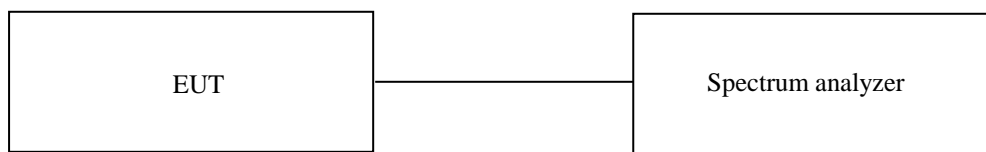

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Test Date


October 26, 2022

9.5 Test data for conducted emission


9.5.1 Test data for 1 Mbps

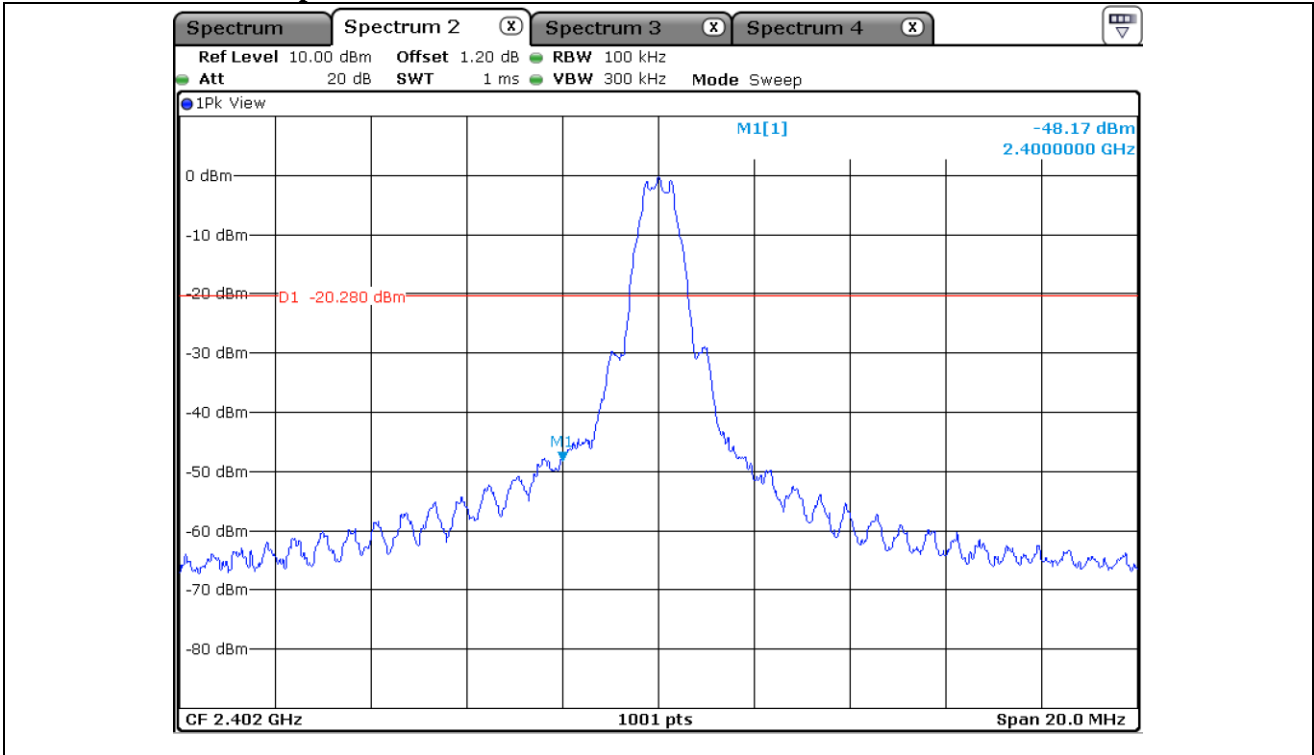


Low Channel

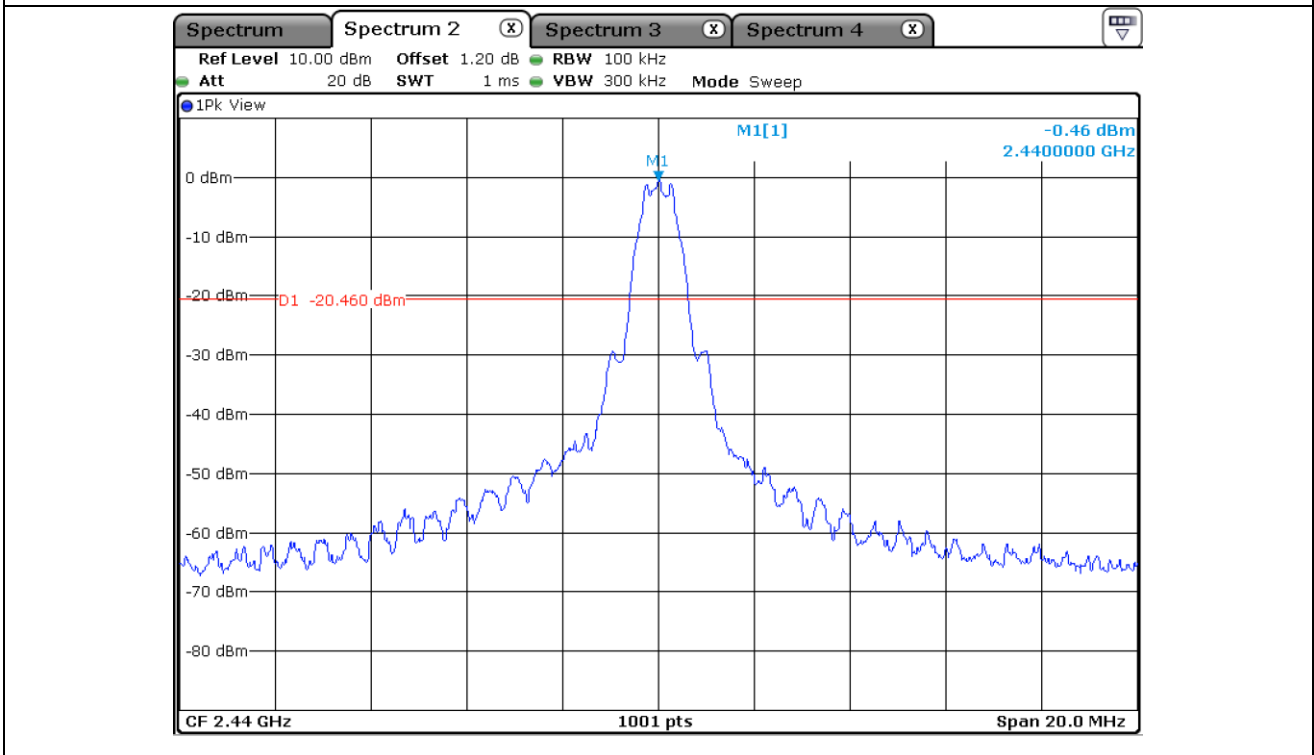


Middle Channel

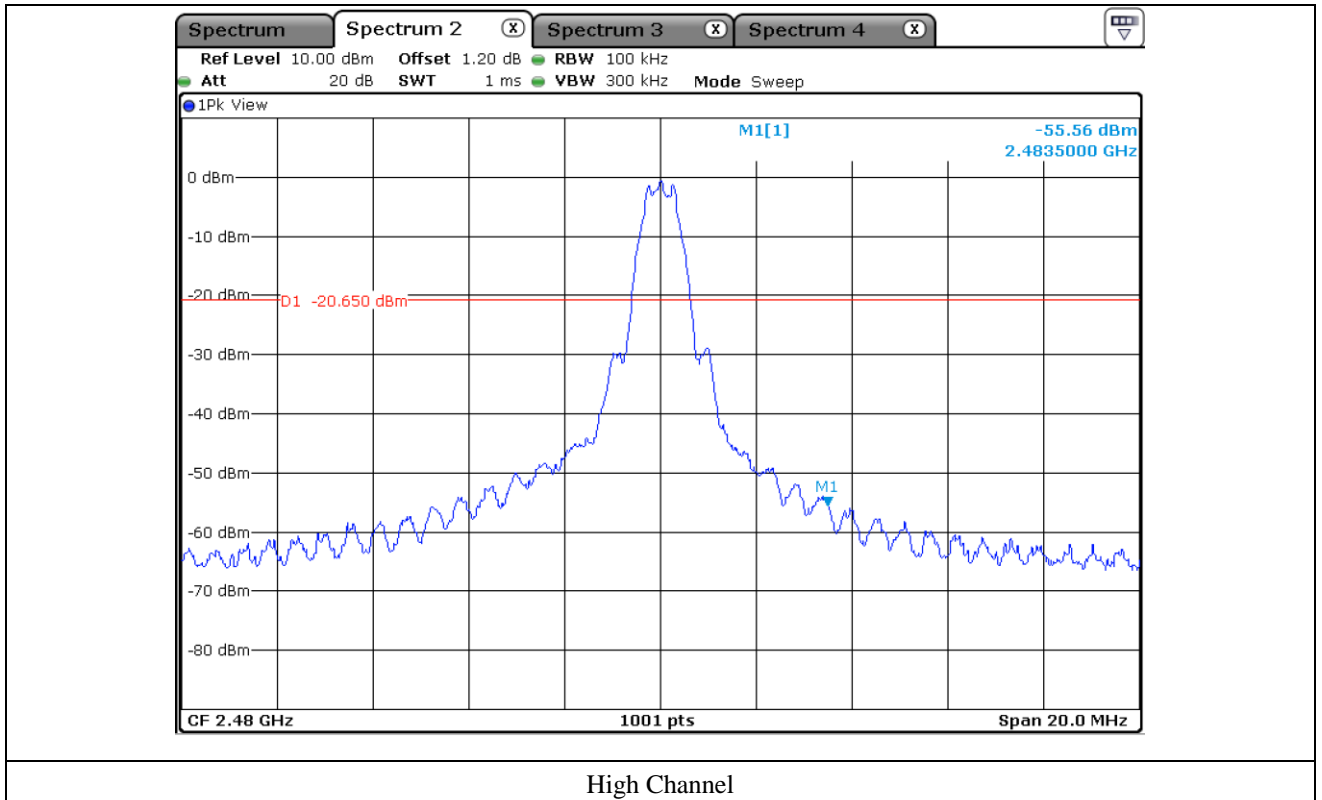


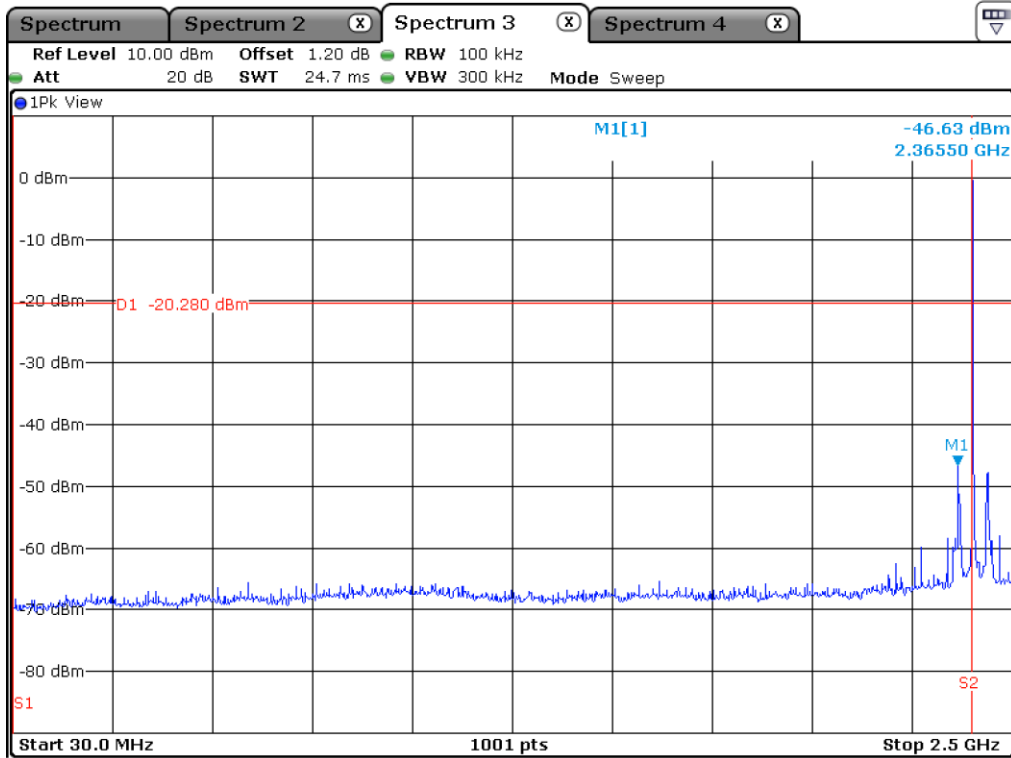


Low Channel

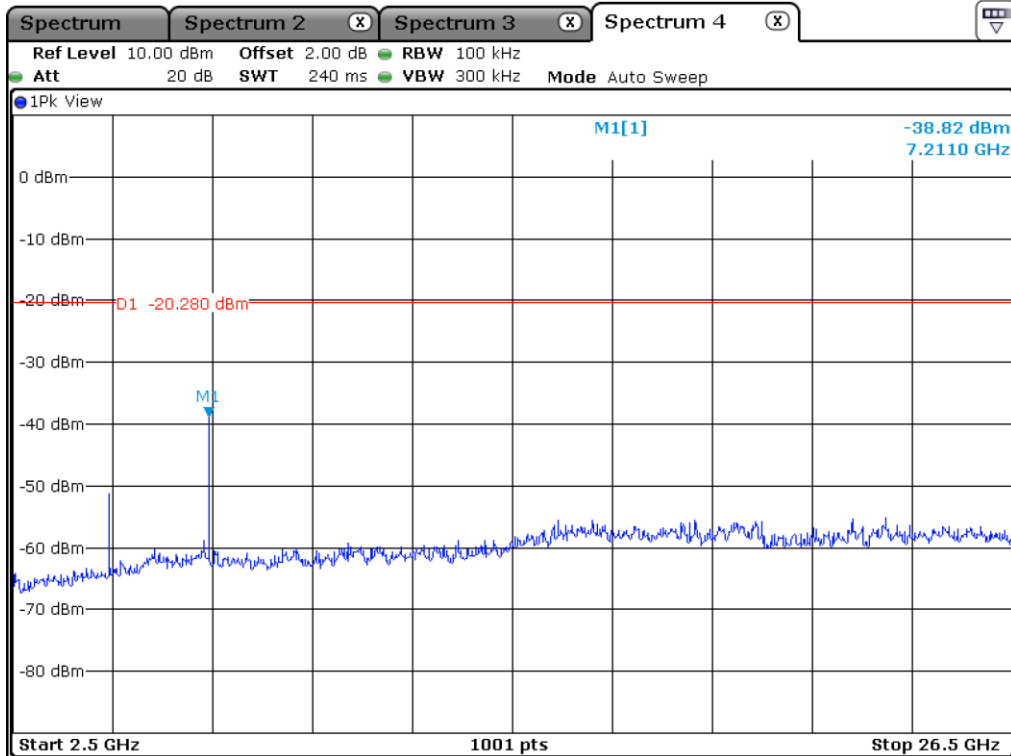


Low Channel

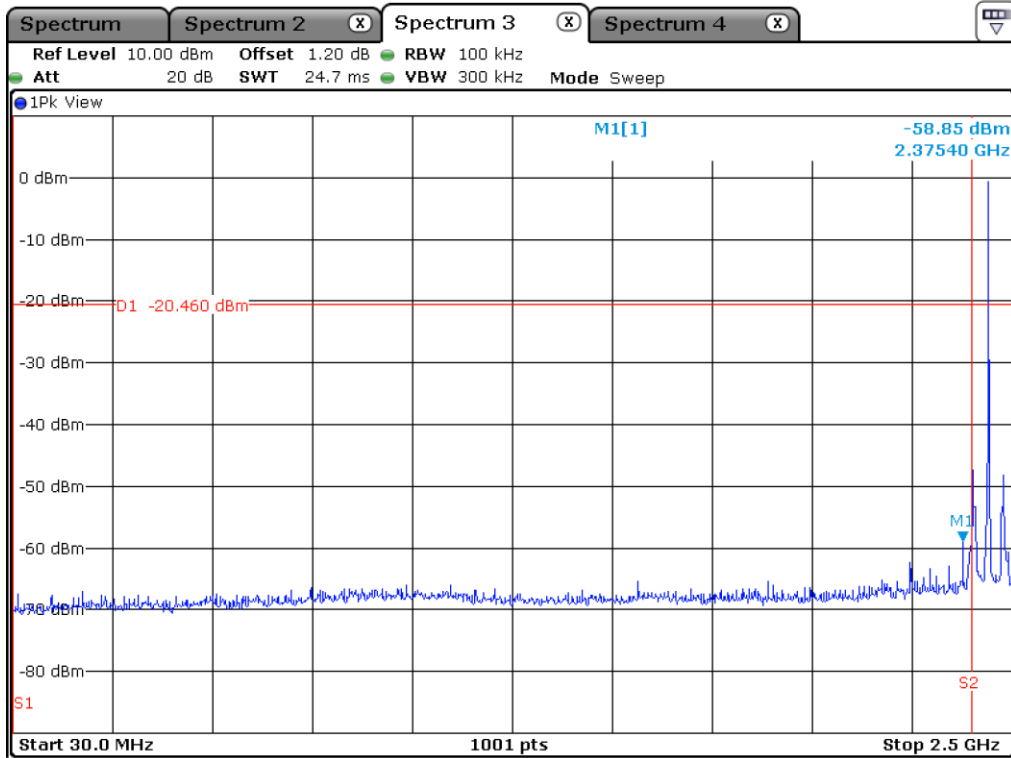


Middle Channel

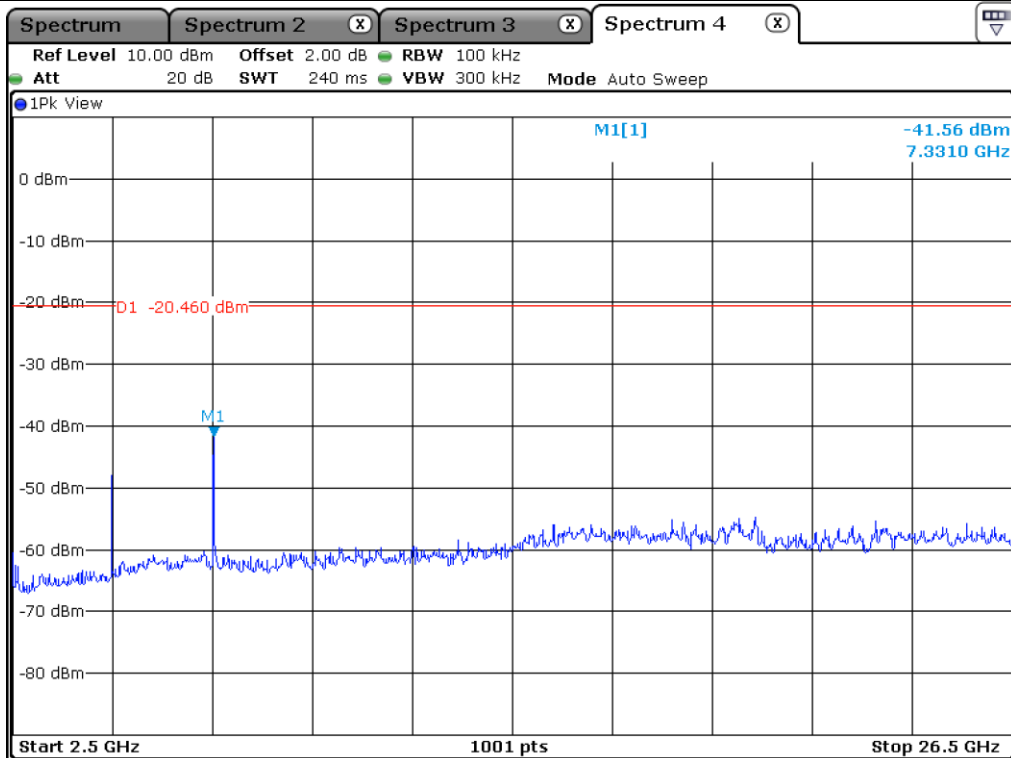

Middle Channel

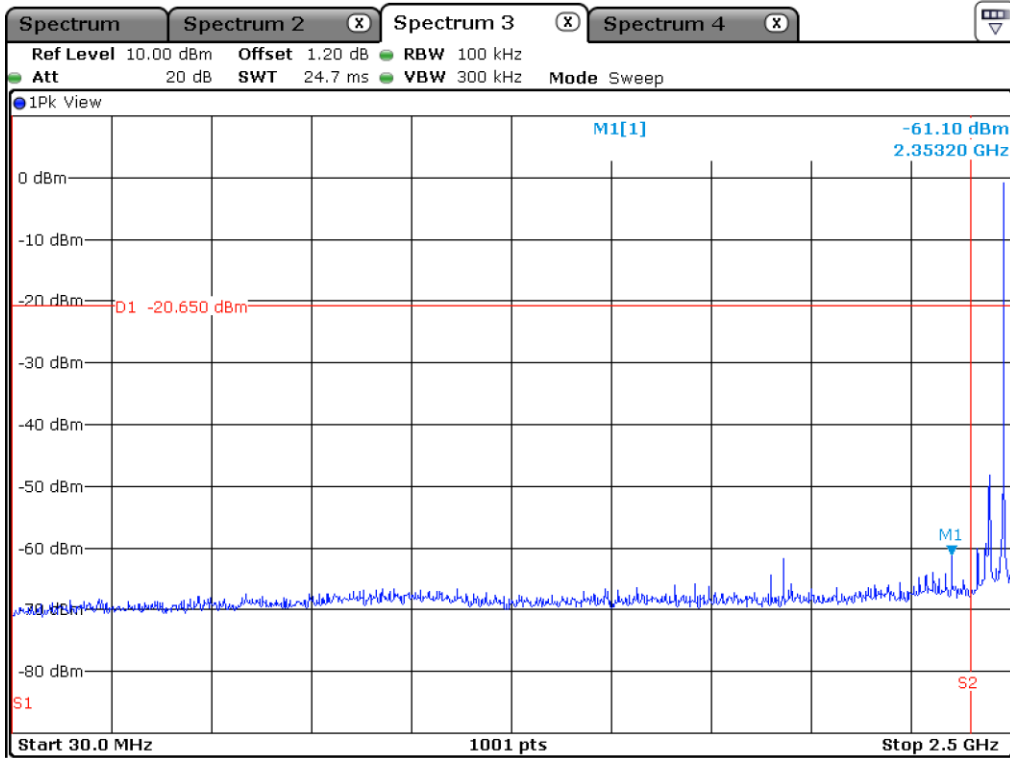

High Channel

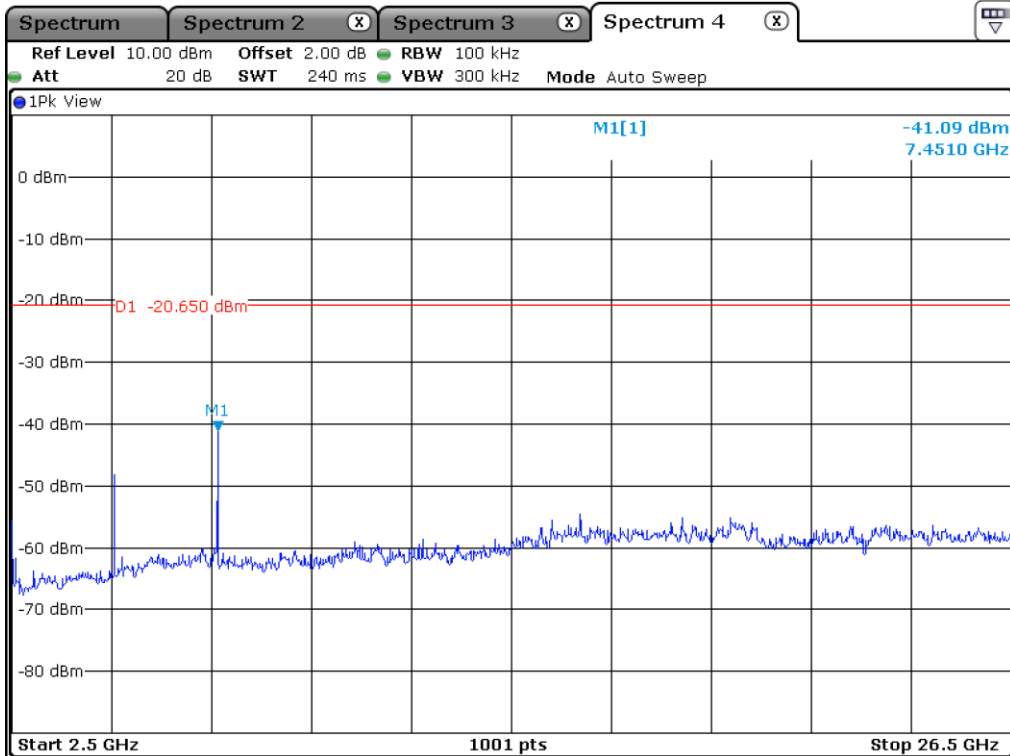

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

9.6.1.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 62.50 %
- Result : PASSED

| Frequency (MHz) | Reading (dBμV) | Detector Mode | Ant. Pol. (H/V) | Ant. Factor | Cable Loss | AMP Gain | Duty Factor (dB) | Total (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-----------------------------------|----------------|---------------|-----------------|-------------|------------|----------|------------------|----------------|-----------------|-------------|
| Test Data for Low Channel | | | | | | | | | | |
| 2 364 710 | 57.58 | Peak | H | 27.30 | 4.99 | 45.10 | - | 44.77 | 74.00 | 29.23 |
| 2 365 340 | 40.96 | Average | H | 27.30 | 4.99 | 45.10 | 2.04 | 30.19 | 54.00 | 23.81 |
| 2 365 534 | 65.59 | Peak | V | 27.30 | 4.99 | 45.10 | - | 52.78 | 74.00 | 21.22 |
| 2 365 340 | 43.35 | Average | V | 27.30 | 4.99 | 45.10 | 2.04 | 32.58 | 54.00 | 21.42 |
| Test Data for High Channel | | | | | | | | | | |
| 2 483 506 | 59.29 | Peak | H | 27.50 | 5.11 | 45.10 | - | 46.80 | 74.00 | 27.20 |
| 2 483 506 | 40.18 | Average | H | 27.50 | 5.11 | 45.10 | 2.04 | 29.73 | 54.00 | 24.27 |
| 2 483 506 | 64.43 | Peak | V | 27.50 | 5.11 | 45.10 | - | 51.94 | 74.00 | 22.06 |
| 2 483 506 | 41.68 | Average | V | 27.50 | 5.11 | 45.10 | 2.04 | 31.23 | 54.00 | 22.77 |

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Gain} + \text{Duty Factor}$$

9.6.2 Spurious & Harmonic Radiated Emission

9.6.2.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 62.50 %
- Result : PASSED

| Frequency (MHz) | Reading (dBμV) | Detector Mode | Ant. Pol. (H/V) | Ant. Factor | Cable Loss | AMP Gain | Duty Factor (dB) | Total (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-------------------------------------|----------------|---------------|-----------------|-------------|------------|----------|------------------|----------------|-----------------|-------------|
| Test Data for Low Channel | | | | | | | | | | |
| 4 804.00 | 53.90 | Peak | H | 31.30 | 7.42 | 44.60 | - | 48.02 | 74.00 | 25.98 |
| 4 804.00 | 42.34 | Average | H | 31.30 | 7.42 | 44.60 | 2.04 | 38.50 | 54.00 | 15.50 |
| 4 804.00 | 54.23 | Peak | V | 31.30 | 7.42 | 44.60 | - | 48.35 | 74.00 | 25.65 |
| 4 804.00 | 41.22 | Average | V | 31.30 | 7.42 | 44.60 | 2.04 | 37.38 | 54.00 | 16.62 |
| Test Data for Middle Channel | | | | | | | | | | |
| 4 880.00 | 53.48 | Peak | H | 31.20 | 7.42 | 44.60 | - | 47.50 | 74.00 | 26.50 |
| 4 880.00 | 41.89 | Average | H | 31.20 | 7.42 | 44.60 | 2.04 | 37.95 | 54.00 | 16.05 |
| 4 880.00 | 53.32 | Peak | V | 31.20 | 7.42 | 44.60 | - | 47.34 | 74.00 | 26.66 |
| 4 880.00 | 41.58 | Average | V | 31.20 | 7.42 | 44.60 | 2.04 | 37.64 | 54.00 | 16.36 |
| Test Data for High Channel | | | | | | | | | | |
| 4 960.00 | 53.26 | Peak | H | 31.30 | 7.45 | 44.60 | - | 47.41 | 74.00 | 26.59 |
| 4 960.00 | 41.66 | Average | H | 31.30 | 7.45 | 44.60 | 2.04 | 37.85 | 54.00 | 16.15 |
| 4 960.00 | 53.78 | Peak | V | 31.30 | 7.45 | 44.60 | - | 47.93 | 74.00 | 26.07 |
| 4 960.00 | 41.57 | Average | V | 31.30 | 7.45 | 44.60 | 2.04 | 37.76 | 54.00 | 16.24 |

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Gain} + \text{Duty Factor}$$

10. PEAK POWER SPECTRAL DENSITY


10.1 Operating environment

Temperature : 23.1 °C
 Relative humidity : 49.6 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

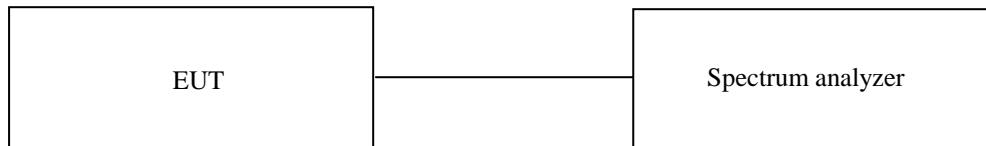

10.3 Test Date

October 26, 2022


10.4 Test data for 1 Mbps


- Test Result : Pass

- Operating Condition : Continuous transmitting mode


| CHANNEL | FREQUENCY(MHz) | MEASURED VALUE (dBm) | LIMIT (dBm) | MARGIN (dB) |
|---------|----------------|----------------------|-------------|-------------|
| Low | 2 402.00 | -15.27 | 8.00 | 23.27 |
| Middle | 2 440.00 | -15.39 | 8.00 | 23.39 |
| High | 2 480.00 | -15.59 | 8.00 | 23.59 |

Remark. Margin = Limit – Measured value

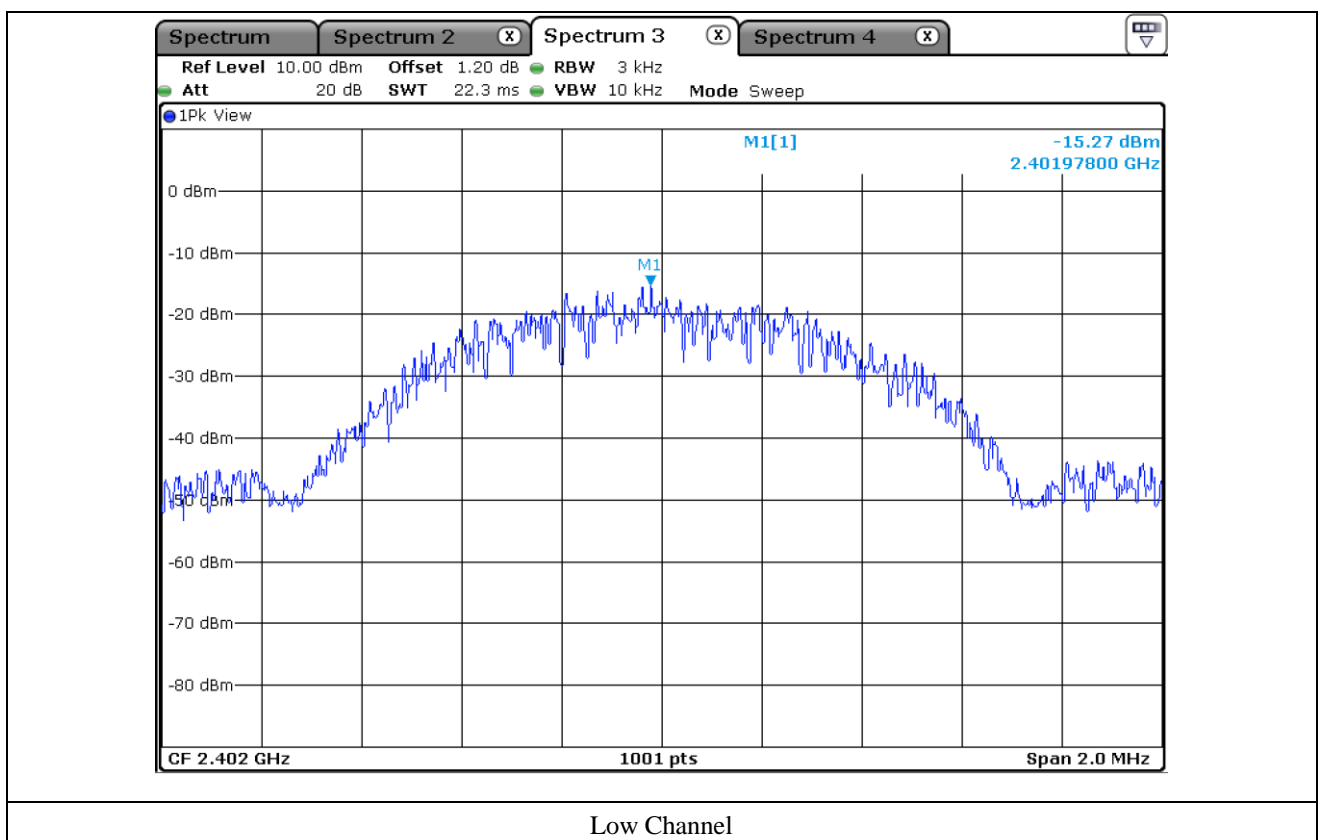

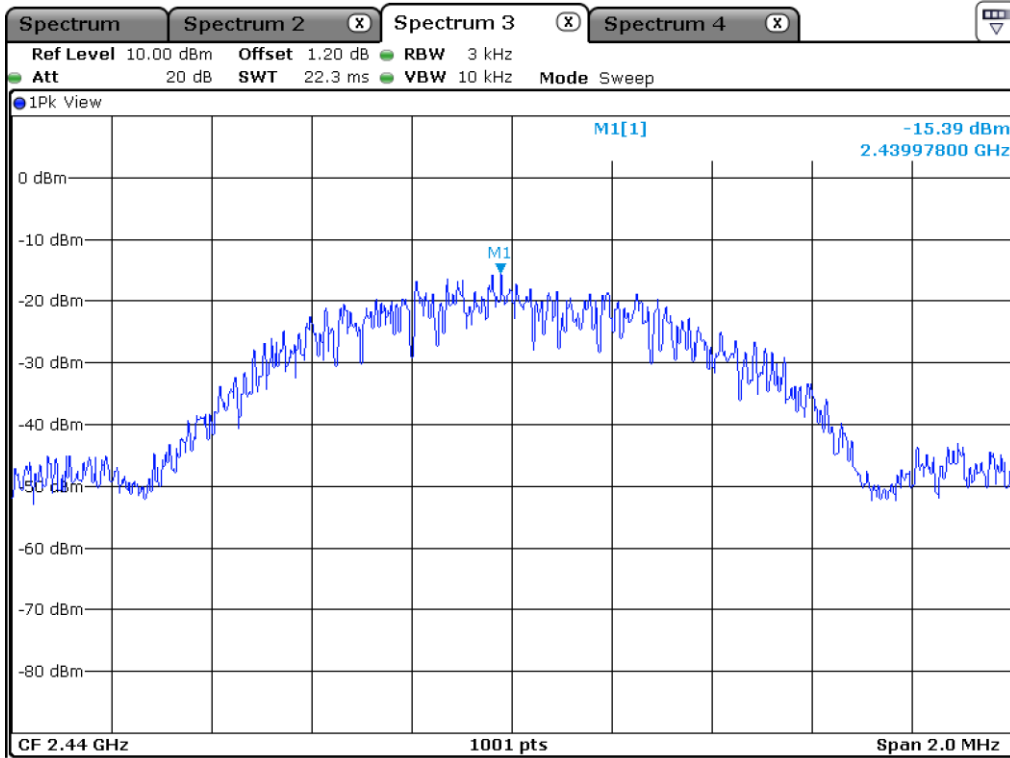

Middle Channel

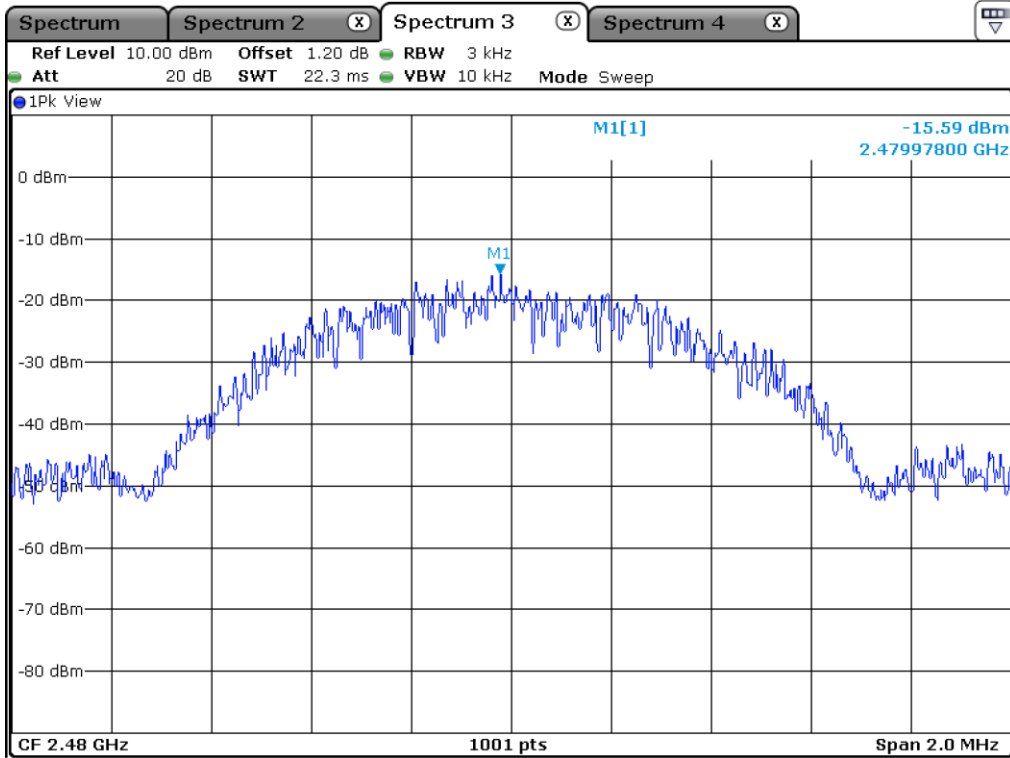

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 23.1 °C
 Relative humidity : 49.6 % R.H.


11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

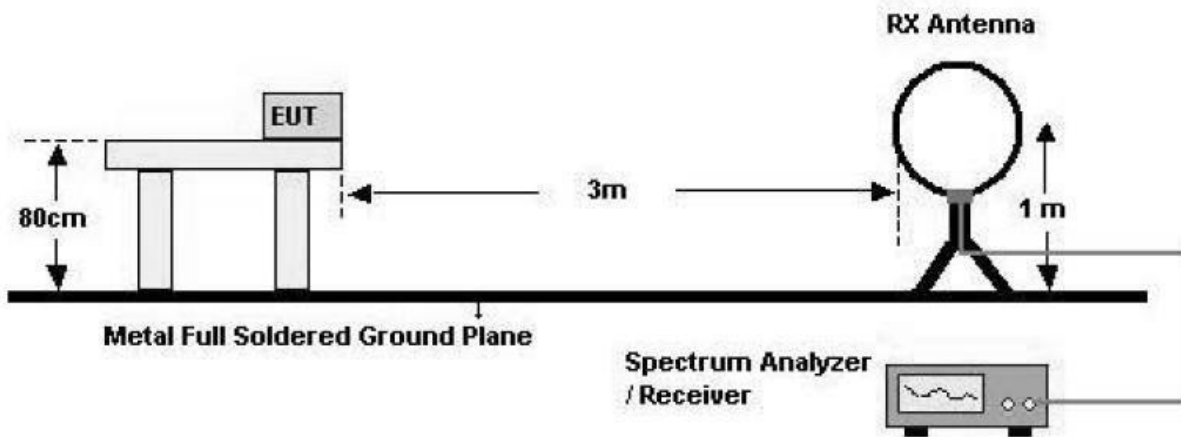

2. 30 MHz - 1 GHz

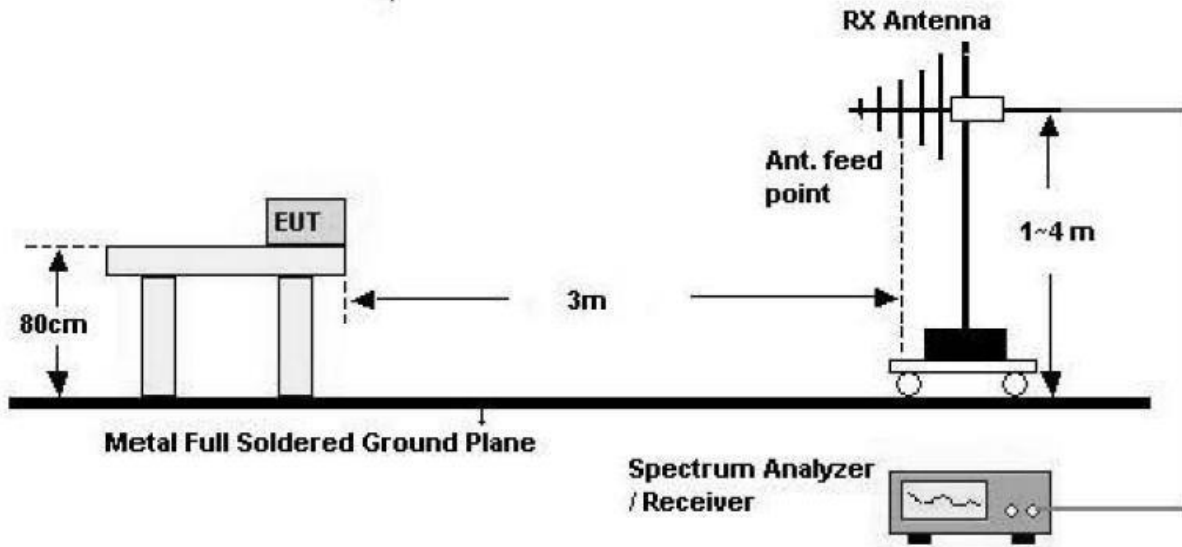

3. Above 1 GHz

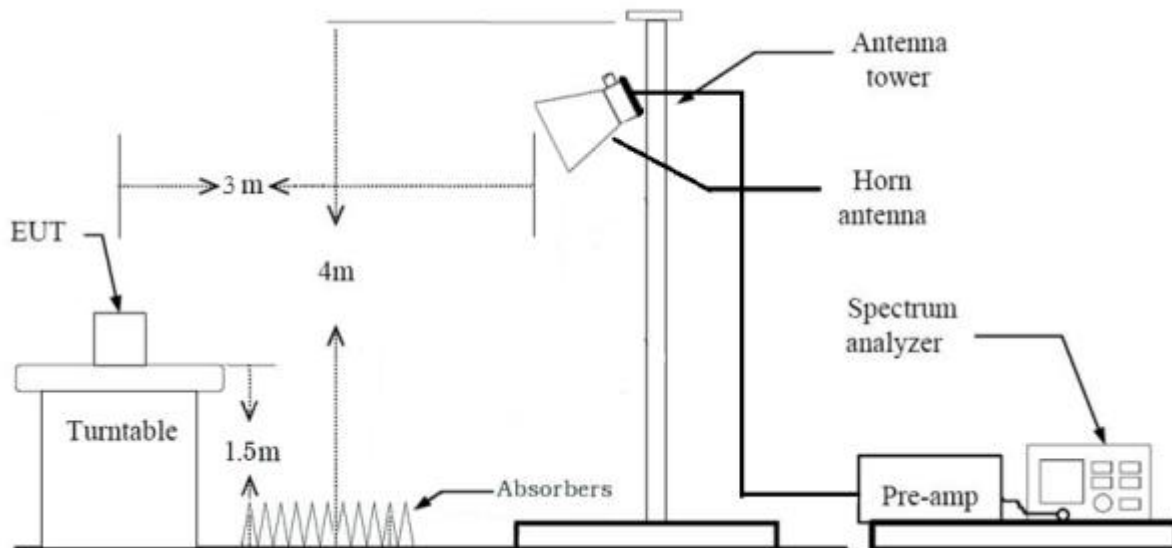

11.3 Test Date

October 26, 2022


11.4 Test data for 30 MHz ~ 1 000 MHz

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Controller

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

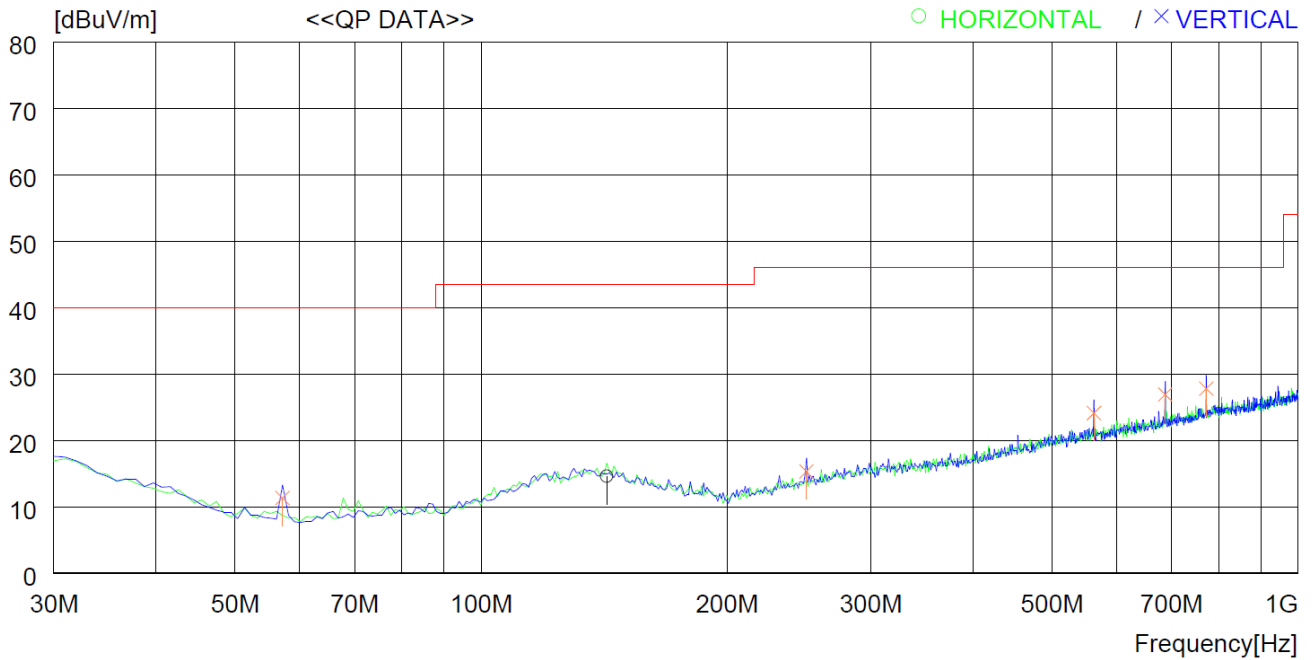

| No. | FREQ [MHz] | READING QP [dBuV] | ANT FACTOR [dB] | LOSS [dB] | GAIN [dB] | RESULT [dBuV/m] | LIMIT [dBuV/m] | MARGIN [dB] | ANTENNA [cm] | TABLE [DEG] |
|------------------------|---------------|-------------------------|-----------------------|--------------|--------------|--------------------|-------------------|----------------|-----------------|----------------|
| ----- Horizontal ----- | | | | | | | | | | |
| 1 | 142.520 | 26.2 | 19.0 | 1.5 | 32.1 | 14.6 | 43.5 | 28.9 | 100 | 359 |
| ----- Vertical ----- | | | | | | | | | | |
| 2 | 57.160 | 30.0 | 12.3 | 1.0 | 32.0 | 11.3 | 40.0 | 28.7 | 400 | 359 |
| 3 | 250.190 | 27.9 | 17.6 | 2.0 | 32.2 | 15.3 | 46.0 | 30.7 | 400 | 29 |
| 4 | 562.529 | 29.7 | 23.7 | 3.1 | 32.4 | 24.1 | 46.0 | 21.9 | 100 | 171 |
| 5 | 687.655 | 30.7 | 25.2 | 3.4 | 32.4 | 26.9 | 46.0 | 19.1 | 100 | 5 |
| 6 | 772.043 | 29.9 | 26.6 | 3.6 | 32.3 | 27.8 | 46.0 | 18.2 | 100 | 180 |

11.5 Test data for Below 30 MHz

- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

| Frequency (MHz) | Reading (dBμV) | Ant. Pol. (H/V) | Ant. Height (m) | Angle (°) | Ant. Factor (dB/m) | Cable Loss | Emission Level(dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|--|----------------|-----------------|-----------------|-----------|--------------------|------------|------------------------|-----------------|-------------|
| Emission from the EUT more than 20 dB below the limit in each frequency range. | | | | | | | | | |

11.6 Test data for above 1 GHz

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

| Frequency (MHz) | Reading (dBμV) | Ant. Pol. (H/V) | Ant. Height (m) | Angle (°) | Ant. Factor (dB/m) | Cable Loss | Emission Level(dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|--|----------------|-----------------|-----------------|-----------|--------------------|------------|------------------------|-----------------|-------------|
| Emission from the EUT more than 20 dB below the limit in each frequency range. | | | | | | | | | |

12. LIST OF TEST EQUIPMENT

| Model Number | Manufacturer | Description | Serial Number | Last Cal.(Interval) |
|--------------|--------------------|--------------------------------|---------------------------|---------------------|
| ESR | Rohde & Schwarz | EMI TEST RECEIVER(ESR) | 101615 | Fed. 24, 2022 (1Y) |
| 310N | Sonoma Instrument | Pre-Amplifier | 392756 | Oct. 13, 2022 (1Y) |
| HLP-2008 | TDK RF Solutions | Hybrid Antenna | 131316 | Mar. 07, 2022 (1Y) |
| HLA 6121 | TESEQ | LOOP ANTENNA | 50841 | Apr. 13, 2022 (1Y) |
| BBHA9170 | Schwarzbeck | Horn Antenna | BBHA9170178 | Jan. 06, 2022 (1Y) |
| BBHA9120D | Schwarzbeck | Horn Antenna | 9120D-1366 | Jul. 05, 2022 (1Y) |
| DT2000-2t | Innco Systems GmbH | Turn Table(3m SAC) | N/A | N/A |
| MA-4640XPET | Innco System | Antenna Master | MA4640/652 /43100318/P | N/A |
| SCU18 | Rohde & Schwarz | Signal Conditioning unit | 102266 | Jul. 12, 2022 (1Y) |
| SCU40A | Rohde & Schwarz | Signal Conditioning unit | 100436 | Jan. 18, 2022 (1Y) |
| WT-A3882-R10 | Microwave | Cavity Band Rejection Filter | WT22040502-1 | Jun. 21, 2022 (1Y) |
| FSV40-N | Rohde & Schwarz | Signal Analyzer | 102196 | Apr. 11, 2022 (1Y) |
| SH-242 | ESPEC | Temperature & Humidity Chamber | 0093001589 | Mar. 18, 2022 (1Y) |
| SMB100A | Rohde & Schwarz | SIGNAL GENERATOR | 177648 | Jan. 17, 2022 (1Y) |