

FCC/ISED

RF

TEST REPORT

ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.



FOR  
**Response**

ISSUED TO  
VXi Corporation

271 Locust Street, Dover, NH 03820 USA



Tested by:

*Tu Lang*  
Tu Lang  
(Engineer)

Date

*Mar. 16, 2016*

Approved by:

*Wei Yanquan*  
Wei Yanquan  
(Chief Engineer)

Date

*Mar. 16, 2016*

Report No.: BL-SZ1620122-601

EUT Type: Response

Model Name: BlueParrott Response

Brand Name: BlueParrott

Test Standard: 47 CFR Part 15 Subpart C

RSS-Gen (Issue 4, November 2014)

RSS-247 (Issue 1, May 2015)

FCC ID: SOM-203582

ISED Number: 4293A-203582

Test conclusion: Pass

Test Date: Mar. 7, 2016 ~ Mar. 15, 2016

Date of Issue: Mar. 16, 2016

*NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.*

**Revision History**

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Mar. 16, 2016</u>	<u>Initial Issue</u>

**TABLE OF CONTENTS**

1	ADMINISTRATIVE DATA (GENERAL INFORMATION) .....	6
1.1	Identification of the Testing Laboratory .....	6
1.2	Identification of the Responsible Testing Location .....	6
1.3	Laboratory Condition .....	6
1.4	Announce .....	6
2	PRODUCT INFORMATION .....	8
2.1	Applicant Information .....	8
2.2	Manufacturer Information .....	8
2.3	Factory Information .....	8
2.4	General Description for Equipment under Test (EUT) .....	8
2.5	Ancillary Equipment .....	8
2.6	Technical Information .....	9
2.7	Additional Instructions .....	9
3	SUMMARY OF TEST RESULTS .....	10
3.1	Test Standards .....	10
3.2	Verdict .....	11
4	GENERAL TEST CONFIGURATIONS .....	12
4.1	Test Environments .....	12
4.2	Test Equipment List .....	12
4.3	Description of Test Setup .....	13
4.3.1	For Antenna Port Test .....	13
4.3.2	For AC Power Supply Port Test .....	13
4.3.3	For Radiated Test (Below 30 MHz) .....	14
4.3.4	For Radiated Test (30 MHz-1 GHz) .....	14
4.3.5	For Radiated Test (Above 1 GHz) .....	15

4.4	Measurement Results Explanation Example.....	16
4.4.1	For conducted test items: .....	16
4.4.2	For radiated band edges and spurious emission test:.....	16
5	TEST ITEMS.....	17
5.1	Antenna Requirements.....	17
5.1.1	Standard Applicable .....	17
5.1.2	Antenna Anti-Replacement Construction .....	17
5.1.3	Antenna Gain .....	17
5.2	Number of Hopping Frequencies .....	18
5.2.1	Limit.....	18
5.2.2	Test Setup .....	18
5.2.3	Test Procedure.....	18
5.2.4	Test Result .....	18
5.3	Peak Output Power and E.I.R.P.....	19
5.3.1	Test Limit.....	19
5.3.2	Test Setup .....	19
5.3.3	Test Procedure.....	19
5.3.4	Test Result .....	19
5.4	Occupied Bandwidth .....	20
5.4.1	Limit.....	20
5.4.2	Test Setup .....	20
5.4.3	Test Procedure.....	20
5.4.4	Test Result .....	20
5.5	Carrier Frequency Separation .....	21
5.5.1	Limit.....	21
5.5.2	Test Setup .....	21
5.5.3	Test Procedure.....	21
5.5.4	Test Result .....	21
5.6	Time of Occupancy (Dwell time) .....	22
5.6.1	Limit.....	22
5.6.2	Test Setup .....	22

5.6.3	Test Procedure.....	22
5.6.4	Test Result.....	22
5.7	Conducted Spurious Emission.....	23
5.7.1	Limit.....	23
5.7.2	Test Setup.....	23
5.7.3	Test Procedure.....	23
5.7.4	Test Result.....	23
5.8	Conducted Emission.....	24
5.8.1	Limit.....	24
5.8.2	Test Setup.....	24
5.8.3	Test Procedure.....	24
5.8.4	Test Result.....	24
5.9	Radiated Spurious Emission.....	25
5.9.1	Limit.....	25
5.9.2	Test Setup.....	25
5.9.3	Test Procedure.....	25
5.9.4	Test Result.....	26
5.10	Receiver Spurious Emissions.....	27
5.10.1	Limit.....	27
5.10.2	Test Setup.....	27
5.10.3	Test Procedure.....	27
5.10.4	Test Result.....	28
ANNEX A	TEST RESULT.....	29
A.1	Number of Hopping Frequency.....	29
A.2	Peak Output Power and E.I.R.P.....	31
A.3	20 dB and 99% bandwidth.....	34
A.4	Hopping Frequency Separation.....	39
A.5	Average Time of Occupancy.....	40
A.6	Conducted Spurious Emissions.....	43
A.7	Conducted Emissions.....	51
A.8	Radiated Spurious Emission.....	53

A.9	Receiver Spurious Emissions.....	71
ANNEX B	TEST SETUP PHOTOS .....	75
ANNEX C	EUT EXTERNAL PHOTOS .....	75
ANNEX D	EUT INTERNAL PHOTOS .....	75

# 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

## 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

## 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

## 1.3 Laboratory Condition

Ambient Temperature	20 to 25°C
Ambient Relative Humidity	45% - 55%
Ambient Pressure	100 kPa - 102 kPa

## 1.4 Announce

- (1) The test report reference to the report template version v1.0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.

- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	VXi Corporation
Address	271 Locust Street, Dover, NH 03820 USA

### 2.2 Manufacturer Information

Manufacturer	V-Tech
Address	Xia Ling Bei Management Zone, Liao Bu District, Donguan, Guangdong. P.R China

### 2.3 Factory Information

Factory	V-Tech
Address	Xia Ling Bei Management Zone, Liao Bu District, Donguan, Guangdong. P.R China

### 2.4 General Description for Equipment under Test (EUT)

EUT Type	Response
Model Name Under Test	BlueParrott Response
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	2.03
Software Version	0CC
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A
Network and Wireless connectivity	Bluetooth 3.0+ EDR, Bluetooth 4.0 Low Energy (BLE)

### 2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	HT
	Model No.	PL363450
	Serial No.	N/A
	Capacitance	680 mAh
	Rated Voltage	3.7 V
	Limit Charge Voltage	4.2 V
Ancillary Equipment 2	USB Cable	
	Length	1.2 m

## 2.6 Technical Information

The requirement for the following technical information of the EUT was tested in this report:


Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	Mobile and portable
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	Ceramic Antenna
Antenna Gain	0 dBi (All involve the antenna gain test item, has been included in the final results)
About the Product	Only the Bluetooth 3.0 was tested in this report.

## 2.7 Additional Instructions

EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually. TX LEVEL is built-in set parameters and cannot be changed and selected.
------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Run Software

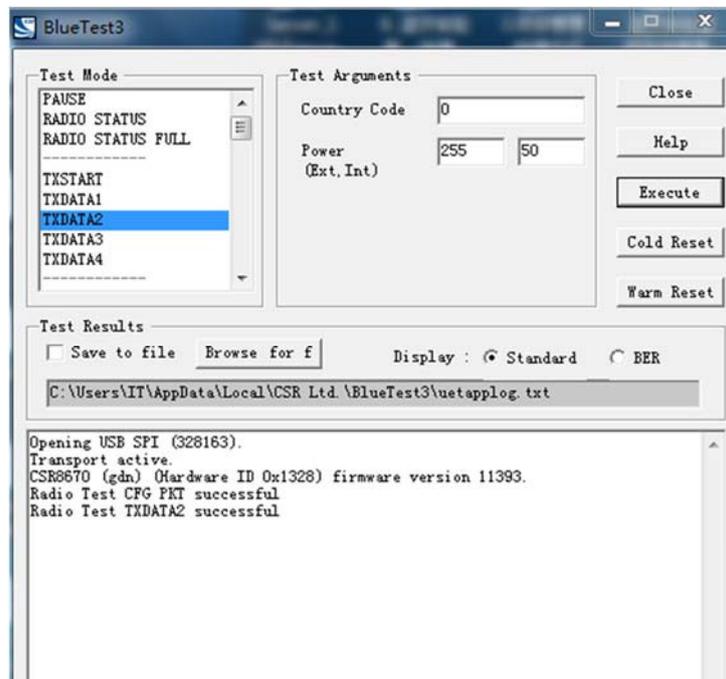

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-14 Edition)	Miscellaneous Wireless Communications Services
2	FCC PUBLIC NOTICE DA 00-705 (Mar. 30, 2000)	Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
3	ANSI C63.4-2014	American National Standard for Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
4	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
5	RSS-Gen (Issue 4, Nov. 2014)	General Requirements for Compliance of Radio Apparatus
6	RSS-247 (Issue 1, May 2015)	Digital Transmission Systems (DTSS), Frequency Hopping Systems(FHSs) and Licence-Exemp Local Area Network (LE-LAN) Devices

### 3.2 Verdict

No.	Description	FCC Part No.	RSS Part No.	Channel (BT for V3.0)	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	RSS-247, 5.4 (6)	N/A	--	Pass	Note 1
2	Number of Hopping Frequencies	15.247(a)	RSS-247, 5.1 (4)	Hopping Mode	ANNEX A.1	Pass	
3	Peak Output Power and E.I.R.P	15.247(b)	RSS-247, 5.4 (2)	Low/Middle/H igh	ANNEX A.2	Pass	
4	Occupied Bandwidth	15.247(a)	RSS-247, 5.1 (1)	Low/Middle/H igh	ANNEX A.3	Pass	
5	Carrier Frequency Separation	15.247(a)	RSS-247, 5.1 (2)	Hopping Mode	ANNEX A.4	Pass	
6	Time of Occupancy (Dwell time)	15.247(a)	RSS-247, 5.1 (4)	Hopping Mode	ANNEX A.5	Pass	
7	Conducted Spurious Emission	15.247(d)	RSS-247, 5.5	Low/Middle/H igh	ANNEX A.6	Pass	
8	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/H igh	ANNEX A.7	Pass	
9	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Hopping Mode, Low/Middle/H igh	ANNEX A.8	Pass	
10	Receiver Spurious Emissions	--	RSS-Gen, 7.1.2	Low/Middle/H igh	ANNEX A.9	Pass	

Note 1: Please refer to section 5.1

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:


Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	20°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.7 V

### 4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2015.07.16	2016.07.15
Vector Signal Generator	ROHDE&SCHWARZ	SMBV100A	177746	2015.07.16	2016.07.15
Signal Generator	ROHDE&SCHWARZ	SMB100A	260592	2015.07.01	2016.06.30
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2015.07.16	2016.07.15
Spectrum Analyzer	AGILENT	E4440A	MY45304434	2015.10.15	2016.10.14
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2015.07.14	2016.07.13
LISN	SCHWARZBECK	NSLK 8127	8127-687	2015.07.14	2016.07.13
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2015.07.16	2016.07.15
Power Splitter	KMW	DCPD-LDC	1305003215	2015.07.01	2016.06.30
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2015.07.21	2016.07.20
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	18141664	2015.07.17	2016.07.16
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2015.08.07	2016.08.06
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2015.07.22	2017.07.21
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2015.07.22	2017.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2015.07.22	2017.07.21
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2015.07.22	2017.07.21
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2015.02.28	2017.02.27
Shielded Enclosure	ChangNing	CN-130701	130703	--	--


### 4.3 Description of Test Setup

#### 4.3.1 For Antenna Port Test

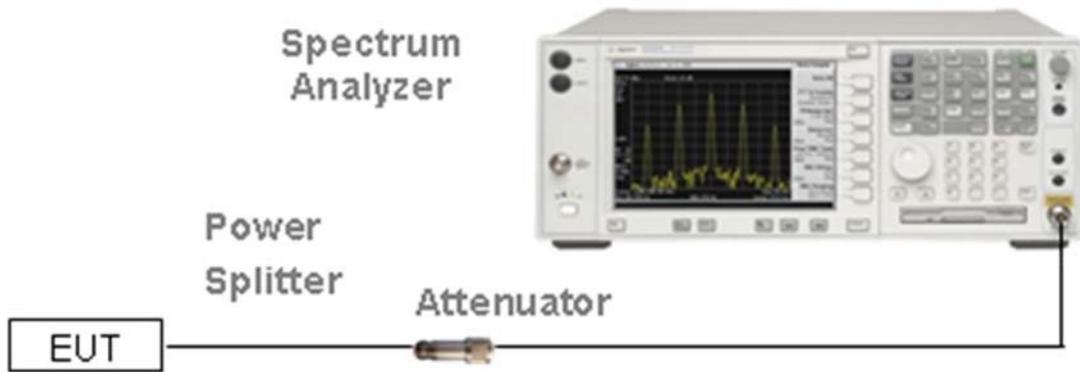


(Diagram 1)

#### 4.3.2 For AC Power Supply Port Test

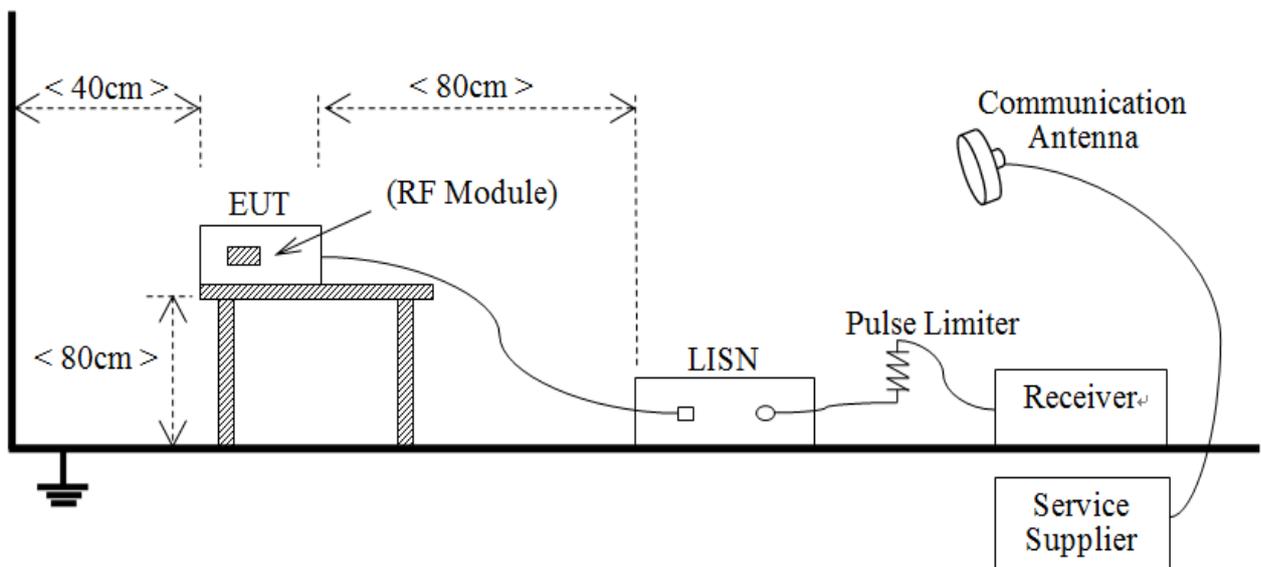


(Diagram 2)

4.3.3 For Radiated Test (Below 30 MHz)

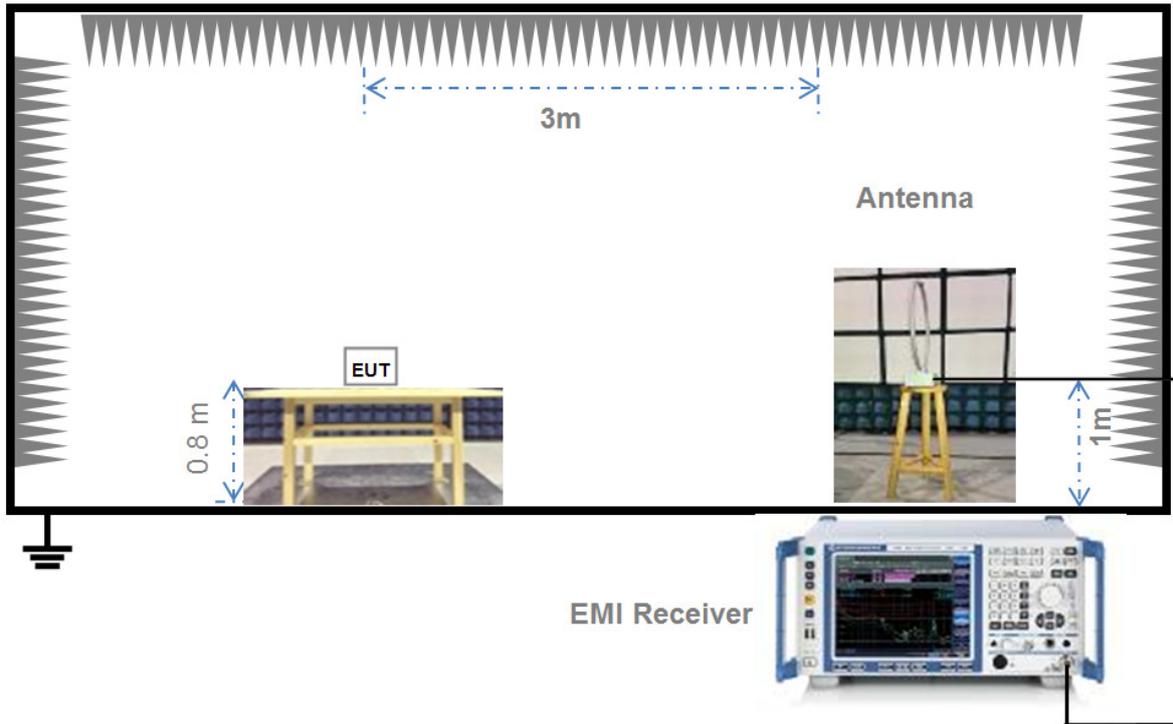


(Diagram 3)

4.3.4 For Radiated Test (30 MHz-1 GHz)

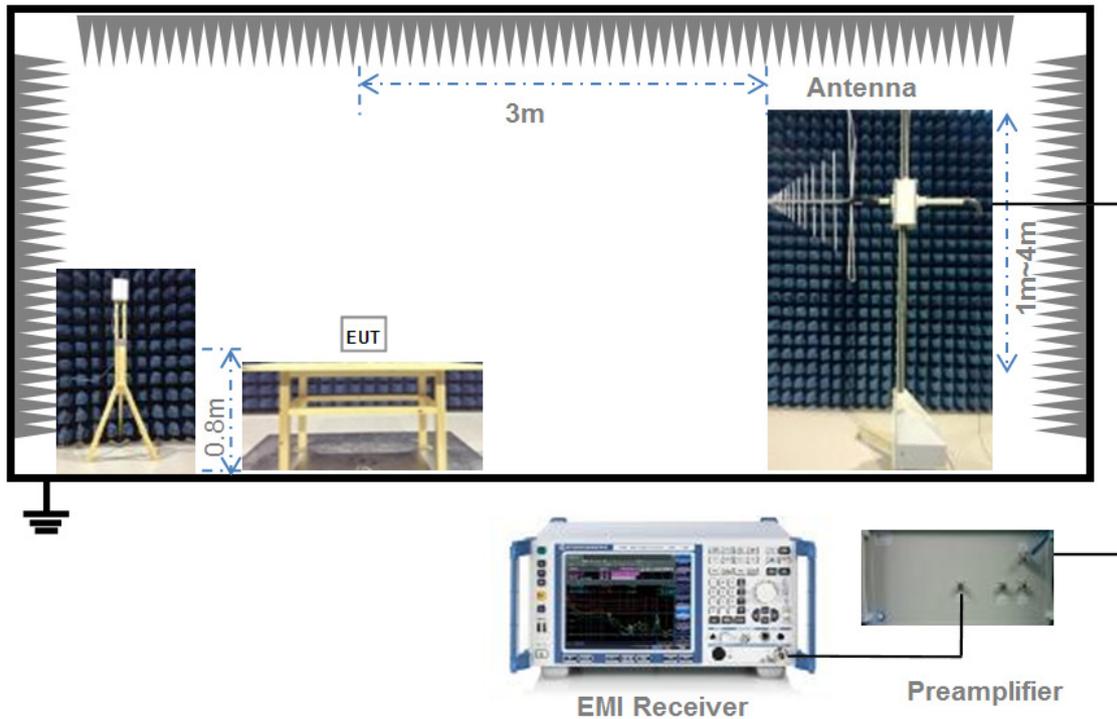

(Diagram 4)

4.3.5 For Radiated Test (Above 1 GHz)

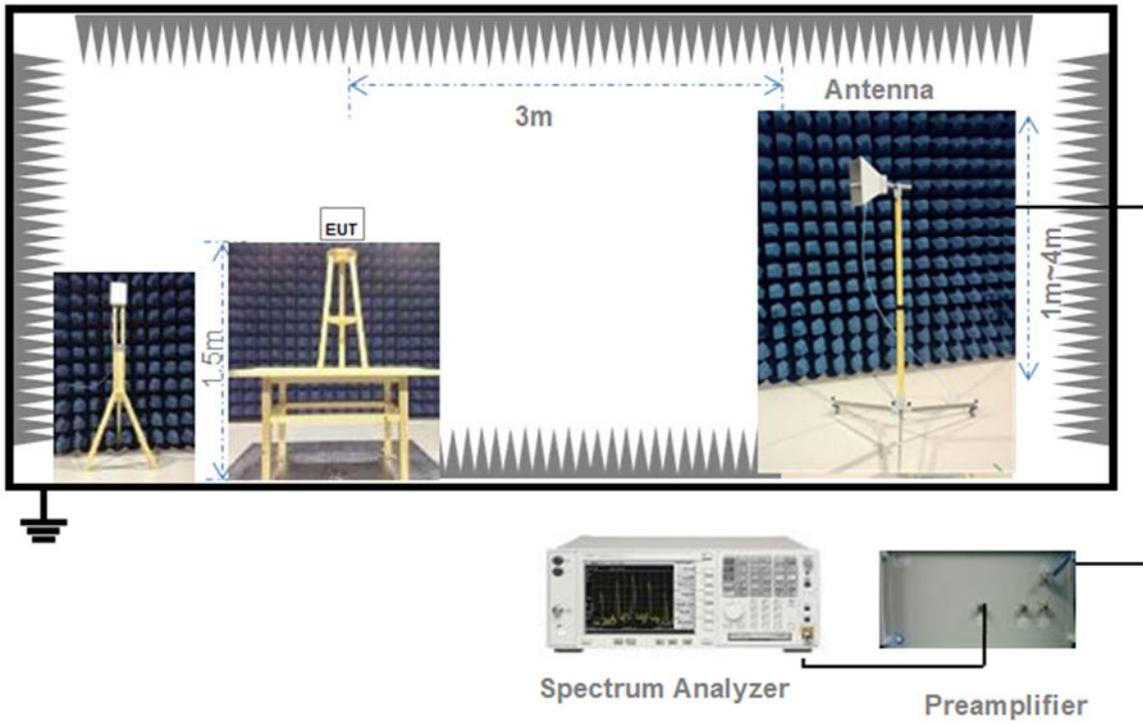

(Diagram 5)

## 4.4 Measurement Results Explanation Example

### 4.4.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

### 4.4.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) =  $20 * \log(\text{Duty cycle})$ .

Duty cycle = on time / 100 milliseconds

On time = dwell time \* hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) =  $20 * \log((2.9 * 3) / 100) = -21.21 \text{ dB}$

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dBuV/m.

Example:

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + duty cycle correction factor (dB)

=  $45.61 + (-21.21) = 24.4 \text{ (dBuV/m)}$

## 5 TEST ITEMS

### 5.1 Antenna Requirements

#### 5.1.1 Standard Applicable

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is An embedded-in	The antenna is welded on the mainboard, can't be replaced by the consumer

Reference Documents	Item
Photo	

#### 5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5.2 Number of Hopping Frequencies

### 5.2.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (4)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

### 5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW  $\geq$  1% of the span

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

### 5.2.4 Test Result

Please refer to ANNEX A.1.

## 5.3 Peak Output Power and E.I.R.P

### 5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems that operates in the 2400 MHz to 2483.5 MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1 Watt.

RSS-247, 5.4 (2)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

### 5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.3.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

### 5.3.4 Test Result

Please refer to ANNEX A.2.

## 5.4 Occupied Bandwidth

### 5.4.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1)

The 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ( $10 \cdot \log 1\% = 20$  dB) taking the total RF output power.

### 5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW  $\geq$  1% of the 20 dB bandwidth

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

### 5.4.4 Test Result

Please refer to ANNEX A.3.

## 5.5 Carrier Frequency Separation

### 5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span

Video (or Average) Bandwidth (VBW)  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

### 5.5.4 Test Result

Please refer to ANNEX A.4.

## 5.6 Time of Occupancy (Dwell time)

### 5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (4)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.6.3 Test Procedure

The average time of occupancy on any channel within the Period can be calculated with formulas:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

### 5.6.4 Test Result

Please refer to ANNEX A.5

## 5.7 Conducted Spurious Emission

### 5.7.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

### 5.7.4 Test Result

Please refer to ANNEX A.6.

## 5.8 Conducted Emission

### 5.8.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

### 5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

### 5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

### 5.8.4 Test Result

Please refer to ANNEX A.7.

## 5.9 Radiated Spurious Emission

### 5.9.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dB $\mu\text{V}/\text{m}$ ) = 20\*log[Field Strength ( $\mu\text{V}/\text{m}$ )].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dB $\mu\text{V}/\text{m}$ @3m (AV) and 74dB $\mu\text{V}/\text{m}$ @3m (PK).

### 5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

#### 5.9.4 Test Result

Please refer to ANNEX A.8.

## 5.10 Receiver Spurious Emissions

### 5.10.1 Limit

RSS-Gen, 7.1.2

Radiated spurious emission measurements shall be performed with the receiver antenna connected to the receiver antenna terminals. Spurious emissions from receivers shall not exceed the radiated limits shown in the table below:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

1. Field Strength ( $\text{dB}\mu\text{V/m}$ ) =  $20 \cdot \log$  [Field Strength ( $\mu\text{V/m}$ )].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54  $\text{dB}\mu\text{V/m}@3\text{m}$  (AV) and 74  $\text{dB}\mu\text{V/m}@3\text{m}$  (PK).

### 5.10.2 Test Setup

See section 4.4.3-4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.10.3 Test Procedure

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from  $0^\circ$  to  $360^\circ$ , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Test Plots for the Whole Measurement Frequency Range:

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold Test Result

#### 5.10.4 Test Result

Please refer to ANNEX A.9.

# ANNEX A TEST RESULT


## A.1 Number of Hopping Frequency

### Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
$\Pi/4$ -DQPSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass


### Test plots

GFSK 2.4 GHz ~ 2.4415 GHz

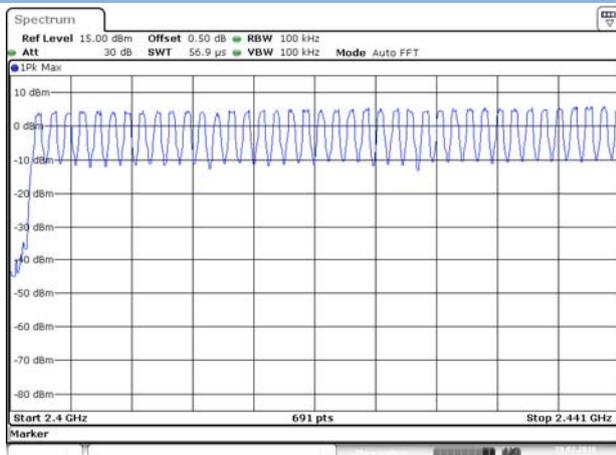


Date: 29 FEB 2016 11:37:58


GFSK 2.4415 GHz ~ 2.4835 GHz

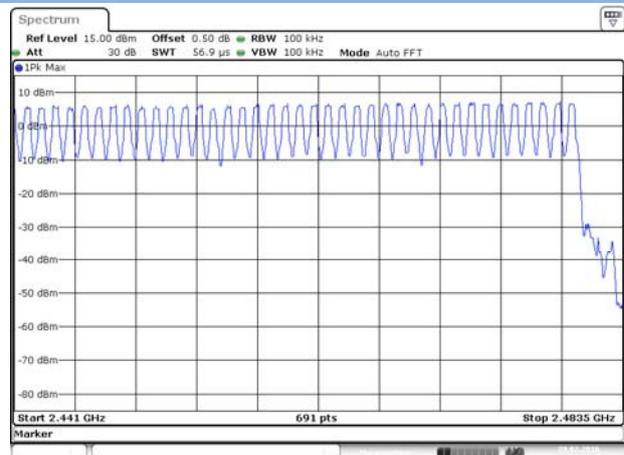

Date: 29 FEB 2016 11:39:47

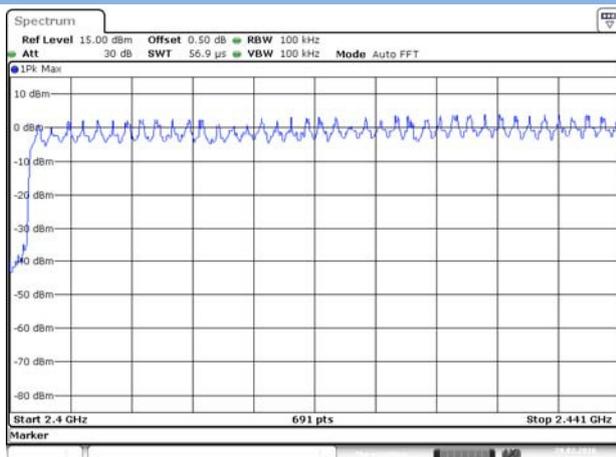
 $\Pi/4$ -DQPSK 2.4 GHz ~ 2.4415 GHz


Date: 29 FEB 2016 11:36:34

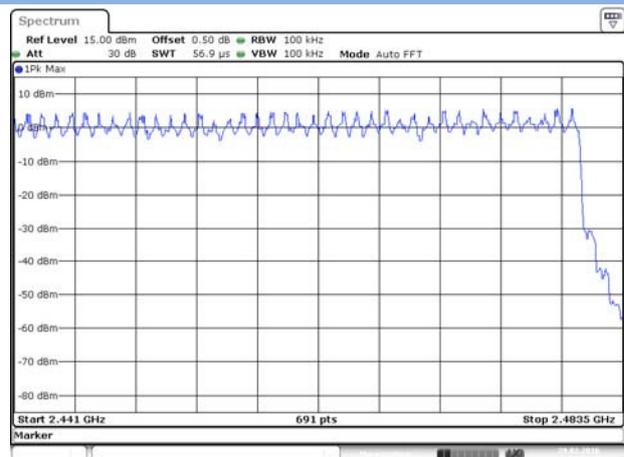
 $\Pi/4$ -DQPSK GHz ~ 2.4835 GHz


Date: 29 FEB 2016 11:35:12

8-DPSK 2.4 GHz ~ 2.4415 GHz

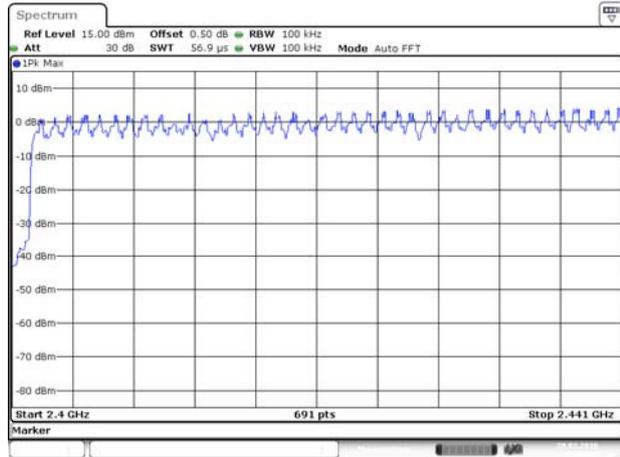

8-DPSK 2.4415 GHz ~ 2.4835 GHz

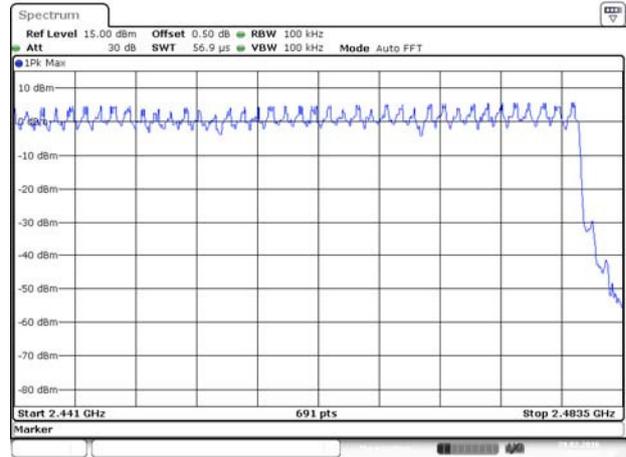

## A.2 Peak Output Power and E.I.R.P

### Peak Power Test Data


Channel	Measured Output Peak Power						Limit		Verdict
	GFSK		π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	5.2	3.31	3.35	2.16	3.64	2.31	30	1000	Pass
Middle	7.38	5.47	6.21	4.18	6.38	4.35			Pass
High	8.5	7.08	7.34	5.42	7.42	5.52			Pass

### E.I.R.P Test Data


Channel	E.I.R.P						Limit		Verdict
	GFSK		π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	5.2	3.31	3.35	2.16	3.64	2.31	36	4000	Pass
Middle	7.38	5.47	6.21	4.18	6.38	4.35			Pass
High	8.5	7.08	7.34	5.42	7.42	5.52			Pass

## Test plots

## GFSK LOW CHANNEL

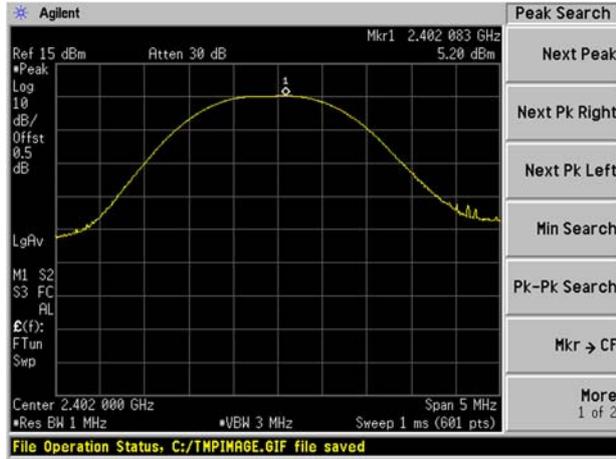


## GFSK MIDDLE CHANNEL

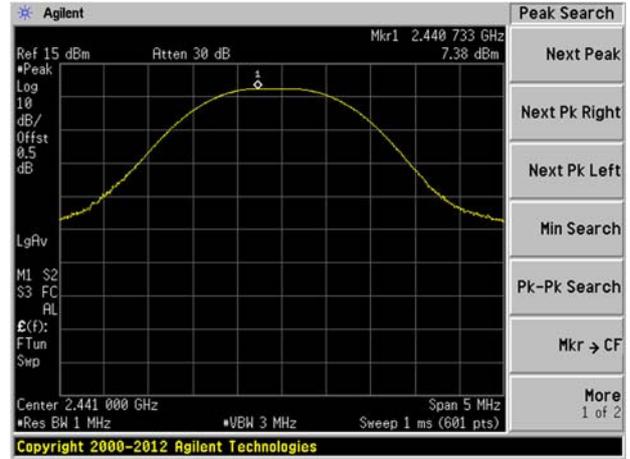


## GFSK HIGH CHANNEL




## II/4-DQPSK LOW CHANNEL

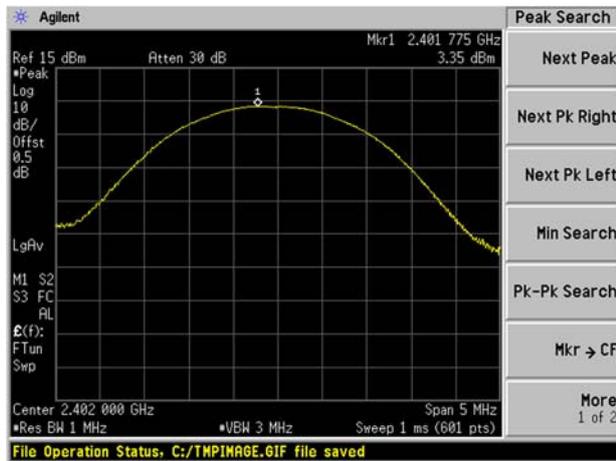


## II/4-DQPSK MIDDLE CHANNEL

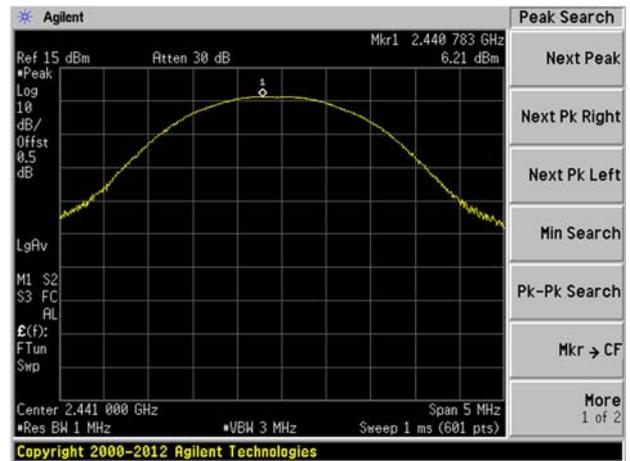


## IT/4-DQPSK HIGH CHANNEL

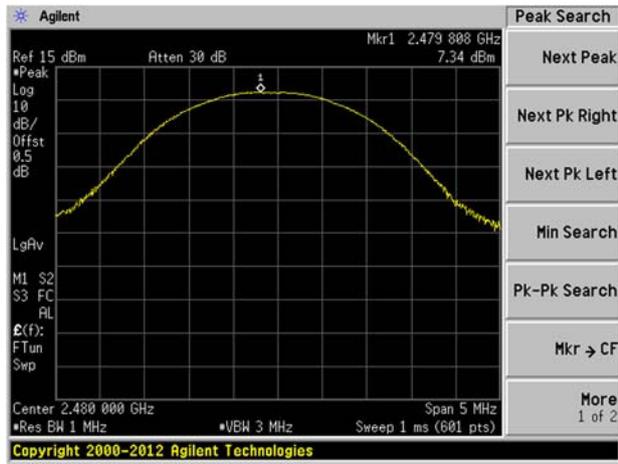

## 8-DPSK LOW CHANNEL

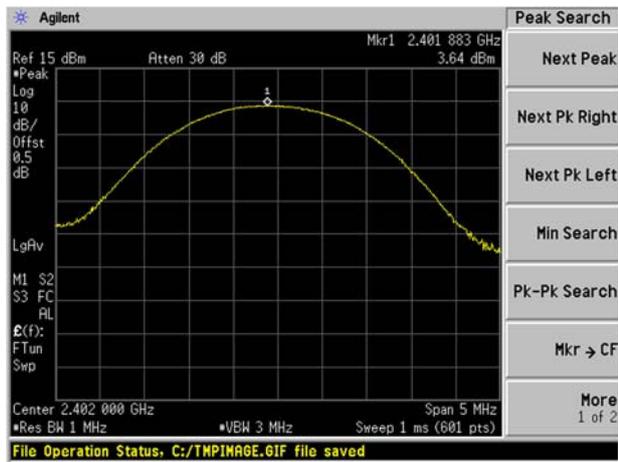

## 8-DPSK MIDDLE CHANNEL

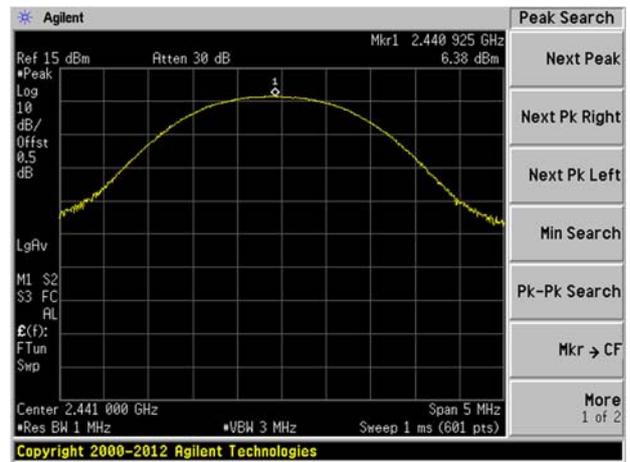

## 8-DPSK HIGH CHANNEL



### A.3 20 dB and 99% bandwidth


#### Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (kHz)
Low	1.1114	959.4790
Middle	1.1071	950.7960
High	1.1158	955.1375
π/4-DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.3719	1.2026
Middle	1.3632	1.1939
High	1.3676	1.2069
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.3676	1.2069
Middle	1.3632	1.2026
High	1.3719	1.2069

#### Test plots

##### 20 dB Bandwidth

GFSK LOW CHANNEL

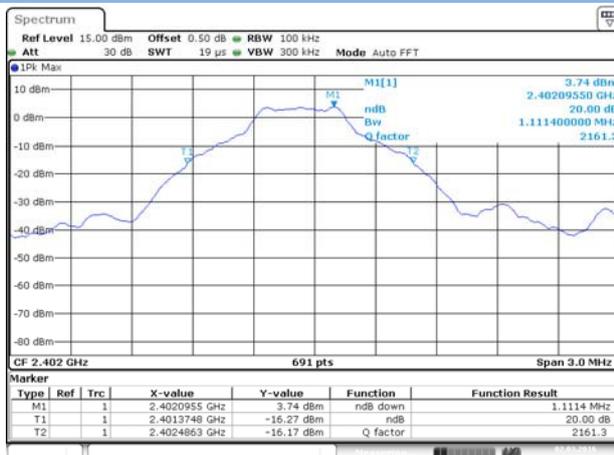


Date: 2 MAR 2016 16:17:22

GFSK MIDDLE CHANNEL




Date: 2 MAR 2016 16:17:03

## GFSK HIGH CHANNEL

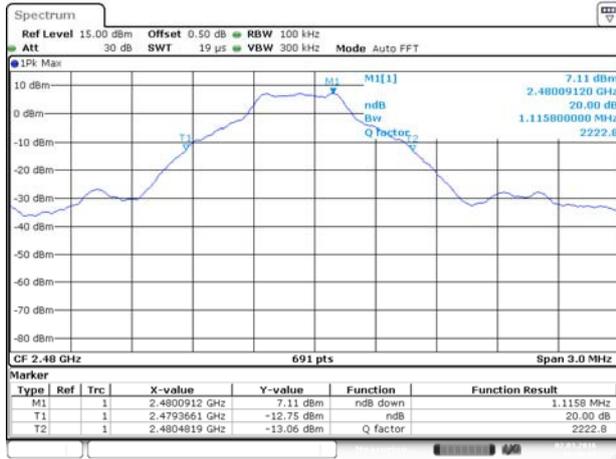

Date: 2 MAR 2016 16:16:36

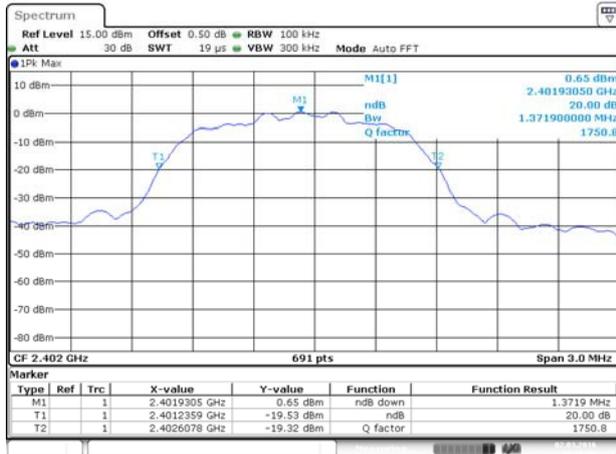 $\pi$ /4-DQPSK LOW CHANNEL


Date: 2 MAR 2016 16:16:00


 $\pi$ /4-DQPSK MIDDLE CHANNEL


Date: 2 MAR 2016 16:15:29

 $\pi$ /4-DQPSK HIGH CHANNEL



Date: 2 MAR 2016 16:15:02

## 8-DPSK LOW CHANNEL

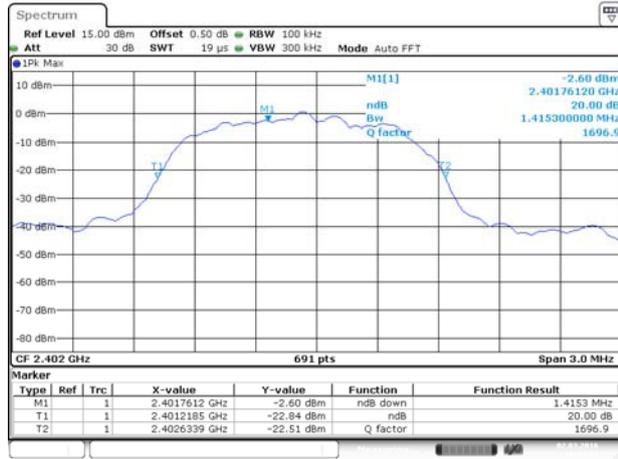


Date: 2 MAR 2016 16:14:31

## 8-DPSK MIDDLE CHANNEL

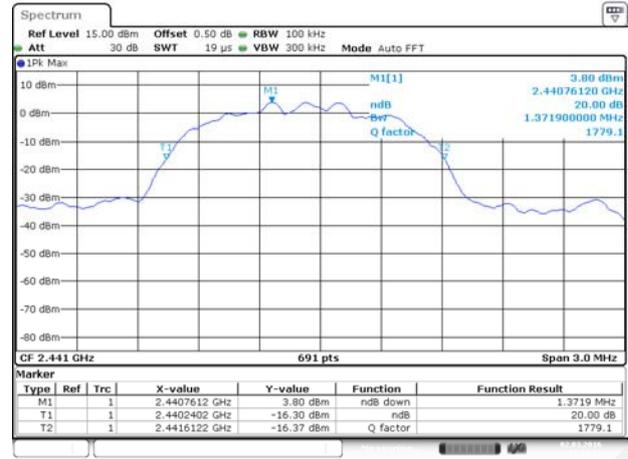

Date: 2 MAR 2016 16:14:10


## 8-DPSK HIGH CHANNEL

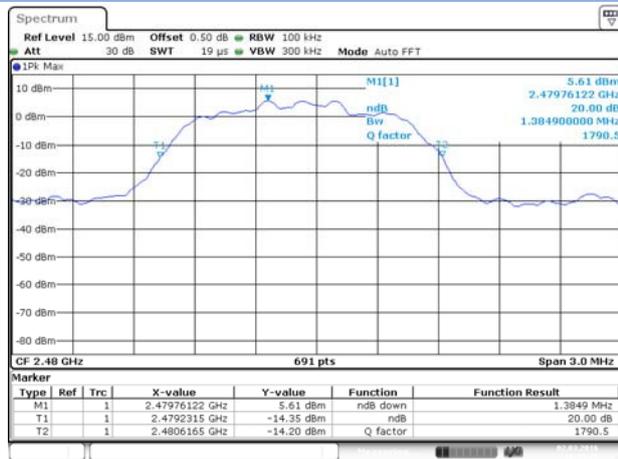

Date: 2 MAR 2016 16:13:28


## 99% Bandwidth

## GFSK LOW CHANNEL

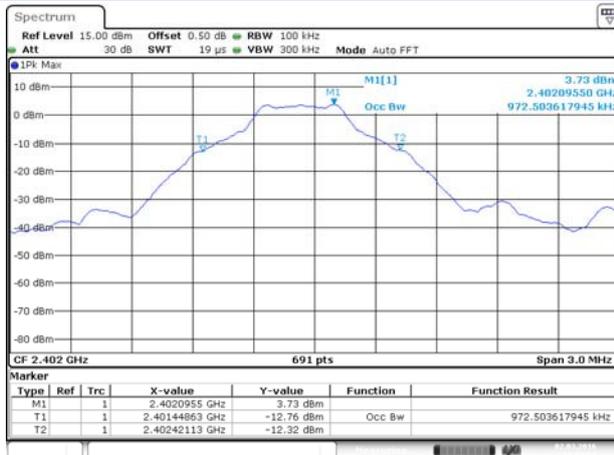


Date: 2 MAR 2016 16:04:53

## GFSK MIDDLE CHANNEL

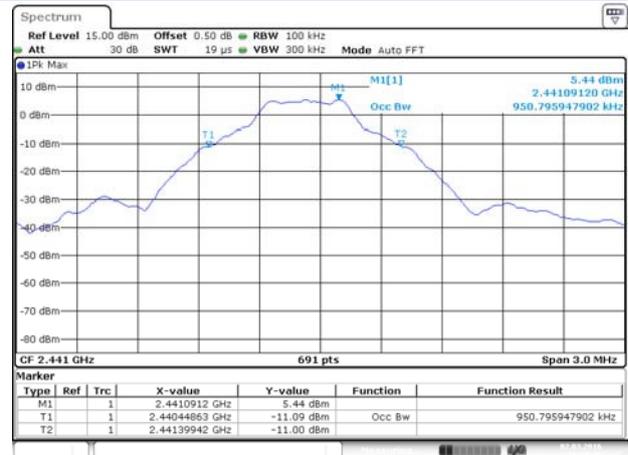


Date: 2 MAR 2016 16:05:45

## GFSK HIGH CHANNEL

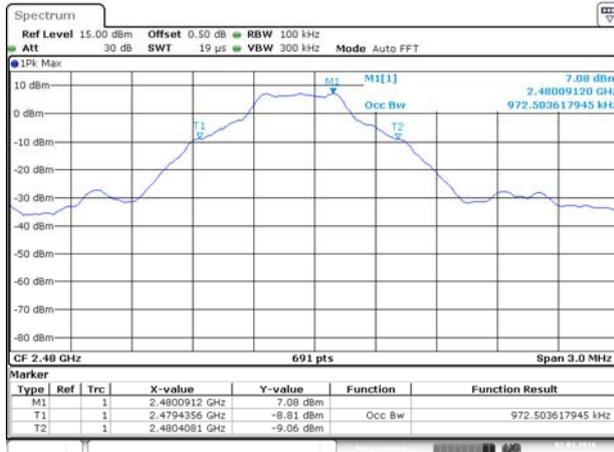


Date: 2 MAR 2016 16:06:12

## II/4-DQPSK LOW CHANNEL

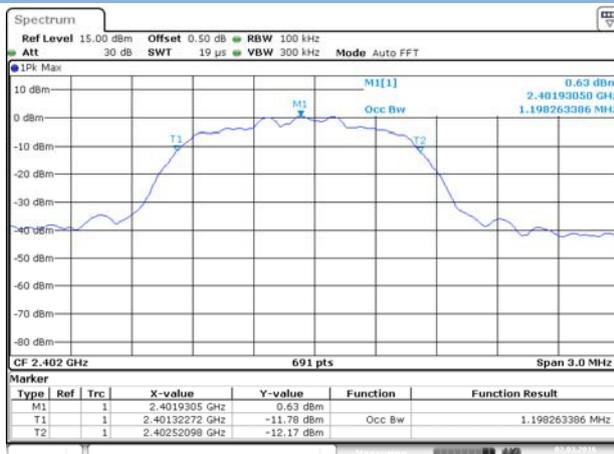


Date: 2 MAR 2016 16:06:56

## II/4-DQPSK MIDDLE CHANNEL

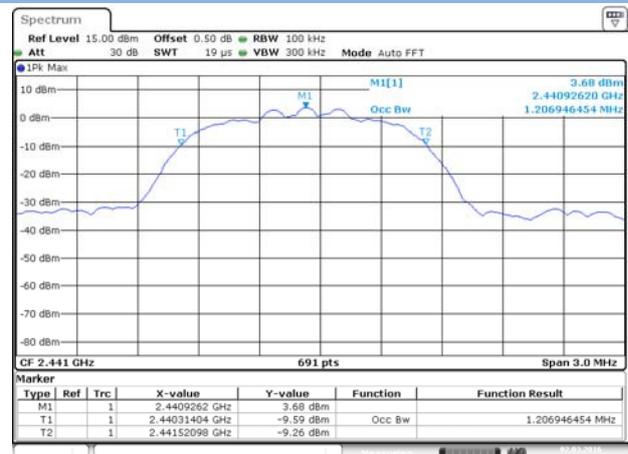


Date: 2 MAR 2016 16:07:21

### π/4-DQPSK HIGH CHANNEL

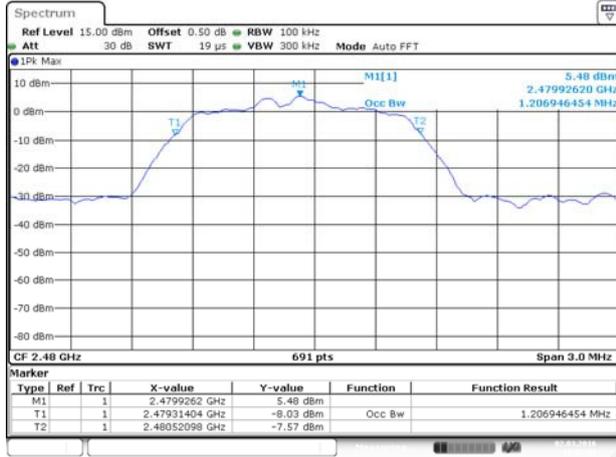


Date: 2 MAR 2016 16:07:52

### 8-DPSK LOW CHANNEL

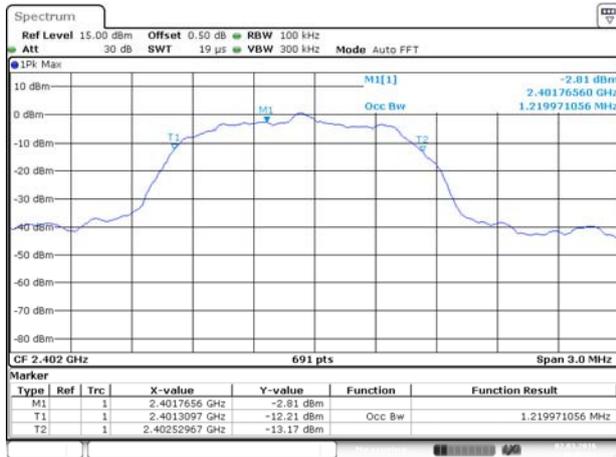

Date: 2 MAR 2016 16:08:22

### 8-DPSK MIDDLE CHANNEL

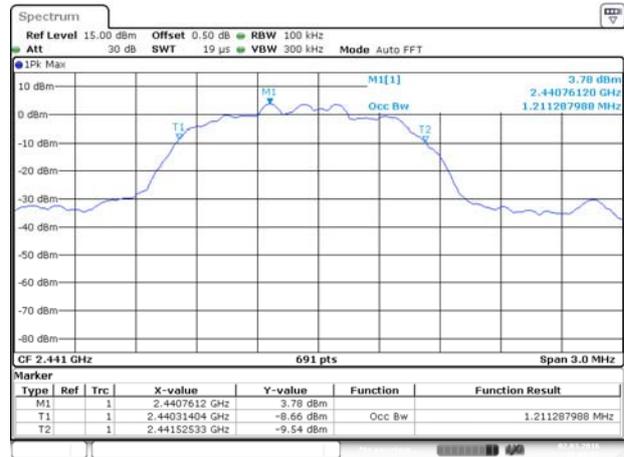

Date: 2 MAR 2016 16:08:58

### 8-DPSK HIGH CHANNEL



Date: 2 MAR 2016 16:09:20


## A.4 Hopping Frequency Separation

### Test Data


Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Verdict
GFSK	1.0029	1.116	0.744	Pass
$\Pi/4$ -DQPSK	1.0029	1.372	0.915	Pass
8-DPSK	1.0029	1.372	0.915	Pass

### Test Plots


#### GFSK

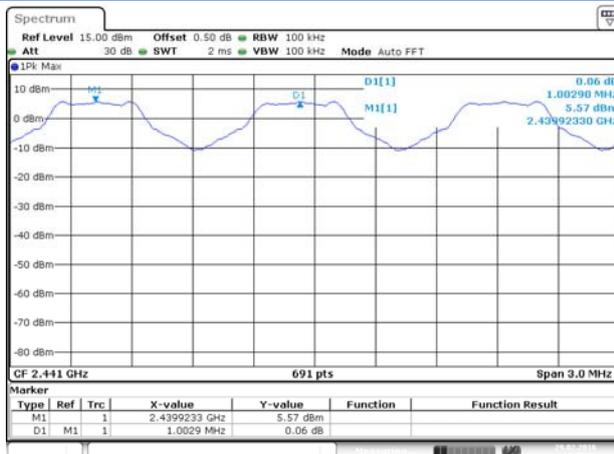

#### $\Pi/4$ -DQPSK

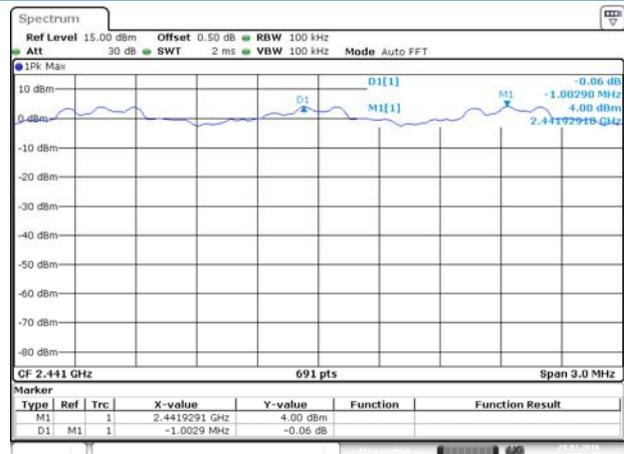

#### 8-DPSK

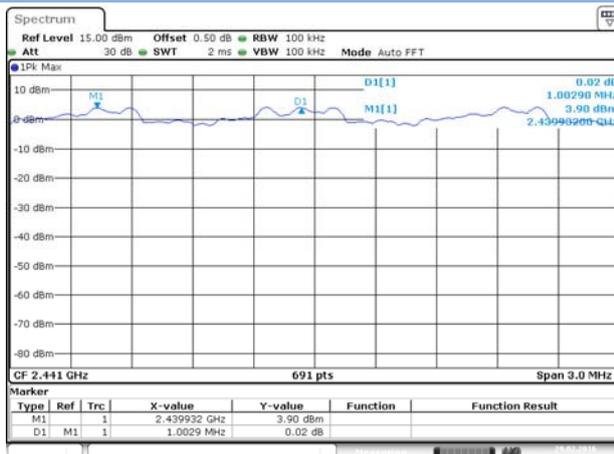


## A.5 Average Time of Occupancy

### Test Data

GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38551	123.367	0.4	Pass
DH 3	1.64638	263.429	0.4	Pass
DH 5	2.89275	308.570	0.4	Pass
□/4-DQPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.31594	101.104	0.4	Pass
DH 3	1.65217	264.355	0.4	Pass
DH 5	2.89855	309.188	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.40290	128.932	0.4	Pass
DH 3	1.64638	175.619	0.4	Pass
DH 5	2.89130	308.415	0.4	Pass


### Test Plots

GFSK DH1

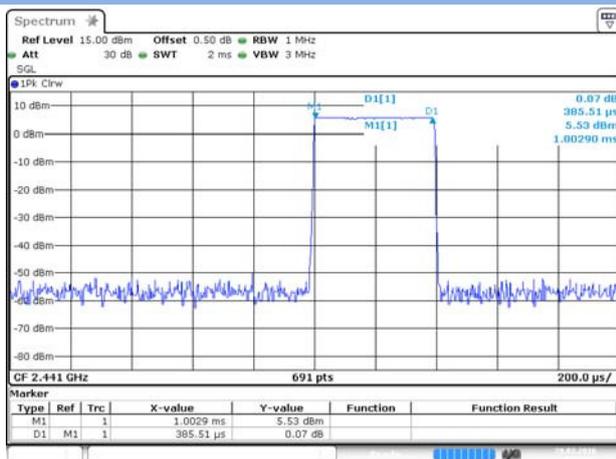


Date: 29 FEB 2016 11:21:36

GFSK DH3

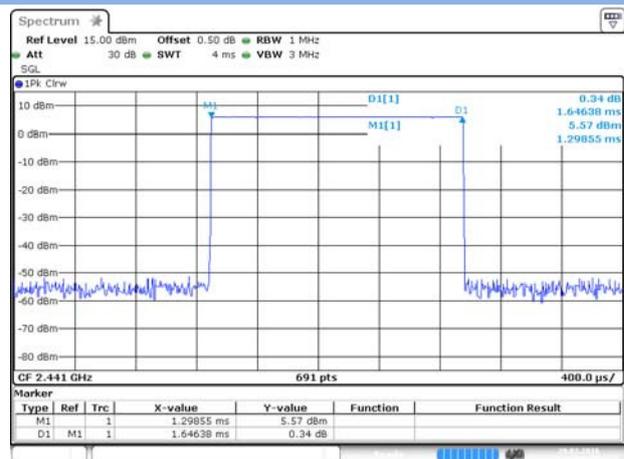


Date: 29 FEB 2016 13:37:20

## GFSK DH5

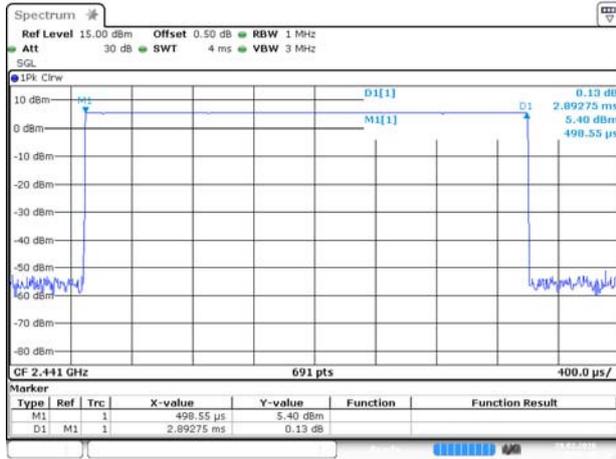


Date: 29 FEB 2016 11:16:41

## II/4-DQPSK DH1

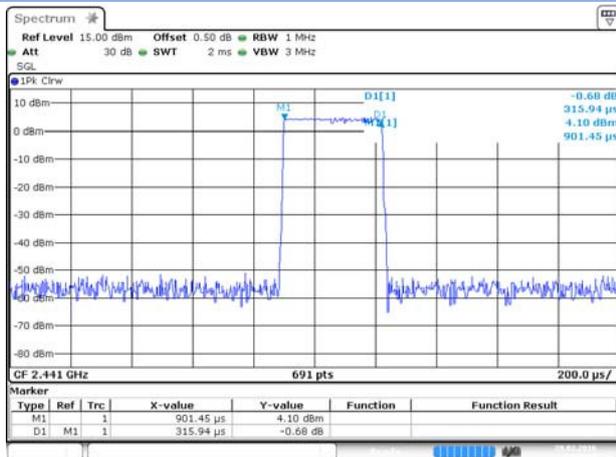


Date: 29 FEB 2016 13:41:38

## II/4-DQPSK DH3

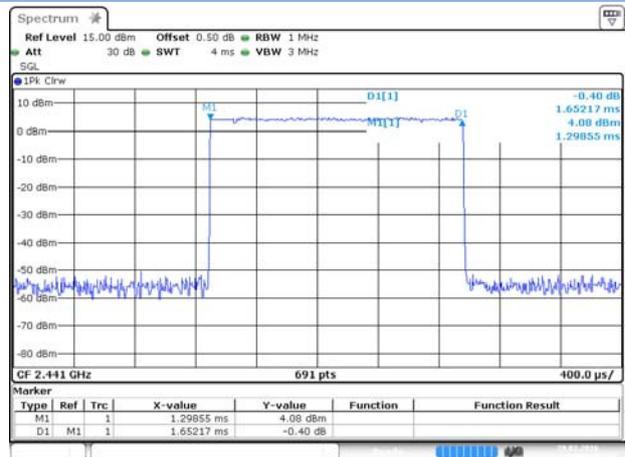


Date: 29 FEB 2016 13:40:03

## II/4-DQPSK DH5

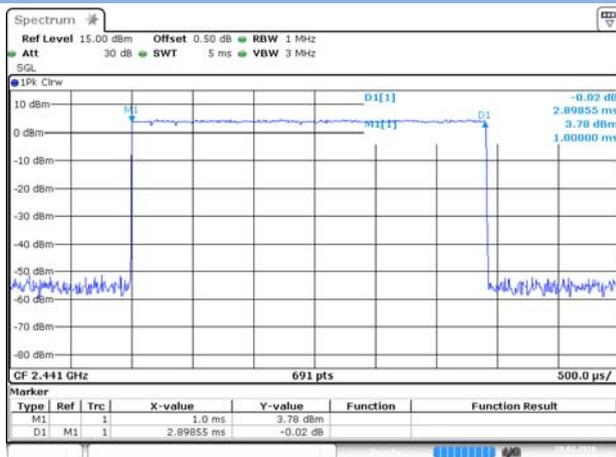


Date: 29 FEB 2016 11:18:34

## 8-DPSK DH1

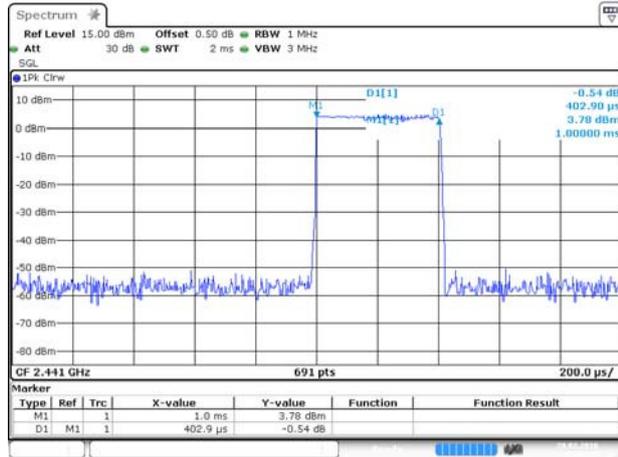


Date: 29 FEB 2016 11:22:35

## 8-DPSK DH3

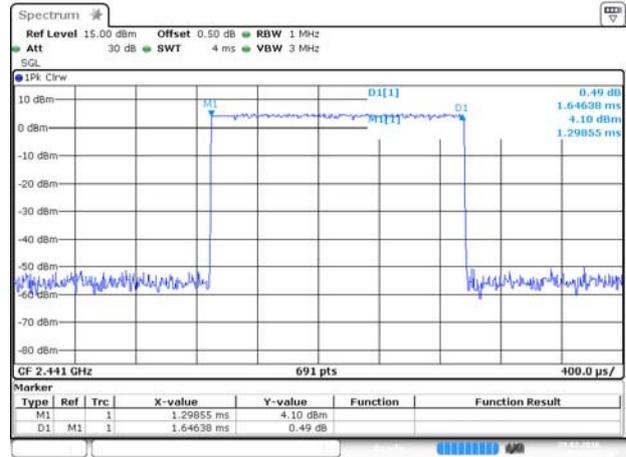

Date: 29 FEB 2016 13:38:55

## 8-DPSK DH5

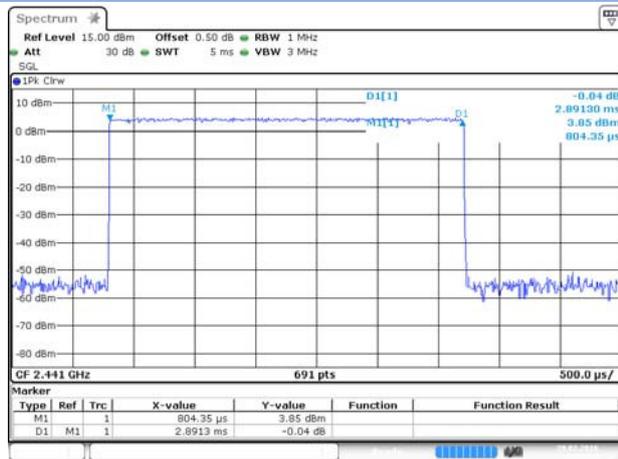

Date: 29 FEB 2016 11:20:00

## A.6 Conducted Spurious Emissions

### Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-46.06	3.98	-16.02	Pass
Middle	-48.22	5.59	-14.41	Pass
High	-49.18	7.21	-12.79	Pass
II/4-DQPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-48.67	0.04	-19.96	Pass
Middle	-51.1	3.19	-16.81	Pass
High	-51.06	5.02	-14.98	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-48.18	0.68	-19.32	Pass
Middle	-50.75	3.59	-16.41	Pass
High	-50.71	5.36	-14.64	Pass


## Test Plots

## GFSK LOW CHANNEL , BAND EDGE




Date: 29 FEB 2016 09:29:44

## GFSK LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

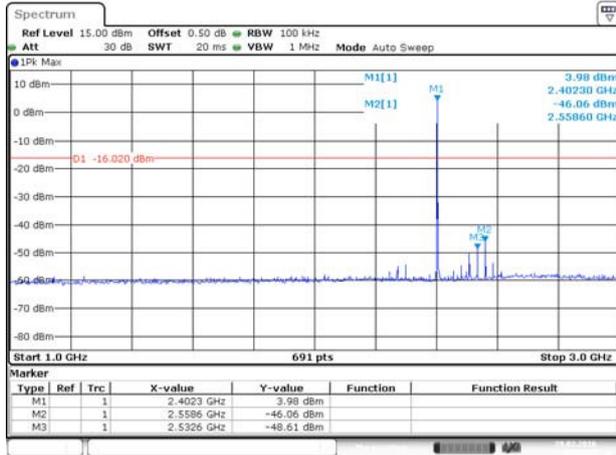


Date: 29 FEB 2016 09:51:18

## GFSK LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

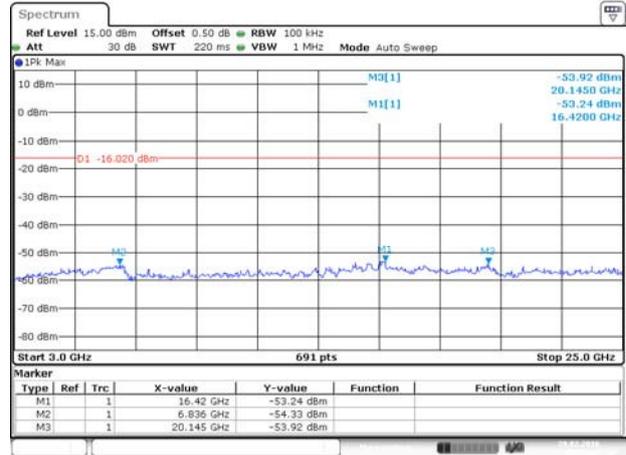


Date: 29 FEB 2016 09:53:22

## GFSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

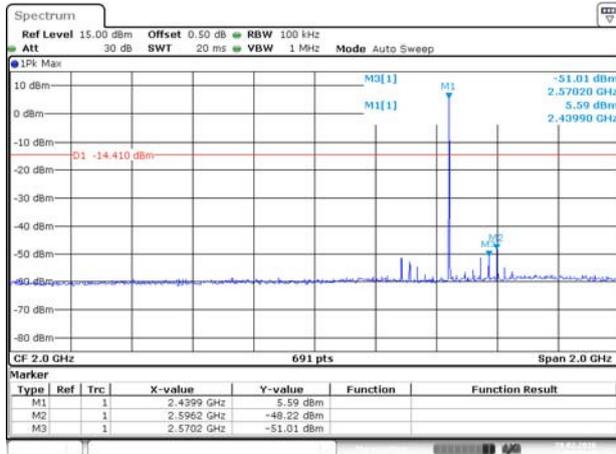

Date: 29 FEB 2016 09:55:44

## GFSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

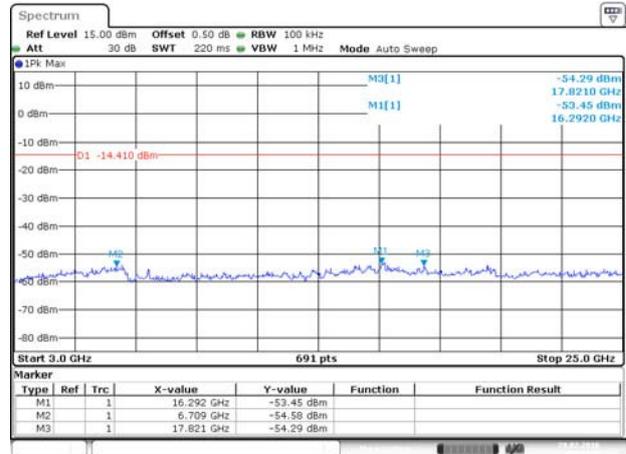


Date: 29 FEB 2016 09:57:25

## GFSK High CHANNEL , BAND EDGE




Date: 29 FEB 2016 09:33:56

## GFSK High CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

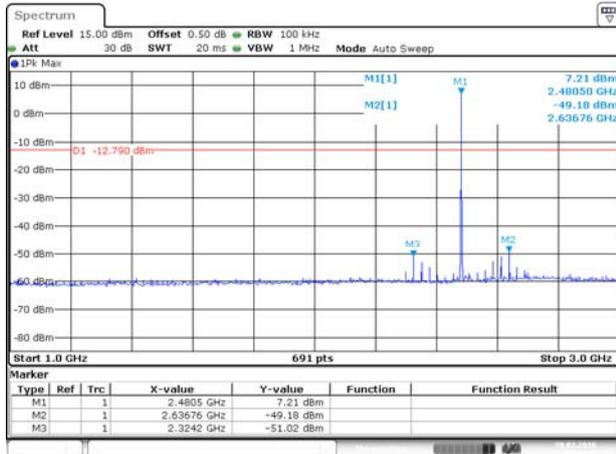


Date: 29 FEB 2016 09:37:32

## GFSK High CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

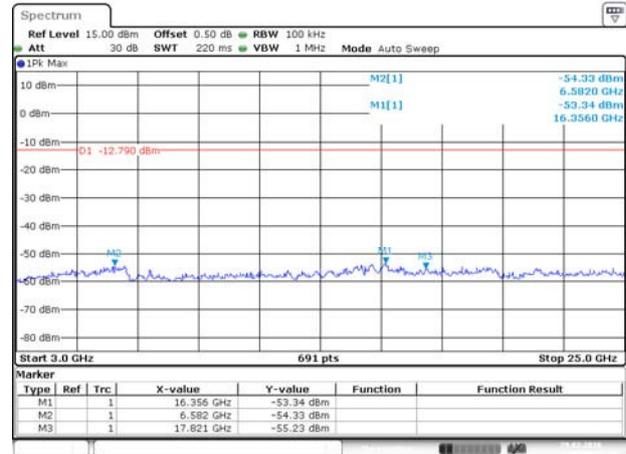


Date: 29 FEB 2016 09:41:45

## II/4-DQPSK LOW CHANNEL , BAND EDGE

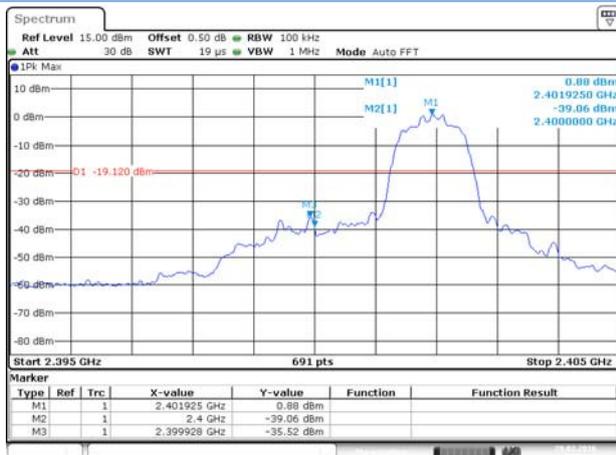


Date: 29 FEB 2016 09:58:36

## II/4-DQPSK LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

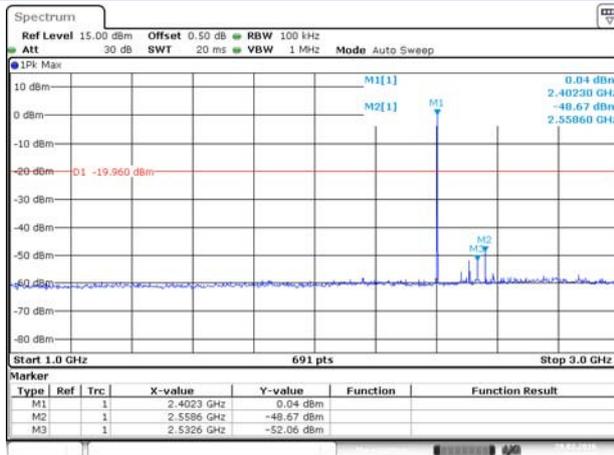


Date: 29 FEB 2016 10:13:50

## II/4-DQPSK LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

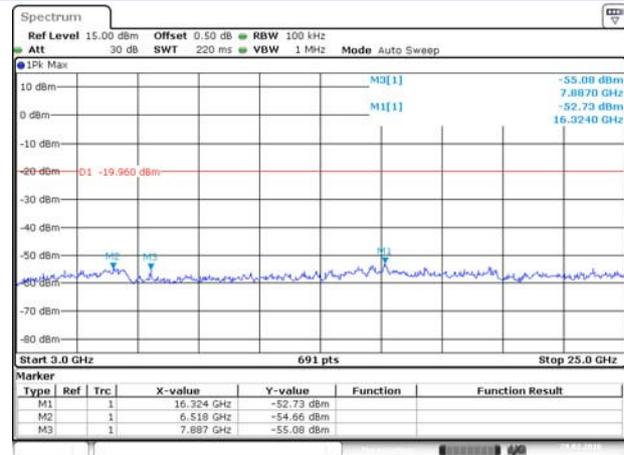


Date: 29 FEB 2016 10:15:07

## II/4-DQPSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

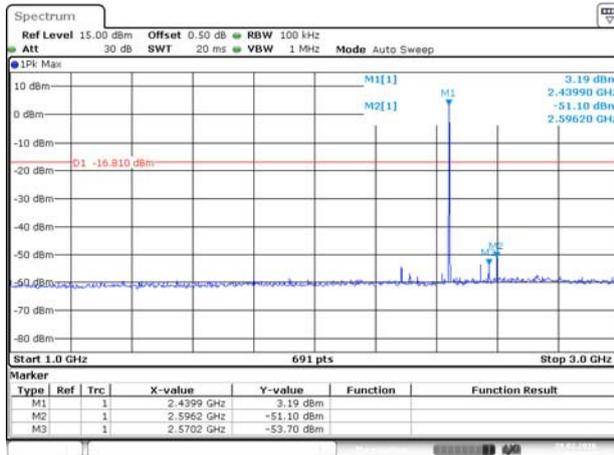

Date: 29 FEB 2016 10:10:31

## II/4-DQPSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

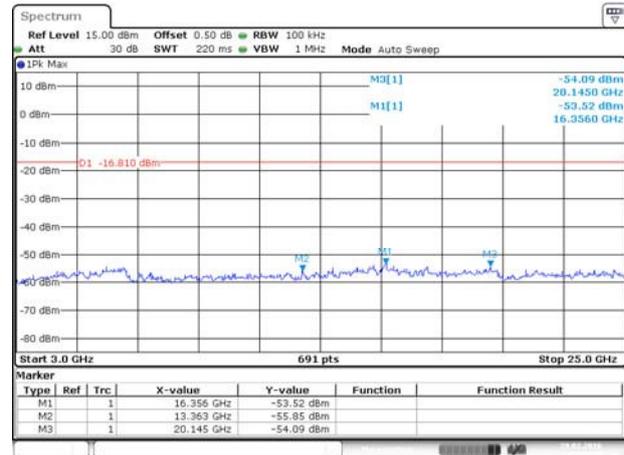


Date: 29 FEB 2016 10:12:29

## II/4-DQPSK High CHANNEL , BAND EDGE




Date: 29 FEB 2016 10:19:54

## II/4-DQPSK High CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

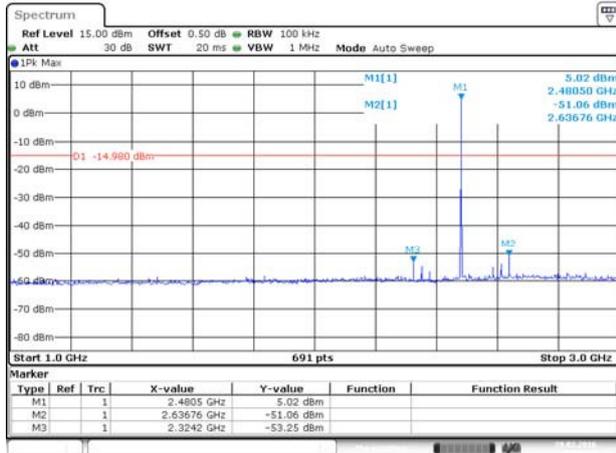


Date: 29 FEB 2016 10:08:03

## II/4-DQPSK High CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

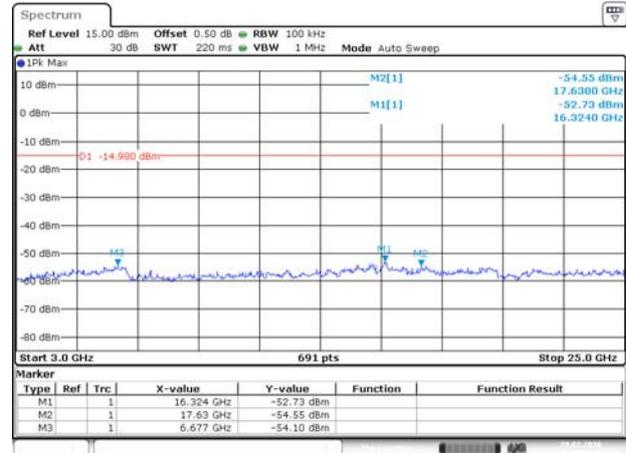


Date: 29 FEB 2016 10:09:45

## 8-DPSK LOW CHANNEL , BAND EDGE

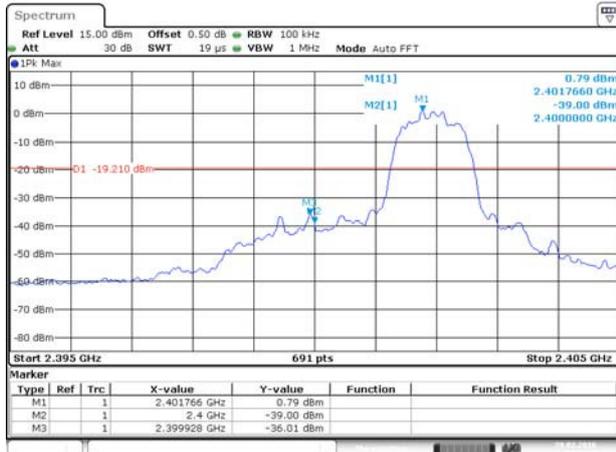


Date: 29 FEB 2016 10:21:52

## 8-DPSK LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

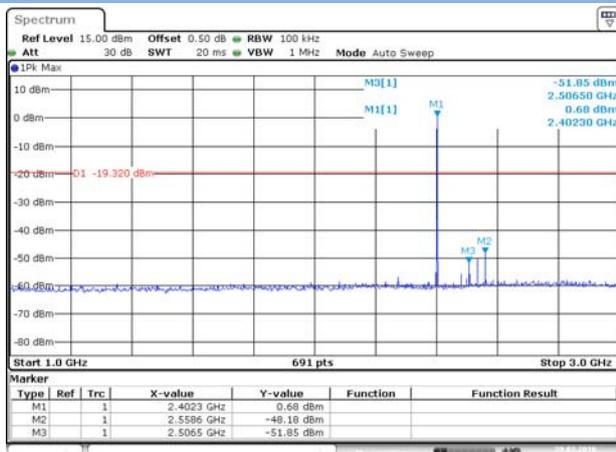


Date: 29 FEB 2016 10:37:49

## 8-DPSK LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

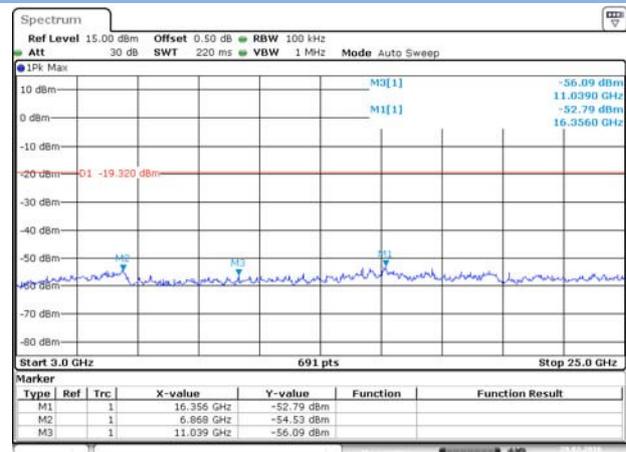


Date: 29 FEB 2016 10:40:33

## 8-DPSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

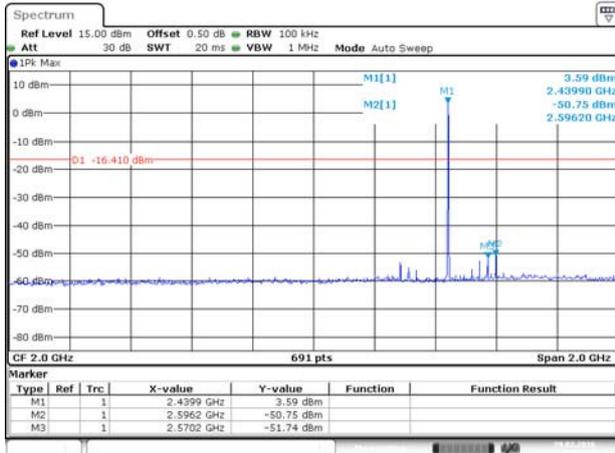

Date: 29 FEB 2016 10:32:43

## 8-DPSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

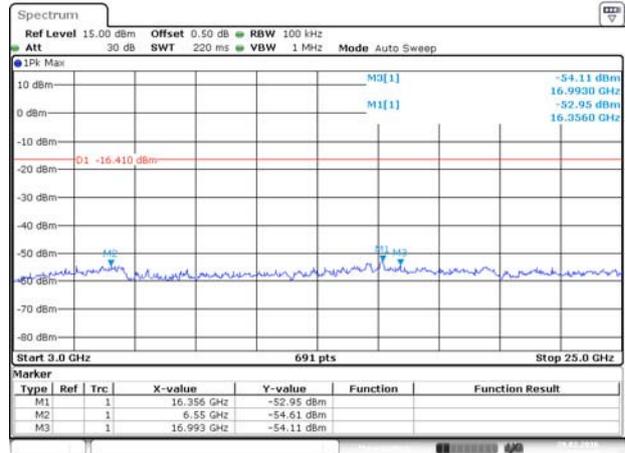


Date: 29 FEB 2016 10:34:38

## 8-DPSK High CHANNEL , BAND EDGE




Date: 29 FEB 2016 10:23:32

## 8-DPSK High CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

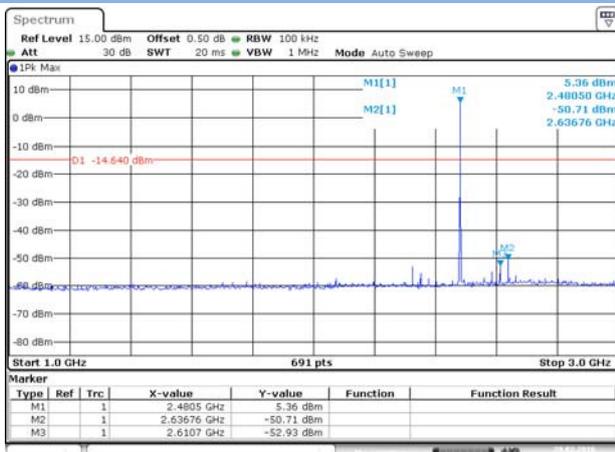


Date: 29 FEB 2016 10:25:53

## 8-DPSK High CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

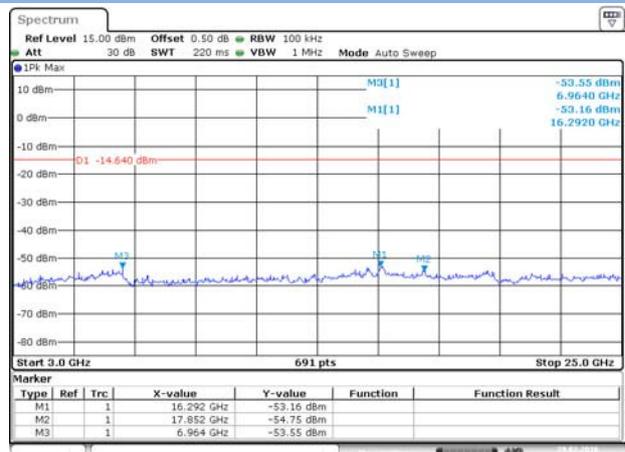

Date: 29 FEB 2016 10:30:44

## GFSK Hopping BAND EDGE (LOW)

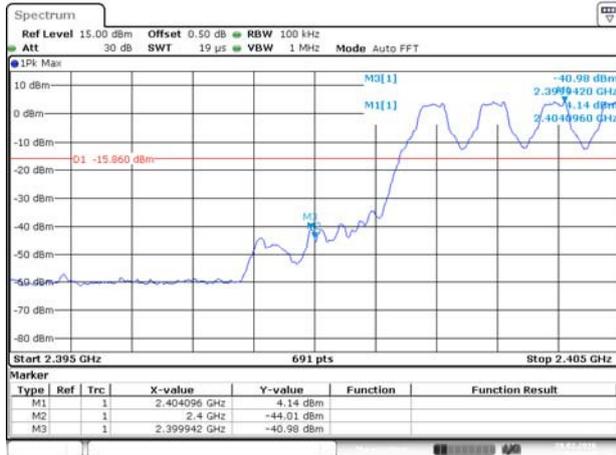


Date: 29 FEB 2016 11:11:24

## GFSK Hopping BAND EDGE (HIGH)




Date: 29 FEB 2016 11:09:58

## GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

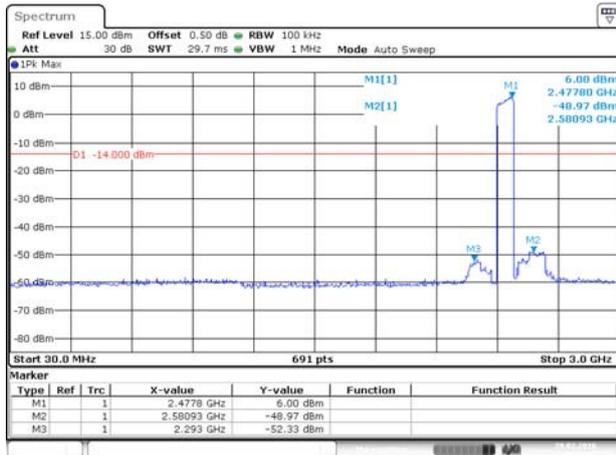


Date: 29 FEB 2016 11:12:27

## GFSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

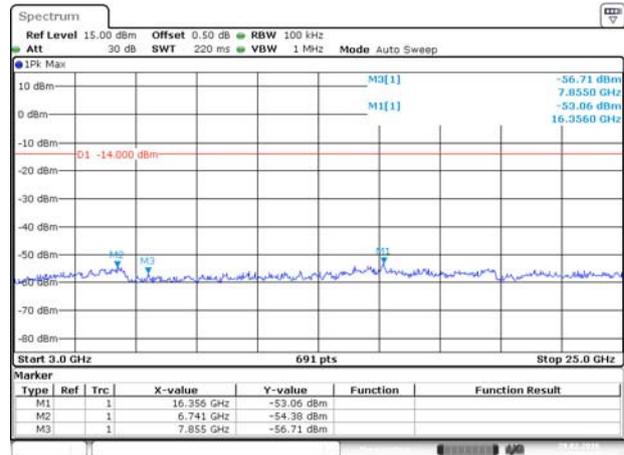

Date: 29 FEB 2016 11:13:01

## II/4-DQPSK Hopping BAND EDGE (LOW)

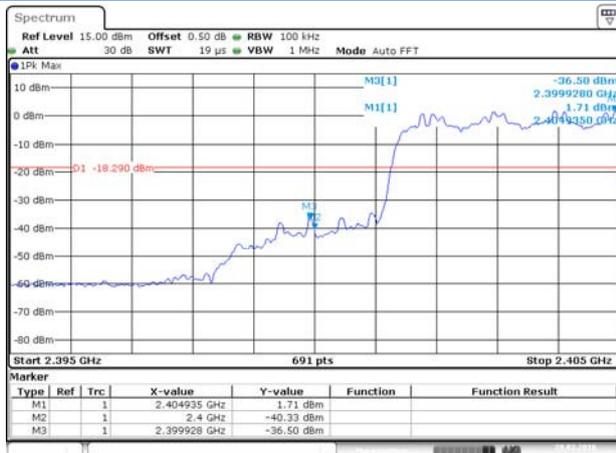


Date: 29 FEB 2016 11:01:07

## II/4-DQPSK Hopping BAND EDGE (HIGH)




Date: 29 FEB 2016 11:08:05

## Π/4-DQPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

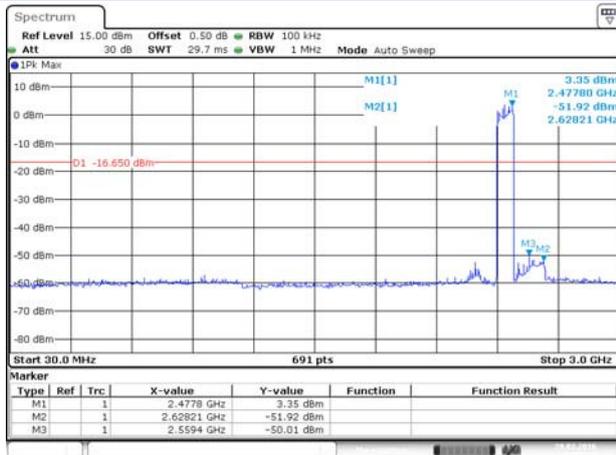

Date: 29 FEB 2016 10:59:19

## Π/4-DQPSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

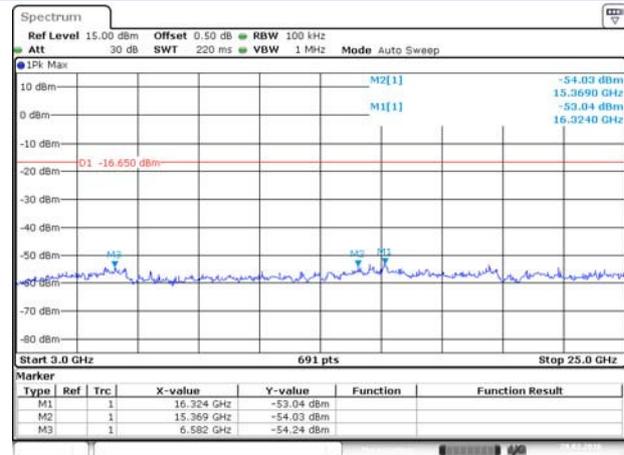

Date: 29 FEB 2016 10:59:57

## 8-DPSK Hopping BAND EDGE (LOW)




Date: 29 FEB 2016 10:52:21

## 8-DPSK Hopping BAND EDGE (HIGH)




Date: 29 FEB 2016 10:54:42

## 8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

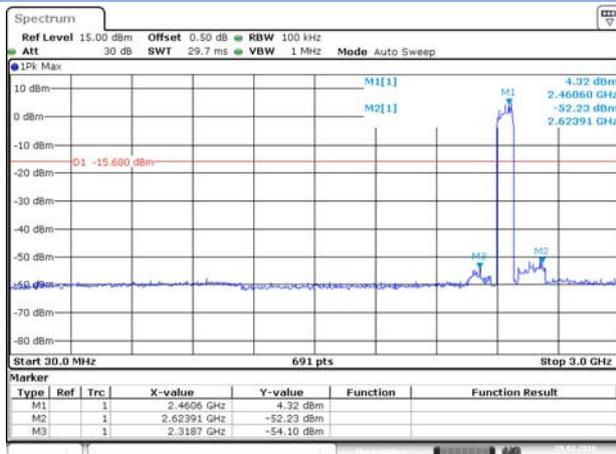

Date: 29 FEB 2016 10:56:54

## 8-DPSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

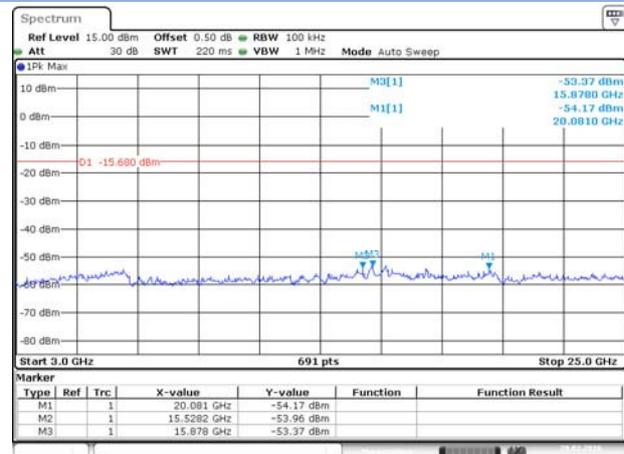

Date: 29 FEB 2016 10:57:58


## A.7 Conducted Emissions

Note: All configurations have been tested, only the worst configuration (GFSK High Channel) shown here.

### Test Data and Plots

#### PHASE L


CE Test case\_FCC\_CE\_FCC PART 15\_Class B

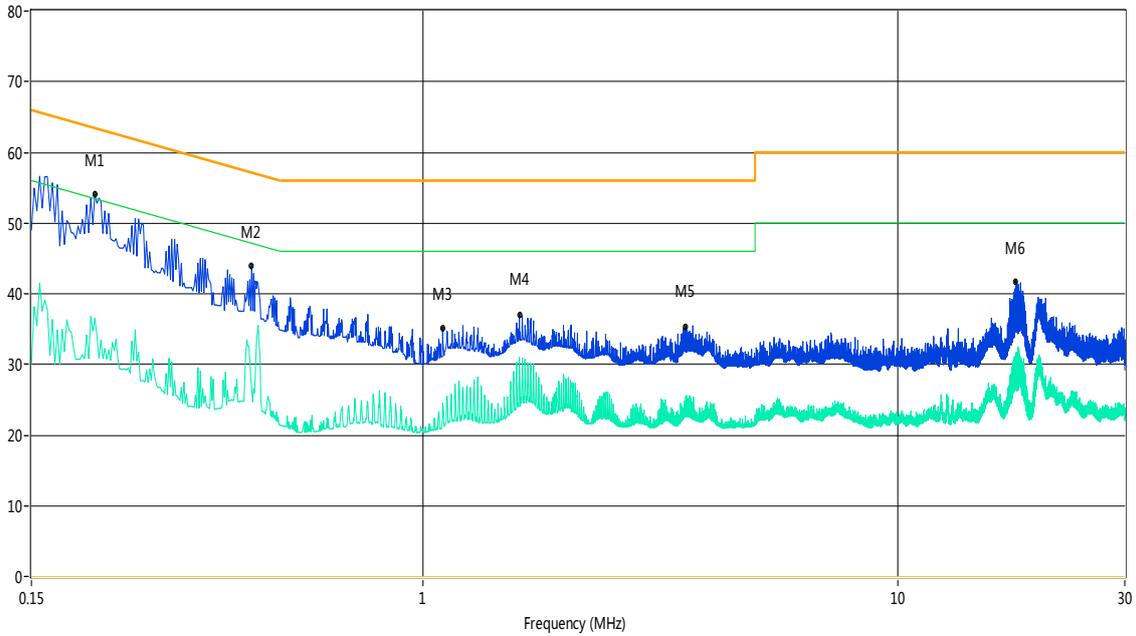

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.20	54.0	13.00	64.5	10.50	Peak	L Line	Pass
1**	0.20	36.5	13.00	54.5	18.00	AV	L Line	Pass
2	0.44	43.9	13.00	57.8	13.90	Peak	L Line	Pass
2**	0.44	26.6	13.00	47.8	21.20	AV	L Line	Pass
3	1.10	35.1	13.00	56.0	20.90	Peak	L Line	Pass
3**	1.10	24.5	13.00	46.0	21.50	AV	L Line	Pass
4	1.60	37.0	13.00	56.0	19.00	Peak	L Line	Pass
4**	1.60	31.0	13.00	46.0	15.00	AV	L Line	Pass
5	3.57	35.3	13.00	56.0	20.70	Peak	L Line	Pass
5**	3.57	25.5	13.00	46.0	20.50	AV	L Line	Pass
6	17.70	41.7	13.00	60.0	18.30	Peak	L Line	Pass
6**	17.70	31.5	13.00	50.0	18.50	AV	L Line	Pass

PHASE N

CE Test case\_FCC\_CE\_FCC PART 15\_ Class B

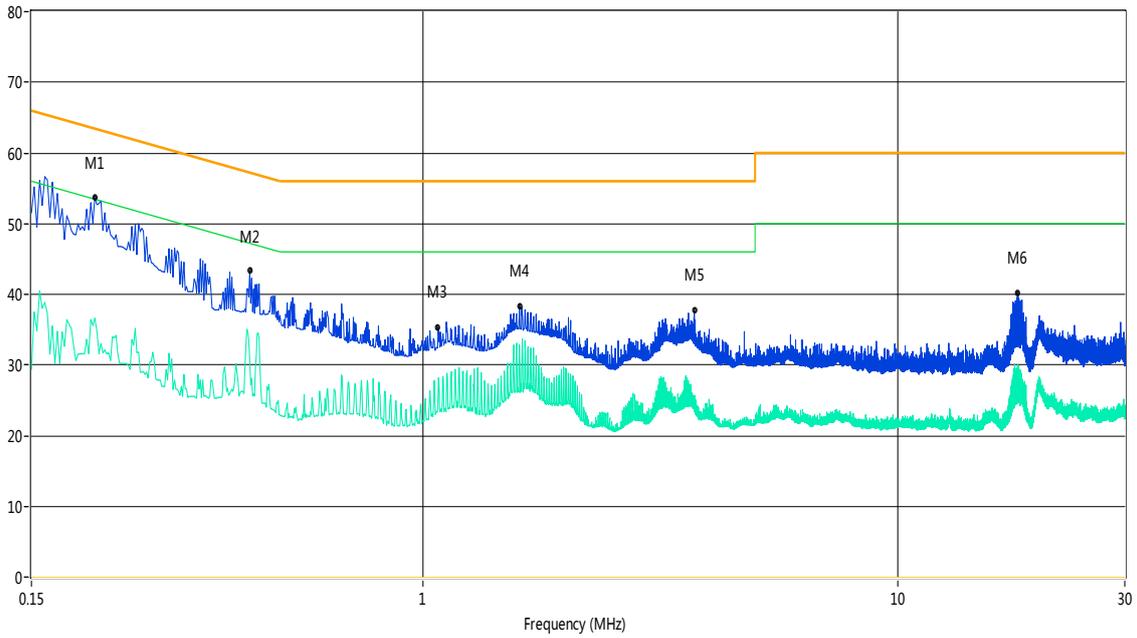


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.20	53.7	13.00	64.5	10.80	Peak	N Line	Pass
1**	0.20	36.6	13.00	54.5	17.90	AV	N Line	Pass
2	0.43	43.3	13.00	57.9	14.60	Peak	N Line	Pass
2**	0.43	30.6	13.00	47.9	17.30	AV	N Line	Pass
3	1.08	35.3	13.00	56.0	20.70	Peak	N Line	Pass
3**	1.08	26.0	13.00	46.0	20.00	AV	N Line	Pass
4	1.60	38.3	13.00	56.0	17.70	Peak	N Line	Pass
4**	1.60	32.9	13.00	46.0	13.10	AV	N Line	Pass
5	3.73	37.7	13.00	56.0	18.30	Peak	N Line	Pass
5**	3.73	24.4	13.00	46.0	21.60	AV	N Line	Pass
6	17.88	40.1	13.00	60.0	19.90	Peak	N Line	Pass
6**	17.88	28.8	13.00	50.0	21.20	AV	N Line	Pass


## A.8 Radiated Spurious Emission

### Duty cycle correction factor for average measurement.

DH5 on time/100 ms (One Pulse) Plot on Channel 39

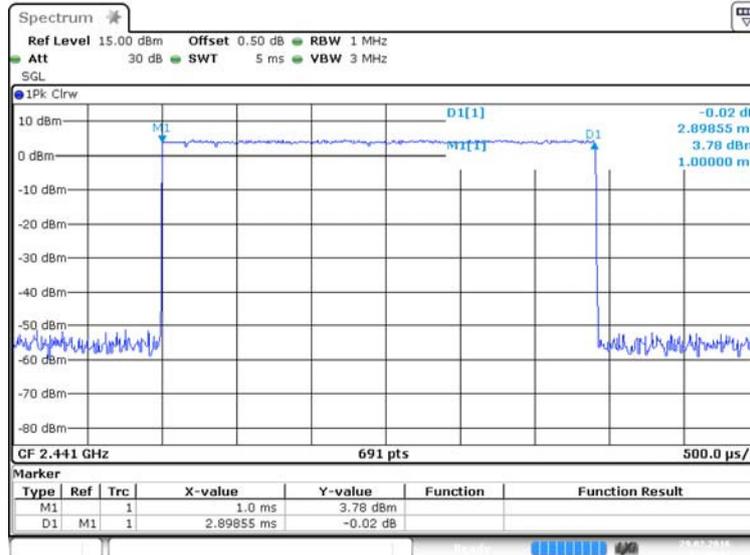

DH5 on time/100 ms (Count Pulses) Plot on Channel 39

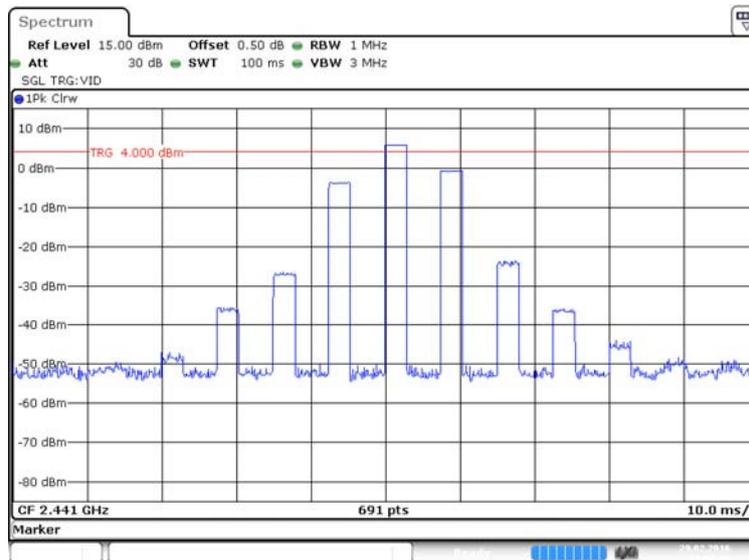

#### Note:

1. Duty cycle = on time/100 milliseconds =  $3 * 2.899 / 100 = 8.697 \%$
2. Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -21.21\text{dB}$
3. DH5 has the highest duty cycle and is reported.

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: All configurations have been tested, only the worst configuration (GFSK High Channel) shown here.


Test Data and Plots

Note 1: All configure were tested but only the worst data (GFSK) was reported in this report.

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30 MHz to 1 GHz, ANT V


RE Test case\_FCC\_Part 15C\_FCC 15C 30MHz-1GHz

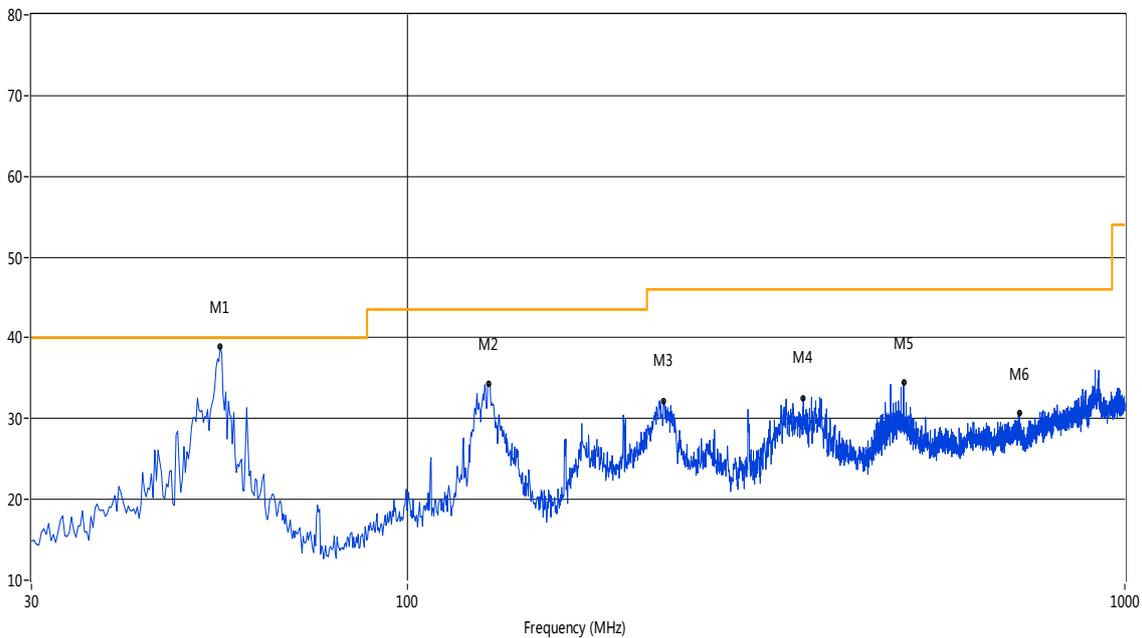

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	54.97	38.86	-18.91	40.0	1.14	Peak	288.25	100	Vertical	N/A
1*	54.97	34.65	-18.91	40.0	5.35	QP	288.25	100	Vertical	Pass
2	130.13	34.25	-23.09	43.5	9.25	Peak	340.46	100	Vertical	Pass
3	228.07	32.26	-19.43	46.0	13.74	Peak	145.04	100	Vertical	Pass
4	356.57	32.59	-16.02	46.0	13.41	Peak	355.16	100	Vertical	Pass
5	491.85	34.46	-13.28	46.0	11.54	Peak	29.05	100	Vertical	Pass
6	713.44	30.64	-8.47	46.0	15.36	Peak	5.02	100	Vertical	Pass

## 30 MHz to 1 GHz, ANT H

RE Test case\_FCC\_Part 15C\_FCC 15C 30MHz-1GHz

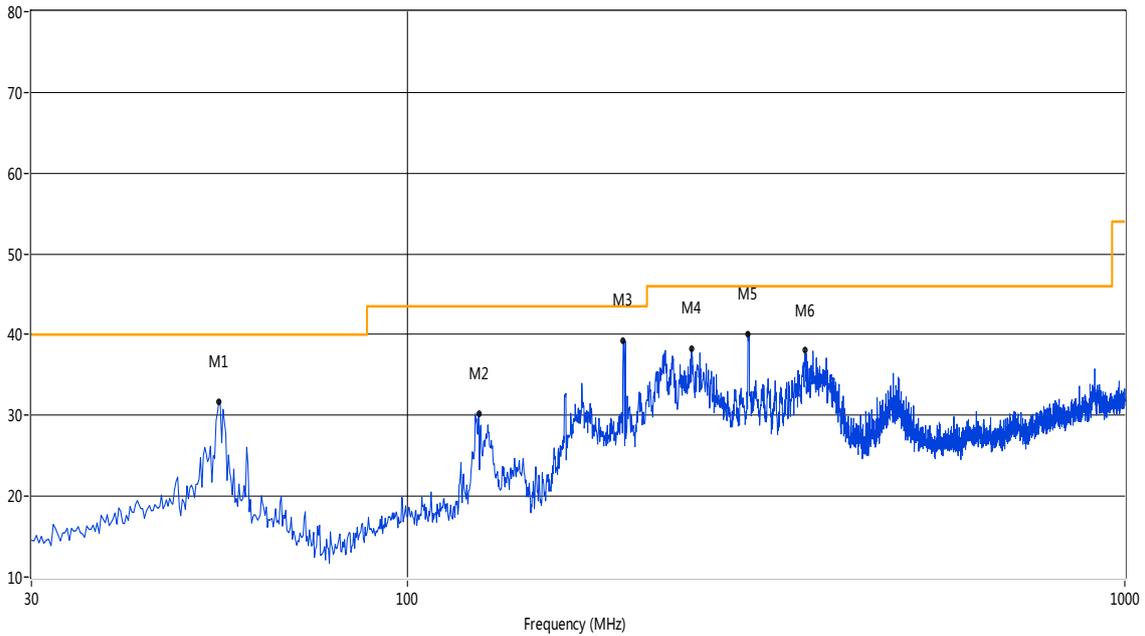

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	54.73	31.73	-18.82	40.0	8.27	Peak	153.48	100	Horizontal	Pass
2	126.01	30.28	-22.60	43.5	13.22	Peak	314.84	100	Horizontal	Pass
3	200.19	39.28	-20.04	43.5	4.22	Peak	322.07	100	Horizontal	Pass
4	249.16	38.33	-18.84	46.0	7.67	Peak	293.73	100	Horizontal	Pass
5	298.62	40.12	-17.60	46.0	5.88	Peak	272.11	100	Horizontal	Pass
6	358.50	38.09	-15.97	46.0	7.91	Peak	320.90	100	Horizontal	Pass

Note: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Test Data and Plots (1 GHz ~ 10th Harmonic)

GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1498.37	44.78	-4.40	74.0	29.22	Peak	29.10	100	Vertical	Pass
2	2401.65	100.95	-0.27	74.0	-26.95	Peak	80.00	100	Vertical	N/A
3	2558.11	55.15	0.07	74.0	18.85	Peak	80.00	100	Vertical	Pass
3**	2558.11	48.26	0.07	54.0	5.74	AV	80.00	100	Vertical	Pass
4	4804.05	57.01	13.74	74.0	16.99	Peak	78.10	100	Vertical	Pass
4**	4804.05	50.01	13.74	54.0	3.99	AV	78.10	100	Vertical	Pass
5	5964.76	52.06	15.65	74.0	21.94	Peak	348.60	100	Vertical	Pass
6	12210.90	51.46	20.66	74.0	22.54	Peak	285.60	100	Vertical	Pass

GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1548.36	44.89	-4.22	74.0	29.11	Peak	279.20	100	Horizontal	Pass
2	2402.15	103.22	-0.34	74.0	-29.22	Peak	25.60	100	Horizontal	N/A
3	2558.11	58.55	0.07	74.0	15.45	Peak	25.60	100	Horizontal	Pass
3**	2558.11	50.87	0.07	54.0	3.13	AV	25.60	100	Horizontal	Pass
4	4803.30	53.99	13.74	74.0	19.95	Peak	221.10	100	Horizontal	Pass
5	5939.27	53.02	15.68	74.0	20.98	Peak	95.80	100	Horizontal	Pass
6	12053.66	52.68	20.82	74.0	21.32	Peak	269.70	100	Horizontal	Pass

## GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1354.91	44.79	-4.51	74.0	29.21	Peak	10.50	100	Vertical	Pass
2	2441.14	103.73	-0.38	74.0	-29.73	Peak	74.20	100	Vertical	N/A
3	2596.60	53.95	0.52	74.0	20.05	Peak	80.50	100	Vertical	Pass
4	4882.03	55.47	13.60	74.0	18.53	Peak	91.00	100	Vertical	Pass
4**	4882.03	48.52	13.60	54.0	5.48	AV	91.00	100	Vertical	Pass
5	12053.66	51.66	20.82	74.0	22.34	Peak	269.70	100	Vertical	Pass
6	19309.48	50.14	13.46	74.0	23.86	Peak	57.40	100	Vertical	Pass

## GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1353.91	44.45	-4.57	74.0	29.55	Peak	-0.60	100	Horizontal	Pass
2	2441.14	106.49	-0.38	74.0	-32.49	Peak	30.00	100	Horizontal	N/A
3	2597.10	56.29	0.47	74.0	17.71	Peak	30.00	100	Horizontal	Pass
3**	2597.10	49.87	0.47	54.0	4.13	AV	30.00	100	Horizontal	Pass
4	4882.03	53.34	13.60	74.0	20.66	Peak	186.40	100	Horizontal	Pass
5	5953.51	51.43	15.90	74.0	22.57	Peak	269.90	100	Horizontal	Pass
6	12053.66	52.35	20.82	74.0	21.65	Peak	269.70	100	Horizontal	Pass

## GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1374.41	45.54	-4.58	74.0	28.46	Peak	144.30	100	Vertical	Pass
2	2479.63	103.73	-0.63	74.0	-29.73	Peak	74.60	100	Vertical	N/A
3	2636.09	52.58	0.54	74.0	21.42	Peak	74.60	100	Vertical	Pass
4	4960.01	57.99	14.22	74.0	16.01	Peak	93.00	100	Vertical	Pass
4**	4960.01	50.31	14.22	54.0	3.69	AV	93.00	100	Vertical	Pass
5	5973.01	52.55	15.65	74.0	21.45	Peak	0.10	100	Vertical	Pass
6	12053.66	52.12	20.82	74.0	21.88	Peak	269.70	100	Vertical	Pass

## GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1397.40	44.87	-4.57	74.0	29.13	Peak	157.20	100	Horizontal	Pass
2	2480.13	107.35	-0.60	74.0	-33.35	Peak	35.70	100	Horizontal	N/A
3	2636.59	55.41	0.59	74.0	18.59	Peak	29.40	100	Horizontal	Pass
3**	2636.59	48.97	0.59	54.0	5.03	AV	29.40	100	Horizontal	Pass
4	4960.01	56.98	14.22	74.0	17.02	Peak	30.00	100	Horizontal	Pass
4**	4960.01	49.63	14.22	54.0	4.37	AV	30.00	100	Horizontal	Pass
5	5986.50	52.01	15.72	74.0	21.99	Peak	122.70	100	Horizontal	Pass
6	12053.66	51.60	20.82	74.0	22.40	Peak	269.70	100	Horizontal	Pass

## □/4-DQPSK LOW CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1297.93	44.62	-4.76	74.0	29.38	Peak	170.10	100	Vertical	Pass
2	2401.65	98.38	-0.27	74.0	-24.38	Peak	80.90	100	Vertical	N/A
3	2558.11	53.09	0.07	74.0	20.91	Peak	74.60	100	Vertical	Pass
4	4804.05	53.62	13.74	74.0	20.38	Peak	134.10	100	Vertical	Pass
5	7662.23	46.39	14.43	74.0	27.61	Peak	258.90	100	Vertical	Pass
6	12098.59	51.66	20.77	74.0	22.34	Peak	307.00	100	Vertical	Pass

## □/4-DQPSK LOW CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1399.40	43.89	-4.54	74.0	30.11	Peak	302.70	100	Horizontal	Pass
2	2402.15	100.74	-0.34	74.0	-26.74	Peak	29.50	100	Horizontal	N/A
3	2558.11	57.03	0.07	74.0	16.97	Peak	29.50	100	Horizontal	Pass
3**	2558.11	50.31	0.07	54.0	3.69	AV	29.50	100	Horizontal	Pass
4	4729.82	51.51	13.61	74.0	22.49	Peak	278.80	100	Horizontal	Pass
5	5735.32	52.83	15.37	74.0	21.17	Peak	111.60	100	Horizontal	Pass
6	11975.04	51.67	20.76	74.0	22.33	Peak	70.90	100	Horizontal	Pass

## □/4-DQPSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1300.92	45.05	-4.78	74.0	28.95	Peak	149.50	100	Vertical	Pass
2	2440.64	101.48	-0.41	74.0	-27.48	Peak	73.20	100	Vertical	N/A
3	2963.51	50.62	2.42	74.0	23.38	Peak	143.20	100	Vertical	Pass
4	4881.28	53.40	13.62	74.0	20.60	Peak	88.50	100	Vertical	Pass
5	5961.76	52.43	15.71	74.0	21.57	Peak	320.60	100	Vertical	Pass
6	11975.04	51.35	20.76	74.0	22.65	Peak	70.90	100	Vertical	Pass

## □/4-DQPSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1373.41	44.52	-4.54	74.0	29.48	Peak	118.50	100	Horizontal	Pass
2	2441.14	104.30	-0.38	74.0	-30.30	Peak	23.50	100	Horizontal	N/A
3	2597.10	53.38	0.47	74.0	20.62	Peak	36.10	100	Horizontal	Pass
4	4684.83	51.91	13.21	74.0	22.09	Peak	147.30	100	Horizontal	Pass
5	5958.76	52.04	15.80	74.0	21.96	Peak	231.80	100	Horizontal	Pass
6	12053.66	52.30	20.82	74.0	21.70	Peak	269.70	100	Horizontal	Pass

## □/4-DQPSK HIGH CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1542.36	43.74	-4.19	74.0	30.26	Peak	217.80	100	Vertical	Pass
2	2480.13	101.39	-0.60	74.0	-27.39	Peak	80.00	100	Vertical	N/A
3	2863.53	51.00	2.01	74.0	23.00	Peak	168.80	100	Vertical	Pass
4	4960.01	53.84	14.22	74.0	20.16	Peak	88.40	100	Vertical	Pass
5	7224.21	46.65	14.37	74.0	27.35	Peak	274.90	100	Vertical	Pass
6	12053.66	52.15	20.82	74.0	21.85	Peak	269.70	100	Vertical	Pass

## □/4-DQPSK HIGH CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1352.41	44.13	-4.56	74.0	29.87	Peak	80.50	100	Horizontal	Pass
2	2480.13	105.55	-0.60	74.0	-31.55	Peak	33.70	100	Horizontal	N/A
3	2609.60	52.22	0.69	74.0	21.78	Peak	33.70	100	Horizontal	Pass
4	4959.26	53.74	14.19	74.0	20.26	Peak	40.90	100	Horizontal	Pass
5	5953.51	52.04	15.90	74.0	21.96	Peak	334.40	100	Horizontal	Pass
6	12233.36	51.78	20.65	74.0	22.22	Peak	0.30	100	Horizontal	Pass

## 8-DPSK LOW CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1330.42	45.26	-4.83	74.0	28.74	Peak	48.30	100	Vertical	Pass
2	2401.65	98.69	-0.27	74.0	-24.69	Peak	80.00	100	Vertical	N/A
3	2558.11	54.66	0.07	74.0	19.34	Peak	80.00	100	Vertical	Pass
3**	2558.11	46.53	0.07	54.0	7.47	AV	80.00	100	Vertical	Pass
4	4803.30	53.69	13.74	74.0	20.31	Peak	144.20	100	Vertical	Pass
5	5982.00	52.45	15.82	74.0	21.55	Peak	125.60	100	Vertical	Pass
6	11975.04	51.75	20.76	74.0	22.25	Peak	70.90	100	Vertical	Pass

## 8-DPSK LOW CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1559.86	44.40	-4.01	74.0	29.60	Peak	112.20	100	Horizontal	Pass
2	2401.65	100.95	-0.27	74.0	-26.95	Peak	29.70	100	Horizontal	N/A
3	2558.11	56.24	0.07	74.0	17.76	Peak	29.70	100	Horizontal	Pass
3**	2558.11	48.37	0.07	54.0	5.63	AV	29.70	100	Horizontal	Pass
4	4676.58	51.66	13.11	74.0	22.34	Peak	51.20	100	Horizontal	Pass
5	5990.25	51.92	15.78	74.0	22.08	Peak	358.60	100	Horizontal	Pass
6	12053.66	52.31	20.82	74.0	21.69	Peak	269.70	100	Horizontal	Pass

## 8-DPSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1344.41	45.70	-4.64	74.0	28.30	Peak	245.80	100	Vertical	Pass
2	2441.14	101.67	-0.38	74.0	-27.67	Peak	73.80	100	Vertical	N/A
3	2863.03	51.02	2.04	74.0	22.98	Peak	131.60	100	Vertical	Pass
4	4882.03	53.73	13.60	74.0	20.27	Peak	93.20	100	Vertical	Pass
5	5983.50	52.18	15.80	74.0	21.82	Peak	260.50	100	Vertical	Pass
6	11975.04	51.69	20.76	74.0	22.31	Peak	70.90	100	Vertical	Pass

## 8-DPSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1293.43	44.24	-4.85	74.0	29.76	Peak	220.10	100	Horizontal	Pass
2	2441.14	104.75	-0.38	74.0	-30.75	Peak	35.80	100	Horizontal	N/A
3	2596.60	53.98	0.52	74.0	20.02	Peak	35.80	100	Horizontal	Pass
4	4690.08	51.52	13.22	74.0	22.48	Peak	116.30	100	Horizontal	Pass
5	5967.76	51.90	15.61	74.0	22.10	Peak	297.70	100	Horizontal	Pass
6	10953.00	50.21	19.89	74.0	23.79	Peak	344.50	100	Horizontal	Pass

## 8-DPSK HIGH CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1782.80	45.39	-3.65	74.0	28.61	Peak	35.20	100	Vertical	Pass
2	2480.13	101.43	-0.60	74.0	-27.43	Peak	73.20	100	Vertical	N/A
3	2863.03	50.52	2.04	74.0	23.48	Peak	111.60	100	Vertical	Pass
4	4960.01	53.87	14.22	74.0	20.13	Peak	91.30	100	Vertical	Pass
5	6000.00	51.42	15.85	74.0	22.58	Peak	343.70	100	Vertical	Pass
6	12053.66	52.42	20.82	74.0	21.58	Peak	269.70	100	Vertical	Pass

## 8-DPSK HIGH CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1349.91	45.34	-4.57	74.0	28.66	Peak	1.00	100	Horizontal	Pass
2	2480.13	105.53	-0.60	74.0	-31.53	Peak	28.90	100	Horizontal	N/A
3	2850.54	51.18	1.97	74.0	22.82	Peak	169.20	100	Horizontal	Pass
4	4960.01	54.78	14.22	74.0	19.22	Peak	25.90	100	Horizontal	Pass
4**	4960.01	46.38	14.22	54.0	7.62	AV	25.90	100	Horizontal	Pass
5	8796.59	46.83	16.44	74.0	27.17	Peak	4.30	100	Horizontal	Pass
6	11975.04	51.47	20.76	74.0	22.53	Peak	70.90	100	Horizontal	Pass

Hopping Mode:

## GFSK MODE 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1383.40	44.63	-4.41	74.0	29.37	Peak	0.50	100	Vertical	Pass
2	2403.15	100.92	-0.20	74.0	-26.92	Peak	85.90	100	Vertical	N/A
3	2480.13	103.66	-0.60	74.0	-29.66	Peak	73.00	100	Vertical	N/A
4	4819.80	56.65	13.83	74.0	17.35	Peak	73.40	100	Vertical	Pass
4**	4819.80	49.97	13.83	54.0	4.03	AV	73.40	100	Vertical	Pass
5	4937.52	57.15	14.13	74.0	16.85	Peak	91.70	100	Vertical	Pass
5**	4937.52	50.12	14.13	54.0	3.88	AV	91.70	100	Vertical	Pass
6	5963.26	53.30	15.67	74.0	20.70	Peak	49.70	100	Vertical	Pass

## GFSK MODE 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1515.37	43.83	-4.33	74.0	30.17	Peak	348.60	100	Horizontal	Pass
2	2403.15	103.60	-0.20	74.0	-29.60	Peak	36.10	100	Horizontal	N/A
3	2480.13	107.34	-0.60	74.0	-33.34	Peak	36.10	100	Horizontal	N/A
4	2558.11	56.69	0.07	74.0	17.31	Peak	23.60	100	Horizontal	Pass
4**	2558.11	48.79	0.07	54.0	5.21	AV	23.60	100	Horizontal	Pass
5	4951.76	56.01	14.09	74.0	17.99	Peak	32.50	100	Horizontal	Pass
5**	4951.76	48.84	14.09	54.0	5.16	AV	32.50	100	Horizontal	Pass
6	12053.66	51.92	20.82	74.0	22.08	Peak	269.70	100	Horizontal	Pass

## □/4-DQPSK MODE 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1368.41	44.75	-4.50	74.0	29.25	Peak	252.80	100	Vertical	Pass
2	2402.15	98.06	-0.34	74.0	-24.06	Peak	74.20	100	Vertical	N/A
3	2478.63	100.84	-0.61	74.0	-26.84	Peak	80.80	100	Vertical	N/A
4	4812.30	53.72	13.93	74.0	20.28	Peak	88.00	100	Vertical	Pass
5	9324.46	48.09	16.94	74.0	25.91	Peak	12.00	100	Vertical	Pass
6	12053.66	51.65	20.82	74.0	22.35	Peak	269.70	100	Vertical	Pass

## □/4-DQPSK MODE 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1373.41	44.33	-4.54	74.0	29.67	Peak	251.50	100	Horizontal	Pass
2	2403.65	101.34	-0.25	74.0	-27.34	Peak	10.30	100	Horizontal	N/A
3	2479.13	104.78	-0.58	74.0	-30.78	Peak	29.30	100	Horizontal	N/A
4	2558.11	54.86	0.07	74.0	19.14	Peak	23.10	100	Horizontal	Pass
4**	2558.11	47.52	0.07	54.0	6.48	AV	23.10	100	Horizontal	Pass
5	4949.51	52.94	14.13	74.0	21.06	Peak	186.10	100	Horizontal	Pass
6	12053.66	51.72	20.82	74.0	22.28	Peak	269.70	100	Horizontal	Pass

## 8-DPSK MODE 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1623.84	44.00	-4.24	74.0	30.00	Peak	233.20	100	Vertical	Pass
2	2403.15	98.54	-0.20	74.0	-24.54	Peak	87.20	100	Vertical	N/A
3	2479.63	100.44	-0.63	74.0	-26.44	Peak	68.00	100	Vertical	N/A
4	4921.77	53.80	13.84	74.0	20.20	Peak	92.50	100	Vertical	Pass
5	5974.51	51.57	15.68	74.0	22.43	Peak	111.00	100	Vertical	Pass
6	11166.39	50.91	20.21	74.0	23.09	Peak	76.10	100	Vertical	Pass

## 8-DPSK MODE 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1606.35	44.10	-4.35	74.0	29.90	Peak	357.90	100	Horizontal	Pass
2	2406.15	100.83	-0.21	74.0	-26.83	Peak	28.70	100	Horizontal	N/A
3	2479.63	104.62	-0.63	74.0	-30.62	Peak	41.60	100	Horizontal	N/A
4	2564.11	54.62	0.07	74.0	19.38	Peak	28.70	100	Horizontal	Pass
4**	2564.11	47.69	0.07	54.0	6.31	AV	28.70	100	Horizontal	Pass
5	4941.27	53.34	14.12	74.0	20.66	Peak	30.90	100	Horizontal	Pass
6	12053.66	52.55	20.82	74.0	21.45	Peak	269.70	100	Horizontal	Pass

Restricted-band band-edge (Bluetooth 3.0)

Note 1: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note 2: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.


Note 3: The average levels were calculated from the peak level corrected with duty cycle correction factor (-21.21dB) derived from  $20\log(\text{dwell time}/100 \text{ ms})$ .

For example: Average level = 54.55 dBuV/m – 21.21 (dB) = 33.34 dBuV/m.

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390.00	54.55	74	19.45	PEAK	Pass
		2390.00	33.34	54	20.66	AVERAGE	Pass
GFSK	HIGH	2483.50	69.38	74	4.62	PEAK	Pass
		2483.50	48.17	54	5.83	AVERAGE	Pass
π/4DQPSK	Low	2390.00	53.67	74	20.33	PEAK	Pass
		2390.00	32.46	54	21.54	AVERAGE	Pass
π/4DQPSK	HIGH	2483.50	64.05	74	9.95	PEAK	Pass
		2483.50	42.84	54	11.16	AVERAGE	Pass
8-DPSK	Low	2390.00	54.59	74	19.41	PEAK	Pass
		2390.00	33.38	54	20.62	AVERAGE	Pass
8-DPSK	HIGH	2483.50	64.98	74	9.02	PEAK	Pass
		2483.50	43.77	54	10.23	AVERAGE	Pass
GFSK(Hopping)	Low	2390.00	55.04	74	18.96	PEAK	Pass
		2390.00	33.83	54	20.17	AVERAGE	Pass
GFSK(Hopping)	HIGH	2483.50	66.69	74	7.31	PEAK	Pass
		2483.50	45.48	54	8.52	AVERAGE	Pass
π/4DQPSK (Hopping)	Low	2390.00	54.94	74	19.06	PEAK	Pass
		2390.00	33.73	54	20.27	AVERAGE	Pass
π/4DQPSK (Hopping)	HIGH	2483.50	60.70	74	13.30	PEAK	Pass
		2483.50	39.49	54	14.51	AVERAGE	Pass
8-DPSK (Hopping)	Low	2390.00	60.56	74	13.44	PEAK	Pass
		2390.00	39.35	54	14.65	AVERAGE	Pass
8-DPSK (Hopping)	HIGH	2483.50	55.30	74	18.70	PEAK	Pass
		2483.50	34.09	54	19.91	AVERAGE	Pass


## Test Plots

GFSK LOW CHANNEL , PEAK

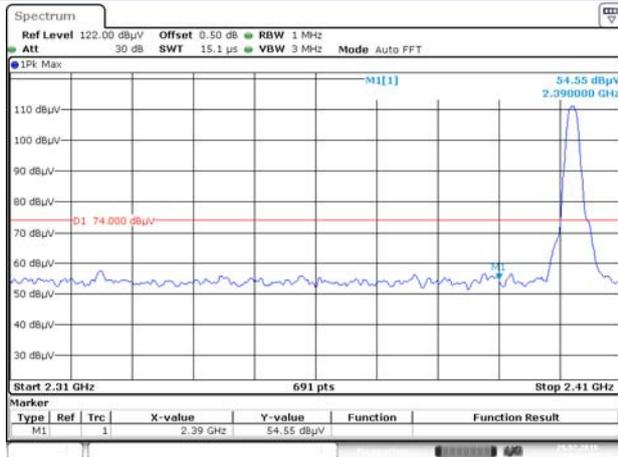


Date: 29 FEB 2016 11:47:58


GFSK HIGH CHANNEL , PEAK

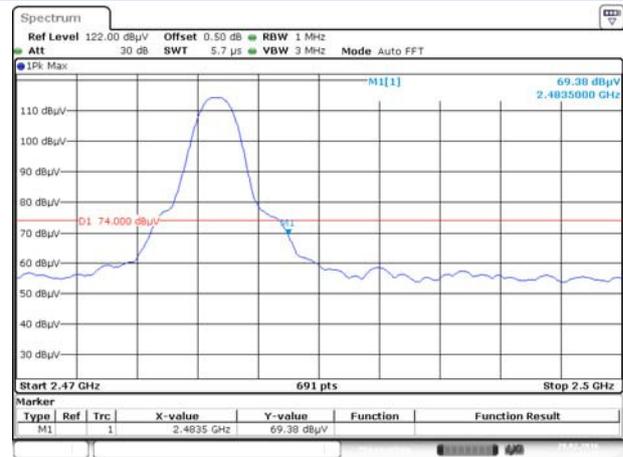

Date: 29 FEB 2016 11:48:45

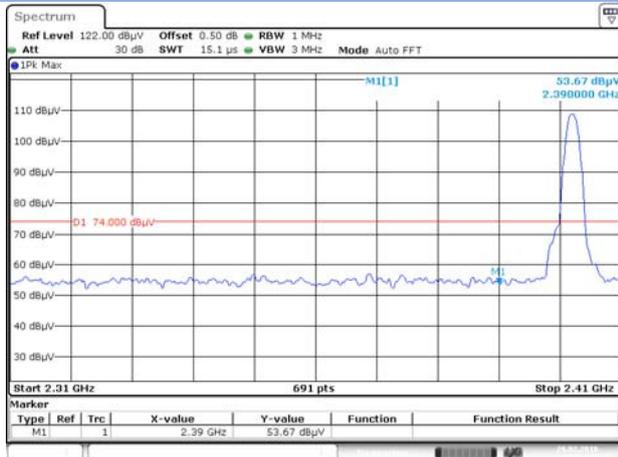
 $\pi/4$ -DQPSK LOW CHANNEL , PEAK


Date: 29 FEB 2016 11:50:47

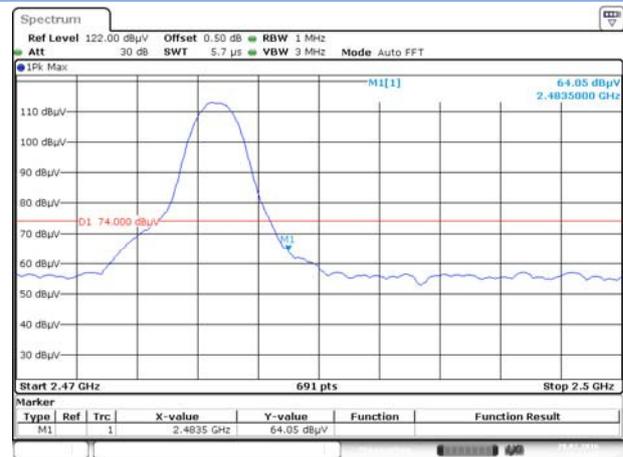 $\pi/4$ -DQPSK HIGH CHANNEL , PEAK


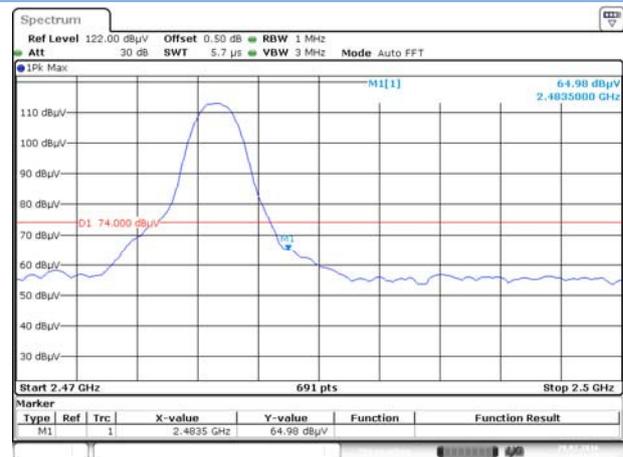
Date: 29 FEB 2016 11:51:34

8-DPSK LOW CHANNEL , PEAK

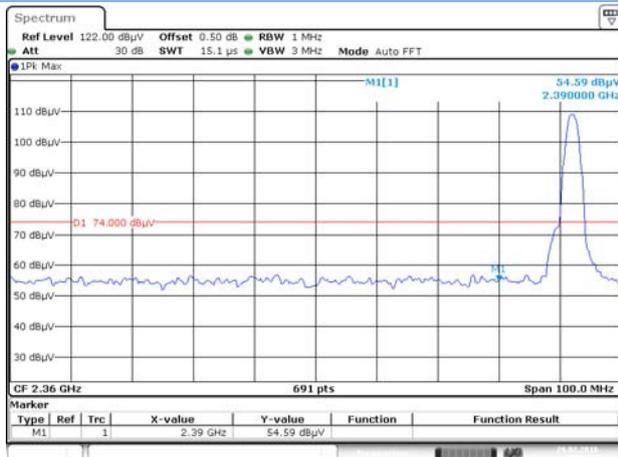


Date: 29 FEB 2016 11:53:52


8-DPSK HIGH CHANNEL , PEAK




Date: 29 FEB 2016 11:54:30

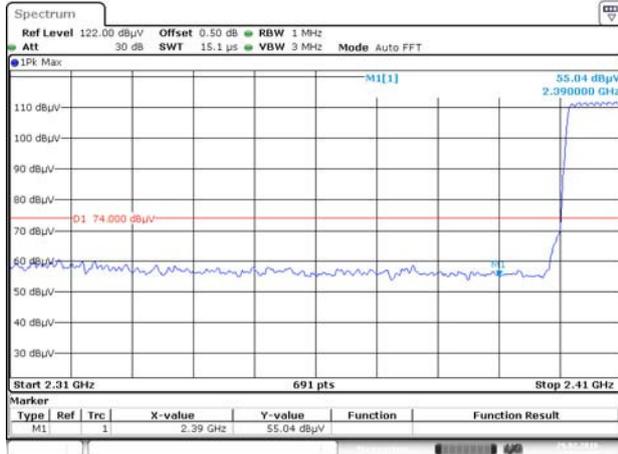**Hopping Mode:**
**GFSK LOW FREQUENCY BAND, PEAK**


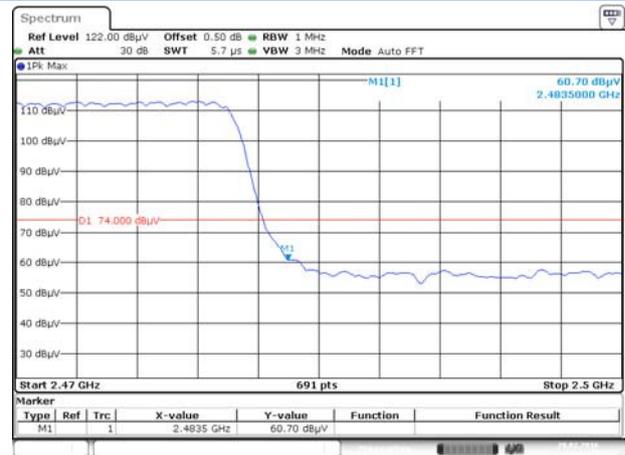
Date: 29 FEB 2016 11:43:55

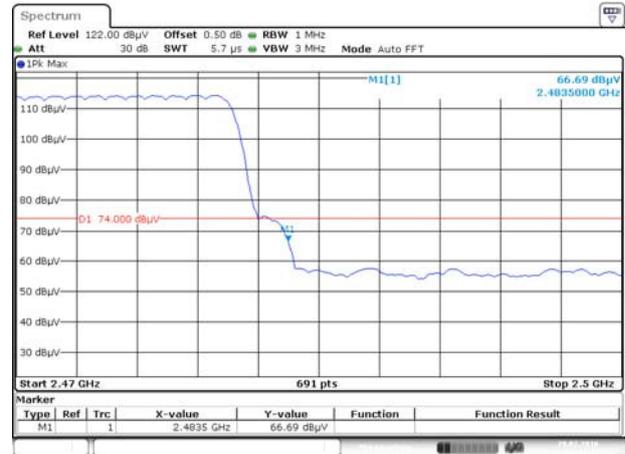**GFSK HIGH FREQUENCY BAND, PEAK**


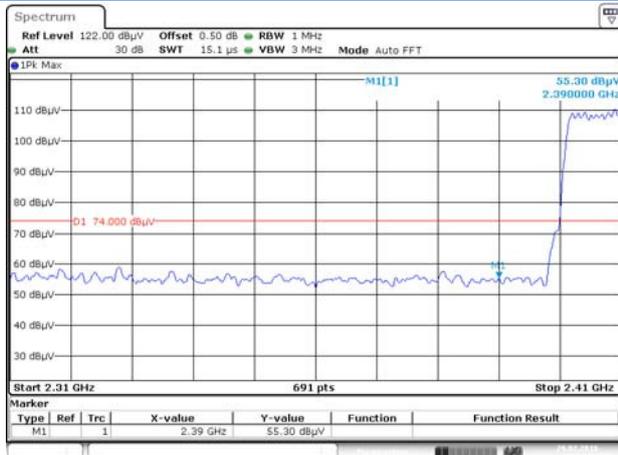
Date: 29 FEB 2016 11:46:13

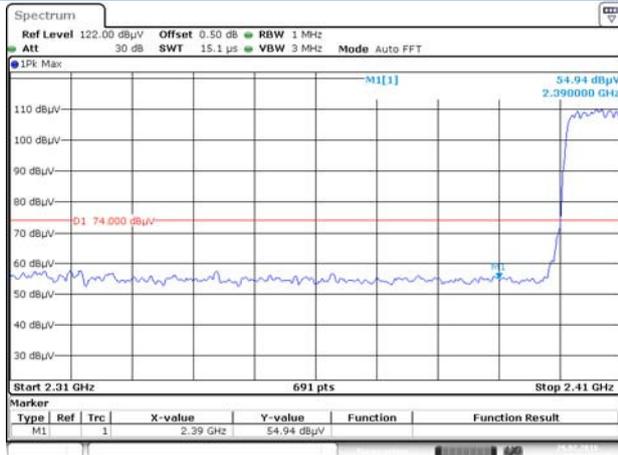**π/4-DQPSK LOW FREQUENCY BAND, PEAK**


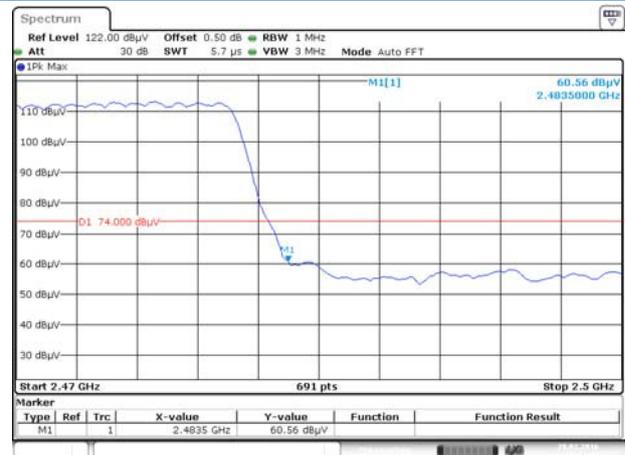
Date: 29 FEB 2016 11:50:15

**π/4-DQPSK HIGH FREQUENCY BAND, PEAK**


Date: 29 FEB 2016 11:49:29

**8-DPSK LOW FREQUENCY BAND, PEAK**


Date: 29 FEB 2016 11:52:55

**8-DPSK HIGH FREQUENCY BAND, PEAK**


Date: 29 FEB 2016 11:52:08


## A.9 Receiver Spurious Emissions

Note: All configuration were tested, but only the worst test data (GFSK Model) were recorded in this report.

### Test Data and Plots

#### 30 MHz to 1 GHz, ANT V


RE Test case\_FCC\_Part 15C\_FCC 15C 30MHz-1GHz

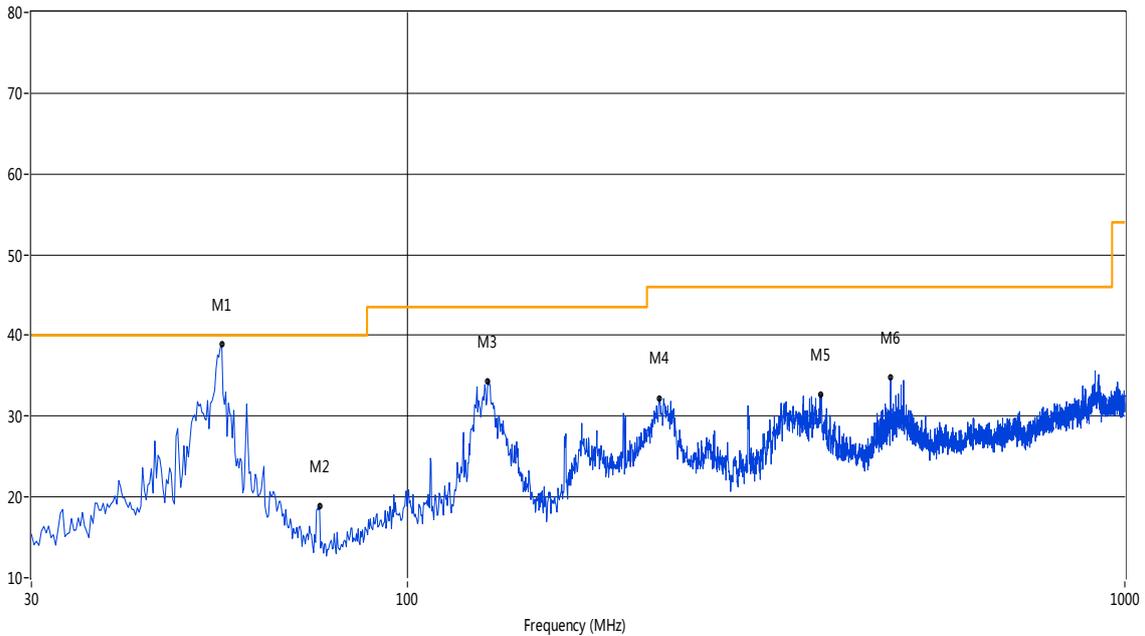

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	55.21	38.86	-18.92	40.0	1.14	Peak	292.91	100.00	Vertical	Pass
1*	55.21	34.65	-18.92	40.0	5.35	QP	292.91	100.00	Vertical	Pass
2	75.58	18.79	-24.39	40.0	21.21	Peak	236.74	100	Vertical	Pass
3	129.64	34.30	-23.11	43.5	9.20	Peak	338.33	100	Vertical	Pass
4	224.68	32.23	-19.53	46.0	13.77	Peak	139.88	100	Vertical	Pass
5	377.66	32.66	-15.52	46.0	13.34	Peak	341.59	100	Vertical	Pass
6	471.97	34.73	-13.69	46.0	11.27	Peak	74.54	100	Vertical	Pass

## 30 MHz to 1 GHz, ANT H


RE Test case\_FCC\_Part 15C\_FCC 15C 30MHz-1GHz

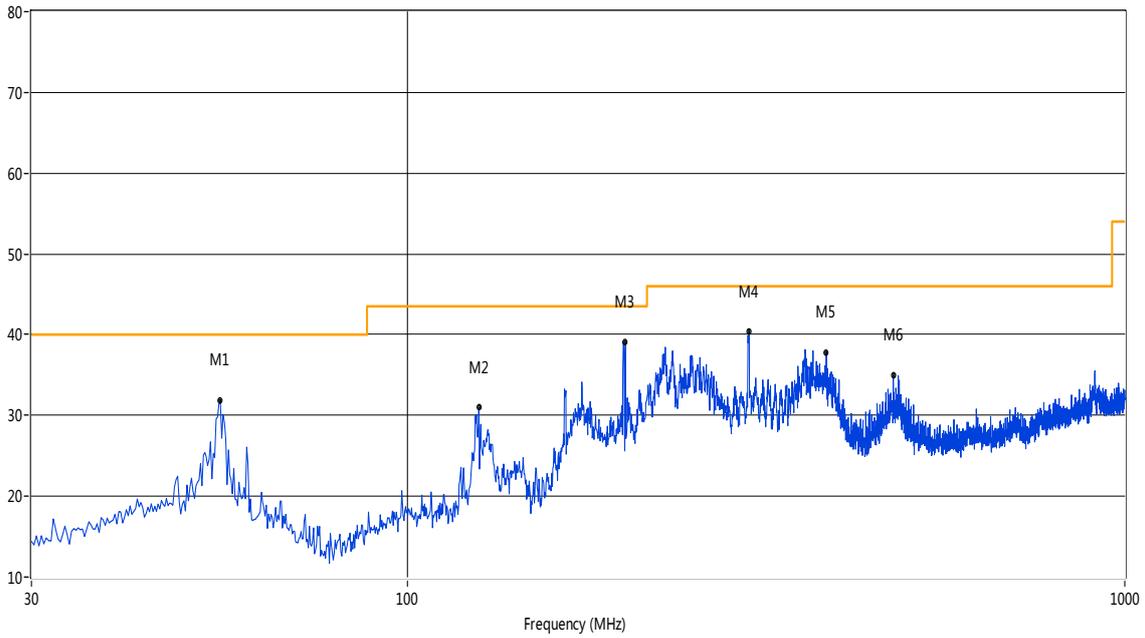

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	54.97	31.89	-18.91	40.0	8.11	Peak	146.28	100	Horizontal	Pass
2	126.01	30.97	-22.60	43.5	12.53	Peak	314.66	100	Horizontal	Pass
3	201.41	39.14	-20.02	43.5	4.36	Peak	318.41	100	Horizontal	Pass
4	299.83	40.38	-17.51	46.0	5.62	Peak	175.64	100	Horizontal	Pass
5	383.96	37.84	-15.30	46.0	8.16	Peak	347.69	100	Horizontal	Pass
6	475.85	35.00	-13.66	46.0	11.00	Peak	75.85	100	Horizontal	Pass

1 GHz to 6 GHz, ANT V


RE Test case\_FCC\_Part 15C\_FCC 15C 1GHz-6GHz

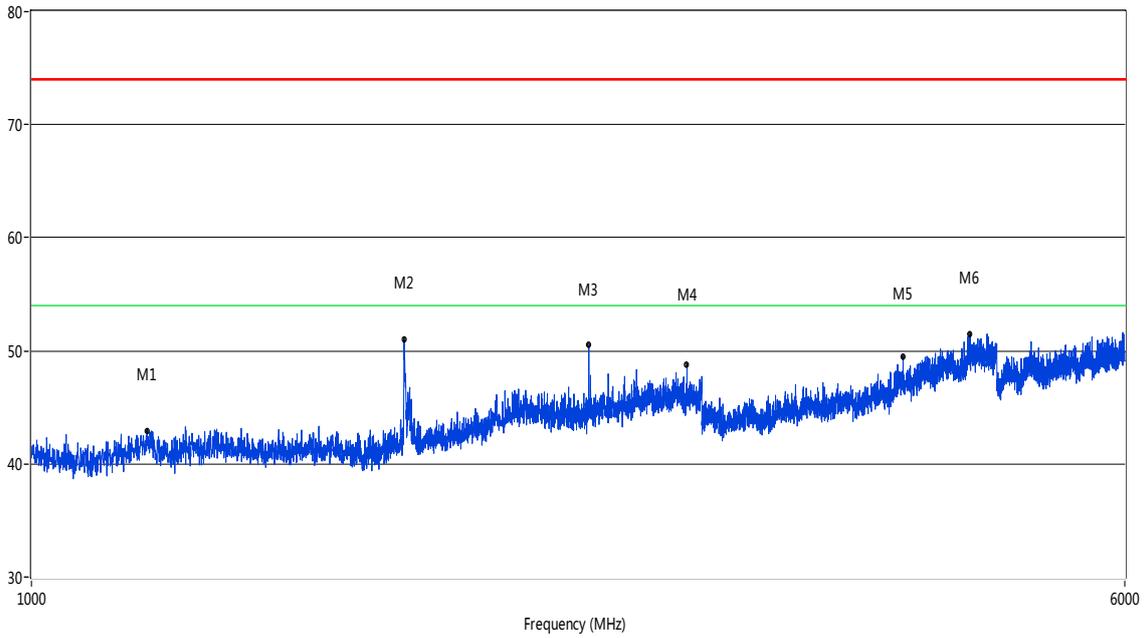

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1208.95	42.94	-4.86	74.0	31.06	Peak	131.04	100	Vertical	Pass
2	1841.79	51.02	-2.79	74.0	22.98	Peak	314.21	100	Vertical	Pass
3	2493.13	50.50	0.19	74.0	23.50	Peak	0.70	100	Vertical	Pass
4	2927.52	48.80	2.93	74.0	25.20	Peak	60.01	100	Vertical	Pass
5	4171.96	49.47	11.56	74.0	24.53	Peak	241.80	100	Vertical	Pass
6	4655.59	51.49	13.06	74.0	22.51	Peak	320.65	100	Vertical	Pass

1 GHz to 6 GHz, ANT H

RE Test case\_FCC\_Part 15C\_FCC 15C 1GHz-6GHz

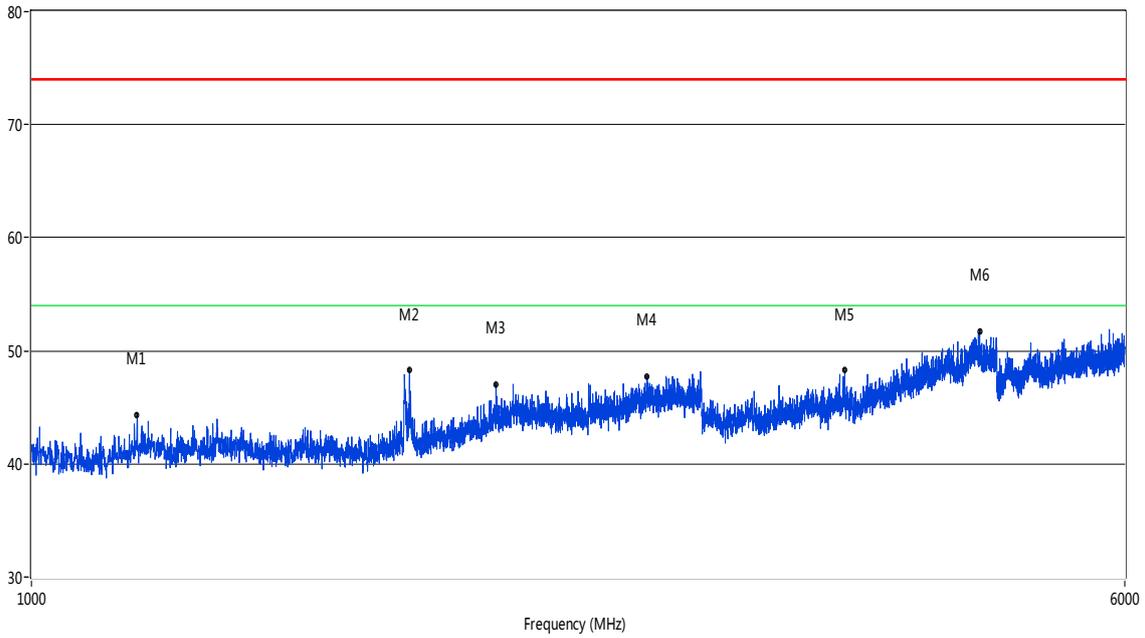

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1188.95	44.37	-5.15	74.0	29.63	Peak	38.25	100	Horizontal	Pass
2	1857.79	48.29	-2.27	74.0	25.71	Peak	332.50	100	Horizontal	Pass
3	2140.72	47.02	-0.51	74.0	26.98	Peak	108.59	100	Horizontal	Pass
4	2742.56	47.74	2.33	74.0	26.26	Peak	0.77	100	Horizontal	Pass
5	3791.80	48.27	10.81	74.0	25.73	Peak	306.79	100	Horizontal	Pass
6	4729.82	51.76	13.61	74.0	22.24	Peak	277.44	100	Horizontal	Pass

## **ANNEX B TEST SETUP PHOTOS**

Please refer the document “BL-SZ1620122-AR.PDF”.

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer the document “BL- SZ1620122-AW.PDF”.

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer the document “BL- SZ1620122-AI.PDF”.

--END OF REPORT--