

FCC ID: SOV2718W

Date of issue: 2004-12-02



Test Report
acc. to the relevant standard:
47 CFR Part 15 C – Intentional Radiators
Measurement Procedure:
ANSI C63.4 - 1992
relating to
ARCHOS S.A.
POCKET MEDIA ASSISTANT
Model 2718W

Measurement of Radio- Noise Emissions
from Low- Voltage Electrical and Electronic Equipment
Technical characteristics and test methods for radio equipment
in the frequency range 9 kHz to 40 GHz

FCC ID: SOV2718W

Date of issue: 2004-12-02

Manufacturer's details	
Manufacturer	ARCHOS S.A.
Manufacturer's grantee code	SOV
Manufacturer's address	ARCHOS S.A.
	12, rue Ampère – Z.I.
	91430 Igny
	France
	Tel.: +33-169-33-1690
	Fax: +33-169-33-1699
	E-Mail: gregoire@archos.com
Relevant standard used	47 CFR Part 15C - Intentional Radiators
	ANSI C63.4-1992

Test Report prepared by	
Technical engineer	Ralf Trepper
	m.dudde hochfrequenz-technik (laboratory)
	Rottland 5a
	D-51429 Bergisch Gladbach
	Germany
	Phone: +49 2207 96890
	Fax : +49 2207 968920
	E-mail: m.dudde@labor@dudde.com

Equipment Under Test (EUT)	
Equipment category	PDA with WiFi connectivity (RLAN 802.11b technology)
Trade name	ARCHOS
Type designation	POCKET MEDIA ASSISTANT Model 2718W (AV500 series)
Serial no.	none Prototype
Variants	AV520* ¹
	AV540* ¹
	AV580* ¹
	* ¹ The only difference is the size of the hard drive
Ancillary equipment	AC Adaptor (See Annex no. 1) GROUP WEST, Model TRC-05-1600 Input: 100V – 240VAC, 50 – 60Hz/0.3A Output: 5VDC, 1.6A

FCC ID: SOV2718W

Date of issue: 2004-12-02

0 Test result

CFR Section	Report Chapter	Requirements Headline	Test result OK		
15.203	10.1	Antenna requirement	pass	fail	na
15.249 (a)	10.2	Field strength limits (fundamental)	pass	fail	na
15.249(d) 15.209	10.2	Radiated spurious emissions	pass	fail	na
15.207	10.3	Conducted emissions	pass	fail	na
15.215 (c)	10.4	20 dB bandwidth	pass	fail	na

Test requirements kept	yes no
------------------------	-------------------

Signature technician



Ralf Trepper

Signature manager



Manfried Dudde

FCC ID: SOV2718W

Date of issue: 2004-12-02

List of contents	Page
0 Test result	3
1 Testing laboratory	5
2 Introduction	5
3 Product	6
4 Test schedule	6
5 Product and measurement documentation.....	7
6 Observations and comments.....	7
7 Summary	7
8 Conclusions	8
9 Operation description	9
10.1 Antenna requirement	10
10.1.1 Regulation	10
10.1.2 Result	10
10.2 Radiated emissions	11
10.2.1 Regulation	11
10.2.2 Test equipment	13
10.2.2 Test procedures.....	13
10.2.3 Calculation of field strength Section 15.209 below 30 MHz	14
10.2.3 Calculation of field strength Section 15.209 above 30 MHz	14
10.2.4 Calculation of average correction factor.....	14
10.2.5 Calculation of the field strength Section 15.249.....	15
10.2.6 Result	16
10.2.6 Result	17
10.3 Conducted emissions	20
10.3.1 Regulation	20
10.3.2 Test equipment	21
10.3.3 Test procedures.....	21
10.3.4 Test results.....	22
10.4 Bandwidth	23
10.4.1 Regulation	23
10.4.3 Test equipment	23
10.4.4 Test procedure	23
10.4.5 Test result	24
11 Additional information to this test report	25

FCC ID: SOV2718W

Date of issue: 2004-12-02

1 Testing laboratory

Company name : m.dudde high frequency technology
Street : Rottland 5a
City : 51429 Bergisch Gladbach
Country : Germany
Laboratory : FCC Registration Number: 699717
This site has been fully described in a report submitted to the FCC and was
accepted with letter dated Registration Number .699717
Phone : +49-2207-9689-0
Fax : +49-2207-9689-20
E-mail : manfred.dudde@t-online.de
Web : <http://www.dudde.com>

2 Introduction

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of m. dudde hochfrequenz - technik.

This report contains the result of tests performed by m. dudde hochfrequenz - technik for the purpose of a type approval. The order for carrying out these tests had been placed by:

Manufacturer

Company name : ARCHOS S.A.
Address : 12, rue Ampère – Z.I.
Postcode : 91430
City/town : Igny
Country : France
Telephone : +33-169-33-1690
Fax : +33-169-33-1699
Date of order : 2004-11-12
References : Mr. Yves Grégoire
Head of Research and Development

FCC ID: SOV2718W

Date of issue: 2004-12-02

3 Product

Samples of the following apparatus were submitted for testing:

Type of equipment	: PDA / RLAN (802.11b technology)
Trademark	: ARCHOS
Type designation	: POCKET MEDIA ASSISTANT Model 2718W (AV500 series)
Hardware version	: AV520
Serial number	: none Prototype
Software release	: Linux Qtopia with embedded ARCHOS multimedia applications
Power used	: AC-Adapter: 110 VAC \ 50...60Hz, Batteries: 3.7VDC Lithium-ion
Frequency used	: MHz
Generated or used frequencies	: 32.768 kHz, 12 MHz, 20.25 MHz, 27 MHz, 48 MHz
	Lowest frequency declared by the applicant: 2.4120GHz (Channel 1)
	Highest frequency declared by the applicant: 2.4625GHz (Channel 11)

FCC ID : SOV2718W

4 Test schedule

Tests were carried out in accordance with the specifications detailed in chapter 7 "Summary" of this report.

Tests were carried out at:

- m. dudde hochfrequenz - technik, D-51429 Bergisch Gladbach

The test sample was received on:

- 2004-10-15

The tests were carried out in the following period of time:

- 2004-10-15 - 2004-11-05

FCC ID: SOV2718W

Date of issue: 2004-12-02

5 Product and measurement documentation

For issuing this report the following product documentation was used and the following annexes were created:

Description	Date	Identifications
External photographs of the Equipment Under Test (EUT)		Annex no. 1
Internal photographs of the Equipment Under Test (EUT)		Annex no. 2
Occupied bandwidth plot		Annex no. 3
FCC ID label sample		Annex no. 4
Technical description		Annex no. 5
Test setup photos		Annex no. 6
Block diagram		Annex no. 7
Schematics		Annex no. 8
EUT details		Annex no. 9

The above mentioned documentation will be filed at m. dudde hochfrequenz - technik for a period of 10 years following the issue of this report.

6 Observations and comments

7 Summary

The product is intended for the use in the following areas of application:
Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment
in the frequency range of 9 kHz to 40 GHz

The samples were tested according to the following specification:

47 CFR Part 15 – Intentional Radiators, ANSI C63.4 - 1992

FCC ID: SOV2718W

Date of issue: 2004-12-02

8 Conclusions

Samples of the apparatus were found to **CONFORM WITH** the specifications stated in chapter 7 "Summary" of this report.

In the opinion of m. dudde hochfrequenz - technik, the samples satisfied all applicable requirements relating to the network interface types specified in chapter 7 "Summary".

The results of the type tests as stated in this report are exclusively applicable to the product item as identified in this report. m. dudde hochfrequenz - technik does not accept any responsibility for the results stated in this report, with respect to the properties of product items not involved in these tests.

This report consists of a main module, modules with test results and annexes listed in chapter 5: "Product documentation". All pages have been numbered consecutively and bear the m. dudde hochfrequenz - technik logo, the report number and sub numbers.

The total number of pages in this report is **26**.

Tester:

Date : 2004-12-02


Name : Ralf Trepper

Signature : 

Technical responsibility for area of testing:

Date : 2004-12-02

Name : Manfred Dudde

Signature : 

FCC ID: SOV2718W


Date of issue: 2004-12-02

9 Operation description

9.1 EUT details

See Annex no. 9

9.2 EUT configuration

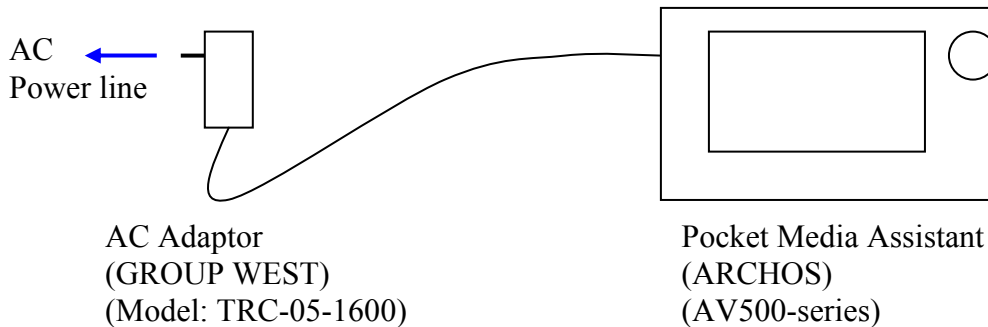

9.3 EUT measurement description

Radiated emission test

The **RLAN transceiver (802.11b technology)** is inserted in the **Pocket Media Assistant AV500series**. All variants are technically identical; the only difference is the size of the hard drive. One configuration will be tested as stand alone device. In order to establish the maximum radiation, firstly, there have been viewed all orthogonal adjustments of the test sample, secondly the test sample have been rotated at all adjustments around the own axis between 0° and 360°, and thirdly, the antenna polarization between horizontal and vertical had been varied. All generated frequencies, the lowest and the highest frequency of the RLAN transceiver have been viewed.

Conducted emission test

The device was connected directly with its AC- Adaptor to an artificial mains network. With a test receiver there have been viewed both L1 and N. All working modes have been viewed.

FCC ID: SOV2718W

Date of issue: 2004-12-02

10.1 Antenna requirement

10.1.1 Regulation

15.203 An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of Part 15C. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31 (d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

10.1.2 Result

The equipment meets the requirements	yes	no	n.a.
--------------------------------------	------------	-----------	------------------------

Further test results are attached	yes	no	page no:
-----------------------------------	-----------------------	-----------	----------

n.a ^x see page no. 23

FCC ID: SOV2718W

Date of issue: 2004-12-02

10.2 Radiated emissions

10.2.1 Regulation

Test requirement: FCC CFR47, Part 15C Section 15.249 Test procedure: ANSI C63.4:1992

Fundamental frequency (MHz)	Field strength of fundamental (millivolts/meter)	Field strength of spurious emissions (microvolts/meter)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24.0-24.25 GHz	250	2500

(1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

(2) Intentional radiators operating under the provisions of this Section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in Section 15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of Section 15.205 shall be demonstrated using the measurement instrumentation specified in that section.

(3) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in Section 15.209, whichever limit permits a higher field strength.

Section 15.33 Frequency range of radiated measurements: (a) Unless otherwise noted in the specific rule section under which the equipment operates for an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph: (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

FCC ID: SOV2718W

Date of issue: 2004-12-02

Test requirement: FCC CFR47, Part 15C Section 15.209 Test procedure: ANSI C63.4:1992

Section 15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

(b) In the emission table above, the tighter limit applies at the band edges.

(c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.

(d) The emission limits shown in the above table are based on measurements employing a CISPR quasi peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

(e) The provisions in §§ 15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

(f) In accordance with Section 15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in Section 15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in Section 15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in Section 15.109 that are applicable to the incorporated digital device.

FCC ID: SOV2718W

Date of issue: 2004-12-02

10.2.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration
Receiver (9 kHz –26.5 GHz)	Hewlett Packard Spectrum Analyzer 8593E (171)	3528U00990	2004/02	2006/02
Pre-amplifier (100kHz - 1.3GHz)	Hewlett Packard 8447 E (166a)	1726A00705	2002/04	2006/04
Loop antenna (0.009 - 30 MHz)	Schwarzbeck			
Bilog antenna (30 - 1000 MHz)	CHASE CBL611A (167)	1517	2002/04	2008/04
Horn antenna (0,86-8,5 GHz)	Schwarzbeck BBHA 9120 A (284)	236	1998/01	2008/01
Horn antenna (2-14 GHz)	Schwarzbeck BBHA 9120 C (168)	306	1998/01	2008/01
Horn antenna (14-40 GHz)	Schwarzbeck BBHA 9170 (280)	---	1998/01	2008/01

10.2.2 Test procedures

The EUT and this peripheral (when additional equipment exist) are placed on a turn table which is 0.8m above the ground. The turn table would be allowed to rotate 360 degrees to determine the position of the maximum emission level. The test distance between the EUT and the receiving antenna are 3 m. To find the maximum emission, the polarization of the receiving antenna are changed in horizontal and vertical polarization, the position of the EUT was changed in different orthogonal determinations.

ANSI C63.4: 1992 Section 8 “Radiated Emissions Testing”

Radiated emissions test characteristics	
Frequency range	0.009 MHz - 10,000 MHz
Test distance	3 m*(for frequencies above 30 MHz)
Test instrumentation resolution bandwidth	9 kHz (0.009 – 30MHz)
	120 kHz (30 MHz - 1,000 MHz)
	1 MHz (1000 MHz - 10,000 MHz)
Receive antenna scan height	1 m (0.009 MHz - 30 MHz)
	1 m - 4 m (30 MHz - 10,000 MHz)
Receive antenna polarization / orientation	0 – 360°
	Vertical / horizontal (30 MHz - 1,000 MHz)

* According to Section 15.31 (f)(1): At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

FCC ID: SOV2718W

Date of issue: 2004-12-02

10.2.3 Calculation of field strength Section 15.209 below 30 MHz

The receiver reading gives not directly the field strength result in (dB μ V/m). The antenna factors of the loop antenna and cable losses must be added to find the correct result.

For frequencies below 30 MHz and for a test distance other than what is specified, but fulfilling the requirements of Section 15.31 (f) (2) the field strength is calculated by adding additionally an extrapolation factor of 40 dB/decade (inverse linear distance for field strength measurements).

The field strength is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors
Correction Factor : Loop antenna factor + cable loss

$$FS = 40.7 - 40 = 0.7 \text{ [dB}\mu\text{V/m]}$$

$$\text{Level in } \mu\text{V/m Common Antilogarithm } (0.7/20) = 1.1$$

10.2.3 Calculation of field strength Section 15.209 above 30 MHz

The field strength is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor (without the use of a pre-amplifier)

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors
Correction Factor : Antenna factor + cable loss

For test distance other than what is specified, but fulfilling the requirements of Section 15.31 (f)(1) the field strength is calculated by adding additionally an extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements).

10.2.4 Calculation of average correction factor

The average correction factor is computed by analyzing the "worst case" on time in any 100msec time period and using the formula: Corrections Factor + 20*log (worst case on time/100msec) Analysis of the remote transmitter worst case on time in any 100msec time period is an on time of 50msec, therefore the correction factor is 20*log (50/100) = - 6 dB. The maximum correction factor to be applied is 20 dB per section 15.35 of the FCC rules.

FCC ID: SOV2718W

Date of issue: 2004-12-02

10.2.5 Calculation of the field strength Section 15.249

The field strength is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor (without the use of a pre-amplifier)

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors

Correction Factor : Antenna factor + cable loss

For example:

The receiver reading is 32.7 dB μ V. The antenna factor for the measured frequency is +2.5 dB(1/m) and the cable factor for the measured frequency is 0.71 dB, giving a field strength of 35.91dB μ V/m.

The 35.91dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

Level in μ V/m = Common Antilogarithm (35.91/20) = 39.8

For a test distance other than what is specified, but fulfilling the requirements of Section 15.31 (f)(1), the field strength is calculated by adding additionally an extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements).

FCC ID: SOV2718W

Date of issue: 2004-12-02

10.2.6 Result

Channel 1(lowest frequency)

TRANSMITTER SPURIOUS RADIATION (Section 15.249 (a), (d))											
f (GHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	AV Correction factor dB	Level corrected dBμV/m	Limit dBμV/m	Margin dB	Polaris. EUT / antenna	Antenna height cm
2.41200	100, AV	53.9	3	35.4	0	0	89.3	94	4.7	H / H	101
4.82400	1000, AV	< 10	1	36.8	-19.1	0	27.7	54	26.3	H,V/H,V	100-400
7.23600	1000, AV	< 14	1	39.4	-19.1	0	34.3	54	19.7	H,V/H,V	100-400
9.64800	1000, AV	< 14	1	40.9	-19.1	0	35.8	54	18.2	H,V/H,V	100-400
12.06000	1000, AV	< 14	1	44.7	-19.1	0	39.6	54	14.4	H,V/H,V	100-400
14.47200	1000, AV	< 14	1	46.8	-19.1	0	41.7	54	12.3	H,V/H,V	100-400
16.88400	1000, AV	< 18	1	43.2	-19.1	0	42.1	54	11.9	H,V/H,V	100-400
19.29600	1000, AV	< 18	1	43.7	-19.1	0	42.6	54	11.4	H,V/H,V	100-400
21.70800	1000, AV	< 18	1	43.4	-19.1	0	42.3	54	11.7	H,V/H,V	100-400
24.12000	1000, AV	< 18	1	44.9	-19.1	0	43.8	54	10.2	H,V/H,V	100-400
26.53200	1000, AV	< 18	1	45.7	-19.1	0	44.6	54	9.4	H,V/H,V	100-400
Measurement uncertainty			4 dB								

* Bandwidth = the measuring receiver bandwidth

- Remark: *¹ noise floor noise level of the measuring instrument ≤ 3.5dBμV @ 3m distance (30 – 1,000 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ 4.5 dBμV @ 3m distance (1,000 – 2,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ 10 dBμV @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ 14 dBμV @ 3m distance (5,500 – 14,500 MHz)
 Remark: *⁵ noise floor noise level of the measuring instrument ≤ 18 dBμV @ 3m distance (14,500 – 26,500 MHz)
 Remark: *⁶ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz
 Remark: *⁷ for using a pre-amplifier in the range between 4.0 GHz and 18.0 GHz

The equipment meets the requirements	yes	no	n.a.
Further test results are attached	yes	no	page no:

n.a.^x see page no. 24

FCC ID: SOV2718W

Date of issue: 2004-12-02

10.2.6 Result

Channel 11(highest frequency)

TRANSMITTER SPURIOUS RADIATION (Section 15.249 (a), (d))											
f (GHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	AV Correction factor dB	Level corrected dBμV/m	Limit dBμV/m	Margin dB	Polaris. EUT / antenna	Antenna height cm
2.46250	100, AV	52.5	3	35.4	0	0	87.9	94	6.1	H / H	100
4.92500	1000, AV	< 10	1	36.8	-19.1	0	27.7	54	26.3	H,V/H,V	100-400
7.38750	1000, AV	< 14	1	39.4	-19.1	0	34.3	54	19.7	H,V/H,V	100-400
9.85000	1000, AV	< 14	1	40.9	-19.1	0	35.8	54	18.2	H,V/H,V	100-400
12.31250	1000, AV	< 14	1	44.7	-19.1	0	39.6	54	14.4	H,V/H,V	100-400
14.77500	1000, AV	< 14	1	46.8	-19.1	0	41.7	54	12.3	H,V/H,V	100-400
17.23750	1000, AV	< 18	1	43.2	-19.1	0	42.1	54	11.9	H,V/H,V	100-400
19.70000	1000, AV	< 18	1	43.7	-19.1	0	42.6	54	11.4	H,V/H,V	100-400
22.16250	1000, AV	< 18	1	43.4	-19.1	0	42.3	54	11.7	H,V/H,V	100-400
24.62500	1000, AV	< 18	1	44.9	-19.1	0	43.8	54	10.2	H,V/H,V	100-400
27.08750	1000, AV	< 18	1	45.7	-19.1	0	44.6	54	9.4	H,V/H,V	100-400
Measurement uncertainty			4 dB								

* Bandwidth = the measuring receiver bandwidth

- Remark: *¹ noise floor noise level of the measuring instrument ≤ 3.5dBμV @ 3m distance (30 – 1,000 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ 4.5 dBμV @ 3m distance (1,000 – 2,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ 10 dBμV @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ 14 dBμV @ 3m distance (5,500 – 14,500 MHz)
 Remark: *⁵ noise floor noise level of the measuring instrument ≤ 18 dBμV @ 3m distance (14,500 – 26,500 MHz)
 Remark: *⁶ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz
 Remark: *⁷ for using a pre-amplifier in the range between 4.0 GHz and 18.0 GHz

The equipment meets the requirements	yes	no	n.a.
Further test results are attached	yes	no	page no:

n.a.^x see page no. 24

FCC ID: SOV2718W

Date of issue: 2004-12-02

TRANSMITTER SPURIOUS RADIATION BELOW 30 MHz (Section 15.205, 15.209)									
f (MHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m	Margin dBμV/m	Polarisation EUT / antenna orientation
0.1200	PK/0.2kHz	< 4.0	10	20.2	-59.1	-34.90	Pk46.0- @ 300	80.90	V, H/0-360°
	AV/0.2kHz	< 4.0	10	20.2	-59.1	-34.90	AV26.0 @ 300	80.90	V, H/0-360°
0.5000	AV/0.2kHz	< 4.0	10	20.2	-19.1	5.10	AV33.6 @ 30	28.5	V, H/0-360°
1.5000	AV/0.2kHz	< 4.0	10	20.2	-19.1	5.10	AV24.1 @ 30	19.00	V, H/0-360°
3.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
5.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
8.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
10.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
20.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
30.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
No emissions detected									
Measurement uncertainty			4 dB						

Remark: *¹ Noise level of the measuring instrument ≤ 4.0dBμV @ 10m distance (0.009 MHz –30 MHz)

Remark: * Peak Limit according to Section 15.35 (b).

The equipment meets the requirements	yes	no	n.a.
--------------------------------------	-----	----	------

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

n.a ^x see page no. 24

FCC ID: SOV2718W

Date of issue: 2004-12-02

TRANSMITTER SPURIOUS RADIATION ABOVE 30 MHz (Section 15.205, 15.209)

f (MHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	AV Correction factor dB	Level corrected dBμV/m	Limit dBμV/m	Margin dBμV/m	Polaris. EUT / antenna	Antenna height cm
30.0000	100, AV	≤ 3.5	3	-2.60	0	0	0.90	40.00	39.10	H,V/H,V	100-400
88.0000	100, AV	≤ 3.5	3	-10.80	0	0	-7.30	40.00	47.30	H,V/H,V	100-400
216.0000	100, AV	≤ 3.5	3	-10.30	0	0	-6.80	43.50	50.30	H,V/H,V	100-400
960.0000	100, AV	≤ 3.5	3	8.50	0	0	12.00	43.50	31.50	H,V/H,V	100-400
1700.0000	1000, AV	≤ 4.5	3	3.80	0	0	8.30	54.00	45.70	H,V/H,V	100-400
2250.0000	1000, AV	≤ 10	3	8.00	0	0	18.00	54.00	36.00	H,V/H,V	100-400
4000.0000	1000, AV	≤ 10	3	8.40* ⁶	0	0	18.40	54.00	35.60	H,V/H,V	100-400
5000.0000	1000, AV	≤ 10	3	9.10* ⁶	0	0	19.40	54.00	34.60	H,V/H,V	100-400
7500.0000	1000, AV	≤ 14	3	12.9* ⁶ ₀	0	0	26.90	54.00	27.10	H,V/H,V	100-400
8300.0000	1000, AV	≤ 14	3	14.80* ⁶	0	0	28.80	54.00	25.20	H,V/H,V	100-400
9400.0000	1000, AV	≤ 14	3	16.00* ⁶	0	0	30.00	54.00	24.00	H,V/H,V	100-400
11000.0000	1000, AV	≤ 14	3	18.25* ⁶	0	0	32.25	54.00	21.75	H,V/H,V	100-400
Measurement uncertainty			4 dB								

* Bandwidth = the measuring receiver bandwidth

- Remark: *¹ noise floor noise level of the measuring instrument ≤ 3.5dBμV @ 3m distance (30 – 1,000 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ 4.5 dBμV @ 3m distance (1,000 – 2,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ 10 dBμV @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ 14 dBμV @ 3m distance (5,500 – 14,500 MHz)
 Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz
 Remark: *⁶ for using a pre-amplifier in the range between 4.0 GHz and 18.0 GHz

The equipment meets the requirements	yes	no	n.a.
--------------------------------------	-----	----	------

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

n.a.^x see page no. 24

FCC ID: SOV2718W

Date of issue: 2004-12-02

10.3 Conducted emissions

10.3.1 Regulation

Section 15.207 (a) For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50ohms line impedance stabilization network (LISN). Compliance with this provision of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission(MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.50	66 to 56*	56 to 46*
0.50-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency

Section 15.207 (c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or connected to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

FCC ID: SOV2718W

Date of issue: 2004-12-02

10.3.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration	Remarks
Receiver (9 kHz - 30MHz)	Rhode & Schwarz ESH2 (22)	882902/007	01 / 04	01 / 06	---
Protector limiter 9 kHz - 30MHz, 10 dB	Rhode & Schwarz ESH 3Z2 (272)	357,881052	01 / 04	01 / 06	---
V-LISN 50 ohms/(50 uH+5 ohms)	RFT NNB 11 (72)	13835240	08 / 02	01 / 05	---
V-LISN 50 ohms/(50 uH+5 ohms)	Dudde (73)	---	08 / 02	01 / 05	---

10.3.3 Test procedures

The EUT and the additional equipment (if required) are connected to the main power through a line impedance stabilization network (LISN). The LISN must be appropriate to ANSI C63.4: 1992 Section 7. Additional equipment must also be connected to a second LISN with the same specifications described in the above sentence (if required).

FCC ID: SOV2718W

Date of issue: 2004-12-02

10.3.4 Test results

TRANSMITTER CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result Quasi-peak [dBμV]	Spec Limit (Average) [dBμV]	Margin [dB]	Remarks
L1	0.109	10	37	55.8	18.8	* ²
N	0.109	10	35	55.8	20.8	* ²
L1	0.218	10	30	51.7	21.7	* ²
N	0.218	10	28	51.7	23.7	* ²
L1	0.324	10	21	47	26.0	* ²
N	0.324	10	20	47	27.0	* ²
L1	0.432	10	16	46	30.0	* ²
N	0.432	10	16	46	30.0	* ²
L1	1.3131	10	22	46	24.0	* ²
N	1.3131	10	21	46	25.0	* ²
L1	1.738	10	19	46	27.0	* ²
N	1.738	10	17	46	29.0	* ²
L1	2.255	10	22	46	24.0	* ²
N	2.225	10	20	46	26.0	* ²
L1	2.684	10	23	46	23.0	* ²
N	2.684	10	21	46	25.0	* ²
L1	2.795	10	24.5	46	21.5	* ²
N	2.795	10	23	46	23	* ²
L1	4.115	10	21	46	25	* ²
N	4.115	10	20	46	26	* ²
L1	6.7644	10	≤-2	50	52	* ¹
N	6.7644	10	≤-2	50	52	* ¹
L1	13.5288	10	≤-2	50	52	* ¹
N	13.5288	10	≤-2	50	52	* ¹
L1	20.2931	10	≤-2	50	52	* ¹
N	20.2931	10	≤-2	50	52	* ¹
L1	27.0575	10	≤-2	50	52	* ¹
N	27.0575	10	≤-2	50	52	* ¹

Remark: *¹ Noise level of the measuring instrument ≤ -2 dBμV (0.009 – 30MHz)

Remark: *² Quasi peak measurements lower than “Specified Average Limit”

The equipment meets the requirements	yes	no	na
--------------------------------------	------------	---------------	---------------

Further test results are attached	yes	no	Annex no: 6
-----------------------------------	------------	---------------	-------------

FCC ID: SOV2718W

Date of issue: 2004-12-02

10.4 Bandwidth

10.4.1 Regulation

15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

10.4.3 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration
Receiver (30MHz - 1GHz)	Hewlett Packard Spectrum Analyzer 8593 E (171)	3528U00990	02/2004	02/2006
Test fixture for relative measurement	Dudde	---	---	---
Power supply	Hewlett Packard (DC Power Supply) 6034L (226)		02/2004	02/2006

10.4.4 Test procedure

ANSI C63.4-1992 Section 13.1.7 Occupied Bandwidth Measurements. The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical. Once the reference level is established, the equipment is conditioned with typical modulating signals to produce worst-case (i.e., the widest) bandwidth. In order to measure the modulated signal properly, a resolution bandwidth that is small compared to the bandwidth required by the procuring or regulatory agency shall be used on the measuring instrument. However, the 6 dB resolution bandwidth of the measuring instrument shall be set to a value greater than 5% of the bandwidth requirements.

FCC ID: SOV2718W

Date of issue: 2004-12-02

10.4.5 Test result

The measured 20 dB bandwidth is:**19.95 MHz**

The equipment meets the requirements	yes	no	na
--------------------------------------	------------	---------------	---------------

Further test results are attached	yes	no	Annex no: 3
-----------------------------------	------------	----	-------------

FCC ID: SOV2718W

Date of issue: 2004-12-02

11 Additional information to this test report

Remarks

- | | |
|-------------------|---|
| n.a. ¹ | not applicable, because the antenna is part of the PCB |
| n.a. ² | not applicable, because the EUT is directly battery powered |

FCC ID: SOV2718W

Date of issue: 2004-12-02

End of test report