

FCC PART 15 SUBPART C MEASUREMENT AND TEST REPORT

For

Archos S.A.

12 rue Ampère 91430 Igny France

E.U.T.: Weather Station Indoor Module US

Model Name: ACWS01US

Brand Name: ARCHOS

FCC ID: SOVACWS01US

Report Number: NTC1408108F

Test Date(s): August 26, 2014 to October 09, 2014

Report Date(s): October 09, 2014

Prepared by

Dongguan Nore Testing Center Co., Ltd.


**Building D, Gaosheng Science and Technology Park, Hongtu Road,
Nancheng District, Dongguan City, Guangdong, China**

Tel: +86-769-22022444

Fax: +86-769-22022799

Prepared By

Approved & Authorized Signer


Rose Hu / Engineer


Sunm Lv / Q.A. Director

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.

Table of Contents

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY	6
1.4 EQUIPMENT MODIFICATIONS	6
1.5 SUPPORT DEVICE	6
1.6 TEST FACILITY AND LOCATION	7
1.7 SUMMARY OF TEST RESULTS	7
2. SYSTEM TEST CONFIGURATION	8
2.1 EUT CONFIGURATION	8
2.2 SPECIAL ACCESSORIES	8
2.3 DESCRIPTION OF TEST MODES	8
2.4 EUT EXERCISE	8
3. CONDUCTED EMISSIONS TEST	9
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	9
3.2 TEST CONDITION	9
3.3 MEASUREMENT RESULTS	9
4. MAX. CONDUCTED OUTPUT POWER	12
4.1 MEASUREMENT PROCEDURE	12
4.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
4.3 MEASUREMENT RESULTS	12
5. 6DB&20DB BANDWIDTH	18
5.1 MEASUREMENT PROCEDURE	18
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	18
5.3 MEASUREMENT RESULTS	18
6. POWER SPECTRAL DENSITY	32
6.1 MEASUREMENT PROCEDURE	32
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	32
6.3 MEASUREMENT RESULTS	32
7. BAND EDGE AND CONDUCTED SPURIOUS EMISSIONS	40
7.1 REQUIREMENT AND MEASUREMENT PROCEDURE	40
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	40
7.3 MEASUREMENT RESULTS	40



8. RADIATED SPURIOUS EMISSIONS AND RESTRICTED BANDS 48

 8.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....48

 8.2 MEASUREMENT PROCEDURE49

 8.3 LIMIT.....50

 8.4 MEASUREMENT RESULTS51

9. ANTENNA APPLICATION 57

 9.1 ANTENNA REQUIREMENT57

 9.2 MEASUREMENT RESULTS.....57

10. TEST EQUIPMENT LIST..... 58

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

This device is a weather station transmitter with WIFI function. It's powered by DC 5V come from Adapter. For more details features, please refer to User's Manual.

Manufacturer	: ARCHOS Technology (Shenzhen) Co., Ltd.
Address	: 7A, 1st Block, Financial Base, No.8 Kefa Road, Hi-Tech Park, Nanshan District, Shenzhen, China
Power Supply	: DC 5V come from Adapter, Adapter M/N: CS5D050100F Input: AC 100-240V 50/60Hz 200mA Output: DC 5.0V 1.0A
Model name	: ACWS01US
Note	: None

Technical parameters For WIFI Function

Frequency Range	: 2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
Modulation	: CCK, DQPSK, DBPSK for 802.11b OFDM for 802.11g/n
Number of Channel	: 11 for 802.11b/g/n(HT20) 7 for 802.11n(HT40)
Channel space	: 5MHz
Date Rate	: 802.11b:1~11Mbps, 802.11g:6~54Mbps 802.11n: 6.5~65Mbps
Antenna Type	: PCB
Antenna Gain	: 3 dBi (declared by manufacturer)

Channel List

802.11 b/g/n(HT20)		802.11 n(HT40)	
Channel	Frequency MHz	Channel	Frequency MHz
1	2412	---	---
2	2417	---	---
3	2422	3	2422
4	2427	4	2427
5	2432	5	2432
6	2437	6	2437
7	2442	7	2442
8	2447	8	2447
9	2452	9	2452
10	2457	---	---
11	2462	---	---

Note: According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, middle, and the Highest frequency of channel were selected to perform the test. The selected frequency see below:

802.11b/g/n(HT20)		802.11 n(HT40)	
Channel	Frequency MHz	Channel	Frequency MHz
1	2412	3	2422
6	2437	6	2437
11	2462	9	2452

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: SOVACWS01US filing to comply with Section 15.247 of the FCC Part 15(2013), Subpart C Rule.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009) and KDB558074 (v03r02). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters. All other measurements were made in accordance with the procedures in 47 CFR part 2.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

None

1.6 Test Facility and Location

Listed by FCC, August 02, 2011
The Certificate Registration Number is 665078.
Listed by Industry Canada, July 01, 2011
The Certificate Registration Number is 46405-9743.

Dongguan NTC Co., Ltd.
(Full Name: Dongguan Nore Testing Center Co., Ltd.)

Building D, Gaosheng Science and Technology Park, Hongtu Road,
Nancheng District, Dongguan City, Guangdong, China
(Full Name: Building D, Gaosheng Science & Technology Park,
Zhouxi Longxi Road, Nancheng District, Dongguan, Guangdong, China.

1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207 (a)	AC Power Conducted Emission	Compliance
§15.247(b)(3)	Max. Conducted Output Power	Compliance
§15.247(a)(2)	6dB Bandwidth	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band Edge and Conducted Spurious Emissions	Compliance
§15.247(d), §15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	Compliance
§15.203	Antenna Requirement	Compliance

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes


The EUT has been tested under continuous operating condition. Test program used to control the EUT staying in continuous transmitting mode. The Lowest, middle and highest channel were chosen for testing, and modulation type CCK, DQPSK, DBPSK, OFDM and all data rate were tested. But only the worst case data is shown in this report.

2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

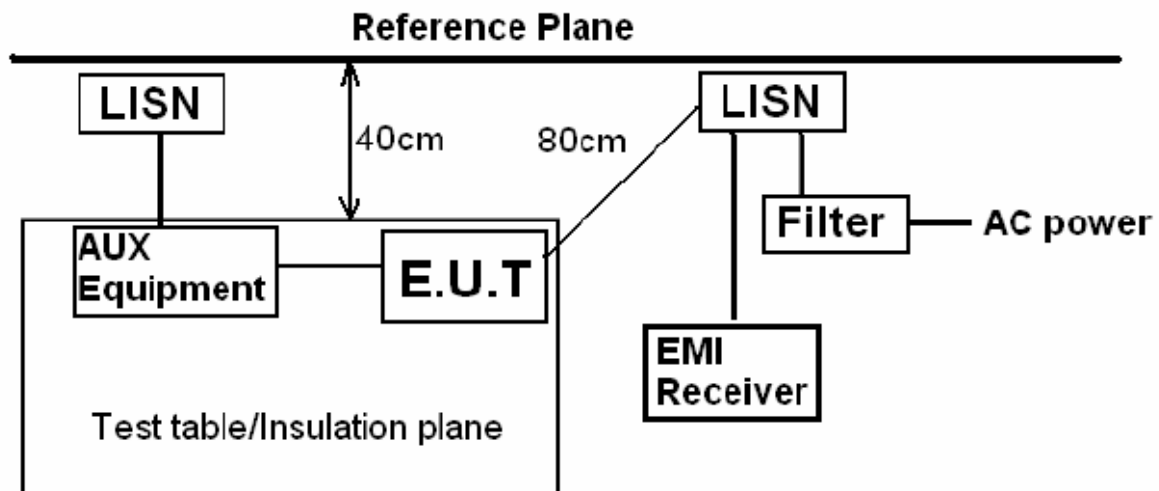

3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: WIFI Mode

3.3 Measurement Results


Please refer to following the worst case (802.11b) plots.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2014-8-29 8:49:23

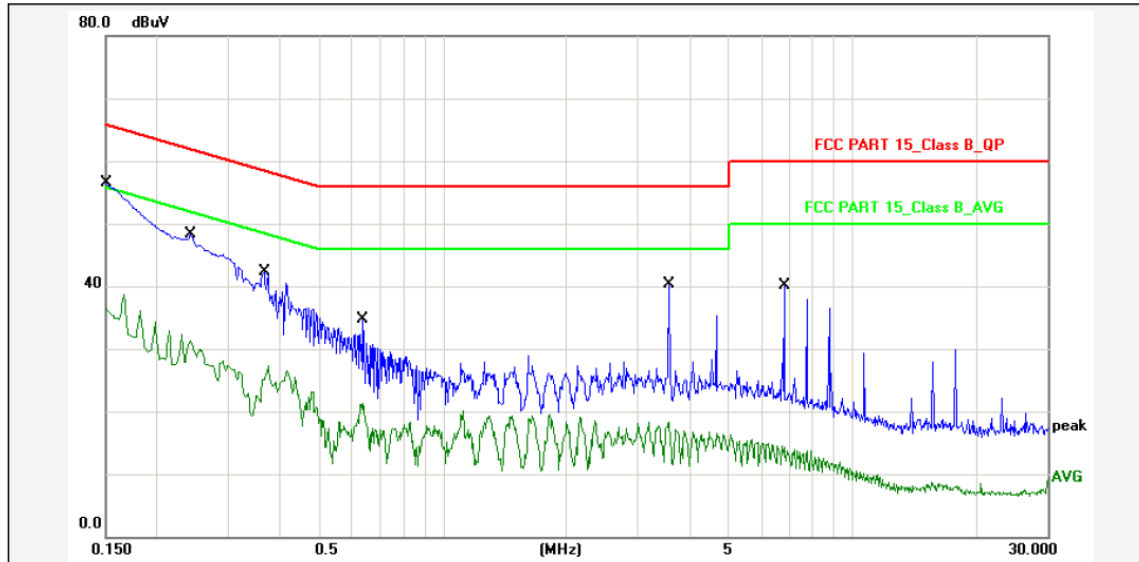

Report No.: ACWS01US

Test Standard: FCC PART 15 Class B_QP

Test item: Conducted Emission

Phase: L1

Applicant: Archos

Temp.()/Hum.(%): 25(C) / 45 %

Product: Weather Station Indoor Module US

Power Rating: AC 120V/60Hz

Model No.: ACWS01US

Test Engineer: Susan

Test Mode: WIFI Mode

Remark: 802.11b

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	10.80	42.00	52.80	65.99	-13.19	QP	P	
2	0.1500	10.80	25.10	35.90	55.99	-20.09	AVG	P	
3	0.2420	10.80	35.52	46.32	62.02	-15.70	QP	P	
4	0.2420	10.80	19.51	30.31	52.02	-21.71	AVG	P	
5	0.3660	10.80	29.47	40.27	58.59	-18.32	QP	P	
6	0.3660	10.80	13.43	24.23	48.59	-24.36	AVG	P	
7	0.6380	10.80	20.87	31.67	56.00	-24.33	QP	P	
8	0.6380	10.80	18.49	29.29	46.00	-16.71	AVG	P	
9	3.5700	10.80	27.42	38.22	56.00	-17.78	QP	P	
10	3.5700	10.80	5.58	16.38	46.00	-29.62	AVG	P	
11	6.8180	10.80	26.39	37.19	60.00	-22.81	QP	P	
12	6.8180	10.80	0.67	11.47	50.00	-38.53	AVG	P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2014-8-29 8:53:29

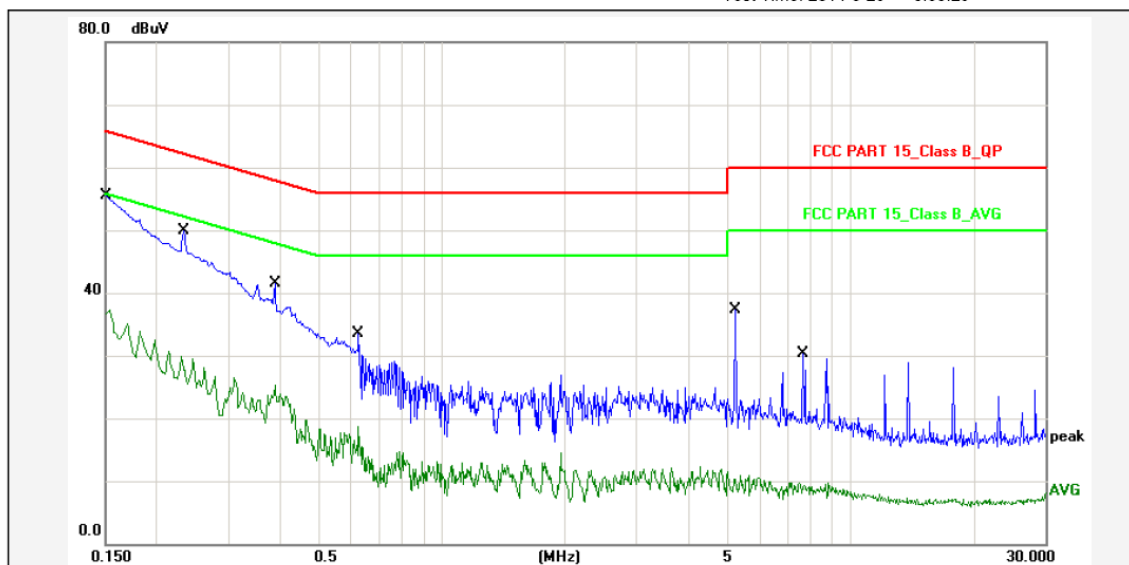

Report No.: ACWS01US

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Phase: N

Applicant: Archos

Temp.()/Hum.(%): 25(C) / 45 %

Product: Weather Station Indoor Module US

Power Rating: AC 120V/60Hz

Model No.: ACWS01US

Test Engineer: Susan

Test Mode: WIFI Mode

Remark: 802.11b

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	10.80	41.30	52.10	65.99	-13.89	QP	P	
2	0.1500	10.80	24.20	35.00	55.99	-20.99	AVG	P	
3	0.2340	10.80	36.16	46.96	62.30	-15.34	QP	P	
4	0.2340	10.80	17.00	27.80	52.30	-24.50	AVG	P	
5	0.3899	10.80	28.71	39.51	58.06	-18.55	QP	P	
6	0.3899	10.80	12.44	23.24	48.06	-24.82	AVG	P	
7	0.6260	10.80	19.67	30.47	56.00	-25.53	QP	P	
8	0.6260	10.80	4.90	15.70	46.00	-30.30	AVG	P	
9	5.2340	10.80	23.46	34.26	60.00	-25.74	QP	P	
10	5.2340	10.80	-0.94	9.86	50.00	-40.14	AVG	P	
11	7.6660	10.80	16.59	27.39	60.00	-32.61	QP	P	
12	7.6660	10.80	-5.13	5.67	50.00	-44.33	AVG	P	

Note: Level=Reading+Factor.

Margin=Limit-Level.

4. Max. Conducted Output Power

4.1 Measurement Procedure


Maximum Conducted Output power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074 (v03r02):

Maximum conducted (Average) output power:

1. Set the RBW = 1-5% of the OBW, not to exceed 1MHz.
2. Set the VBW $\geq 3 \times$ RBW
3. Set the span $\geq 1.5 \times$ OBW
4. Detector = RMS
5. Sweep time = auto couple.
6. Number of points in sweep $\geq 2 \times$ span/RBW. (This gives bin-to-bin spacing ≤ 2 , so that narrowband signals are not lost between frequency bins.)
7. Trace mode = Trace average at least 100 traces in power averaging (i.e., RMS) mode.
8. If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
9. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

4.2 Test SET-UP (Block Diagram of Configuration)




4.3 Measurement Results

Pass


Please refer to following table and plots.

Temperature :	27 °C	Humidity :	55%
Test By:	Sance	Test Date :	October 09, 2014
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	AV Output Power dBm	Limit dBm
IEEE 802.11b Mode (CCK, Antenna Gain=3dBi)			
Low Channel: 2412	1	12.55	30
Middle Channel: 2437	1	10.96	30
High Channel: 2462	1	12.79	30
IEEE 802.11g Mode (OFDM, Antenna Gain=3dBi)			
Low Channel: 2412	6	10.51	30
Middle Channel: 2437	6	12.42	30
High Channel: 2462	6	13.76	30
Low Channel: 2412	6.5	8.98	30
Middle Channel: 2437	6.5	10.98	30
High Channel: 2462	6.5	12.31	30
IEEE 802.11n(HT40) Mode (OFDM, Antenna Gain=3dBi)			
Low Channel: 2422	13	12.10	30
Middle Channel: 2437	13	10.65	30
High Channel: 2452	13	9.16	30


Maximum Average Conducted Output Power 802.11b Low Channel

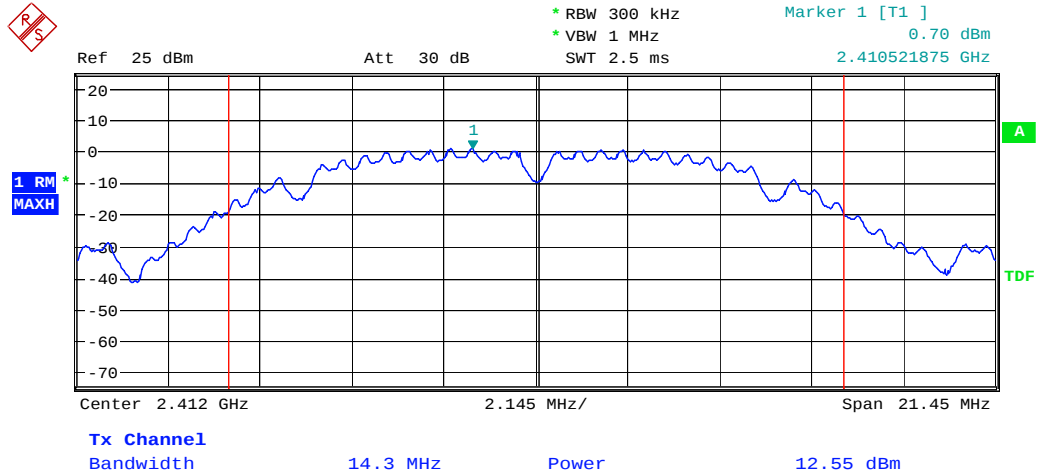


802.11b Middle Channel

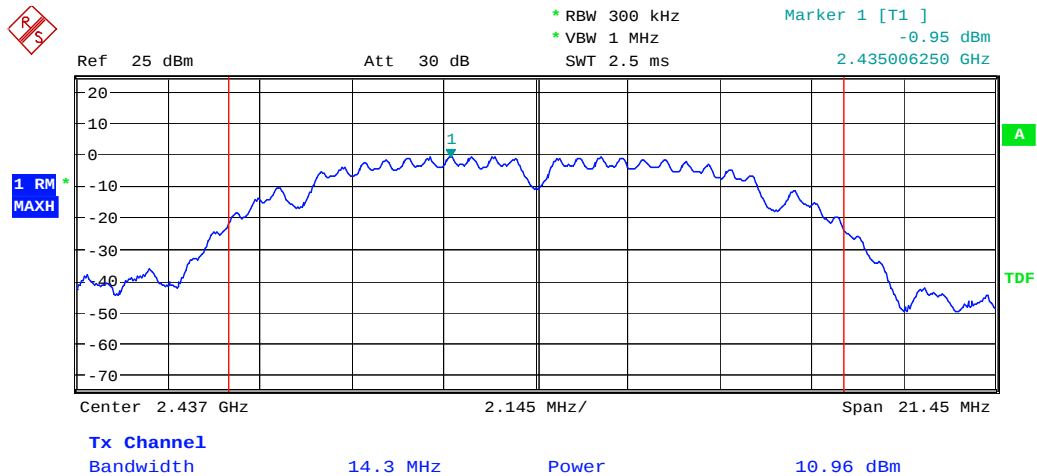


802.11b High Channel

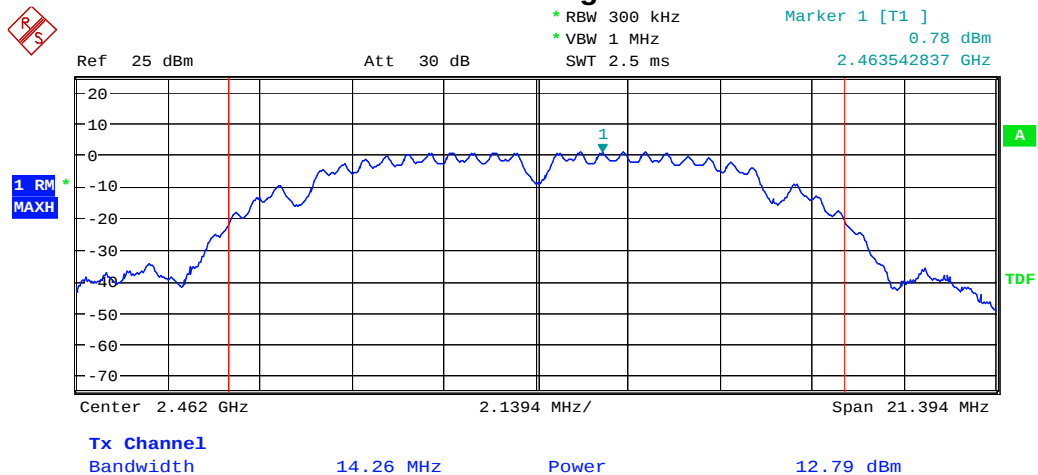


802.11g Low Channel

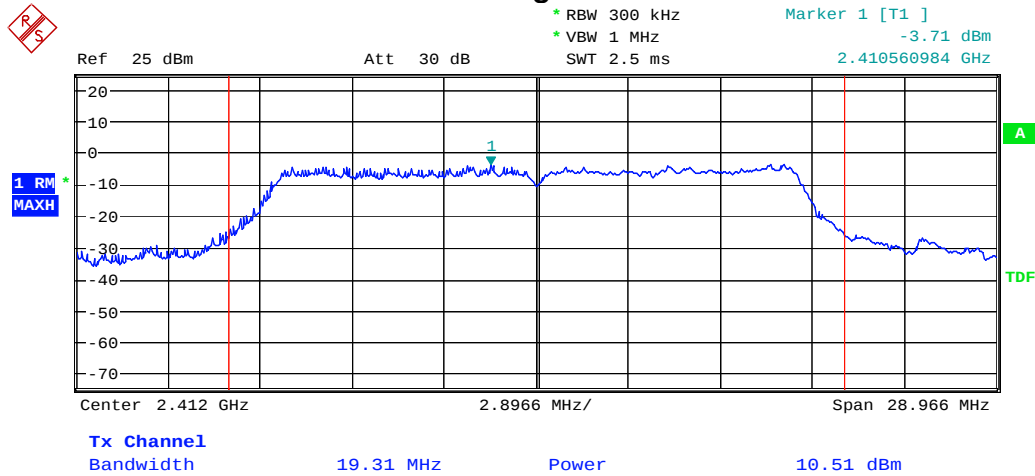


802.11g Middle Channel

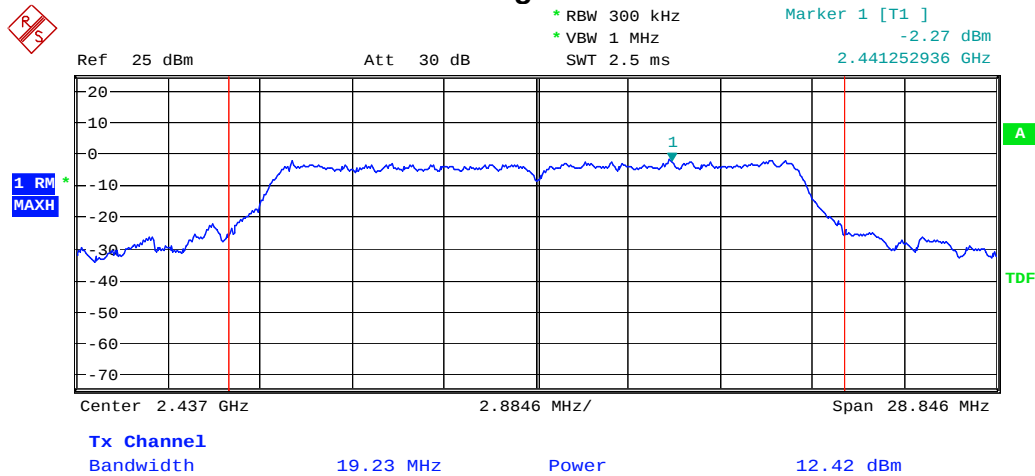


802.11g High Channel

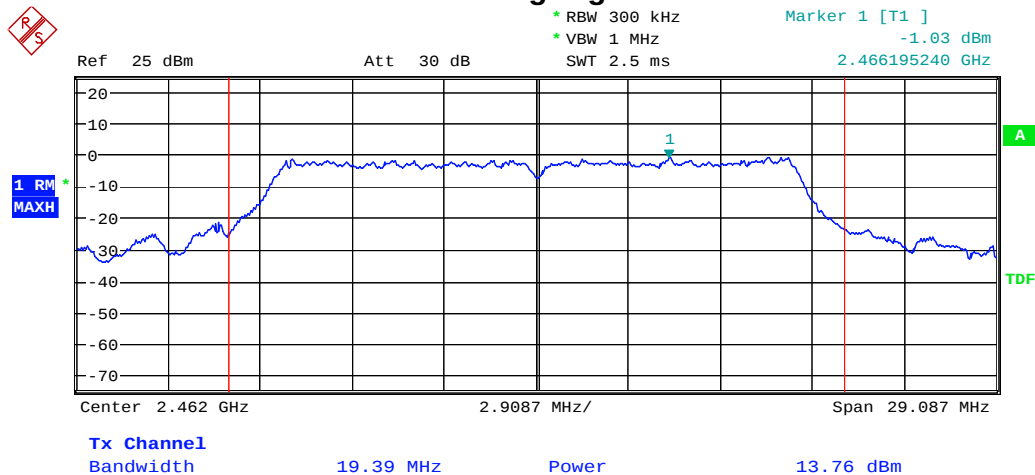


802.11n(HT20) Low Channel

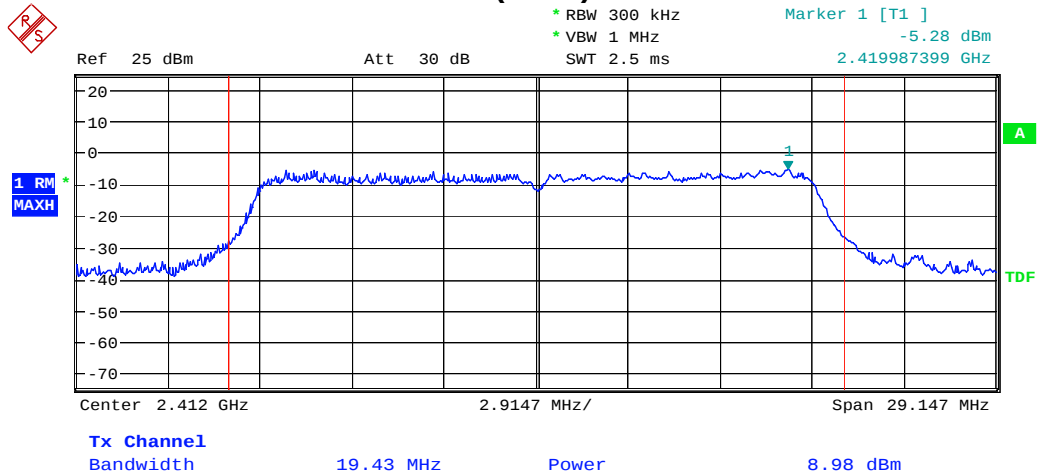


802.11n(HT20) Middle Channel

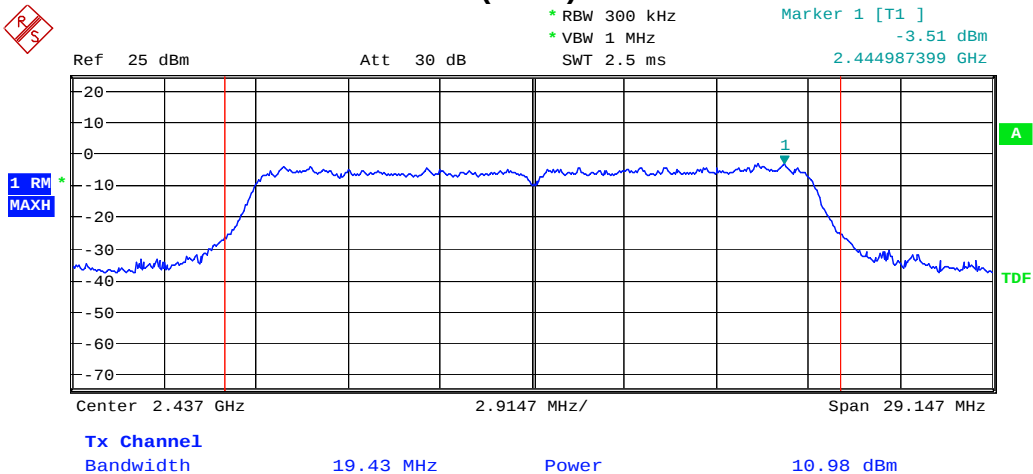


802.11n(HT20) High Channel

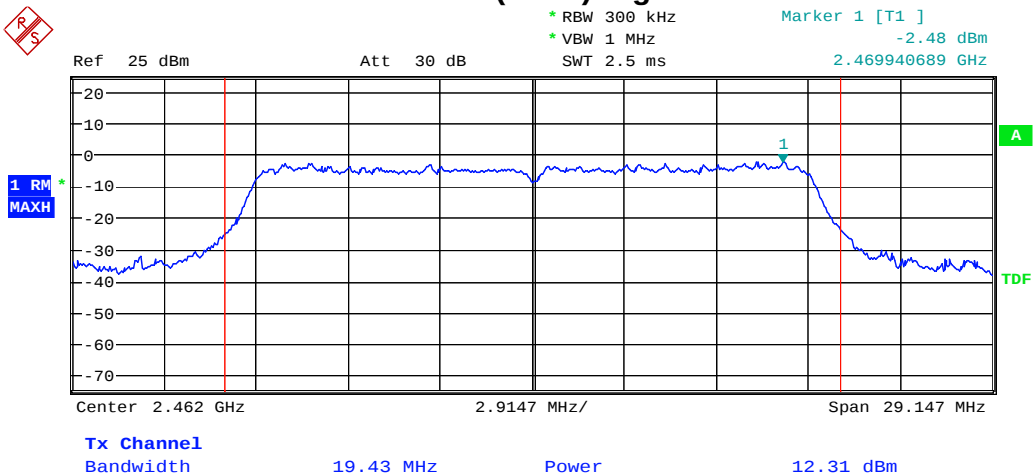


802.11n(HT40) Low Channel

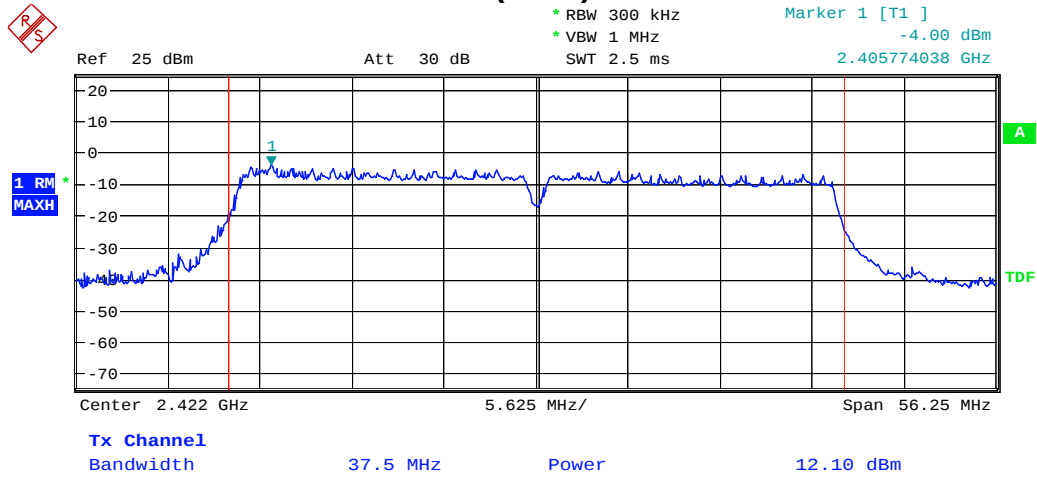

802.11n(HT40) Middle Channel

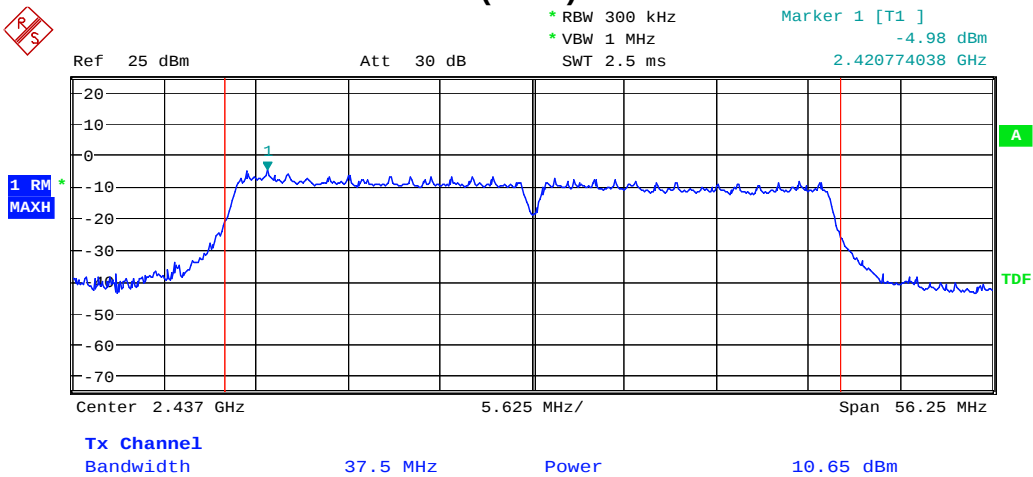

802.11n(HT40) High Channel

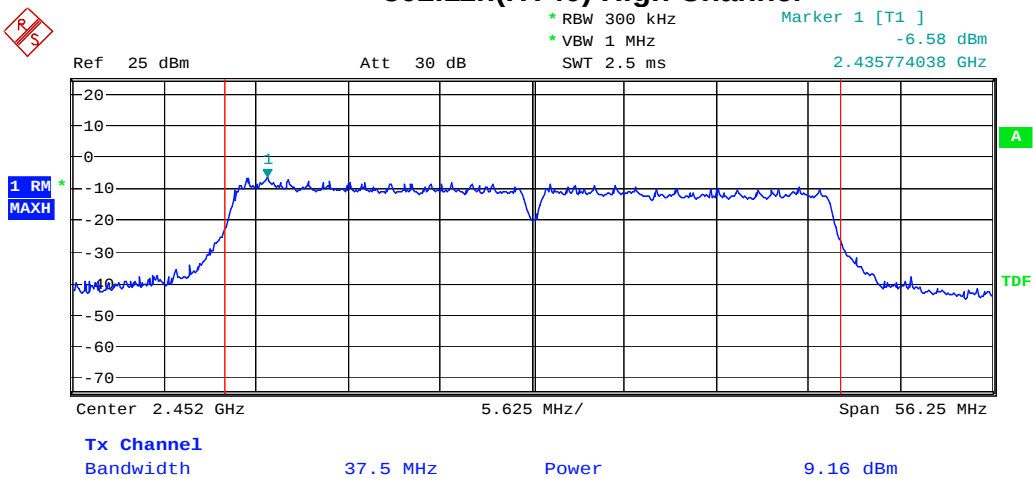

5. 6dB&20dB Bandwidth


5.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074(v03r02):

1. Set the RBW = 100KHz.
2. Set the VBW $\geq 3 \times$ RBW
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.2 Test SET-UP (Block Diagram of Configuration)




5.3 Measurement Results

Pass

Please refer to following table and plots.


Temperature :	27 °C	Humidity : 55 %		
Test By:	Sance	Test Date : October 09, 2014		
Test Result:	PASS			
Frequency MHz	Data Rate Mbps	6dB Bandwidth MHz	20dB Bandwidth MHz	Limit
IEEE 802.11b Mode (CCK)				
Low Channel: 2412	1	10.14	14.30	>500KHz
Middle Channel: 2437	1	10.14	14.30	>500KHz
High Channel: 2462	1	10.18	14.26	>500KHz
IEEE 802.11g Mode (OFDM)				
Low Channel: 2412	6	16.71	19.31	>500KHz
Middle Channel: 2437	6	16.75	19.23	>500KHz
High Channel: 2462	6	16.71	19.39	>500KHz
IEEE 802.11n(HT20) Mode (OFDM)				
Low Channel: 2412	6.5	17.83	19.43	>500KHz
Middle Channel: 2437	6.5	17.83	19.43	>500KHz
High Channel: 2462	6.5	17.83	19.43	>500KHz
IEEE 802.11n(HT40) Mode (OFDM)				
Low Channel: 2422	13	36.06	37.50	>500KHz
Middle Channel: 2437	13	35.96	37.50	>500KHz
High Channel: 2452	13	36.06	37.50	>500KHz

6dB Bandwidth 802.11b Low Channel

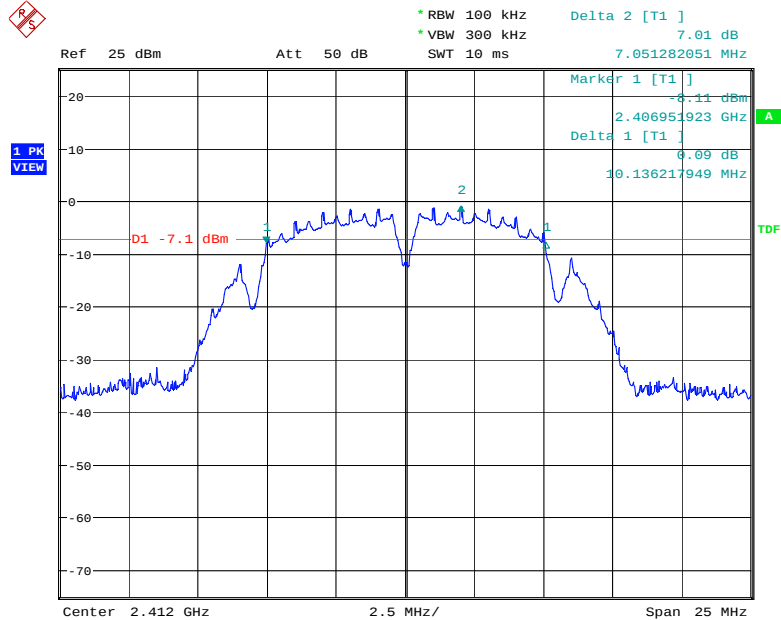


Date: 9.OCT.2014 10:54:42

802.11b Middle Channel

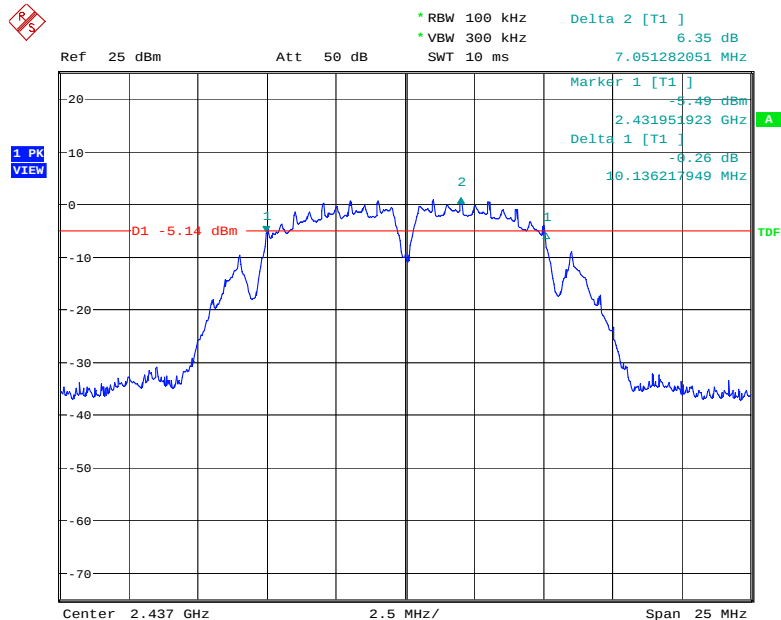


Date: 9.OCT.2014 10:56:20

802.11b High Channel

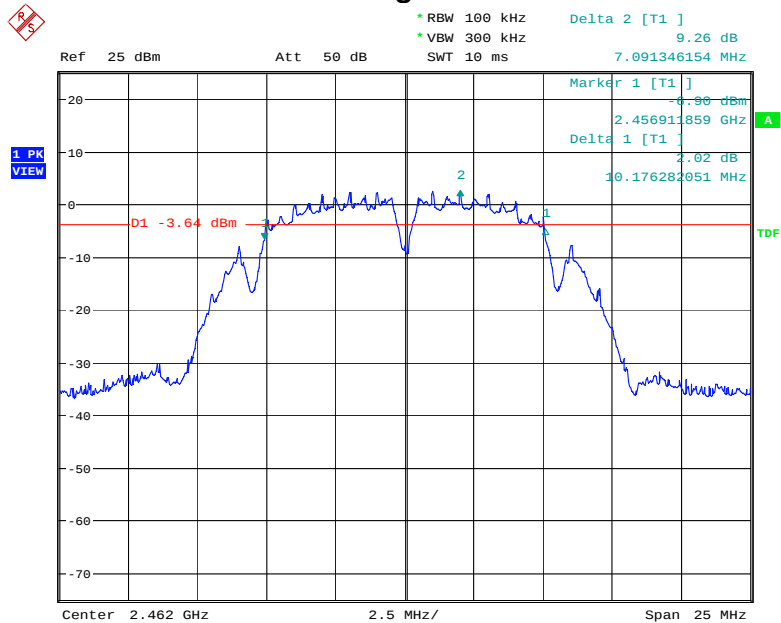


Date: 9.OCT.2014 10:58:28

802.11g Low Channel

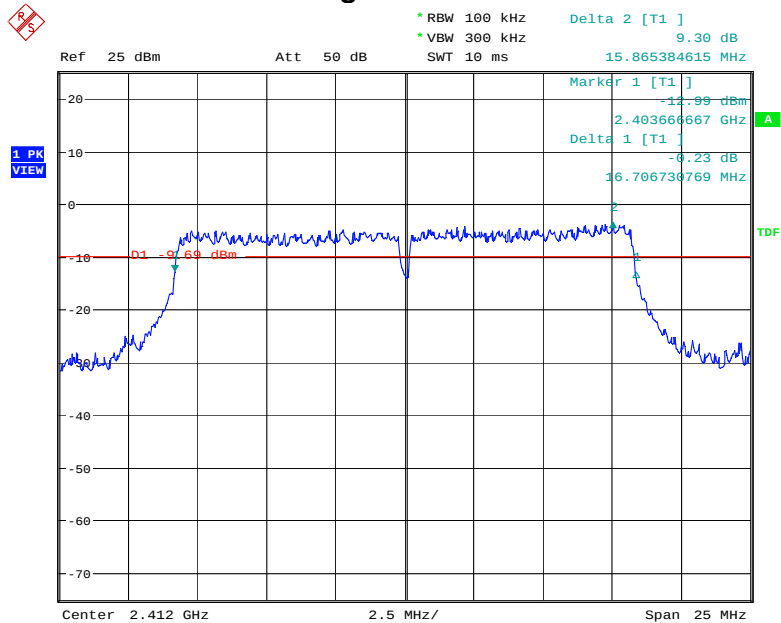


Date: 9.OCT.2014 11:01:32

802.11g Middle Channel

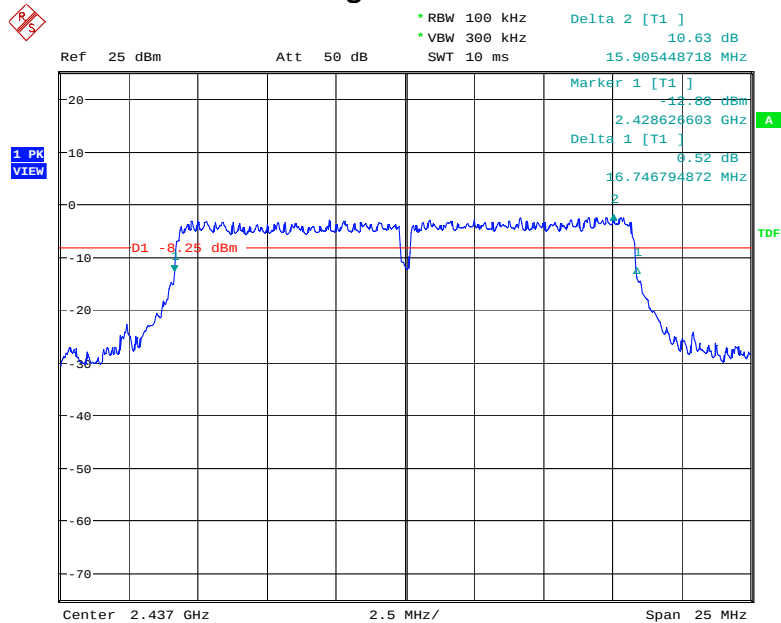


Date: 9.OCT.2014 11:03:03

802.11g High Channel

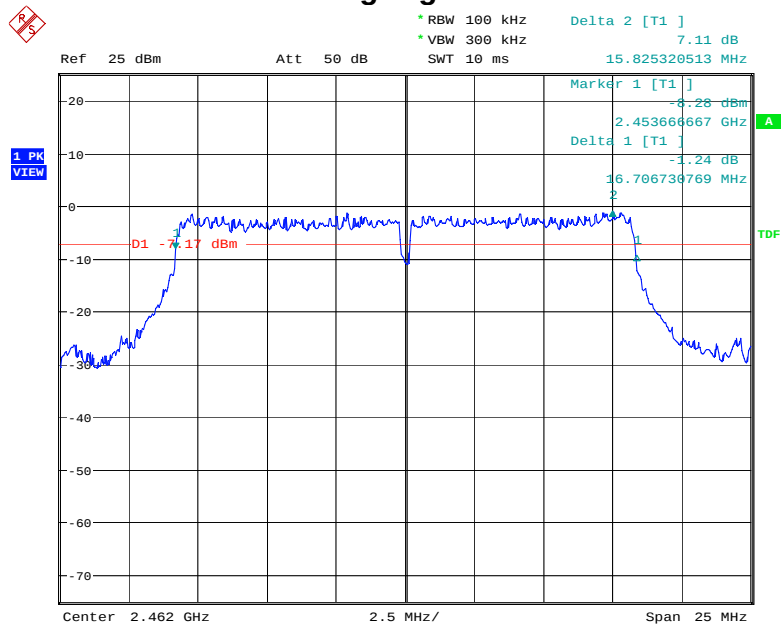


Date: 9.OCT.2014 11:04:39

802.11n(HT20) Low Channel

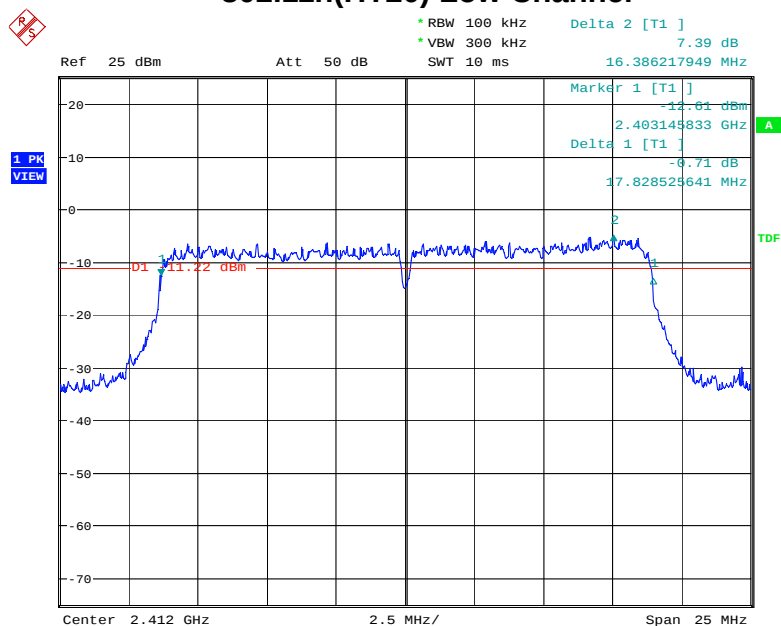


Date: 9.OCT.2014 11:06:31

802.11n(HT20) Middle Channel

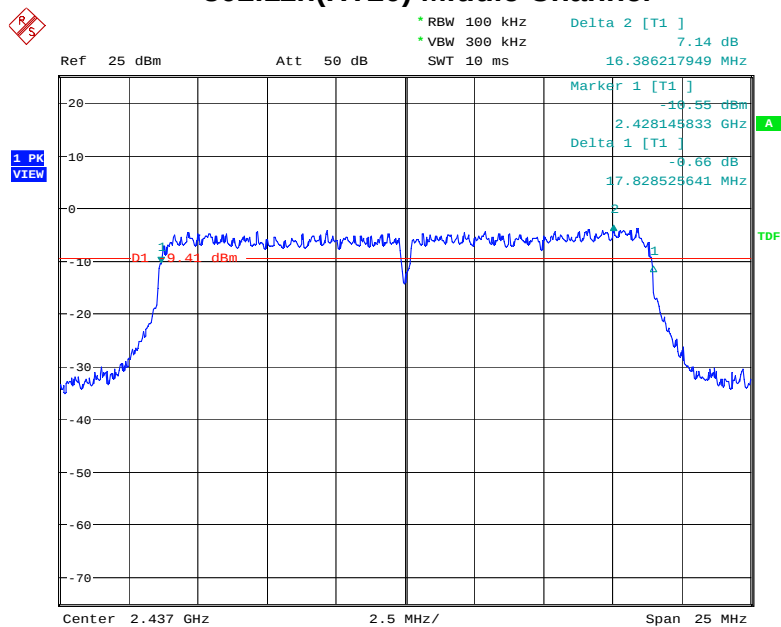


Date: 9.OCT.2014 11:10:26

802.11n(HT20) High Channel

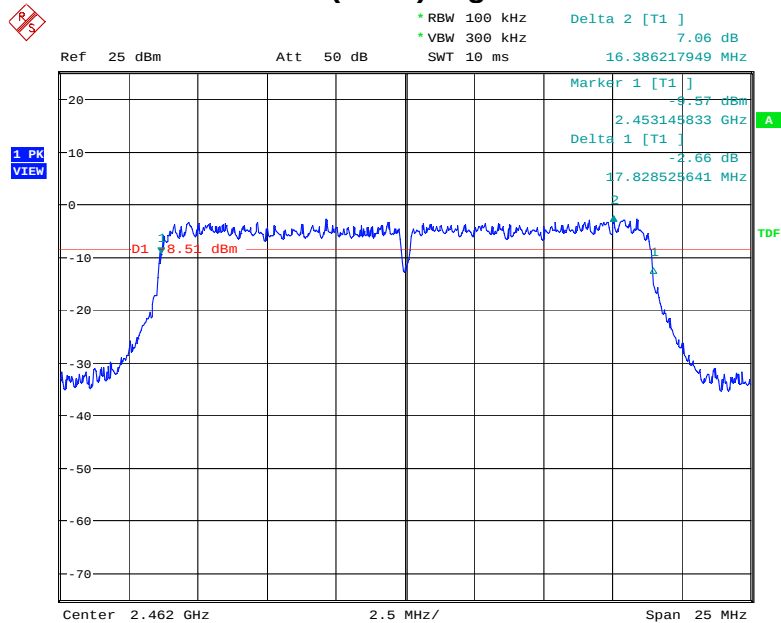


Date: 9.OCT.2014 11:14:25

802.11n(HT40) Low Channel

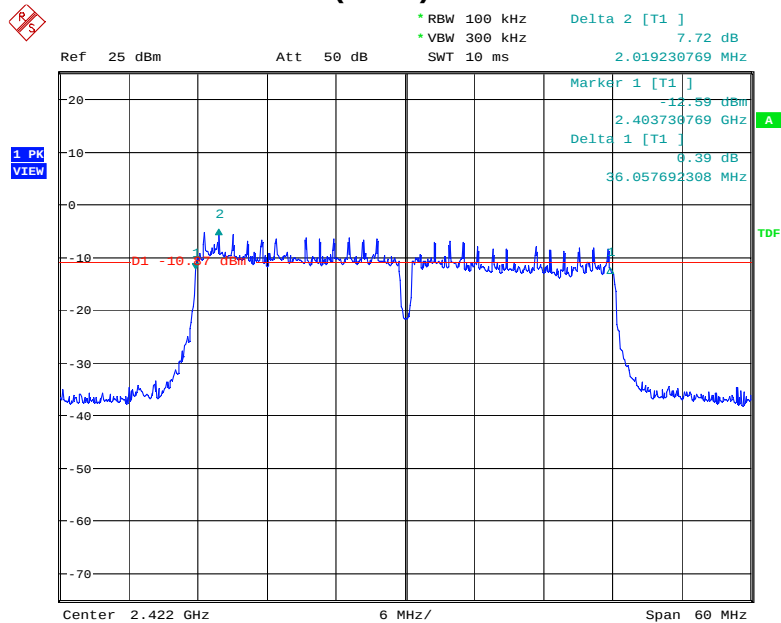


Date: 9.OCT.2014 14:54:39

802.11n(HT40) Middle Channel

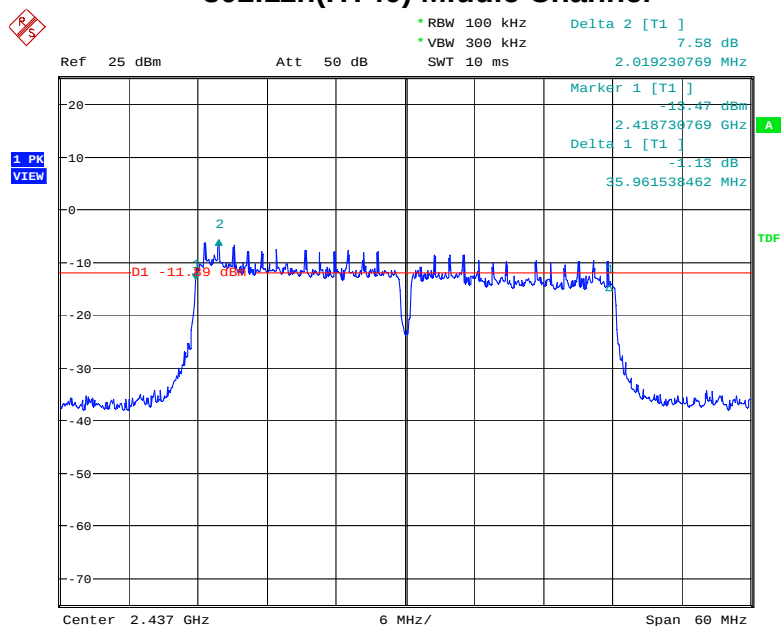

Date: 9.OCT.2014 14:48:55


802.11n(HT40) High Channel

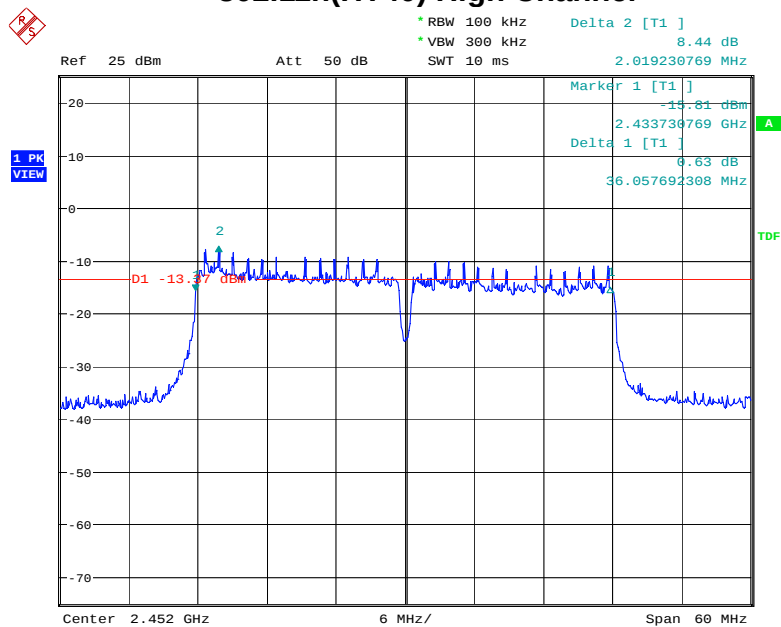

Date: 9.OCT.2014 14:52:26


20dB Bandwidth

802.11b Low Channel

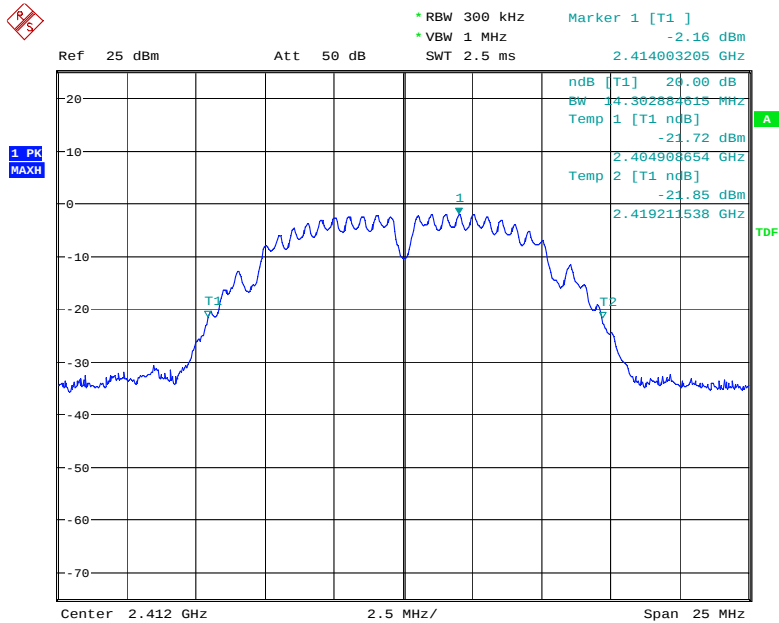


Date: 9.OCT.2014 13:37:40

802.11b Middle Channel

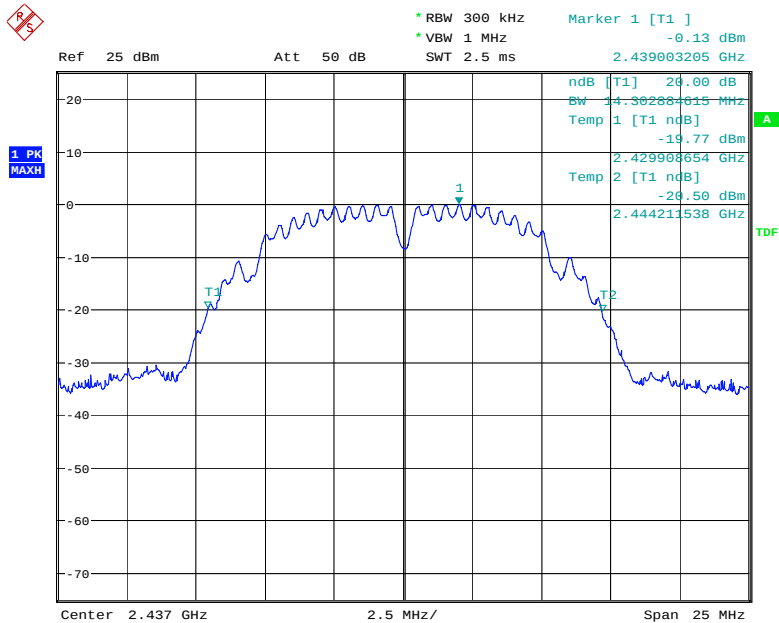


Date: 9.OCT.2014 13:38:49

802.11b High Channel

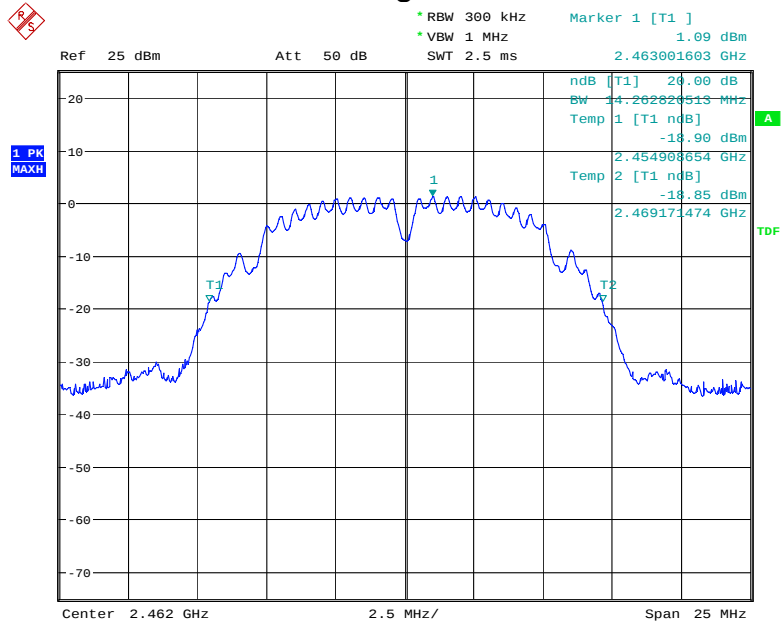

Date: 9.OCT.2014 13:39:13


802.11g Low Channel

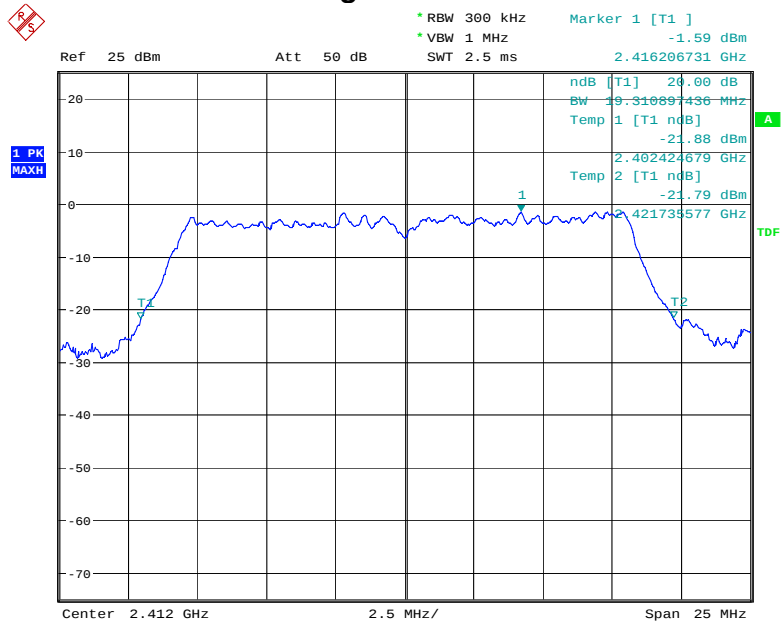

Date: 9.OCT.2014 13:43:51




802.11g Middle Channel

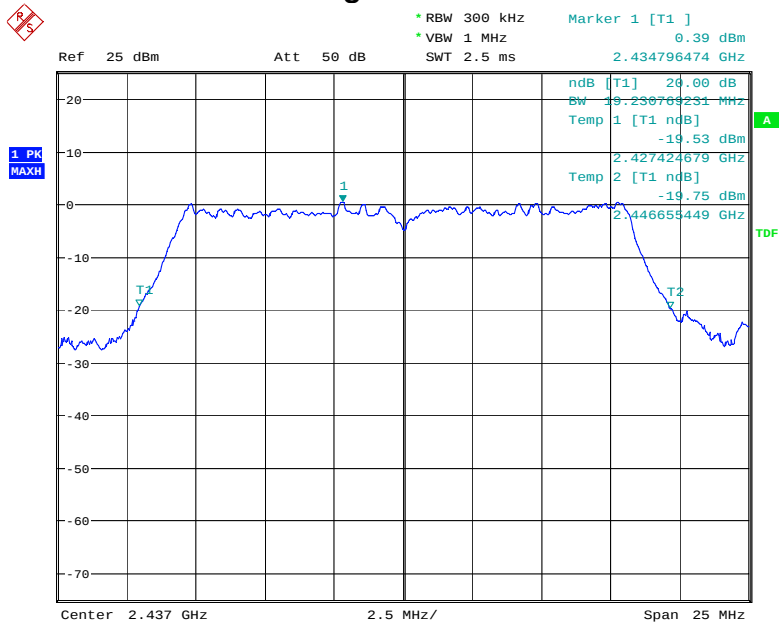


Date: 9.OCT.2014 13:44:55

802.11g High Channel

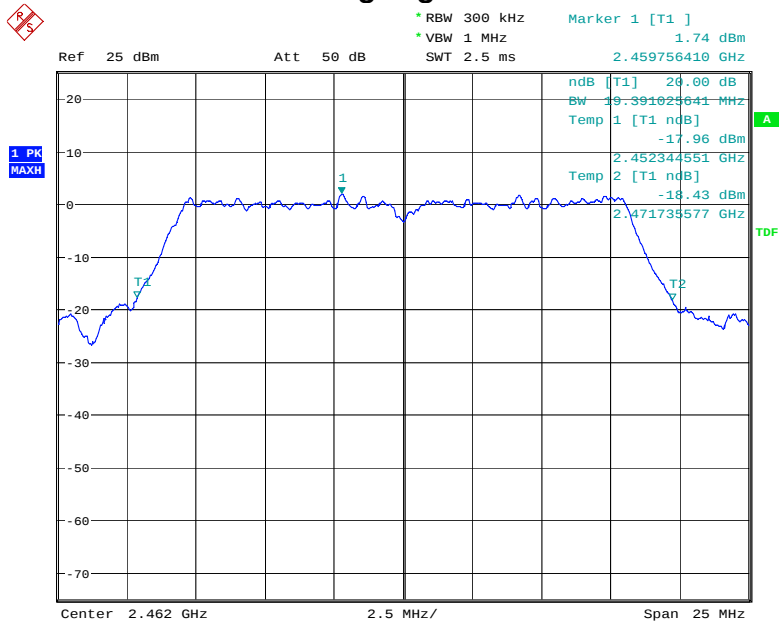


Date: 9.OCT.2014 13:45:55

802.11n(HT20) Low Channel

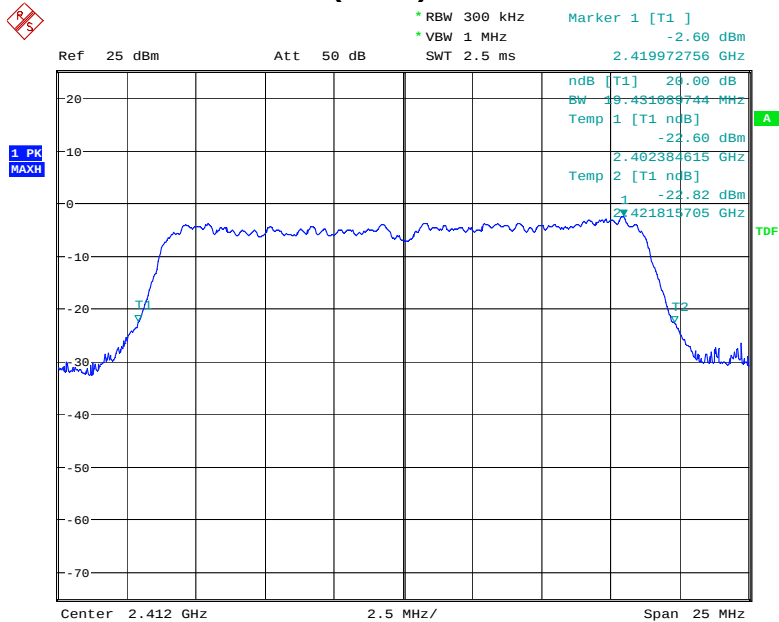


Date: 9.OCT.2014 13:46:53

802.11n(HT20) Middle Channel

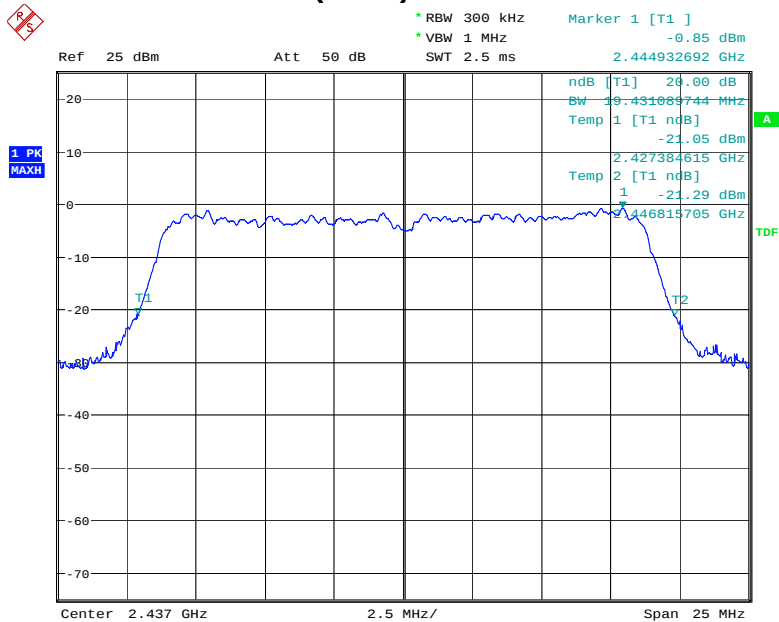


Date: 9.OCT.2014 13:47:41

802.11n(HT20) High Channel

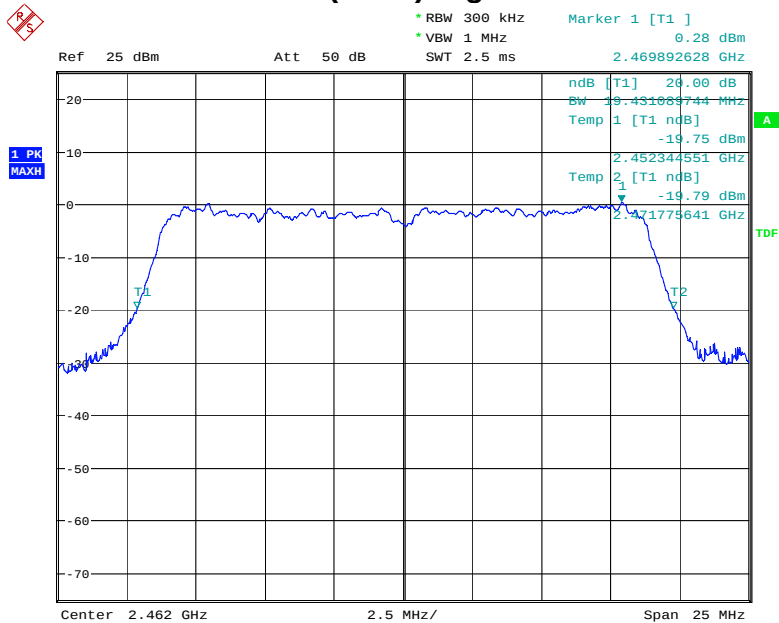


Date: 9.OCT.2014 13:48:18

802.11n(HT40) Low Channel

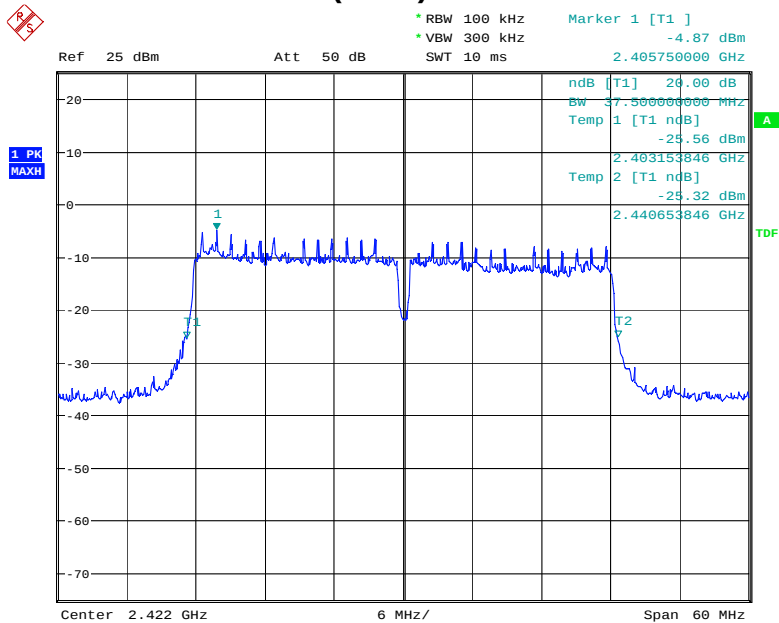


Date: 9.OCT.2014 15:07:09

802.11n(HT40) Middle Channel

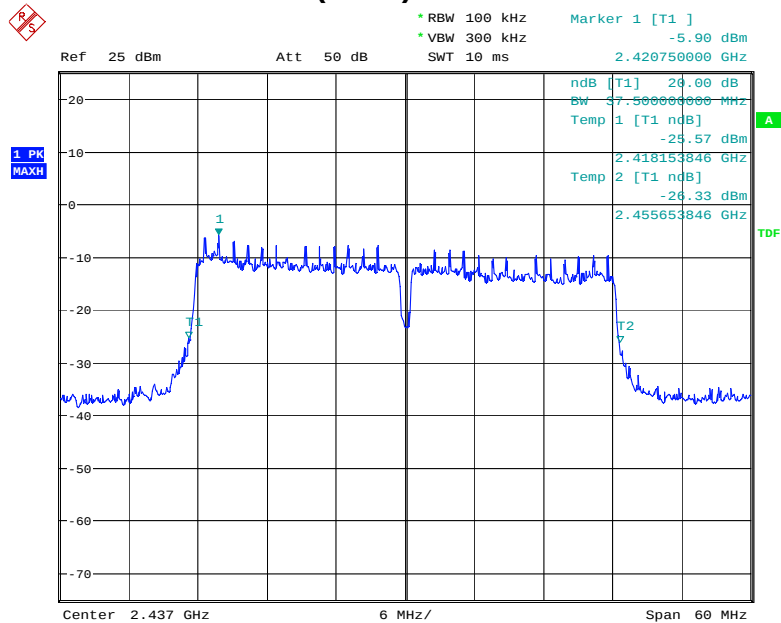

Date: 9.OCT.2014 15:07:42

802.11n(HT40) High Channel

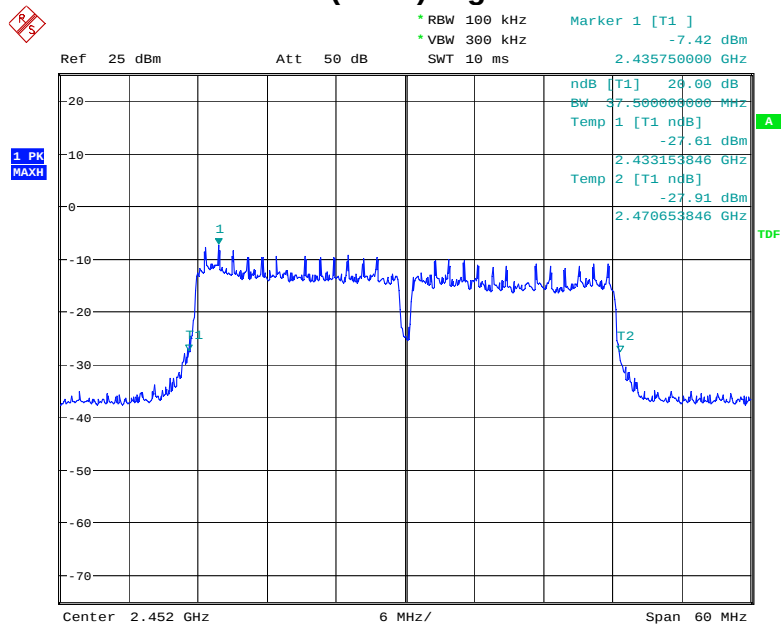

Date: 9.OCT.2014 15:08:13

6. Power Spectral Density


6.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074 (v03r02):

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{KHz}$
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.2 Test SET-UP (Block Diagram of Configuration)




6.3 Measurement Results

Pass

Please refer to following table and plots.


Temperature :	27 °C	Humidity :	55 %
Test By:	Sance	Test Date :	October 09, 2014
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	PSD dBm	Limit dBm
IEEE 802.11b Mode (CCK)			
Low Channel: 2412	1	-18.92	8
Middle Channel: 2437	1	-17.53	8
High Channel: 2462	1	-15.96	8
IEEE 802.11g Mode (OFDM)			
Low Channel: 2412	6	-20.62	8
Middle Channel: 2437	6	-20.14	8
High Channel: 2462	6	-18.02	8
IEEE 802.11n(HT20) Mode (OFDM)			
Low Channel: 2412	6.5	-19.77	8
Middle Channel: 2437	6.5	-20.58	8
High Channel: 2462	6.5	-22.69	8
IEEE 802.11n(HT40) Mode (OFDM)			
Low Channel: 2422	13	-21.14	8
Middle Channel: 2437	13	-21.60	8
High Channel: 2452	13	-22.93	8

802.11b Low Channel

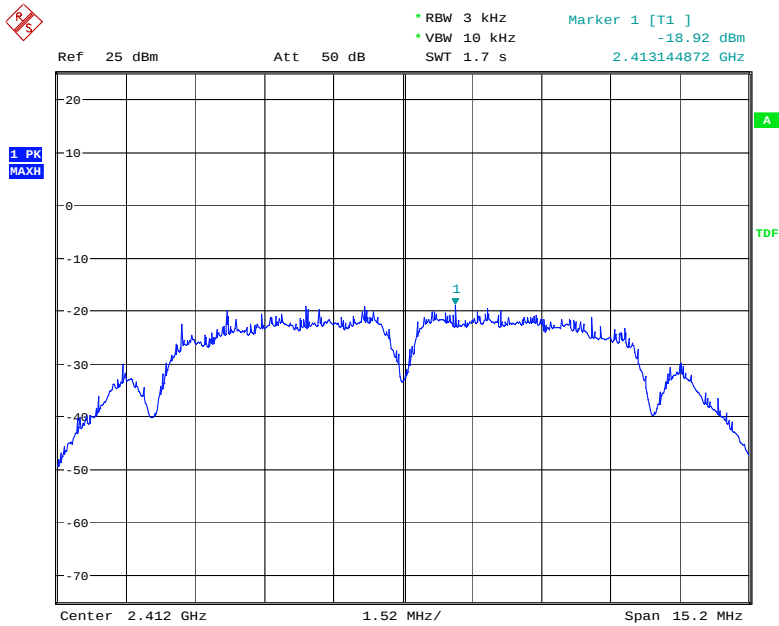


Date: 9.OCT.2014 11:44:27

802.11b Middle Channel

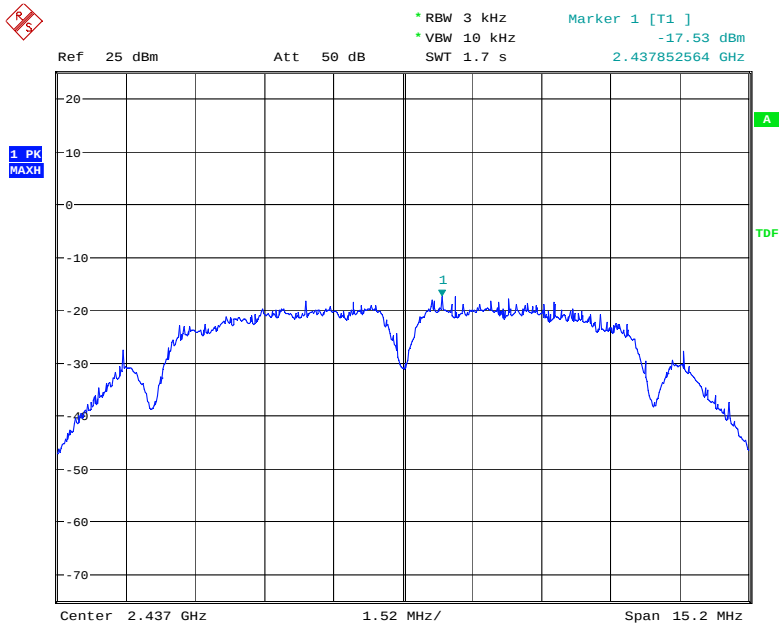


Date: 9.OCT.2014 11:44:46

802.11b High Channel

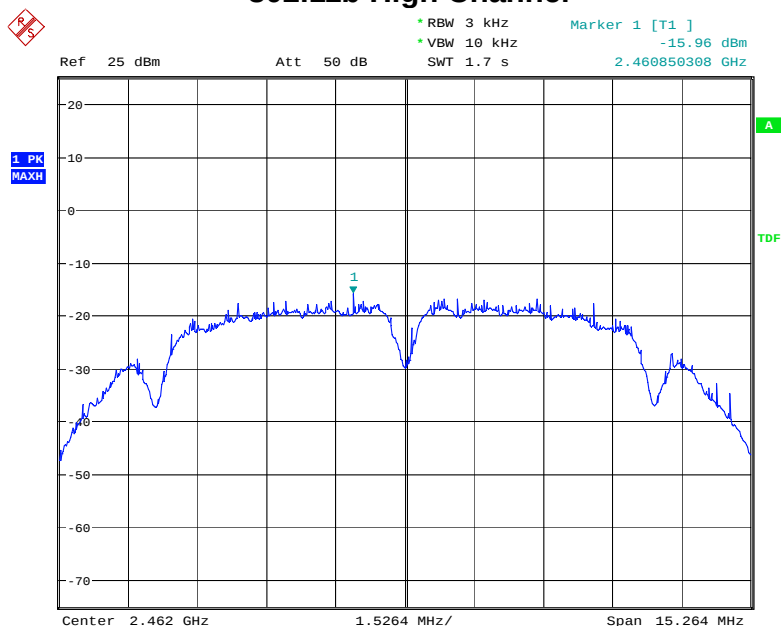


Date: 9.OCT.2014 11:45:19

802.11g Low Channel

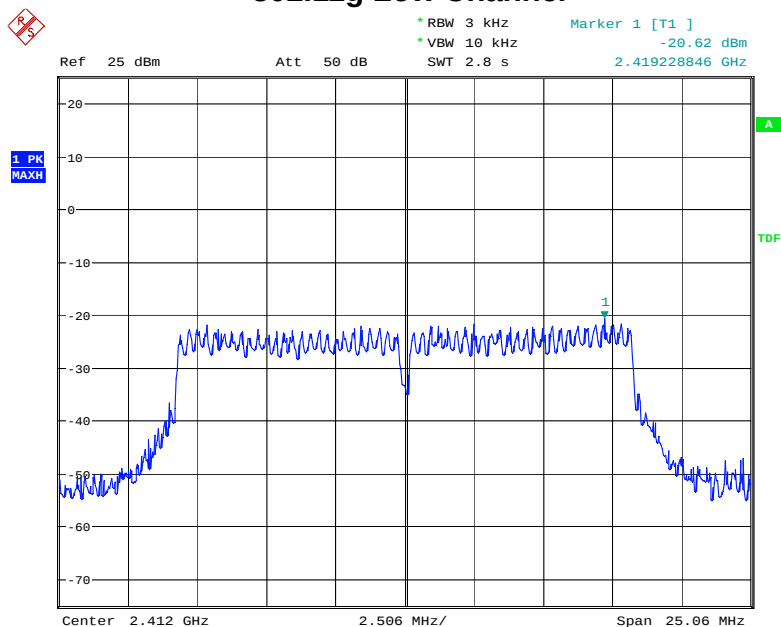


Date: 9.OCT.2014 11:45:56

802.11g Middle Channel

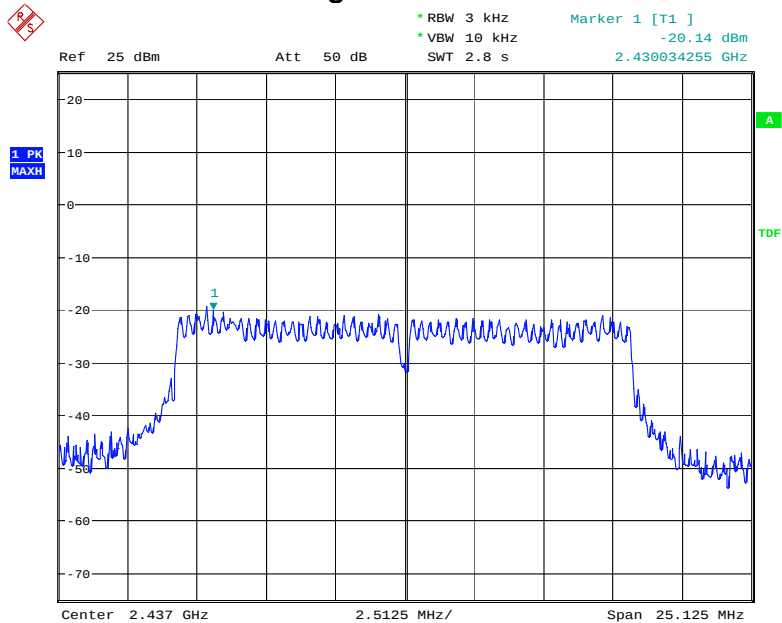


Date: 9.OCT.2014 17:23:45

802.11g High Channel

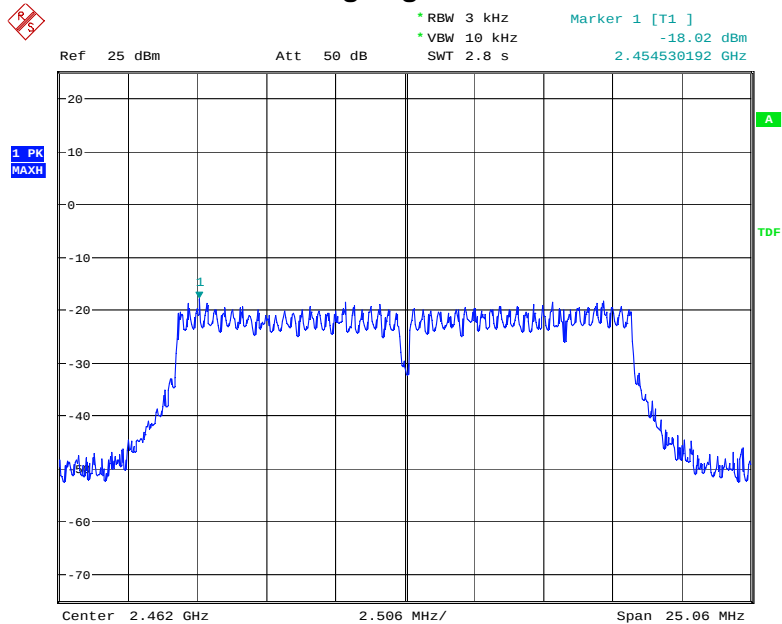


Date: 9.OCT.2014 11:46:49

802.11n(HT20) Low Channel

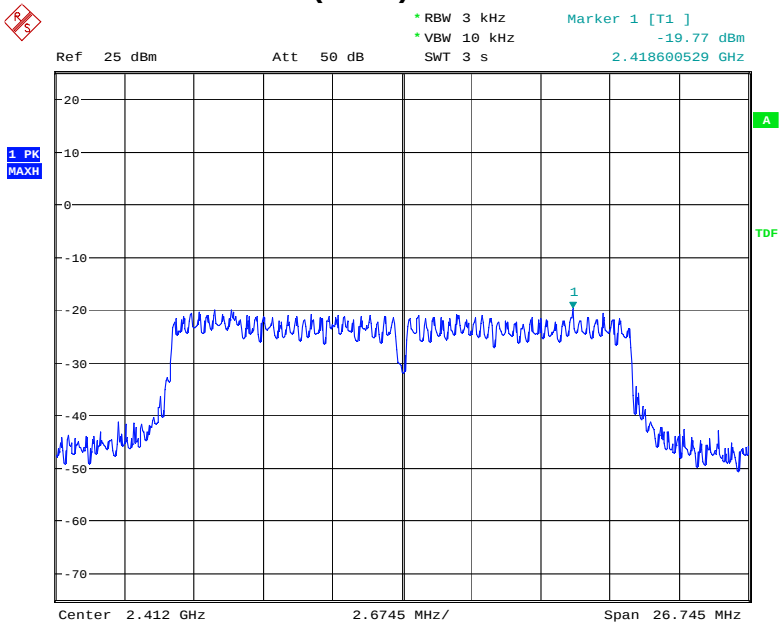


Date: 9.OCT.2014 17:24:22

802.11n(HT20) Middle Channel

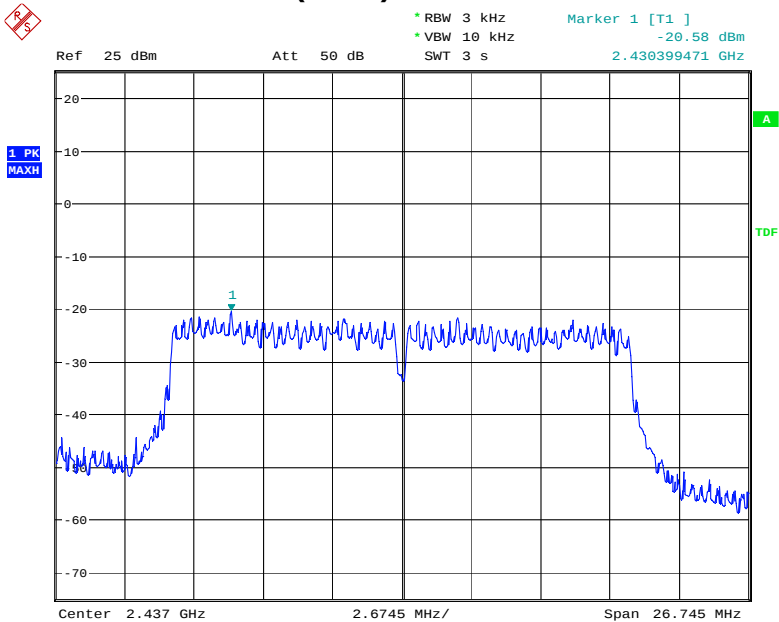


Date: 9.OCT.2014 17:24:47

802.11n(HT20) High Channel

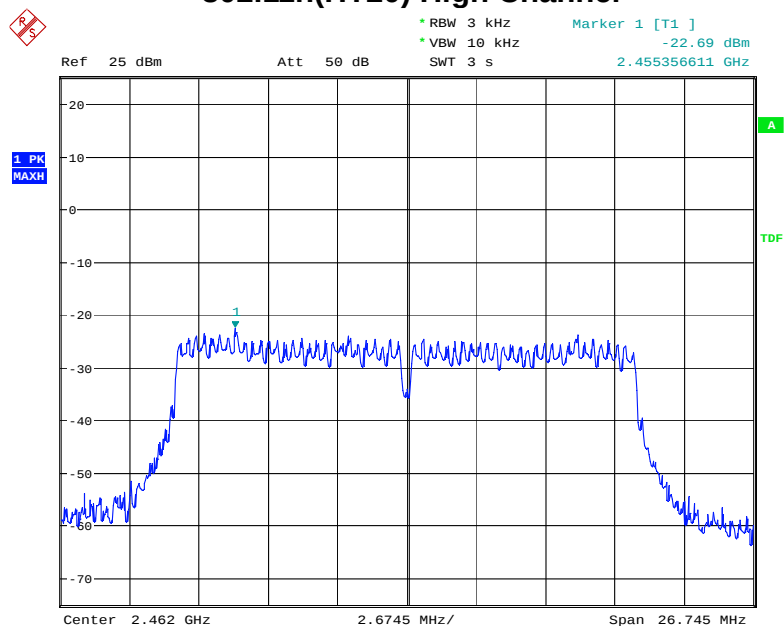


Date: 9.OCT.2014 17:25:14

802.11n(HT40) Low Channel

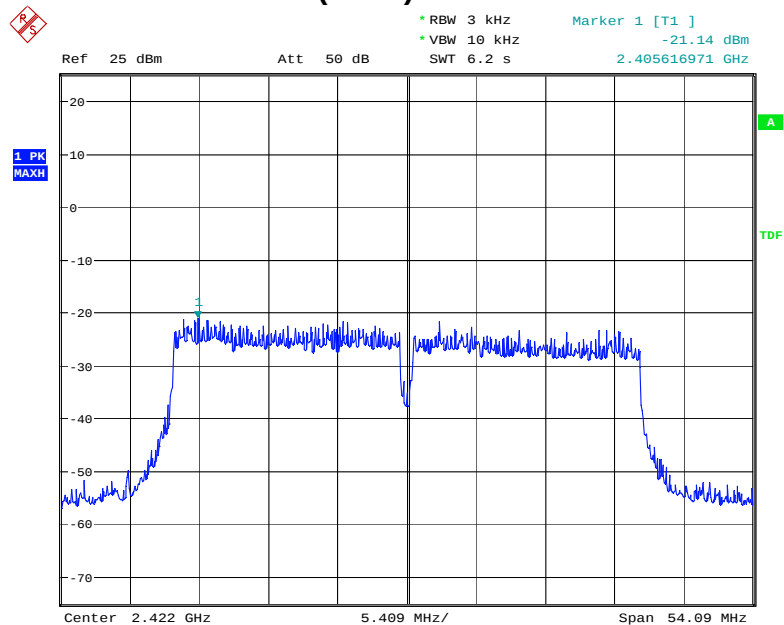


Date: 9.OCT.2014 14:56:24

802.11n(HT40) Middle Channel

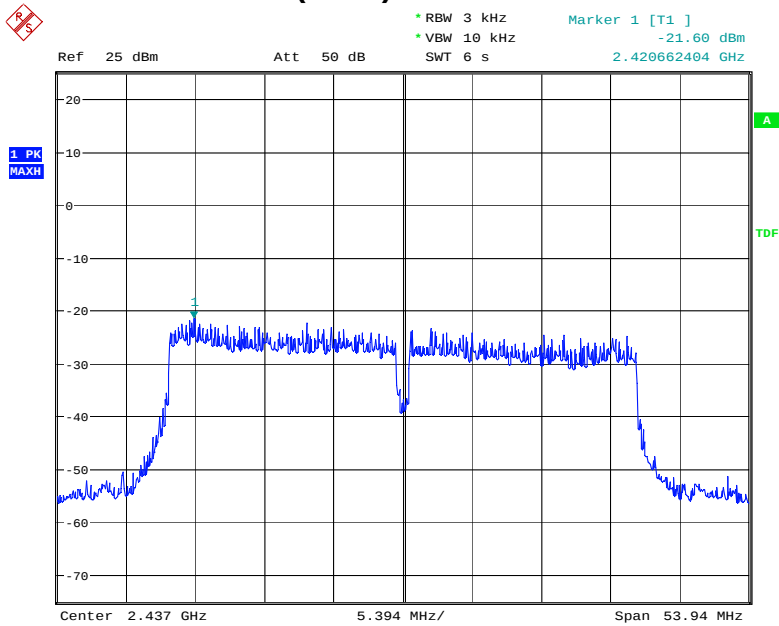

Date: 9.OCT.2014 14:59:07

802.11n(HT40) High Channel

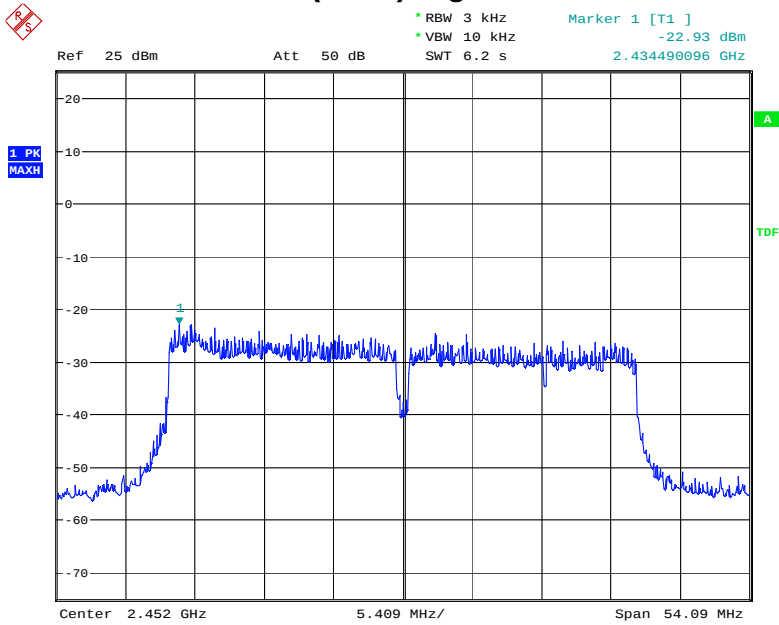

Date: 9.OCT.2014 14:57:58

7. Band Edge and Conducted Spurious Emissions

7.1 Requirement and Measurement Procedure

Out of Band Conducted Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. The resolution bandwidth is set to 100KHz, and the video bandwidth set to 300KHz.


A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

- 1.The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300KHz for Quasi-peak detection at frequency below 1GHz.
- 2.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
- 3.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for average detection(AV) at below at frequency above 1GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Results

The test plots showed that all spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband. Please refer to below tables and plots.


Spurious Emission in restricted band:

Operation Mode:	TX	Test Date :	October 09, 2014
Frequency Range:	Above 1GHz	Temperature :	26 °C
Test Result:	PASS	Humidity :	50 %
Measured Distance:	3m	Test By:	Sance

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
	H/V	PK	AV	PK	AV	PK	AV
Test Mode: 802.11b							
2399.370	H	62.88	45.47	74.00	54.00	-11.12	-8.53
2399.250	V	61.03	44.16	74.00	54.00	-12.97	-9.84
2484.650	H	55.65	40.22	74.00	54.00	-18.35	-13.78
2484.710	V	52.17	40.06	74.00	54.00	-21.83	-13.94
Test Mode: 802.11g							
2395.430	H	60.11	42.09	74.00	54.00	-13.89	-11.91
2395.460	V	60.37	42.57	74.00	54.00	-13.63	-11.43
2483.750	H	50.59	38.32	74.00	54.00	-23.41	-15.68
2484.010	V	50.12	40.33	74.00	54.00	-23.88	-13.67
Test Mode: 802.11n(HT20)							
2398.720	H	58.19	47.10	74.00	54.00	-15.81	-6.90
2395.510	V	58.70	45.12	74.00	54.00	-15.30	-8.88
2485.560	H	50.21	41.32	74.00	54.00	-23.79	-12.68
2485.630	V	50.58	42.13	74.00	54.00	-23.42	-11.87
Test Mode: 802.11n(HT40)							
2398.660	H	56.52	43.15	74.00	54.00	-17.48	-10.85
2398.280	V	57.06	43.26	74.00	54.00	-16.94	-10.74
2485.500	H	49.77	41.08	74.00	54.00	-24.23	-12.92
2485.760	V	48.76	41.54	74.00	54.00	-25.24	-12.46


Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Band Edge
802.11b Low Channel

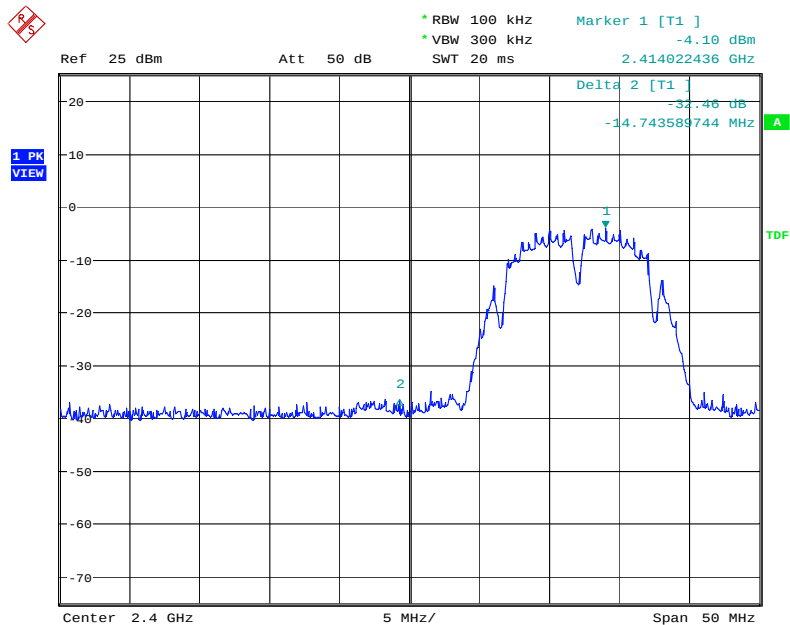


Date: 9.OCT.2014 13:30:56

802.11b High Channel

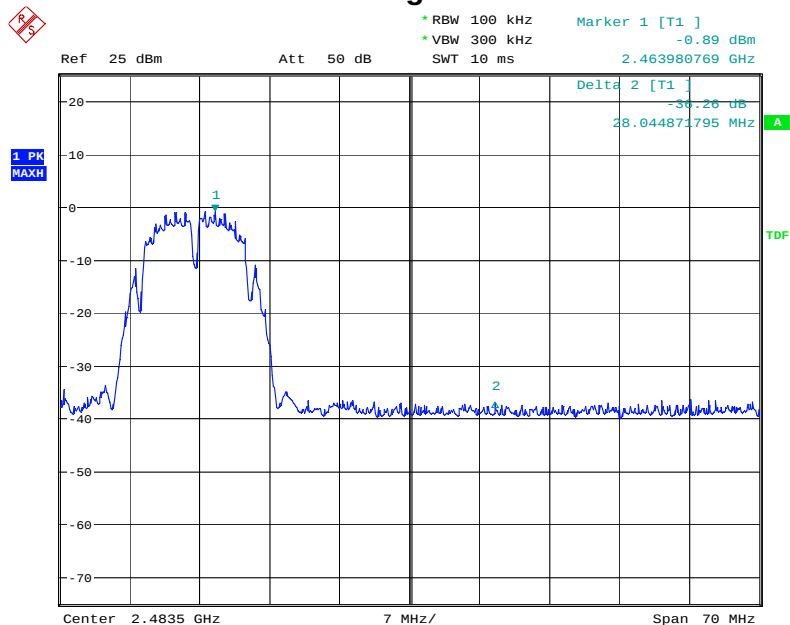


Date: 9.OCT.2014 13:31:30

802.11g Low Channel

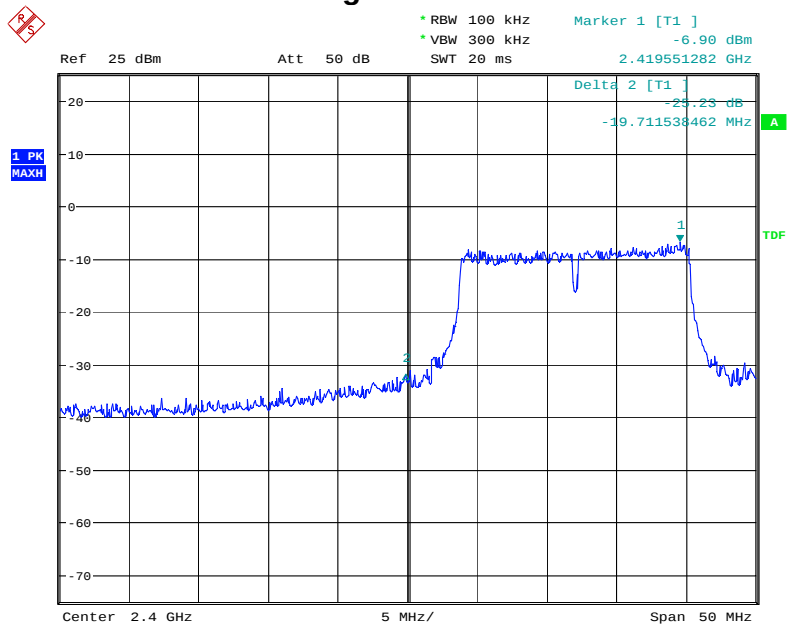


Date: 9.OCT.2014 13:32:24

802.11g High Channel

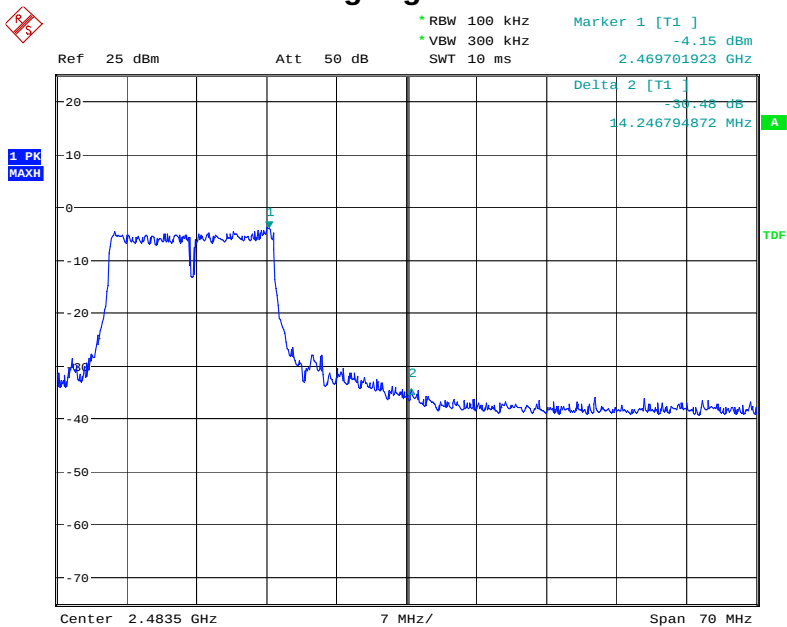


Date: 9.OCT.2014 13:33:07

802.11n(HT20) Low Channel

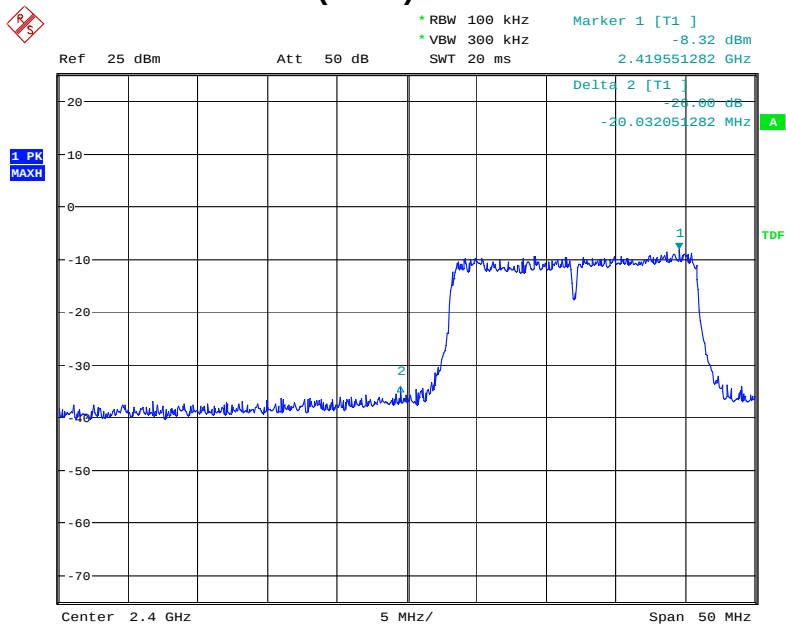


Date: 9.OCT.2014 13:33:44

802.11n(HT20) High Channel

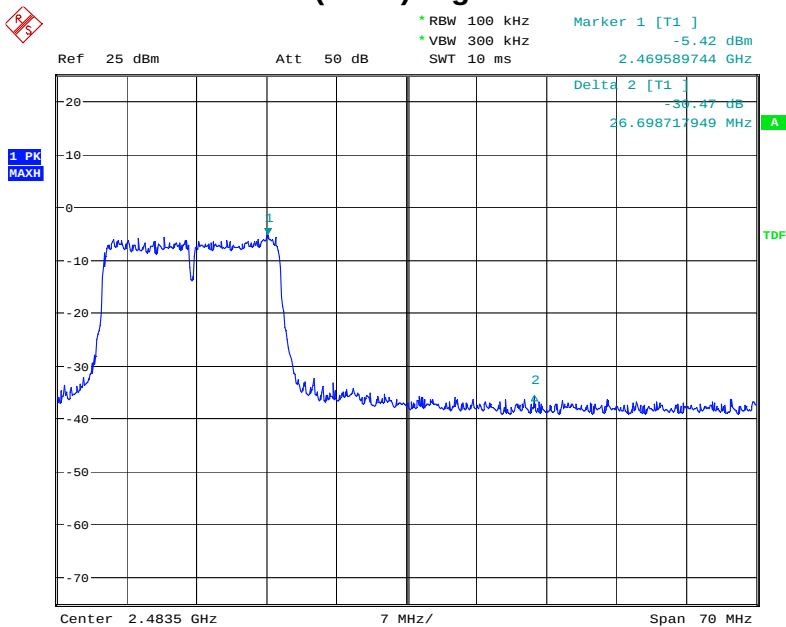


Date: 9.OCT.2014 13:34:39

802.11n(HT40) Low Channel

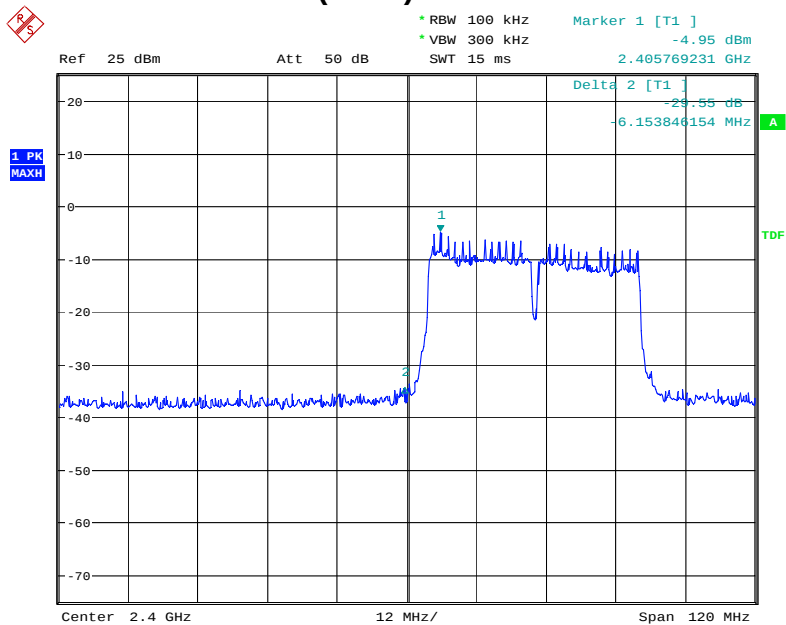

Date: 9.OCT.2014 15:06:16


802.11n(HT40) High Channel

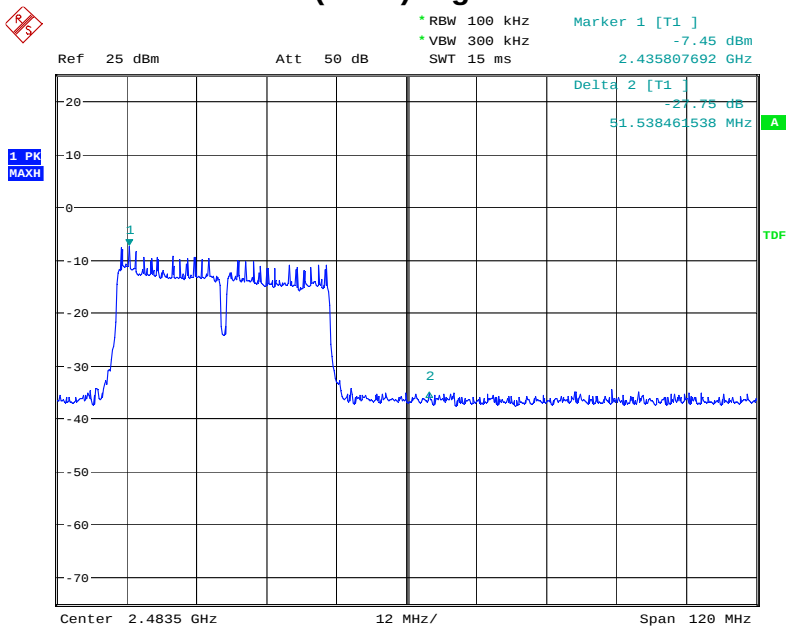

Date: 9.OCT.2014 15:05:43


Conducted Spurious Emissions

The worst case: 802.11b
Low Channel

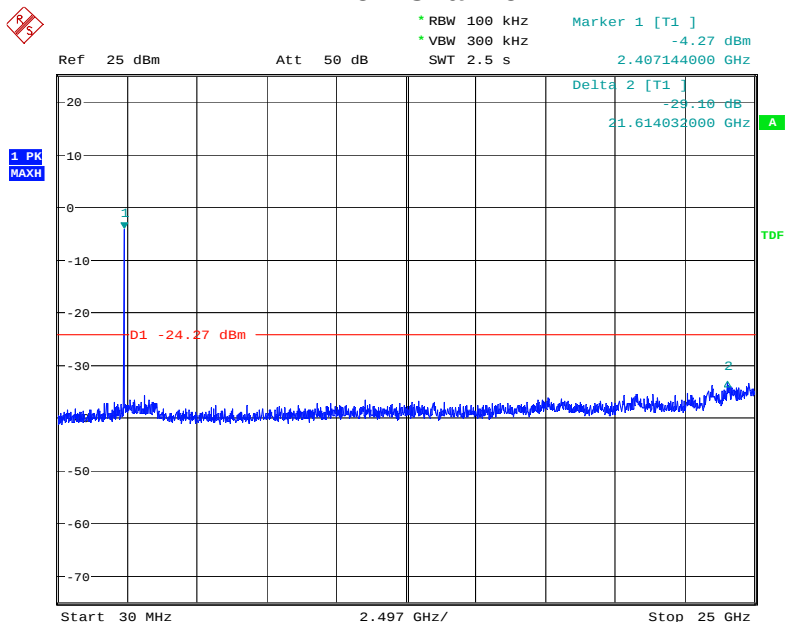


Date: 9.OCT.2014 13:20:35

Middle Channel

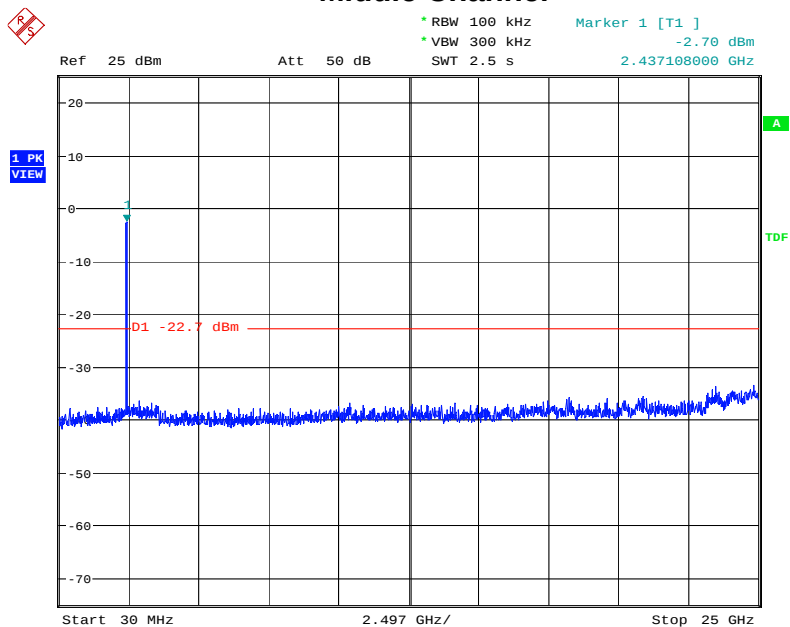

Date: 9.OCT.2014 13:21:26

High Channel

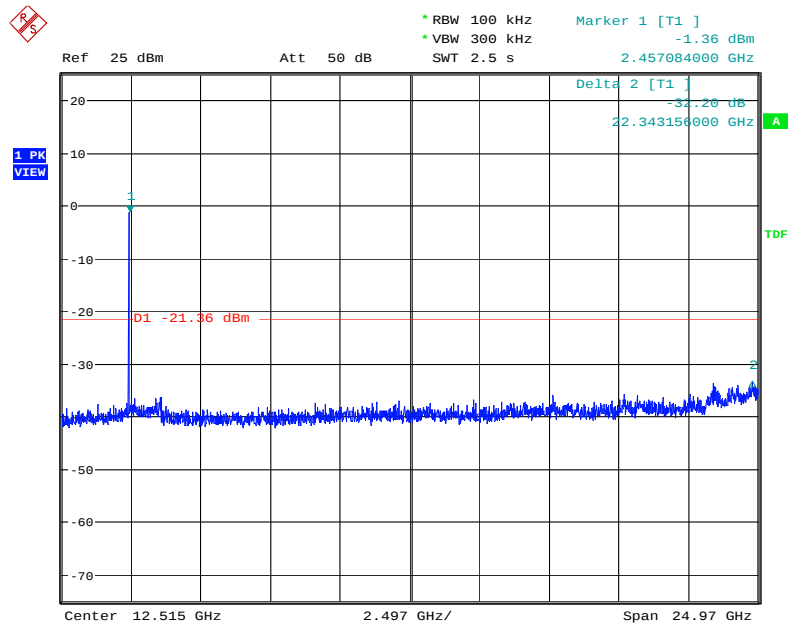


Date: 9.OCT.2014 13:22:02


8. Radiated Spurious Emissions and Restricted Bands

8.1 Test SET-UP (Block Diagram of Configuration)

8.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

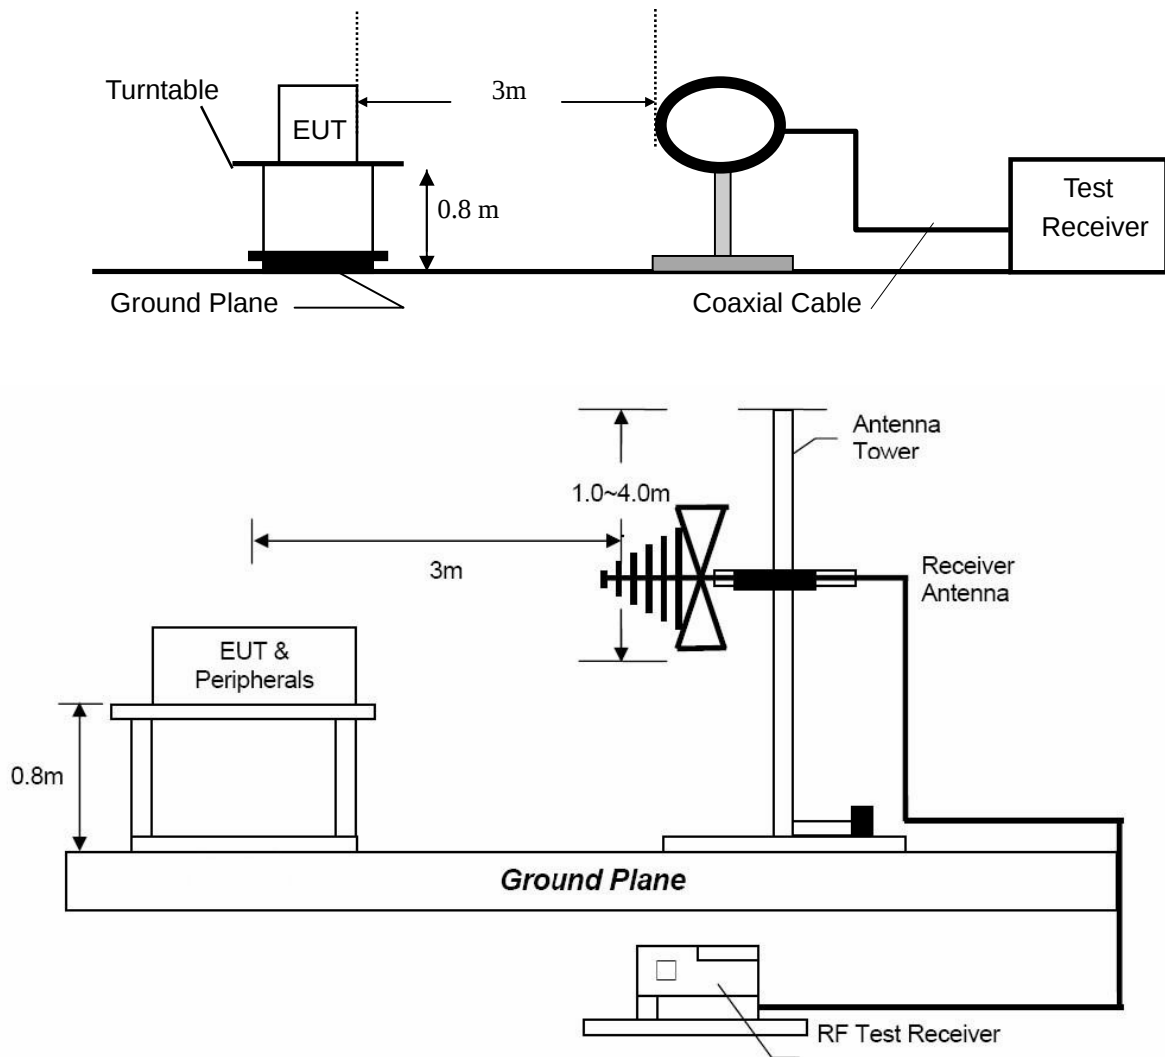

8.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

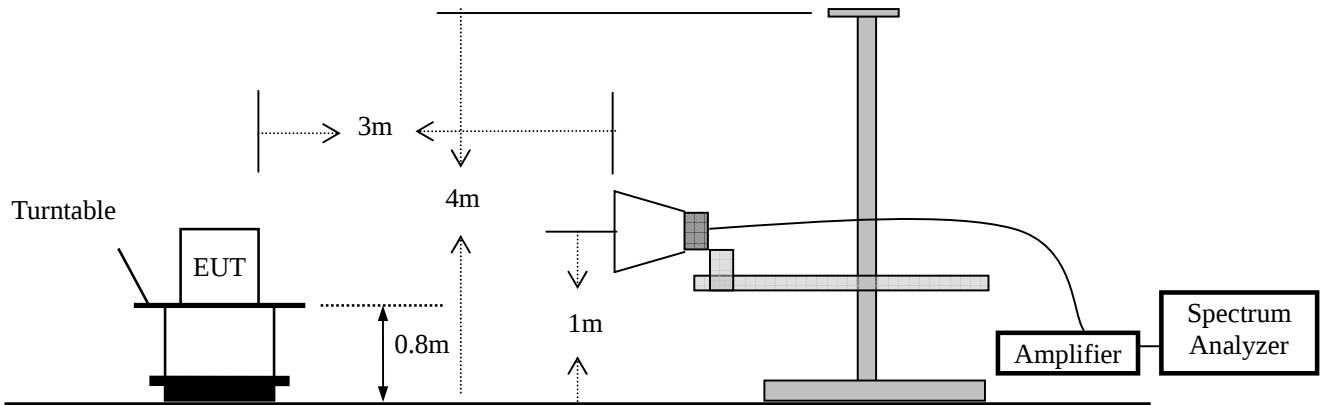

8.2 Measurement Procedure

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.
 - The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300KHz for Quasi-peak detection at frequency below 1GHz.
 - The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
 - The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for average detection(AV) at below at frequency above 1GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

8.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark : (1) Emission level (dB) μV = 20 log Emission level $\mu\text{V/m}$
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
(4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
(5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

8.4 Measurement Results

Test Mode: 802.11b(the worst case)
 Frequency Range: Below 1GHz Temperature : 24 °C
 Test Result: PASS Humidity : 56 %
 Measured Distance: 3m Test By: Sance
 Test Date : September 02, 2014


Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
131.8500	H	30.10	43.50	-13.40	QP
400.5400	H	35.20	46.00	-10.80	QP

30.0000	V	29.60	40.00	-10.40	QP
71.7100	V	26.40	40.00	-13.60	QP
123.1200	V	28.30	43.50	-15.20	QP
181.3200	V	26.70	43.50	-16.80	QP
400.0200	V	39.30	46.00	-6.70	QP

- Note:**
- (1) Emission Level= Reading Level + Factor
 - (2) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (3) Measurement uncertainty : $\pm 3.4\text{dB}$
 - (4) Loop antenna used for the emission below 30MHz.
 - (5) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.


Horizontal

80.0 dBuV/m

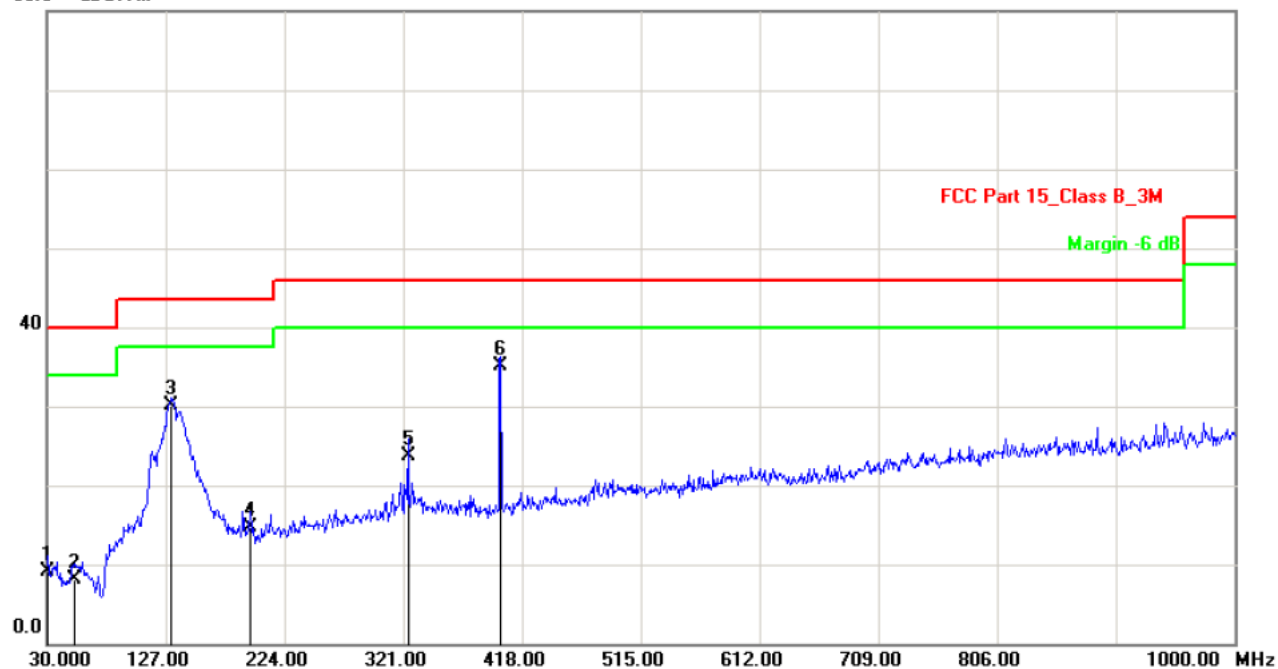

Vertical

80.0 dBuV/m

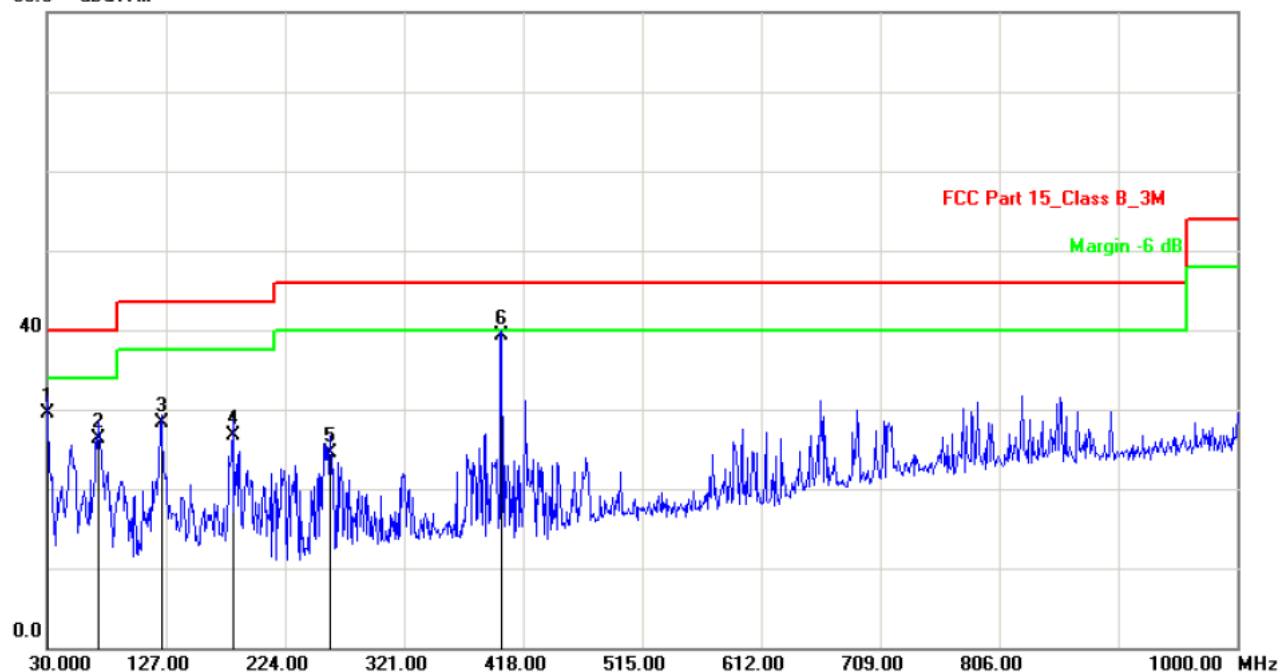

Test Mode: 802.11b Test Date : October 09, 2014
Frequency Range: Above 1GHz Temperature : 24℃
Test Result: PASS Humidity : 56 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
	H/V	PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4824	V	62.06	48.74	74.00	54.00	-11.94	-5.26
7236	V	53.15	42.50	74.00	54.00	-20.85	-11.50

4824	H	64.12	48.02	74.00	54.00	-9.88	-5.98
7236	H	55.77	42.13	74.00	54.00	-18.23	-11.87

Operation Mode: TX Mode (Mid)							
4874	V	62.14	48.66	74.00	54.00	-11.86	-5.34
7311	V	55.81	42.04	74.00	54.00	-18.19	-11.96

4874	H	62.60	48.11	74.00	54.00	-11.40	-5.89
7311	H	55.04	42.48	74.00	54.00	-18.96	-11.52

Operation Mode: TX Mode (High)							
4924	V	60.12	46.77	74.00	54.00	-13.88	-7.23
7386	V	52.81	42.10	74.00	54.00	-21.19	-11.90

4924	H	62.86	46.78	74.00	54.00	-11.14	-7.22
7386	H	52.70	42.56	74.00	54.00	-21.30	-11.44

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : $\pm 3.7\text{dB}$.
 - (6) Horn antenna used for the emission over 1000MHz.

Test Mode:	802.11g	Test Date :	October 09, 2014
Frequency Range:	Above 1GHz	Temperature :	24℃
Test Result:	PASS	Humidity :	56 %
Measured Distance:	3m	Test By:	Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4824	V	58.11	40.33	74.00	54.00	-15.89	-13.67
7236	V	56.34	40.26	74.00	54.00	-17.66	-13.74

4824	H	60.12	41.70	74.00	54.00	-13.88	-12.30
7236	H	60.83	42.14	74.00	54.00	-13.17	-11.86

Operation Mode: TX Mode (Mid)							
4874	V	61.11	42.55	74.00	54.00	-12.89	-11.45
7311	V	63.71	40.42	74.00	54.00	-10.29	-13.58

4874	H	62.96	40.66	74.00	54.00	-11.04	-13.34
7311	H	60.09	40.79	74.00	54.00	-13.91	-13.21

Operation Mode: TX Mode (High)							
4924	V	62.03	42.13	74.00	54.00	-11.97	-11.87
7386	V	62.10	42.04	74.00	54.00	-11.90	-11.96

4924	H	61.01	41.29	74.00	54.00	-12.99	-12.71
7386	H	61.58	42.33	74.00	54.00	-12.42	-11.67

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : $\pm 3.7\text{dB}$.
 - (6) Horn antenna used for the emission over 1000MHz.

Test Mode: 802.11n(HT20) Test Date : October 09, 2014
Frequency Range: Above 1GHz Temperature : 24°C
Test Result: PASS Humidity : 56 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4824	V	54.19	42.25	74.00	54.00	-19.81	-11.75
7236	V	55.42	42.09	74.00	54.00	-18.58	-11.91

4824	H	57.12	43.37	74.00	54.00	-16.88	-10.63
7236	H	56.32	42.11	74.00	54.00	-17.68	-11.89

Operation Mode: TX Mode (Mid)							
4874	V	60.82	43.09	74.00	54.00	-13.18	-10.91
7311	V	62.13	42.78	74.00	54.00	-11.87	-11.22

4874	H	55.14	40.40	74.00	54.00	-18.86	-13.60
7311	H	55.58	40.16	74.00	54.00	-18.42	-13.84

Operation Mode: TX Mode (High)							
4924	V	55.13	42.54	74.00	54.00	-18.87	-11.46
7386	V	58.33	42.00	74.00	54.00	-15.67	-12.00

4924	H	58.27	44.20	74.00	54.00	-15.73	-9.80
7386	H	57.09	42.52	74.00	54.00	-16.91	-11.48

- Not e:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : $\pm 3.7\text{dB}$.
 - (6) Horn antenna used for the emission over 1000MHz.

Test Mode: 802.11n(HT40) Test Date : October 09, 2014
Frequency Range: Above 1GHz Temperature : 24°C
Test Result: PASS Humidity : 56 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4844	V	53.18	40.27	74.00	54.00	-20.82	-13.73
7266	V	55.20	38.25	74.00	54.00	-18.80	-15.75

4844	H	52.14	37.20	74.00	54.00	-21.86	-16.80
7266	H	56.26	40.19	74.00	54.00	-17.74	-13.81

Operation Mode: TX Mode (Mid)							
4874	V	58.27	40.17	74.00	54.00	-15.73	-13.83
7311	V	55.13	40.77	74.00	54.00	-18.87	-13.23

4874	H	57.13	40.13	74.00	54.00	-16.87	-13.87
7311	H	55.37	38.52	74.00	54.00	-18.63	-15.48

Operation Mode: TX Mode (High)							
4904	V	56.49	39.41	74.00	54.00	-17.51	-14.59
7356	V	53.45	39.45	74.00	54.00	-20.55	-14.55

4904	H	55.21	41.28	74.00	54.00	-18.79	-12.72
7356	H	55.85	40.13	74.00	54.00	-18.15	-13.87

- Not e:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : $\pm 3.7\text{dB}$.
 - (6) Horn antenna used for the emission over 1000MHz.

9. Antenna Application

9.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

9.2 Measurement Results

The antenna is PCB antenna that no antenna other than that furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 3dBi, So, the antenna is consider meet the requirement.

10. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Nov. 25, 2013	Nov. 24, 2014
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Nov. 28, 2013	Nov. 27, 2014
Positioning Controller	UC	UC 3000	N/A	0~360° , 1-4m	N/A	N/A
Color Monitor	SUNSPO	SP-140A	N/A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	32A	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	200A	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	200A	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Nov. 09, 2013	Nov. 08, 2014
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Nov. 09, 2013	Nov. 08, 2014
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Nov. 09, 2013	Nov. 08, 2014
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	15GHz~26.5GHz	Oct.24, 2013	Oct.23, 2014
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Nov. 07, 2013	Nov. 06, 2014
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Oct.11, 2013	Oct.10, 2014
Spectrum Analyzer	Agilent	E4408B	MY414407D	9KHz~26.5GHz	Nov. 05, 2013	Nov. 04, 2014
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Nov. 05, 2013	Nov. 04, 2014
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Nov. 09, 2013	Nov. 08, 2014

---End of report---