

# FCC Test Report

**FCC ID** : SQG-WB50NBT  
**Equipment** : Wireless 802.11abgn + BT4.1 intelligent module  
**Model No.** : WB50NBT  
**Brand Name** : Laird Technologies  
**Applicant** : Laird Technologies  
**Address** : W66N220 Commerce Court, Cedarburg, Wisconsin 53012, USA  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Dec. 30, 2015  
**Tested Date** : Mar. 11 ~ Mar. 31, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

  
\_\_\_\_\_  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	7
1.3	Test Setup Chart .....	7
1.4	Test Equipment List and Calibration Data.....	8
1.5	Test Standards .....	9
1.6	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>10</b>
2.1	Testing Condition .....	10
2.2	The Worst Test Modes and Channel Details .....	10
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>11</b>
3.1	Conducted Emissions.....	11
3.2	6dB and Occupied Bandwidth .....	14
3.3	RF Output Power .....	16
3.4	Power Spectral Density .....	18
3.5	Emissions in Restricted Frequency Bands.....	20
3.6	Emissions in non-restricted Frequency Bands .....	46
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>49</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR631002AE	Rev. 01	Initial issue	Apr. 15, 2016
FR631002AE	Rev. 02	Modified address of applicant.	May 03, 2016

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 19.428MHz 24.79 (Margin -25.21dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 38.73MHz 36.99 (Margin -3.01dB) - QP	Pass
15.247(b)(3)	Maximum Output Power	Power [dBm]: 6.03	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	V4.1 LE	2402-2480	0-39 [40]	1 Mbps

Note 1: Bluetooth LE (Low energy) uses GFSK modulation.

### 1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)				
				2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
1	Laird MAF94051	Dipole	RP-SMA	2.1	2.4	2.6	3.4	3.4
2	Laird NanoBlade-IP04	PCB Dipole	IPEX MHF	2	3.9	3.9	4	4
3	Laird MAF95310 Mini NanoBlade Flex	PCB Dipole	IPEX MHF	2.79	3.38	3.38	3.38	3.38
4	Laird NanoBlue-IP04	PCB Dipole	IPEX MHF	2	---	---	---	---
5	Ethertronics WLAN_1000146	Isolated Magnetic Dipole	IPEX MHF	2.5	3.5	3.5	3.5	3.5

**Note:** Ant. No. 1, 3 & 5 were for 2.4G final test.

Ant. No. 1, 2 & 5 were for 5G final test.

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	3.3Vdc from host
--------------------------	------------------

### 1.1.4 Accessories

N/A

### 1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

### 1.1.6 Test Tool and Duty Cycle

Test tool	CSR BlueSuite, V2.5.8
Duty cycle of test signal (%)	66.82%
Duty Factor (dB)	1.75

### 1.1.7 Power Setting


Modulation Mode	Test Frequency (MHz)		
	2402	2440	2480
GFSK/1Mbps	Default	Default	Default

## 1.2 Local Support Equipment List

Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)
1	DC Power Supply	GW INSTEK	GPC-3060D	EM884797	---	---
2	Notebook	DELL	Latitude E6430	9ZFB4X1	DoC	---
3	Fixture	---	---	---	---	---

Note: Fixture is provided by applicant.

## 1.3 Test Setup Chart

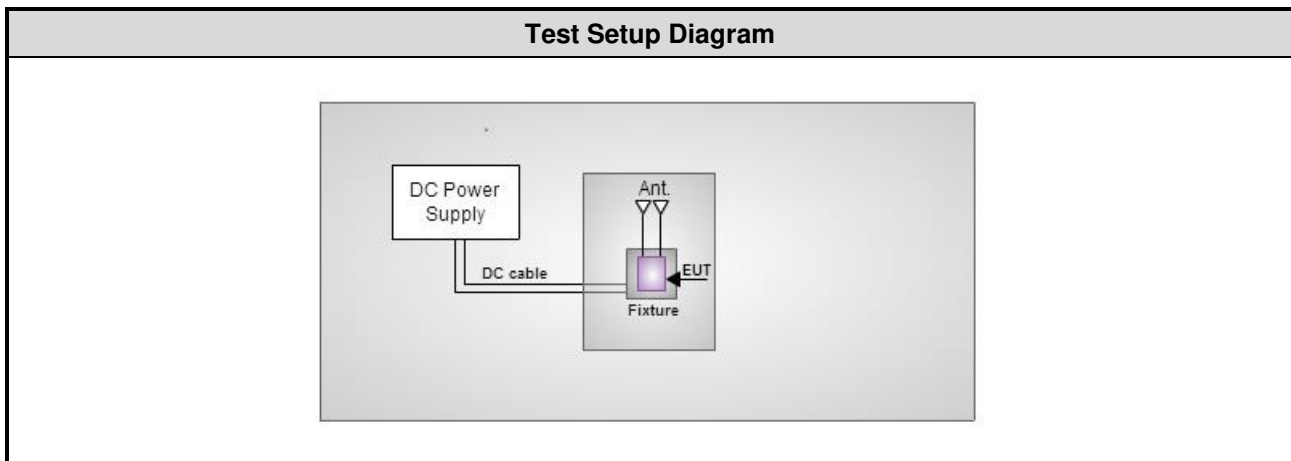

Note: The support notebook was disconnected from EUT and removed from test table when EUT is set to transmit continuously.

## 1.4 Test Equipment List and Calibration Data

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	Mar. 31, 2016				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
EMC Receiver	R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 21, 2015	Dec. 20, 2016
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber 3 / (03CH03-WS)				
<b>Tested Date</b>	Mar. 11 ~ Mar. 21, 2016				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	Agilent	N9010A	MY53400091	Sep. 14, 2015	Sep. 13, 2016
Receiver	Agilent	N9038A	MY53290044	Oct. 14, 2015	Oct. 13, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-563	Dec. 29, 2015	Dec. 28, 2016
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 24, 2016	Feb. 23, 2017
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2015	Nov. 03, 2016
Preamplifier	EMC	EMC02325	980187	Sep. 21, 2015	Sep. 20, 2016
Preamplifier	Agilent	83017A	MY53270014	Sep. 07, 2015	Sep. 06, 2016
Preamplifier	EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 05, 2016	Feb. 04, 2017
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22600/4	Feb. 05, 2016	Feb. 04, 2017
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 05, 2016	Feb. 04, 2017
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Feb. 05, 2016	Feb. 04, 2017
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Feb. 05, 2016	Feb. 04, 2017
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Feb. 05, 2016	Feb. 04, 2017
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					



<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	Mar. 28, 2016				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2016	Feb. 16, 2017
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016
DC POWER SOURCE	GW INSTEK	GPC-3060D	EM884797	Oct. 20, 2015	Oct. 19, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v03r04

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor  $k=2$ )

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	$\pm 34.134$ Hz
Conducted power	$\pm 0.808$ dB
Power density	$\pm 0.463$ dB
Conducted emission	$\pm 2.670$ dB
AC conducted emission	$\pm 2.90$ dB
Radiated emission $\leq 1$ GHz	$\pm 3.66$ dB
Radiated emission $> 1$ GHz	$\pm 5.37$ dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	20°C / 60%	Alex Tsai
Radiated Emissions	03CH03-WS	20°C / 64%	Aska Huang
RF Conducted	TH01-WS	20°C / 61%	Anderson Hung

➤ FCC site registration No.: 207696

➤ IC site registration No.: 10807C-1

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	BT LE	2440	1Mbps	2
Radiated Emissions ≤ 1GHz	BT LE	2440	1Mbps	1, 2, 3
Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1Mbps	1, 2, 3
Maximum Output Power	BT LE	2402, 2440, 2480	1Mbps	2
6dB bandwidth				
Power spectral density				

**NOTE:**

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.
2. The following antennas are used for final testing for this module: (See item 1.1.2 for more details.)
  - 1) Configuration 1 : Dipole antenna
  - 2) Configuration 2 : PCB Dipole antenna
  - 3) Configuration 3 : Isolated Magnetic Dipole antenna

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

#### 3.1.3 Test Setup

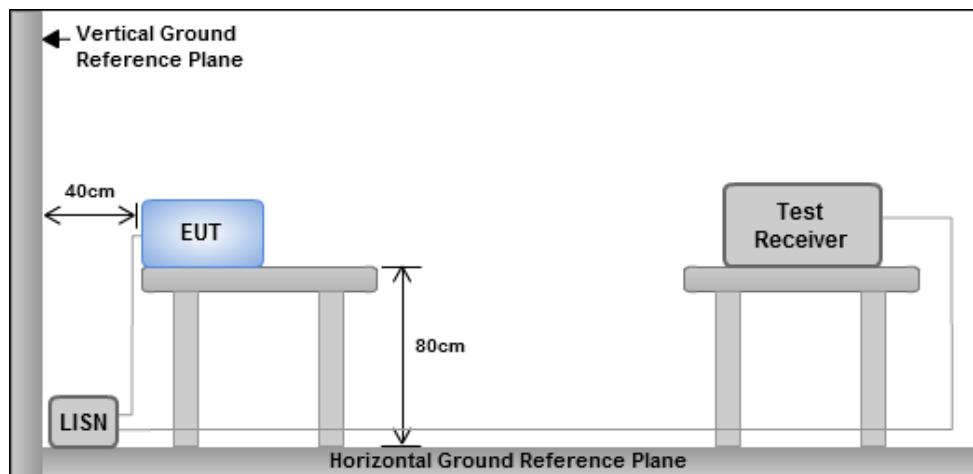


Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

<b>Modulation Mode</b>	GFSK	<b>Test Freq. (MHz)</b>	2440
<b>Power Phase</b>	Line		

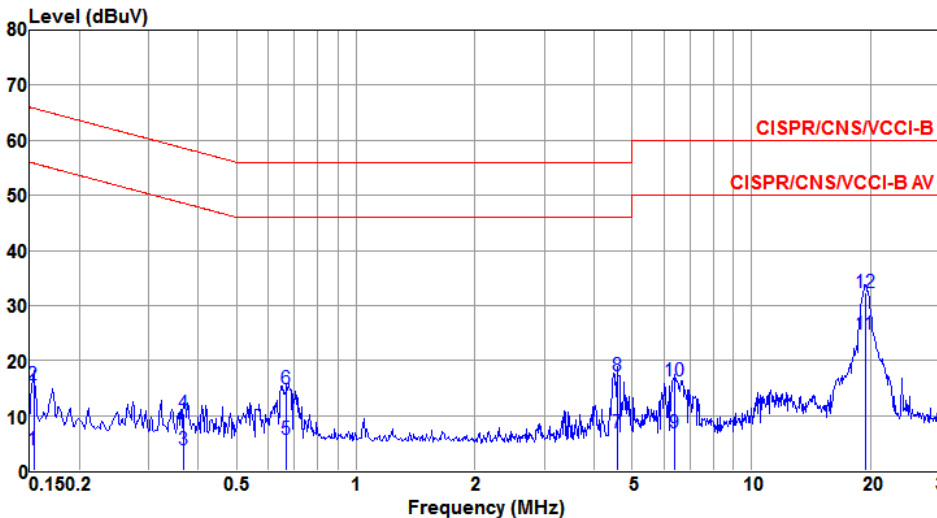


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.153	3.75	55.82	-52.07	3.62	0.11	0.02	Average
2	0.153	15.66	65.82	-50.16	15.53	0.11	0.02	QP
3	0.367	3.70	48.56	-44.86	3.54	0.13	0.03	Average
4	0.367	10.28	58.56	-48.28	10.12	0.13	0.03	QP
5	0.668	5.65	46.00	-40.35	5.47	0.13	0.05	Average
6	0.668	14.77	56.00	-41.23	14.59	0.13	0.05	QP
7	4.574	6.96	46.00	-39.04	6.63	0.20	0.13	Average
8	4.574	17.27	56.00	-38.73	16.94	0.20	0.13	QP
9	6.420	6.88	50.00	-43.12	6.52	0.22	0.14	Average
10	6.420	16.41	60.00	-43.59	16.05	0.22	0.14	QP
11@	19.428	24.79	50.00	-25.21	24.26	0.36	0.17	Average
12	19.428	32.39	60.00	-27.61	31.86	0.36	0.17	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

<b>Modulation Mode</b>	GFSK	<b>Test Freq. (MHz)</b>	2440
<b>Power Phase</b>	Neutral		

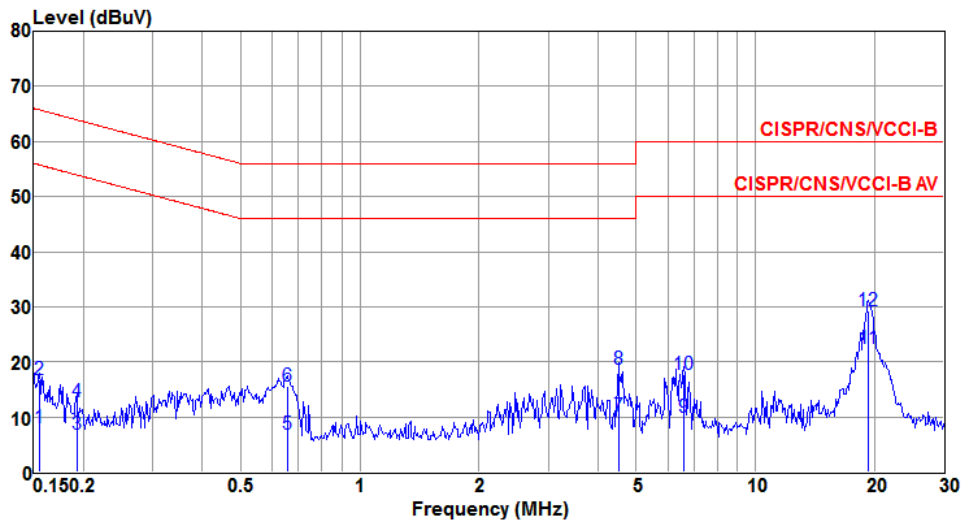

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.155	8.04	55.74	-47.70	7.89	0.13	0.02	Average
2	0.155	16.69	65.74	-49.05	16.54	0.13	0.02	QP
3	0.192	6.81	53.93	-47.12	6.69	0.10	0.02	Average
4	0.192	12.68	63.93	-51.25	12.56	0.10	0.02	QP
5	0.654	6.97	46.00	-39.03	6.79	0.13	0.05	Average
6	0.654	15.67	56.00	-40.33	15.49	0.13	0.05	QP
7	4.501	10.13	46.00	-35.87	9.83	0.18	0.12	Average
8	4.501	18.66	56.00	-37.34	18.36	0.18	0.12	QP
9	6.592	9.84	50.00	-40.16	9.48	0.22	0.14	Average
10	6.592	17.63	60.00	-42.37	17.27	0.22	0.14	QP
11@	19.326	22.46	50.00	-27.54	21.90	0.39	0.17	Average
12	19.326	29.38	60.00	-30.62	28.82	0.39	0.17	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 6dB and Occupied Bandwidth

### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

### 3.2.2 Test Procedures


#### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth


1. Set resolution bandwidth (RBW) = 30 kHz, Video bandwidth = 100 kHz.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

### 3.2.3 Test Setup



### 3.2.4 Test Result of 6dB and Occupied Bandwidth

Mode	Freq. (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit of 6dB Bandwidth (kHz)
BT LE	2402	0.691	1.03	500
BT LE	2440	0.691	1.03	500
BT LE	2480	0.691	1.04	500

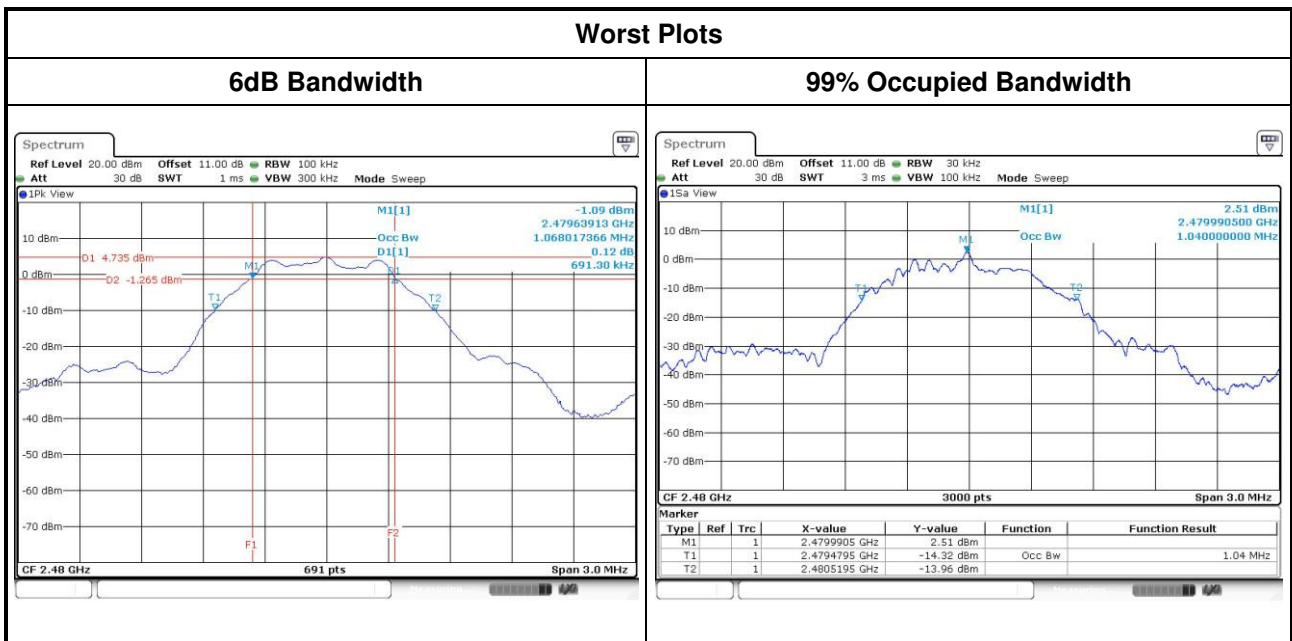

## 3.3 RF Output Power

### 3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.


- Antenna gain  $\leq$  6dBi, no any corresponding reduction is in output power limit.
- Antenna gain  $>$  6dBi
  - Non Fixed, point to point operations.  
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
  - Fixed, point to point operations  
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power

### 3.3.2 Test Procedures

- Maximum Peak Conducted Output Power
  - Spectrum analyzer**
    1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
    2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
    3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.
  - Power meter**
    1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Average Output Power ( For reference only)
  - Power meter**
    1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

### 3.3.3 Test Setup





### 3.3.4 Test Result of Maximum Output Power

Mode	Freq. (MHz)	Peak Power			Antenna gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
		Power (mW)	Power (dBm)	Limit (dBm)			
BT LE	2402	3.105	4.92	30	2.79	7.71	36
BT LE	2440	4.009	<b>6.03</b>	30	2.79	8.82	36
BT LE	2480	3.981	6.00	30	2.79	8.79	36

Mode	Freq. (MHz)	AV Power (mW)	AV Power (dBm)	Limit (dBm)
BT LE	2402	2.917	4.65	---
BT LE	2440	3.802	<b>5.80</b>	---
BT LE	2480	3.776	5.77	---

Note: Average power is for reference only

## 3.4 Power Spectral Density


### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

### 3.4.2 Test Procedures


- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
  1. Set the RBW = 3kHz, VBW = 10kHz.
  2. Detector = Peak, Sweep time = auto couple.
  3. Trace mode = max hold, allow trace to fully stabilize.
  4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
  1. Set the RBW = 100kHz, VBW = 300 kHz.
  2. Detector = RMS, Sweep time = auto couple.
  3. Perform the measurement over a single sweep.
  4. Use the peak marker function to determine the maximum amplitude level.

### 3.4.3 Test Setup



### 3.4.4 Test Result of Power Spectral Density

Mode	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
BT LE	2402	-11.59	8
BT LE	2440	-10.57	8
BT LE	2480	-10.68	8

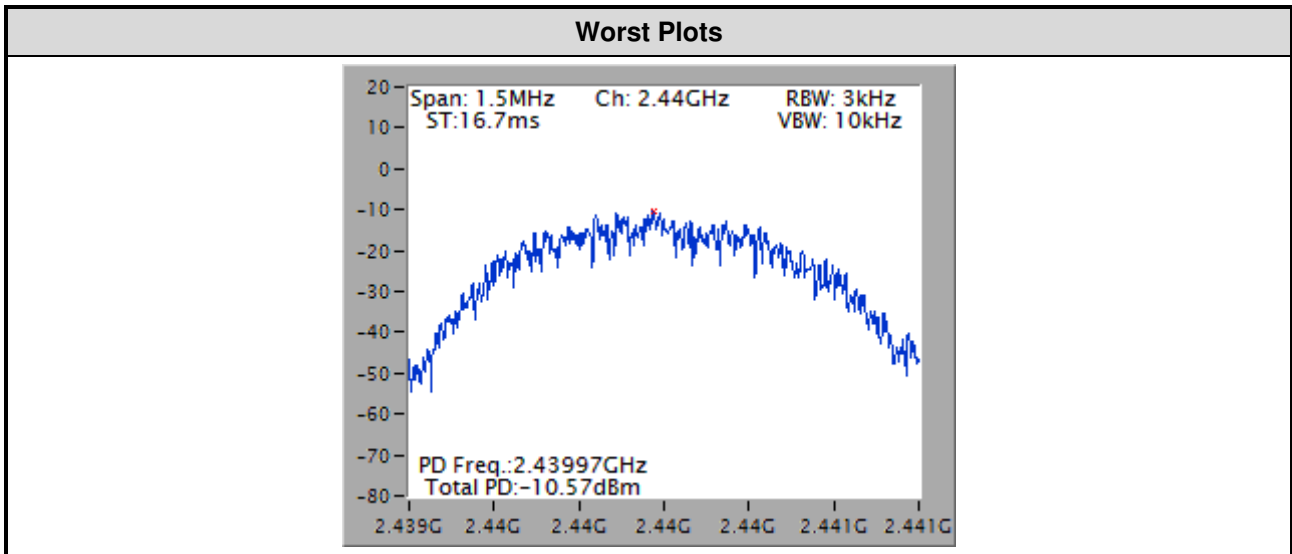

## 3.5 Emissions in Restricted Frequency Bands

### 3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
 Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
 Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup

#### Radiated Emissions below 1 GHz

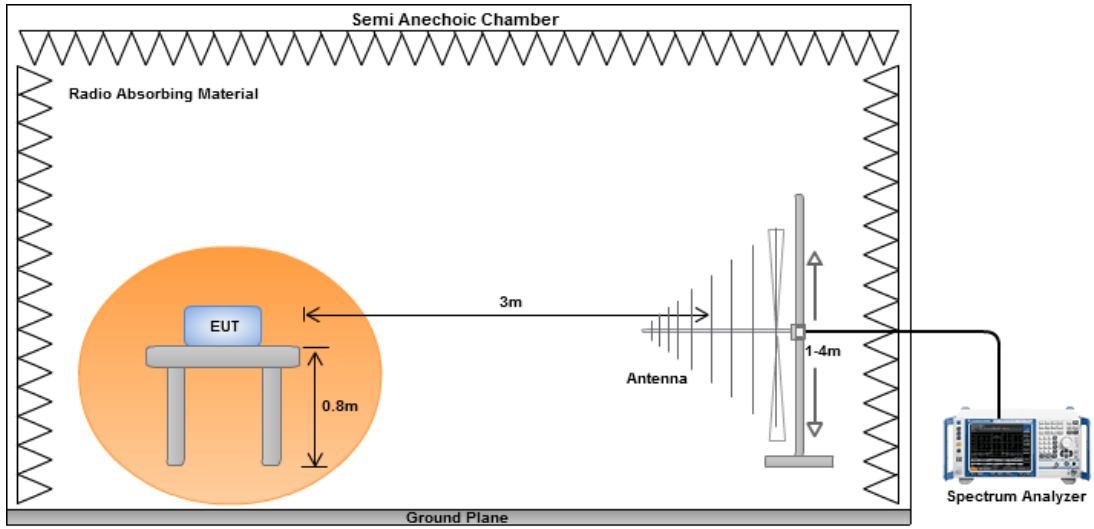


#### Radiated Emissions above 1 GHz

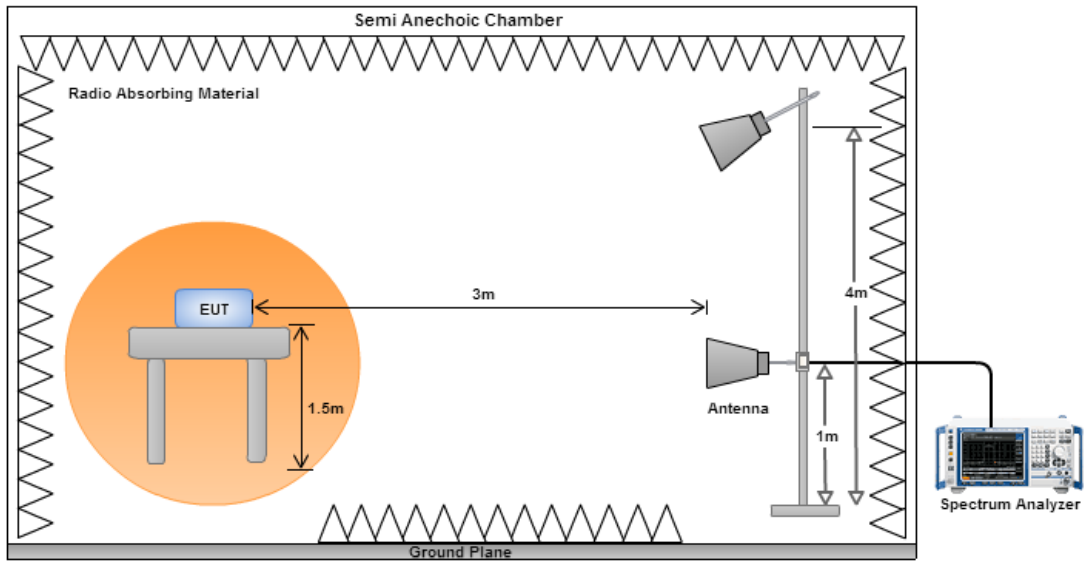

### Test Configuration 1: Dipole antenna

#### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	1

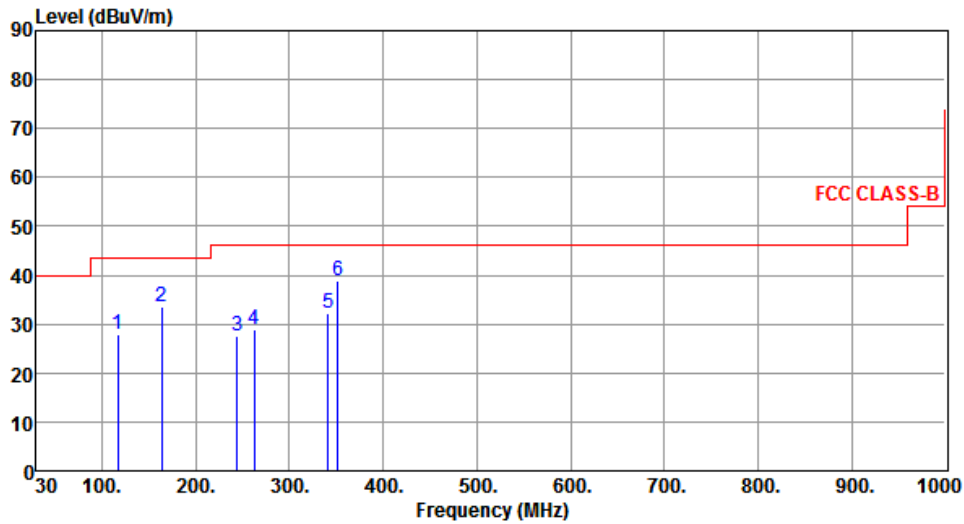

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	117.30	27.99	43.50	-15.51	43.85	-15.86	Peak	---	---
2	163.86	33.42	43.50	-10.08	46.94	-13.52	Peak	---	---
3	244.37	27.57	46.00	-18.43	42.21	-14.64	Peak	---	---
4	262.80	28.80	46.00	-17.20	42.85	-14.05	Peak	---	---
5	341.37	32.33	46.00	-13.67	44.02	-11.69	Peak	---	---
6	352.04	38.92	46.00	-7.08	50.33	-11.41	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	1

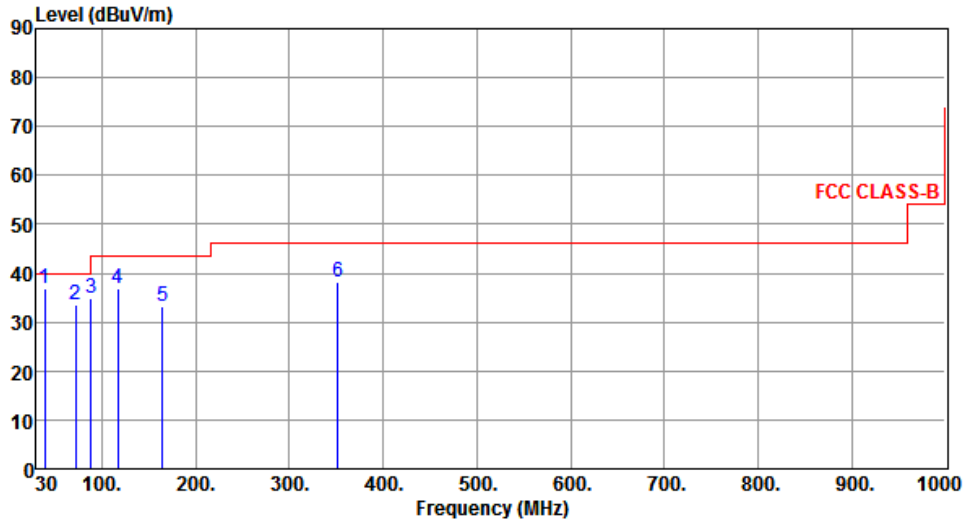

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.56	36.72	40.00	-3.28	50.19	-13.47	QP	100	5
2	71.71	33.49	40.00	-6.51	49.41	-15.92	Peak	---	---
3	88.20	34.86	43.50	-8.64	54.09	-19.23	Peak	---	---
4	117.30	36.99	43.50	-6.51	52.85	-15.86	Peak	---	---
5	164.83	33.08	43.50	-10.42	46.66	-13.58	Peak	---	---
6	352.04	38.24	46.00	-7.76	49.65	-11.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	1

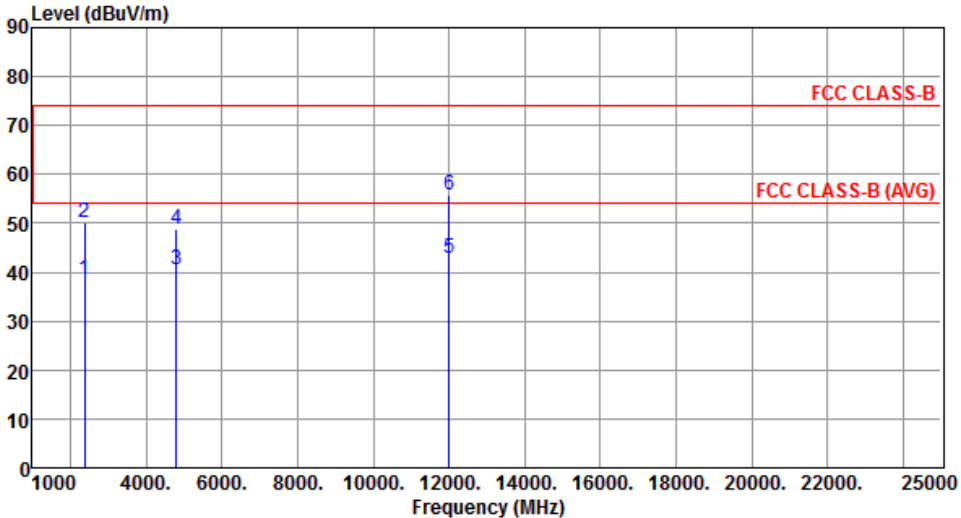


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.54	54.00	-15.46	39.64	-1.10	Average	100	238
2	2390.00	50.19	74.00	-23.81	51.29	-1.10	Peak	100	238
3	4804.00	40.55	54.00	-13.45	35.30	5.25	Average	207	8
4	4804.00	48.67	74.00	-25.33	43.42	5.25	Peak	207	8
5	12010.00	42.70	54.00	-11.30	27.63	15.07	Average	152	225
6	12010.00	55.76	74.00	-18.24	40.69	15.07	Peak	152	225

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	1

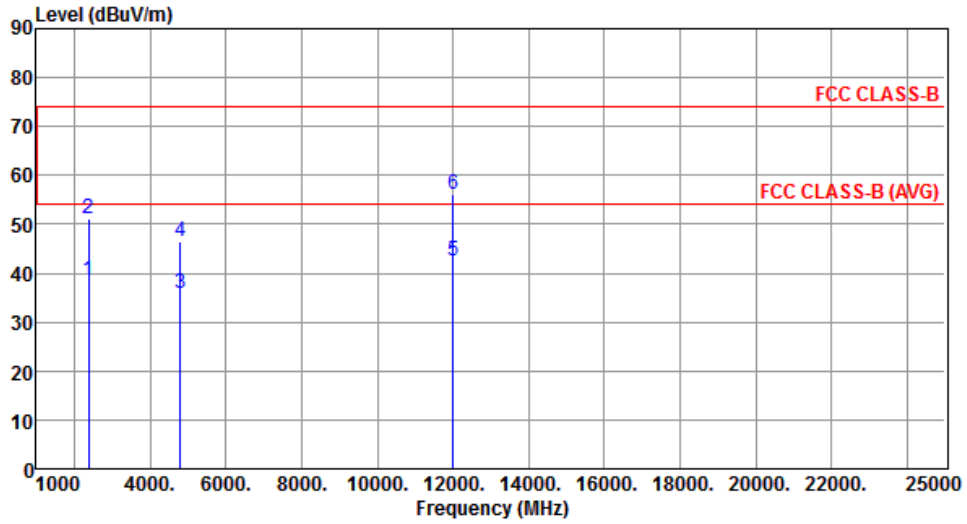


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.68	54.00	-15.32	39.78	-1.10	Average	164	179
2	2390.00	51.12	74.00	-22.88	52.22	-1.10	Peak	164	179
3	4804.00	35.74	54.00	-18.26	30.49	5.25	Average	153	267
4	4804.00	46.64	74.00	-27.36	41.39	5.25	Peak	153	267
5	12010.00	42.67	54.00	-11.33	27.60	15.07	Average	153	220
6	12010.00	56.19	74.00	-17.81	41.12	15.07	Peak	153	220

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	1

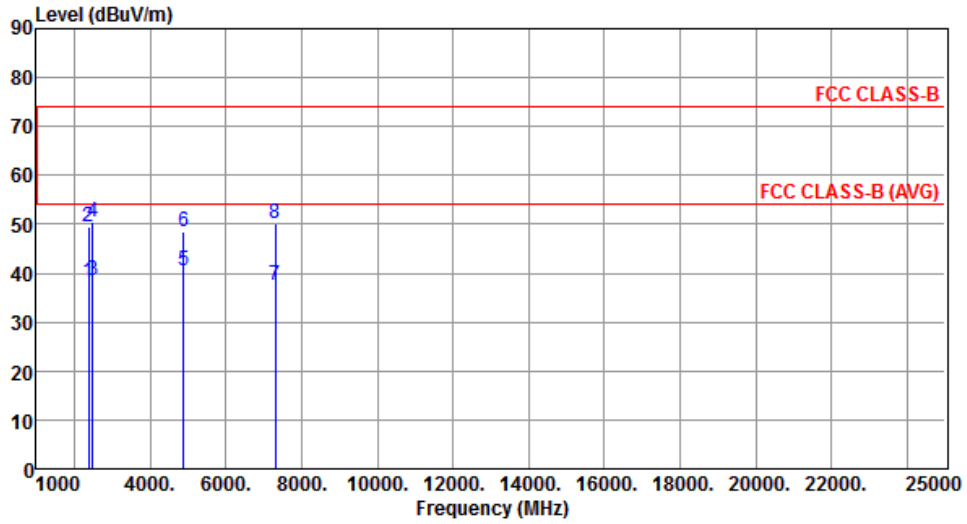


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.12	54.00	-15.88	39.22	-1.10	Average	100	235
2	2390.00	49.35	74.00	-24.65	50.45	-1.10	Peak	100	235
3	2483.50	38.46	54.00	-15.54	39.07	-0.61	Average	100	235
4	2483.50	50.59	74.00	-23.41	51.20	-0.61	Peak	100	235
5	4880.00	40.55	54.00	-13.45	35.12	5.43	Average	150	11
6	4880.00	48.55	74.00	-25.45	43.12	5.43	Peak	150	11
7	7320.00	37.59	54.00	-16.41	27.32	10.27	Average	100	156
8	7320.00	50.03	74.00	-23.97	39.76	10.27	Peak	100	156

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	1

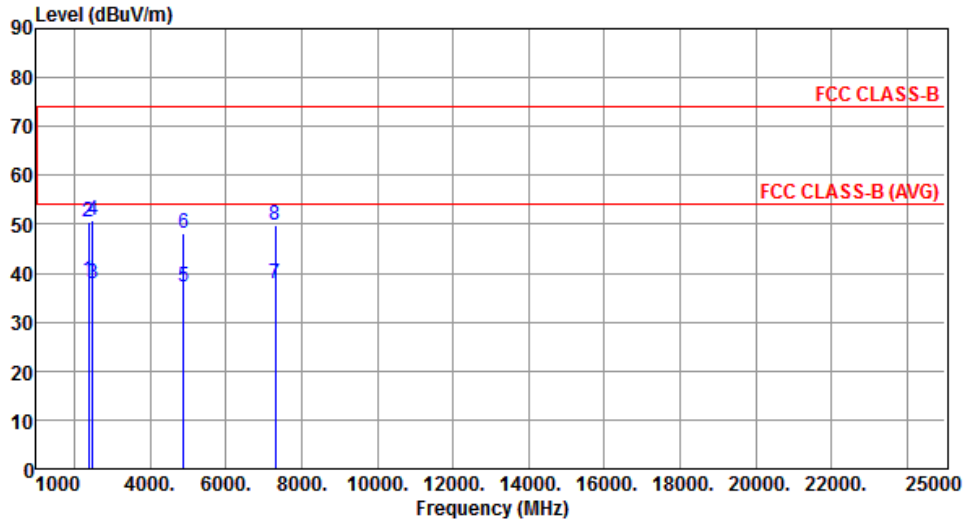


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.51	54.00	-15.49	39.61	-1.10	Average	149	191
2	2390.00	50.46	74.00	-23.54	51.56	-1.10	Peak	149	191
3	2483.50	37.87	54.00	-16.13	38.48	-0.61	Average	149	191
4	2483.50	50.87	74.00	-23.13	51.48	-0.61	Peak	149	191
5	4880.00	37.29	54.00	-16.71	31.86	5.43	Average	100	163
6	4880.00	48.06	74.00	-25.94	42.63	5.43	Peak	100	163
7	7320.00	37.89	54.00	-16.11	27.62	10.27	Average	100	147
8	7320.00	49.71	74.00	-24.29	39.44	10.27	Peak	100	147

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	1

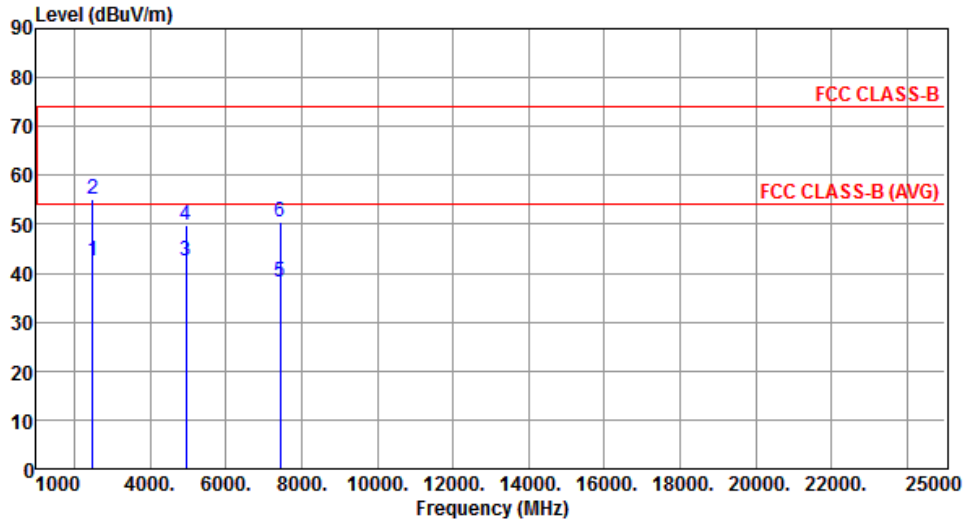


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	42.57	54.00	-11.43	43.18	-0.61	Average	190	236
2	2483.50	55.13	74.00	-18.87	55.74	-0.61	Peak	190	236
3	4960.00	42.52	54.00	-11.48	36.90	5.62	Average	177	12
4	4960.00	49.82	74.00	-24.18	44.20	5.62	Peak	177	12
5	7440.00	38.08	54.00	-15.92	27.52	10.56	Average	185	20
6	7440.00	50.58	74.00	-23.42	40.02	10.56	Peak	185	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	1

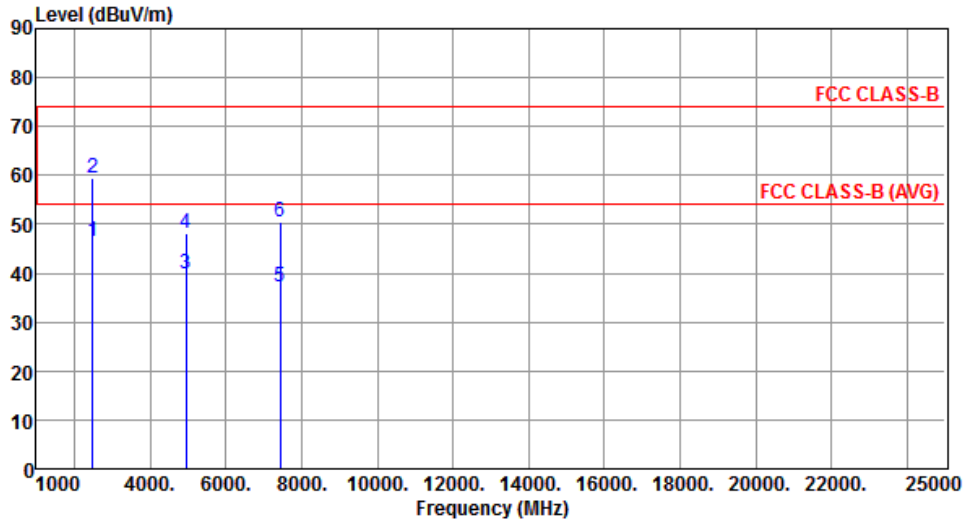

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	46.60	54.00	-7.40	47.21	-0.61	Average	165	194
2	2483.50	59.49	74.00	-14.51	60.10	-0.61	Peak	165	194
3	4960.00	40.00	54.00	-14.00	34.38	5.62	Average	197	26
4	4960.00	48.00	74.00	-26.00	42.38	5.62	Peak	197	26
5	7440.00	37.19	54.00	-16.81	26.63	10.56	Average	177	20
6	7440.00	50.42	74.00	-23.58	39.86	10.56	Peak	177	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### Test Configuration 2: PCB Dipole antenna

#### 3.5.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	2

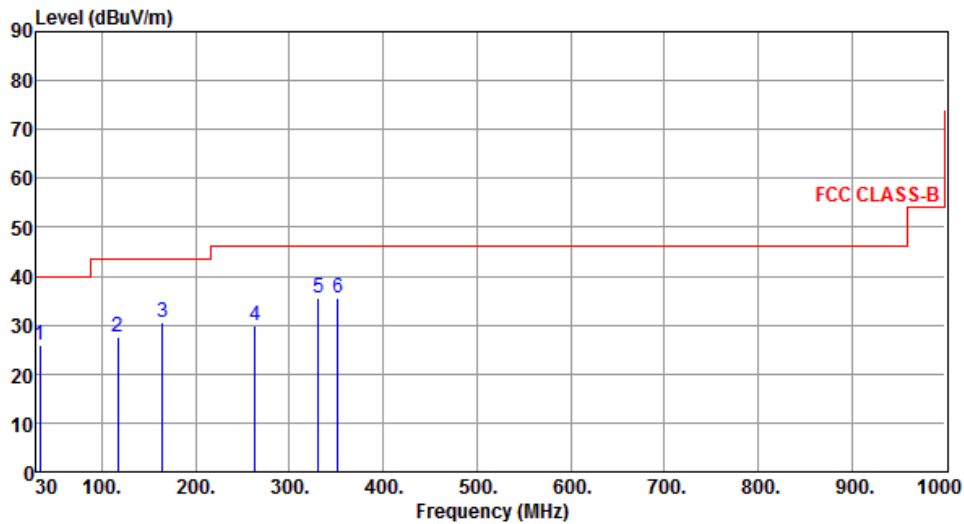

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	33.88	26.05	40.00	-13.95	39.97	-13.92	Peak	---	---
2	117.30	27.61	43.50	-15.89	43.47	-15.86	Peak	---	---
3	164.83	30.69	43.50	-12.81	44.27	-13.58	Peak	---	---
4	263.77	29.96	46.00	-16.04	43.96	-14.00	Peak	---	---
5	330.70	35.50	46.00	-10.50	47.49	-11.99	Peak	---	---
6	352.04	35.39	46.00	-10.61	46.80	-11.41	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	2

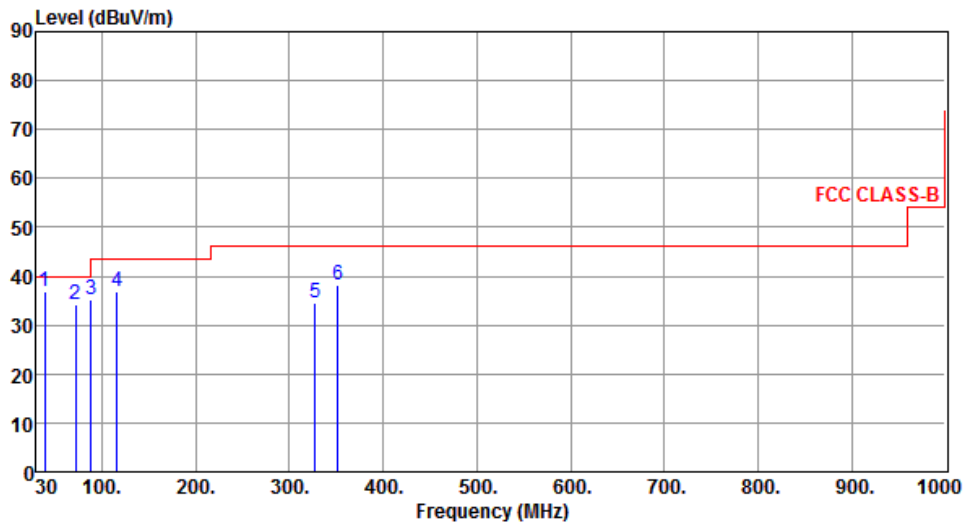

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.73	36.99	40.00	-3.01	50.45	-13.46	QP	100	3
2	71.71	34.27	40.00	-5.73	50.19	-15.92	Peak	---	---
3	88.20	35.32	43.50	-8.18	54.55	-19.23	Peak	---	---
4	116.33	36.91	43.50	-6.59	52.86	-15.95	Peak	---	---
5	327.79	34.53	46.00	-11.47	46.59	-12.06	Peak	---	---
6	352.04	38.13	46.00	-7.87	49.54	-11.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	2

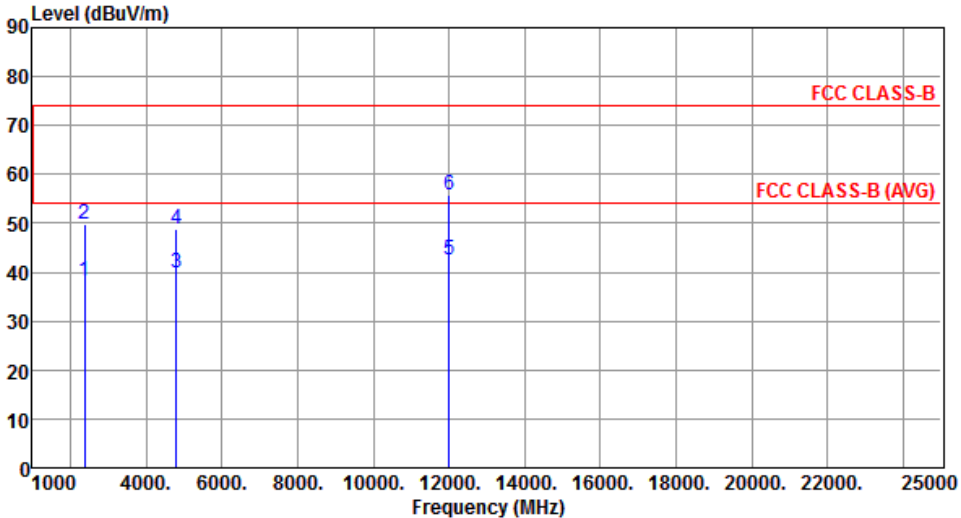


The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (1000 to 25000). Two horizontal red lines represent the FCC CLASS-B limit at approximately 74 dBuV/m and the FCC CLASS-B (AVG) limit at approximately 54 dBuV/m. Six vertical blue lines indicate emission levels at specific frequencies: 2390 MHz (Peak: 49.69 dBuV/m), 4804 MHz (Peak: 48.80 dBuV/m), and 12010 MHz (Peak: 55.87 dBuV/m). The corresponding average levels are 38.26 dBuV/m, 40.01 dBuV/m, and 42.65 dBuV/m respectively.

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.26	54.00	-15.74	39.36	-1.10	Average	100	177
2	2390.00	49.69	74.00	-24.31	50.79	-1.10	Peak	100	177
3	4804.00	40.01	54.00	-13.99	34.76	5.25	Average	100	7
4	4804.00	48.80	74.00	-25.20	43.55	5.25	Peak	100	7
5	12010.00	42.65	54.00	-11.35	27.58	15.07	Average	100	35
6	12010.00	55.87	74.00	-18.13	40.80	15.07	Peak	100	35

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	2

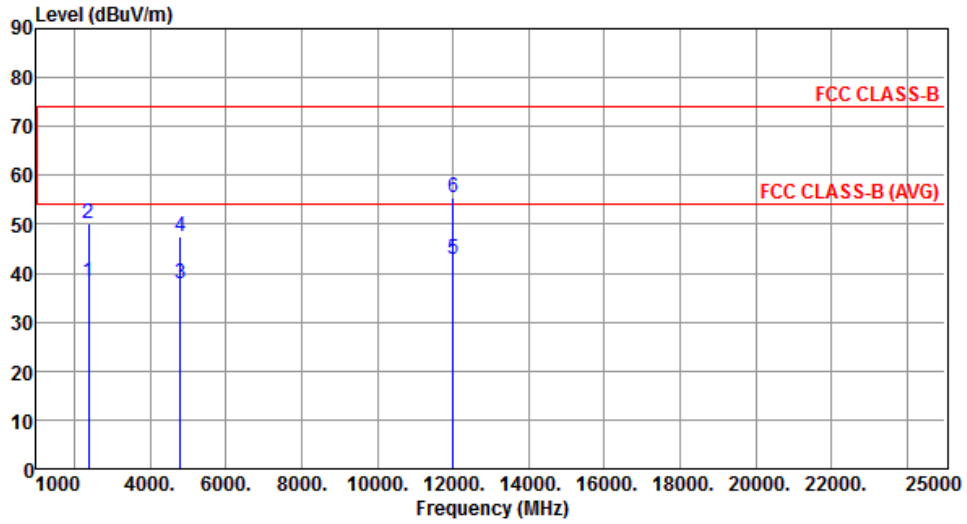


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.08	54.00	-15.92	39.18	-1.10	Average	100	256
2	2390.00	50.09	74.00	-23.91	51.19	-1.10	Peak	100	256
3	4804.00	37.84	54.00	-16.16	32.59	5.25	Average	112	266
4	4804.00	47.40	74.00	-26.60	42.15	5.25	Peak	112	266
5	12010.00	42.69	54.00	-11.31	27.62	15.07	Average	100	23
6	12010.00	55.35	74.00	-18.65	40.28	15.07	Peak	100	23

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	2

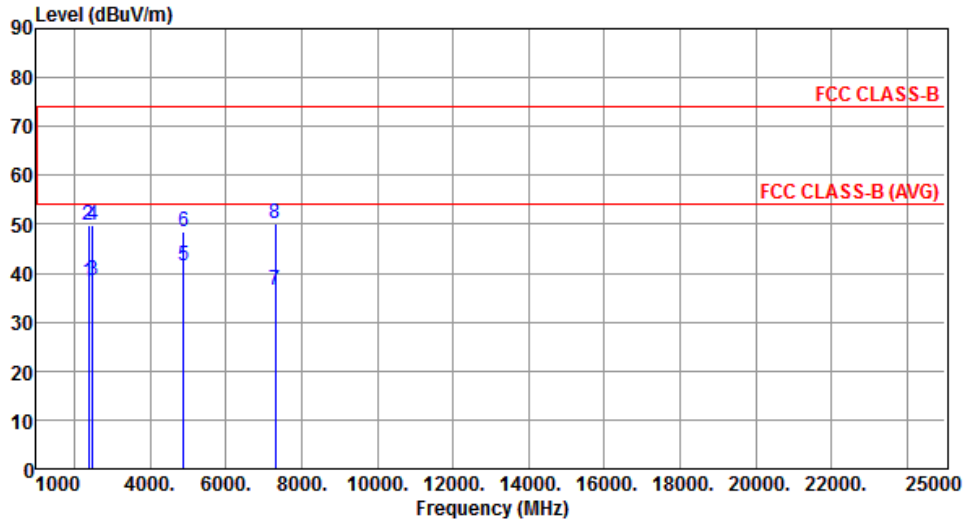


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.23	54.00	-15.77	39.33	-1.10	Average	100	176
2	2390.00	49.91	74.00	-24.09	51.01	-1.10	Peak	100	176
3	2483.50	38.49	54.00	-15.51	39.10	-0.61	Average	100	176
4	2483.50	49.94	74.00	-24.06	50.55	-0.61	Peak	100	176
5	4880.00	41.38	54.00	-12.62	35.95	5.43	Average	100	13
6	4880.00	48.63	74.00	-25.37	43.20	5.43	Peak	100	13
7	7320.00	36.49	54.00	-17.51	26.22	10.27	Average	115	210
8	7320.00	50.14	74.00	-23.86	39.87	10.27	Peak	115	210

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	2

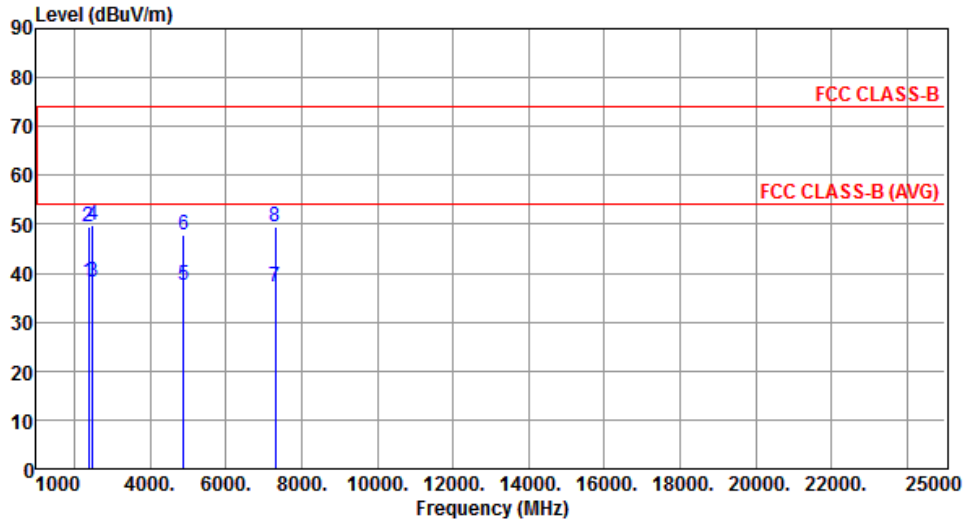


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.28	54.00	-15.72	39.38	-1.10	Average	104	239
2	2390.00	49.61	74.00	-24.39	50.71	-1.10	Peak	104	239
3	2483.50	38.24	54.00	-15.76	38.85	-0.61	Average	104	239
4	2483.50	49.87	74.00	-24.13	50.48	-0.61	Peak	104	239
5	4880.00	37.68	54.00	-16.32	32.25	5.43	Average	119	140
6	4880.00	47.84	74.00	-26.16	42.41	5.43	Peak	119	140
7	7320.00	37.24	54.00	-16.76	26.97	10.27	Average	119	256
8	7320.00	49.46	74.00	-24.54	39.19	10.27	Peak	119	256

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	2

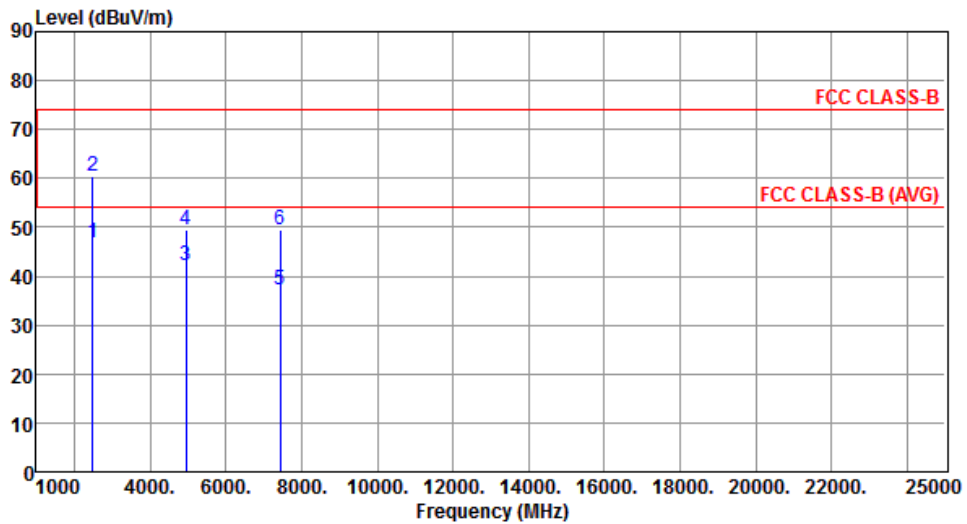


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	46.95	54.00	-7.05	47.56	-0.61	Average	114	179
2	2483.50	60.38	74.00	-13.62	60.99	-0.61	Peak	114	179
3	4960.00	42.05	54.00	-11.95	36.43	5.62	Average	123	10
4	4960.00	49.33	74.00	-24.67	43.71	5.62	Peak	123	10
5	7440.00	37.19	54.00	-16.81	26.63	10.56	Average	155	173
6	7440.00	49.57	74.00	-24.43	39.01	10.56	Peak	155	173

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	2

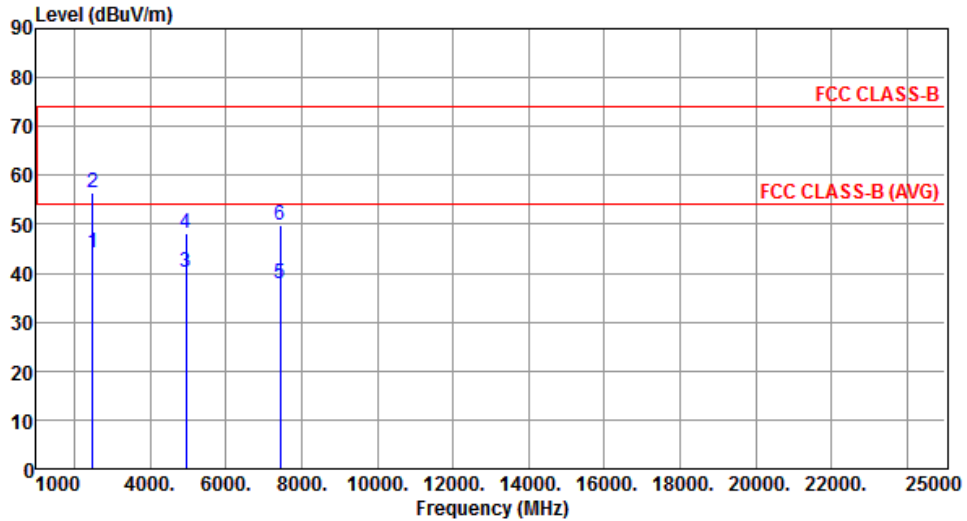

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	44.33	54.00	-9.67	44.94	-0.61	Average	103	236
2	2483.50	56.57	74.00	-17.43	57.18	-0.61	Peak	103	236
3	4960.00	40.15	54.00	-13.85	34.53	5.62	Average	132	141
4	4960.00	48.20	74.00	-25.80	42.58	5.62	Peak	132	141
5	7440.00	38.02	54.00	-15.98	27.46	10.56	Average	155	146
6	7440.00	49.76	74.00	-24.24	39.20	10.56	Peak	155	146

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### Test Configuration 3: Isolated Magnetic Dipole antenna

#### 3.5.8 Transmitter Radiated Unwanted Emissions (Below 1GHz)

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	3

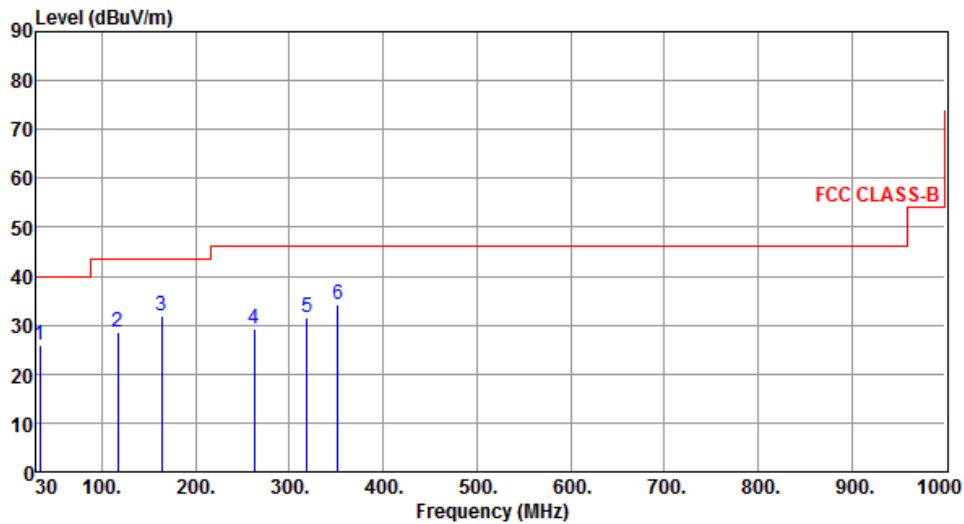

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	33.88	25.95	40.00	-14.05	39.87	-13.92	Peak	---	---
2	117.30	28.53	43.50	-14.97	44.39	-15.86	Peak	---	---
3	163.86	31.90	43.50	-11.60	45.42	-13.52	Peak	---	---
4	262.80	29.09	46.00	-16.91	43.14	-14.05	Peak	---	---
5	319.06	31.57	46.00	-14.43	43.87	-12.30	Peak	---	---
6	352.04	34.22	46.00	-11.78	45.63	-11.41	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	3

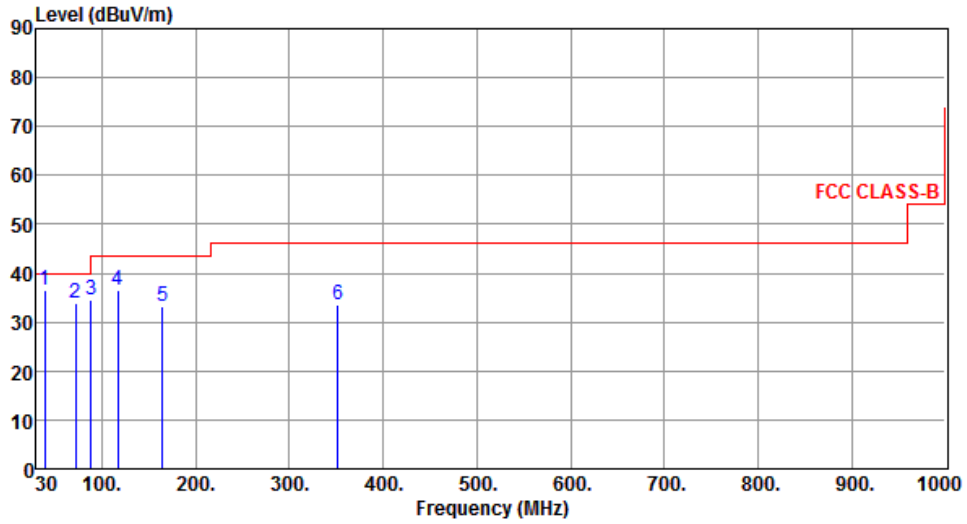

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.73	36.66	40.00	-3.34	50.12	-13.46	QP	100	6
2	71.71	33.85	40.00	-6.15	49.77	-15.92	Peak	---	---
3	88.20	34.39	43.50	-9.11	53.62	-19.23	Peak	---	---
4	117.30	36.68	43.50	-6.82	52.54	-15.86	Peak	---	---
5	164.83	33.08	43.50	-10.42	46.66	-13.58	Peak	---	---
6	352.04	33.50	46.00	-12.50	44.91	-11.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	3

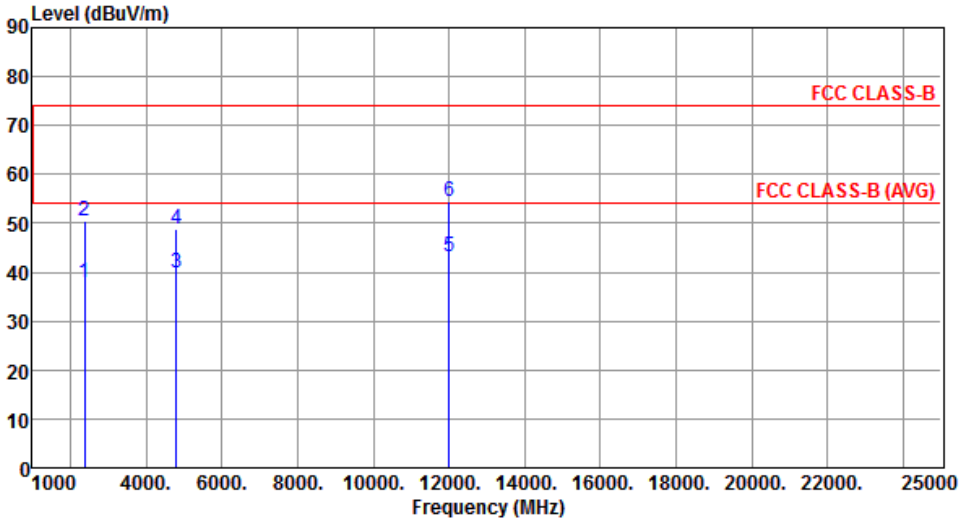


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.89	54.00	-16.11	38.99	-1.10	Average	192	30
2	2390.00	50.34	74.00	-23.66	51.44	-1.10	Peak	192	30
3	4804.00	39.76	54.00	-14.24	34.51	5.25	Average	100	5
4	4804.00	48.74	74.00	-25.26	43.49	5.25	Peak	100	5
5	12010.00	43.20	54.00	-10.80	28.13	15.07	Average	110	132
6	12010.00	54.39	74.00	-19.61	39.32	15.07	Peak	110	132

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	3

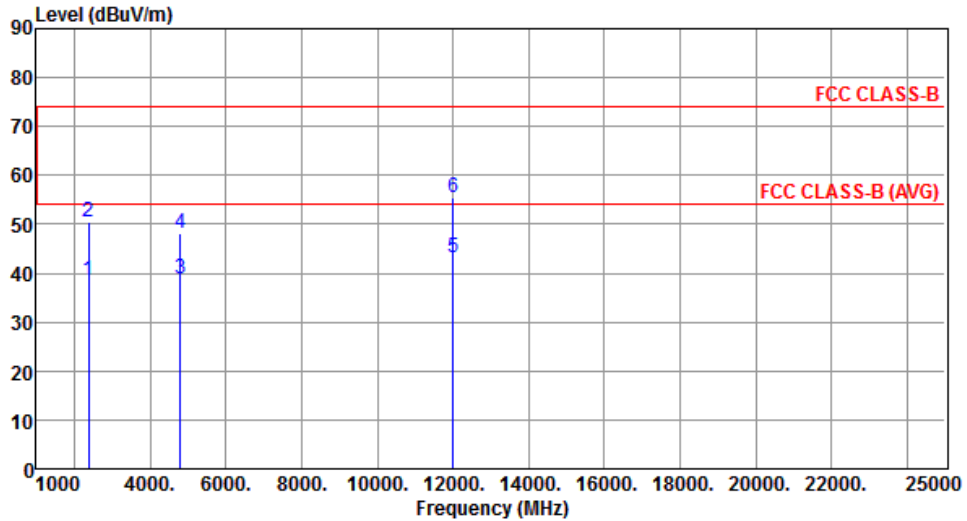


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.42	54.00	-15.58	39.52	-1.10	Average	152	110
2	2390.00	50.37	74.00	-23.63	51.47	-1.10	Peak	152	110
3	4804.00	38.97	54.00	-15.03	33.72	5.25	Average	112	161
4	4804.00	48.25	74.00	-25.75	43.00	5.25	Peak	112	161
5	12010.00	43.04	54.00	-10.96	27.97	15.07	Average	156	180
6	12010.00	55.43	74.00	-18.57	40.36	15.07	Peak	156	180

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	3

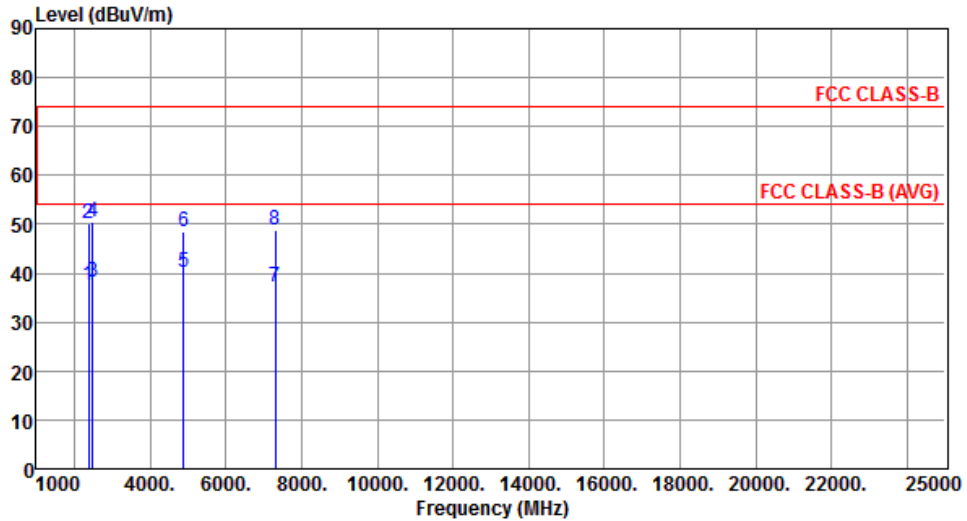


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.45	54.00	-16.55	38.55	-1.10	Average	195	33
2	2390.00	50.08	74.00	-23.92	51.18	-1.10	Peak	195	33
3	2483.50	38.29	54.00	-15.71	38.90	-0.61	Average	195	33
4	2483.50	50.50	74.00	-23.50	51.11	-0.61	Peak	195	33
5	4880.00	40.05	54.00	-13.95	34.62	5.43	Average	100	3
6	4880.00	48.58	74.00	-25.42	43.15	5.43	Peak	100	3
7	7320.00	37.13	54.00	-16.87	26.86	10.27	Average	123	42
8	7320.00	48.91	74.00	-25.09	38.64	10.27	Peak	123	42

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	3

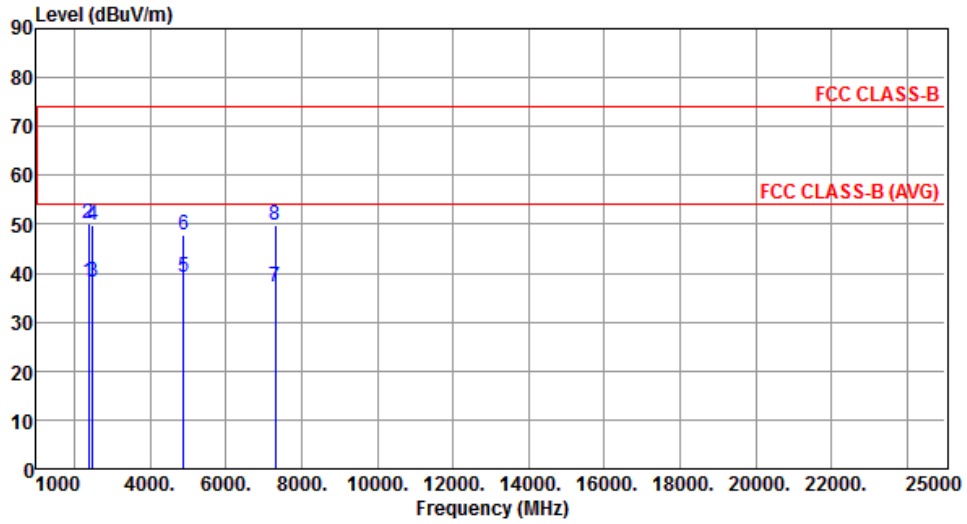


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.24	54.00	-15.76	39.34	-1.10	Average	156	108
2	2390.00	50.05	74.00	-23.95	51.15	-1.10	Peak	156	108
3	2483.50	38.18	54.00	-15.82	38.79	-0.61	Average	156	108
4	2483.50	49.87	74.00	-24.13	50.48	-0.61	Peak	156	108
5	4880.00	39.15	54.00	-14.85	33.72	5.43	Average	111	262
6	4880.00	47.96	74.00	-26.04	42.53	5.43	Peak	111	262
7	7320.00	37.08	54.00	-16.92	26.81	10.27	Average	166	172
8	7320.00	49.72	74.00	-24.28	39.45	10.27	Peak	166	172

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	3

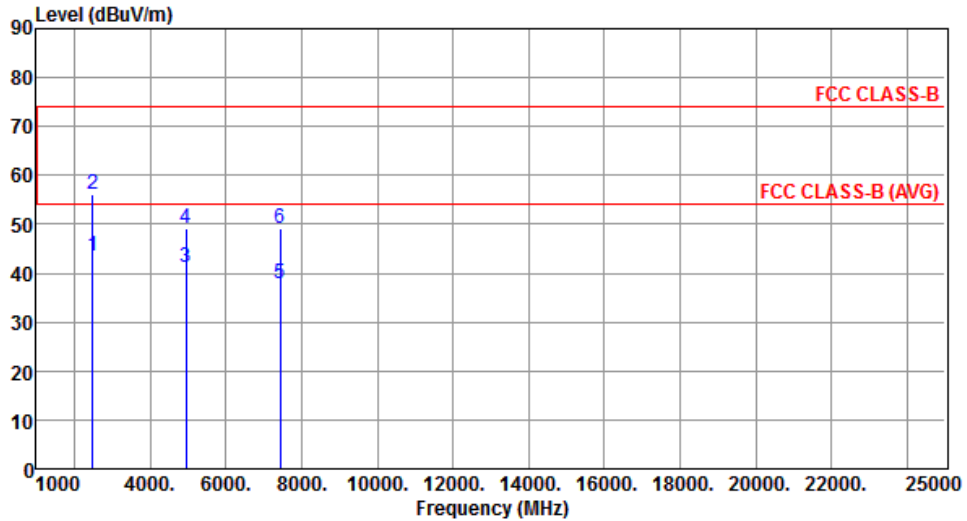


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	43.60	54.00	-10.40	44.21	-0.61	Average	119	269
2	2483.50	56.07	74.00	-17.93	56.68	-0.61	Peak	119	269
3	4960.00	41.34	54.00	-12.66	35.72	5.62	Average	105	8
4	4960.00	49.23	74.00	-24.77	43.61	5.62	Peak	105	8
5	7440.00	37.87	54.00	-16.13	27.31	10.56	Average	156	213
6	7440.00	49.12	74.00	-24.88	38.56	10.56	Peak	156	213

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	3

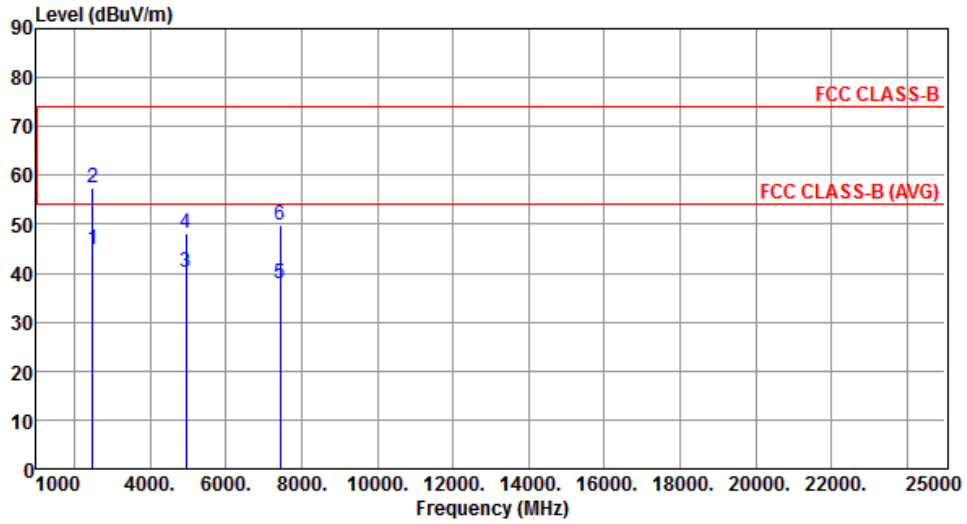

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	44.78	54.00	-9.22	45.39	-0.61	Average	161	105
2	2483.50	57.56	74.00	-16.44	58.17	-0.61	Peak	161	105
3	4960.00	40.30	54.00	-13.70	34.68	5.62	Average	108	260
4	4960.00	48.19	74.00	-25.81	42.57	5.62	Peak	108	260
5	7440.00	37.87	54.00	-16.13	27.31	10.56	Average	168	172
6	7440.00	49.79	74.00	-24.21	39.23	10.56	Peak	168	172

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## 3.6 Emissions in non-restricted Frequency Bands

### 3.6.1 Emissions in non-restricted frequency bands limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

### 3.6.2 Test Procedures


#### Reference Level Measurement

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Set Sweep time = auto couple, Trace mode = max hold.
3. Allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.


#### Unwanted Emissions Level Measurement

1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Trace Mode = max hold, Sweep = auto couple.
3. Allow the trace to stabilize.
4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

### 3.6.3 Test Setup




### 3.6.4 Test Result of Emissions in non-restricted Frequency Bands

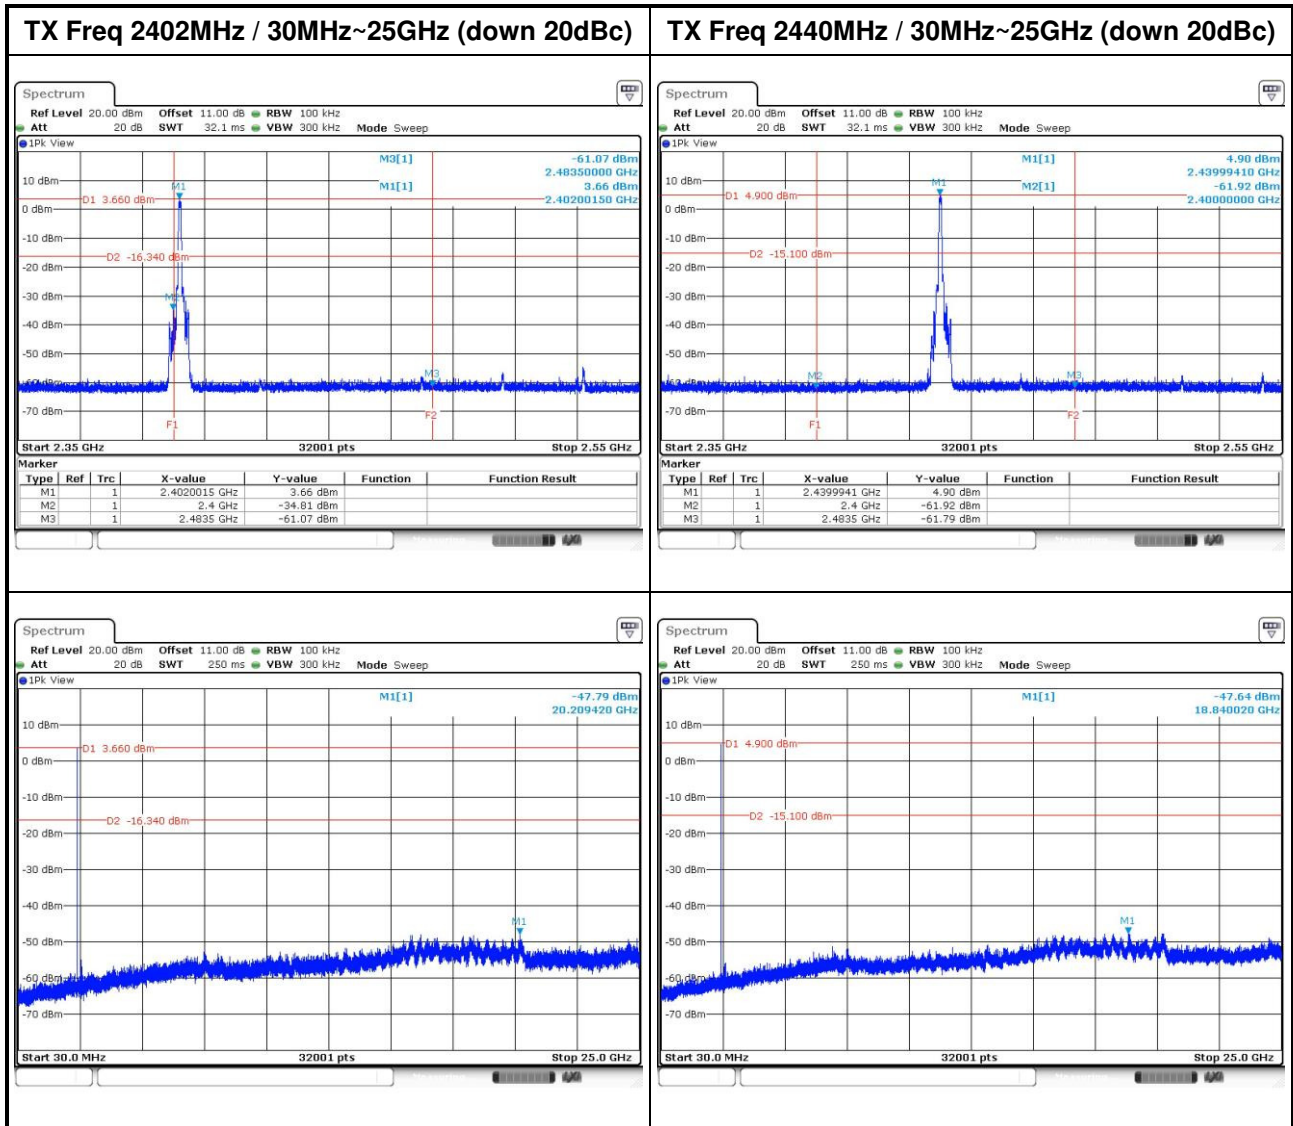


**TX Freq 2480MHz / 30MHz~25GHz (down 20dBc)**

---

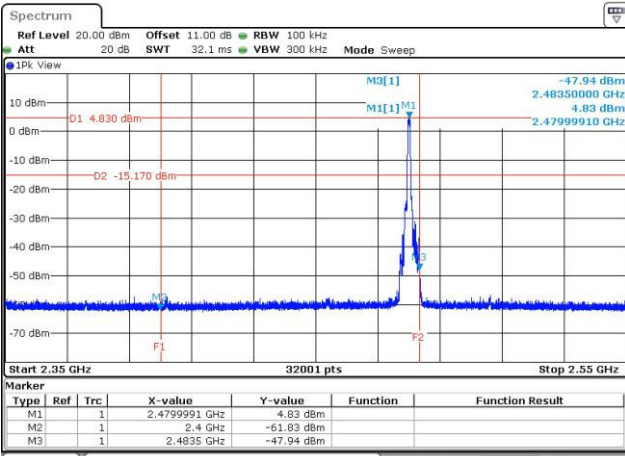

---

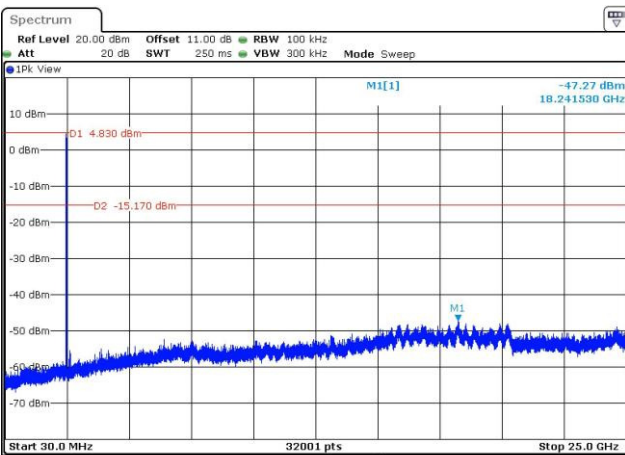

---



## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan,  
R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: [ICC\\_Service@icertifi.com.tw](mailto:ICC_Service@icertifi.com.tw)

==END==