



# RADIO TEST REPORT

Test Report No.: 14353270H-B-R1

Customer	FUJITSU COMPONENT LIMITED
Description of EUT	Bluetooth Dual Mode Module
Model Number of EUT	FWM7BTZ61
FCC ID	SQK-7BTZ61
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied (Refer to SECTION 3)
Issue Date	July 27, 2022
Remarks	Bluetooth (BR / EDR) parts

Representative Test Engineer

Tetsuro Yoshida  
Engineer

Approved By

Takumi Shimada  
Engineer



CERTIFICATE 5107.02

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.  
 There is no testing item of "Non-accreditation".

---

## **ANNOUNCEMENT**

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested.
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.  
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the applicant for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

## **REVISION HISTORY**

### **Original Test Report No.: 14353270H-B**

This report is a revised version of 14353270H-B. 14353270H-B is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	14353270H-B	July 13, 2022	-
1	14353270H-B-R1	July 27, 2022	Correction of the description of "FCC Part 15.31 (e)" in Clause 3.2
1	14353270H-B-R1	July 27, 2022	Correction of the Hopping for Carrier Frequency Separation in Clause 4.1; from "Off" to "On"
1	14353270H-B-R1	July 27, 2022	Addition of Item E to configuration diagram and list for Radiated Emission test in Clause 4.2
1	14353270H-B-R1	July 27, 2022	Correction of power supply in configuration diagram for Antenna Terminal Conducted test in Clause 4.2; From 50 Hz to 60 Hz

**Reference: Abbreviations (Including words undescribed in this report)**

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

---

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer Information .....</b>	<b>5</b>
<b>SECTION 2: Equipment Under Test (EUT).....</b>	<b>5</b>
<b>SECTION 3: Test Specification, Procedures &amp; Results.....</b>	<b>6</b>
<b>SECTION 4: Operation of EUT during testing.....</b>	<b>9</b>
<b>SECTION 5: Conducted Emission.....</b>	<b>13</b>
<b>SECTION 6: Radiated Spurious Emission .....</b>	<b>14</b>
<b>SECTION 7: Antenna Terminal Conducted Tests.....</b>	<b>16</b>
<b>APPENDIX 1: Test data .....</b>	<b>17</b>
Conducted Emission .....	17
20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation .....	18
Number of Hopping Frequency .....	22
Dwell time.....	24
Maximum Peak Output Power.....	27
Average Output Power.....	28
Radiated Spurious Emission .....	30
March 15, 2017 .....	42
Conducted Spurious Emission .....	41
Conducted Emission Band Edge compliance .....	47
<b>APPENDIX 2: Test Instruments.....</b>	<b>49</b>
<b>APPENDIX 3: Photographs of test setup .....</b>	<b>51</b>
Conducted Emission .....	51
Radiated Spurious Emission .....	52
Worst Case Position.....	53
Antenna Terminal Conducted Tests.....	54

## **SECTION 1: Customer Information**

Company Name	FUJITSU COMPONENT LIMITED
Address	Shinagawa Seaside Park Tower, 12-4, Higashi-shinagawa 4-chome, Shinagawa-ku, Tokyo, 140-0002, Japan
Telephone Number	+81-3-3450-1639
Contact Person	Koichi Nishizawa

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
  - Operating/Test Mode(s) (Mode(s)) on all the relevant pages
  - SECTION 1: Customer Information
  - SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
  - SECTION 4: Operation of EUT during testing
- \* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

## **SECTION 2: Equipment Under Test (EUT)**

### **2.1 Identification of EUT**

Description	Bluetooth Dual Mode Module
Model Number	FWM7BTZ61
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	May 31, 2022
Test Date	June 6 to 15, 2022

### **2.2 Product Description**

#### **General Specification**

Rating	DC 3.0 V
Operating temperature	-30 deg. C to +85 deg. C

#### **Radio Specification**

##### **Bluetooth (Low Energy)**

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	GFSK
Antenna Gain	0.2 dBi

##### **Bluetooth (BR / EDR) \*1)**

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	FHSS (GFSK, $\pi/4$ DQPSK, 8 DPSK)
Antenna Gain	0.2 dBi

\*1) This test report applies to Bluetooth part.

\* Bluetooth Low Energy and Bluetooth do not transmit simultaneously.

**SECTION 3: Test Specification, Procedures & Results**

**3.1 Test Specification**

Test Specification	FCC Part 15 Subpart C FCC Part 15 final revised on April 1, 2022 and effective May 2, 2022
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

**3.2 Procedures and Results**

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods	FCC: Section 15.207	16.06 dB, 0.19590 MHz, QP, Phase L <DH5>	Complied a)	-
	ISED: RSS-Gen 8.8	ISED: RSS-Gen 8.8			
Carrier Frequency Separation	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section15.247(a)(1)	See data.	Complied b)	Conducted
	ISED: -	ISED: RSS-247 5.1 (b)			
20dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section15.247(a)(1)		Complied b)	Conducted
	ISED: -	ISED: RSS-247 5.1 (a)			
Number of Hopping Frequency	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section15.247(a)(1)(iii)		Complied c)	Conducted
	ISED: -	ISED: RSS-247 5.1 (d)			
Dwell time	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section15.247(a)(1)(iii)		Complied d)	Conducted
	ISED: -	ISED: RSS-247 5.1 (d)			
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section15.247(b)(1)		Complied e)	Conducted
	ISED: RSS-Gen 6.12	ISED: RSS-247 5.4 (b)			
Spurious Emission & Band Edge Compliance	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section15.247(d)	5.9 dB 59.4 MHz, QP, Vertical <DH5>	Complied# f) / g)	Conducted/ Radiated (above 30 MHz) *1)
	ISED: RSS-Gen 6.13	ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10			
Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.					
*1) Radiated test was selected over 30 MHz based on section 15.247(d).					
a) Refer to APPENDIX 1 (data of Conducted Emission) b) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation) c) Refer to APPENDIX 1 (data of Number of Hopping Frequency) d) Refer to APPENDIX 1 (data of Dwell time) e) Refer to APPENDIX 1 (data of Maximum Peak Output Power) f) Refer to APPENDIX 1 (data of Conducted Spurious Emission) g) Refer to APPENDIX 1 (data of Radiated Spurious Emission)					
Symbols:					
Complied	The data of this test item has enough margin, more than the measurement uncertainty.				
Complied#	The data of this test item meets the limits unless the measurement uncertainty is taken into consideration				

**FCC Part 15.31 (e)**

The RF Module has its own regulator.

The RF Module is constantly provided voltage through the regulator regardless of input voltage. Therefore, this EUT complies with the requirement.

**FCC Part 15.203/212 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

### 3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k=2$ .

#### Conducted emission

Using Item	Frequency range	Uncertainty (+/-)
AMN (LISN)	0.009 MHz to 0.15 MHz	3.7 dB
	0.15 MHz to 30 MHz	3.3 dB

#### Radiated emission

Measurement distance	Frequency range		Uncertainty (+/-)
3 m	9 kHz to 30 MHz		3.2 dB
10 m			3.0 dB
3 m	30 MHz to 200 MHz	Horizontal	4.8 dB
		Vertical	5.0 dB
	200 MHz to 1000 MHz	Horizontal	5.1 dB
		Vertical	6.2 dB
10 m	30 MHz to 200 MHz	Horizontal	4.8 dB
		Vertical	4.8 dB
	200 MHz to 1000 MHz	Horizontal	5.0 dB
		Vertical	5.0 dB
3 m	1 GHz to 6 GHz		4.9 dB
	6 GHz to 18 GHz		5.2 dB
1 m	10 GHz to 26.5 GHz		5.4 dB
	26.5 GHz to 40 GHz		5.4 dB
10 m	1 GHz to 18 GHz		5.4 dB

#### Antenna Terminal test

Test Item	Uncertainty (+/-)
20 dB Bandwidth / 99 % Occupied Bandwidth	0.96 %
Maximum Peak Output Power / Average Output Power	1.5 dB
Carrier Frequency Separation	0.42 %
Dwell time / Burst rate	0.10 %
Conducted Spurious Emission	2.7 dB

### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

\*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan

Telephone: +81-596-24-8999

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.



## SECTION 4: Operation of EUT during testing

### 4.1 Operating Mode(s)

Mode	Remarks*
Bluetooth (BT)	BR / EDR, Payload: PRBS9
<p>*EUT has the power settings by the software as follows;            Power Setting: +4dBm            Software: sppv5 Version: v4.00            (Date: 2022.04 19, Storage location: EUT memory)</p> <p>*This setting of software is the worst case.            Any conditions under the normal use do not exceed the condition of setting.            In addition, end users cannot change the settings of the output power of the product.</p>	


#### Details of Operating Mode(s)

Test Item	Mode	Hopping	Tested Frequency
Conducted Emission, Radiated Spurious Emission (Below 1 GHz),	Tx DH5	Off	2480 MHz *1)
Radiated Spurious Emission (Above 1 GHz), Conducted Spurious Emission	Tx DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Carrier Frequency Separation	Tx DH5 Tx 3DH5	On	2402 MHz 2441 MHz 2480 MHz
20dB Bandwidth	Tx DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Number of Hopping Frequency	Tx DH5 Tx 3DH5	On	-
Dwell time	Tx DH1, DH3, DH5 Tx 3DH1, 3DH3, 3DH5	On	-
Maximum Peak Output Power	Tx DH5 Tx 2DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Band Edge Compliance (Conducted)	Tx DH5 Tx 3DH5	On ----- Off	2402 MHz 2480 MHz
99% Occupied Bandwidth	Tx DH5 Tx 3DH5	On ----- Off	2402 MHz 2441 MHz 2480 MHz

\*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test)  
 \*2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative.  
 \*It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification.  
 \*1) Conducted emissions and Spurious emissions for frequencies below 1 GHz were limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.

## 4.2 Configuration and Peripherals

[Conducted Emission tests]

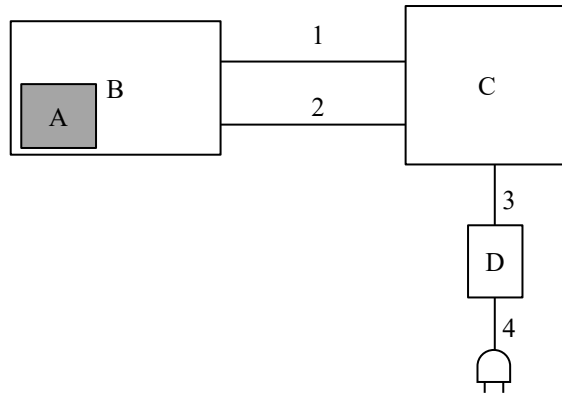

AC 120 V / 60 Hz

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

\* As a result of comparing AC 120 V and AC 240 V at pre-check, Conducted Emission test was performed with AC 120 V of the worst voltage as representative.


### Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Bluetooth Dual Mode Module	FWM7BTZ61	000B5DB4EB1C	FUJITSU COMPONENT LIMITED	EUT
B	Jig Board	T015265	-	FUJITSU COMPONENT LIMITED	-
C	Laptop PC	X1 Carbon	R9-OH8OBW 15/9	Lenovo	-
D	AC Adapter	ADLX45NCC2A	36200281	Lenovo	-

### List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB Cable	2.0	Shielded	Shielded	-
2	USB Cable	2.0	Shielded	Shielded	-
3	DC Cable	1.7	Unshielded	Unshielded	-
4	AC Cable	0.8	Unshielded	Unshielded	-

[Radiated Emission test]

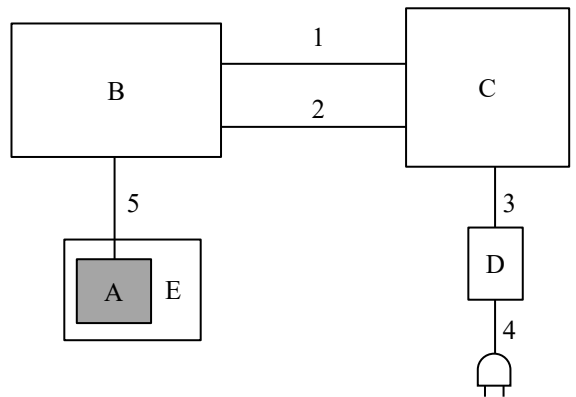

AC 120 V / 60 Hz

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.


**Description of EUT and Support Equipment**

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Bluetooth Dual Mode Module	FWM7BTZ61	000B5DB4EB1C	FUJITSU COMPONENT LIMITED	EUT
B	Jig Board	T015265	-	FUJITSU COMPONENT LIMITED	-
C	Laptop PC	X1 Carbon	R9-OH8OBW 15/9	Lenovo	-
D	AC Adapter	ADLX45NCC2A	36200281	Lenovo	-
E	Jig Board	-	-	FUJITSU COMPONENT LIMITED	-

**List of Cables Used**

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB Cable	2.0	Shielded	Shielded	-
2	USB Cable	2.0	Shielded	Shielded	-
3	DC Cable	1.7	Unshielded	Unshielded	-
4	AC Cable	0.8	Unshielded	Unshielded	-
5	Signal Cable	0.2	Unshielded	Unshielded	-

[Antenna Terminal Conducted test]

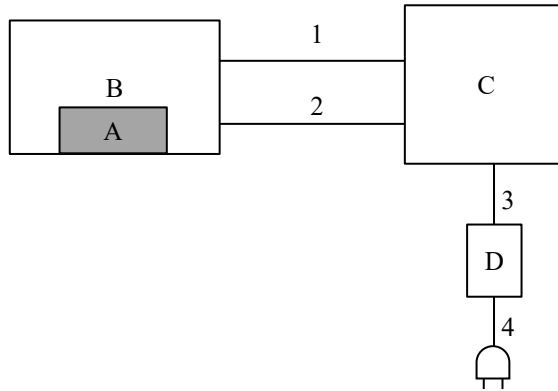

AC 120 V / 60 Hz

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

**Description of EUT and Support Equipment**

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Bluetooth Dual Mode Module	FWM7BTZ61	000B5DB4EB22	FUJITSU COMPONENT LIMITED	EUT
B	Jig Board	T015265	-	FUJITSU COMPONENT LIMITED	-
C	Laptop PC	PR63PBAA337AD7X	6F053913H	TOSHIBA	-
D	AC Adapter	PA51770-1ACA	FX10800NSKACC	TOSHIBA	-

**List of Cables Used**

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB Cable	2.0	Shielded	Shielded	-
2	USB Cable	2.0	Shielded	Shielded	-
3	DC Cable	1.7	Unshielded	Unshielded	-
4	AC Cable	0.8	Unshielded	Unshielded	-

## **SECTION 5: Conducted Emission**

### **Test Procedure and Conditions**

EUT was placed on a urethane platform / a wooden table of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.

The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80 cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN) and excess AC cable was bundled in center.

#### For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane. All unused 50 ohm connectors of the LISN (AMN) were resistivity terminated in 50 ohm when not connected to the measuring equipment.


The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber. The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

<b>Detector</b>	<b>: QP and CISPR AV</b>
<b>Measurement Range</b>	<b>: 0.15 MHz to 30 MHz</b>
<b>Test Data</b>	<b>: APPENDIX</b>
<b>Test Result</b>	<b>: Pass</b>

**Figure 1: Test Setup**

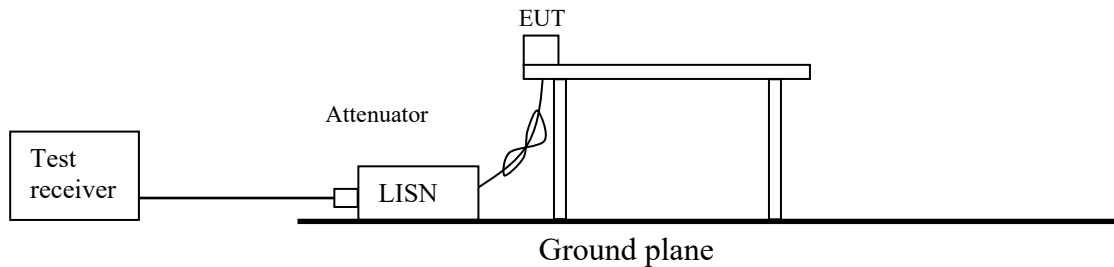

## **SECTION 6: Radiated Spurious Emission**

### **Test Procedure**

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

### **Test Antennas are used as below;**

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.


### **20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).**

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces Duty factor was added to the results.	RBW: 100 kHz VBW: 300 kHz

\*1) Average Power Measurement was performed based on KDB 558074 D01 15.247 Meas Guidance v05r02.

**Figure 2: Test Setup**


Below 1 GHz

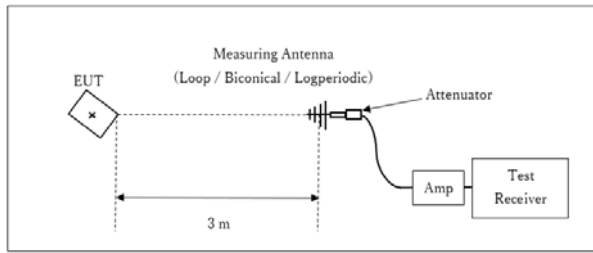

\* : Center of turn table

Test Distance: 3 m

1 GHz to 10 GHz

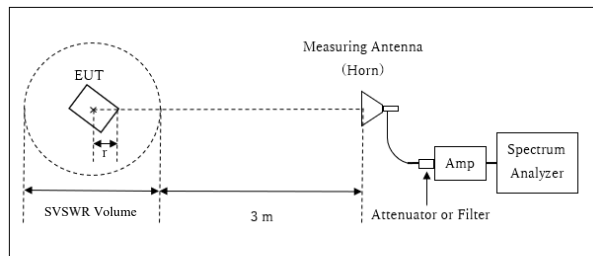

r : Radius of an outer periphery of EUT


\* : Center of turn table

Distance Factor:  $20 \times \log(4.0 \text{ m} / 3.0 \text{ m}) = 2.50 \text{ dB}$   
\* Test Distance:  $(3 + \text{SVSWR Volume} / 2) - r = 4.0 \text{ m}$

SVSWR Volume : 2.0 m  
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)  
 $r = 0.0 \text{ m}$

\* The test was performed with  $r = 0.0 \text{ m}$  since EUT is small and it was the rather conservative condition.

10 GHz to 26.5 GHz

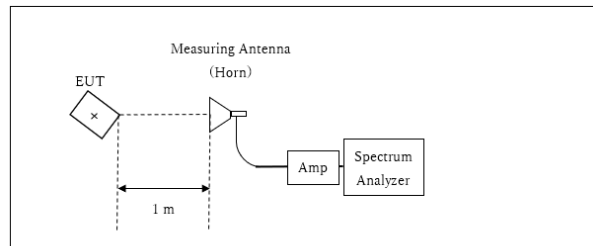

\* : Center of turn table

Distance Factor:  $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$   
\*Test Distance: 1 m

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Measurement Range** : 30 MHz to 26.5 GHz  
**Test Data** : APPENDIX  
**Test Result** : Pass

**SECTION 7: Antenna Terminal Conducted Tests**

**Test Procedure**

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument Used
20dB Bandwidth	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak Average *2)	-	Power Meter (Sensor: 50MHz BW)
Carrier Frequency Separation	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30 MHz	200 kHz	620 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100 kHz, 1 MHz	300 kHz, 3 MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *3) *4)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	9.1 kHz	27 kHz				
	30 MHz to 25 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

\*1) Peak hold was applied as Worst-case measurement.  
 \*2) Reference data  
 \*3) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents. Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart. (9 kHz -150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz)  
 \*4) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to 45.5 – 51.5 = -6.0 dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed. The equipment and cables were not used for factor 0 dB of the data sheets.

**Test Data : APPENDIX**  
**Test Result : Pass**




**APPENDIX 1: Test data**

**Conducted Emission**

Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
 Date June 15, 2022  
 Temperature / Humidity 24 deg. C / 55 % RH  
 Engineer Kiyoshiro Okazaki  
 Mode Tx, Hopping Off, DH5 2480 MHz

Limit : FCC\_Part 15 Subpart C(15.207)

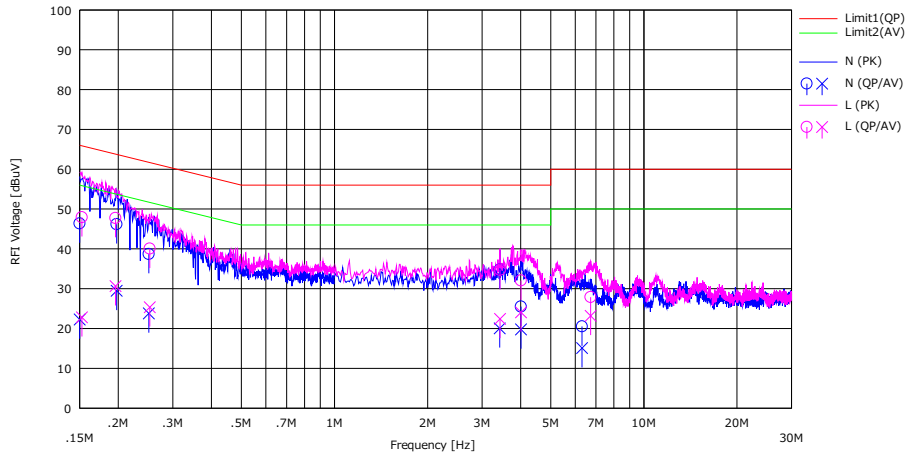

No.	Freq. [MHz]	Reading		LISN [dB]	LOSS [dB]	Results		Limit		Margin		Phase	Comment
		(QP) [dBuV]	(AV) [dBuV]			(QP) [dBuV]	(AV) [dBuV]	(QP) [dB]	(AV) [dB]				
1	0.15000	33.10	9.00	0.09	13.18	46.37	22.27	66.00	56.00	19.63	33.73	N	
2	0.19760	32.90	16.20	0.08	13.19	46.17	29.47	63.71	53.71	17.54	24.24	N	
3	0.25115	25.40	10.50	0.08	13.20	38.68	23.78	61.72	51.72	23.04	27.94	N	
4	3.42100	21.20	6.50	0.13	13.41	34.74	20.04	56.00	46.00	21.26	25.96	N	
5	4.00600	11.90	6.20	0.14	13.44	25.48	19.78	56.00	46.00	30.52	26.22	N	
6	6.31500	6.80	1.40	0.17	13.52	20.49	15.09	60.00	50.00	39.51	34.91	N	
7	0.15255	34.60	9.50	0.13	13.18	47.91	22.81	65.86	55.86	17.95	33.05	L	
8	0.19590	34.40	17.30	0.13	13.19	47.72	30.62	63.78	53.78	16.06	23.16	L	
9	0.25285	26.70	12.00	0.13	13.20	40.03	25.33	61.66	51.66	21.63	26.33	L	
10	3.43000	21.10	8.80	0.19	13.41	34.70	22.40	56.00	46.00	21.30	23.60	L	
11	4.00600	18.40	10.40	0.20	13.44	32.04	24.04	56.00	46.00	23.96	21.96	L	
12	6.73300	14.10	9.40	0.24	13.54	27.88	23.18	60.00	50.00	32.12	26.82	L	

CHART: WITH FACTOR Peak hold data. CALCULATION : RESULT = READING + LISN + LOSS (CABLE + ATT)  
 Except for the above table: adequate margin data below the limits.

## 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation


Test place                    Ise EMC Lab. No.6 Measurement Room  
Date                            June 7, 2022  
Temperature / Humidity      22 deg. C / 44 % RH  
Engineer                      Tetsuro Yoshida  
Mode                            Tx, Hopping Off, Tx, Hopping On

Mode	Freq. [MHz]	20 dB Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	1.042	964.384	1.000	$\geq 0.695$
DH5	2441.0	1.040	984.241	1.000	$\geq 0.693$
DH5	2480.0	1.033	959.524	1.000	$\geq 0.689$
DH5	Hopping On	-	78716.200	-	-
3DH5	2402.0	1.319	1222.100	1.000	$\geq 0.879$
3DH5	2441.0	1.317	1214.400	1.000	$\geq 0.878$
3DH5	2480.0	1.313	1211.600	1.000	$\geq 0.875$
3DH5	Hopping On	-	78721.300	-	-


Limit: Two-thirds of 20 dB Bandwidth or 25 kHz (whichever is greater).

No limit applies to 20 dB Bandwidth.


**20dB Bandwidth and 99% Occupied Bandwidth**

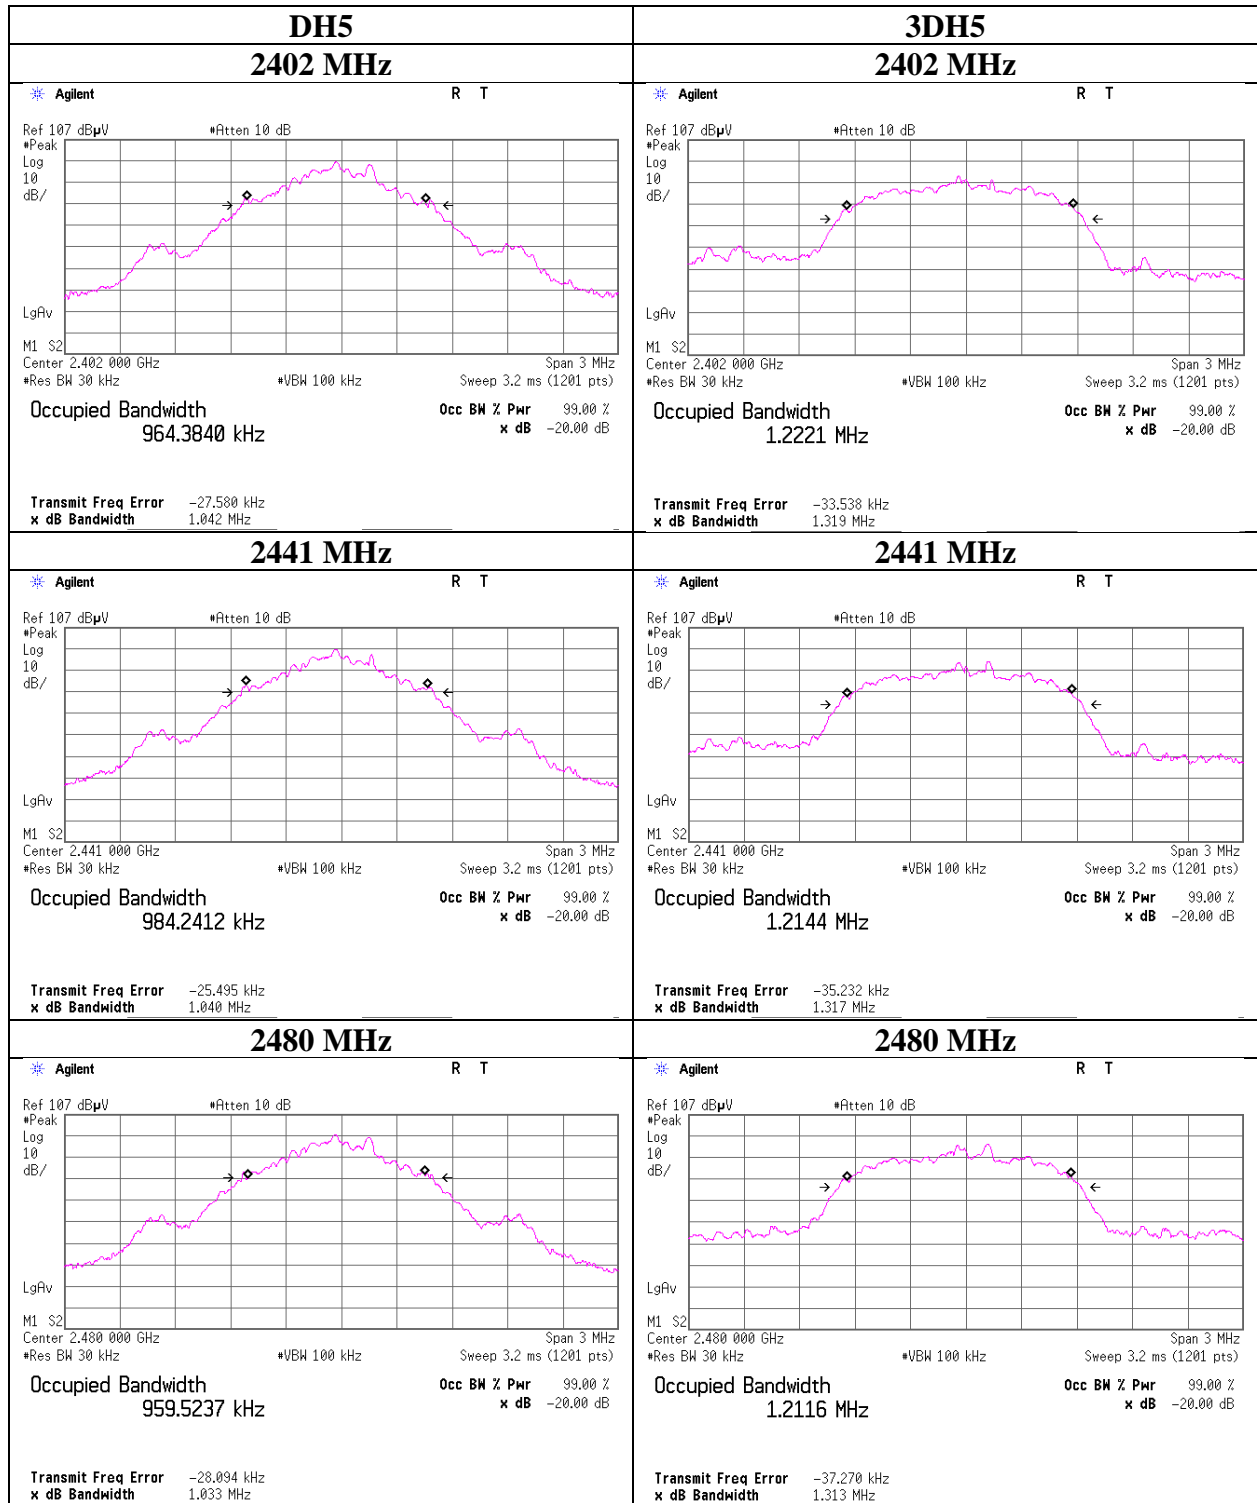

**20dB Bandwidth and 99% Occupied Bandwidth**

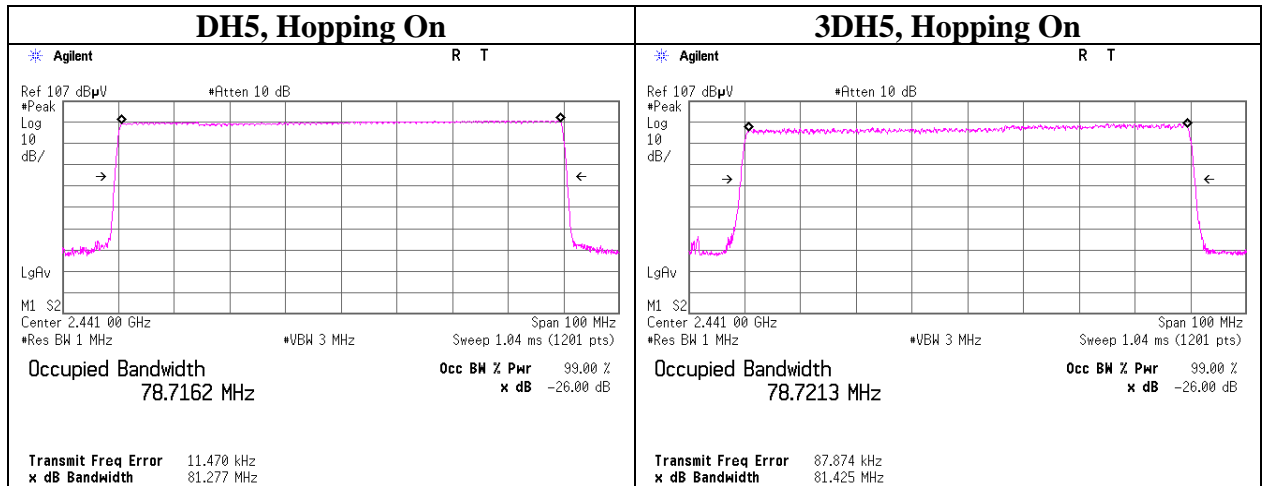

### Carrier Frequency Separation

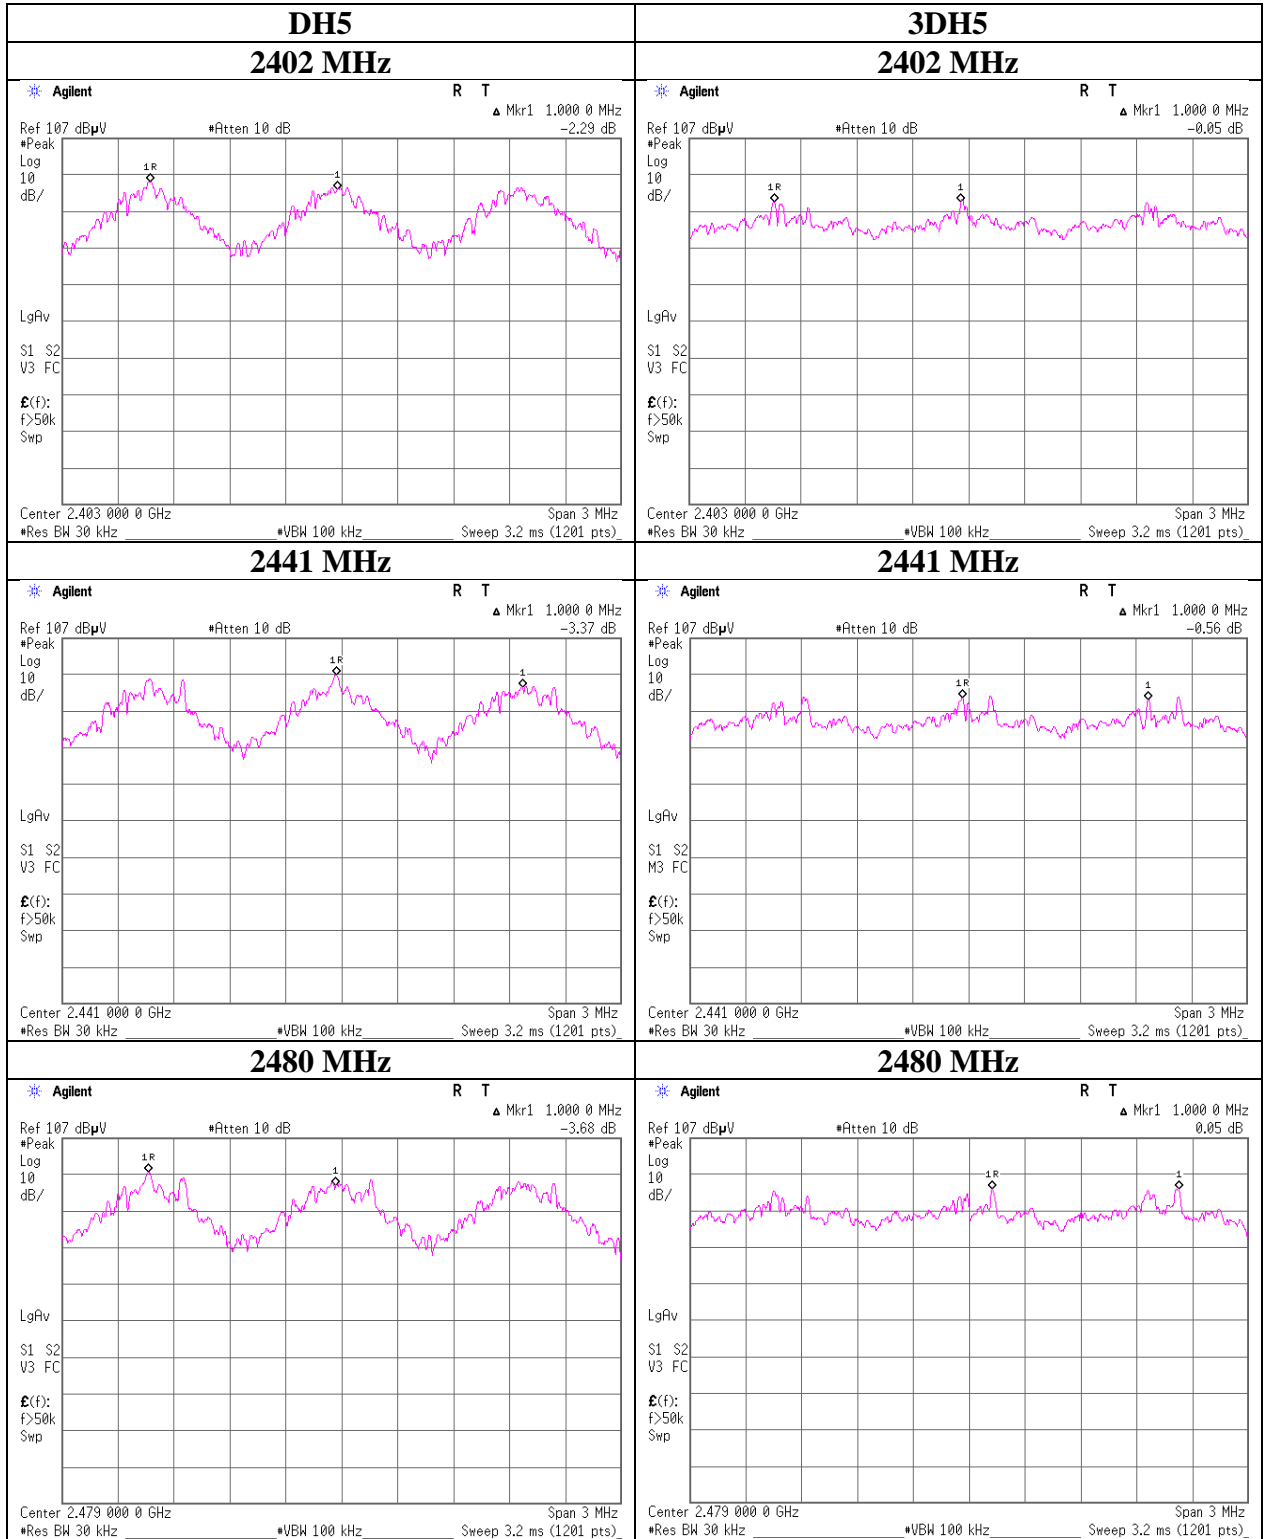

---


### Number of Hopping Frequency

Test place Ise EMC Lab. No.6 Measurement Room  
Date June 6, 2022  
Temperature / Humidity 24 deg. C / 42 % RH  
Engineer Tetsuro Yoshida  
Mode Tx, Hopping On

Mode	Number of channel [channels]	Limit [channels]
DH5	79	$\geq 15$
3DH5	79	$\geq 15$

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

**Number of Hopping Frequency**

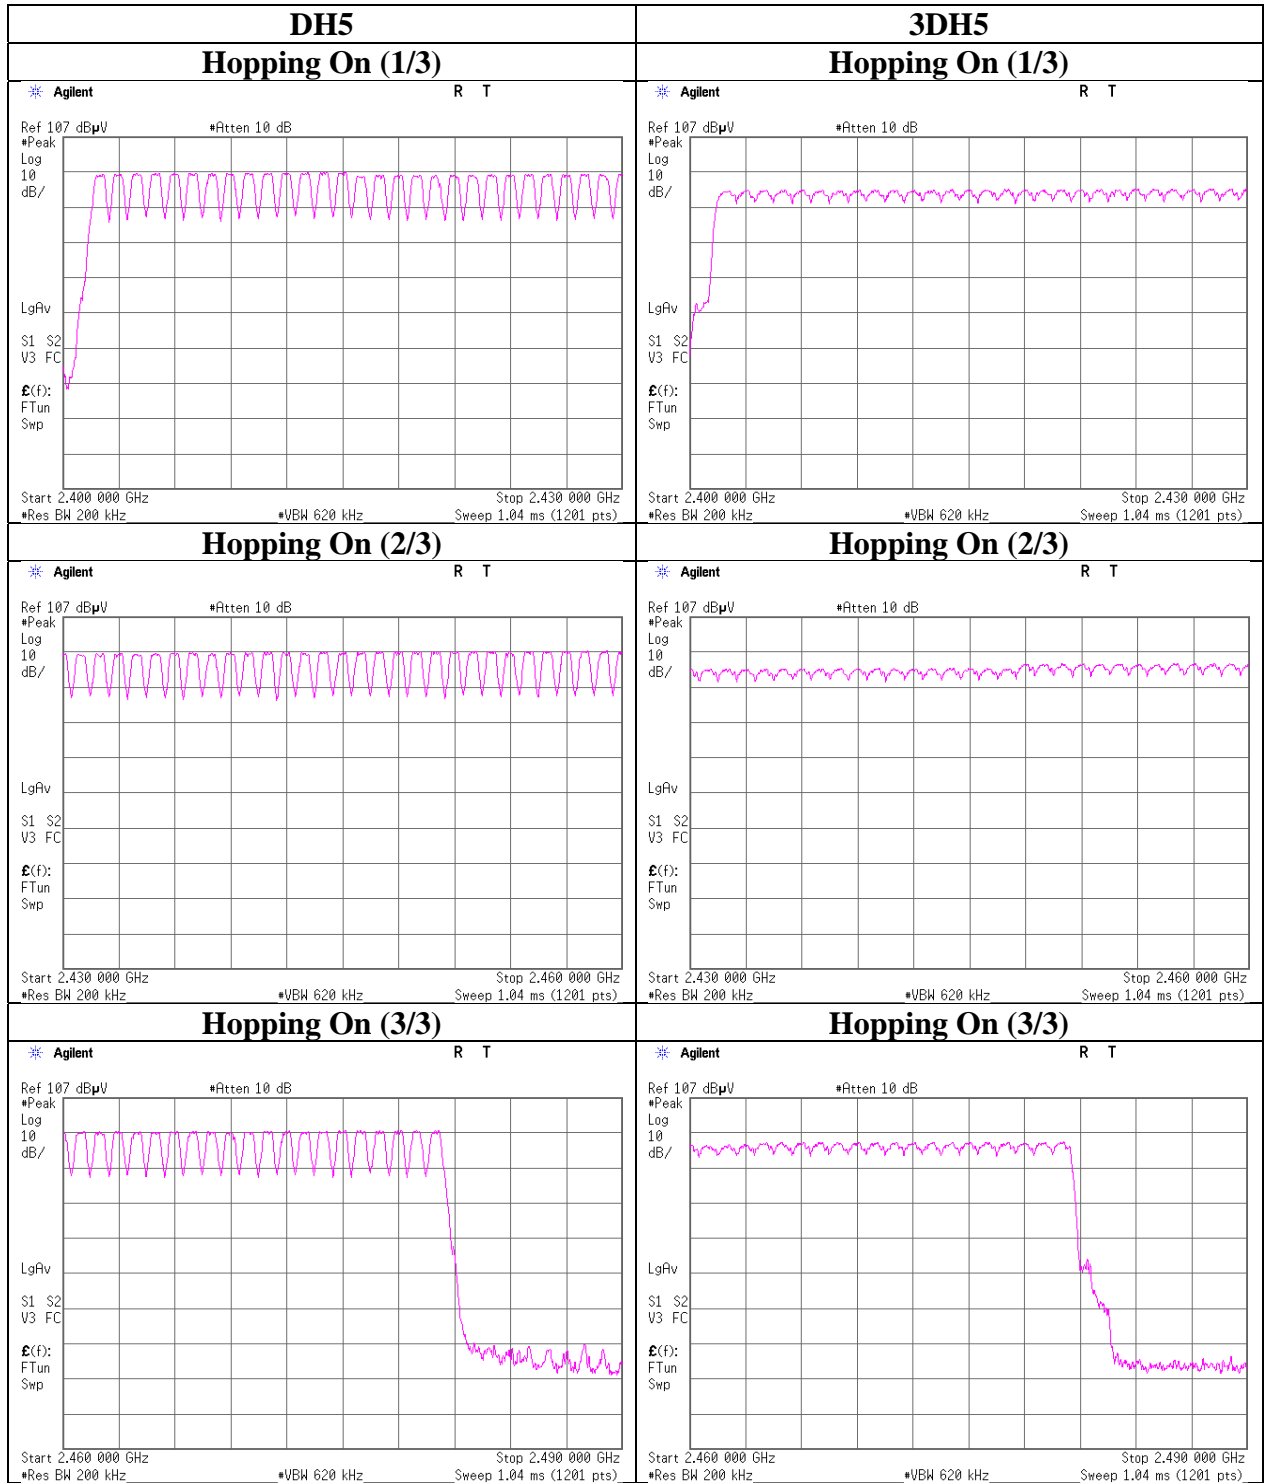

### Dwell time

Test place	Ise EMC Lab. No.6 Measurement Room
Date	June 6, 2022
Temperature / Humidity	24 deg. C / 42 % RH
Engineer	Tetsuro Yoshida
Mode	Tx, Hopping On

Mode	Number of transmission in a 31.6 (79 Hopping x 0.4) / 12.8 (32 Hopping x 0.4) second period	Length of transmission [ms]	Result [ms]	Limit [ms]
DH1	49.6 times / 5 s x 31.6 s = 314 times	0.450	141	400
DH3	25.4 times / 5 s x 31.6 s = 161 times	1.715	276	400
DH5	19.0 times / 5 s x 31.6 s = 121 times	2.963	359	400
3DH1	49.8 times / 5 s x 31.6 s = 315 times	0.454	143	400
3DH3	24.0 times / 5 s x 31.6 s = 152 times	1.710	258	400
3DH5	18.2 times / 5 s x 31.6 s = 116 times	2.960	343	400

Sample Calculation

Result = Number of transmission x Length of transmission

\*Average data of 5 tests.(except Inquiry)

Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	50	48	50	49	51	49.6
DH3	26	22	26	26	27	25.4
DH5	19	18	21	21	16	19
3DH1	50	48	48	51	52	49.8
3DH3	26	23	26	20	25	24
3DH5	19	19	21	19	13	18.2


Sample Calculation

Average = Summation (Sampling 1 to 5) / 5


This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in  $N \times 0.4$  s, where  $N$  is the number of channels being used in the hopping sequence ( $20 \leq N \leq 79$ ), is always less than 0.4 s regardless of packet size. This is confirmed in the test report for  $N = 79$ .



**Dwell time**

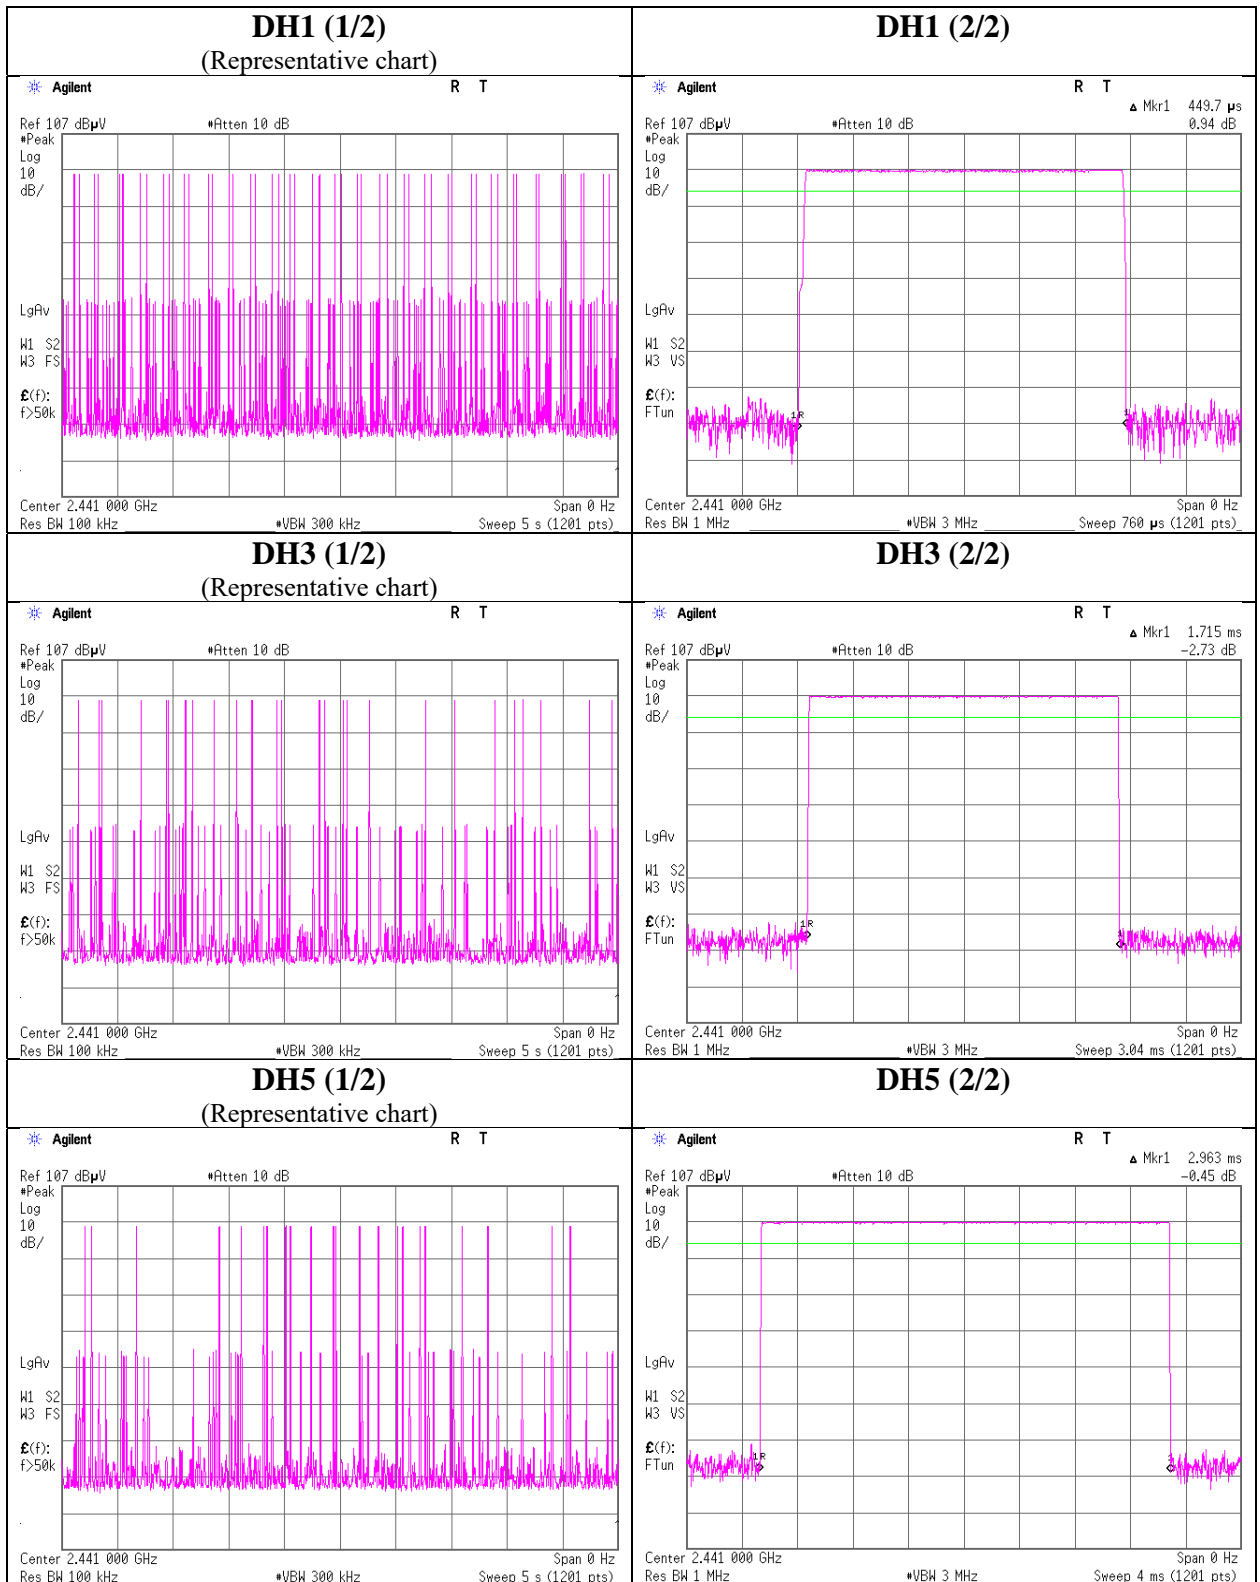

**Dwell time**

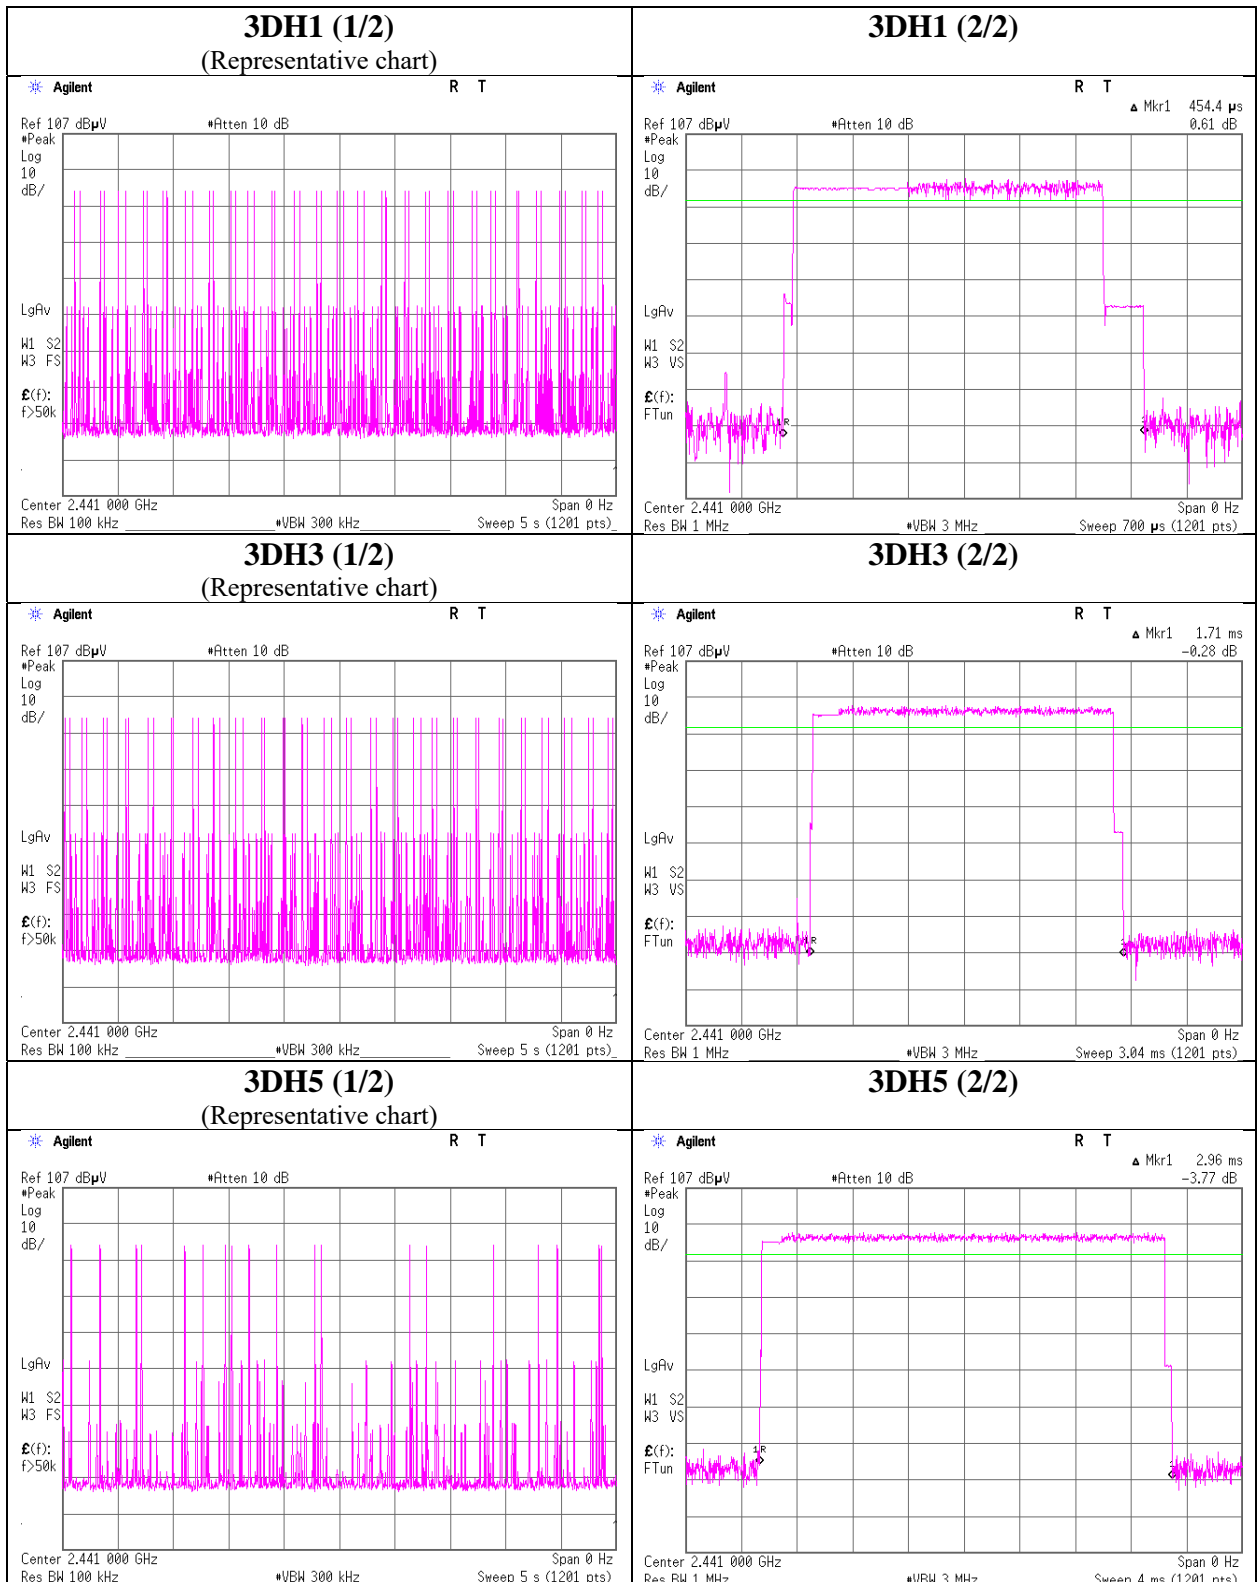

**Maximum Peak Output Power**

Test place                   Ise EMC Lab. No.6 Measurement Room  
Date                           June 6, 2022  
Temperature / Humidity    24 deg. C / 42 % RH  
Engineer                    Tetsuro Yoshida  
Mode                         Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
					Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
DH5	2402.0	-9.42	0.30	10.20	1.08	1.28	20.96	125	19.88	0.20	1.28	1.34	36.02	4000	34.74
DH5	2441.0	-7.67	0.30	10.20	2.83	1.92	20.96	125	18.13	0.20	3.03	2.01	36.02	4000	32.99
DH5	2480.0	-7.34	0.30	10.20	3.16	2.07	20.96	125	17.80	0.20	3.36	2.17	36.02	4000	32.66
2DH5	2402.0	-1.73	0.30	0.00	-1.43	0.72	20.96	125	22.39	0.20	-1.23	0.75	36.02	4000	37.25
2DH5	2441.0	-1.09	0.30	0.00	-0.79	0.83	20.96	125	21.75	0.20	-0.59	0.87	36.02	4000	36.61
2DH5	2480.0	0.54	0.30	0.00	0.84	1.21	20.96	125	20.12	0.20	1.04	1.27	36.02	4000	34.98
3DH5	2402.0	-1.48	0.30	0.00	-1.18	0.76	20.96	125	22.14	0.20	-0.98	0.80	36.02	4000	37.00
3DH5	2441.0	-0.84	0.30	0.00	-0.54	0.88	20.96	125	21.50	0.20	-0.34	0.92	36.02	4000	36.36
3DH5	2480.0	0.74	0.30	0.00	1.04	1.27	20.96	125	19.92	0.20	1.24	1.33	36.02	4000	34.78

Sample Calculation:  
 Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss  
 e.i.r.p. Result = Conducted Power Result + Antenna Gain

Test was not performed at AFH mode, because the decrease of number of channel (min: 20 ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

As this device had AFH mode and frequency separation could not meet the requirement of over 20 dB BW without 2/3 relaxation, 125 mW power limit was applied to it.

**Average Output Power**  
**(Reference data for RF Exposure)**

Test place                    Ise EMC Lab. No.6 Measurement Room  
Date                            June 6, 2022  
Temperature / Humidity    24 deg. C / 42 % RH  
Engineer                     Tetsuro Yoshida  
Mode                          Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
					[dBm]	[mW]		[dBm]	[mW]
DH5	2402.0	-10.70	0.30	9.98	-0.42	0.91	1.03	0.61	1.15
DH5	2441.0	-8.81	0.30	9.98	1.47	1.40	1.03	2.50	1.78
DH5	2480.0	-8.46	0.30	9.98	1.82	1.52	1.03	2.85	1.93
2DH5	2402.0	-5.45	0.30	0.00	-5.15	0.31	1.03	-4.12	0.39
2DH5	2441.0	-4.77	0.30	0.00	-4.47	0.36	1.03	-3.44	0.45
2DH5	2480.0	-2.97	0.30	0.00	-2.67	0.54	1.03	-1.64	0.69
3DH5	2402.0	-5.44	0.30	0.00	-5.14	0.31	1.03	-4.11	0.39
3DH5	2441.0	-4.76	0.30	0.00	-4.46	0.36	1.03	-3.43	0.45
3DH5	2480.0	-2.96	0.30	0.00	-2.66	0.54	1.03	-1.63	0.69

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss


Result (Burst power average) = Time average + Duty factor

\*The equipment and cables were not used for factor 0 dB of the data sheets.


### Burst Rate Confirmation

Test place	Ise EMC Lab. No.6 Measurement Room
Date	June 6, 2022
Temperature / Humidity	24 deg. C / 42 % RH
Engineer	Tetsuro Yoshida
Mode	Tx, Hopping Off


#### DH5

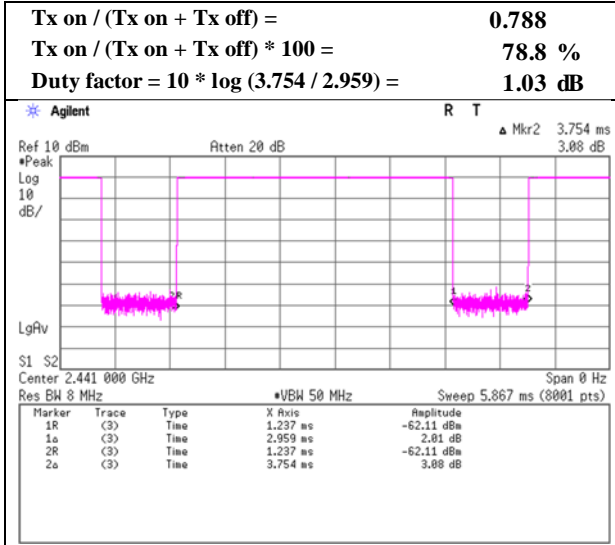

#### 2DH5

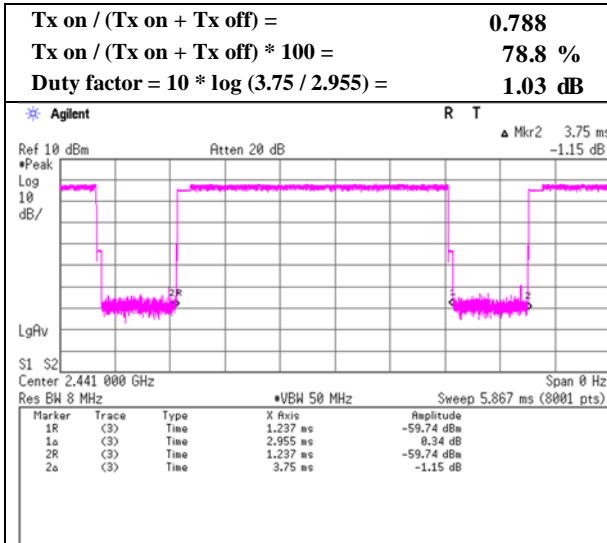

#### 3DH5

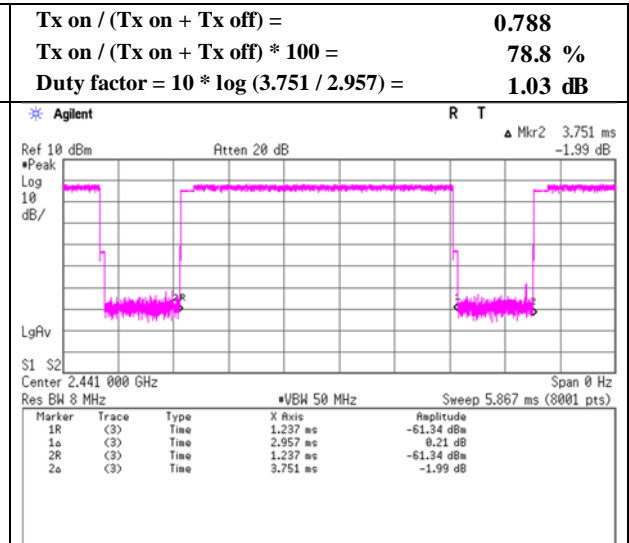

## Radiated Spurious Emission

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.3	No.3
Date	June 10, 2022	June 12, 2022
Temperature / Humidity	21 deg. C / 43 % RH	20 deg. C / 50 % RH
Engineer	Nachi Konegawa	Keiya Ido
	(1 GHz -10 GHz)	(10 GHz - 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz	

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2378.0	45.7	38.4	27.6	5.8	32.9	-	46.2	38.8	73.9	53.9	27.8	15.1	
Hori.	2390.0	42.7	33.8	27.6	5.8	32.9	1.0	43.1	35.3	73.9	53.9	30.8	18.6	*1)
Hori.	4804.0	41.5	33.3	31.5	8.1	32.0	-	49.1	41.0	73.9	53.9	24.8	12.9	Floor noise
Hori.	7206.0	42.9	34.5	35.7	9.7	32.8	-	55.5	47.2	73.9	53.9	18.4	6.8	Floor noise
Hori.	9608.0	44.4	32.2	38.7	10.3	33.5	-	59.9	47.7	73.9	53.9	14.0	6.2	Floor noise
Vert.	2378.0	44.7	37.0	27.6	5.8	32.9	-	45.1	37.5	73.9	53.9	28.8	16.4	
Vert.	2390.0	42.5	38.6	27.6	5.8	32.9	1.0	42.9	40.1	73.9	53.9	31.0	13.8	*1)
Vert.	4804.0	41.5	33.3	31.5	8.1	32.0	-	49.1	41.0	73.9	53.9	24.8	12.9	Floor noise
Vert.	7206.0	42.9	34.5	35.7	9.7	32.8	-	55.5	47.2	73.9	53.9	18.4	6.8	Floor noise
Vert.	9608.0	44.4	32.2	38.7	10.3	33.5	-	59.9	47.7	73.9	53.9	14.0	6.2	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

### 20dBc Data Sheet

Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2402.0	90.6	27.5	5.8	32.9	91.1	-	-	Carrier
Hori.	2400.0	40.4	27.5	5.8	32.9	40.8	71.1	30.3	
Vert.	2402.0	88.2	27.5	5.8	32.9	88.6	-	-	Carrier
Vert.	2400.0	38.3	27.5	5.8	32.9	38.7	68.6	29.9	



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Distance factor: 1 GHz - 10 GHz      20log(4 m / 3.0 m) = 2.5 dB

10 GHz - 26.5 GHz      20log(1.0 m / 3.0 m) = -9.5 dB

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	June 10, 2022
Temperature / Humidity	21 deg. C / 43 % RH
Engineer	Nachi Konegawa (1 GHz -10 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz

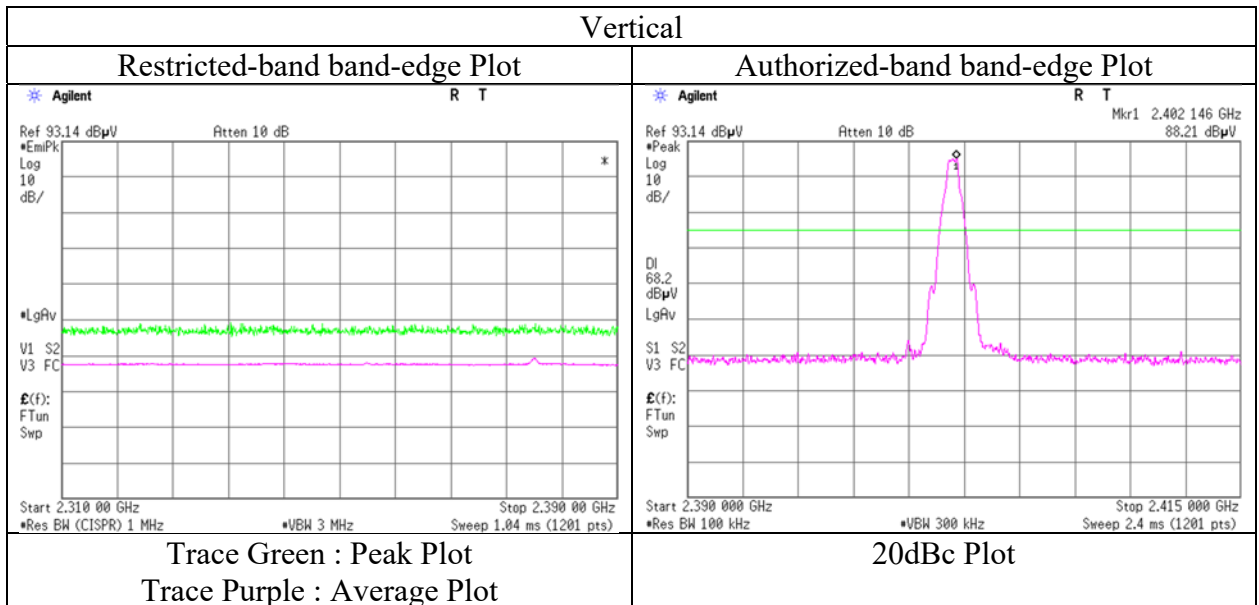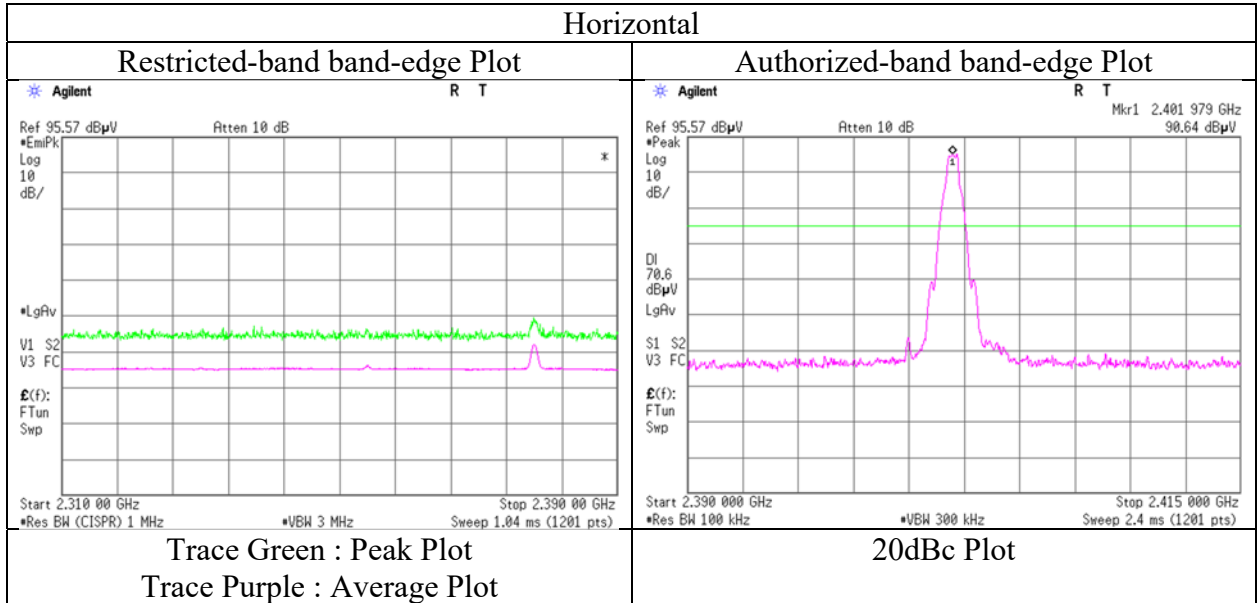

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.3	No.3
Date	June 10, 2022	June 12, 2022
Temperature / Humidity	21 deg. C / 43 % RH	20 deg. C / 50 % RH
Engineer	Nachi Konegawa	Keiya Ido
	(1 GHz -10 GHz)	(10 GHz - 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz	

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	4882.0	41.8	32.7	31.6	8.2	32.0	-	49.5	40.5	73.9	53.9	24.4	13.4	Floor noise
Hori.	7323.0	42.9	34.0	35.9	9.7	32.8	-	55.6	46.7	73.9	53.9	18.3	7.2	Floor noise
Hori.	9764.0	44.1	31.9	39.2	10.4	33.6	-	60.0	47.8	73.9	53.9	13.9	6.1	Floor noise
Vert.	4882.0	41.8	32.7	31.6	8.2	32.0	-	49.5	40.5	73.9	53.9	24.4	13.4	Floor noise
Vert.	7323.0	42.9	34.0	35.9	9.7	32.8	-	55.6	46.7	73.9	53.9	18.3	7.2	Floor noise
Vert.	9764.0	44.1	31.9	39.2	10.4	33.6	-	60.0	47.8	73.9	53.9	13.9	6.1	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz       $20\log(4\text{ m} / 3.0\text{ m}) = 2.5\text{ dB}$   
                                  10 GHz - 26.5 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$



## Radiated Spurious Emission

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.3	No.3
Date	June 10, 2022	June 12, 2022
Temperature / Humidity	21 deg. C / 43 % RH	20 deg. C / 50 % RH
Engineer	Nachi Konegawa	Keiya Ido
	(1 GHz -10 GHz)	(10 GHz - 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz	

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	30.4	24.2	-	18.5	7.1	32.2	-	17.5	-	40.0	-	22.5	-	
Hori.	60.0	42.1	-	7.8	7.6	32.2	-	25.3	-	40.0	-	14.7	-	
Hori.	93.2	34.0	-	9.2	8.1	32.1	-	19.1	-	43.5	-	24.4	-	
Hori.	128.8	31.3	-	13.8	8.5	32.1	-	21.4	-	43.5	-	22.1	-	
Hori.	173.6	31.2	-	16.0	8.9	32.1	-	24.1	-	43.5	-	19.4	-	
Hori.	285.4	45.2	-	13.9	9.9	32.0	-	37.0	-	46.0	-	9.0	-	
Hori.	2483.5	43.4	34.3	27.4	5.8	32.9	1.0	43.8	35.7	73.9	53.9	30.1	18.2	*1)
Hori.	4960.0	42.1	32.8	31.7	8.2	31.9	-	50.0	40.7	73.9	53.9	23.9	13.2	Floor noise
Hori.	7440.0	42.4	34.0	36.1	9.7	32.9	-	55.3	46.9	73.9	53.9	18.6	7.0	Floor noise
Hori.	9920.0	43.9	32.0	39.1	10.4	33.7	-	59.8	47.9	73.9	53.9	14.1	6.0	Floor noise
Vert.	30.3	26.6	-	18.5	7.1	32.2	-	20.0	-	40.0	-	20.0	-	
Vert.	59.4	50.7	-	8.0	7.6	32.2	-	34.1	-	40.0	-	5.9	-	
Vert.	123.8	35.5	-	13.3	8.4	32.1	-	25.1	-	43.5	-	18.4	-	
Vert.	160.8	30.0	-	15.6	8.8	32.1	-	22.3	-	43.5	-	21.2	-	
Vert.	173.9	28.7	-	16.0	8.9	32.1	-	21.6	-	43.5	-	21.9	-	
Vert.	289.9	34.3	-	13.9	9.9	32.0	-	26.1	-	46.0	-	19.9	-	
Vert.	2483.5	43.2	33.9	27.4	5.8	32.9	1.0	43.6	35.4	73.9	53.9	30.3	18.6	*1)
Vert.	4960.0	42.1	32.8	31.7	8.2	31.9	-	50.0	40.7	73.9	53.9	23.9	13.2	Floor noise
Vert.	7440.0	42.4	34.0	36.1	9.7	32.9	-	55.3	46.9	73.9	53.9	18.6	7.0	Floor noise
Vert.	9920.0	43.9	32.0	39.1	10.4	33.7	-	59.8	47.9	73.9	53.9	14.1	6.0	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:      1 GHz - 10 GHz      20log (4 m / 3.0 m) = 2.5 dB  
                                  10 GHz - 26.5 GHz      20log (1.0 m / 3.0 m) = -9.5 dB

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

Test place                    Ise EMC Lab.  
Semi Anechoic Chamber    No.3  
Date                            June 10, 2022  
Temperature / Humidity    21 deg. C / 43 % RH  
Engineer                      Nachi Konegawa  
                                      (1 GHz -10 GHz)  
Mode                            Tx, Hopping Off, DH5 2480 MHz

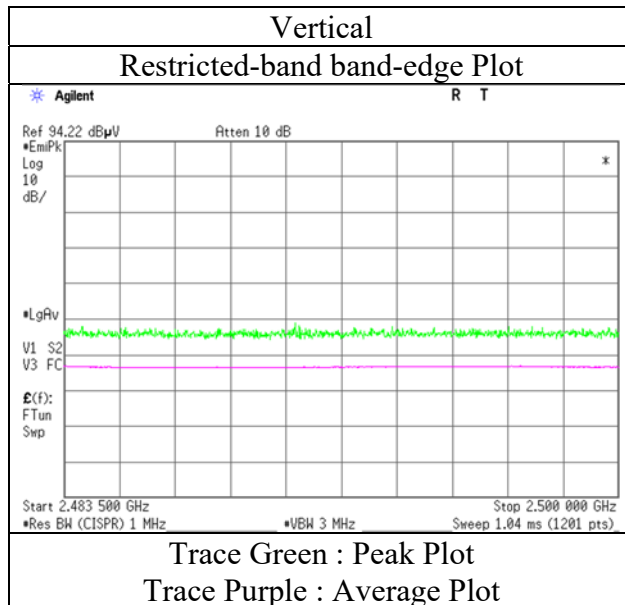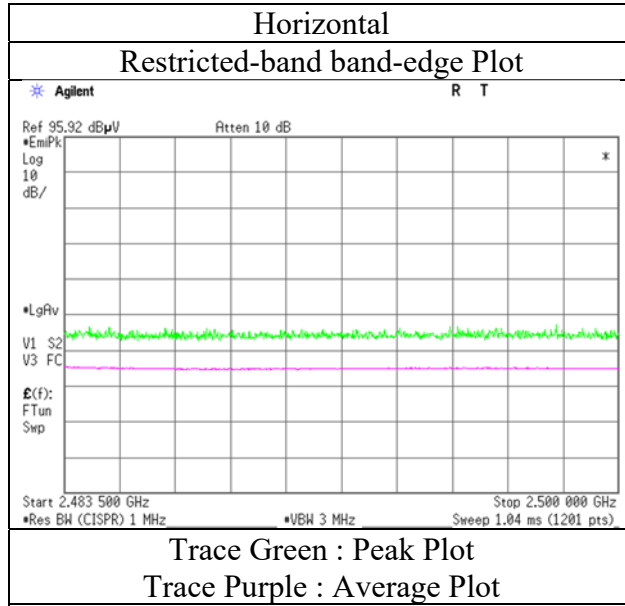

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	June 10, 2022
Temperature / Humidity	21 deg. C / 43 % RH
Engineer	Nachi Konegawa (1 GHz -10 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2378.0	44.6	36.9	27.6	5.8	32.9	-	45.1	37.4	73.9	53.9	28.9	16.5	
Hori.	2390.0	42.9	33.9	27.6	5.8	32.9	1.0	43.4	35.3	73.9	53.9	30.5	18.6	*1)
Hori.	4804.0	41.5	33.3	31.5	8.1	32.0	-	49.1	41.0	73.9	53.9	24.8	12.9	Floor noise
Hori.	7206.0	42.9	34.5	35.7	9.7	32.8	-	55.5	47.2	73.9	53.9	18.4	6.8	Floor noise
Hori.	9608.0	44.4	32.2	38.7	10.3	33.5	-	59.9	47.7	73.9	53.9	14.0	6.2	Floor noise
Vert.	2378.0	44.5	35.9	27.6	5.8	32.9	-	45.0	36.4	73.9	53.9	28.9	17.5	
Vert.	2390.0	42.2	33.6	27.6	5.8	32.9	1.0	42.6	35.0	73.9	53.9	31.3	18.9	*1)
Vert.	4804.0	41.5	33.3	31.5	8.1	32.0	-	49.1	41.0	73.9	53.9	24.8	12.9	Floor noise
Vert.	7206.0	42.9	34.5	35.7	9.7	32.8	-	55.5	47.2	73.9	53.9	18.4	6.8	Floor noise
Vert.	9608.0	44.4	32.2	38.7	10.3	33.5	-	59.9	47.7	73.9	53.9	14.0	6.2	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

### 20dBc Data Sheet

Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2402.0	87.2	27.5	5.8	32.9	87.6	-	-	Carrier
Hori.	2400.0	39.7	27.5	5.8	32.9	40.1	67.6	27.5	
Vert.	2402.0	86.1	27.5	5.8	32.9	86.5	-	-	Carrier
Vert.	2400.0	38.4	27.5	5.8	32.9	38.8	66.5	27.7	



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Distance factor: 1 GHz - 10 GHz      20log(4 m / 3.0 m) = 2.5 dB

10 GHz - 26.5 GHz      20log(1.0 m / 3.0 m) = -9.5 dB

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	June 10, 2022
Temperature / Humidity	21 deg. C / 43 % RH
Engineer	Nachi Konegawa (1 GHz -10 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz

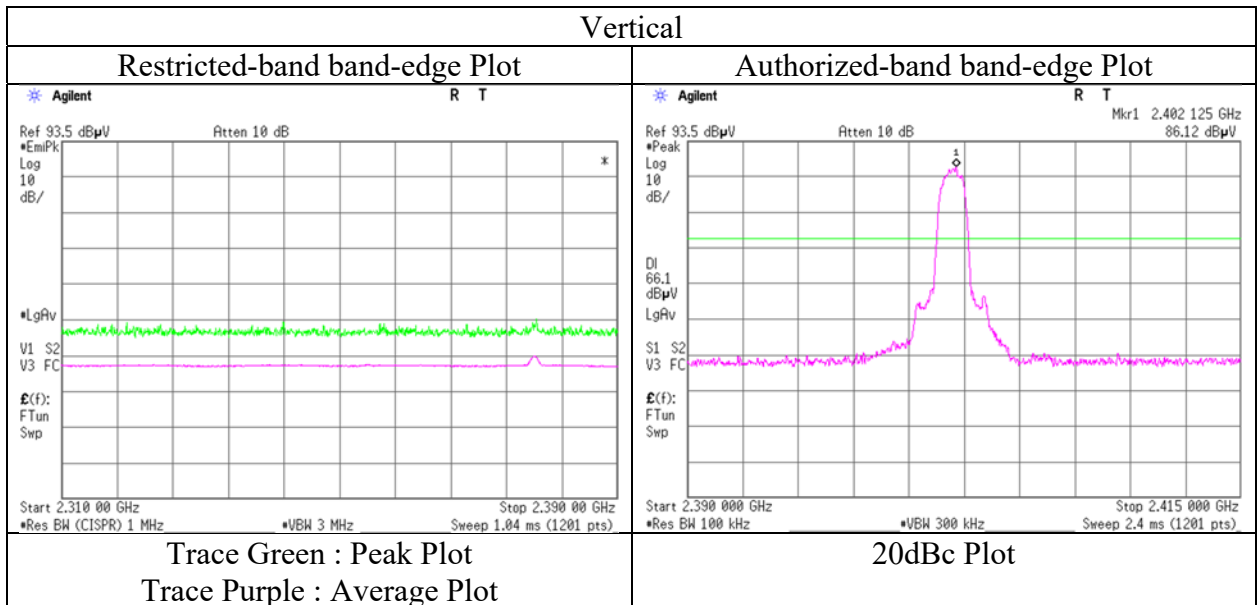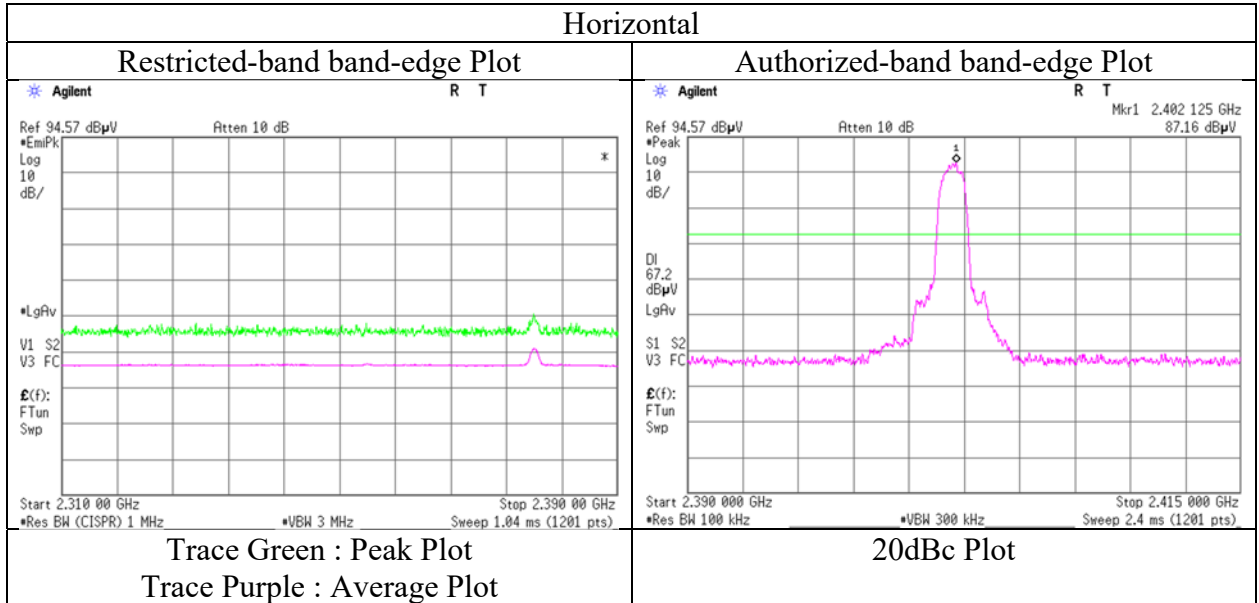

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	June 10, 2022
Temperature / Humidity	21 deg. C / 43 % RH
Engineer	Nachi Konegawa (1 GHz -10 GHz)
Mode	Tx, Hopping Off, 3DH5 2441 MHz

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	4882.0	41.8	32.7	31.6	8.2	32.0	-	49.5	40.5	73.9	53.9	24.4	13.4	Floor noise
Hori.	7323.0	42.9	34.0	35.9	9.7	32.8	-	55.6	46.7	73.9	53.9	18.3	7.2	Floor noise
Hori.	9764.0	44.1	31.9	39.2	10.4	33.6	-	60.0	47.8	73.9	53.9	13.9	6.1	Floor noise
Vert.	4882.0	41.8	32.7	31.6	8.2	32.0	-	49.5	40.5	73.9	53.9	24.4	13.4	Floor noise
Vert.	7323.0	42.9	34.0	35.9	9.7	32.8	-	55.6	46.7	73.9	53.9	18.3	7.2	Floor noise
Vert.	9764.0	44.1	31.9	39.2	10.4	33.6	-	60.0	47.8	73.9	53.9	13.9	6.1	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz       $20\log(4\text{ m} / 3.0\text{ m}) = 2.5\text{ dB}$   
                                  10 GHz - 26.5 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	June 10, 2022
Temperature / Humidity	21 deg. C / 43 % RH
Engineer	Nachi Konegawa (1 GHz -10 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2483.5	44.2	35.1	27.4	5.8	32.9	1.0	44.6	36.6	73.9	53.9	29.3	17.3	*1)
Hori.	4960.0	42.1	32.8	31.7	8.2	31.9	-	50.0	40.7	73.9	53.9	23.9	13.2	Floor noise
Hori.	7440.0	42.4	34.0	36.1	9.7	32.9	-	55.3	46.9	73.9	53.9	18.6	7.0	Floor noise
Hori.	9920.0	43.9	32.0	39.1	10.4	33.7	-	59.8	47.9	73.9	53.9	14.1	6.0	Floor noise
Vert.	2483.5	43.3	34.6	27.4	5.8	32.9	1.0	43.7	36.0	73.9	53.9	30.2	17.9	*1)
Vert.	4960.0	42.1	32.8	31.7	8.2	31.9	-	50.0	40.7	73.9	53.9	23.9	13.2	Floor noise
Vert.	7440.0	42.4	34.0	36.1	9.7	32.9	-	55.3	46.9	73.9	53.9	18.6	7.0	Floor noise
Vert.	9920.0	43.9	32.0	39.1	10.4	33.7	-	59.8	47.9	73.9	53.9	14.1	6.0	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	20log (4 m / 3.0 m) = 2.5 dB
	10 GHz - 26.5 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**



Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	June 10, 2022
Temperature / Humidity	21 deg. C / 43 % RH
Engineer	Nachi Konegawa (1 GHz -10 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz

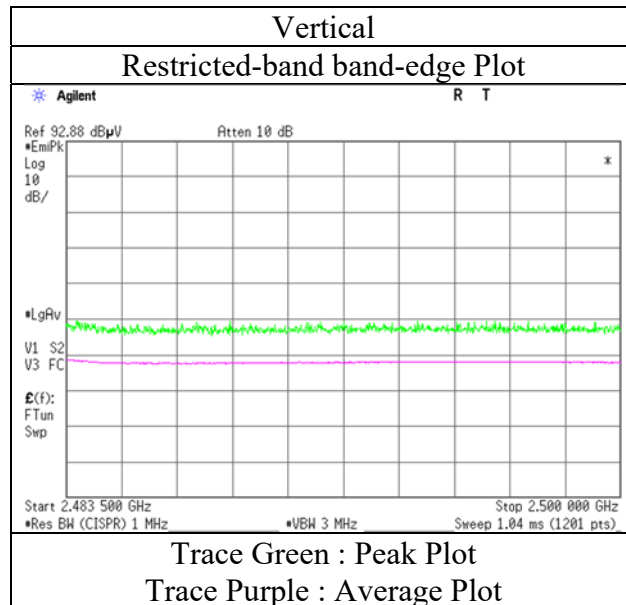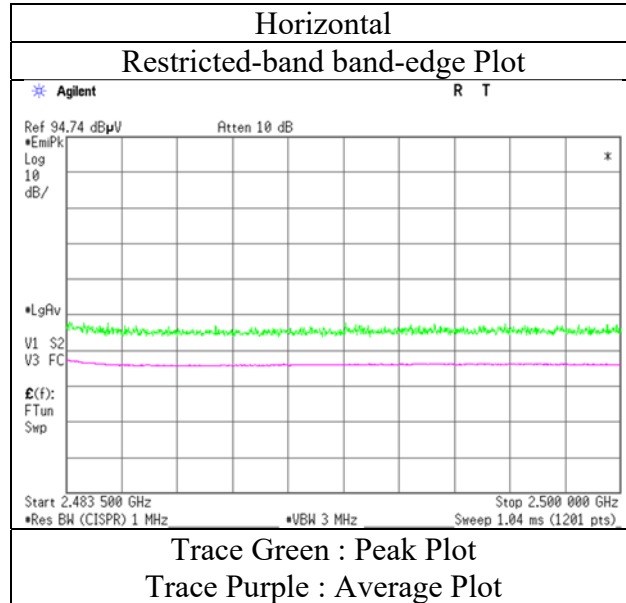

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

**Radiated Spurious Emission**  
**(Plot data, Worst case mode for Maximum Peak Output Power)**

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	June 10, 2022	June 12, 2022	June 12, 2022
Temperature / Humidity	21 deg. C / 43 % RH	20 deg. C / 50 % RH	21 deg. C / 52 % RH
Engineer	Nachi Konegawa	Keiya Ido	Hiroki Numata
Mode	(1 GHz -10 GHz) (10 GHz - 26.5 GHz) (Below 1 GHz)		
	Tx, Hopping Off, DH5 2480 MHz		

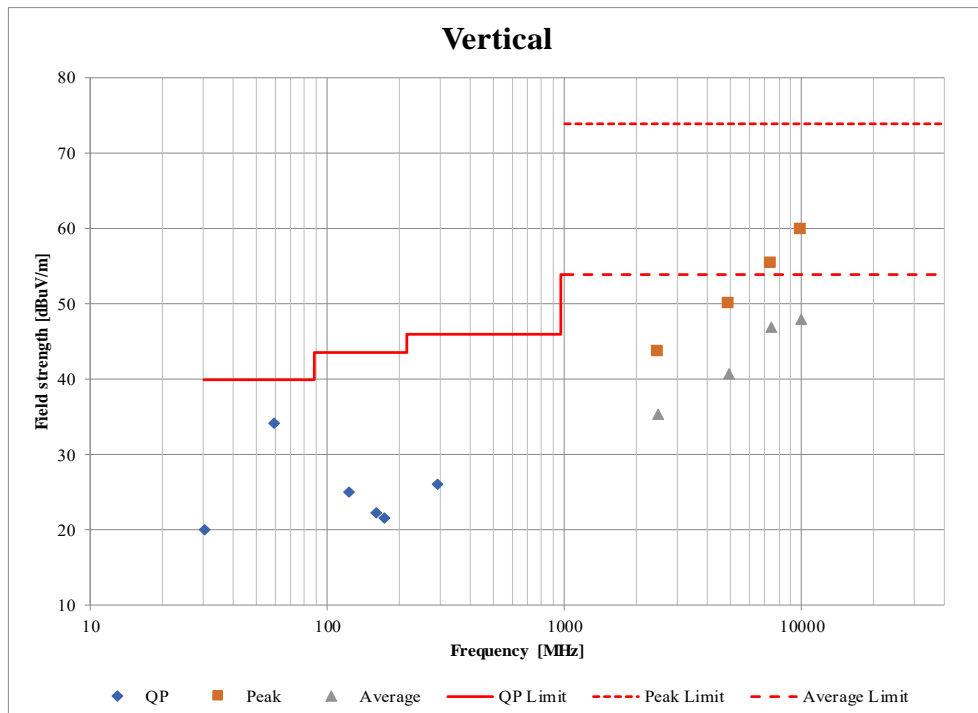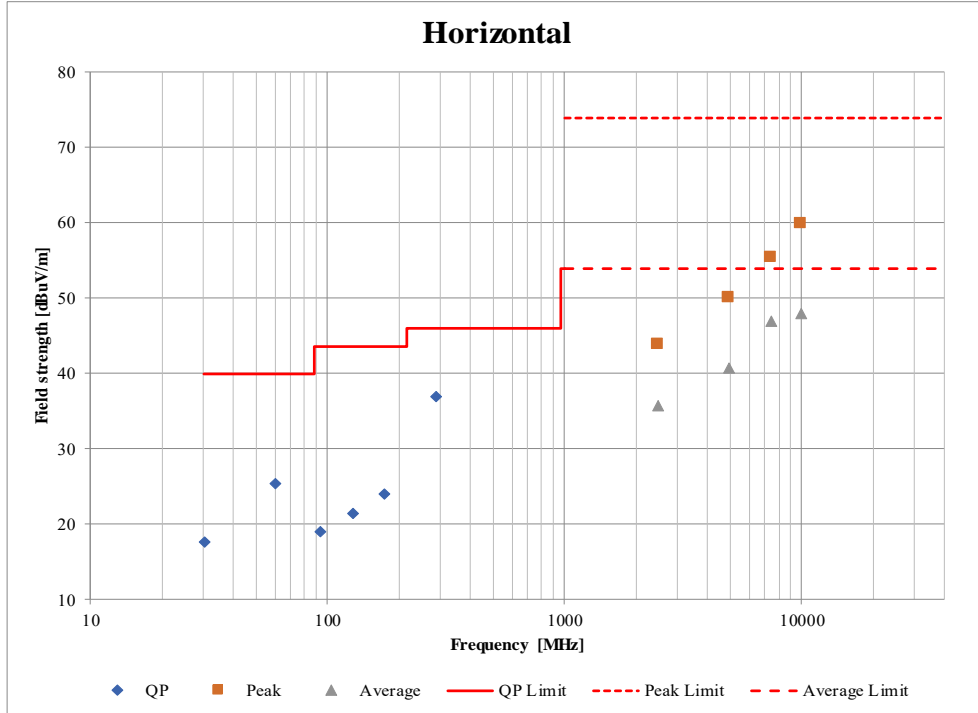



\*These plots data contains sufficient number to show the trend of characteristic features for EUT.



## Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Date	June 7, 2022
Temperature / Humidity	22 deg. C / 44 % RH
Engineer	Tetsuro Yoshida
Mode	Tx, Hopping Off, DH5



### 2402 MHz

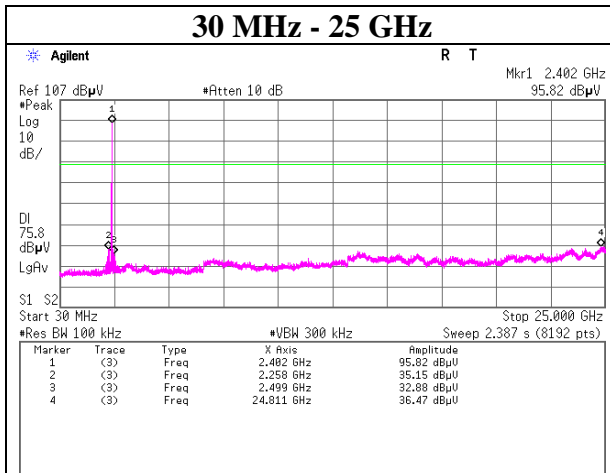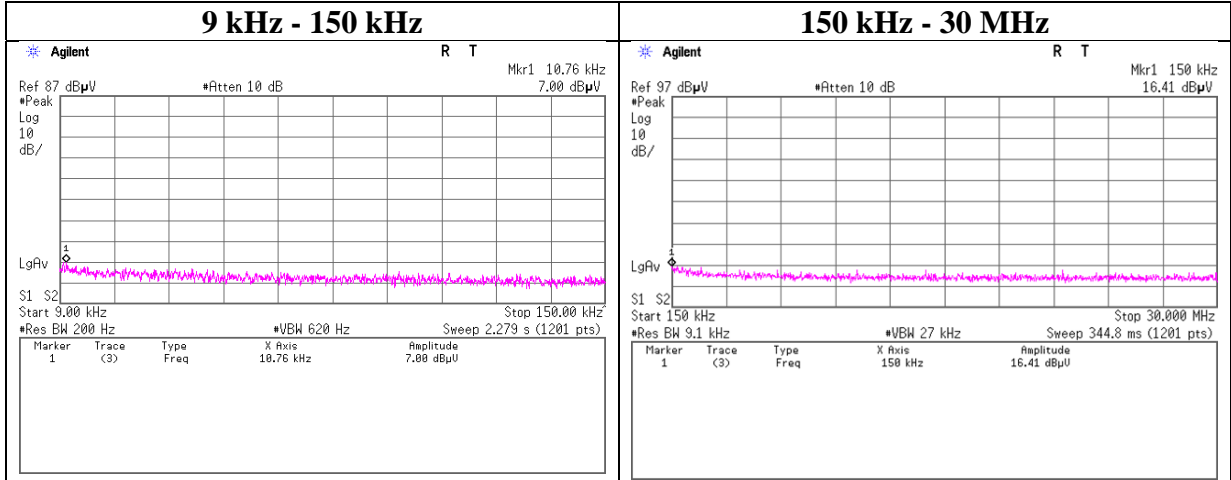

### Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Date	June 7, 2022
Temperature / Humidity	22 deg. C / 44 % RH
Engineer	Tetsuro Yoshida
Mode	Tx, Hopping Off, DH5



#### 2441 MHz

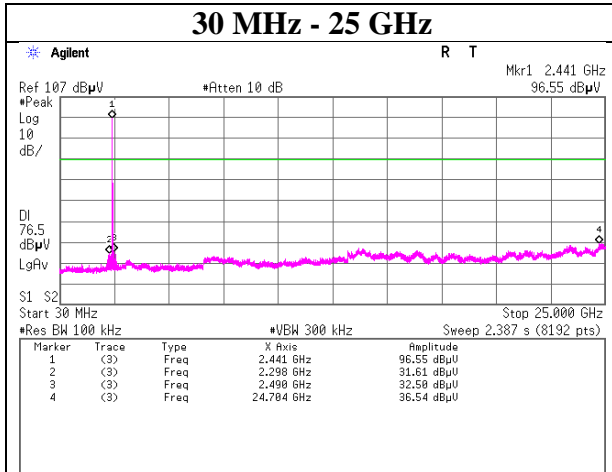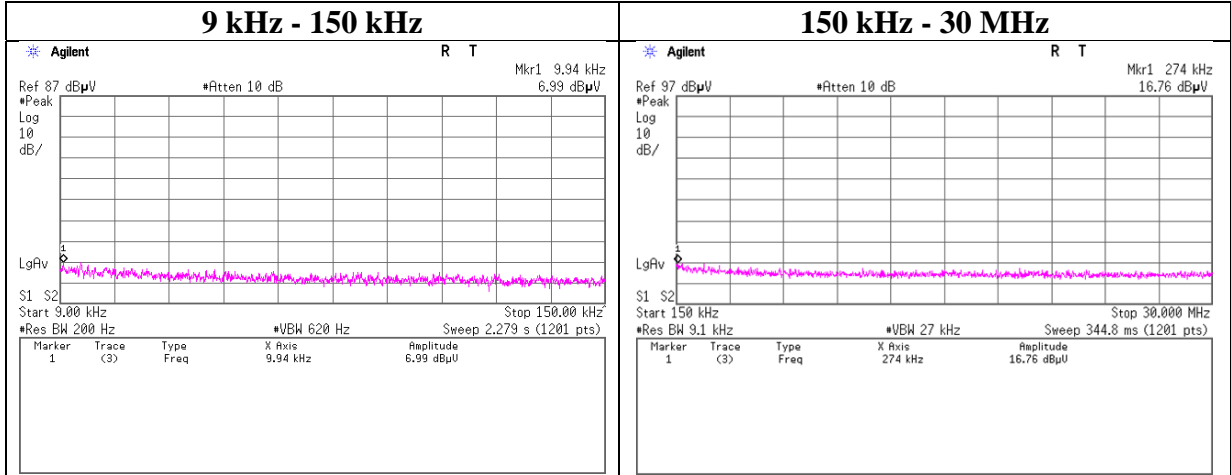

### Conducted Spurious Emission

Test place                    Ise EMC Lab. No.6 Measurement Room  
 Date                            June 7, 2022  
 Temperature / Humidity    22 deg. C / 44 % RH  
 Engineer                      Tetsuro Yoshida  
 Mode                            Tx, Hopping Off, DH5



#### 2480 MHz

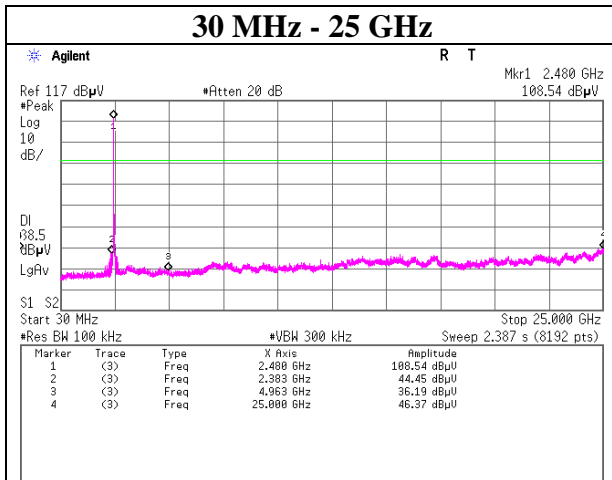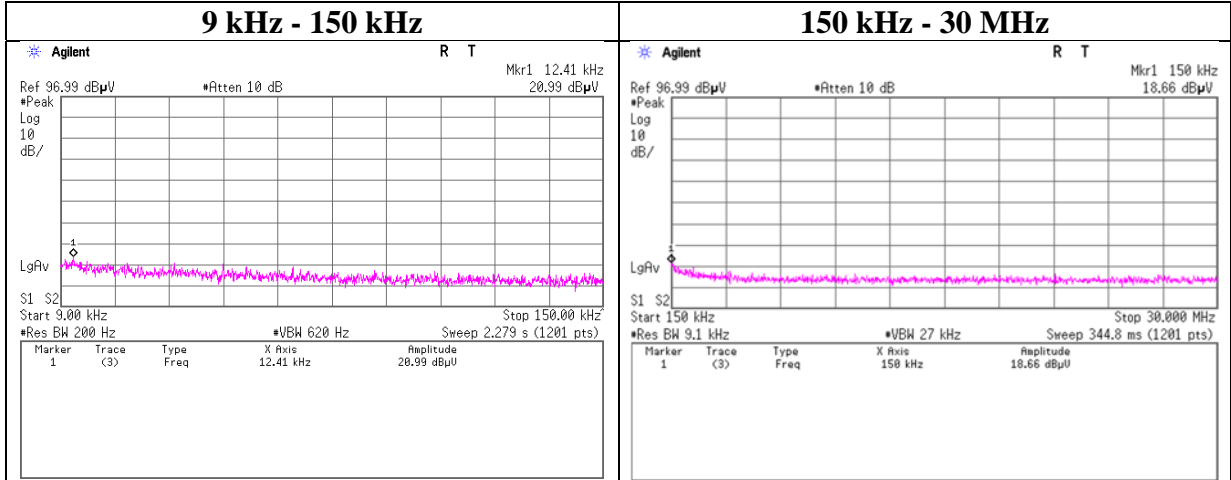

### Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Date	June 7, 2022
Temperature / Humidity	22 deg. C / 44 % RH
Engineer	Tetsuro Yoshida
Mode	Tx, Hopping Off, 3DH5



#### 2402 MHz

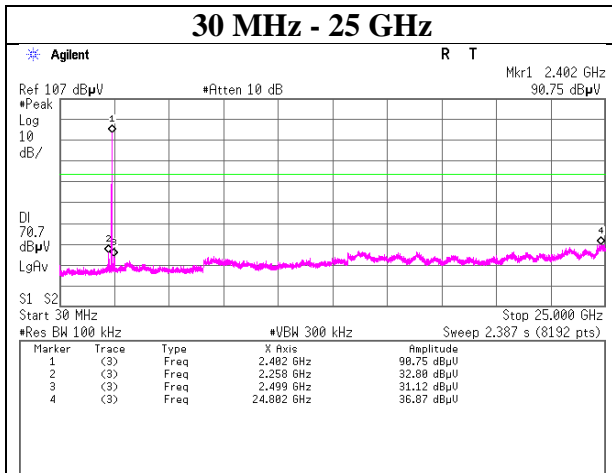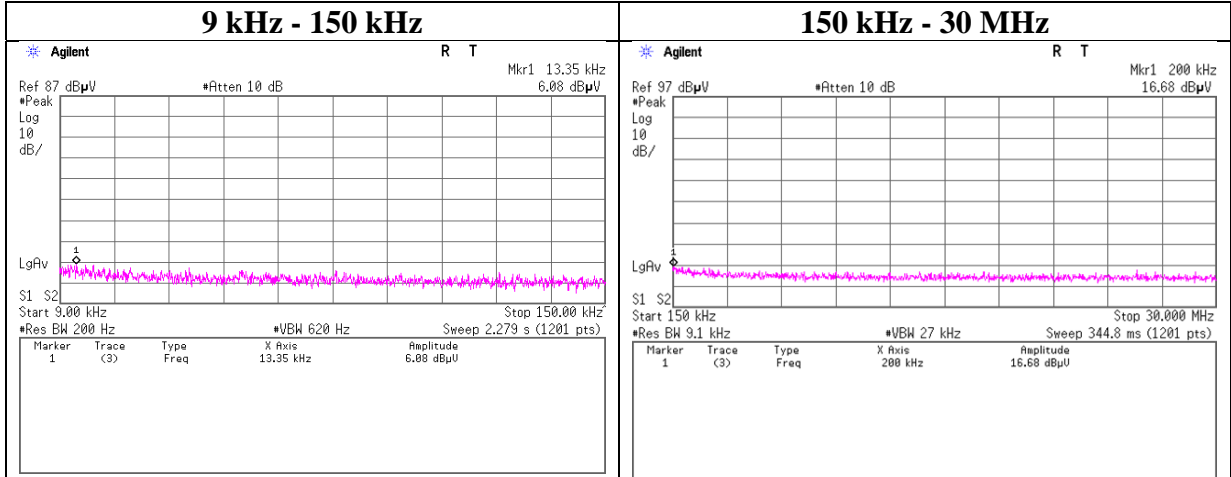

### Conducted Spurious Emission

Test place                    Ise EMC Lab. No.6 Measurement Room  
 Date                            June 7, 2022  
 Temperature / Humidity    22 deg. C / 44 % RH  
 Engineer                      Tetsuro Yoshida  
 Mode                            Tx, Hopping Off, 3DH5



#### 2441 MHz

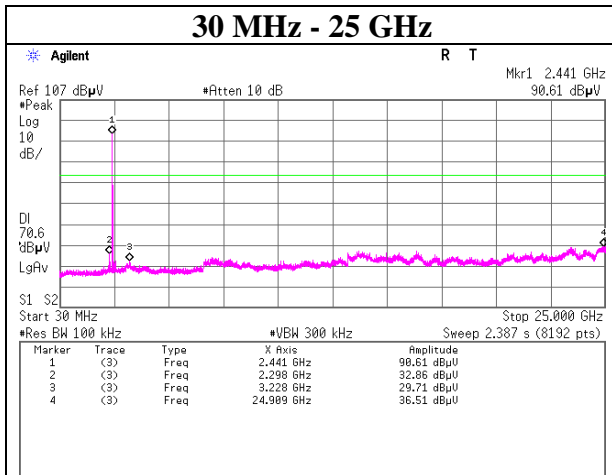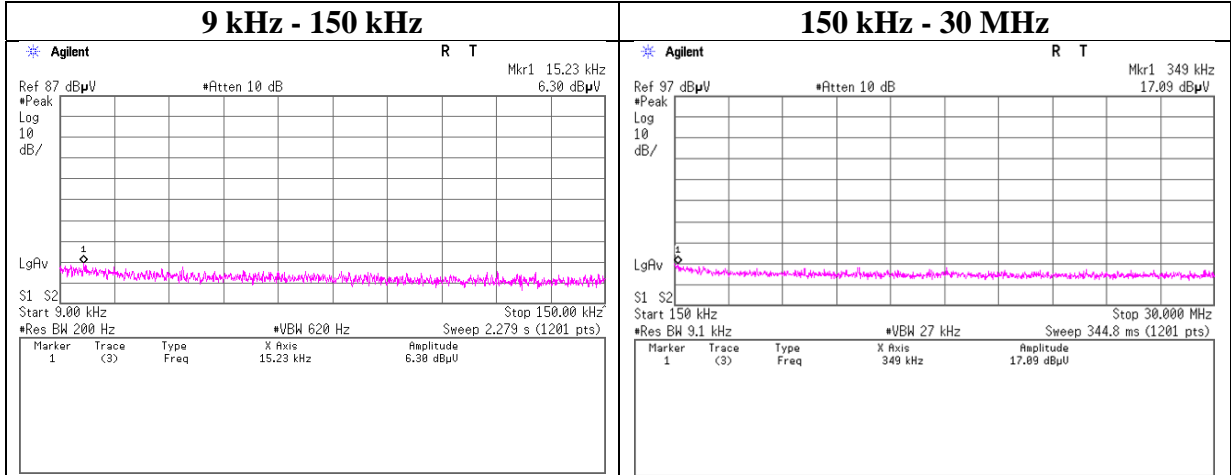

### Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Date	June 7, 2022
Temperature / Humidity	22 deg. C / 44 % RH
Engineer	Tetsuro Yoshida
Mode	Tx, Hopping Off, 3DH5


#### 2480 MHz

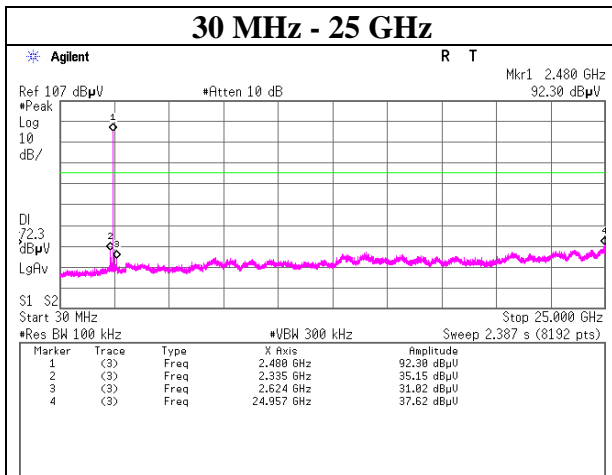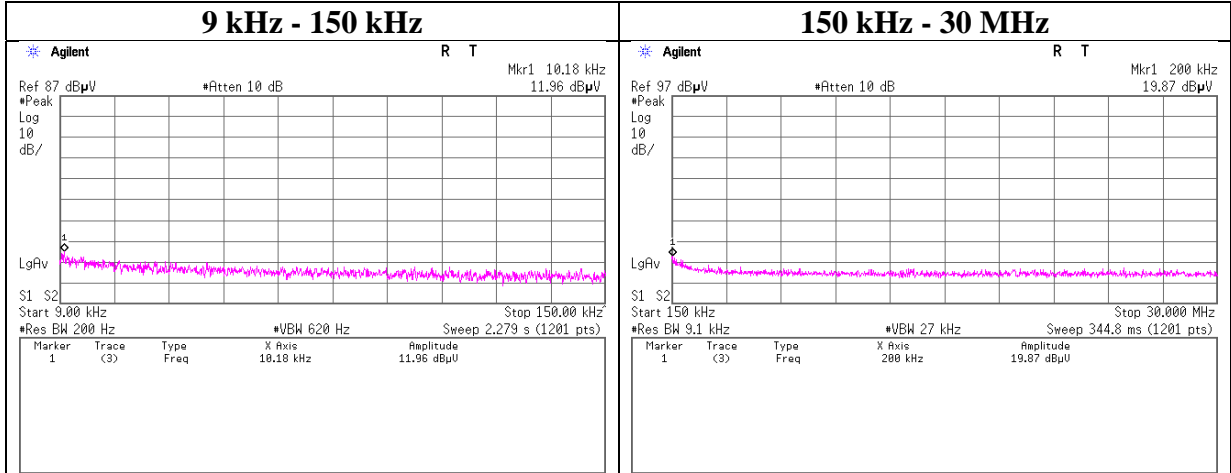


### Conducted Emission Band Edge compliance

Test place : Ise EMC Lab. No.6 Measurement Room  
 Date : June 6, 2022  
 Temperature / Humidity : 24 deg. C / 42 % RH  
 Engineer : Tetsuro Yoshida  
 Mode : Tx DH5

#### Hopping On

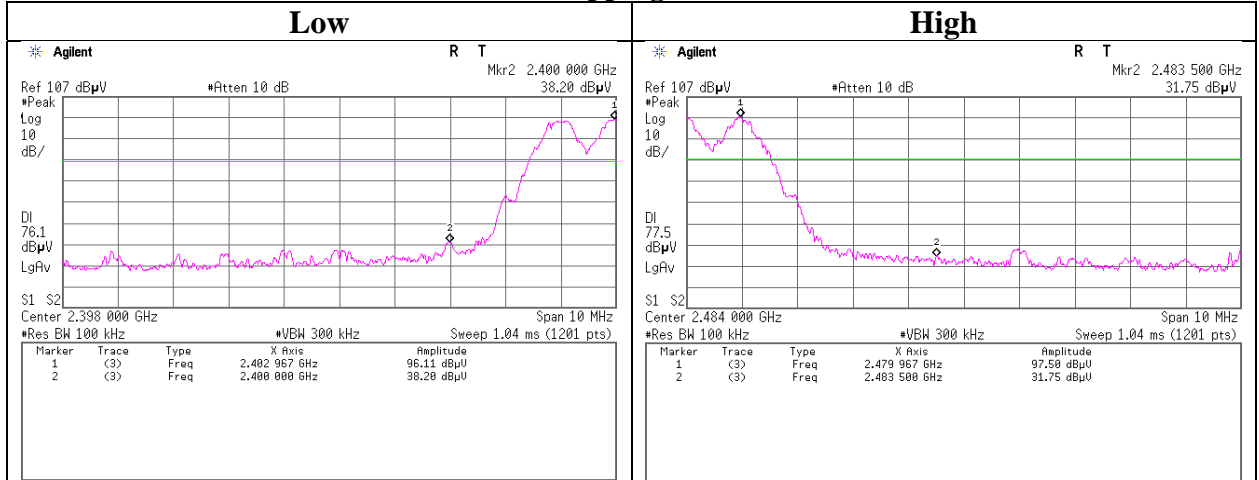


#### Hopping Off

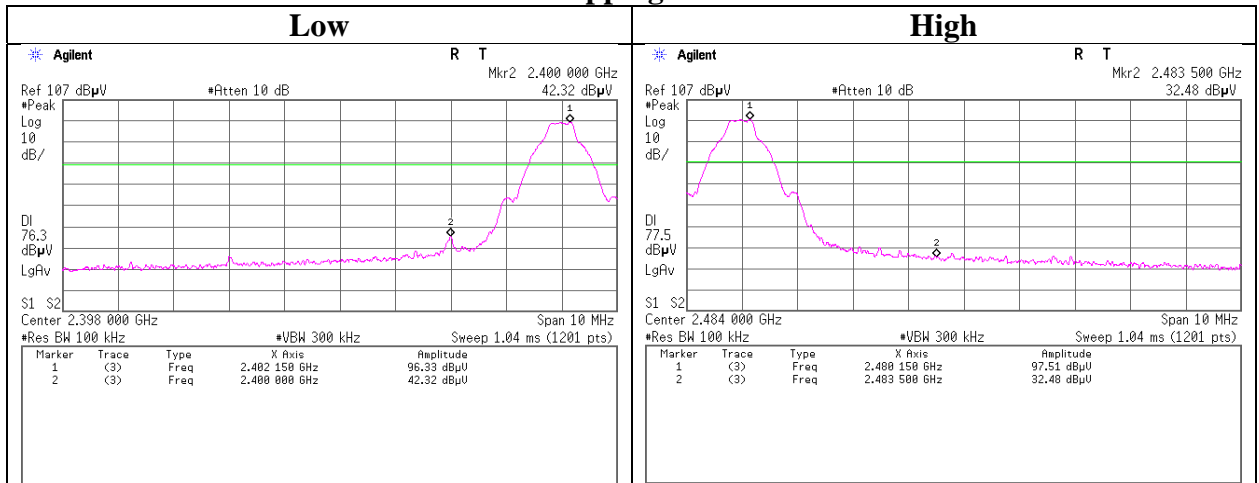


### Conducted Emission Band Edge compliance

Test place : Ise EMC Lab. No.6 Measurement Room  
 Date : June 6, 2022  
 Temperature / Humidity : 24 deg. C / 42 % RH  
 Engineer : Tetsuro Yoshida  
 Mode : Tx 3DH5

#### Hopping On

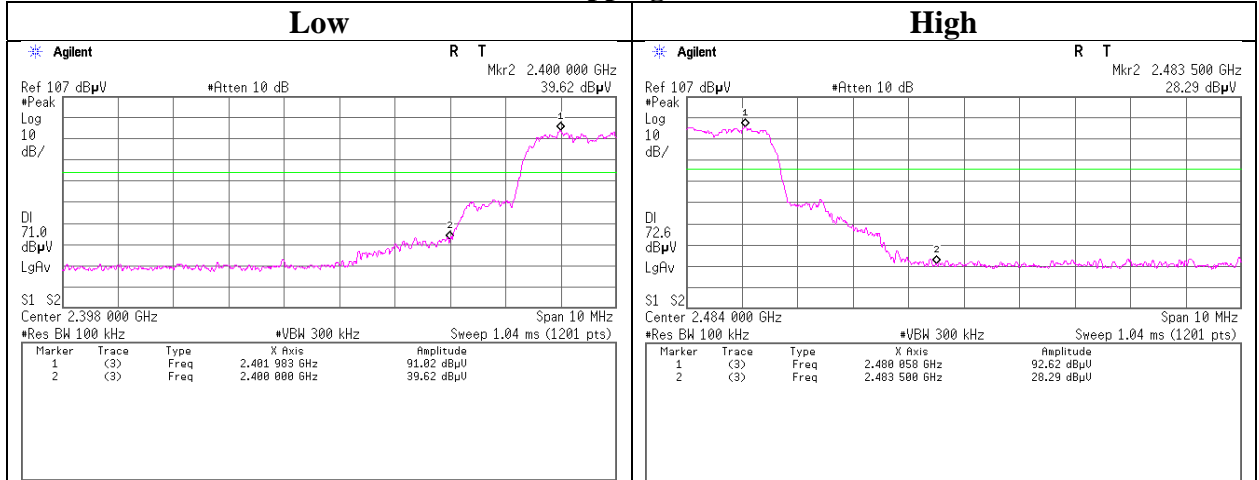

#### Hopping Off

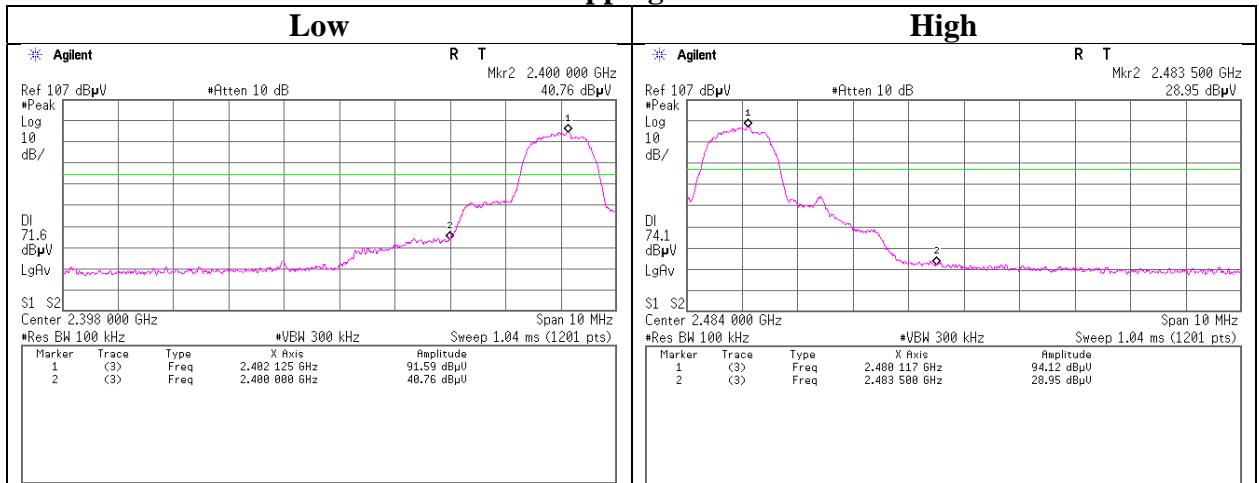



**APPENDIX 2: Test Instruments****Test Equipment (1/2)**

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
CE	COTS-MEMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
CE	MAEC-03	142008	AC3_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	05/23/2022	24
CE	MAT-67	141248	Attenuator	JFW Industries, Inc.	50FP-013H2 N	-	12/17/2021	12
CE	MCC-112	141216	Coaxial cable	Fujikura/Suhner/TSJ	5D-2W/SFM14/sucoform141-PE/421-010/RFM-E321(SW)	-/00640	07/19/2021	12
CE	MJM-16	142183	Measure	KOMELON	KMC-36	-	-	-
CE	MLS-26	141538	LISN(AMN)	Schwarzbeck Mess-Elektronik OHG	NSLK8127	8127-732	07/20/2021	12
CE	MMM-08	141532	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201197	01/16/2022	12
CE	MOS-13	141554	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1301	01/10/2022	12
CE	MTR-09	141950	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	10/14/2021	12
RE	COTS-MEMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAEC-03	142008	AC3_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	05/23/2022	24
RE	MAEC-03-SVSWR	142013	AC3_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	04/01/2021	24
RE	MAT-95	142314	Attenuator	Pasternack Enterprises	PE7390-6	D/C 1504	06/13/2022	12
RE	MBA-03	141424	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103+BBA9106	1915	08/21/2021	12
RE	MBA-05	141425	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103+BBA9106	VHA 91031302	08/28/2021	12
RE	MCC-231	177964	Microwave Cable	Junkosha INC.	MMX221	1901S329(1m)/1902S579(5m)	03/15/2022	12
RE	MCC-51	141323	Coaxial cable	UL Japan	-	-	07/19/2021	12
RE	MHA-16	141513	Horn Antenna 15-40GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9170	BBHA9170306	06/07/2021	12
RE	MHA-20	141507	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	258	11/09/2021	12
RE	MHF-25	141232	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	001	09/30/2021	12
RE	MJM-16	142183	Measure	KOMELON	KMC-36	-	-	-
RE	MLA-22	141266	Logperiodic Antenna(200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-191	08/21/2021	12
RE	MMM-08	141532	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201197	01/16/2022	12
RE	MOS-13	141554	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1301	01/10/2022	12
RE	MPA-11	141580	MicroWave System Amplifier	Keysight Technologies Inc	83017A	MY39500779	03/17/2022	12
RE	MPA-13	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/25/2022	12
RE	MSA-04	141885	Spectrum Analyzer	Keysight Technologies Inc	E4448A	US44300523	11/10/2021	12
RE	MTR-08	141949	Test Receiver	Rohde & Schwarz	ESCI	100767	08/05/2021	12

**Test Equipment (2/2)**

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	MAT-26	141244	Attenuator(10dB)	Weinschel - API Technologies Corp	WA8-10-34	A198	02/25/2022	12
AT	MAT-57	141333	Attenuator(10dB)	Suhner	6810.19.A	-	12/17/2021	12
AT	MCC-138	141410	Microwave cable	Huber+Suhner	SUCOFLEX 102	37953/2	09/30/2021	12
AT	MCC-178	141227	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S305	03/15/2022	12
AT	MCC-64	141327	Coaxial Cable	UL Japan	-	-	02/28/2022	12
AT	MMM-10	141545	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201148	01/16/2022	12
AT	MOS-15	141562	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0010	01/10/2022	12
AT	MPM-13	141810	Power Meter	Anritsu Corporation	ML2495A	824014	12/22/2021	12
AT	MPSE-18	141832	Power sensor	Anritsu Corporation	MA2411B	738174	12/22/2021	12
AT	MSA-03	141884	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY44020357	03/31/2022	12

\*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:           **CE: Conducted Emission**  
                          **RE: Radiated Emission**  
                          **AT: Antenna Terminal Conducted**