



# RF TEST REPORT

**Applicant** ZTE Corporation  
**FCC ID** SRQ-MF289F  
**Product** MF289F  
**Model** MF289F  
**Report No.** R2102A0149-R4  
**Issue Date** July 7, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Peng Tao*

Prepared by: Peng Tao

*Kai Xu*

Approved by: Kai Xu

---

**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the test report.....	4
1.2. Test facility .....	4
1.3. Testing Location.....	4
2. General Description of Equipment under Test.....	5
2.1. Applicant and Manufacturer Information.....	5
2.2. General information.....	5
3. Applied Standards .....	6
4. Test Configuration .....	7
5. Test Case Results .....	9
5.1. Maximum output power .....	9
5.2. 99% Bandwidth and 6dB Bandwidth .....	13
5.3. Band Edge .....	19
5.4. Power Spectral Density .....	22
5.5. Spurious RF Conducted Emissions.....	35
5.6. Unwanted Emission .....	39
5.7. Conducted Emission .....	71
6. Main Test Instruments.....	74
ANNEX A: The EUT Appearance .....	75
ANNEX B: Test Setup Photos .....	76



## Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Maximum output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Unwanted Emissions	15.247(d),15.205,15.209	PASS
7	Conducted Emissions	15.207	PASS
Date of Testing: June 9, 2021 ~ July 5, 2021			
Date of Sample Received: February 22, 2021			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			



## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

### 2.2. General information

EUT Description	
Model	MF289F
IMEI	864781050000249
Hardware Version	mb5B
Software Version	VDF_DE_MF289FV1.0.0B01
Power Supply	AC adapter
Antenna Type	Internal Antenna
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)
Antenna Gain	2dBi
Directional Gain	Without Beamforming Mode for power: 2 dBi
	Without Beamforming Mode for PSD: 5.01dBi
	Beamforming Mode: 5.01dBi
Test Mode	802.11b, 802.11g, 802.11n(HT20/HT40)
Modulation Type	802.11b: DSSS 802.11g/n(HT20/HT40): OFDM
Max. Conducted Power	Wi-Fi 2.4G:17.89dBm
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2462 MHz 802.11n(HT40): 2422 ~ 2452 MHz
EUT Accessory	
Adapter	Manufacturer: Shenzhen Ruijing Industrial Co., Ltd. Model: STC-A1215C55-A
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.	



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR47 Part 15C (2020) Radio Frequency Devices**

**ANSI C63.10 (2013)**

**Reference standard:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the loop antenna is vertical, the others are vertical and horizontal. and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate		
	Antenna 1	Antenna 2	MIMO
802.11b	1 Mbps	1 Mbps	/
802.11g	6 Mbps	6 Mbps	/
802.11n HT20	MCS0	MCS0	MCS8
802.11n HT40	MCS0	MCS0	MCS8

The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	Antenna 1	Antenna 2	MIMO
Maximum conducted output power	O	O	802.11n HT20 802.11n HT40
6dB Bandwidth	O	--	--
Band Edge	O	--	--
Power Spectral Density	O	O	802.11n HT20 802.11n HT40
Spurious RF Conducted Emissions	O	O	802.11n HT20 802.11n HT40
Unwanted Emissions	802.11b/g	--	802.11n HT20 802.11n HT40
Conducted Emission	802.11b/g	--	802.11n HT20 802.11n HT40
Note: "O": test all bands			

According to RF Output power results in chapter 5.1, MIMO was selected as the worst antenna for 802.11n HT20/ HT40. SISO Antenna 1 was selected as the worst SISO antenna for 802.11b/ g.



## 5. Test Case Results

### 5.1. Maximum output power

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

#### Test Setup



#### Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44$  dB.

**Test Results**

SISO Antenna 1/2 Power Index					
Channel	802.11b	802.11g	802.11n HT20	Channel	802.11n HT40
CH1	17	13	12	CH3	12
CH6	17	13	12	CH6	12
CH11	17	13	12	CH9	12
MIMO Antenna 1/2 Power Index					
Channel	802.11b	802.11g	802.11n HT20	Channel	802.11n HT40
CH1	-	-	12	CH3	12
CH6	-	-	12	CH6	12
CH11	-	-	12	CH9	12

Test Mode	T <sub>on</sub> (ms)	T <sub>(on+off)</sub> (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11b	12.43	12.52	0.99	NA
802.11g	2.06	2.14	0.96	0.17
802.11n HT20	4.99	5.10	0.98	NA
802.11n HT40	2.42	2.51	0.96	0.17
Note: when Duty cycle $\geq$ 0.98, Duty cycle correction Factor not required.				

**SISO Antenna 1**

Test Mode	Carrier frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412	17.89	17.89	30	PASS
	2437	17.23	17.23	30	PASS
	2462	17.57	17.57	30	PASS
802.11g	2412	13.48	13.65	30	PASS
	2437	13.19	13.36	30	PASS
	2462	13.24	13.41	30	PASS
802.11n HT20	2412	12.62	12.62	30	PASS
	2437	12.01	12.01	30	PASS
	2462	12.15	12.15	30	PASS
802.11n HT40	2422	12.08	12.25	30	PASS
	2437	12.16	12.33	30	PASS
	2452	12.74	12.91	30	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

**SISO Antenna 2**

Test Mode	Carrier frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412	17.71	17.71	30	PASS
	2437	17.20	17.20	30	PASS
	2462	17.51	17.51	30	PASS
802.11g	2412	13.01	13.18	30	PASS
	2437	13.08	13.25	30	PASS
	2462	13.29	13.46	30	PASS
802.11n HT20	2412	12.28	12.28	30	PASS
	2437	12.07	12.07	30	PASS
	2462	12.30	12.30	30	PASS
802.11n HT40	2422	12.62	12.79	30	PASS
	2437	12.06	12.23	30	PASS
	2452	12.41	12.58	30	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

**MIMO**

**Without Beamforming**

Test Mode	Carrier frequency (MHz)	MIMO Antenna 1		MIMO Antenna 2		Total Power (dBm)	Limit (dBm)	Conclusion
		Average Power Measured (dBm)	Average Power with duty factor (dBm)	Average Power Measured (dBm)	Average Power with duty factor (dBm)			
802.11n HT20	2412	12.53	12.53	12.14	12.14	15.35	30	PASS
	2437	12.05	12.05	12.08	12.08	15.08	30	PASS
	2462	12.14	12.14	12.27	12.27	15.22	30	PASS
802.11n HT40	2422	12.16	12.33	11.86	12.03	15.19	30	PASS
	2437	12.09	12.26	11.92	12.09	15.19	30	PASS
	2452	11.98	12.15	12.01	12.18	15.17	30	PASS

Note: 1.Average Power with duty factor = Average Power Measured +Duty cycle correction factor  
 2. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),  
 The Total Power = $10\log(10^{(Power\ antenna1\ in\ dBm/10)}+10^{(Power\ antenna2\ in\ dBm/10)})$ .  
 3. The manufacturer declared the transmitter output signals is CDD mode. And  $N_{ss}=1$ . According to KDB 662911 D01 Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain,  
 Directional gain =  $G_{ANT} + \text{Array Gain}$ ,  
 For power measurements on IEEE 802.11 devices,  
 Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;  
 Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;  
 Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .  
 So directional gain =  $G_{ANT} + \text{Array Gain} = 2+0=2$  dBi<6dBi. So the power limit is 30dBm

**With Beamforming**

Test Mode	Carrier frequency (MHz)	MIMO Antenna 1		MIMO Antenna 2		Total Power (dBm)	Limit (dBm)	Conclusion
		Average Power Measured (dBm)	Average Power with duty factor (dBm)	Average Power Measured (dBm)	Average Power with duty factor (dBm)			
802.11n HT20	2412	12.48	12.48	12.10	12.10	15.30	30	PASS
	2437	11.96	11.96	12.05	12.05	15.02	30	PASS
	2462	12.05	12.05	12.18	12.18	15.13	30	PASS
802.11n HT40	2422	12.09	12.26	11.84	12.01	15.15	30	PASS
	2437	12.03	12.20	11.90	12.07	15.15	30	PASS
	2452	11.92	12.09	11.96	12.13	15.12	30	PASS

Note: 1.Average Power with duty factor = Average Power Measured +Duty cycle correction factor  
 2. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),  
 The Total Power = $10\log(10^{(Power\ antenna1\ in\ dBm/10)}+10^{(Power\ antenna2\ in\ dBm/10)})$ .  
 3. Direction gain calculation according to KDB662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (i),If all antennas have the same gain, directional gain =  $G_{ANT} + 10 \log(N_{ANT}/N_{SS})=2$  dBi + $10\log(2/1) =5.01$ dBi < 6dBi. So the limit is 30dBm.

## 5.2. 99% Bandwidth and 6dB Bandwidth

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer. Dector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

### Test Setup



### Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.


**Test Results:**

Test Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	13.074	8.074	500	PASS
	2437	12.956	8.071	500	PASS
	2462	12.942	8.071	500	PASS
802.11g	2412	16.420	16.340	500	PASS
	2437	16.390	16.340	500	PASS
	2462	16.367	16.300	500	PASS
802.11n HT20	2412	17.616	17.590	500	PASS
	2437	17.576	17.550	500	PASS
	2462	17.587	17.570	500	PASS
802.11n HT40	2422	35.880	35.030	500	PASS
	2437	35.835	33.700	500	PASS
	2452	35.955	35.670	500	PASS



99%bandwidth


802.11b, Carrier frequency (MHz): 2412

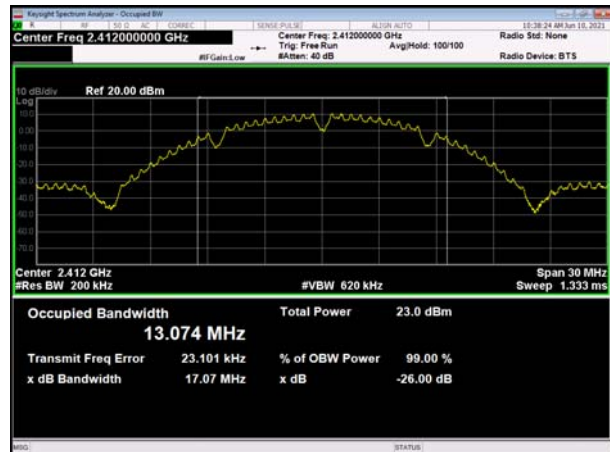


802.11g, Carrier frequency (MHz): 2412




802.11b, Carrier frequency (MHz): 2437

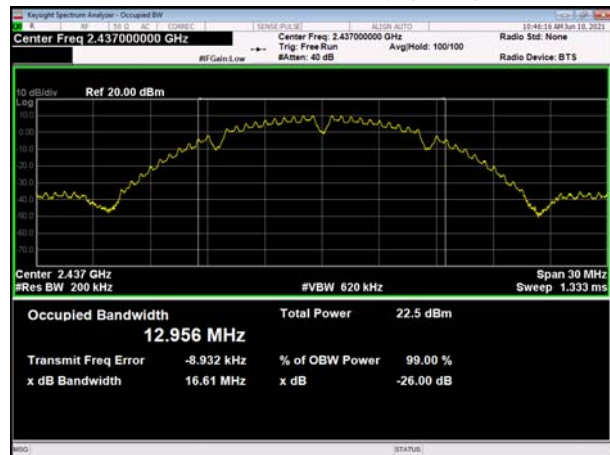


802.11g, Carrier frequency (MHz): 2437

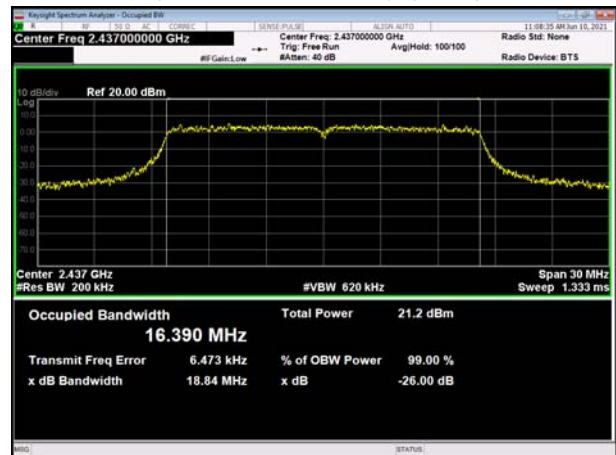

802.11b, Carrier frequency (MHz):2462

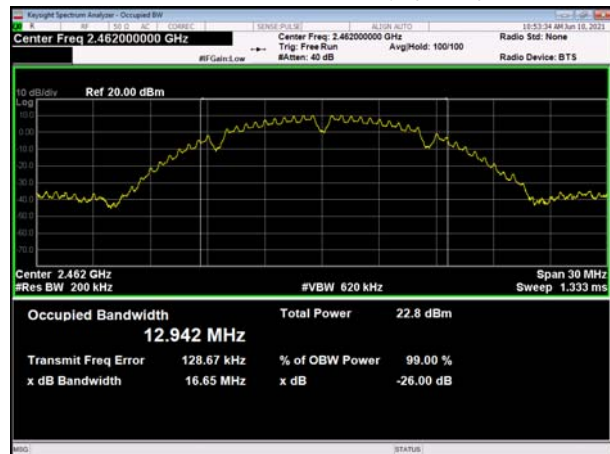


802.11g, Carrier frequency (MHz):2462

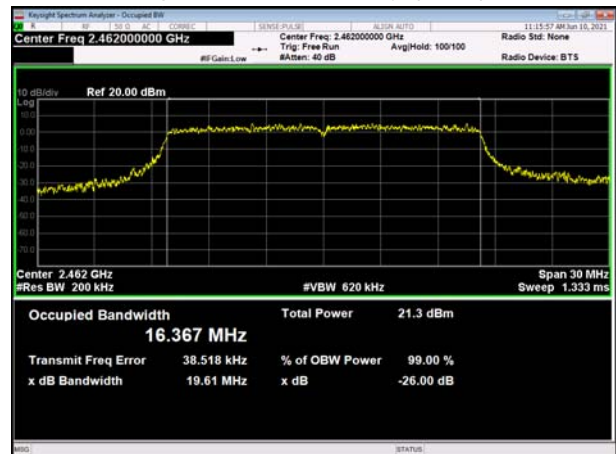





802.11n(HT20), Carrier frequency (MHz): 2412

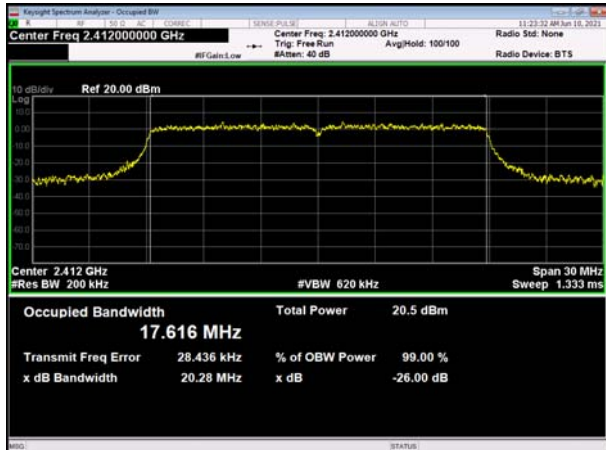


802.11n(HT40), Carrier frequency (MHz): 2422

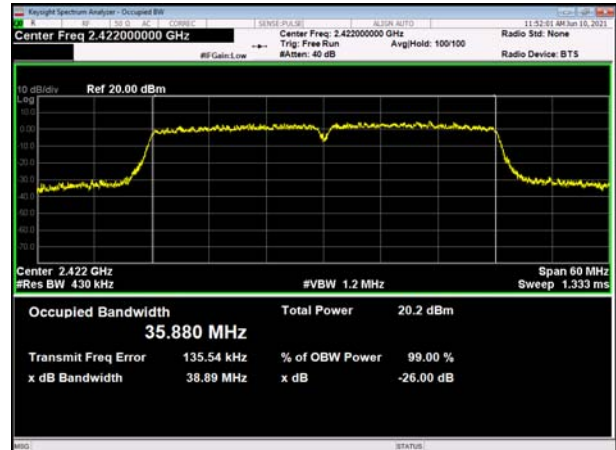


802.11n(HT20), Carrier frequency (MHz): 2437

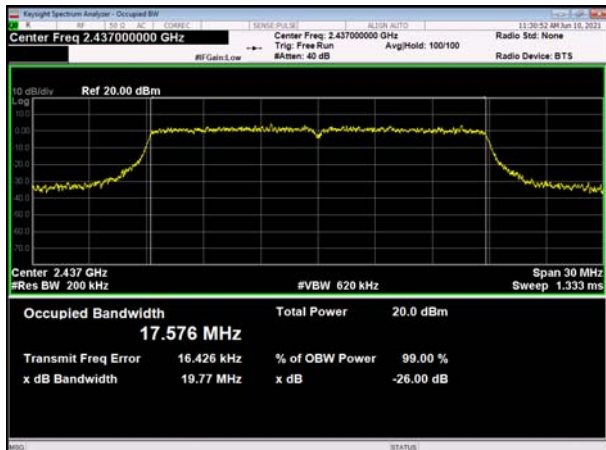


802.11n(HT40), Carrier frequency (MHz): 2437

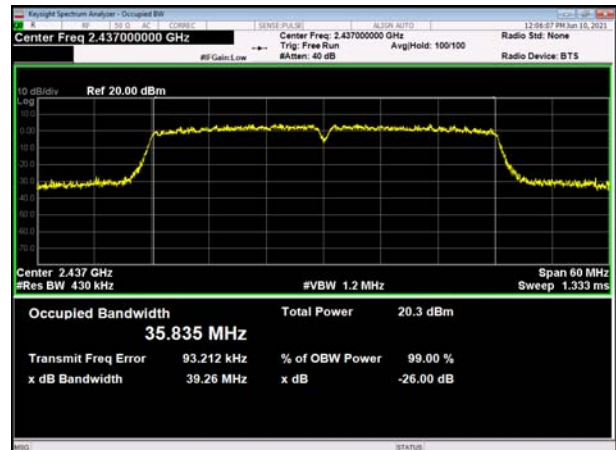

802.11n(HT20), Carrier frequency (MHz):2462

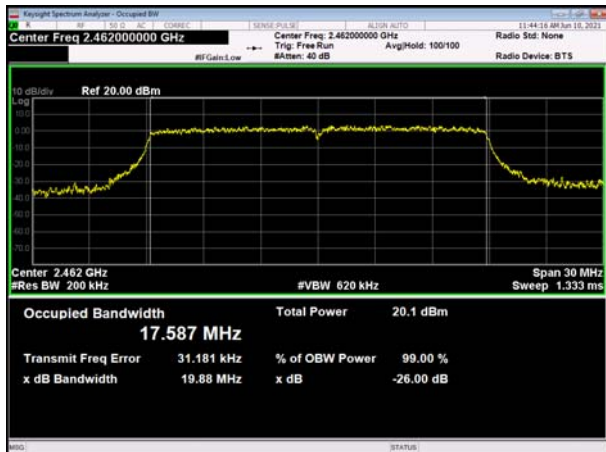

802.11n(HT40), Carrier frequency (MHz):2452

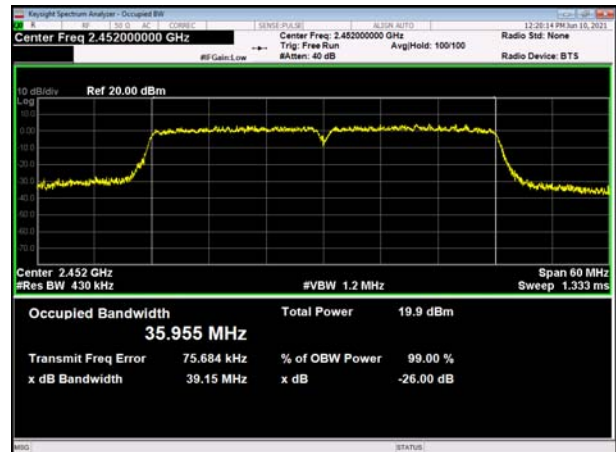





6 dB bandwidth

802.11b, Carrier frequency (MHz): 2412



802.11g, Carrier frequency (MHz): 2412




802.11b, Carrier frequency (MHz): 2437




802.11g, Carrier frequency (MHz): 2437




802.11b, Carrier frequency (MHz): 2462

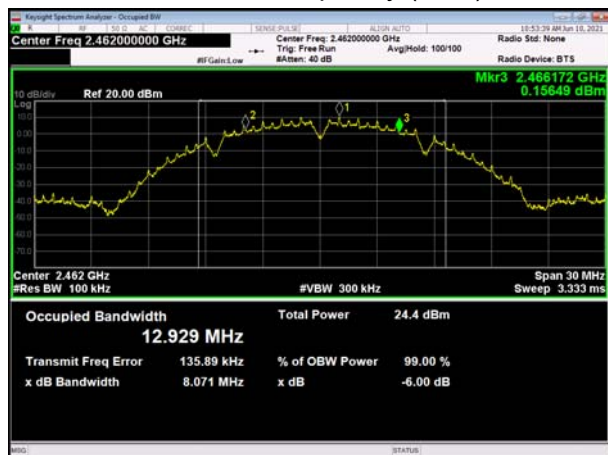


802.11g, Carrier frequency (MHz): 2462

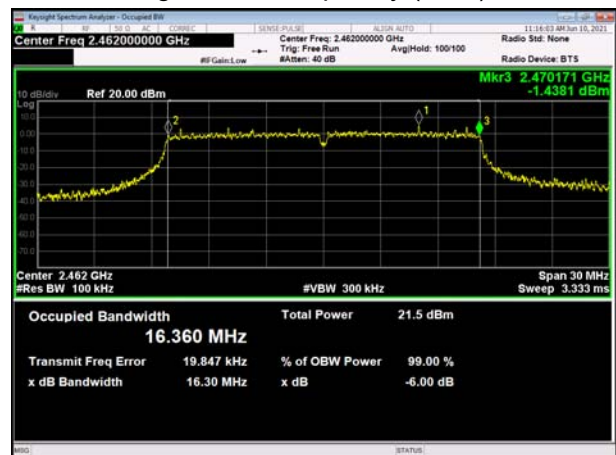


802.11n(HT20), Carrier frequency (MHz): 2412

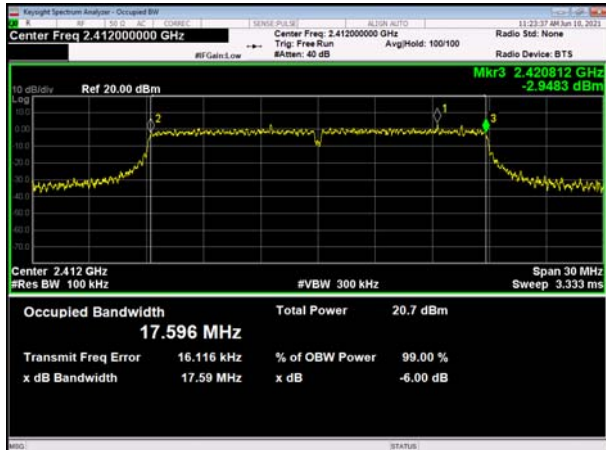


802.11n(HT40), Carrier frequency (MHz): 2422

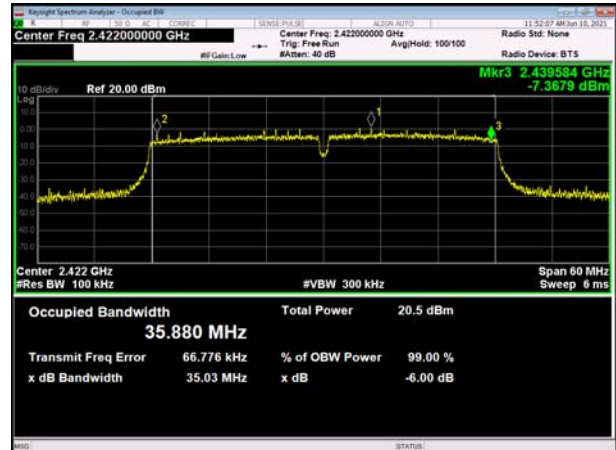


802.11n(HT20), Carrier frequency (MHz): 2437

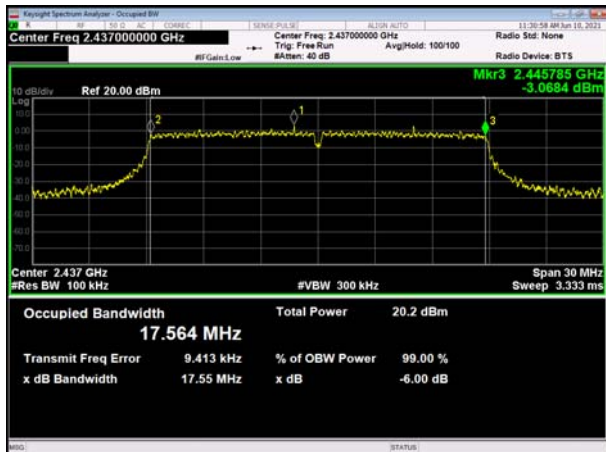

802.11n(HT40), Carrier frequency (MHz): 2437

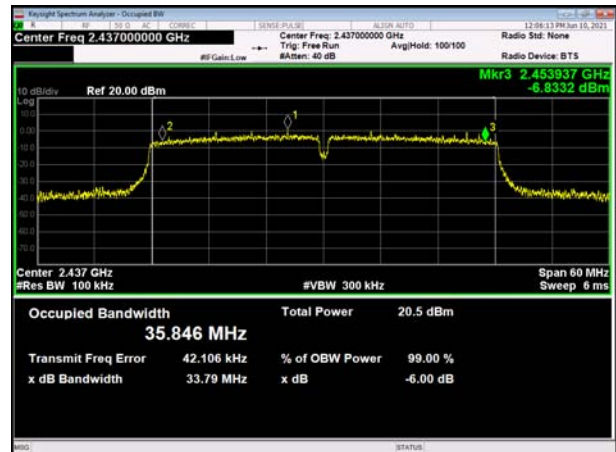

802.11n(HT20), Carrier frequency (MHz):2462

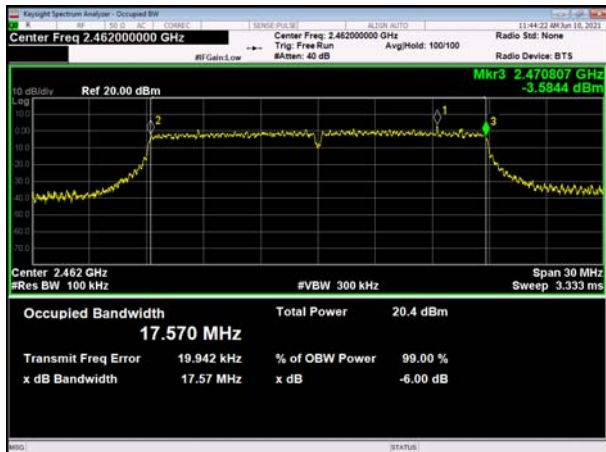

802.11n(HT40), Carrier frequency (MHz):2452



### 5.3. Band Edge


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

#### Test Setup

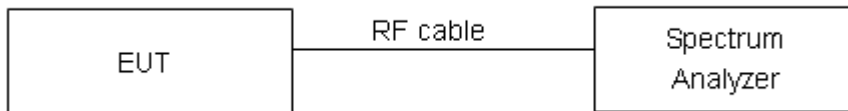

#### Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”


#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
2GHz-3GHz	1.407 dB



Test Results: PASS

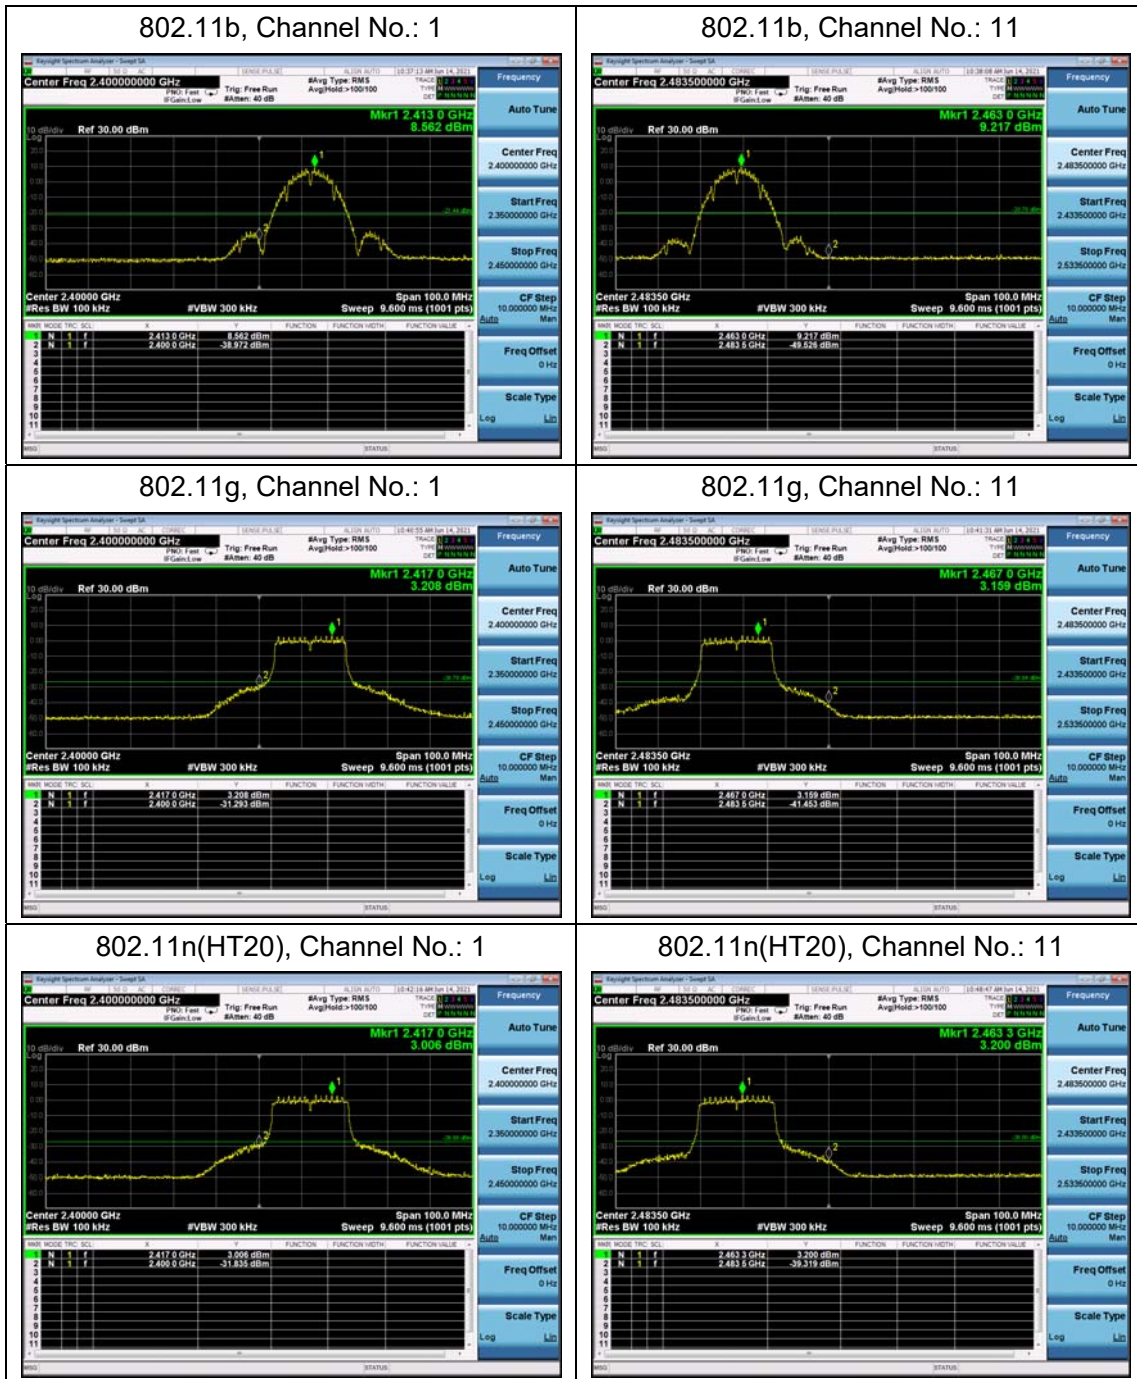



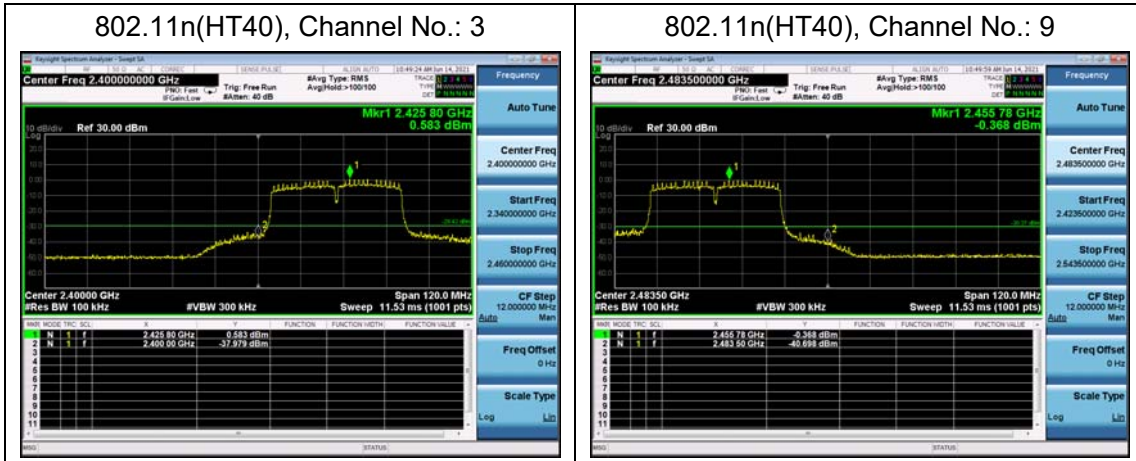

## 5.4. Power Spectral Density

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss.

The EUT is max power transmission with proper modulation.

Method AVGPSD-1 was used for this test.

- a) Set instrument center frequency to DTS channel center frequency
- b) Set span to at least 1.5 times the OBW
- c) Set RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- d) Set VBW  $\geq [3x \text{RBW}]$
- e) Detector=power averaging(rms) or sample detector(when rms not available)
- f) Ensure that the number of measurement points in the sweep  $2[2 X \text{span}/\text{RBWT}]$
- g)Sweep time auto couple
- h) Employ trace averaging(rms) mode over a minimum of 100 traces
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat(note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

Method AVGPSD-2 was used for this test.


- a) Measure the duty cycle(D)of the transmitter output signal as described in 11.6
- b) Set instrument center frequency to DTS channel center frequency
- c)Set span to at least 1.5 times the OBW
- d) Set RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{Kh}$
- e) Set VBW  $\geq [3x \text{RBW}]$
- f)Detector= power averaging(rms) or sample detector (when rms not available)
- g) Ensure that the number of measurement points in the sweep  $2[2 X \text{span}/\text{RBW}]$
- h) Sweep time =auto couple
- i) Do not use sweep triggering; allow sweep to "free run"
- j) Employ trace averaging(rms) mode over a minimum of 100 traces
- k) Use the peak marker function to determine the maximum amplitude level
- l) Add  $[10 \log(1/ D)]$ , where D is the duty cycle measured in step a), to the measured PSD to

compute the average PSD during the actual transmission time

m) If measured value exceeds requirement specified by regulatory agency then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

### Test setup



### Limits

Rule Part 15.247(e) specifies that "For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission."

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75\text{dB}$ .

**Test Results:****SISO Antenna 1**

Test Mode	Channel Number	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-13.76	-13.76	8	PASS
	6	-14.30	-14.30	8	PASS
	11	-13.86	-13.86	8	PASS
802.11g	1	-18.78	-18.61	8	PASS
	6	-17.87	-17.70	8	PASS
	11	-18.31	-18.14	8	PASS
802.11n HT20	1	-18.76	-18.76	8	PASS
	6	-18.77	-18.77	8	PASS
	11	-19.19	-19.19	8	PASS
802.11n HT40	3	-22.04	-21.87	8	PASS
	6	-22.11	-21.94	8	PASS
	9	-23.10	-22.93	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor

**SISO Antenna 2**

Test Mode	Channel Number	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-14.02	-14.02	8	PASS
	6	-13.61	-13.61	8	PASS
	11	-13.57	-13.57	8	PASS
802.11g	1	-17.78	-17.62	8	PASS
	6	-17.69	-17.52	8	PASS
	11	-17.99	-17.83	8	PASS
802.11n HT20	1	-18.71	-18.71	8	PASS
	6	-19.03	-19.03	8	PASS
	11	-19.14	-19.14	8	PASS
802.11n HT40	3	-22.24	-22.07	8	PASS
	6	-21.74	-21.57	8	PASS
	9	-22.99	-22.82	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor



**MIMO**
**Without Beamforming**

Test Mode	Channel Number	Power Spectral Density				Total PSD	Limit (dBm / 3kHz)	Conclusion
		Antenna 1		Antenna 2				
		Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	(dBm / 3kHz)		
802.11n HT20	1	-19.45	-19.45	-18.57	-18.57	-15.98	8	PASS
	6	-19.34	-19.34	-18.26	-18.26	-15.75	8	PASS
	11	-19.74	-19.74	-18.83	-18.83	-16.25	8	PASS
802.11n HT40	3	-22.44	-22.27	-19.80	-19.63	-17.74	8	PASS
	6	-22.24	-22.07	-21.64	-21.47	-18.75	8	PASS
	9	-23.82	-23.65	-22.98	-22.81	-20.20	8	PASS

Note: 1. Power Spectral Density = Read Value + Duty cycle correction factor

2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a), the power spectral density =  $10\log(10^{(\text{PSD antenna1 in dBm/10})} + 10^{(\text{PSD antenna2 in dBm/10})})$

3. The manufacturer declared the transmitter output signals is CDD mode. And  $N_{ss}=1$ . According to KDB 662911 D01 Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain, Directional gain =  $G_{ANT} + \text{Array Gain}$ . For PSD measurements on all devices, Array Gain =  $10\log(N_{ant}/N_{ss})\text{dB}$ , so directional gain =  $G_{ANT} + \text{Array Gain} = 2 + 10\log(2/1) = 5.01 < 6\text{dBi}$ .

So the power limit is  $8 + 6 - \text{MAX}(6, 5.01)\text{dBm} = 8\text{ dBm}$

**With Beamforming**

Test Mode	Channel Number	Power Spectral Density				Total PSD	Limit (dBm / 3kHz)	Conclusion
		Antenna 1		Antenna 2				
		Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	(dBm / 3kHz)		
802.11n HT20	1	-17.03	-17.03	-18.63	-18.63	-14.74	8	PASS
	6	-18.38	-18.38	-17.63	-17.63	-14.98	8	PASS
	11	-19.42	-19.42	-18.92	-18.92	-16.15	8	PASS
802.11n HT40	3	-22.13	-21.96	-22.18	-22.01	-18.97	8	PASS
	6	-21.66	-21.49	-21.57	-21.40	-18.43	8	PASS
	9	-22.99	-22.82	-22.65	-22.48	-19.64	8	PASS

Note: 1. Power Spectral Density = Read Value + Duty cycle correction factor

2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a), the power spectral density =  $10\log(10^{(\text{PSD antenna1 in dBm/10})} + 10^{(\text{PSD antenna2 in dBm/10})})$

3. The manufacturer declared the transmitter output signals is CDD mode. And  $N_{ss}=1$ . According to KDB 662911 D01 Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain, Directional gain =  $G_{ANT} + \text{Array Gain}$ . For PSD measurements on all devices, Array









Gain=10log(Nant/Nss)Db.

so directional gain=GANT+Array Gain=2+10log(2/1)= 5.01<6dBi..

So the power limit is 8+6-MAX(6,5.01)dBm=8 dBm




SISO Antenna 1

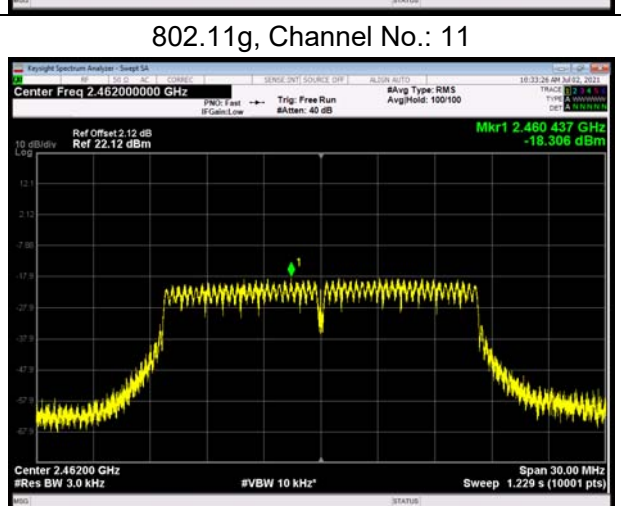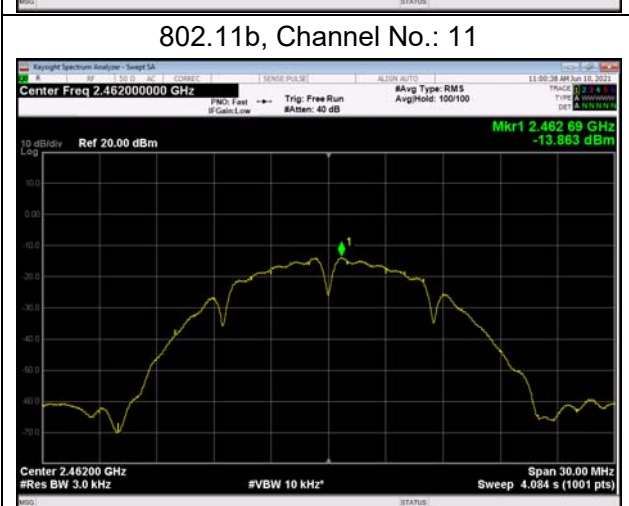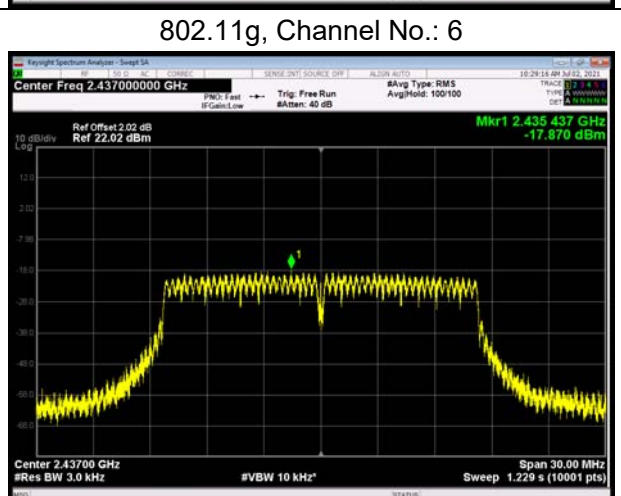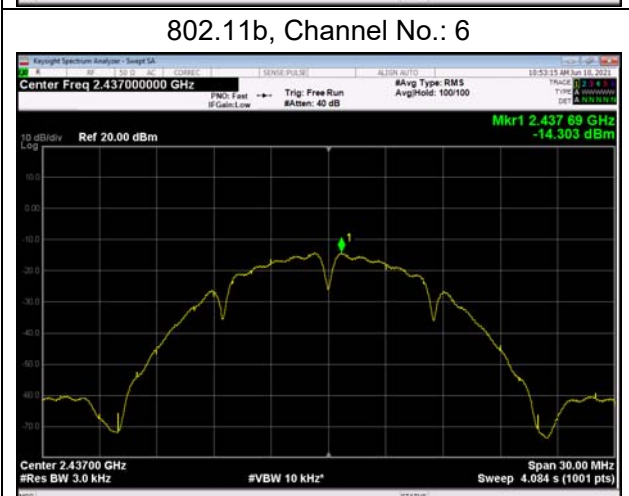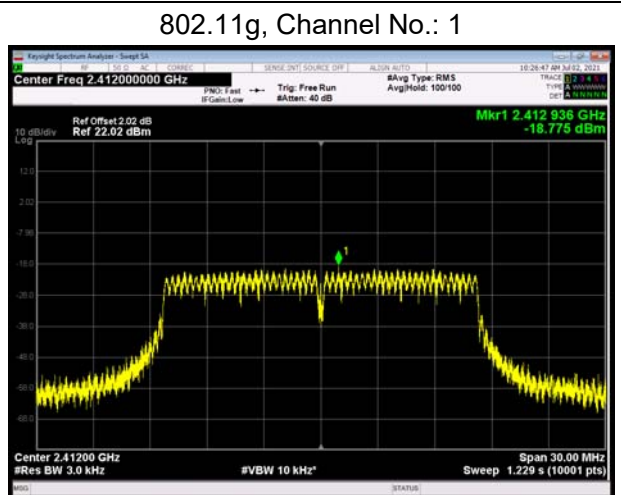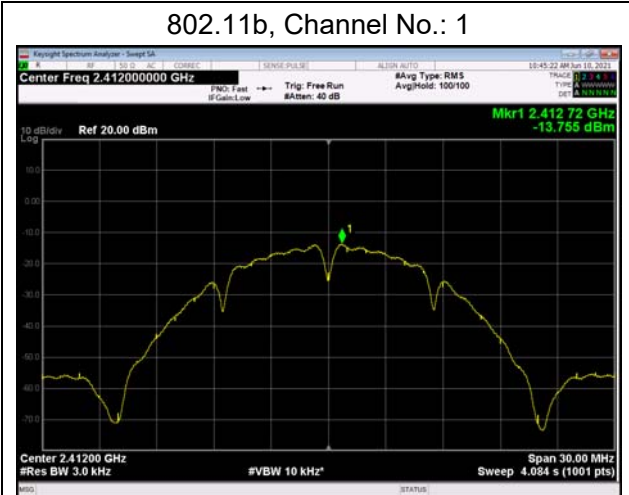





802.11n(HT20), Channel No. 1

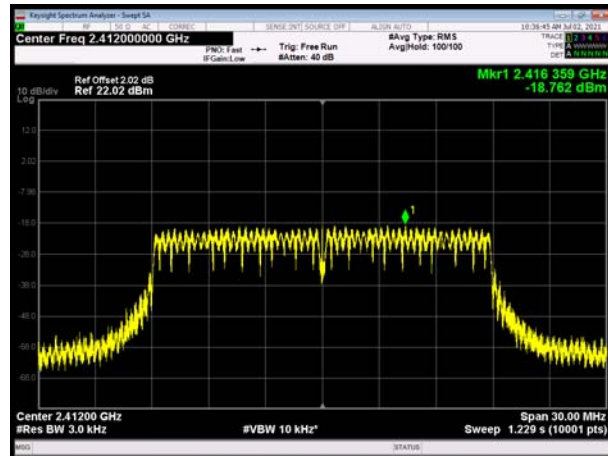


802.11n(HT40), Channel No. 3

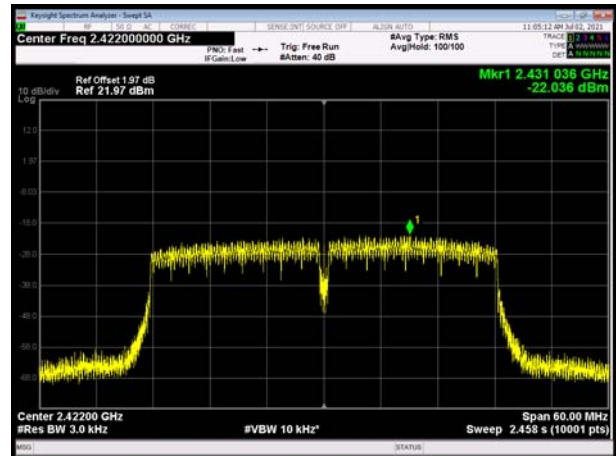


802.11n(HT20), Channel No. 6

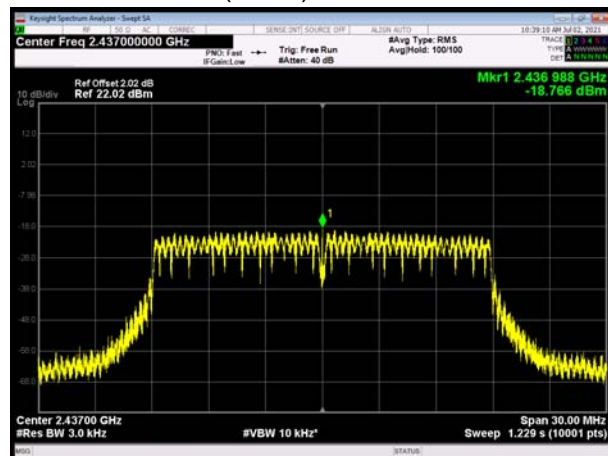


802.11n(HT40), Channel No. 6

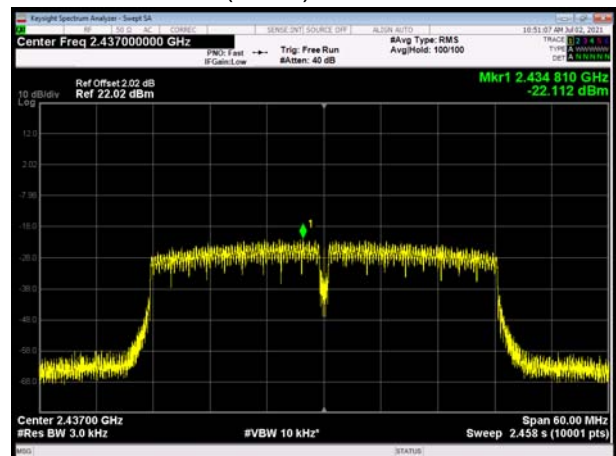

802.11n(HT20), Channel No. 11






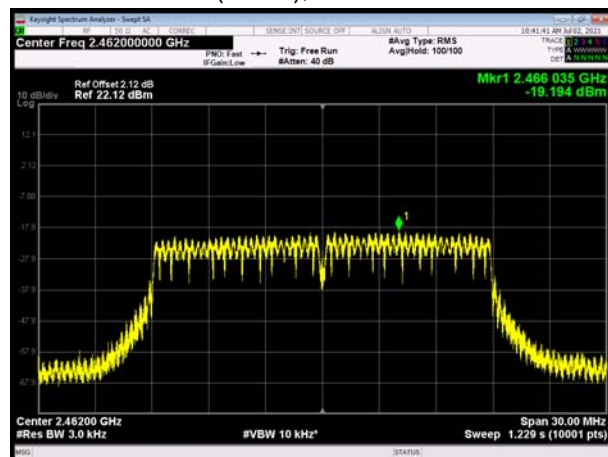


802.11n(HT40), Channel No. 9

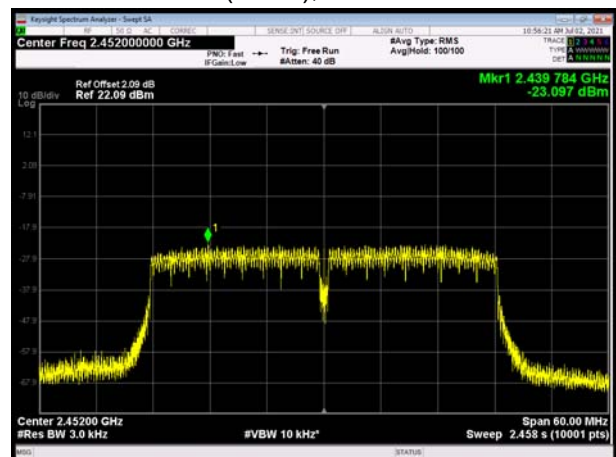




SISO Antenna 2

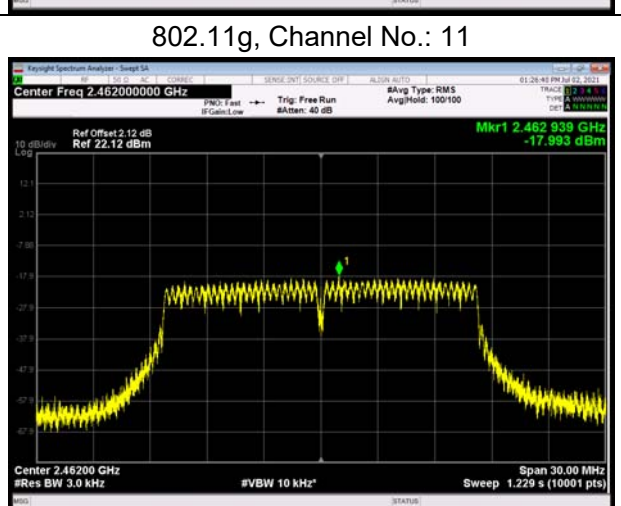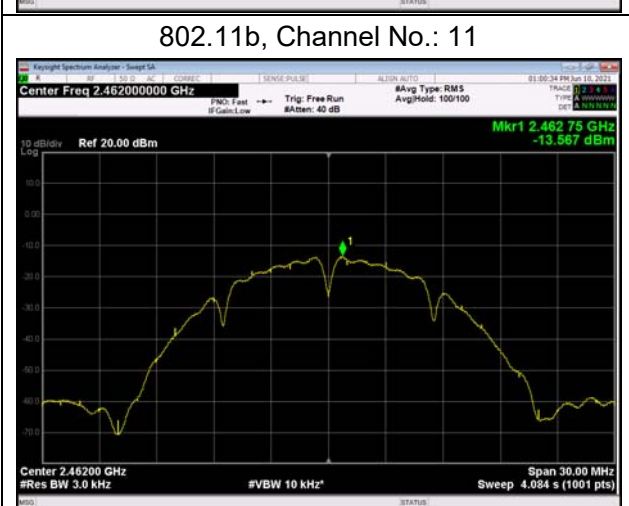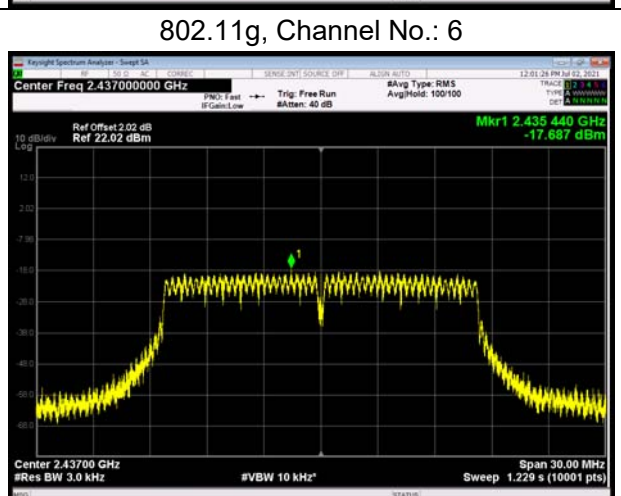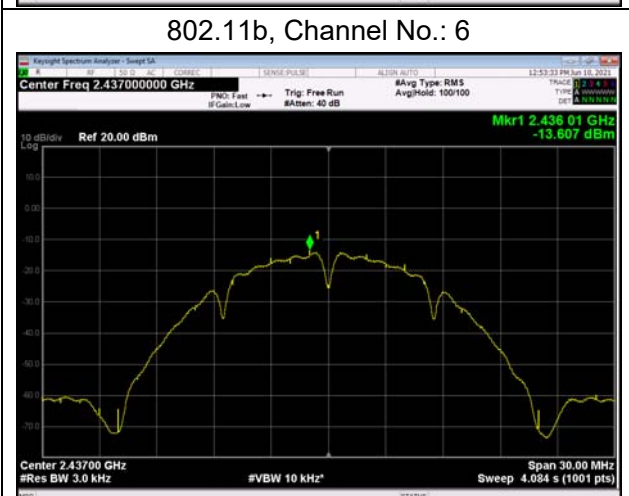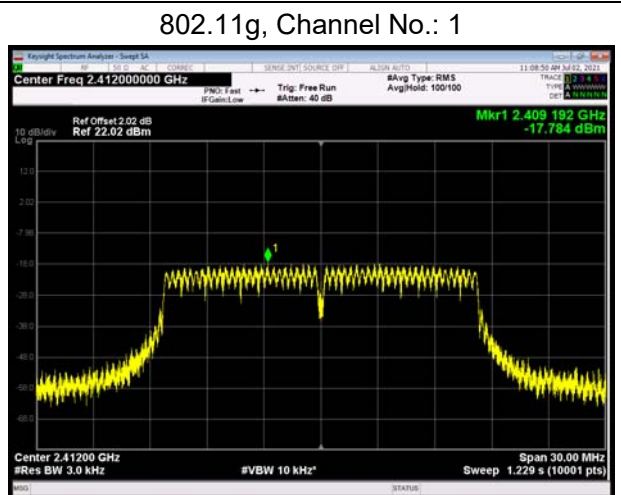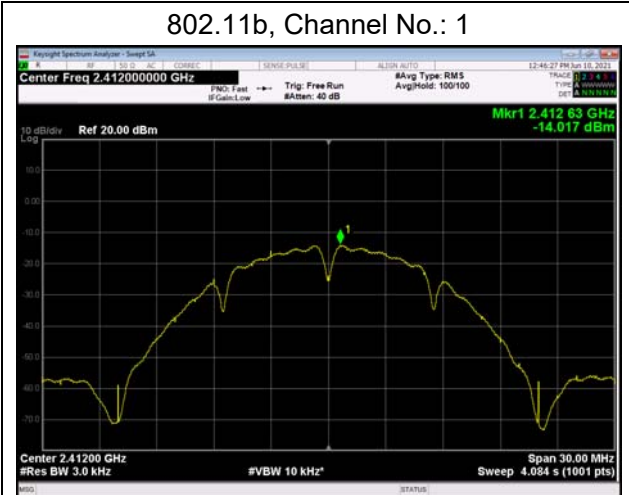







802.11n(HT20), Channel No. 1

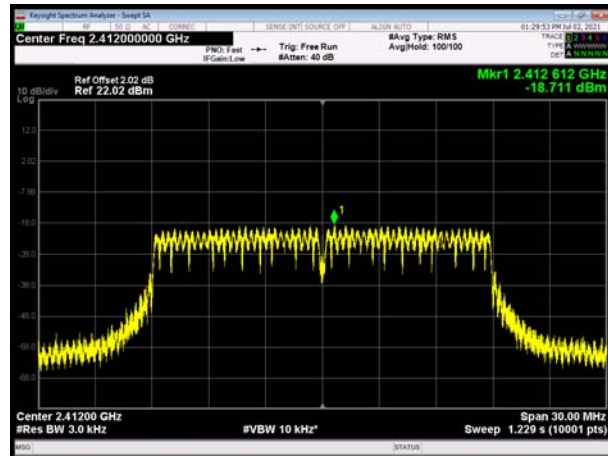


802.11n(HT40), Channel No. 3

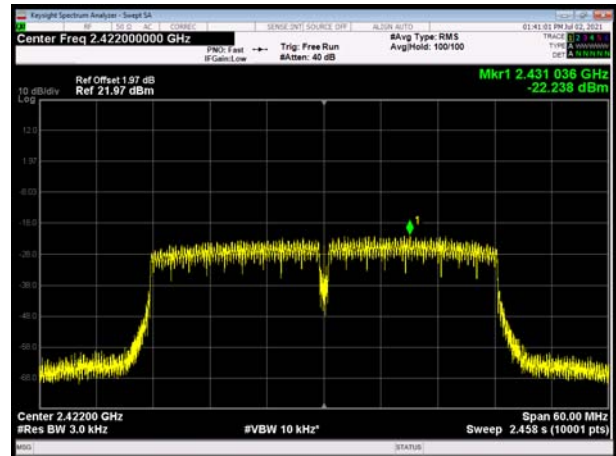


802.11n(HT20), Channel No. 6

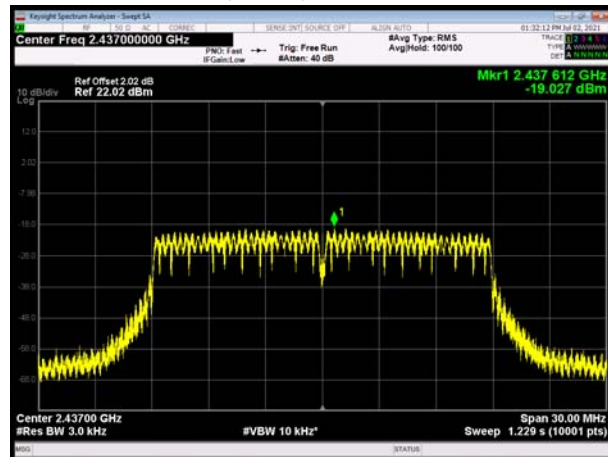


802.11n(HT40), Channel No. 6

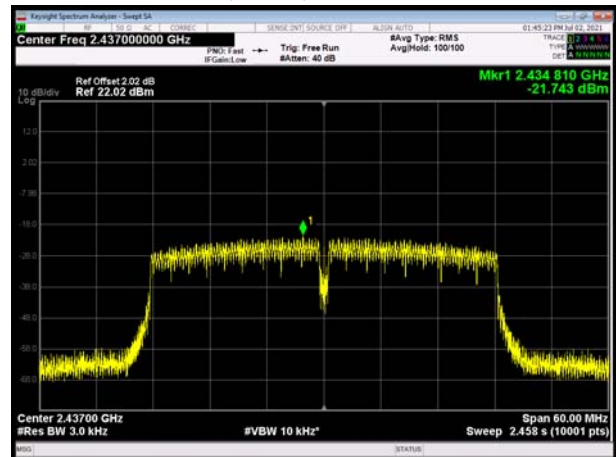

802.11n(HT20), Channel No. 11

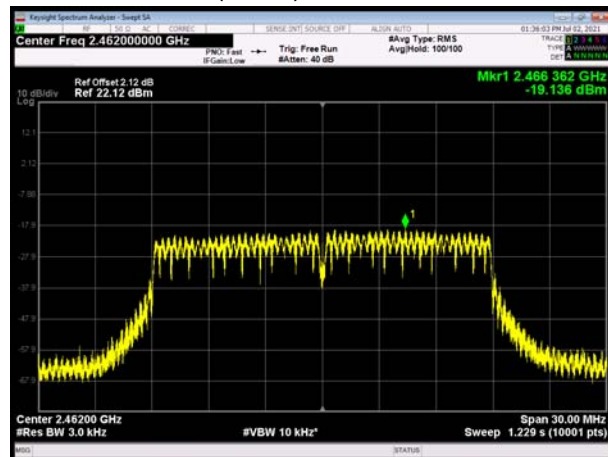


802.11n(HT40), Channel No. 9

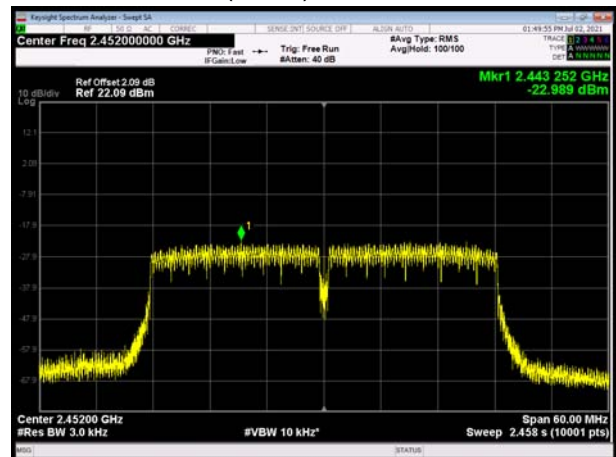




# Without Beamforming MIMO Antenna 1


802.11n(HT20), Channel No. 1

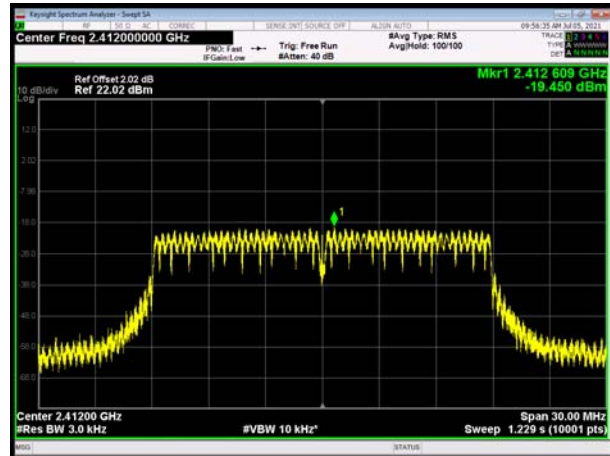


802.11n(HT40), Channel No. 3

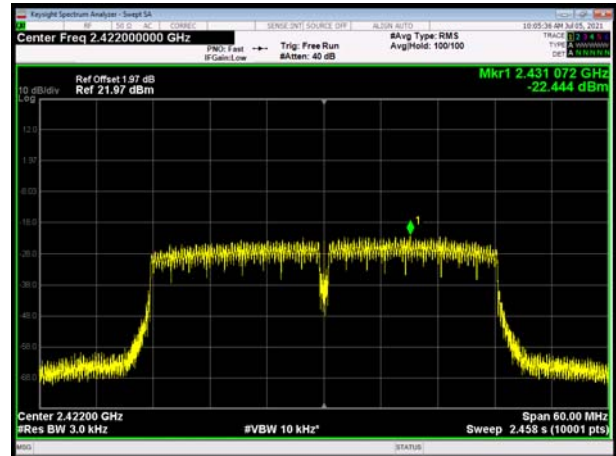


802.11n(HT20), Channel No. 6

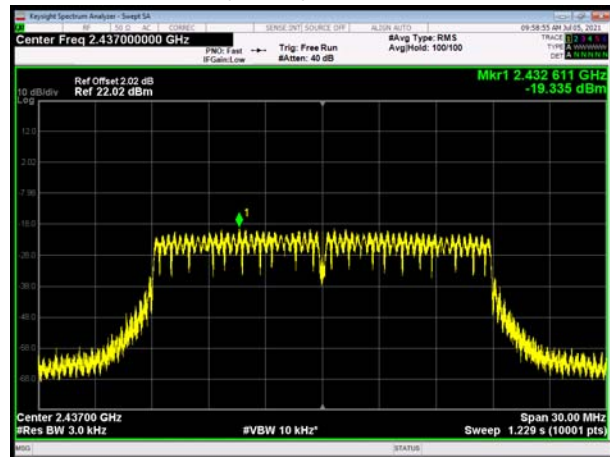


802.11n(HT40), Channel No. 6

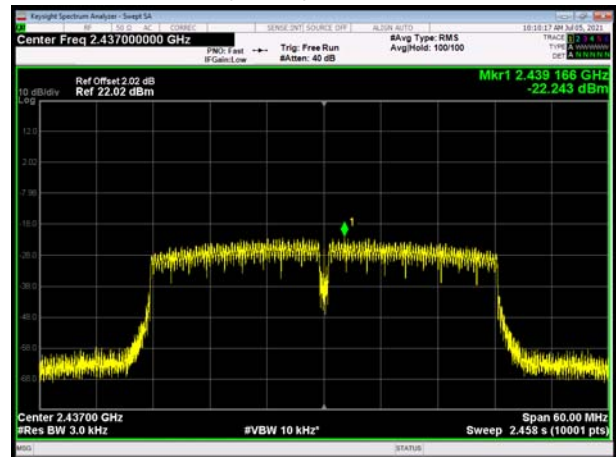

802.11n(HT20), Channel No. 11

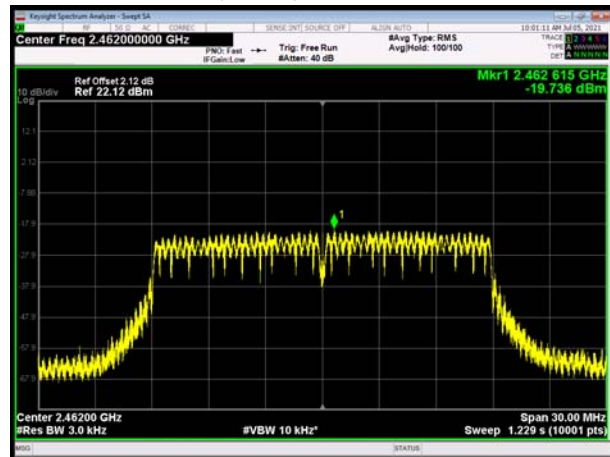


802.11n(HT40), Channel No. 9

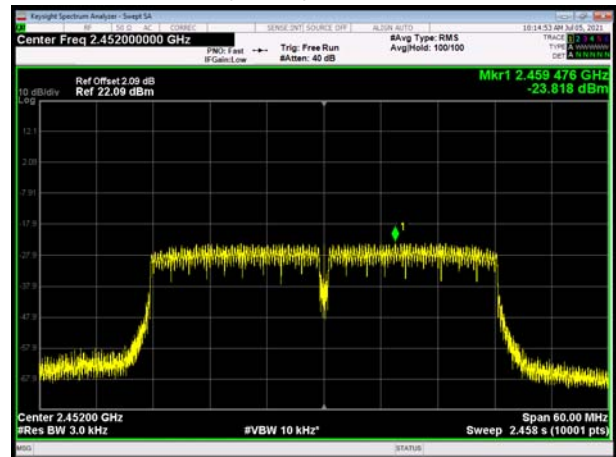




MIMO Antenna 2


802.11n(HT20), Channel No. 1

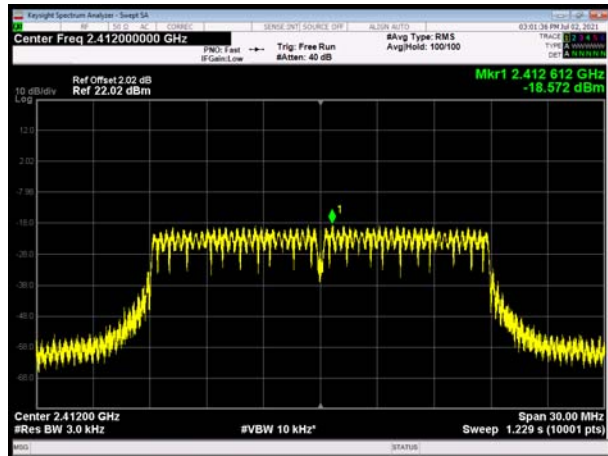


802.11n(HT40), Channel No. 3

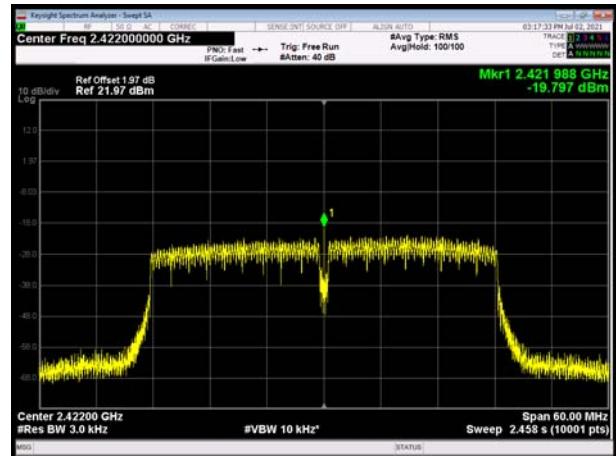


802.11n(HT20), Channel No. 6

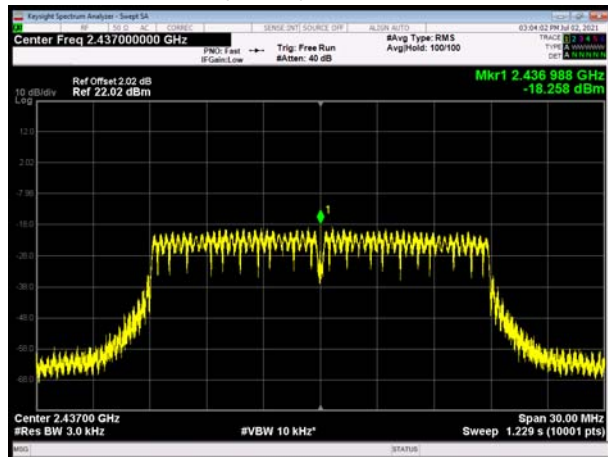

802.11n(HT40), Channel No. 6

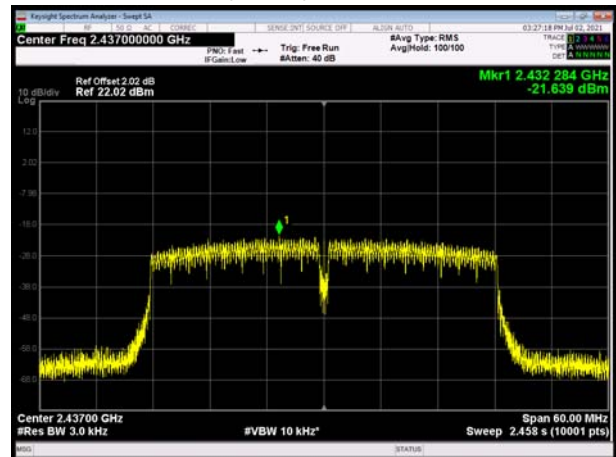

802.11n(HT20), Channel No. 11

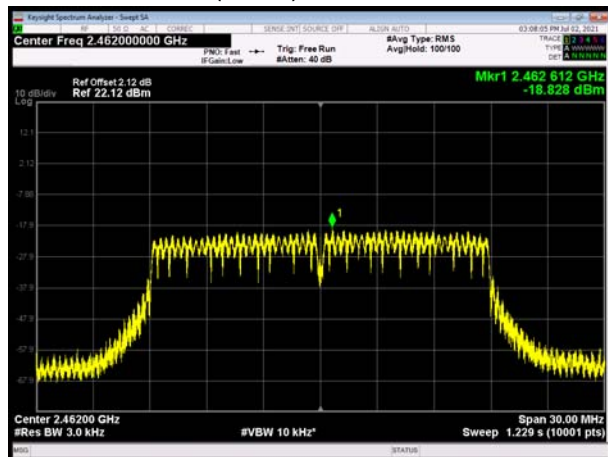

802.11n(HT40), Channel No. 9









# Without Beamforming MIMO Antenna 1


802.11n(HT20), Channel No. 1

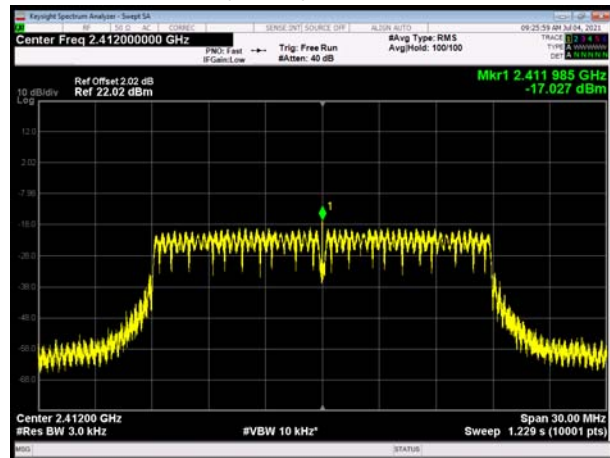


802.11n(HT40), Channel No. 3

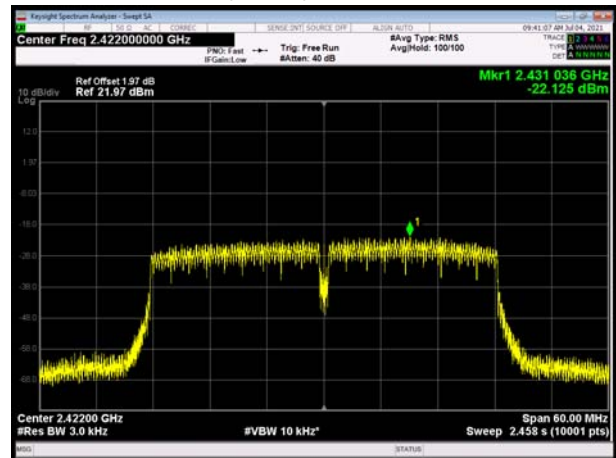


802.11n(HT20), Channel No. 6

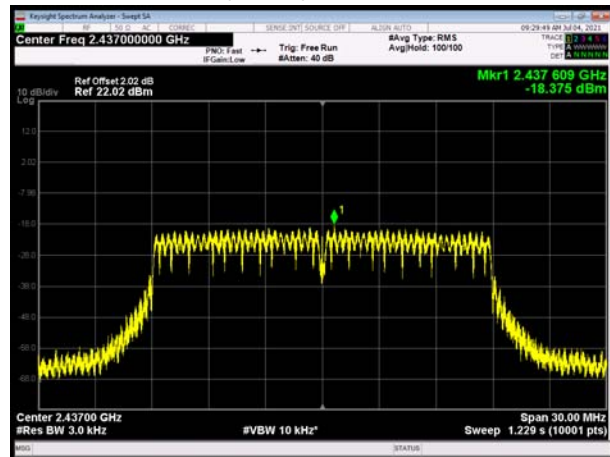


802.11n(HT40), Channel No. 6

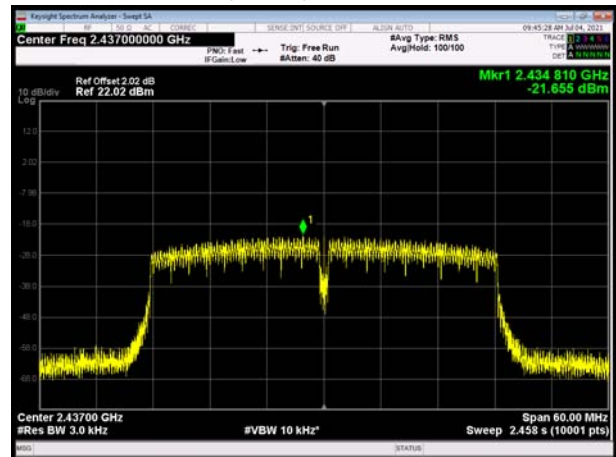

802.11n(HT20), Channel No. 11

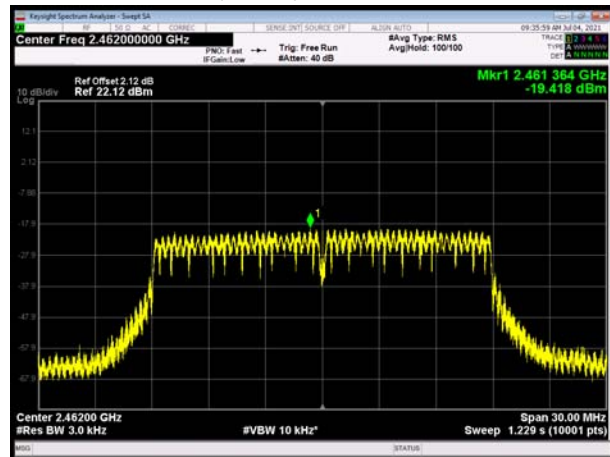


802.11n(HT40), Channel No. 9

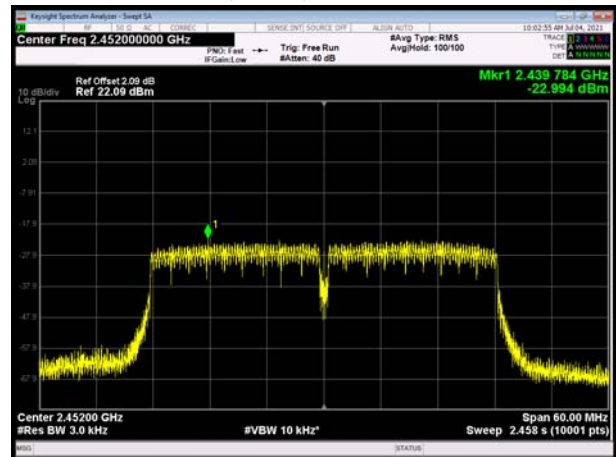




MIMO Antenna 2


802.11n(HT20), Channel No. 1

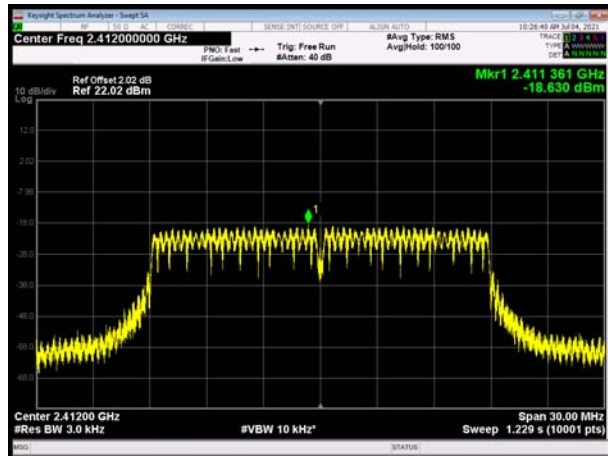


802.11n(HT40), Channel No. 3

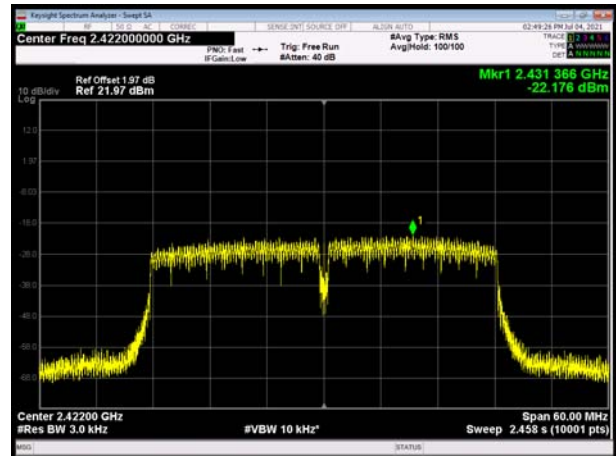


802.11n(HT20), Channel No. 6

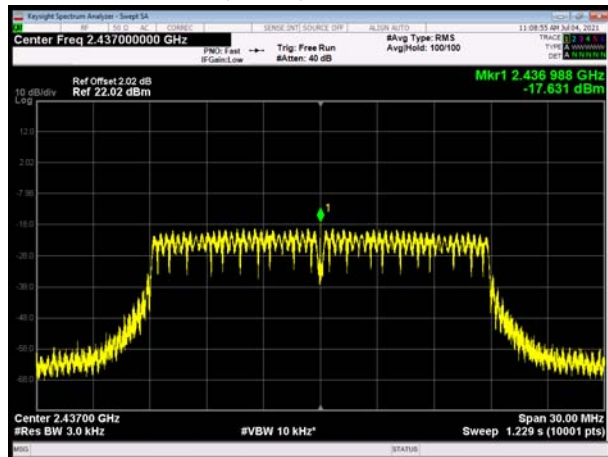


802.11n(HT40), Channel No. 6

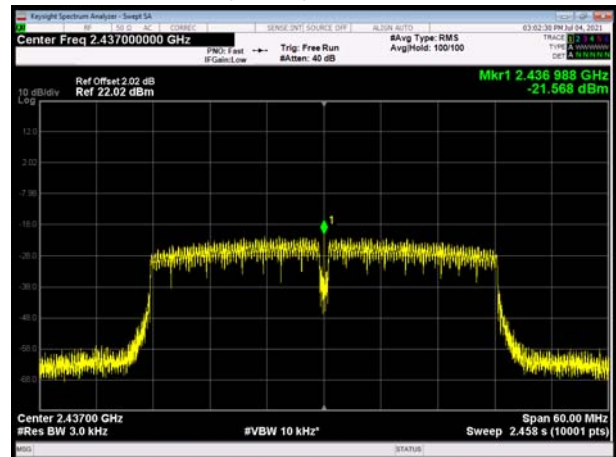

802.11n(HT20), Channel No. 11

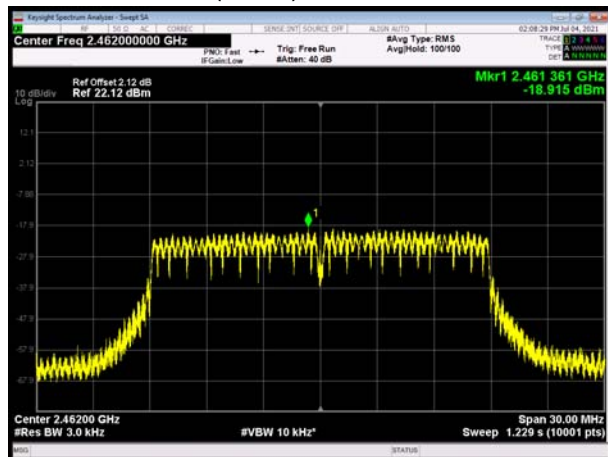

802.11n(HT40), Channel No. 9

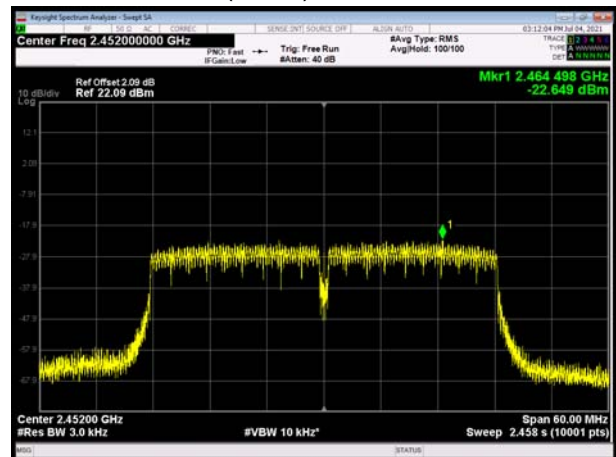

### 5.5. Spurious RF Conducted Emissions

**Ambient condition**

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

**Method of Measurement**

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

**Test setup**



**Limits**

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. ”

Test Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	8.27	-21.73
	2437	7.86	-22.14
	2462	9.35	-20.65
802.11g	2412	4.42	-25.58
	2437	3.81	-26.19
	2462	4.34	-25.66
802.11n HT20	2412	1.62	-28.38
	2437	1.98	-28.02
	2462	3.18	-26.82
802.11n HT40	2422	0.62	-29.39
	2437	0.42	-29.58
	2452	-0.25	-30.25


### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB




Test Results:

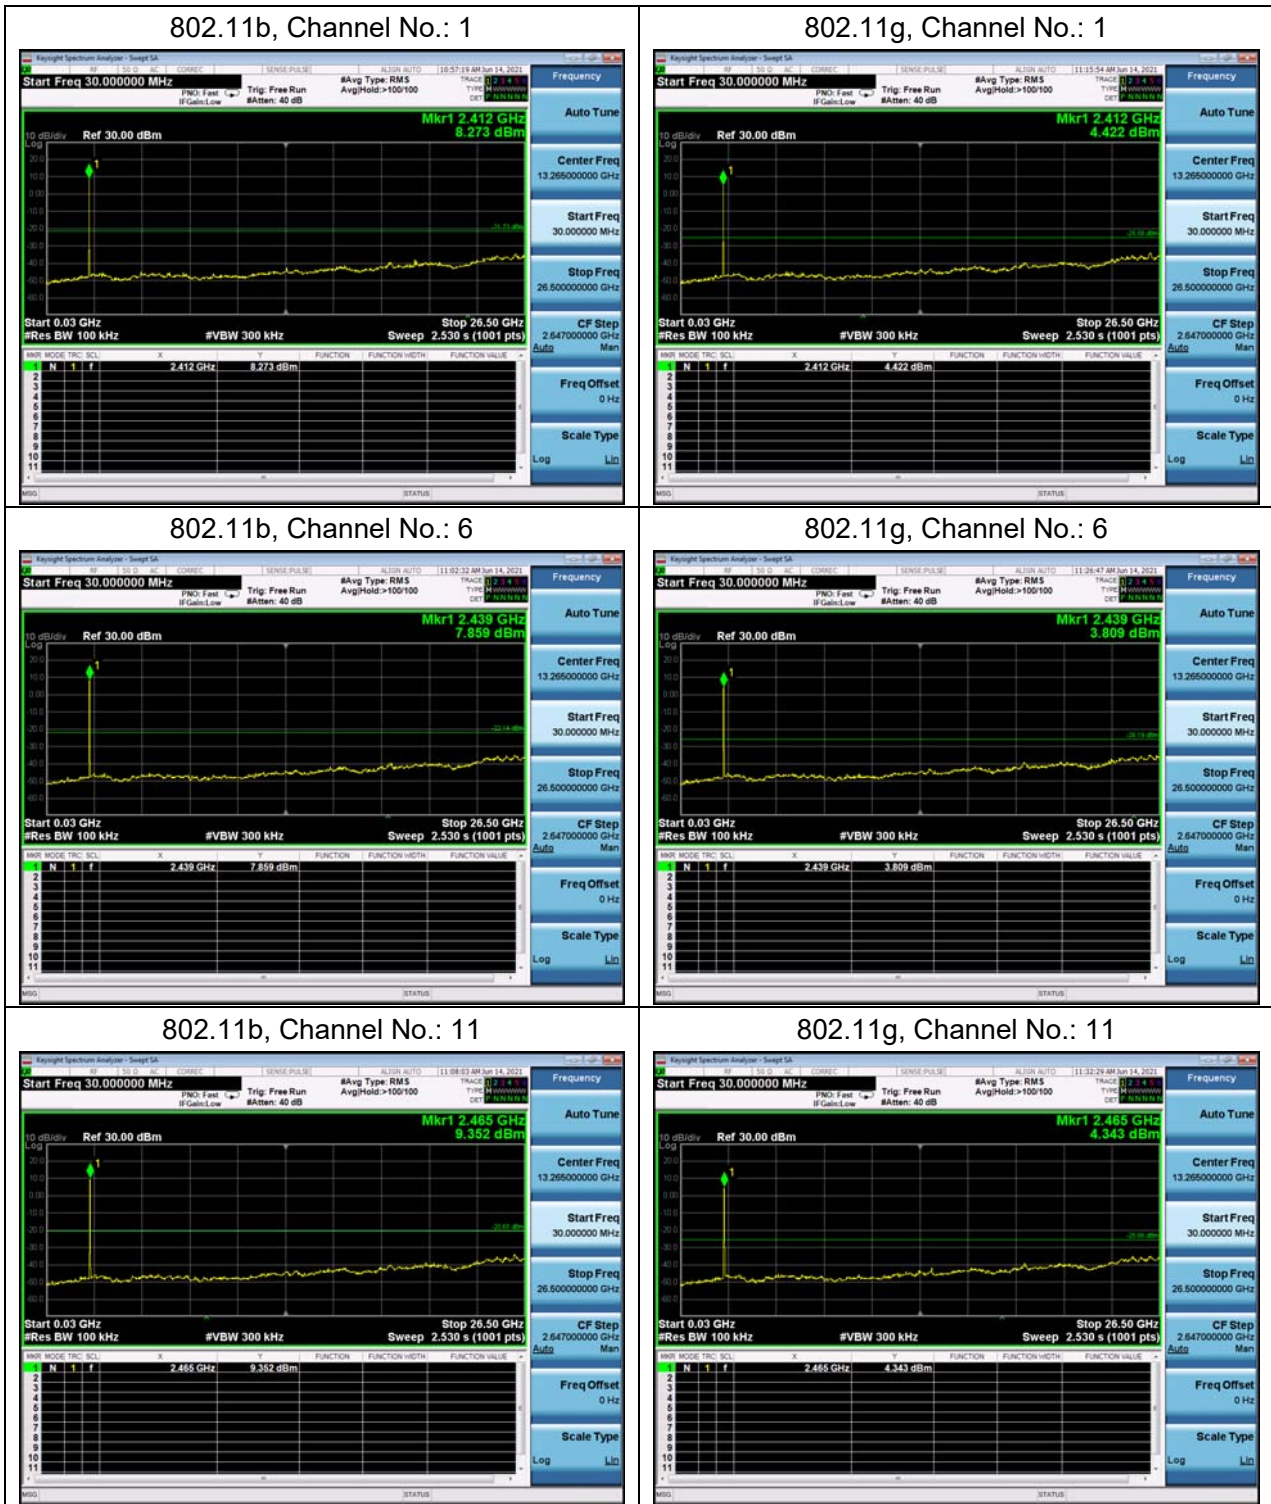







802.11n(HT20), Channel No. 1

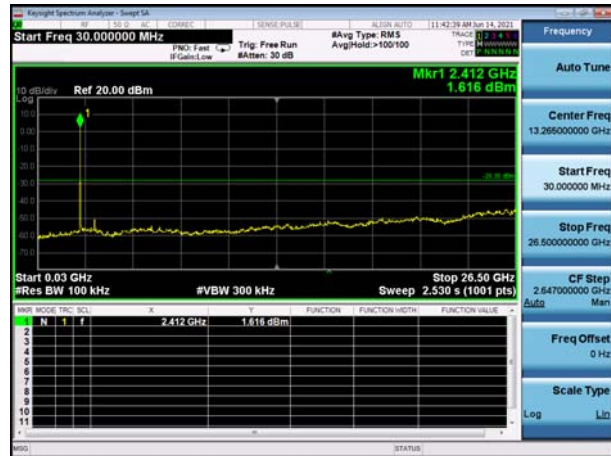


802.11n(HT40), Channel No. 3

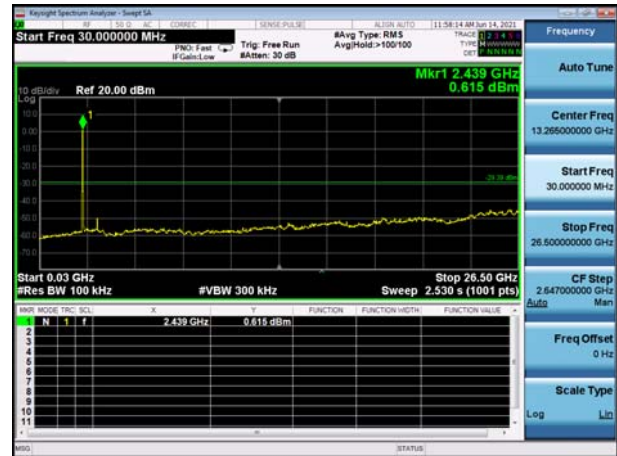


802.11n(HT20), Channel No. 6

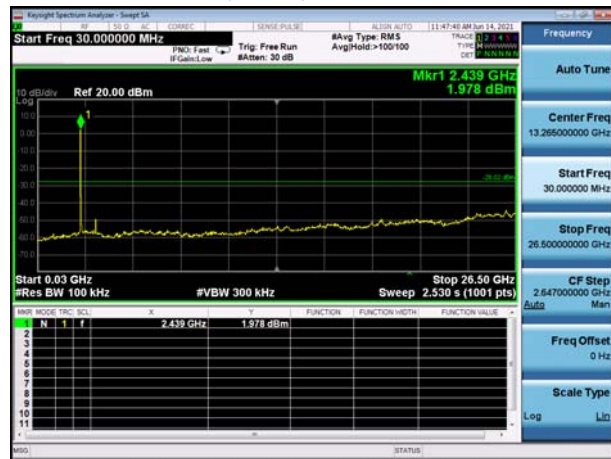


802.11n(HT40), Channel No. 6

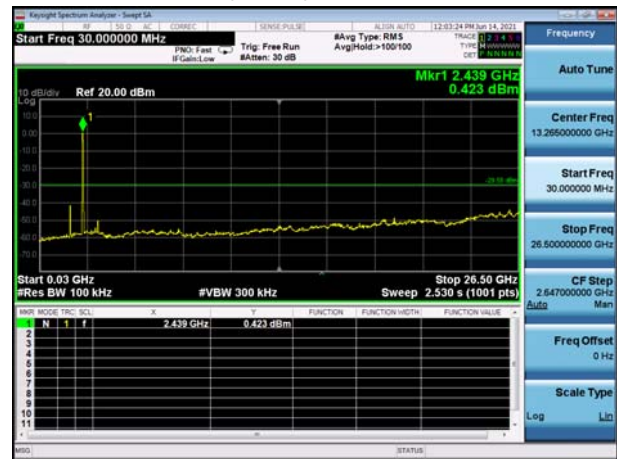

802.11n(HT20), Channel No. 11

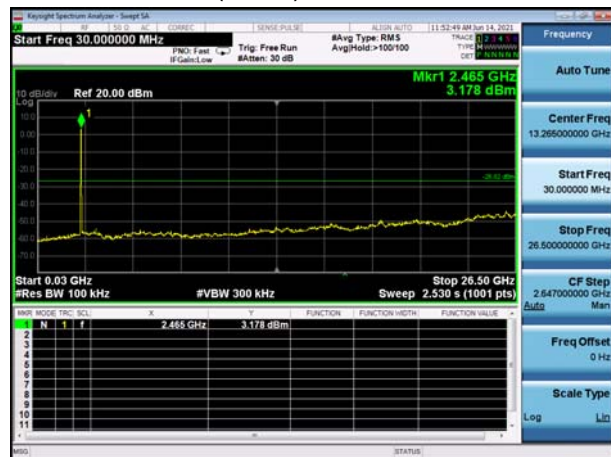

802.11n(HT40), Channel No. 9

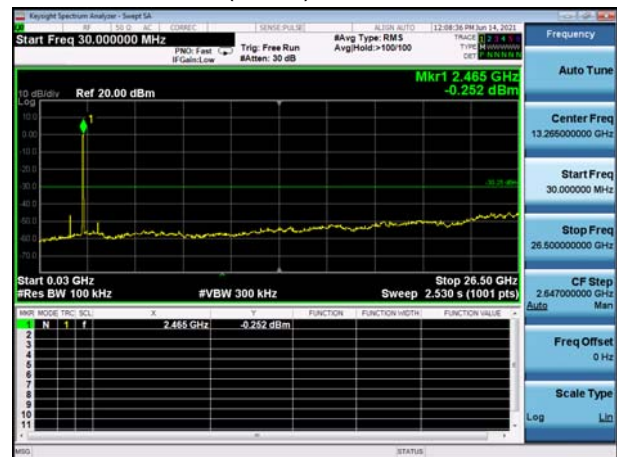

## 5.6. Unwanted Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage



averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of  $1 / D$ , where  $D$  is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where  $D$  is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where  $D$  is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.


3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The test is in transmitting mode.




**Test setup**


**9KHz ~ 30MHz**

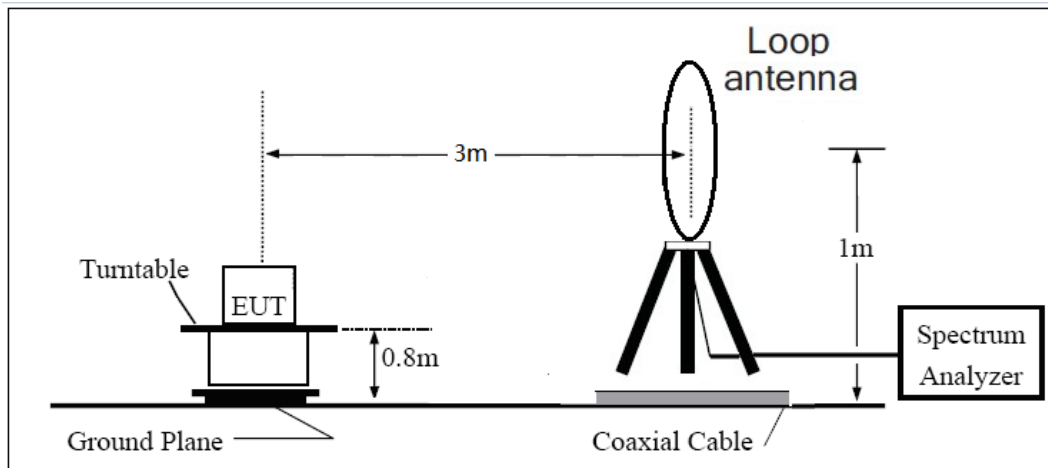

**30MHz ~ 1GHz**

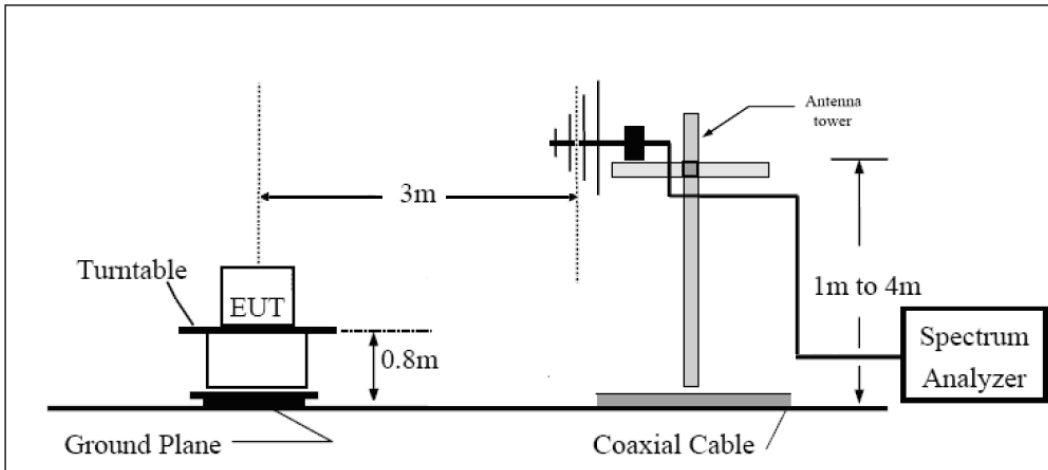

**Above 1GHz**

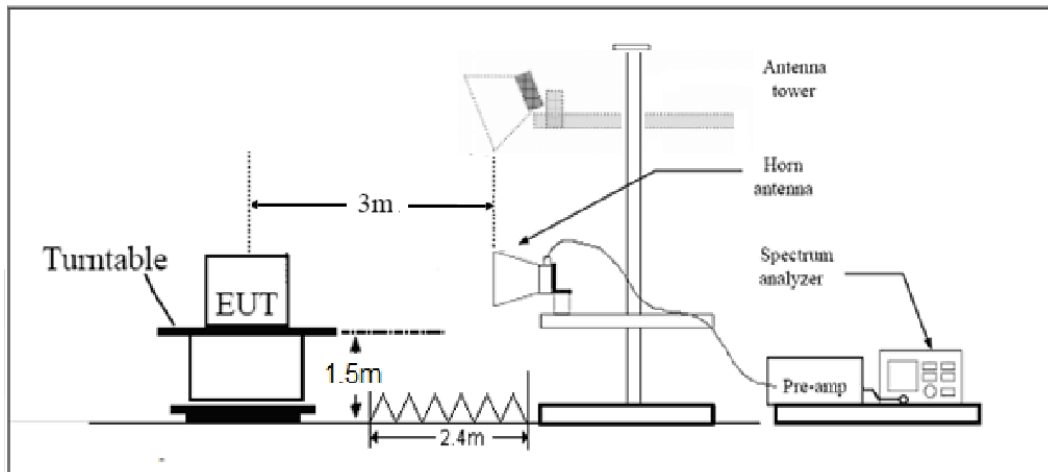

Note: Area side:2.4mX3.6m

**Limits**

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			


**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB




Test Results:

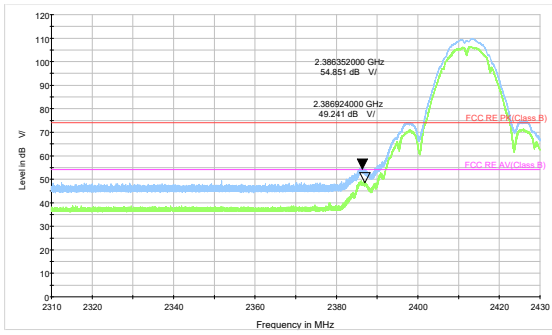


802.11b-Channel 1 Peak & Average

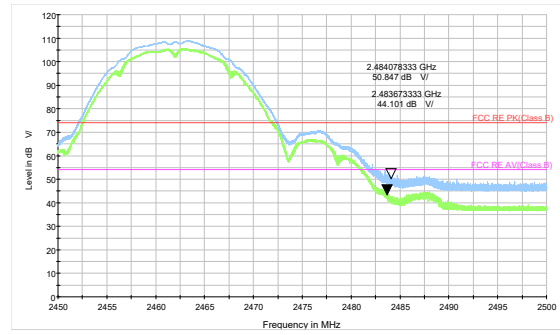


802.11b-Channel 11 Peak & Average

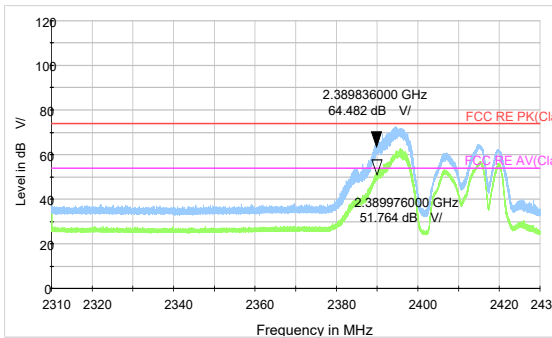


802.11g-Channel 1 Peak & Average

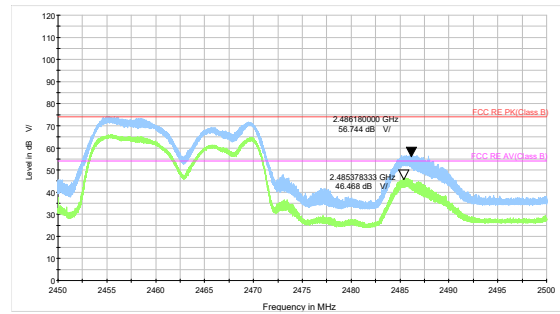


802.11g-Channel 11 Peak & Average

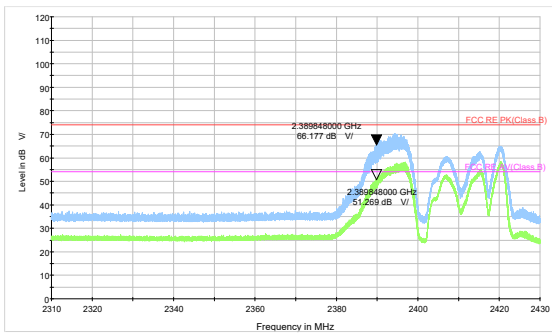


802.11n HT20 -Channel 1 Peak & Average

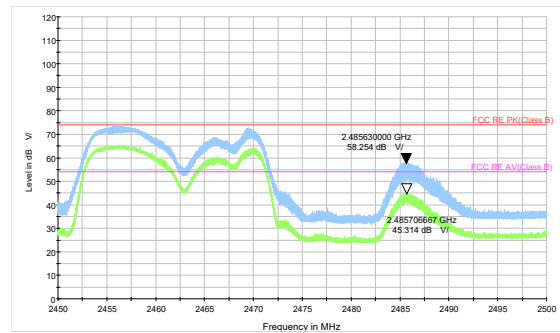

802.11n HT20 -Channel 11 Peak & Average

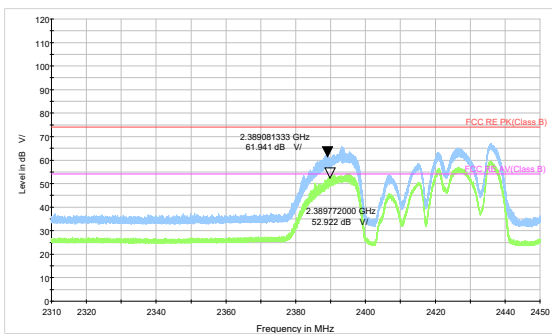

802.11n HT40 -Channel 3 Peak & Average

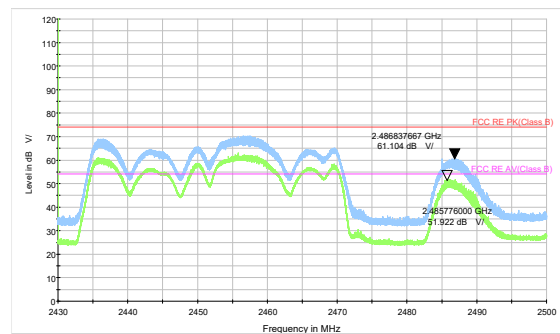

802.11n HT40 -Channel 9 Peak & Average

**Result of RE**

**Test result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz and 18GHz-26.5GHz are more than 20dB below the limit are not reported.


The following graphs display the maximum values of horizontal and vertical by software. For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

**After the pretest, MIMO was selected as the worst antenna for 802.11n HT20/ HT40. SISO Antenna 1 was selected as the worst SISO antenna.**

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11n (HT40), Channel 3 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

A font ( Level in dB $\mu$ V/ )in the test plot =(level in dB  $\mu$  V/m)

**Continuous TX mode:**

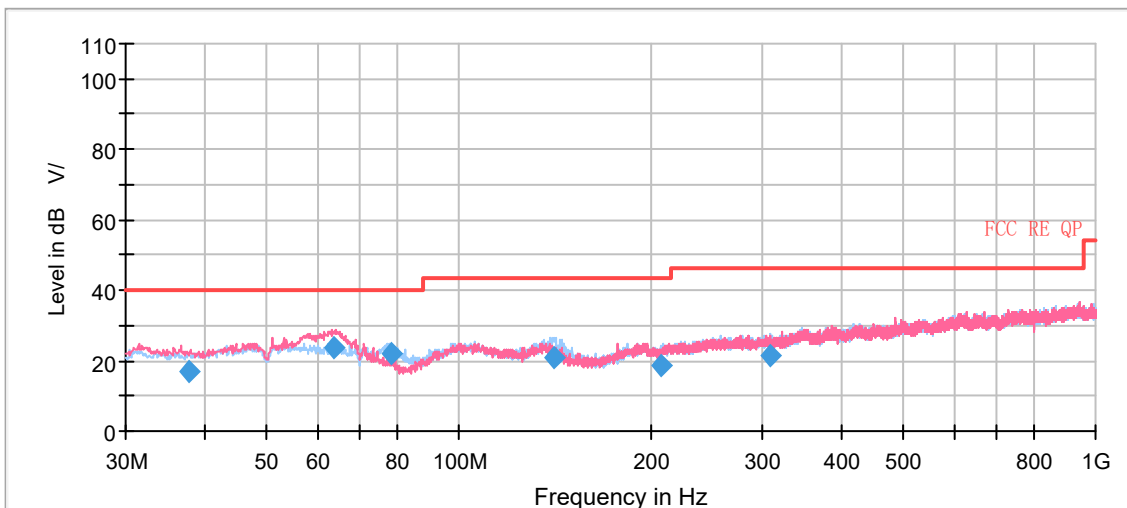


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
37.835000	16.65	100.0	V	13.0	-5.4	23.35	40.00
63.822500	23.54	100.0	V	297.0	-6.5	16.46	40.00
78.261250	21.85	225.0	H	50.0	-12.2	18.15	40.00
141.553750	21.13	199.0	H	188.0	-9.4	22.37	43.50
207.747500	18.48	125.0	H	270.0	-6.3	25.02	43.50
309.278750	21.36	100.0	H	325.0	-3.8	24.64	46.00


**Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)**

**2. Margin = Limit – Quasi-Peak**

## 802.11b CH1

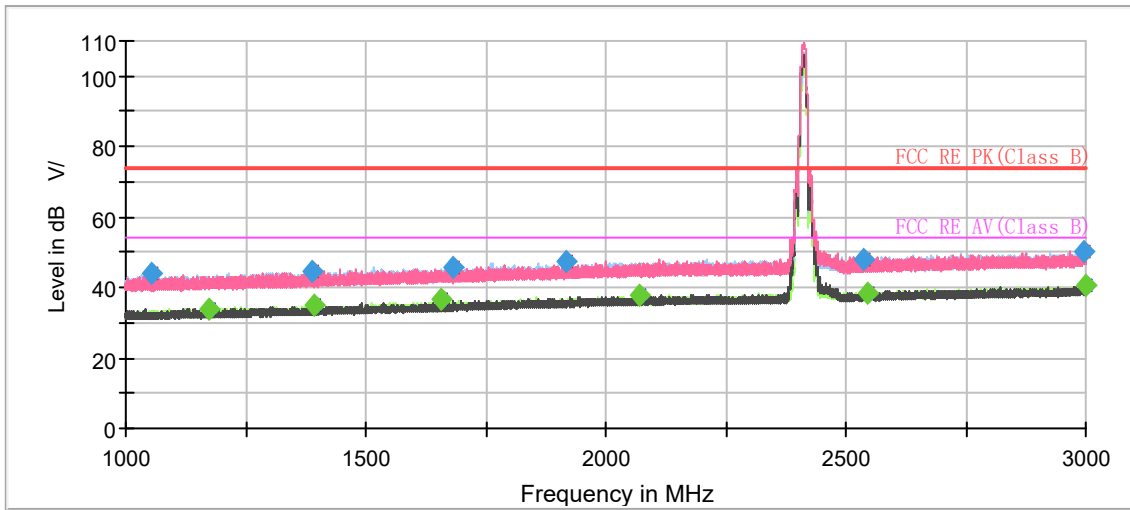

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

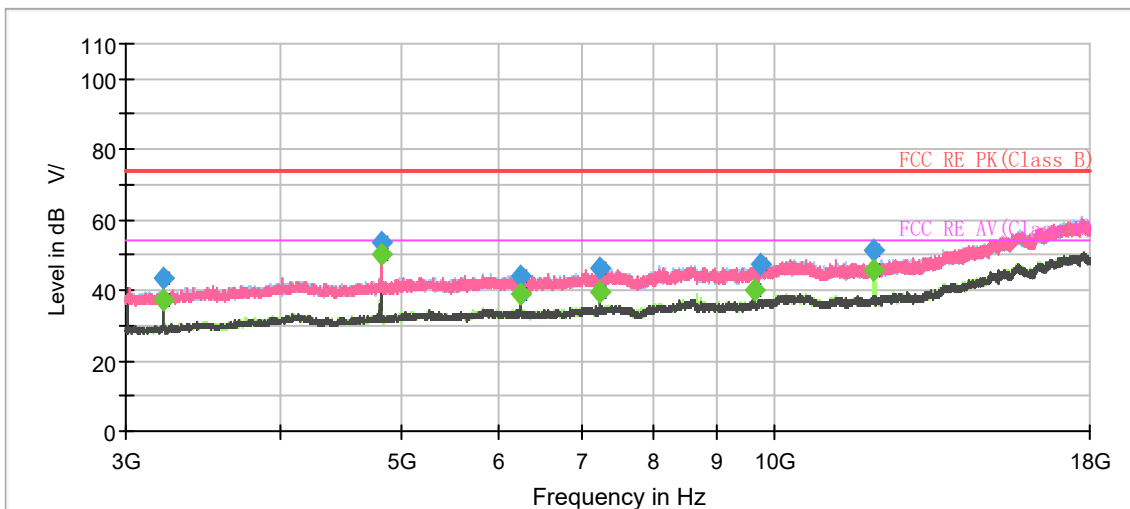

Radiates Emission from 3GHz to 18GHz







Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1051.800000	43.85	---	74.00	30.15	100.0	V	107.0	-8.1
1172.266667	---	34.12	54.00	19.88	100.0	V	137.0	-7.4
1388.066667	44.37	---	74.00	29.63	100.0	V	86.0	-6.2
1392.000000	---	34.77	54.00	19.23	200.0	H	122.0	-6.2
1658.733333	---	36.52	54.00	17.48	100.0	V	107.0	-4.7
1683.733333	45.69	---	74.00	28.31	200.0	H	276.0	-4.6
1916.933333	47.20	---	74.00	26.80	200.0	V	334.0	-3.2
2071.933333	---	37.95	54.00	16.05	100.0	H	266.0	-2.4
2536.866667	48.09	---	74.00	25.91	200.0	H	6.0	-0.4
2547.400000	---	38.30	54.00	15.70	100.0	H	0.0	-0.3
2995.400000	50.20	---	74.00	23.80	100.0	H	357.0	1.9
2998.666667	---	40.45	54.00	13.55	100.0	H	0.0	1.9

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

802.11b CH6

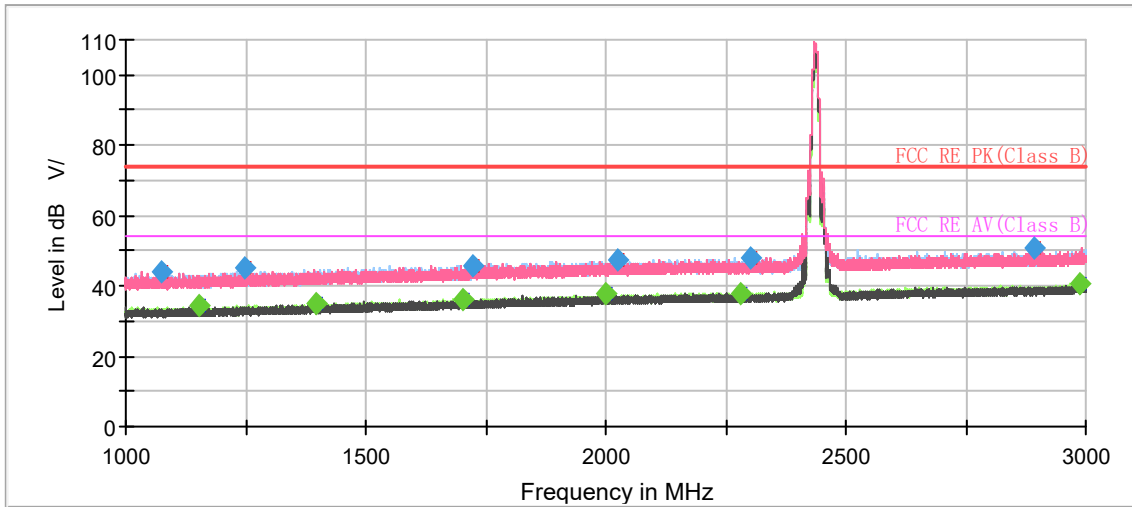

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

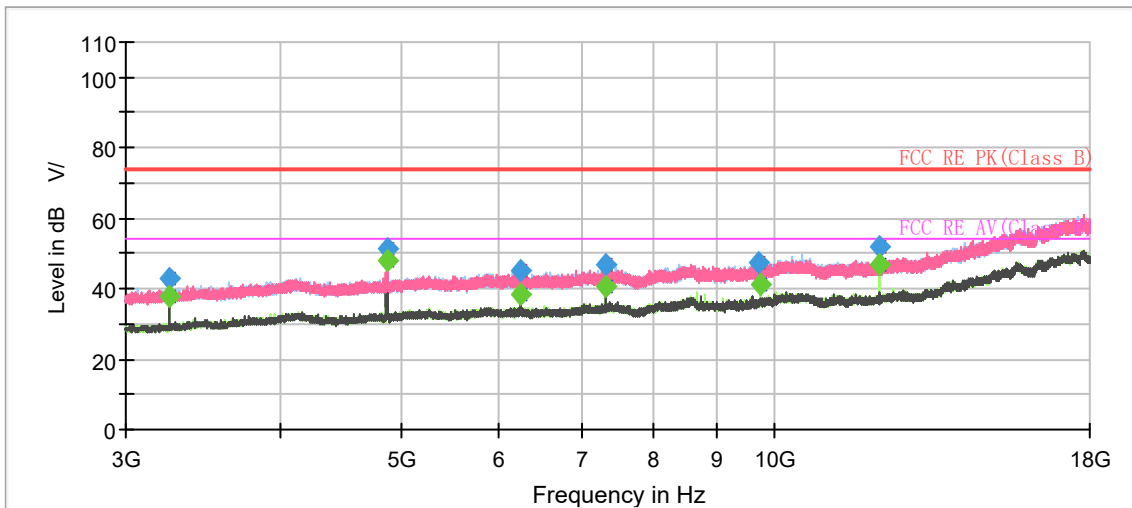


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1072.733333	44.18	---	74.00	29.82	100.0	V	112.0	-8.0
1151.466667	---	34.27	54.00	19.73	200.0	H	165.0	-7.5
1247.200000	45.08	---	74.00	28.92	100.0	H	0.0	-7.0
1395.733333	---	34.94	54.00	19.06	100.0	H	219.0	-6.2
1703.400000	---	36.02	54.00	17.98	200.0	H	354.0	-4.5
1723.533333	45.63	---	74.00	28.37	200.0	H	0.0	-4.3
1998.066667	---	37.53	54.00	16.47	100.0	H	170.0	-2.7
2024.666667	47.39	---	74.00	26.61	200.0	H	305.0	-2.6
2280.266667	---	37.53	54.00	16.47	200.0	H	334.0	-1.6
2303.333333	47.68	---	74.00	26.32	100.0	V	282.0	-1.5
2893.800000	50.62	---	74.00	23.38	100.0	H	0.0	1.2
2985.733333	---	40.40	54.00	13.60	200.0	H	344.0	1.8

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

802.11b CH11

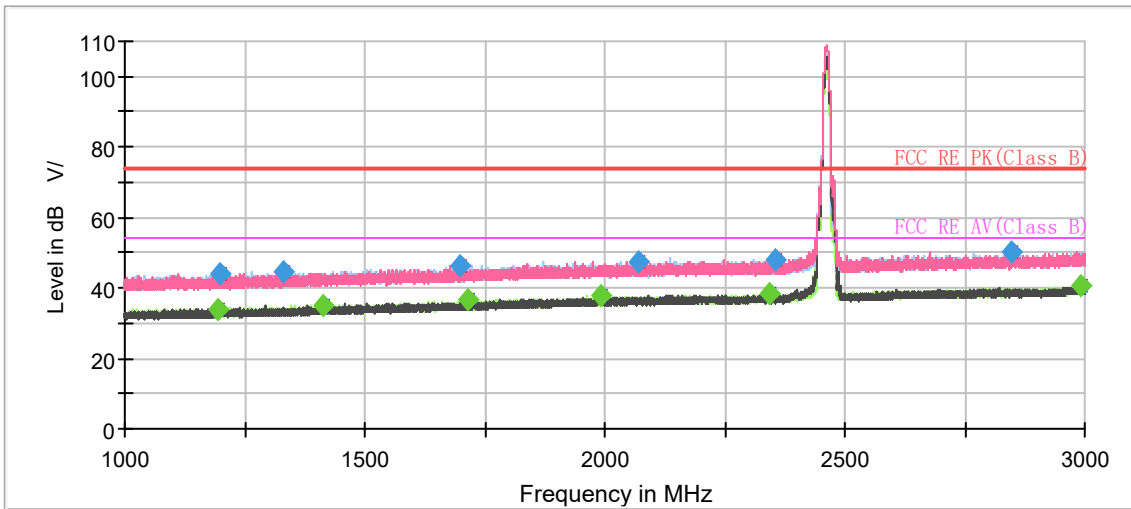

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

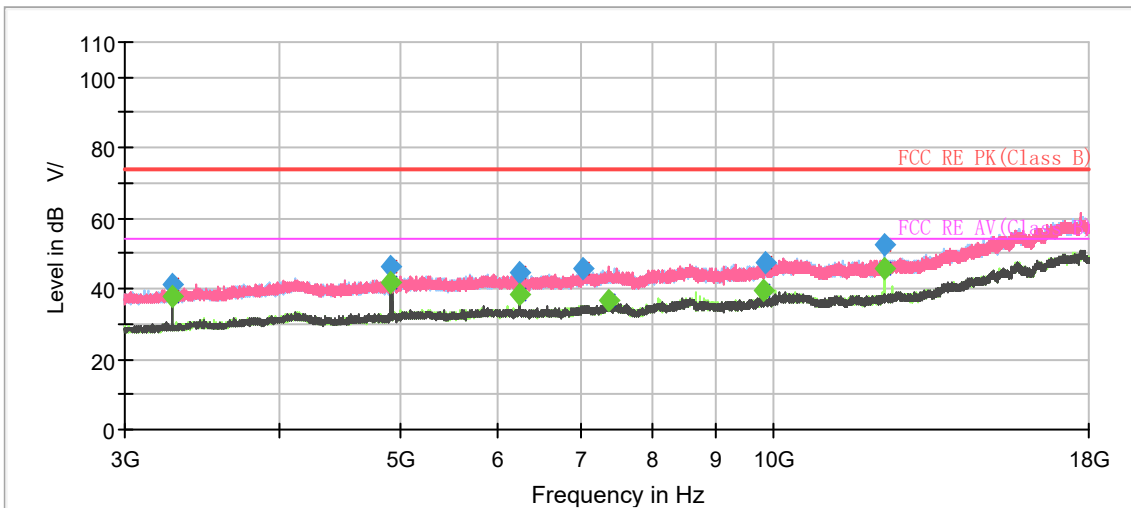


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1194.066667	---	34.11	54.00	19.89	200.0	H	3.0	-7.3
1200.400000	43.80	---	74.00	30.20	200.0	H	3.0	-7.3
1329.666667	44.72	---	74.00	29.28	100.0	H	31.0	-6.6
1411.733333	---	35.00	54.00	19.00	100.0	V	85.0	-6.1
1699.466667	46.39	---	74.00	27.61	100.0	V	115.0	-4.5
1716.400000	---	36.84	54.00	17.16	100.0	H	165.0	-4.4
1989.933333	---	37.65	54.00	16.35	200.0	H	155.0	-2.7
2072.200000	47.65	---	74.00	26.35	100.0	V	85.0	-2.4
2344.666667	---	38.34	54.00	15.66	200.0	H	226.0	-1.4
2355.933333	48.01	---	74.00	25.99	200.0	H	0.0	-1.3
2847.666667	50.13	---	74.00	23.87	100.0	V	208.0	1.1
2993.000000	---	40.58	54.00	13.42	100.0	H	268.0	1.9

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

802.11g CH1

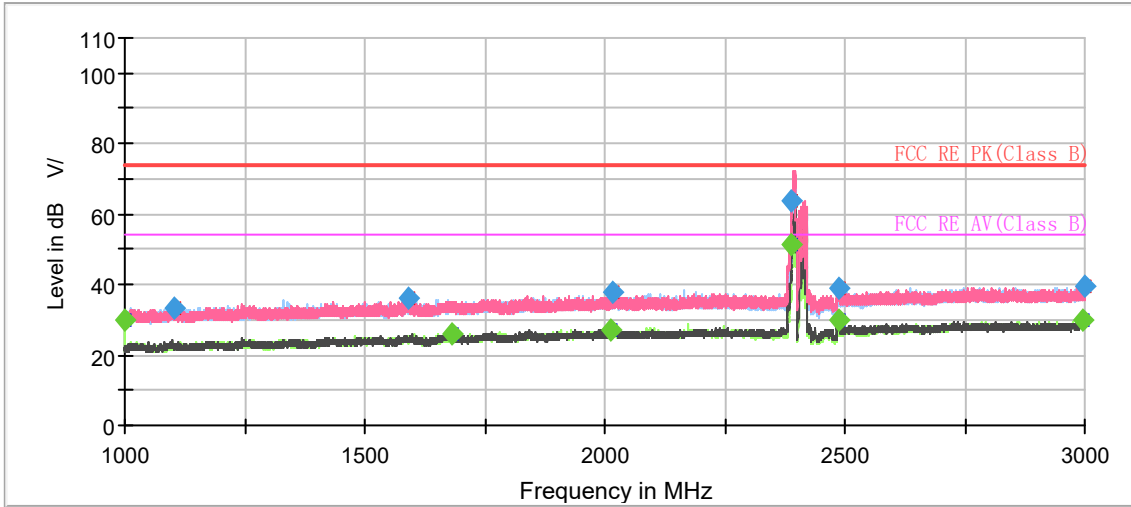

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

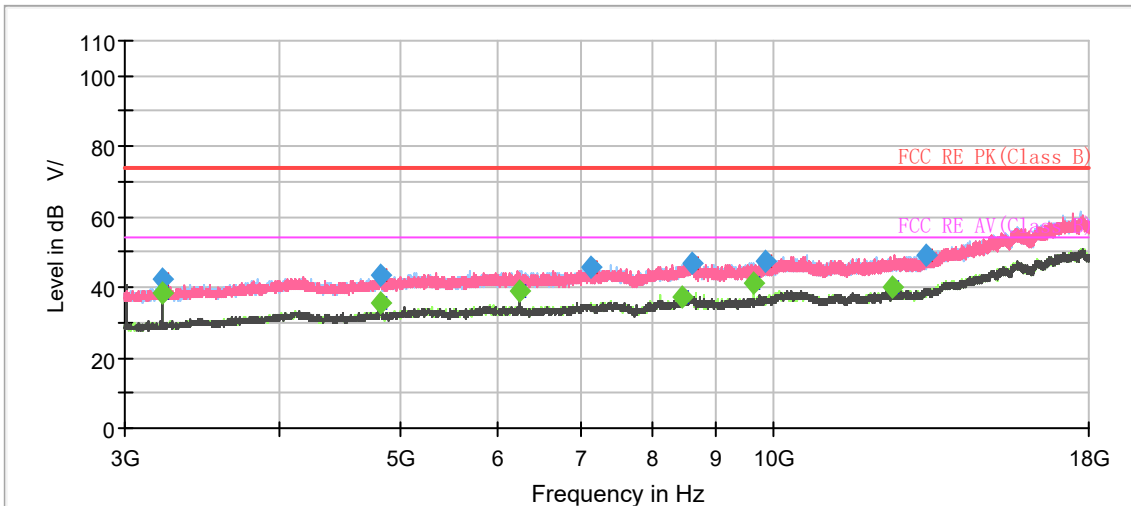

Radiates Emission from 3GHz to 18GHz







Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1001.800000	---	30.04	54.00	23.96	100.0	H	146.0	-18.5
1102.000000	33.55	---	74.00	40.45	200.0	V	184.0	-17.8
1589.333333	35.86	---	74.00	38.14	200.0	V	41.0	-15.1
1681.000000	---	26.00	54.00	28.00	100.0	V	351.0	-14.6
2012.000000	---	27.35	54.00	26.65	200.0	H	285.0	-12.6
2018.333333	37.65	---	74.00	36.35	200.0	H	0.0	-12.6
2389.666667	63.62	---	74.00	10.38	200.0	V	198.0	-11.2
2389.800000	---	51.33	54.00	2.67	200.0	V	0.0	-11.2
2486.200000	38.80	---	74.00	35.20	200.0	V	0.0	-10.7
2486.400000	---	29.91	54.00	24.09	200.0	V	341.0	-10.7
2996.666667	---	29.93	54.00	24.07	200.0	H	208.0	-8.1
2999.200000	39.67	---	74.00	34.33	200.0	V	334.0	-8.1

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

## 802.11g CH6

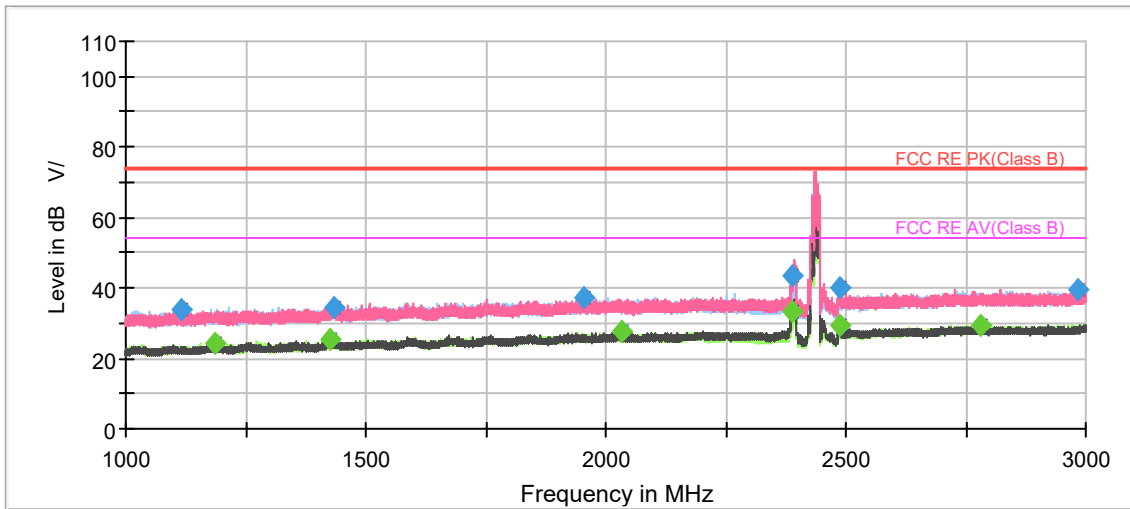

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

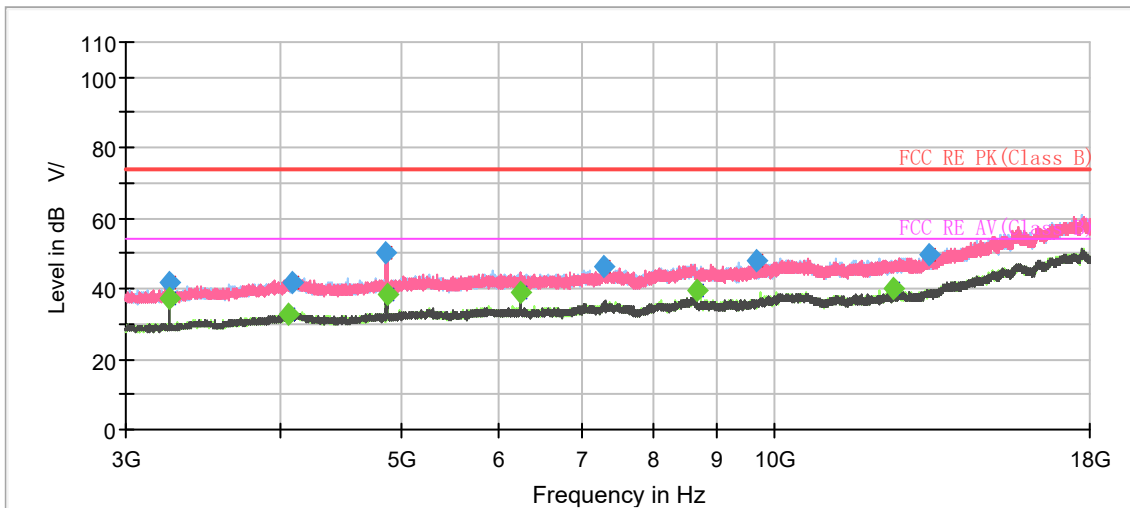


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1114.400000	33.93	---	74.00	40.07	200.0	V	175.0	-17.7
1187.600000	---	24.44	54.00	29.56	200.0	H	258.0	-17.4
1425.000000	---	25.23	54.00	28.77	100.0	H	76.0	-16.0
1433.000000	34.66	---	74.00	39.34	100.0	H	229.0	-16.0
1955.200000	37.24	---	74.00	36.76	200.0	H	8.0	-12.9
2032.800000	---	27.50	54.00	26.50	100.0	H	352.0	-12.5
2386.666667	---	33.01	54.00	20.99	100.0	V	25.0	-11.2
2388.400000	43.30	---	74.00	30.70	100.0	V	215.0	-11.2
2486.533333	---	29.56	54.00	24.44	200.0	V	0.0	-10.7
2486.733333	39.93	---	74.00	34.07	200.0	V	0.0	-10.7
2781.200000	---	29.36	54.00	24.64	200.0	H	90.0	-9.1
2981.666667	39.72	---	74.00	34.28	200.0	V	48.0	-8.2

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

802.11g CH11

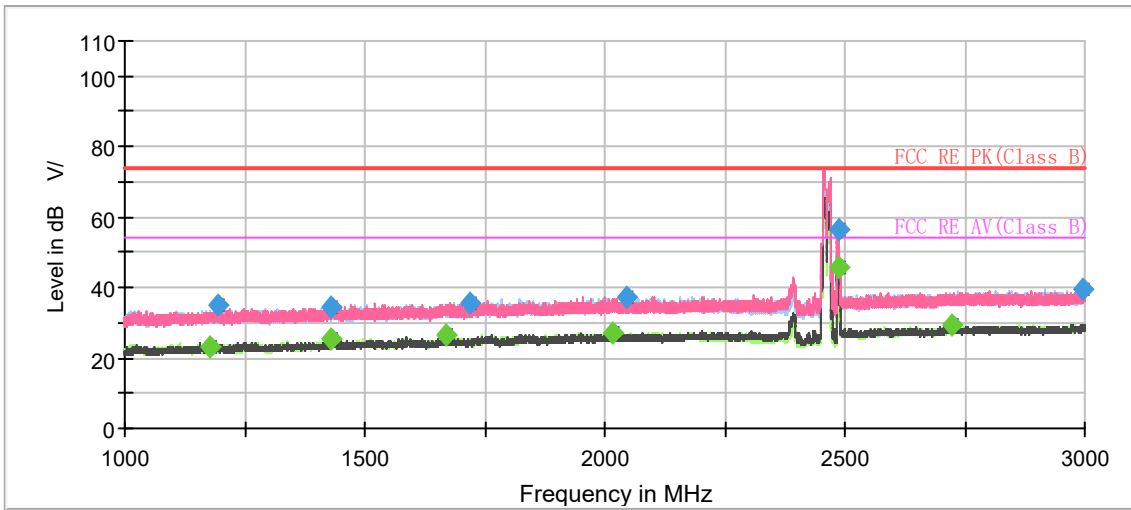

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

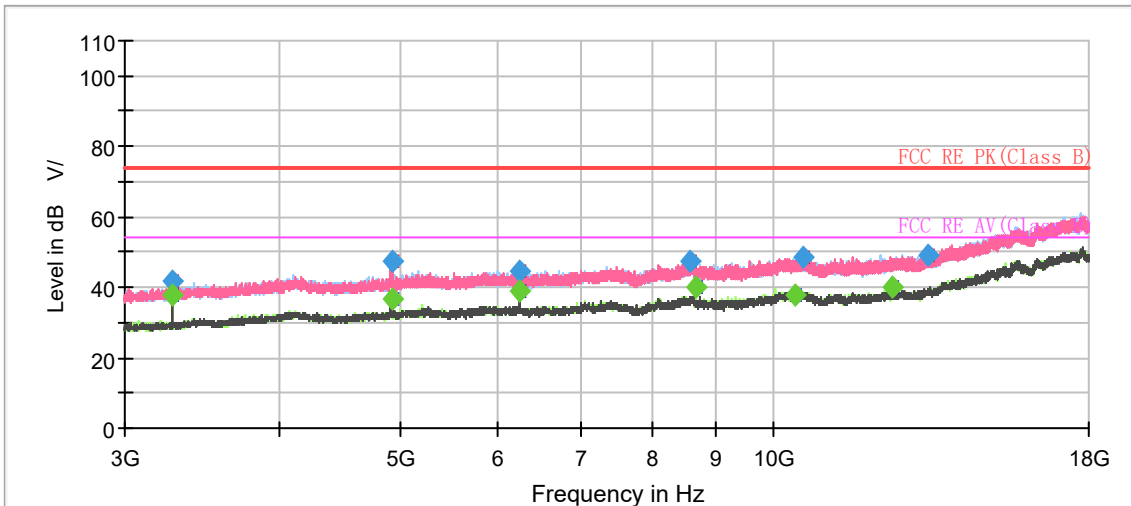


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1176.066667	---	23.14	54.00	30.86	200.0	H	317.0	-17.4
1193.266667	35.10	---	74.00	38.90	200.0	H	81.0	-17.3
1430.866667	34.58	---	74.00	39.42	200.0	H	171.0	-16.0
1431.733333	---	25.28	54.00	28.72	100.0	H	357.0	-16.0
1669.000000	---	26.26	54.00	27.74	100.0	V	3.0	-14.7
1717.200000	35.80	---	74.00	38.20	100.0	V	250.0	-14.4
2015.800000	---	27.13	54.00	26.87	200.0	H	211.0	-12.6
2045.400000	37.45	---	74.00	36.55	200.0	H	264.0	-12.5
2485.666667	---	45.59	54.00	8.41	200.0	V	352.0	-10.7
2486.000000	56.35	---	74.00	17.65	200.0	V	352.0	-10.7
2724.066667	---	29.59	54.00	24.41	200.0	V	67.0	-9.4
2995.266667	39.57	---	74.00	34.43	200.0	V	41.0	-8.1

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

## 802.11n (HT20) CH1

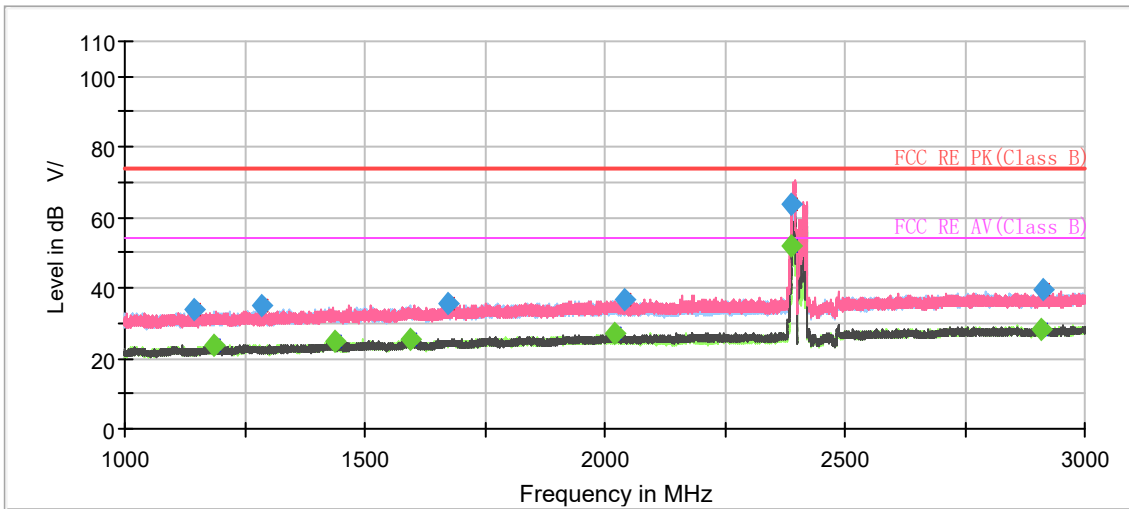

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

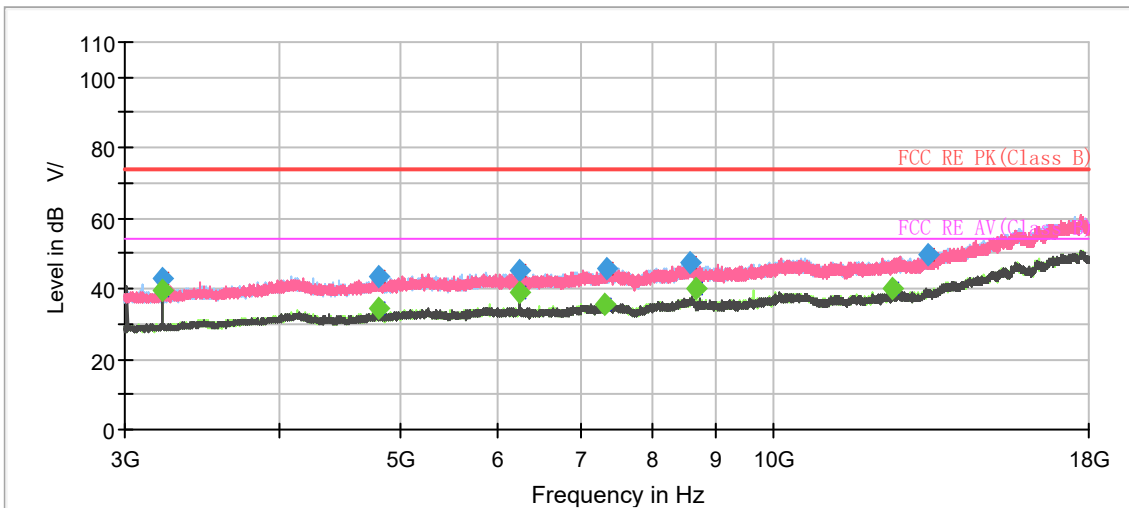

Radiates Emission from 3GHz to 18GHz







Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1143.000000	33.64	---	74.00	40.36	200.0	H	236.0	-17.6
1187.466667	---	23.95	54.00	30.05	100.0	V	0.0	-17.4
1285.066667	34.80	---	74.00	39.20	200.0	H	341.0	-16.8
1437.333333	---	24.64	54.00	29.36	100.0	V	332.0	-15.9
1593.866667	---	25.65	54.00	28.35	100.0	V	220.0	-15.1
1675.200000	35.49	---	74.00	38.51	100.0	H	251.0	-14.6
2020.333333	---	27.18	54.00	26.82	200.0	V	67.0	-12.6
2040.600000	36.53	---	74.00	37.47	100.0	V	22.0	-12.5
2389.466667	63.64	---	74.00	10.36	200.0	V	222.0	-11.2
2389.533333	---	51.62	54.00	2.38	100.0	V	316.0	-11.2
2909.800000	---	28.41	54.00	25.59	100.0	V	306.0	-8.7
2911.933333	39.62	---	74.00	34.38	200.0	V	0.0	-8.7

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

802.11n (HT20) CH6

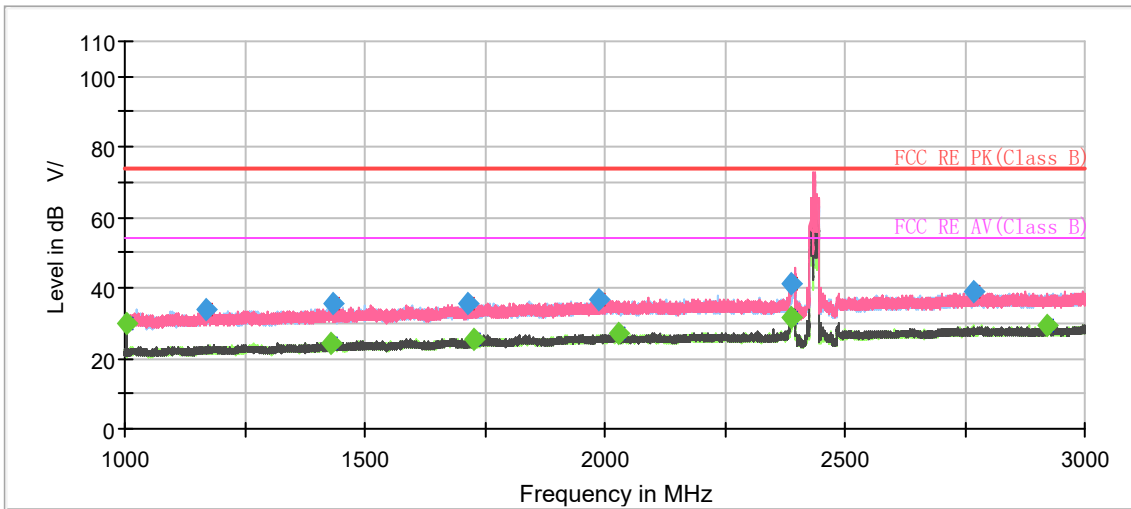

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

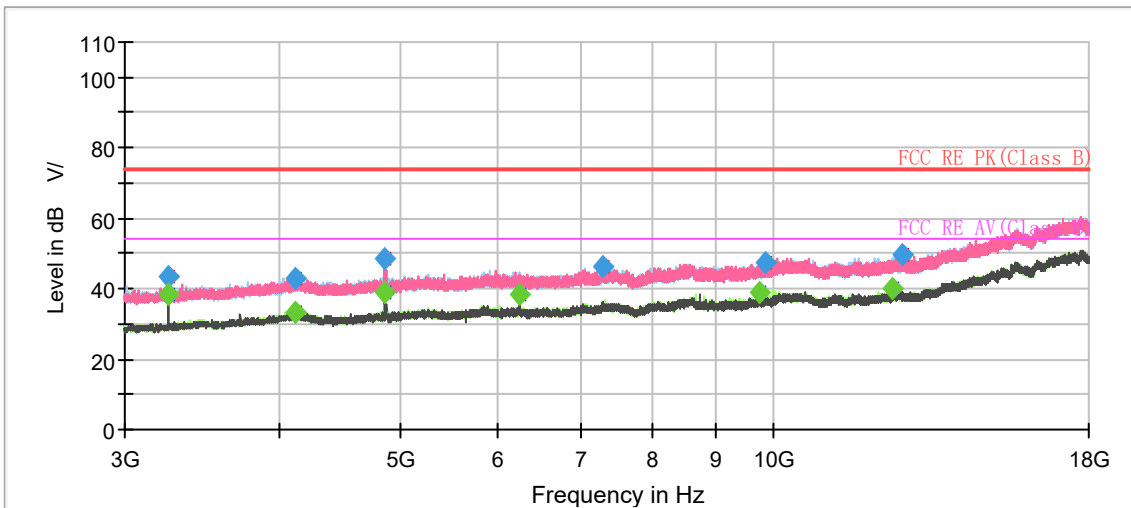


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1002.133333	---	30.04	54.00	23.96	200.0	V	290.0	-18.5
1171.000000	34.06	---	74.00	39.94	100.0	H	0.0	-17.4
1428.200000	---	24.54	54.00	29.46	200.0	H	129.0	-16.0
1434.866667	35.70	---	74.00	38.30	100.0	H	69.0	-15.9
1714.200000	35.81	---	74.00	38.19	200.0	H	342.0	-14.4
1728.333333	---	25.62	54.00	28.38	100.0	H	69.0	-14.3
1988.466667	36.94	---	74.00	37.06	200.0	V	143.0	-12.7
2030.533333	---	26.86	54.00	27.14	100.0	V	104.0	-12.5
2388.733333	---	31.62	54.00	22.38	200.0	H	50.0	-11.2
2388.933333	41.18	---	74.00	32.82	200.0	V	0.0	-11.2
2770.600000	39.14	---	74.00	34.86	100.0	V	286.0	-9.2
2920.533333	---	29.32	54.00	24.68	200.0	V	211.0	-8.7

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

## 802.11n (HT20) CH11

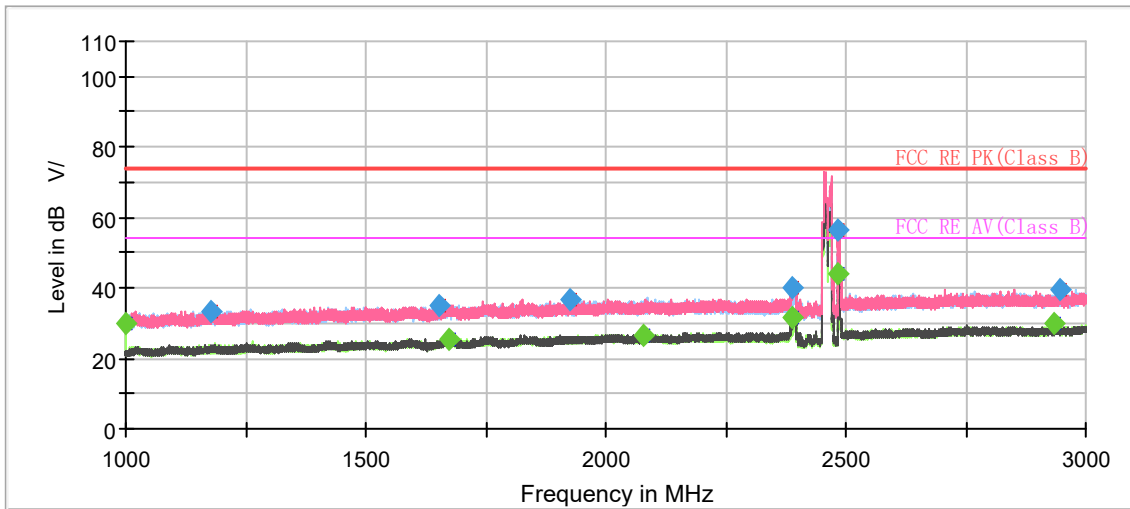

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

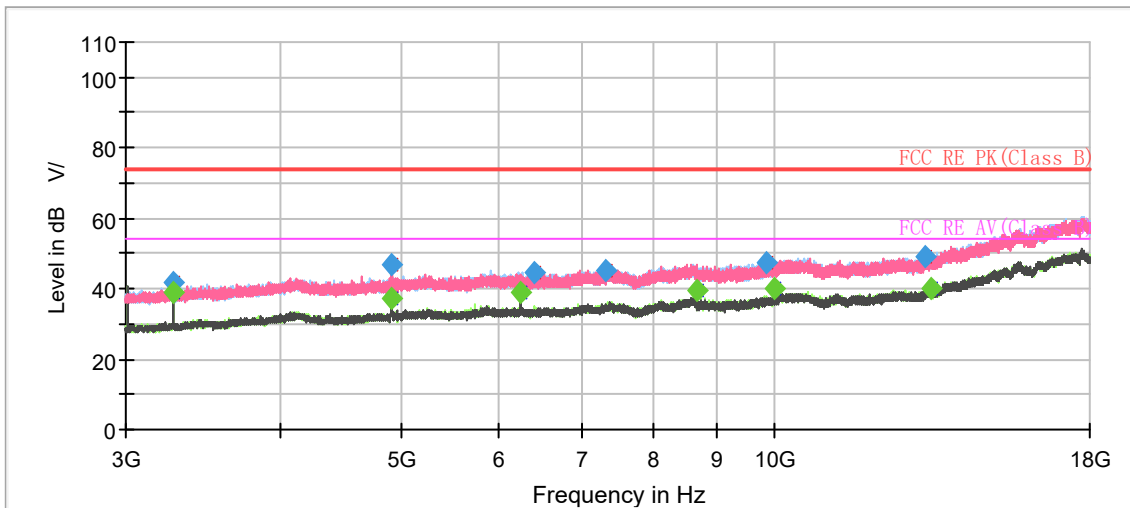


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1001.400000	---	30.04	54.00	23.96	100.0	H	189.0	-18.5
1176.533333	33.45	---	74.00	40.55	100.0	V	200.0	-17.4
1653.400000	35.19	---	74.00	38.81	100.0	V	35.0	-14.8
1672.666667	---	25.65	54.00	28.35	100.0	H	243.0	-14.6
1925.733333	36.64	---	74.00	37.36	200.0	H	188.0	-13.1
2077.933333	---	26.77	54.00	27.23	100.0	H	0.0	-12.3
2388.533333	---	31.42	54.00	22.58	100.0	V	320.0	-11.2
2389.066667	40.02	---	74.00	33.98	100.0	V	35.0	-11.2
2485.266667	---	44.10	54.00	9.90	200.0	V	304.0	-10.7
2485.400000	56.38	---	74.00	17.62	100.0	V	320.0	-10.7
2934.600000	---	29.63	54.00	24.37	200.0	H	0.0	-8.6
2946.666667	39.33	---	74.00	34.67	100.0	H	189.0	-8.5

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

802.11n (HT40) CH3

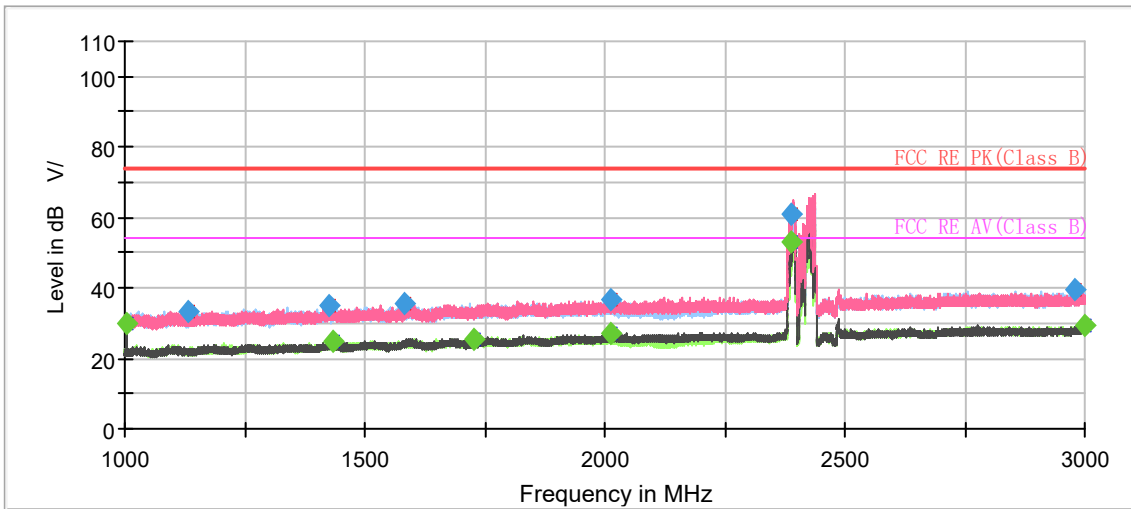

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

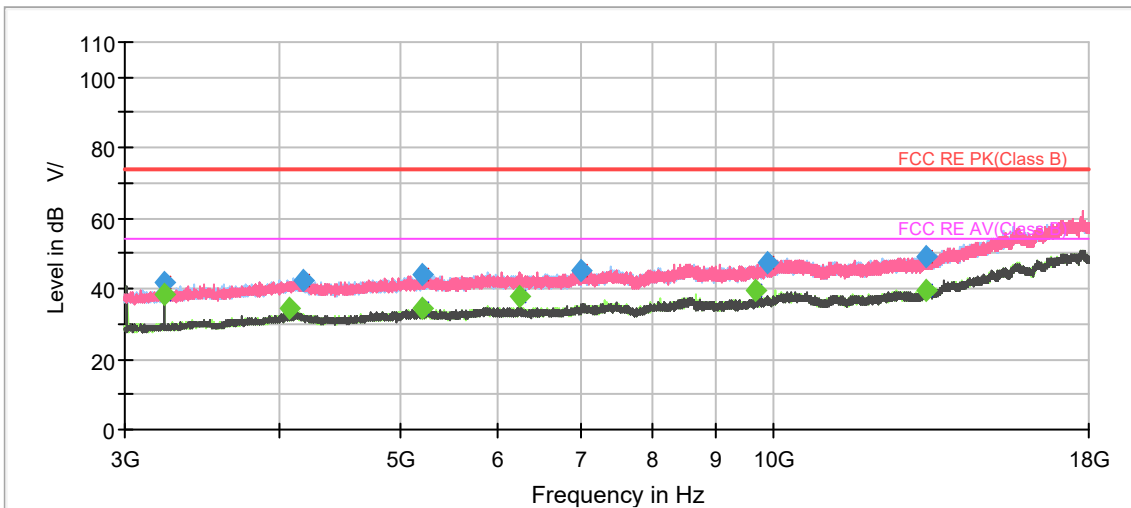

Radiates Emission from 3GHz to 18GHz







Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1002.533333	---	30.05	54.00	23.95	200.0	V	346.0	-18.5
1134.266667	33.26	---	74.00	40.74	200.0	H	311.0	-17.6
1425.666667	34.75	---	74.00	39.25	100.0	H	277.0	-16.0
1432.133333	---	24.72	54.00	29.28	100.0	V	197.0	-16.0
1581.000000	35.52	---	74.00	38.48	100.0	H	8.0	-15.1
1728.733333	---	25.64	54.00	28.36	200.0	V	254.0	-14.3
2010.800000	36.40	---	74.00	37.60	200.0	V	0.0	-12.6
2014.266667	---	26.93	54.00	27.07	200.0	V	121.0	-12.6
2389.333333	61.07	---	74.00	12.93	200.0	V	307.0	-11.2
2389.533333	---	52.90	54.00	1.10	200.0	V	320.0	-11.2
2980.600000	39.32	---	74.00	34.68	100.0	H	108.0	-8.2
2999.266667	---	29.59	54.00	24.41	100.0	H	277.0	-8.1

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

802.11n (HT40) CH6

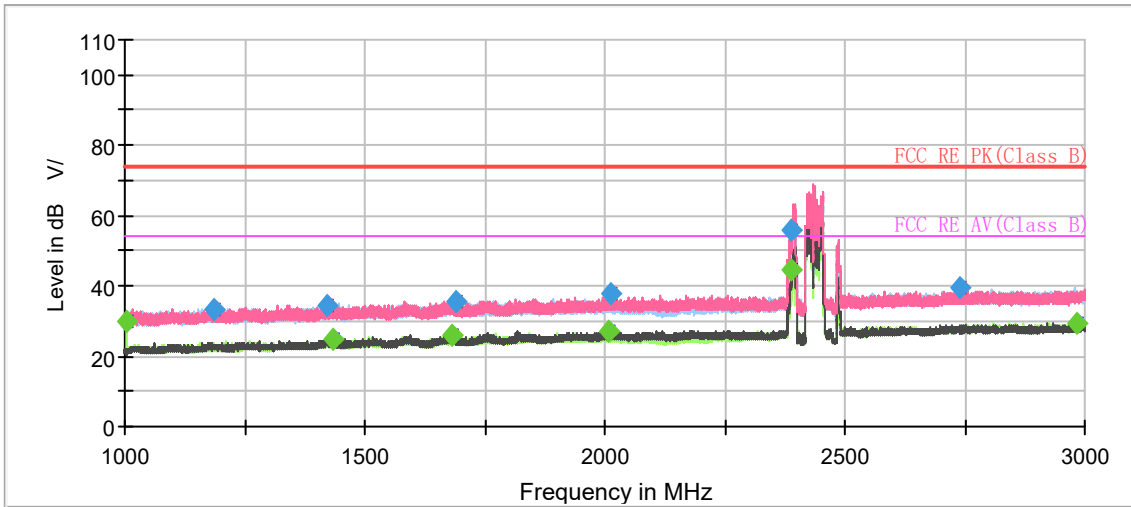

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

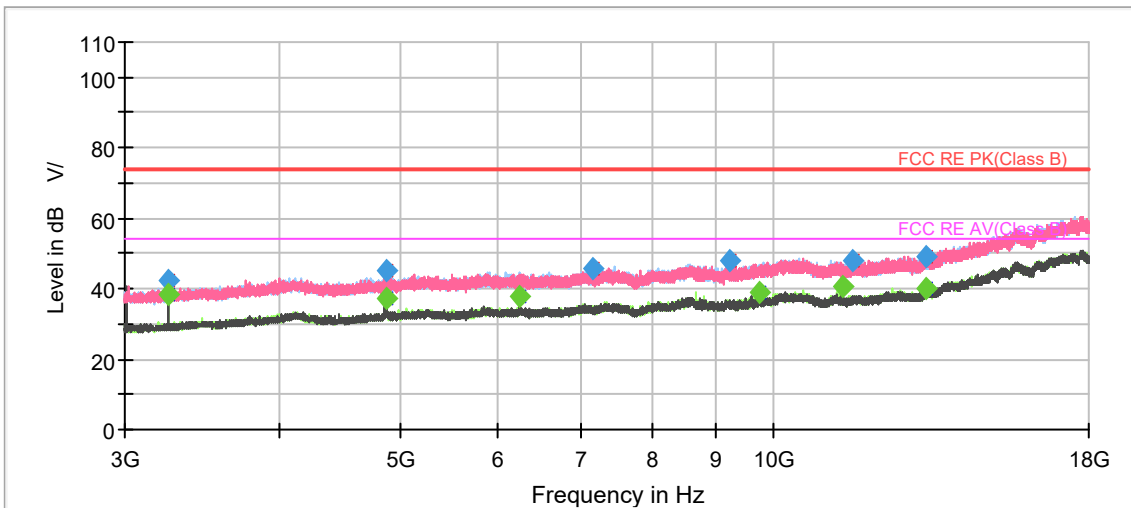


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1002.400000	---	30.04	54.00	23.96	200.0	H	187.0	-18.5
1187.533333	33.54	---	74.00	40.46	200.0	V	231.0	-17.4
1421.533333	34.43	---	74.00	39.57	200.0	H	160.0	-16.0
1433.400000	---	24.87	54.00	29.13	200.0	H	160.0	-16.0
1680.933333	---	26.15	54.00	27.85	200.0	H	253.0	-14.6
1690.333333	35.44	---	74.00	38.56	200.0	H	312.0	-14.5
2007.733333	---	27.11	54.00	26.89	200.0	V	39.0	-12.6
2012.000000	37.54	---	74.00	36.46	200.0	H	80.0	-12.6
2388.733333	55.99	---	74.00	18.01	100.0	V	310.0	-11.2
2389.133333	---	44.32	54.00	9.68	200.0	V	0.0	-11.2
2740.933333	39.40	---	74.00	34.60	200.0	H	132.0	-9.3
2981.466667	---	29.40	54.00	24.60	100.0	H	182.0	-8.2

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

802.11n (HT40) CH9

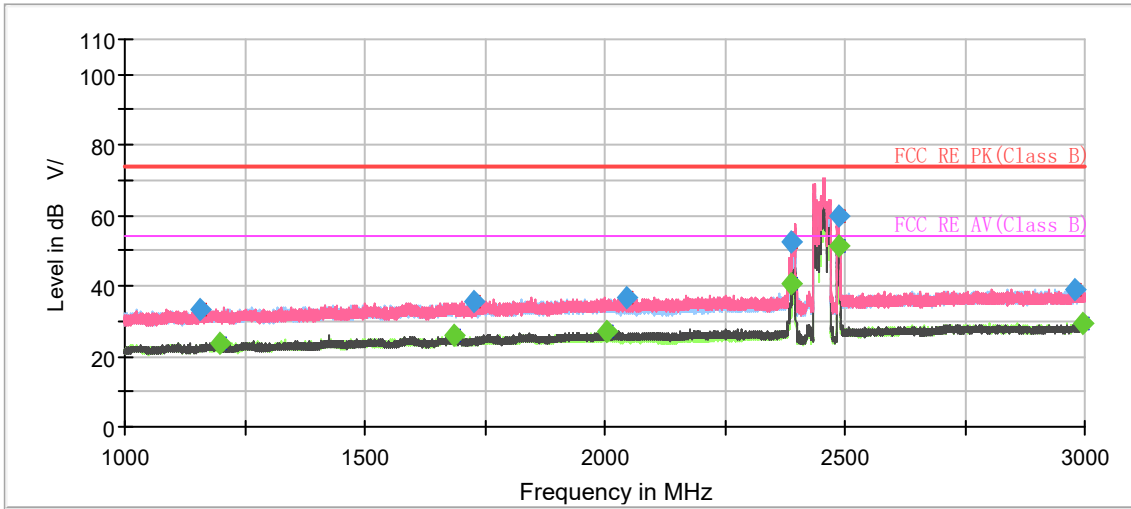

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

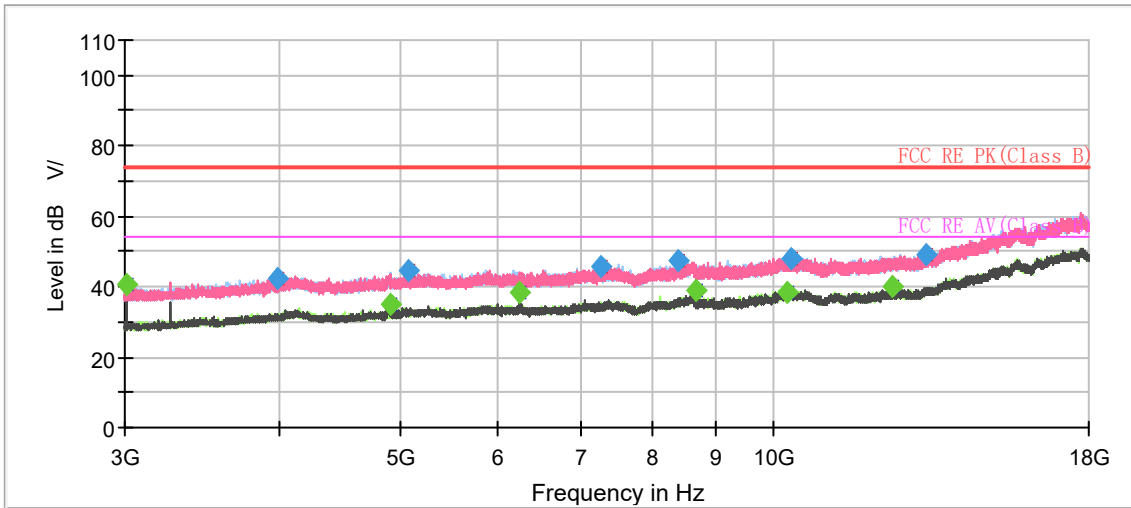

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1155.733333	33.37	---	74.00	40.63	100.0	H	305.0	-17.5
1199.266667	---	23.91	54.00	30.09	100.0	H	166.0	-17.3
1687.933333	---	25.87	54.00	28.13	100.0	V	218.0	-14.6
1726.266667	35.34	---	74.00	38.66	100.0	H	24.0	-14.3
2005.866667	---	27.00	54.00	27.00	100.0	V	63.0	-12.6
2044.600000	36.82	---	74.00	37.18	100.0	V	329.0	-12.5
2389.533333	---	40.61	54.00	13.39	200.0	V	356.0	-11.2
2389.933333	52.30	---	74.00	21.70	100.0	V	38.0	-11.2
2485.800000	---	51.26	54.00	2.74	200.0	V	0.0	-10.7
2487.266667	60.07	---	74.00	13.93	200.0	V	0.0	-10.7
2978.133333	39.03	---	74.00	34.97	100.0	V	258.0	-8.2
2994.133333	---	29.51	54.00	24.49	200.0	H	176.0	-8.1

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**



During the test, the Radiates Emission from 18GHz to 26.5GHz was performed in all modes with all channels, 802.11n (HT40), Channel 3 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

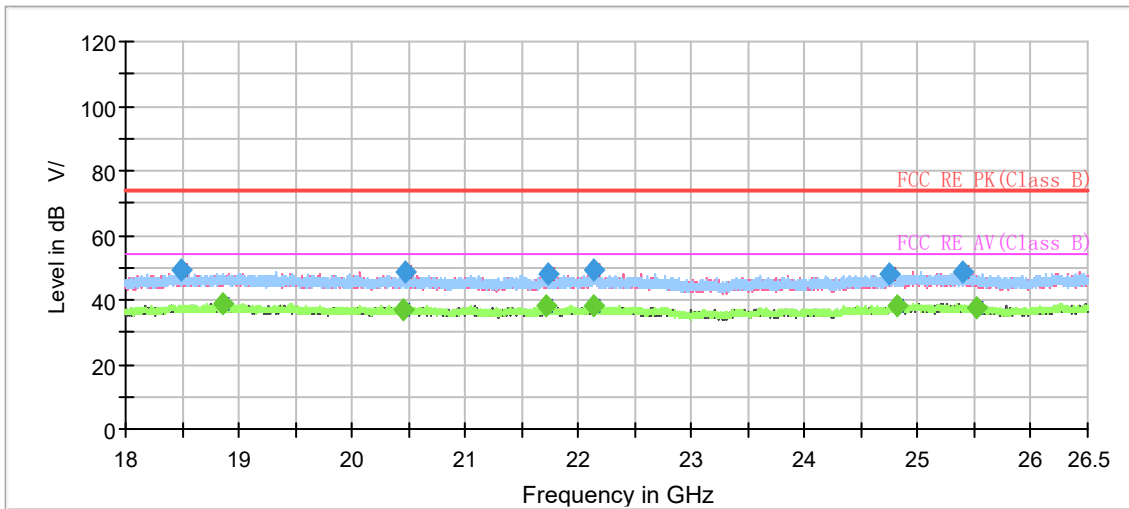

Radiates Emission from 18GHz to 26.5GHz

### 5.7. Conducted Emission

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


#### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz.

The measurement result should include both L line and N line.

The test is in transmitting mode.

#### Test Setup

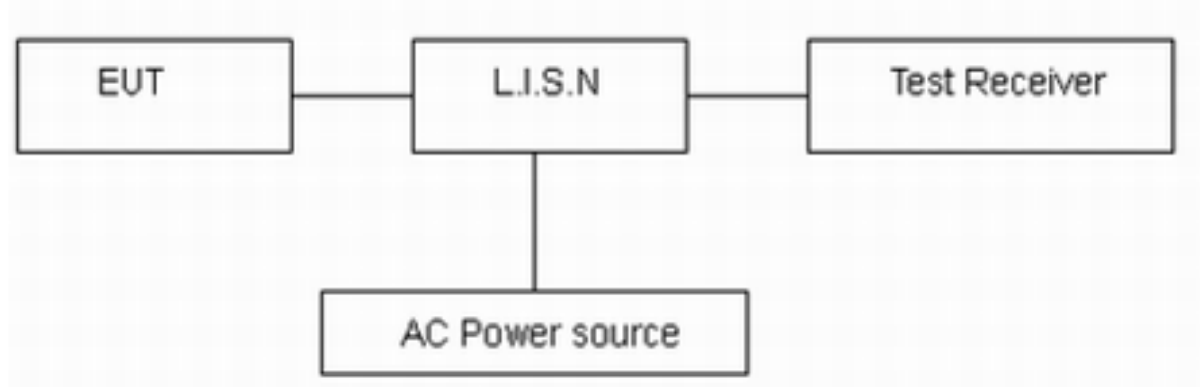

Note: AC Power source is used to change the voltage 110V/60Hz.

#### Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

\*: Decreases with the logarithm of the frequency.


#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 2.69$  dB.



**Test Results:**


Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes (WIFI 2.4G) with all channels, 802.11n (HT40), Channel 3 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

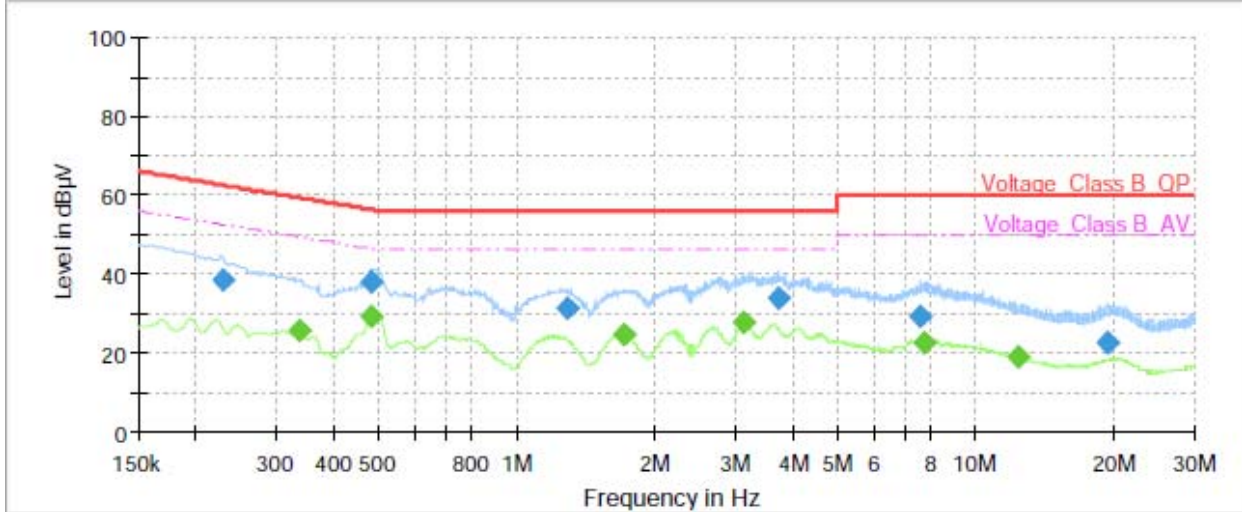

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.23	38.69	---	62.50	23.81	70.0	9.000	L1	ON	21
0.34	---	25.86	49.28	23.42	70.0	9.000	L1	ON	21
0.48	38.10	---	56.29	18.19	70.0	9.000	L1	ON	20
0.49	---	29.42	46.25	16.83	70.0	9.000	L1	ON	20
1.29	31.20	---	56.00	24.80	70.0	9.000	L1	ON	20
1.71	---	24.67	46.00	21.33	70.0	9.000	L1	ON	20
3.14	---	27.80	46.00	18.20	70.0	9.000	L1	ON	19
3.71	33.79	---	56.00	22.21	70.0	9.000	L1	ON	19
7.61	29.30	---	60.00	30.70	70.0	9.000	L1	ON	20
7.75	---	22.53	50.00	27.47	70.0	9.000	L1	ON	20
12.41	---	19.16	50.00	30.84	70.0	9.000	L1	ON	20
19.48	22.50	---	60.00	37.50	70.0	9.000	L1	ON	20

**Remark: Correct factor=cable loss + LISN factor**

L line Conducted Emission from 150 KHz to 30 MHz

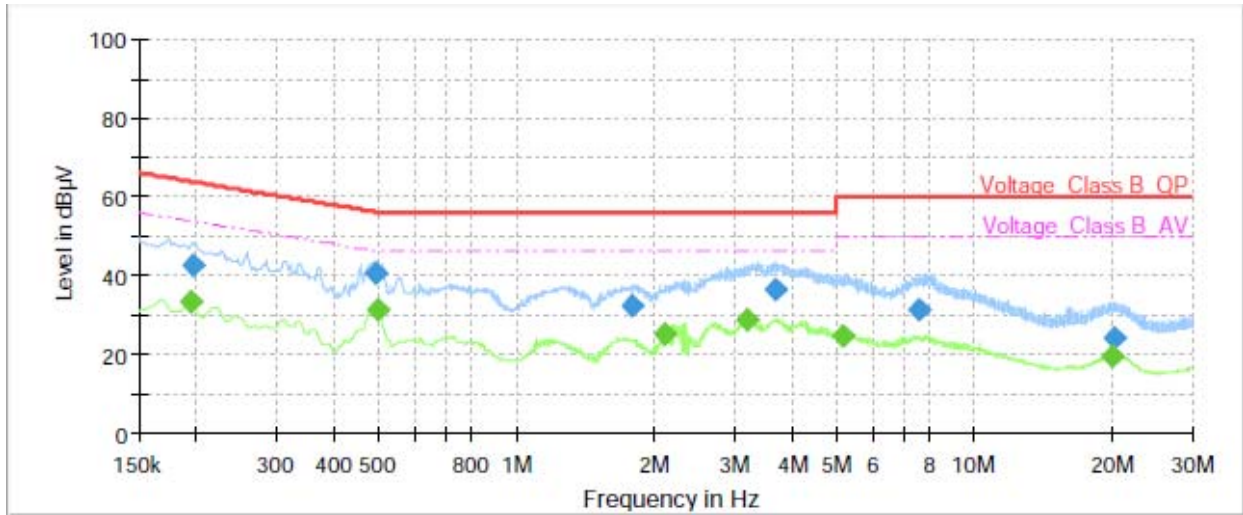

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.20	---	33.18	53.82	20.64	70.0	9.000	N	ON	21
0.20	42.61	---	63.73	21.12	70.0	9.000	N	ON	21
0.49	40.71	---	56.10	15.39	70.0	9.000	N	ON	20
0.50	---	31.03	46.02	14.99	70.0	9.000	N	ON	20
1.80	32.29	---	56.00	23.71	70.0	9.000	N	ON	20
2.12	---	25.36	46.00	20.64	70.0	9.000	N	ON	20
3.20	---	28.88	46.00	17.12	70.0	9.000	N	ON	19
3.70	36.17	---	56.00	19.83	70.0	9.000	N	ON	19
5.15	---	24.84	50.00	25.16	70.0	9.000	N	ON	19
7.61	31.50	---	60.00	28.50	70.0	9.000	N	ON	20
20.09	---	19.28	50.00	30.72	70.0	9.000	N	ON	20
20.16	24.19	---	60.00	35.81	70.0	9.000	N	ON	20

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz



## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV30	100815	2020-12-13	2021-12-12
EMI Test Receiver	R&S	ESCI	100948	2021-05-15	2022-05-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2022-12-15
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102644	2018-06-20	2023-06-19
EMI Test Receiver	R&S	ESR	101667	2021-05-16	2022-05-15
LISN	R&S	ENV216	101171	2018-12-15	2021-12-14
Spectrum Analyzer	Agilent	N9010A	MY47191109	2021-05-15	2022-05-14
Power Meter	R&S	NRP2	104306	2021-05-15	2022-05-14
Power Sensor	R&S	NRP-Z21	104799	2021-05-15	2022-05-14
20dB Attenuator	Star River Highlight	UCL-TS2S-20	18013001	2020-12-14	2021-12-13
RF Cable	Agilent	SMA 15cm	0001	2021-06-12	2021-12-13
Software	R&S	EMC32	9.26.0	/	/

\*\*\*\*\*END OF REPORT \*\*\*\*\*



## **ANNEX A: The EUT Appearance**

The EUT Appearance are submitted separately.



## **ANNEX B: Test Setup Photos**

**The Test Setup Photos are submitted separately.**