



FCC Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : LTE/WCDMA/GSM(GPRS) Multi-Mode Digital
Mobile Phone
BRAND NAME : ZTE
MODEL NAME : Z559DL
FCC ID : SRQ-Z559DL
STANDARD : FCC CFR Title 47 Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Apr. 03, 2018 and testing was completed on Aug. 01, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 7

 1.6. Test Location 8

 1.7. Applicable Standards 8

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1. Test Mode 9

 2.2. Connection Diagram of Test System 11

 2.3. Support Unit used in test configuration and system 12

 2.4. EUT Operation Test Setup 12

3. TEST RESULT 13

 3.1. Test of AC Conducted Emission Measurement 13

 3.2. Test of Radiated Emission Measurement 18

4. LIST OF MEASURING EQUIPMENT 22

5. UNCERTAINTY OF EVALUATION 23

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC840313	Rev. 01	Initial issue of report	Sep. 12, 2018



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 6.17 dB at 2.249 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.06 dB at 314.21 MHz for Quasi-Peak



1. General Description

1.1. Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2. Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	Z559DL
FCC ID	SRQ-Z559DL
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ HSPA+(16QAM uplink is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth BR/EDR/LE
IMEI Code	Conduction: 868504030014882 Radiation: 868504030015731
HW Version	Z559DLHW1.0
SW Version	Z559DLV1.0.0B01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz LTE Band 71 : 665.5 MHz ~ 695.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 66 : 2110.7 MHz ~ 2179.3 MHz LTE Band 71 : 619.5 MHz ~ 649.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz FM : 88 MHz ~ 108 MHz
Antenna Type	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna FM: External headset Antenna



Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (uplink is not supported) LTE: QPSK / 16QAM / 64QAM(Downlink Only) 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK FM
---------------------------	--

1.5. Modification of EUT

No modifications are made to the EUT during all test items.



1.6. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Test Site	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS	CN5013	630927

1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC CFR Title 47 Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Test Items	Function Type
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter 1) + Earphone + Battery + Camera (Rear)
	Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter 1) + Earphone + Battery + Camera (Front)
	Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter 1) + Earphone + Battery + MPEG4(Colour Bar)
	Mode 4: WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter 1) + Earphone + Battery + FM(88MHz) Rx
	Mode 5: GSM 850 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter 2) + Earphone + Battery + Camera(Rear)
	Mode 6: GSM 850 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter 3) + Earphone + Battery + Camera(Rear)
	Mode 7: LTE Band 2 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Data Link with Notebook) + Earphone + Battery + GNSS Rx
Radiated Emissions	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter 1) + Earphone + Battery + Camera (Rear)
	Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter 1) + Earphone + Battery + Camera (Front)
	Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter 1) + Earphone + Battery + MPEG4(Colour Bar)
	Mode 4: WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter 1) + Earphone + Battery + FM(88MHz) Rx
	Mode 5: WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter 2) + Earphone + Battery + MPEG4(Colour Bar)
	Mode 6: WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter 3) + Earphone + Battery + MPEG4(Colour Bar)
	Mode 7: LTE Band 2 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Data Link with Notebook) + Earphone + Battery + GNSS Rx



Remark:

1. The worst case of AC is mode 5; only the test data of this mode is reported.
2. The worst case of RE is mode 7; only the test data of this mode is reported.
3. Data Link with Notebook means data application transferred mode between EUT and Notebook.

2.2.Connection Diagram of Test System

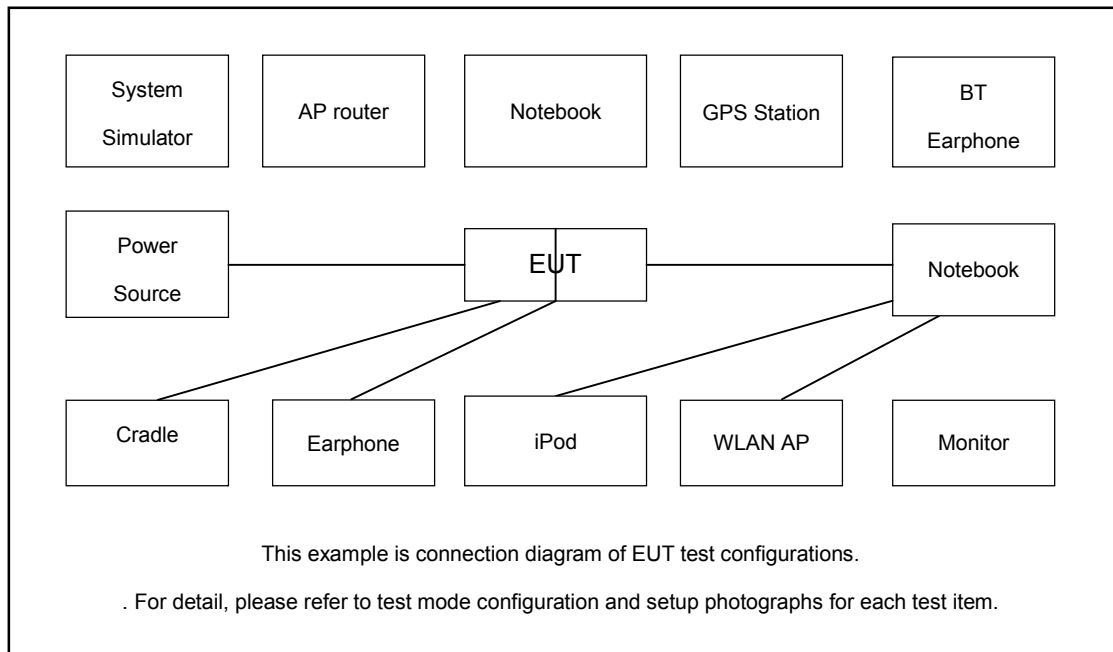

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
3.	GNSS Station	R&S	SMBV100A	258305	N/A	N/A
4.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded,1.8m
5.	WLAN AP	TP-LINK	TL-WDR5600	N/A	N/A	Unshielded,1.8m
6.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
7.	Notebook	Dell	Latitude3440	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
8.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
9.	SD Card	SanDisk	Uitra	N/A	N/A	N/A
10.	SD Card	Kingston	SDC4/8GB	N/A	N/A	N/A
11.	iPod	Apple	A1199	Fcc DoC	Shielded, 1.2m	N/A
12.	Earphone	Lenovo	SH100	N/A	Unshielded,1.2m	N/A

2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator’s paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Notebook and EUT via USB cable.
2. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
3. Turn on FM receiver function to make the EUT receive continuous signals from FM station.
4. Execute “Video Player” to play MPEG4 files.
5. Turn on camera to capture images.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup

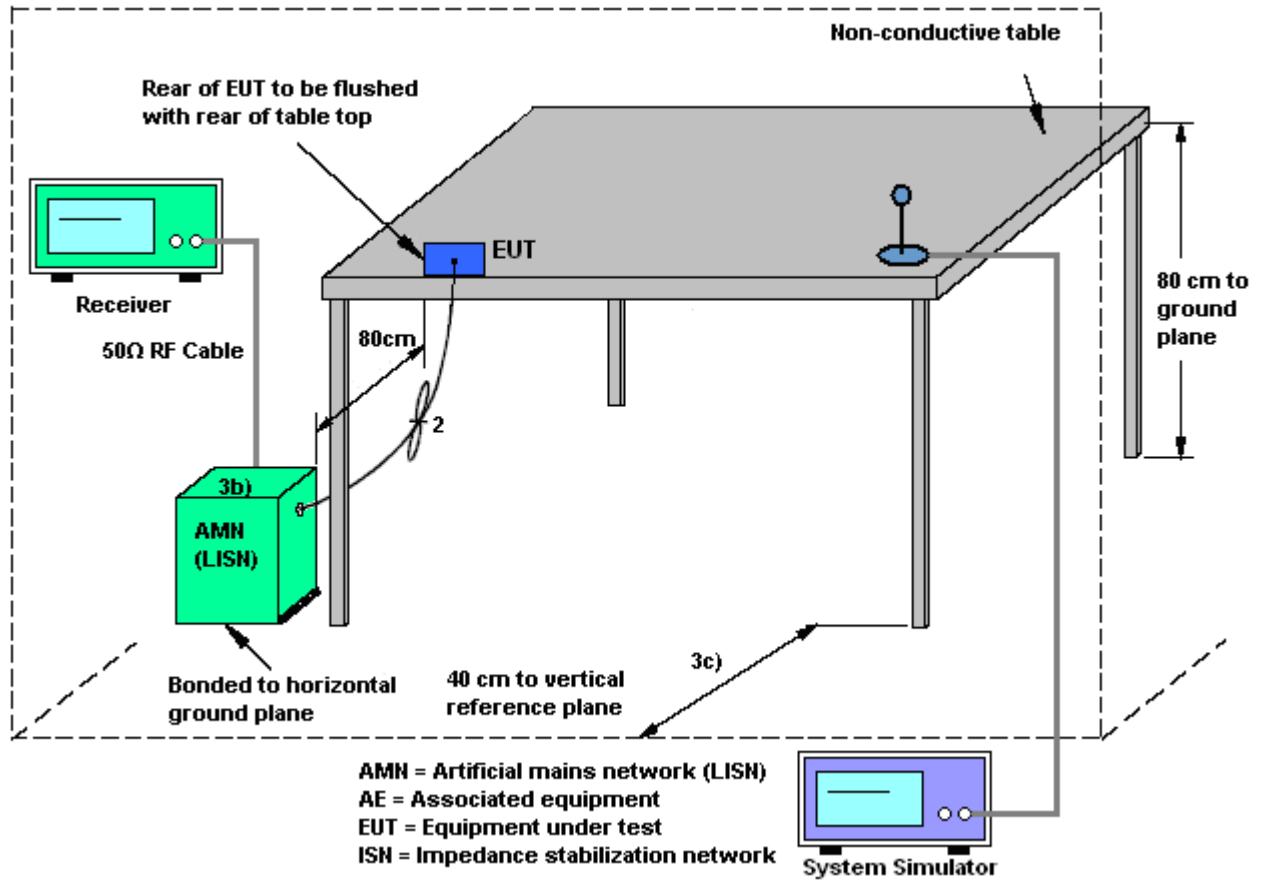




3.1.5 Test Result of AC Conducted Emission

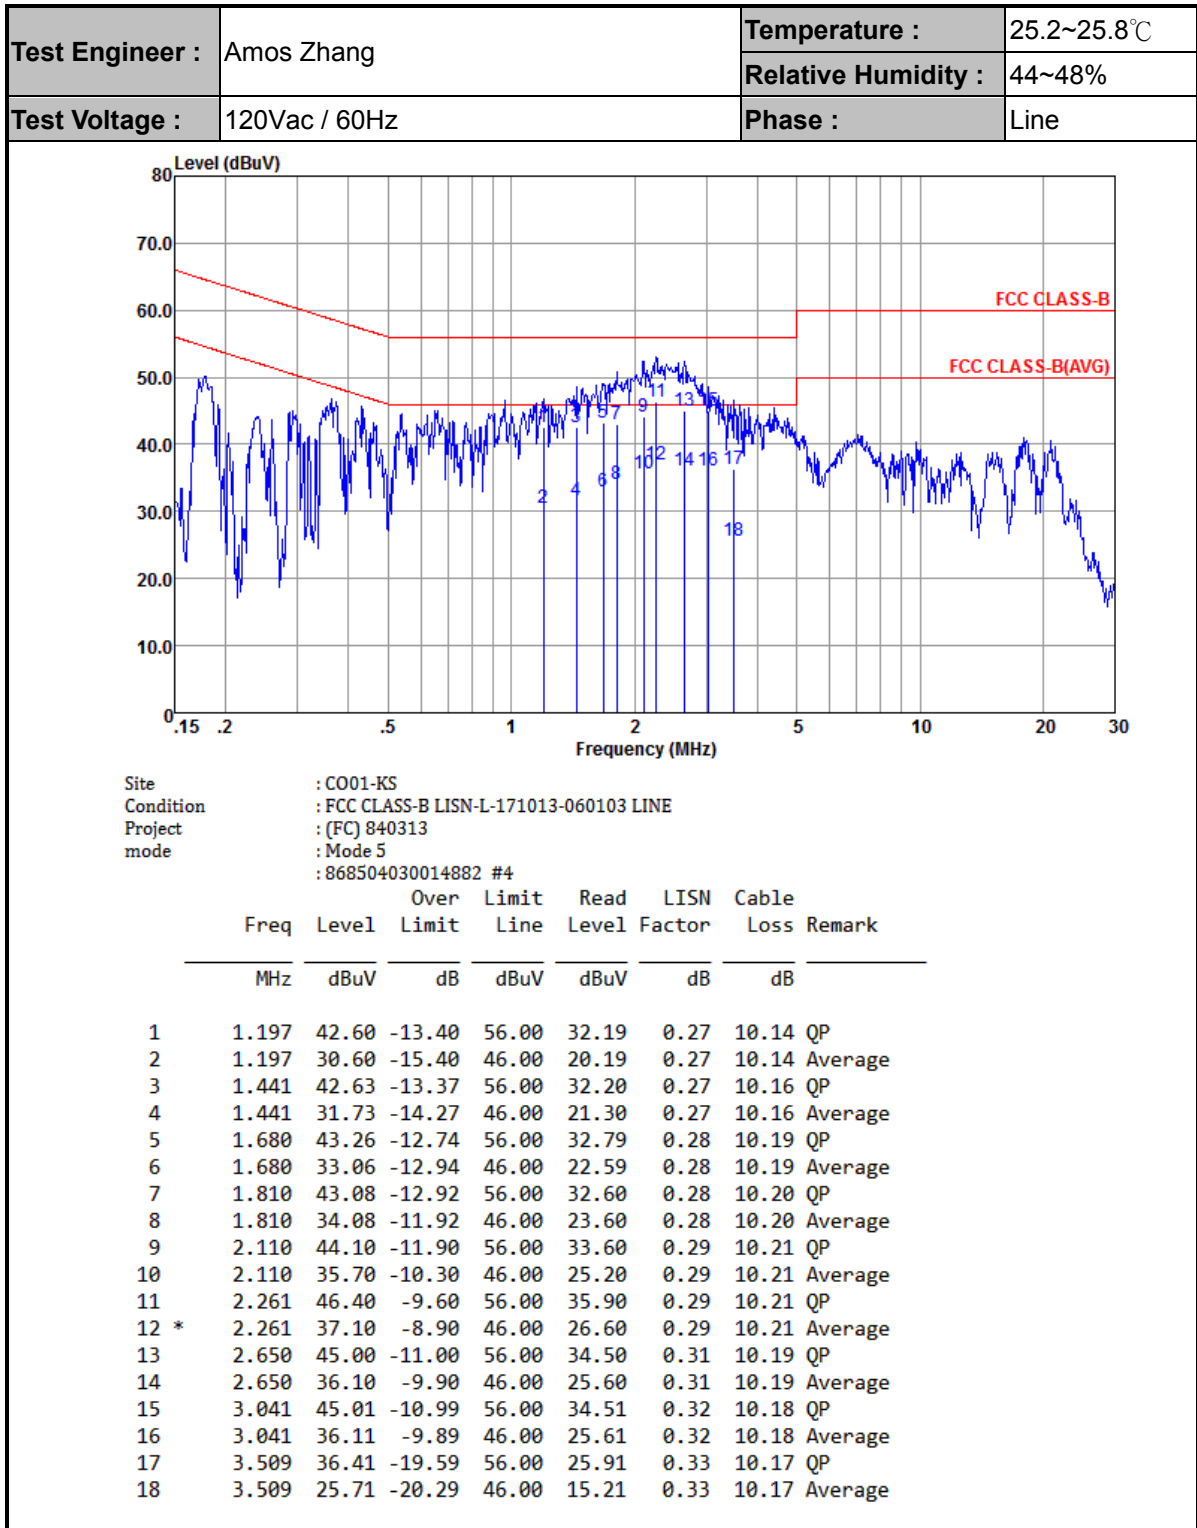



Test Engineer :	Amos Zhang	Temperature :	25.2~25.8°C
		Relative Humidity :	44~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

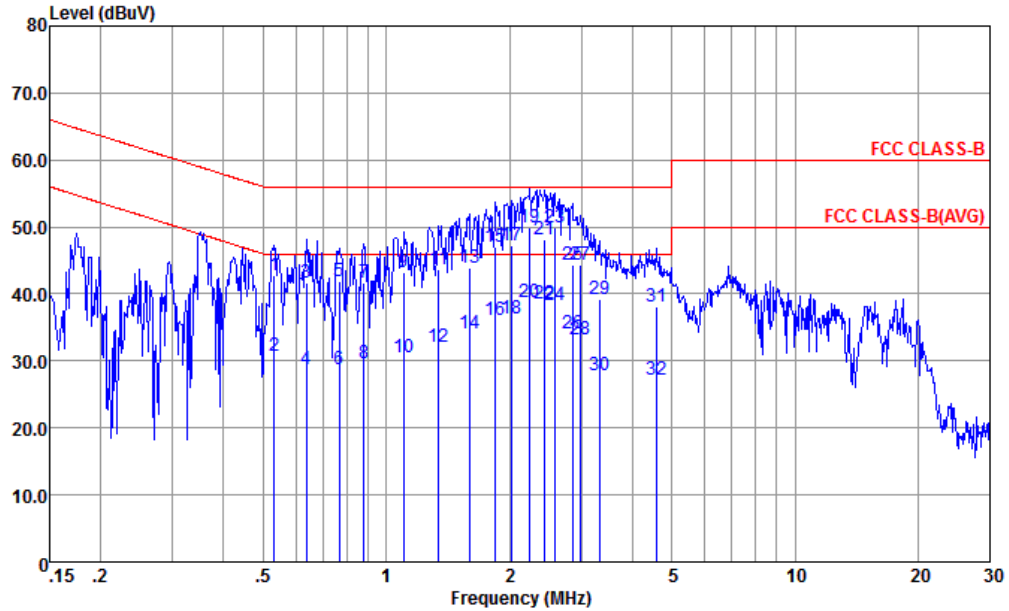


Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-171013-060103 NEUTRAL
 Project : (FC) 840313
 mode : Mode 5
 : 868504030014882 #4

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.532	42.87	-13.13	56.00	32.30	0.29	10.28	QP
2	0.532	30.77	-15.23	46.00	20.20	0.29	10.28	Average
3	0.637	41.70	-14.30	56.00	31.20	0.30	10.20	QP
4	0.637	28.70	-17.30	46.00	18.20	0.30	10.20	Average
5	0.767	41.92	-14.08	56.00	31.50	0.30	10.12	QP
6	0.767	28.72	-17.28	46.00	18.30	0.30	10.12	Average
7	0.880	41.61	-14.39	56.00	31.20	0.31	10.10	QP
8	0.880	29.71	-16.29	46.00	19.30	0.31	10.10	Average
9	1.100	43.33	-12.67	56.00	32.90	0.31	10.12	QP
10	1.100	30.63	-15.37	46.00	20.20	0.31	10.12	Average
11	1.345	43.67	-12.33	56.00	33.21	0.31	10.15	QP
12	1.345	32.07	-13.93	46.00	21.61	0.31	10.15	Average
13	1.593	44.00	-12.00	56.00	33.50	0.32	10.18	QP
14	1.593	34.10	-11.90	46.00	23.60	0.32	10.18	Average
15	1.848	47.12	-8.88	56.00	36.60	0.32	10.20	QP
16	1.848	36.02	-9.98	46.00	25.50	0.32	10.20	Average
17	2.033	47.13	-8.87	56.00	36.60	0.32	10.21	QP



Test Engineer :	Amos Zhang	Temperature :	25.2~25.8°C
		Relative Humidity :	44~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

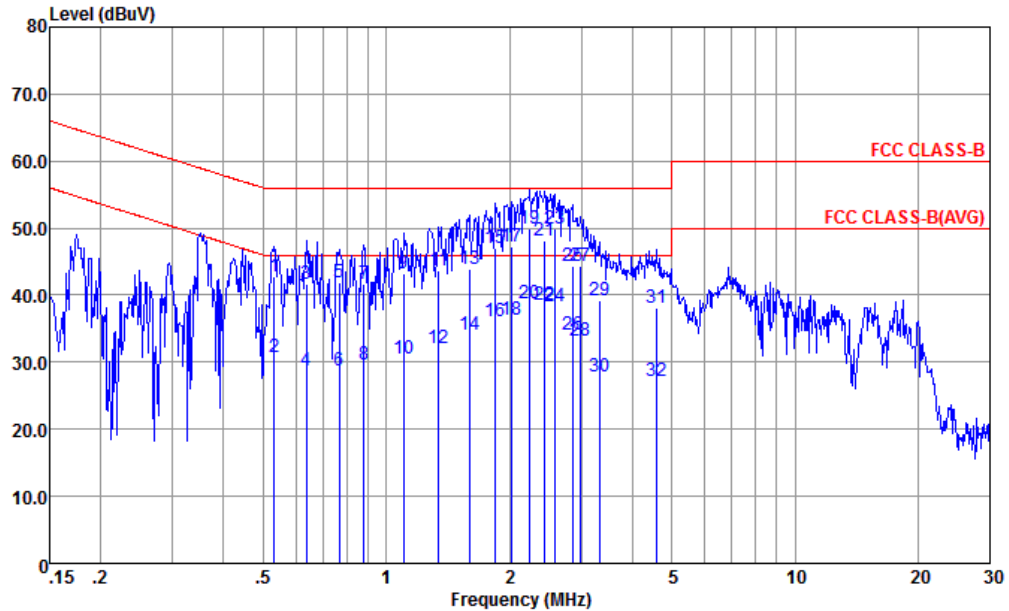

Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-171013-060103 NEUTRAL
 Project : (FC) 840313
 mode : Mode 5
 : 868504030014882 #4

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
18	2.033	36.43	-9.57	46.00	25.90	0.32	10.21	Average
19 *	2.249	49.83	-6.17	56.00	39.30	0.32	10.21	QP
20	2.249	38.83	-7.17	46.00	28.30	0.32	10.21	Average
21	2.448	48.12	-7.88	56.00	37.60	0.32	10.20	QP
22	2.448	38.62	-7.38	46.00	28.10	0.32	10.20	Average
23	2.581	49.82	-6.18	56.00	39.29	0.33	10.20	QP
24	2.581	38.42	-7.58	46.00	27.89	0.33	10.20	Average
25	2.854	44.42	-11.58	56.00	33.90	0.33	10.19	QP
26	2.854	34.12	-11.88	46.00	23.60	0.33	10.19	Average
27	2.993	44.31	-11.69	56.00	33.79	0.33	10.19	QP
28	2.993	33.11	-12.89	46.00	22.59	0.33	10.19	Average
29	3.328	39.11	-16.89	56.00	28.60	0.33	10.18	QP
30	3.328	27.81	-18.19	46.00	17.30	0.33	10.18	Average
31	4.574	38.14	-17.86	56.00	27.59	0.34	10.21	QP
32	4.574	27.14	-18.86	46.00	16.59	0.34	10.21	Average



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz




For radiated emissions above 1GHz

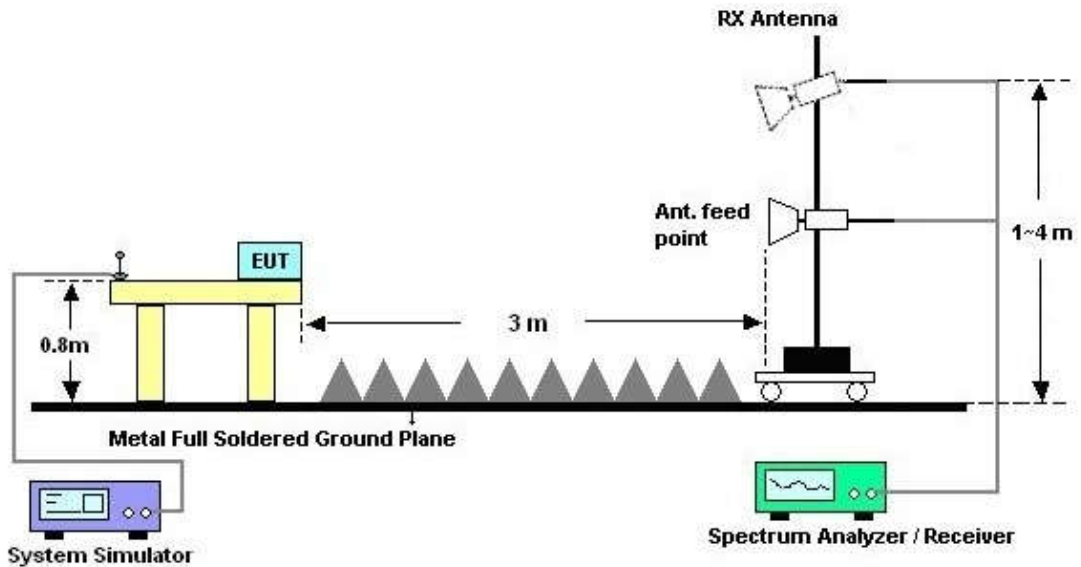




3.2.5. Test Result of Radiated Emission

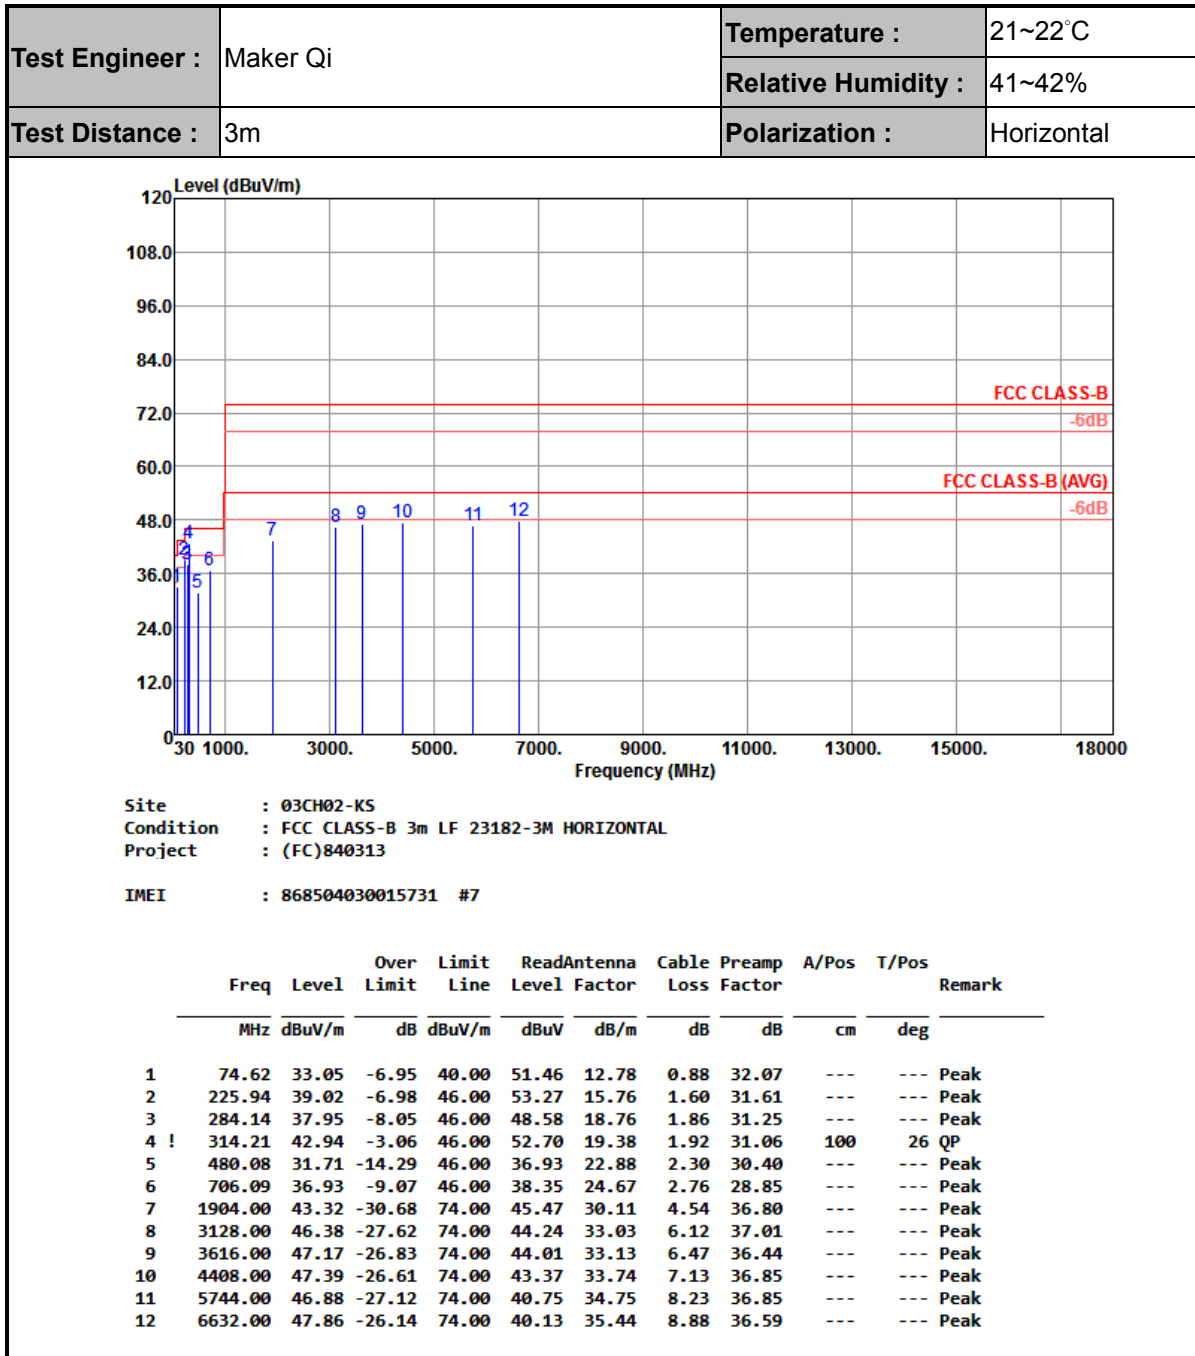



Test Engineer :	Maker Qi	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical

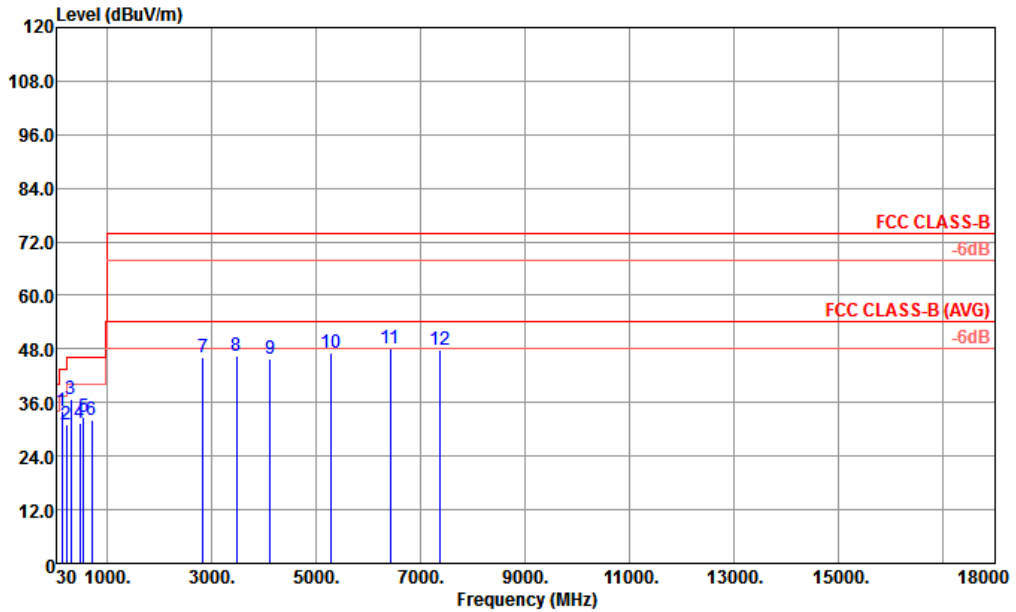

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 23182-3M VERTICAL
 Project : (FC)840313

IMEI : 868504030015731 #7

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	134.76	34.01	-9.49	43.50	47.26	17.43	1.19	31.87	---	---	Peak
2	225.94	31.19	-14.81	46.00	45.44	15.76	1.60	31.61	---	---	Peak
3	314.21	36.87	-9.13	46.00	46.63	19.38	1.92	31.06	100	0	Peak
4	480.08	31.29	-14.71	46.00	36.51	22.88	2.30	30.40	---	---	Peak
5	553.80	32.79	-13.21	46.00	36.40	23.79	2.56	29.96	---	---	Peak
6	706.09	31.99	-14.01	46.00	33.41	24.67	2.76	28.85	---	---	Peak
7	2840.00	45.99	-28.01	74.00	44.36	32.73	5.87	36.97	---	---	Peak
8	3480.00	46.34	-27.66	74.00	43.53	32.87	6.34	36.40	---	---	Peak
9	4120.00	45.92	-28.08	74.00	42.04	33.58	7.09	36.79	---	---	Peak
10	5288.00	47.06	-26.94	74.00	41.33	34.59	7.83	36.69	---	---	Peak
11	6424.00	48.13	-25.87	74.00	40.82	35.27	8.74	36.70	---	---	Peak
12	7376.00	47.82	-26.18	74.00	39.59	35.83	9.37	36.97	---	---	Peak



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Aug. 08, 2017	Jul. 24, 2018	Aug. 07, 2018	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz-44G,MAX 30dB	Apr. 17, 2018	Jul. 24, 2018	Apr. 16, 2019	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz-2GHz	Jan. 29, 2018	Jul. 24, 2018	Jan. 28, 2019	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 21, 2017	Jul. 24, 2018	Oct. 20, 2018	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Aug. 07, 2017	Jul. 24, 2018	Aug. 06, 2018	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1-26.5GHz Gain 30dB	Oct. 12, 2017	Jul. 24, 2018	Oct. 11, 2018	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jul. 24, 2018	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jul. 24, 2018	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jul. 24, 2018	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 19, 2018	Aug. 01, 2018	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2017	Aug. 01, 2018	Oct. 12, 2018	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2017	Aug. 01, 2018	Oct. 12, 2018	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2017	Aug. 01, 2018	Oct. 11, 2018	Conduction (CO01-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2dB
---	-------