



Test Report No.: RF170926W004-1



FCC TEST REPORT

(Part 15, Subpart C)

Product: LTE OBDII Hotspot

Model Name: Z6200MEX

FCC ID: SRQ-Z6200MEX

Applicant: ZTE Corporation

Address: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China

Manufacturer: ZTE Corporation

Address: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China

Prepared by: BV 7Layers Communications Technology (Shenzhen) Co. Ltd

Lab Location: No.B102, Dazhu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

TEL: +86 755 8869 6566

FAX: +86 755 8869 6577

E-MAIL: customerservice.dg@cn.bureauveritas.com

Report No.: RF170926W004-1

Received Date: Jul. 18, 2016

Test Date: Jul. 19, 2016 ~ Oct. 12, 2017

Issued Date: Oct. 13, 2017

This report should not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 CERTIFICATION	5
2 SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY	6
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
3.3 DUTY CYCLE OF TEST SIGNAL	12
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 TEST TYPES AND RESULTS.....	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	14
4.1.2 TEST INSTRUMENTS.....	14
4.1.3 TEST PROCEDURES	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP.....	16
4.1.6 EUT OPERATING CONDITIONS.....	16
4.1.7 TEST RESULTS	17
4.2 RADIATED EMISSION MEASUREMENT	19
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	19
4.2.2 TEST INSTRUMENTS.....	20
4.2.3 TEST PROCEDURES	21
4.2.4 DEVIATION FROM TEST STANDARD	21
4.2.5 TEST SETUP.....	22
4.2.6 EUT OPERATING CONDITIONS.....	23
4.2.7 TEST RESULTS	24
4.3 6 DB BANDWIDTH MEASUREMENT	35
4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	35
4.3.2 TEST INSTRUMENTS.....	35
4.3.3 TEST PROCEDURE.....	35
4.3.4 DEVIATION FROM TEST STANDARD	36



4.3.5	TEST SETUP	36
4.3.6	EUT OPERATING CONDITIONS	36
4.3.7	TEST RESULTS	37
4.4	CONDUCTED OUTPUT POWER.....	40
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	40
4.4.2	TEST SETUP	40
4.4.3	TEST INSTRUMENTS.....	40
4.4.4	TEST PROCEDURES	40
4.4.5	DEVIATION FROM TEST STANDARD	40
4.4.6	EUT OPERATING CONDITIONS	40
4.4.7	TEST RESULTS	41
4.4.7.1	MAXIMUM PEAK OUTPUT POWER	41
4.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	42
4.5	POWER SPECTRAL DENSITY MEASUREMENT	43
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	43
4.5.2	TEST SETUP	43
4.5.3	TEST INSTRUMENTS.....	43
4.5.4	TEST PROCEDURE	43
4.5.5	DEVIATION FROM TEST STANDARD	43
4.5.6	EUT OPERATING CONDITION	43
4.5.7	TEST RESULTS	44
4.6	OUT OF BAND EMISSION MEASUREMENT	47
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	47
4.6.2	TEST SETUP	47
4.6.3	TEST INSTRUMENTS.....	47
4.6.4	TEST PROCEDURE	47
4.6.5	DEVIATION FROM TEST STANDARD	48
4.6.6	EUT OPERATING CONDITION	48
4.6.7	TEST RESULTS	48
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	55
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	56



**BUREAU
VERITAS**

Test Report No.: RF170926W004-1

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF170926W004-1	Original release	Oct. 13, 2017



1 CERTIFICATION

PRODUCT: LTE OBDII Hotspot
BRAND NAME: ZTE
MODEL NAME: Z6200MEX
APPLICANT: ZTE Corporation
TESTED: Jul. 19, 2016 ~ Oct. 12, 2017
TEST SAMPLE: Identical Prototype
STANDARDS: **FCC Part 15, Subpart C. Section 15.247**
ANSI C63.10-2013

The above equipment has been tested by **BV 7Layers Communications Technology (Shenzhen) Co. Ltd** and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Yuqiang Yin, **DATE:** Oct. 13, 2017
(Yuqiang Yin/ Engineer)

APPROVED BY : Bill Yao, **DATE:** Oct. 13, 2017
(Bill Yao / Manager)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -16.22dB at 0.380000MHz.
15.205 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -3.00dB at 2483.5MHz.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.68dB
	30MHz ~ 1GMHz	3.26dB
	1GHz ~ 18GHz	4.48dB
	18GHz ~ 40GHz	4.12dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	LTE OBDII Hotspot
BRAND NAME	ZTE
MODEL NAME	Z6200MEX
NOMINAL VOLTAGE	12Vdc (adapter or host equipment) 3.7Vdc (Li-ion, battery)
MODULATION TECHNOLOGY	DSSS, OFDM, DTS
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
TRANSMISSION RATE	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n: up to 65 Mbps
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20)
MAX. OUTPUT POWER	127.644mW (Maximum)
ANTENNA TYPE	PIFA Antenna with 2.5dBi gain
HW VERSION	Z6200.H02
SW VERSION	ME_VM6200SV0.0.0B03
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n (20MHz)	1TX /1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		



3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6.0



RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5

POWER LINE CONDUCTED EMISSION TEST:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6.0

BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5



ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	22deg. C, 54%RH	DC 12V	Simon Yang
RE≥1G	22deg. C, 54%RH	DC 12V	Simon Yang
PLC	24deg. C, 55%RH	DC 12V	Alex Chen
APCM	25deg. C, 60%RH	3.7Vdc from battery	Wenliang Wu




3.3 DUTY CYCLE OF TEST SIGNAL

WIFI 2.4GHz

802.11b: Duty cycle = 1.293/1.564 = 0.827 < 98%, Duty factor = 10 * log(1/0.827) = 0.826

802.11g: Duty cycle = 0.245/0.291 = 0.842 < 98%, Duty factor = 10 * log(1/0.842) = 0.747

802.11n (HT20): Duty cycle = 0.224/0.274 = 0.818 < 98%, Duty factor = 10 * log(1/0.818) = 0.875

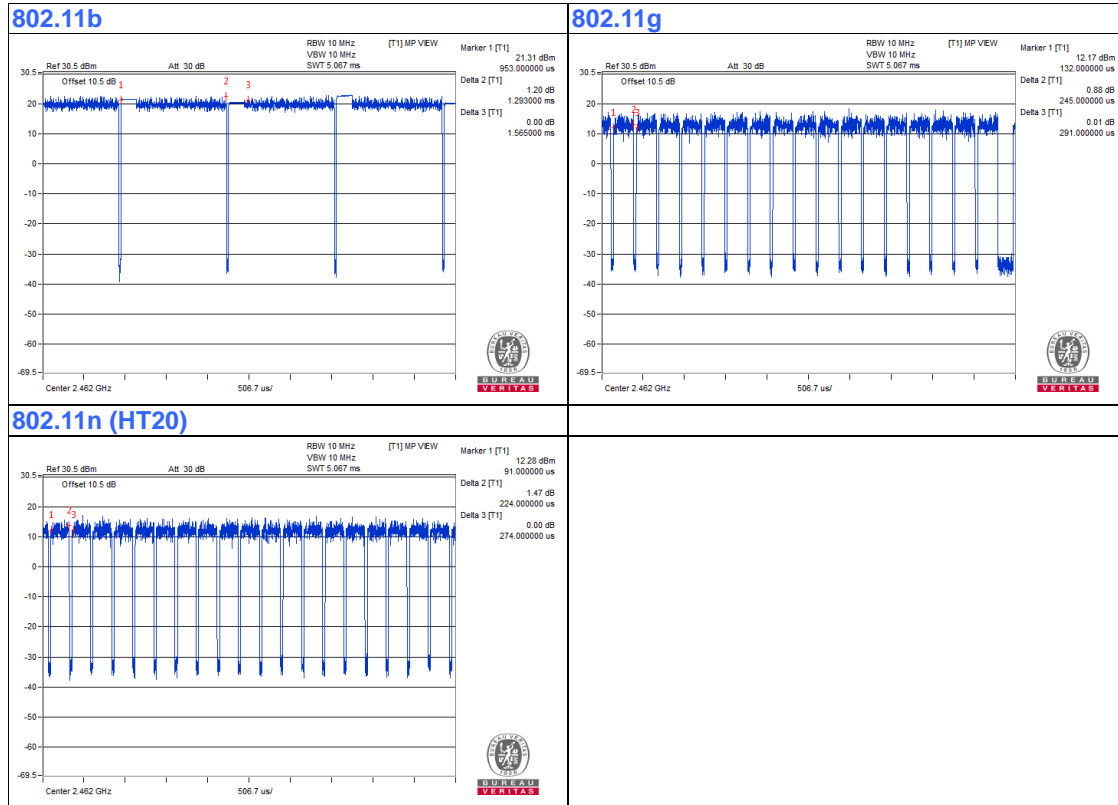



3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v04

ANSI C63.10-2013

Note:

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PC	HP	A6608CN	3CR83825X3	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m
2	AC Line: Unshielded, Detachable 1.5m



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Jun. 28,17	Jun. 27,18
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Sep. 18, 17	Sep. 17, 18

NOTE:

1. The test was performed in CE shielded room
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

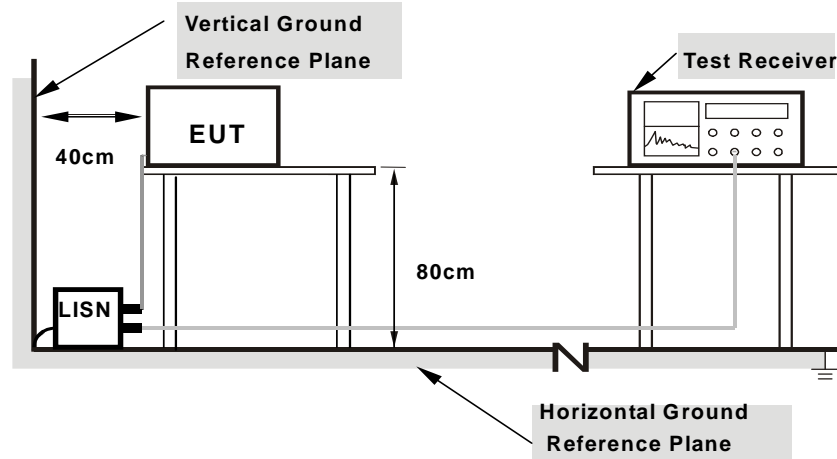

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



4.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	24deg. C, 55RH
Tested By	Jocan Guo	TEST DATE	2017/10/12

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	30.76	56.00	-25.24	L1	ON	9.6
0.150000	45.92	---	66.00	-20.08	L1	ON	9.6
0.380000	38.11	---	58.28	-20.17	L1	ON	9.7
0.380000	---	25.27	48.28	-23.01	L1	ON	9.7
0.384000	37.69	---	58.19	-20.50	L1	ON	9.7
0.384000	---	23.11	48.19	-25.08	L1	ON	9.7
10.200000	---	24.03	50.00	-25.97	L1	ON	9.9
10.200000	29.09	---	60.00	-30.91	L1	ON	9.9
12.776000	---	23.34	50.00	-26.66	L1	ON	9.9
12.776000	30.83	---	60.00	-29.17	L1	ON	9.9
17.752000	---	23.83	50.00	-26.17	L1	ON	9.9
17.752000	28.72	---	60.00	-31.28	L1	ON	9.9

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

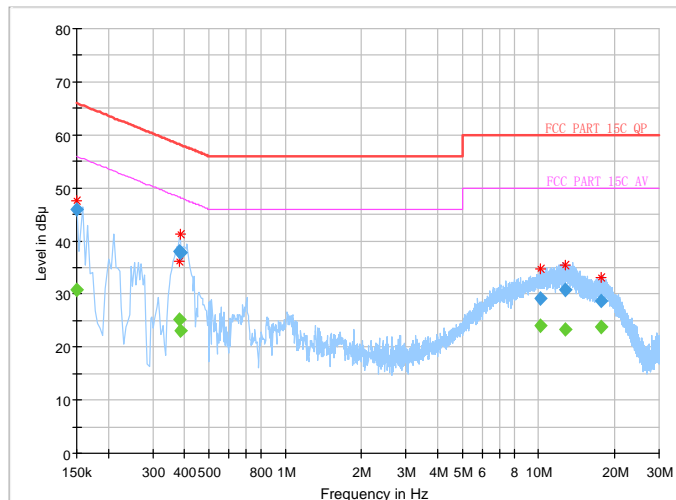




Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	24deg. C, 55RH
Tested By	Jocan Guo	TEST DATE	2017/10/12

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.154000	---	33.22	65.78	-32.56	N	ON	9.9
0.154000	45.40	---	65.78	-20.38	N	ON	9.9
0.380000	---	29.29	58.28	-28.99	N	ON	10.1
0.380000	42.06	---	58.28	-16.22	N	ON	10.1
0.384000	---	27.02	58.19	-31.17	N	ON	10.1
0.384000	41.70	---	58.19	-16.49	N	ON	10.1
10.048000	---	23.27	60.00	-36.73	N	ON	9.9
10.048000	28.37	---	60.00	-31.63	N	ON	9.9
12.384000	---	23.41	60.00	-36.59	N	ON	9.9
12.384000	30.43	---	60.00	-29.57	N	ON	9.9
18.680000	---	23.58	60.00	-36.42	N	ON	10.0
18.680000	28.18	---	60.00	-31.82	N	ON	10.0

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

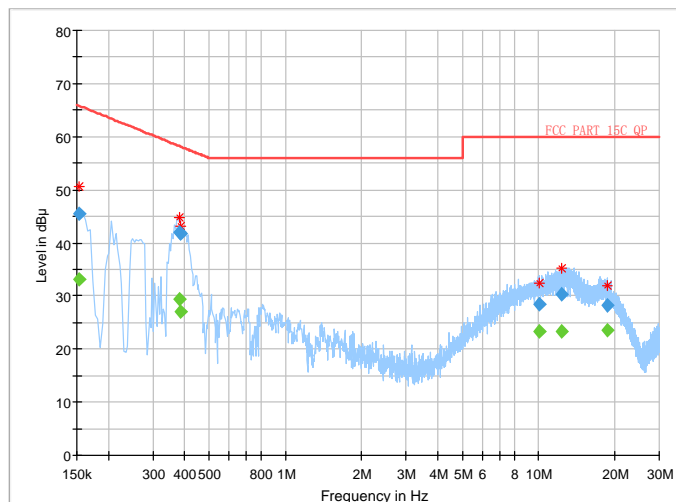



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May 06,17	May 05,18
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Nov. 26,16	Nov. 25,18
Horn Antenna	ETS-LINDGREN	3117	00168728	Nov. 26,16	Nov. 25,18
Loop antenna	Daze	ZN30900A	0708	Nov. 28,16	Nov. 27,17
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Dec. 16,16	Dec. 15,17
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jul. 24,17	Jul. 23,18
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 10,17	Mar. 09,18
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jul. 24,17	Jul. 23,18
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jul. 24,17	Jul. 23,18
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jul. 24,17	Jul. 23,18

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 525120.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be performed using fresh batteries. The turntable was rotated to maximize the emission level.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor (10 log(1/duty cycle)).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle ≥ 98%) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


4.2.4 DEVIATION FROM TEST STANDARD

No deviation




4.2.5 TEST SETUP

< Frequency Range below 30MHz >

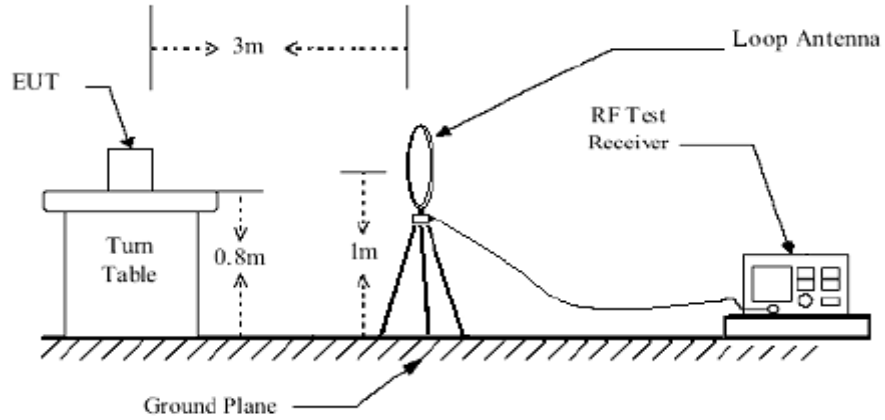


< Frequency Range 30MHz~1GHz >

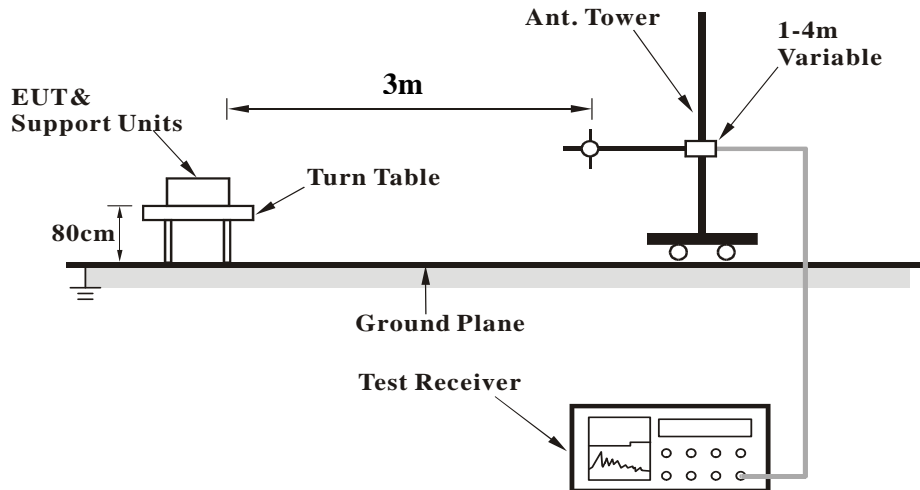



<Frequency Range above 1GHz>

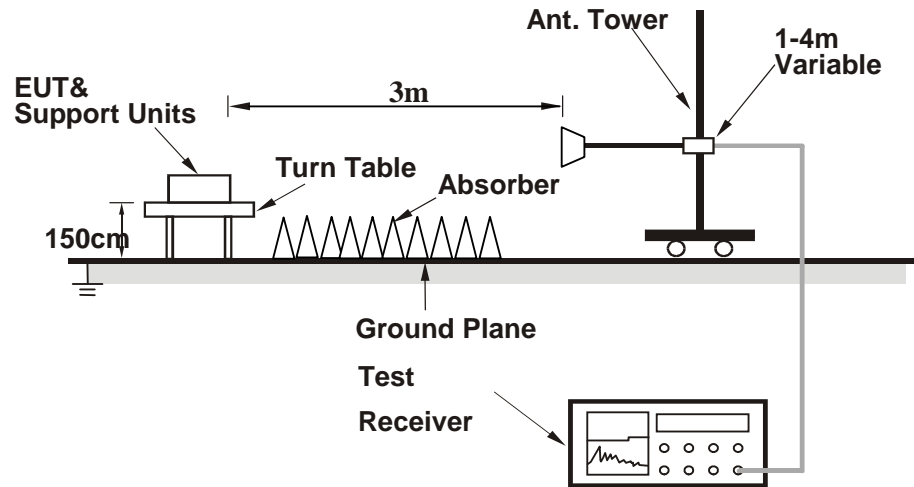

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:

9 KHz – 30 KHz data: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

30 MHz – 1GHz data:


802.11g

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
48.43	28.89	58.16	40.00	-11.11	7.08	1.05	37.4	200	95	QP
95.96	36.62	64.56	43.50	-6.88	7.56	1.51	37.01	200	103	QP
134.76	39.76	67.06	43.50	-3.74	7.79	1.78	36.87	200	156	QP
260.86	39.97	61.45	46.00	-6.03	12.53	2.51	36.52	200	127	QP
372.41	34.91	52.5	46.00	-11.09	16.04	3.03	36.66	200	180	QP
573.2	32.12	45.64	46.00	-13.88	19.79	3.86	37.17	200	160	QP

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

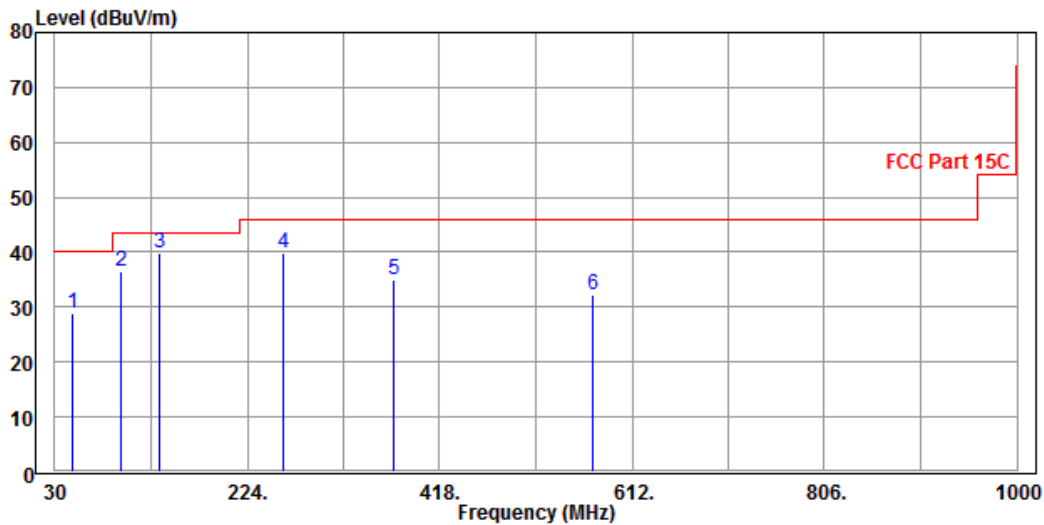




CHANNEL	TX Channel 3	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
48.43	34.62	63.89	40.00	-5.38	7.08	1.05	37.4	100	48	QP
95.96	32.98	60.92	43.50	-10.52	7.56	1.51	37.01	100	96	QP
132.82	36.24	63.64	43.50	-7.26	7.71	1.77	36.88	100	121	QP
200.72	31.87	56.11	43.50	-11.63	10.13	2.17	36.54	100	240	QP
270.56	35.82	57.12	46.00	-10.18	12.65	2.56	36.51	100	280	QP
351.07	30.12	48.65	46.00	-15.88	15.14	2.94	36.61	100	72	QP

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

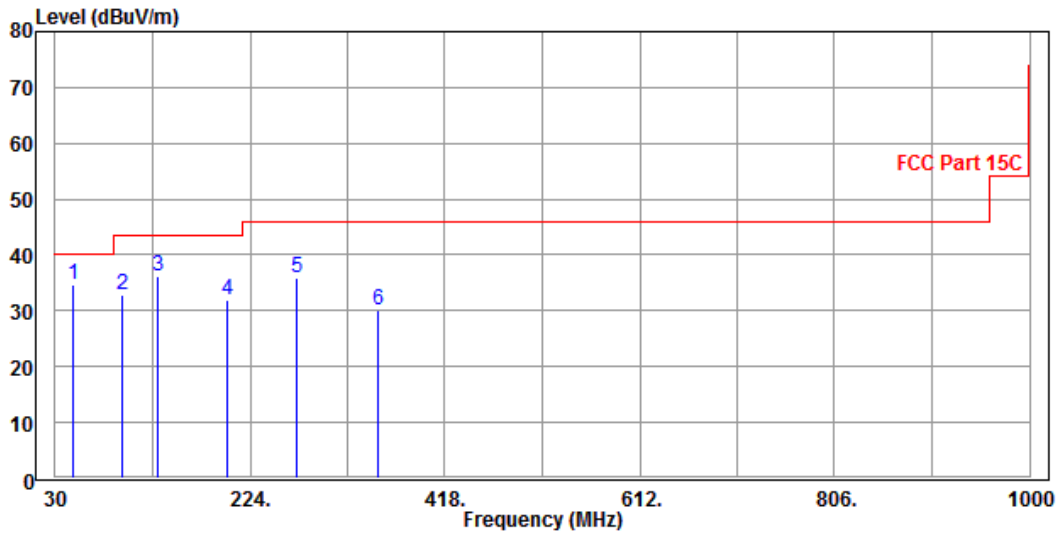



ABOVE 1GHZ WORST-CASE DATA:

Note: For higher frequency, the emission is too low to be detected.

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	46.19	54.06	54.00	-7.81	32.29	8.15	48.31	110	130	Average
2390	58.56	66.43	74.00	-15.44	32.29	8.15	48.31	110	130	Peak
2412	101.57	109.38			32.31	8.19	48.31	110	130	Average
2412	108.95	116.76			32.31	8.19	48.31	110	130	Peak
2483.5	38.28	45.88	54.00	-15.72	32.38	8.32	48.3	110	130	Average
2483.5	52.84	60.44	74.00	-21.16	32.38	8.32	48.3	110	130	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2387.2	46.58	54.45	54.00	-7.42	32.29	8.15	48.31	100	120	Average
2387.2	57.53	65.4	74.00	-16.47	32.29	8.15	48.31	100	120	Peak
2412	101.69	109.5			32.31	8.19	48.31	100	120	Average
2412	109.56	117.37			32.31	8.19	48.31	100	120	Peak
2483.5	38.98	46.58	54.00	-15.02	32.38	8.32	48.3	100	120	Average
2483.5	53.16	60.76	74.00	-20.84	32.38	8.32	48.3	100	120	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	39.44	47.31	54.00	-14.56	32.29	8.15	48.31	123	116	Average
2390	49.76	57.63	74.00	-24.24	32.29	8.15	48.31	123	116	Peak
2437	101.91	109.64			32.34	8.24	48.31	123	116	Average
2437	109.54	117.27			32.34	8.24	48.31	123	116	Peak
2487.9	40.63	48.21	54.00	-13.37	32.39	8.33	48.30	123	116	Average
2487.9	63.3	70.88	74.00	-10.7	32.39	8.33	48.30	123	116	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	38.68	46.55	54.00	-15.32	32.29	8.15	48.31	101	100	Average
2390	55.53	63.4	74.00	-18.47	32.29	8.15	48.31	101	100	Peak
2437	102.65	110.38			32.34	8.24	48.31	101	100	Average
2437	110.53	118.26			32.34	8.24	48.31	101	100	Peak
2484.13	39.91	47.51	54.00	-14.09	32.38	8.32	48.30	101	100	Average
2484.13	53.3	60.9	74.00	-20.7	32.38	8.32	48.30	101	100	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	37.99	45.86	54.00	-16.01	32.29	8.15	48.31	105	120	Average
2390	49.5	57.37	74.00	-24.50	32.29	8.15	48.31	105	120	Peak
2462	100.95	108.61			32.36	8.28	48.30	105	120	Average
2462	109.17	116.83			32.36	8.28	48.30	105	120	Peak
2483.5	46.7	54.3	54.00	-7.30	32.38	8.32	48.30	105	120	Average
2483.5	64.83	72.43	74.00	-9.17	32.38	8.32	48.30	105	120	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	37.66	45.53	54.00	-16.34	32.29	8.15	48.31	100	110	Average
2390	49.64	57.51	74.00	-24.36	32.29	8.15	48.31	100	110	Peak
2462	102.22	109.88			32.36	8.28	48.30	100	110	Average
2462	109.94	117.6			32.36	8.28	48.30	100	110	Peak
2483.5	47.73	55.33	54.00	-6.27	32.38	8.32	48.30	100	110	Average
2483.5	60.76	68.36	74.00	-13.24	32.38	8.32	48.30	100	110	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.



802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	41.91	49.78	54.00	-12.09	32.29	8.15	48.31	100	155	Average
2390	56.47	64.34	74.00	-17.53	32.29	8.15	48.31	100	155	Peak
2412	90.21	98.02			32.31	8.19	48.31	100	155	Average
2412	100.83	108.64			32.31	8.19	48.31	100	155	Peak
2488	34.73	42.31	54.00	-19.27	32.39	8.33	48.30	100	155	Average
2488	47.85	55.43	74.00	-26.15	32.39	8.33	48.30	100	155	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.04	57.91	54.00	-3.96	32.29	8.15	48.31	200	150	Average
2390	67.91	75.78	74.00	-6.09	32.29	8.15	48.31	200	150	Peak
2412	93.73	101.54			32.31	8.19	48.31	200	150	Average
2412	104.08	111.89			32.31	8.19	48.31	200	150	Peak
2483.5	36.59	44.19	54.00	-17.41	32.38	8.32	48.30	200	150	Average
2483.5	51.63	59.23	74.00	-22.37	32.38	8.32	48.30	200	150	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	38.38	46.25	54.00	-15.62	32.29	8.15	48.31	120	135	Average
2390	49.37	57.24	74.00	-24.63	32.29	8.15	48.31	120	135	Peak
2437	94.69	102.42			32.34	8.24	48.31	120	135	Average
2437	105.45	113.18			32.34	8.24	48.31	120	135	Peak
2483.7	40.78	48.38	54.00	-13.22	32.38	8.32	48.30	120	135	Average
2483.7	58.21	65.81	74.00	-15.79	32.38	8.32	48.30	120	135	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	38.37	46.24	54.00	-15.63	32.29	8.15	48.31	200	130	Average
2390	56.53	64.4	74.00	-17.47	32.29	8.15	48.31	200	130	Peak
2437	96.88	104.61			32.34	8.24	48.31	200	130	Average
2437	107.14	114.87			32.34	8.24	48.31	200	130	Peak
2483.5	40.54	48.14	54.00	-13.46	32.38	8.32	48.30	200	130	Average
2483.5	61.28	68.88	74.00	-12.72	32.38	8.32	48.30	200	130	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	38.00	45.87	54.00	-16.00	32.29	8.15	48.31	120	115	Average
2390	50.73	58.60	74.00	-23.27	32.29	8.15	48.31	120	115	Peak
2462	93.09	100.75			32.36	8.28	48.30	120	115	Average
2462	103.46	111.12			32.36	8.28	48.30	120	115	Peak
2483.5	49.78	57.38	54.00	-4.22	32.38	8.32	48.30	120	115	Average
2483.5	64.00	71.60	74.00	-10.00	32.38	8.32	48.30	120	115	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	37.79	45.66	54.00	-16.21	32.29	8.15	48.31	100	110	Average
2390	53.14	61.01	74.00	-20.86	32.29	8.15	48.31	100	110	Peak
2462	93.12	100.78			32.36	8.28	48.30	100	110	Average
2462	103.33	110.99			32.36	8.28	48.30	100	110	Peak
2483.5	51.00	58.60	54.00	-3.00	32.38	8.32	48.30	100	110	Average
2483.5	64.65	72.25	74.00	-9.35	32.38	8.32	48.30	100	110	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2358	38.17	46.13	54.00	-15.83	32.26	8.09	48.31	120	115	Average
2358	49.81	57.77	74.00	-24.19	32.26	8.09	48.31	120	115	Peak
2412	97.17	104.98			32.31	8.19	48.31	120	115	Average
2412	104.55	112.36			32.31	8.19	48.31	120	115	Peak
2487	38.17	45.75	54.00	-15.83	32.39	8.33	48.30	120	115	Average
2487	50.19	57.77	74.00	-23.81	32.39	8.33	48.30	120	115	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.23	58.1	54.00	-3.77	32.29	8.15	48.31	100	115	Average
2390	65.71	73.58	74.00	-8.29	32.29	8.15	48.31	100	115	Peak
2412	92.07	99.88			32.31	8.19	48.31	100	115	Average
2412	103.52	111.33			32.31	8.19	48.31	100	115	Peak
2483.5	38.54	46.14	54.00	-15.46	32.38	8.32	48.30	100	115	Average
2483.5	51.25	58.85	74.00	-22.75	32.38	8.32	48.30	100	115	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	37.84	45.71	54.00	-16.16	32.29	8.15	48.31	120	120	Average
2390	50.17	58.04	74.00	-23.83	32.29	8.15	48.31	120	120	Peak
2437	89.62	97.35			32.34	8.24	48.31	120	120	Average
2437	101.26	108.99			32.34	8.24	48.31	120	120	Peak
2483.5	38.25	45.85	54.00	-15.75	32.38	8.32	48.30	120	120	Average
2483.5	51.82	59.42	74.00	-22.18	32.38	8.32	48.30	120	120	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	37.86	45.73	54.00	-16.14	32.29	8.15	48.31	101	115	Average
2390	49.57	57.44	74.00	-24.43	32.29	8.15	48.31	101	115	Peak
2437	94.88	102.61			32.34	8.24	48.31	101	115	Average
2437	105.97	113.7			32.34	8.24	48.31	101	115	Peak
2483.5	39.08	46.68	54.00	-14.92	32.38	8.32	48.30	101	115	Average
2483.5	54.35	61.95	74.00	-19.65	32.38	8.32	48.30	101	115	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	37.89	45.76	54.00	-16.11	32.29	8.15	48.31	120	110	Average
2390	49.50	57.37	74.00	-24.50	32.29	8.15	48.31	120	110	Peak
2462	91.64	99.30			32.36	8.28	48.30	120	110	Average
2462	101.34	109.00			32.36	8.28	48.30	120	110	Peak
2483.5	48.66	56.26	54.00	-5.34	32.38	8.32	48.30	120	110	Average
2483.5	63.70	71.30	74.00	-10.30	32.38	8.32	48.30	120	110	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2354	37.70	45.67	54.00	-16.30	32.25	8.09	48.31	113	102	Average
2354	53.83	61.80	74.00	-20.17	32.25	8.09	48.31	113	102	Peak
2462	92.60	100.26			32.36	8.28	48.30	113	102	Average
2462	103.25	110.91			32.36	8.28	48.30	113	102	Peak
2483.5	50.84	58.44	54.00	-3.16	32.38	8.32	48.30	113	102	Average
2483.5	66.09	73.69	74.00	-7.91	32.38	8.32	48.30	113	102	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.



4.3 6 dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Mar. 01,17	Feb. 28,18
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510523	Mar. 01,17	Feb. 28,18
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510332	Mar. 01,17	Feb. 28,18
Power Sensor	ANRITSU	MA2411B	1339352	Mar. 01,17	Feb. 28,18

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

4.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

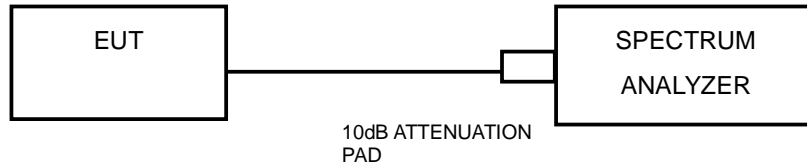

4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.04	0.5	PASS
6	2437	9.99	0.5	PASS
11	2462	9.56	0.5	PASS

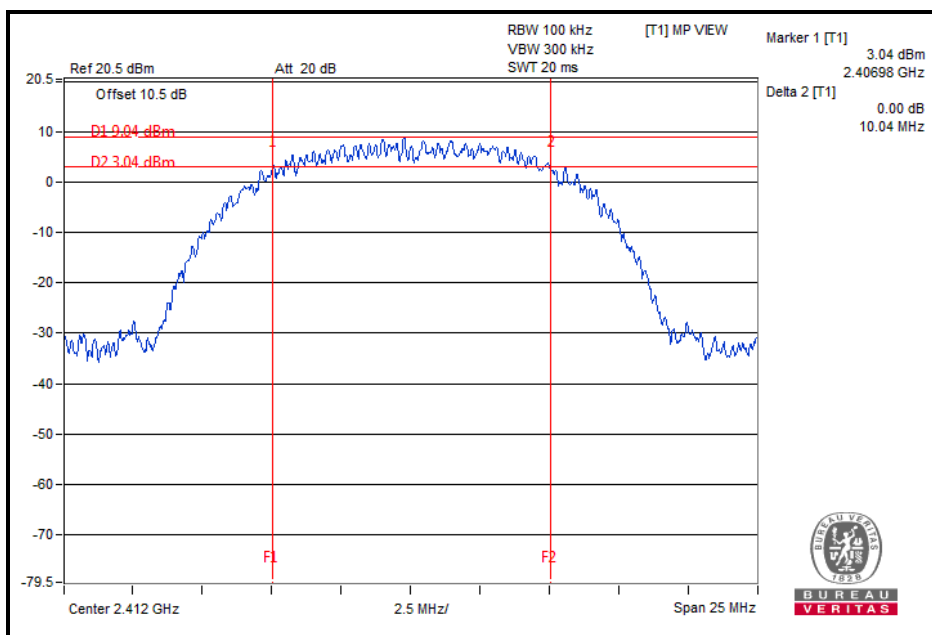



802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.46	0.5	PASS
6	2437	16.46	0.5	PASS
11	2462	16.43	0.5	PASS

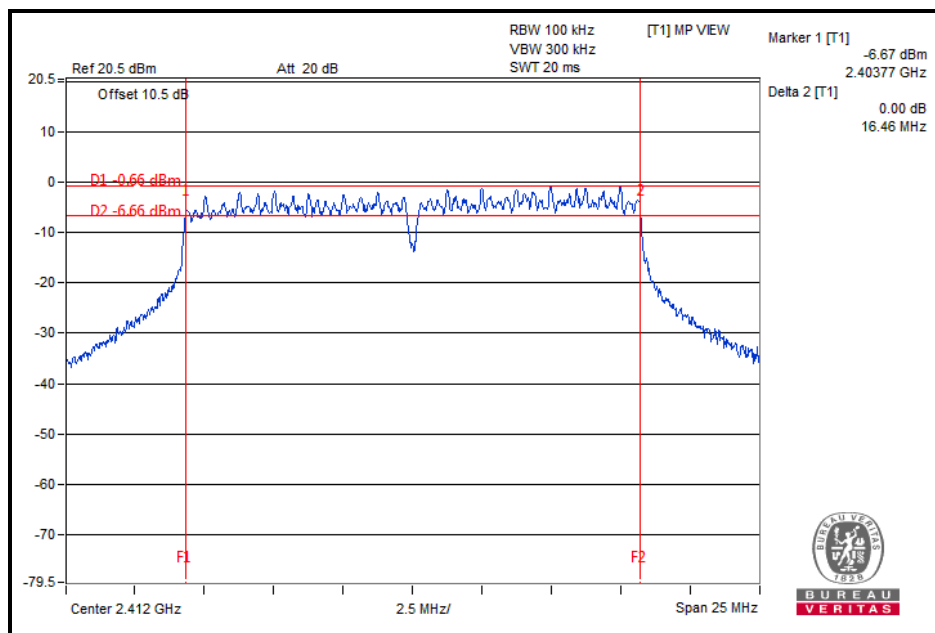




**BUREAU
VERITAS**

Test Report No.: RF170926W004-1

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.33	0.5	PASS
6	2437	17.35	0.5	PASS
11	2462	17.23	0.5	PASS

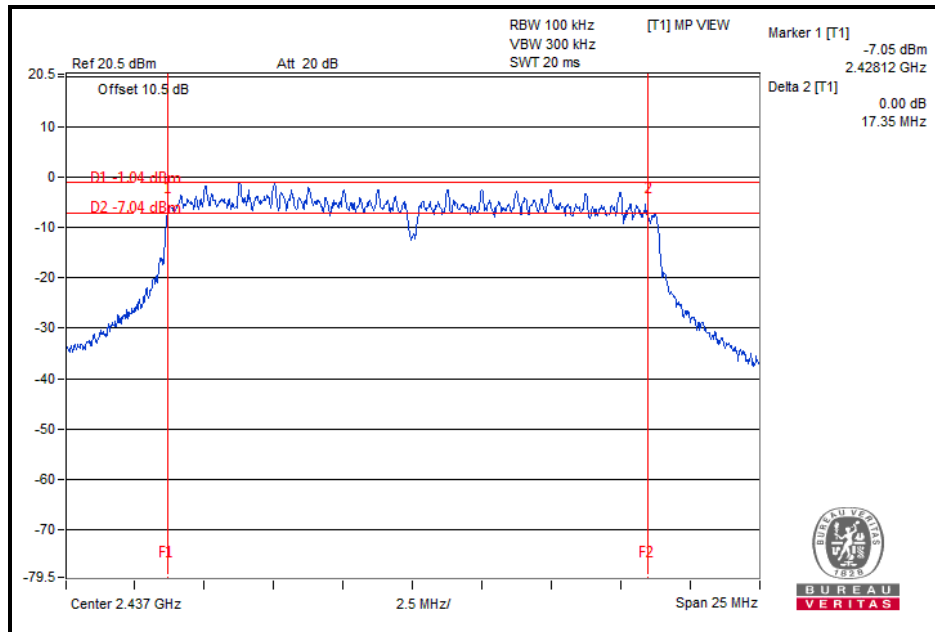




4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.4.2 TEST SETUP

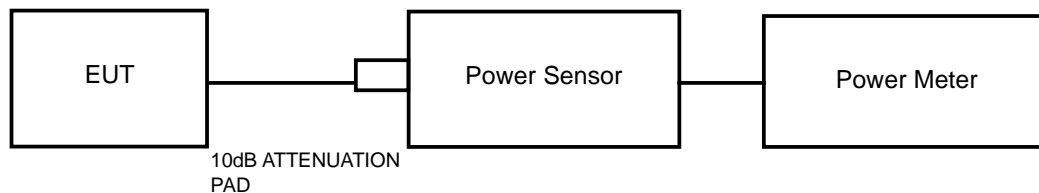

4.4.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.4.7 TEST RESULTS

4.4.7.1 MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	21.06	127.644	1	PASS
6	2437	20.01	100.231	1	PASS
11	2462	20.57	114.025	1	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	17.99	62.951	1	PASS
6	2437	19.32	85.507	1	PASS
11	2462	18.48	70.469	1	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	18.33	68.077	1	PASS
6	2437	17.38	54.702	1	PASS
11	2462	18.13	65.013	1	PASS



4.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	18.19	N/A
6	2437	17.58	N/A
11	2462	17.91	N/A

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	10.80	N/A
6	2437	11.03	N/A
11	2462	10.52	N/A

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	10.63	N/A
6	2437	10.11	N/A
11	2462	10.32	N/A




4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.5.7 TEST RESULTS

802.11b

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-3.80	8	PASS
6	2437	-4.85	8	PASS
11	2462	-4.70	8	PASS

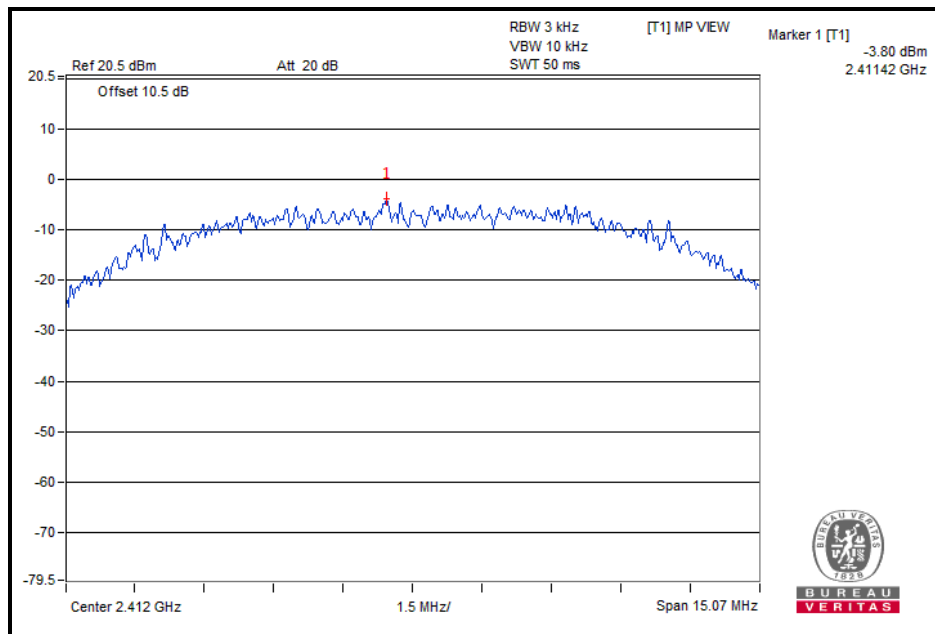




**BUREAU
VERITAS**

Test Report No.: RF170926W004-1

802.11g

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-13.15	8	PASS
6	2437	-14.16	8	PASS
11	2462	-13.16	8	PASS

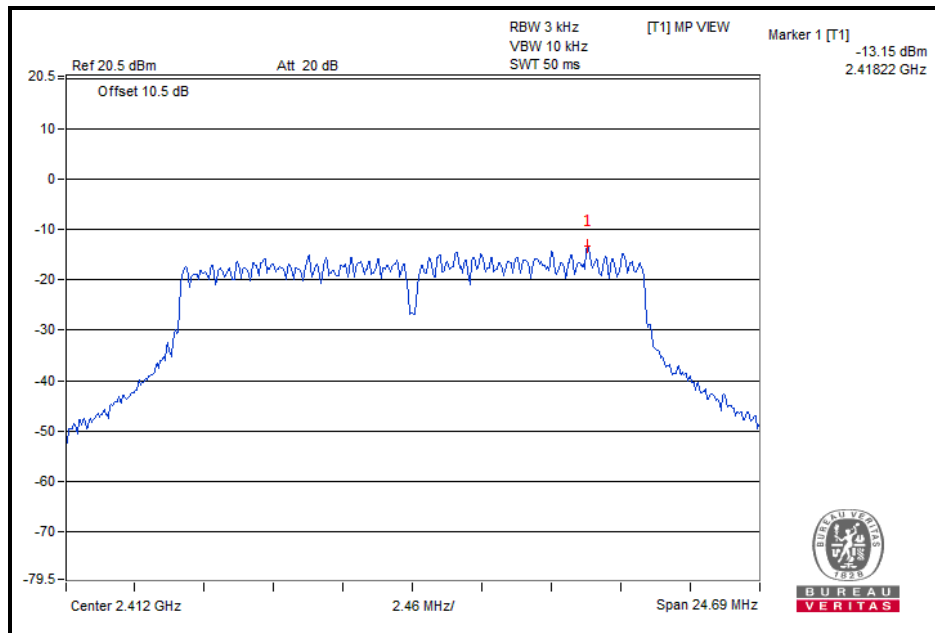




**BUREAU
VERITAS**

Test Report No.: RF170926W004-1

802.11n (20MHz)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-12.41	8	PASS
6	2437	-14.27	8	PASS
11	2462	-13.16	8	PASS

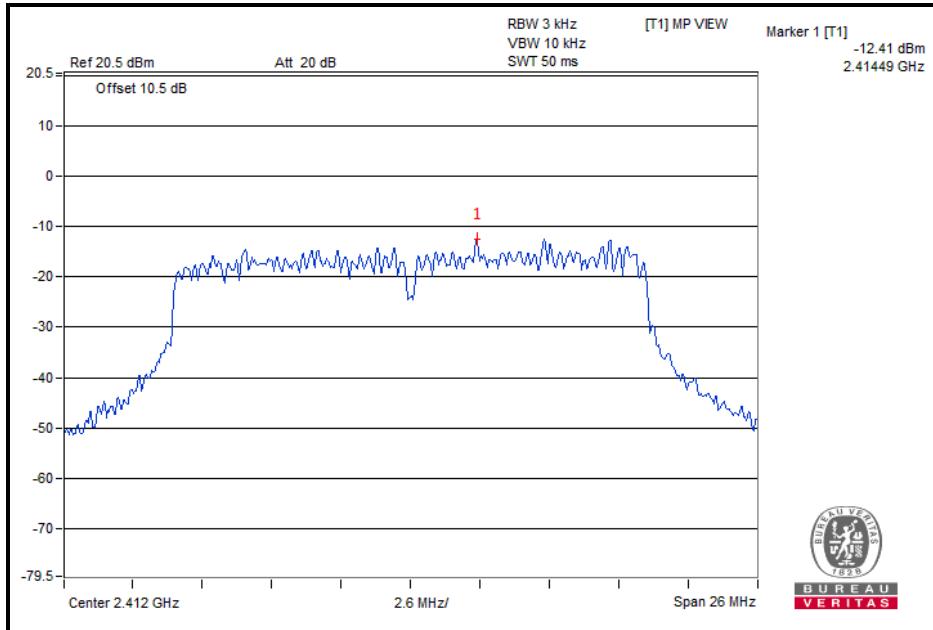




4.6 OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

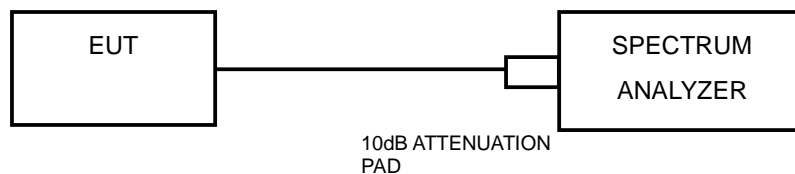

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.



BUREAU VERITAS

Test Report No.: RF170926W004-1

802.11b

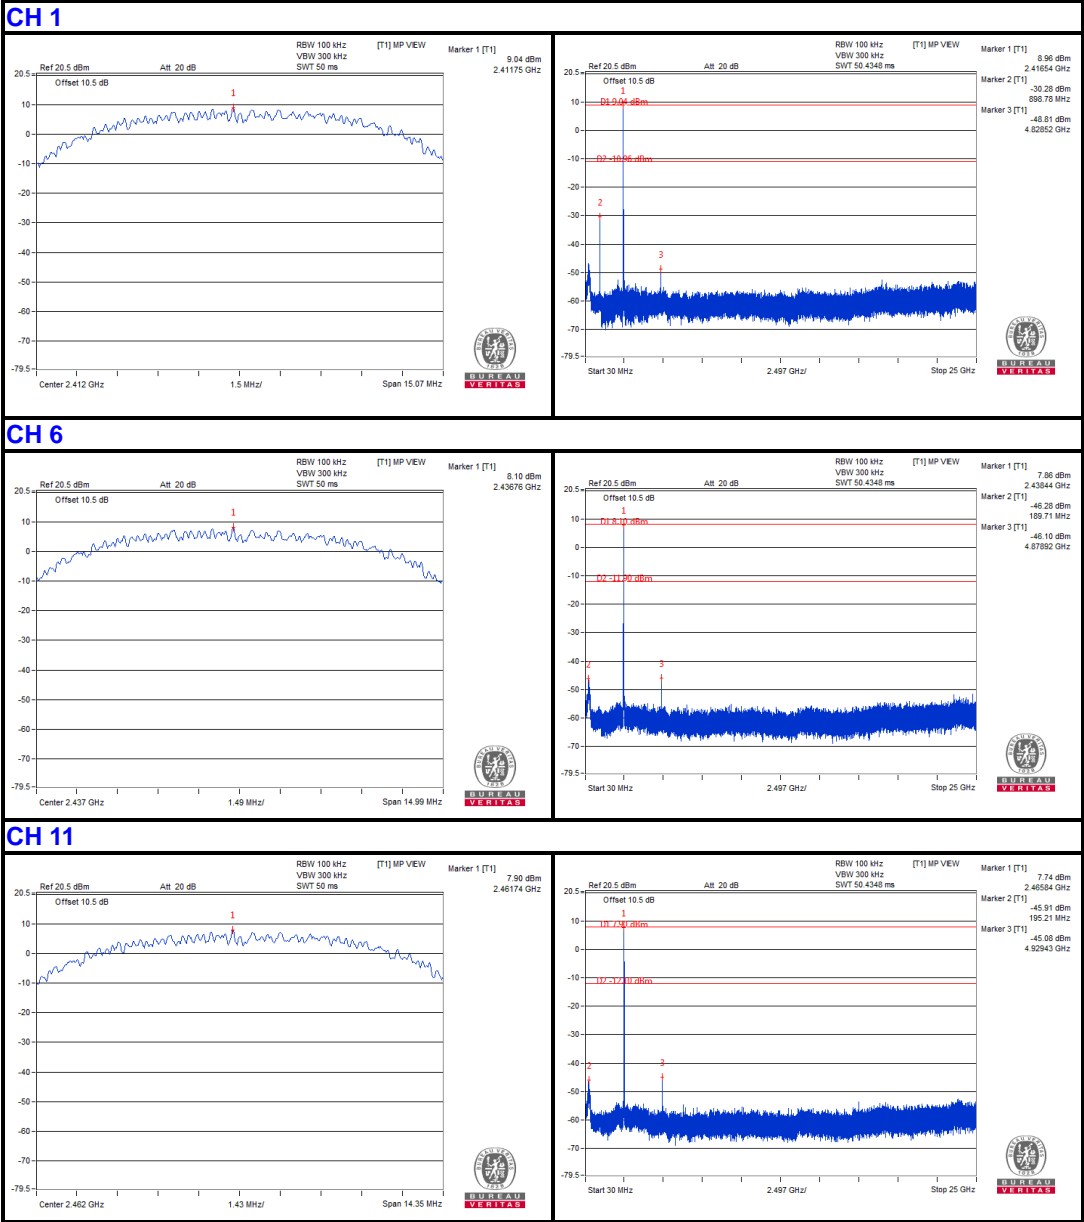

BV 7Layers Communications Technology (Shenzhen) Co. Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
 Fax: +86 755 8869 6577
 Email: customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: RF170926W004-1

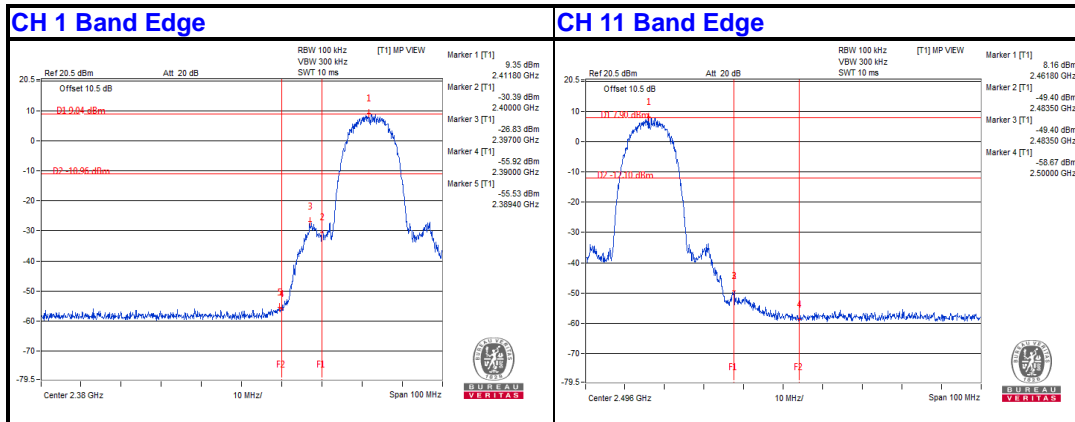




BUREAU VERITAS


Test Report No.: RF170926W004-1

802.11g


CH 1

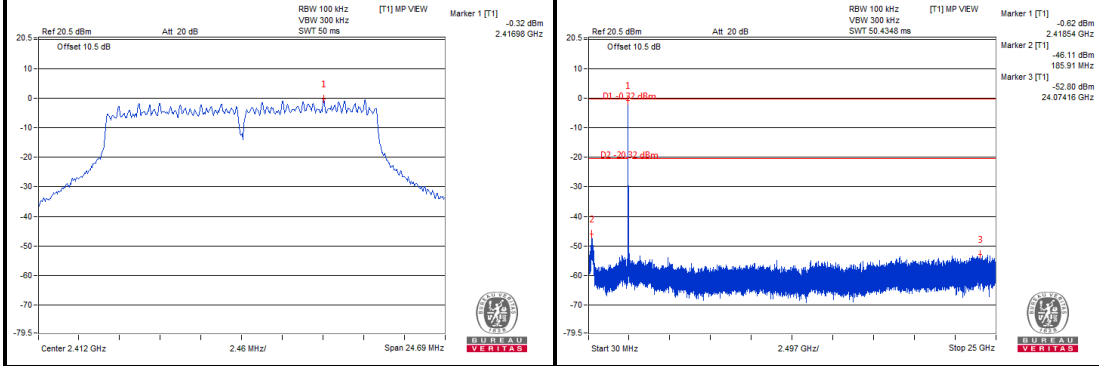

CH 6

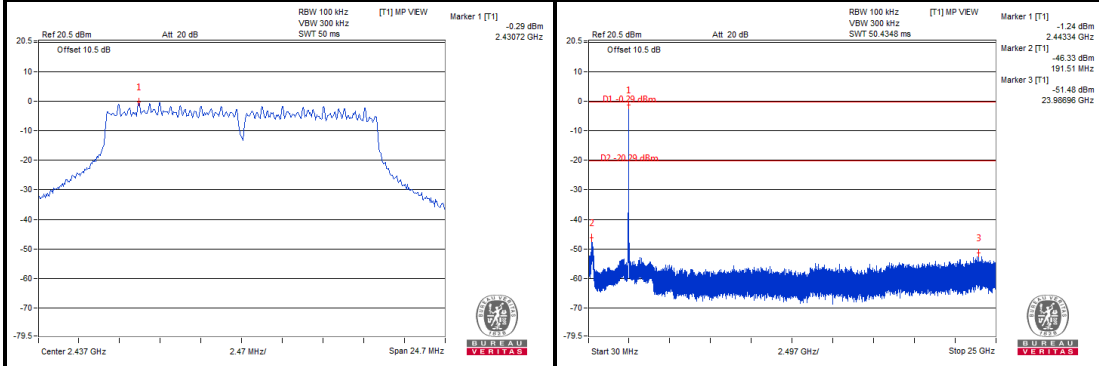


CH 11

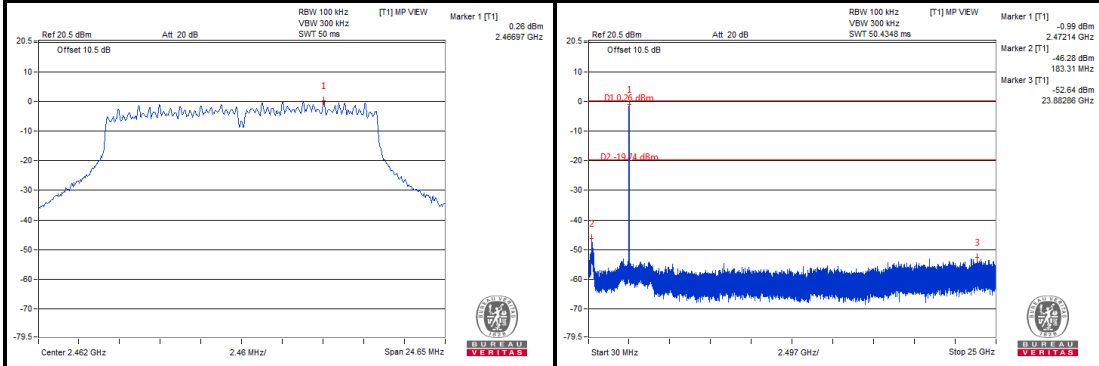



**BUREAU
VERITAS**

Test Report No.: RF170926W004-1

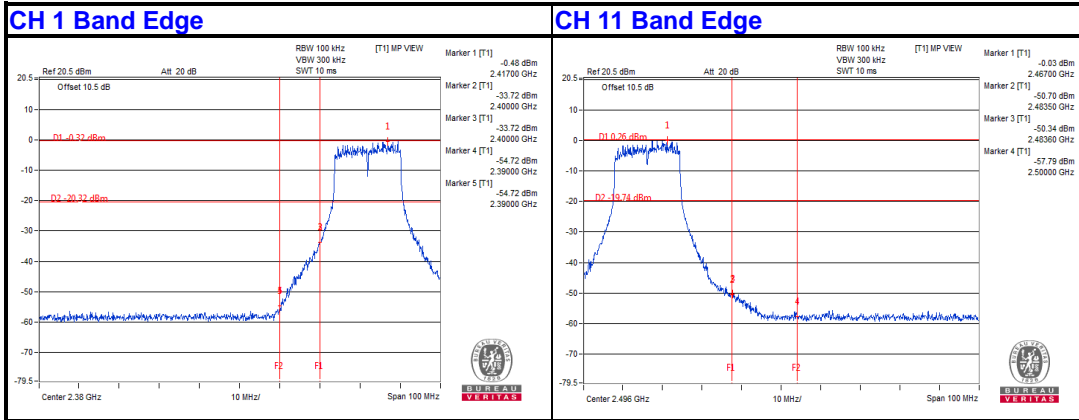

BV 7Layers Communications Technology
(Shenzhen) Co. Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China


Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF170926W004-1


802.11n (20MHz)

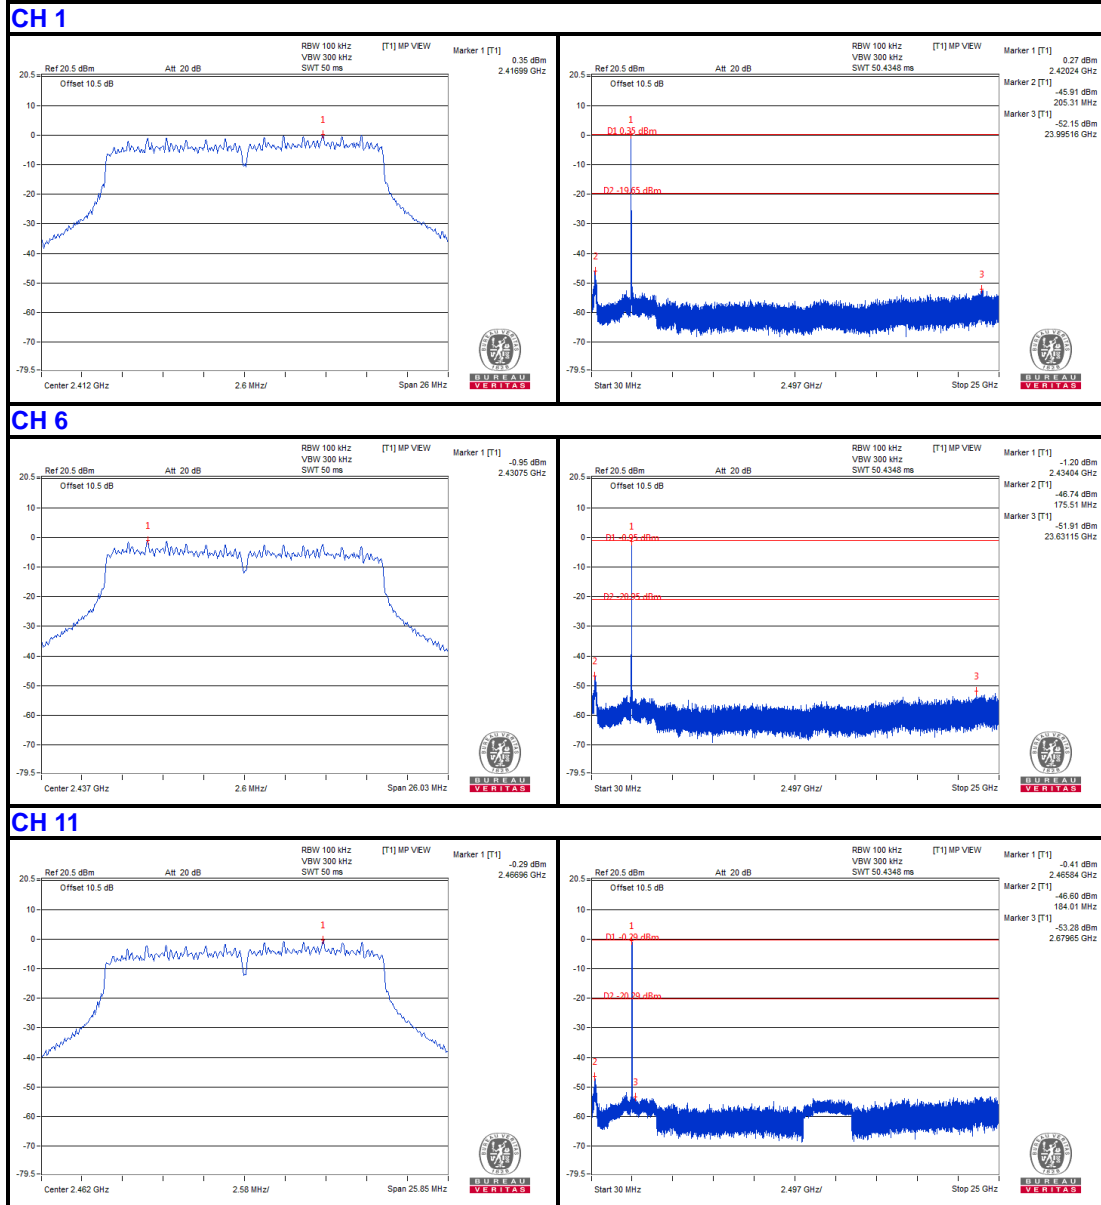



**BUREAU
VERITAS**

Test Report No.: RF170926W004-1

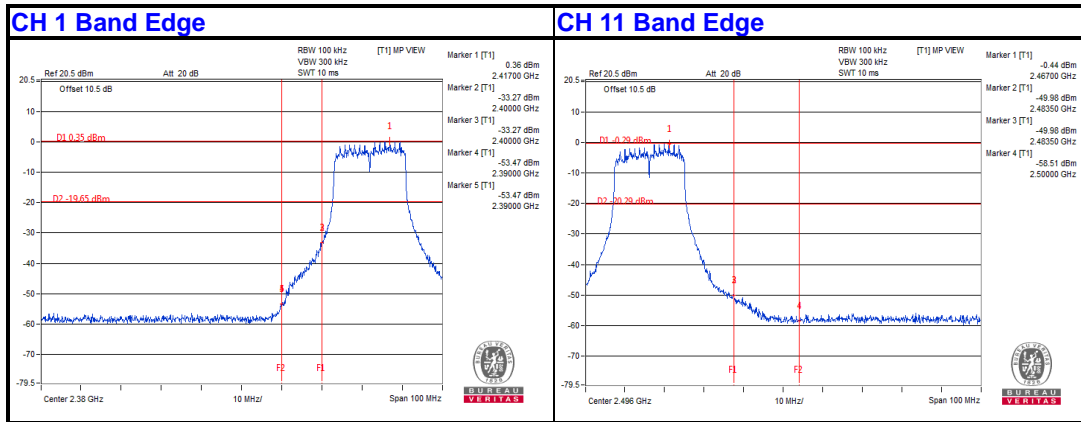

BV 7Layers Communications Technology
(Shenzhen) Co. Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.dg@cn.bureauveritas.com



5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---