



# FCC RF Test Report

APPLICANT : ZTE CORPORATION  
EQUIPMENT : WCDMA/LTE Multi-Mode Digital  
Mobile Phone  
BRAND NAME : ZTE  
MODEL NAME : Z959  
FCC ID : SRQ-Z959  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Oct. 19, 2015 and testing was completed on Nov. 04, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification subjective to this standard ..... 6

    1.5 Modification of EUT ..... 7

    1.6 Testing Location ..... 7

    1.7 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency Channel ..... 8

    2.2 Pre-Scanned RF Power..... 9

    2.3 Test Mode..... 10

    2.4 Connection Diagram of Test System..... 11

    2.5 Support Unit used in test configuration and system ..... 12

    2.6 EUT Operation Test Setup ..... 12

    2.7 Measurement Results Explanation Example..... 13

**3 TEST RESULT ..... 14**

    3.1 6dB Bandwidth Measurement ..... 14

    3.2 Output Power Measurement..... 16

    3.3 Power Spectral Density Measurement ..... 18

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 20

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 30

    3.6 AC Conducted Emission Measurement..... 34

    3.7 Antenna Requirements ..... 38

**4 LIST OF MEASURING EQUIPMENT ..... 39**

**5 UNCERTAINTY OF EVALUATION ..... 40**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. RADIATED TEST RESULTS**

**APPENDIX C. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.69 dB at 2389.560 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.35 dB at 0.490 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.2 Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA/LTE Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	Z959
FCC ID	SRQ-Z959
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(16QAM uplink is not supported)/LTE WLAN2.4GHz 802.11b/g/n HT20 Bluetooth v2.1+EDR/Bluetooth v4.0 LE
IMEI Code	Conducted: 868504020005536 Radiation: 868504020005262 Conduction: 868504020005510
HW Version	uc5A
SW Version	Z959V1.0.6
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
<b>Tx/Rx Channel Frequency Range</b>	802.11b/g/n : 2412 MHz ~ 2462 MHz
<b>Maximum (Peak) Output Power to Antenna</b>	802.11b : 18.57 dBm (0.0719 W) 802.11g : 22.44 dBm (0.1754 W) 802.11n HT20 : 20.86 dBm (0.1219 W)
<b>Antenna Type</b>	802.11b/g/n : PIFA Antenna with gain -3.00 dBi
<b>Type of Modulation</b>	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC Registration No.</b>
	TH01-KS	03CH03-KS	CO01-KS	306251

**Note:** The test site complies with ANSI C63.4 2009 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
- ♦ ANSI C63.10-2009

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Output Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate	Channel	2Mbps	5.5Mbps	11Mbps
		1Mbps				
CH 01	2412 MHz	17.98	CH 06	18.22	18.36	18.45
CH 06	2437 MHz	18.57				
CH 11	2462 MHz	18.41				

2.4GHz 802.11g RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps								
CH 01	2412 MHz	21.91	CH 06	22.24	22.18	22.21	22.26	22.25	22.39	22.37
CH 06	2437 MHz	22.44								
CH 11	2462 MHz	22.11								

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 01	2412 MHz	20.36	CH 06	20.57	20.61	20.65	20.74	20.69	20.73	20.76
CH 06	2437 MHz	20.86								
CH 11	2462 MHz	20.28								



## 2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.


<2.4GHz>

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)

## 2.4 Connection Diagram of Test System

<WLAN Tx Mode>

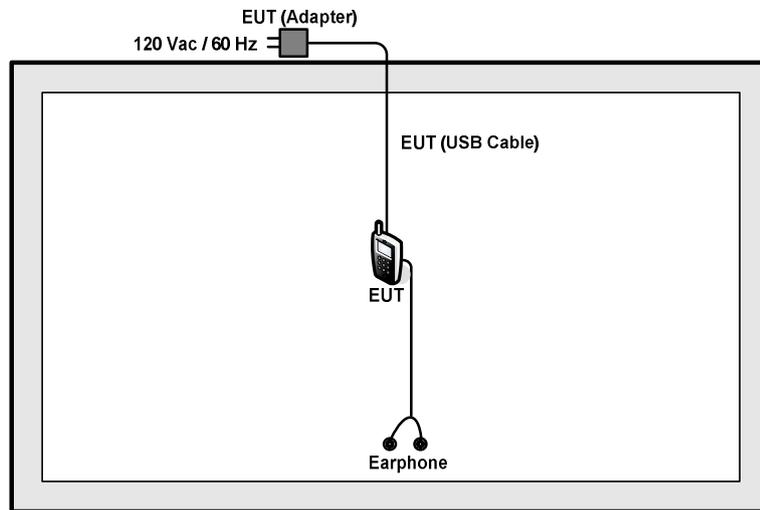

<AC Conducted Emission Mode>

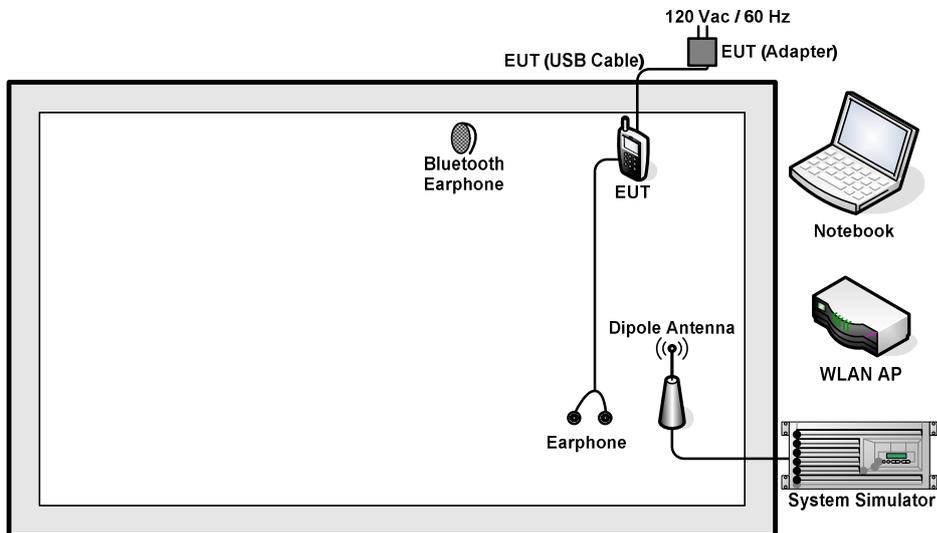



## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
3.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
4.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	Earphone	Lenovo	LH102	N/A	Unshielded,1.2m	N/A

## 2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.



## **2.7 Measurement Results Explanation Example**

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.5 dB.

Offset(dB) = RF cable loss(dB) = 5.5 (dB)

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


##### 3.1.4 Test Setup

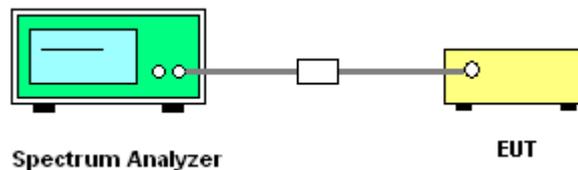



### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A of this test report.

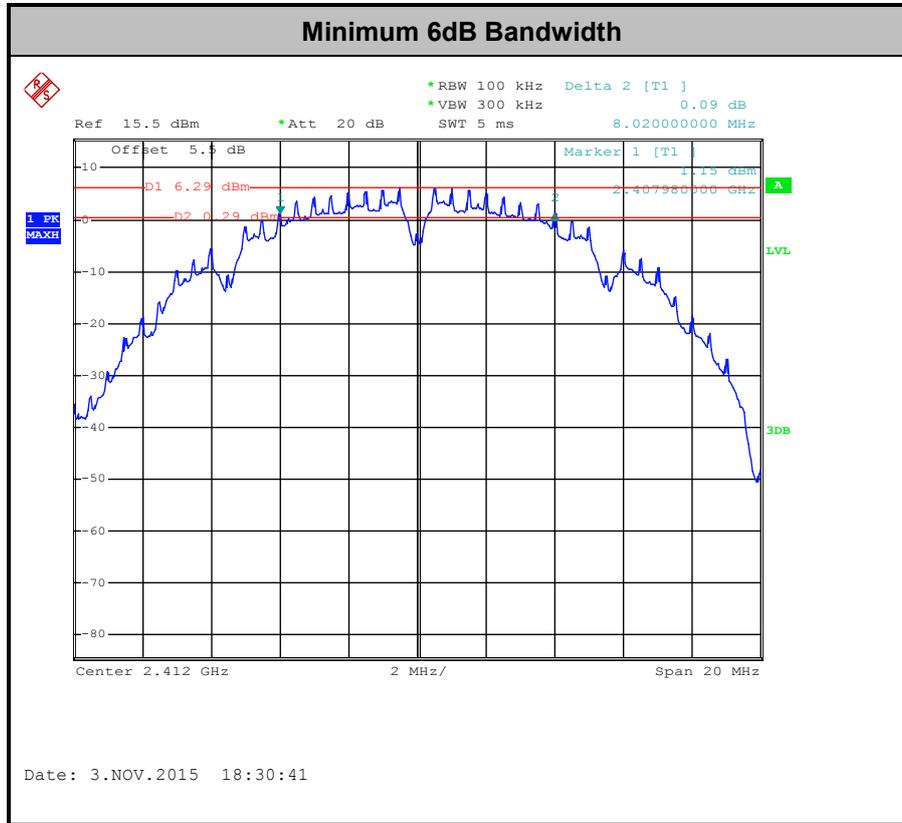

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r03 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

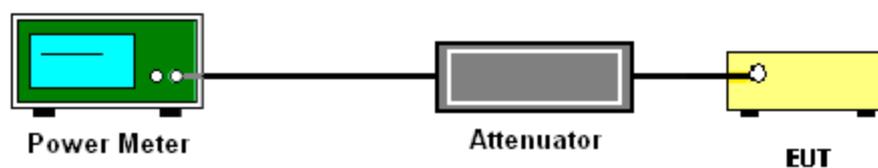



**3.2.5 Test Result of Peak Output Power**

Please refer to Appendix A of this test report.

**3.2.6 Test Result of Average output Power (Reporting Only)**

Please refer to Appendix A of this test report.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


#### 3.3.4 Test Setup

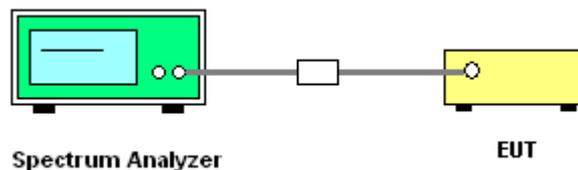



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

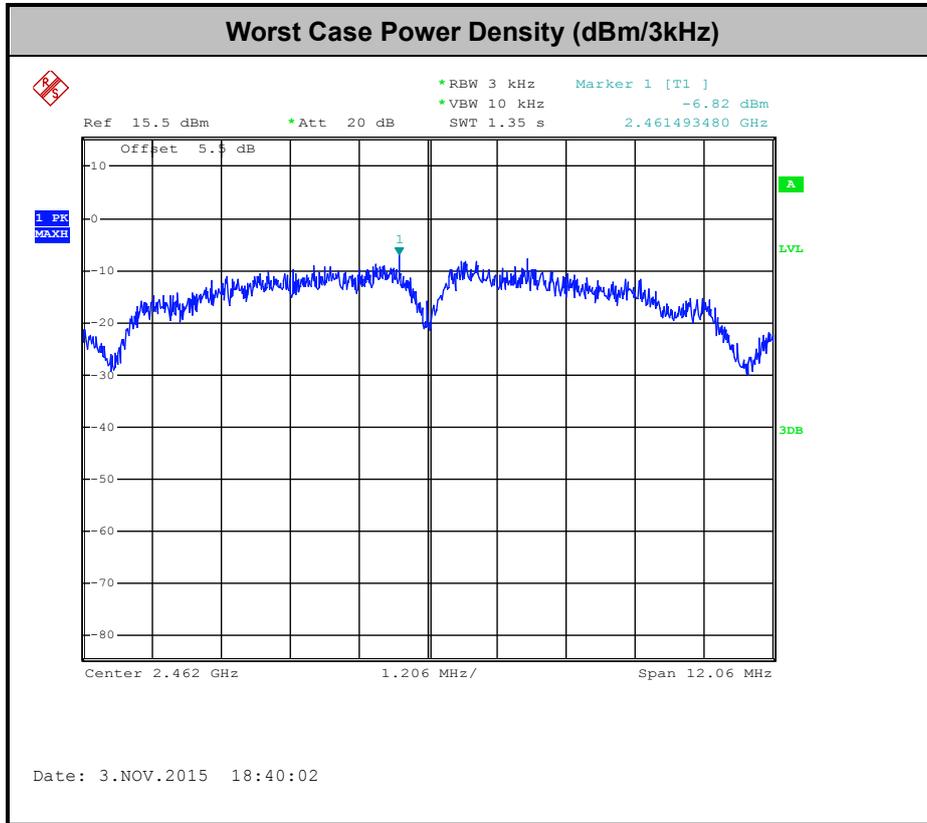

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

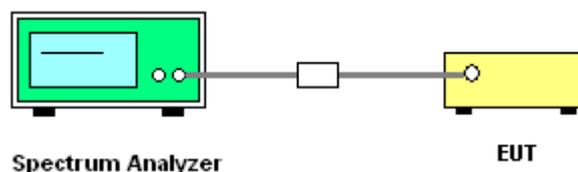




### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song


#### WLAN 802.11b Channel 01

##### 100kHz PSD reference Level

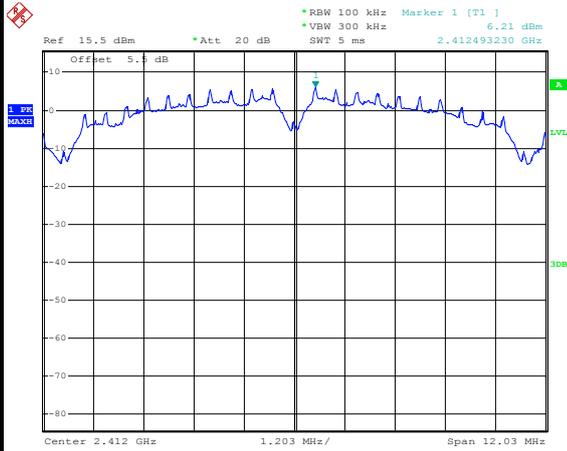


Date: 3.NOV.2015 18:31:51

##### Low Channel Plot

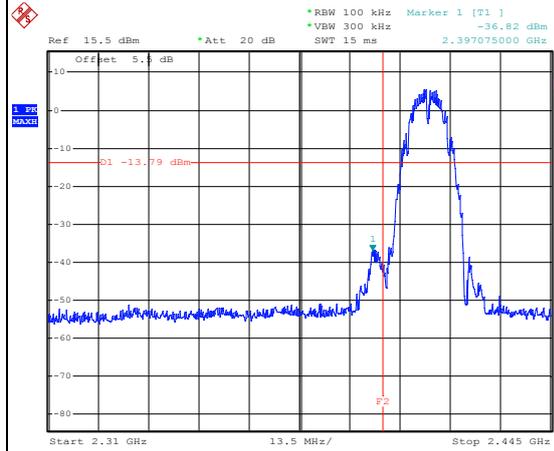


Date: 3.NOV.2015 18:32:10

##### Spurious Emission 30MHz~3GHz

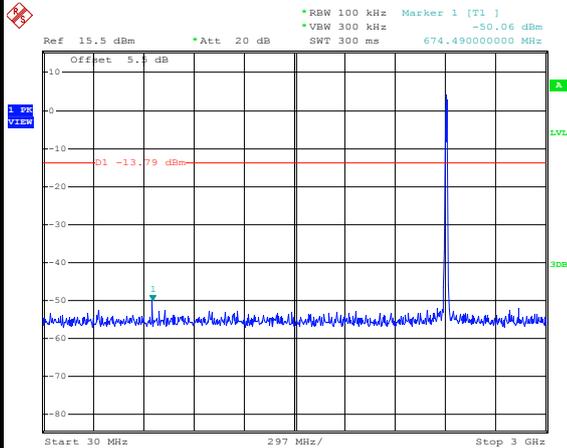

Date: 3.NOV.2015 18:45:14

##### Spurious Emission 2GHz~25GHz

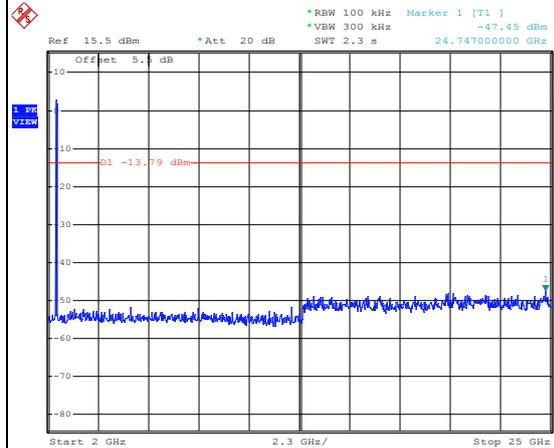


Date: 3.NOV.2015 18:45:22



Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11b Channel 06

100kHz PSD reference Level

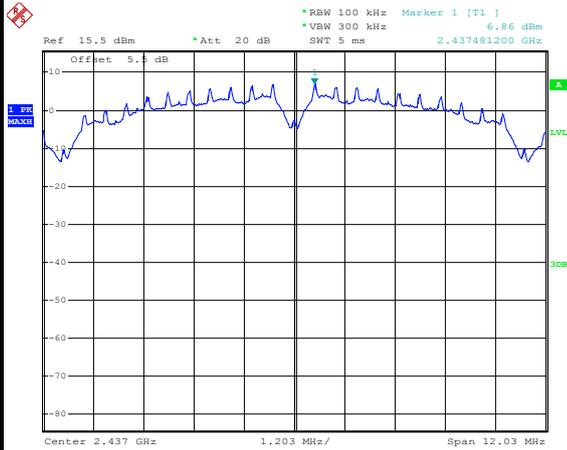


Date: 3.NOV.2015 18:35:27

Spurious Emission 30MHz~3GHz

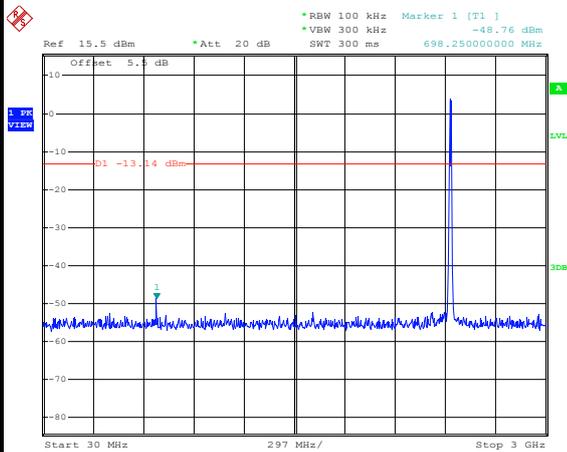

Date: 3.NOV.2015 18:36:00

Spurious Emission 2GHz~25GHz

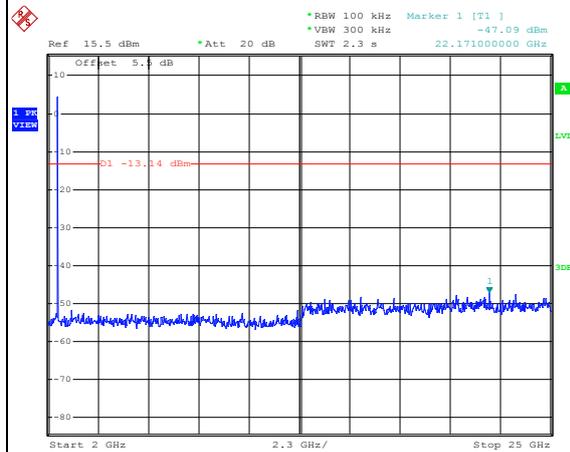


Date: 3.NOV.2015 18:36:08



Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song


WLAN 802.11b Channel 11

100kHz PSD reference Level

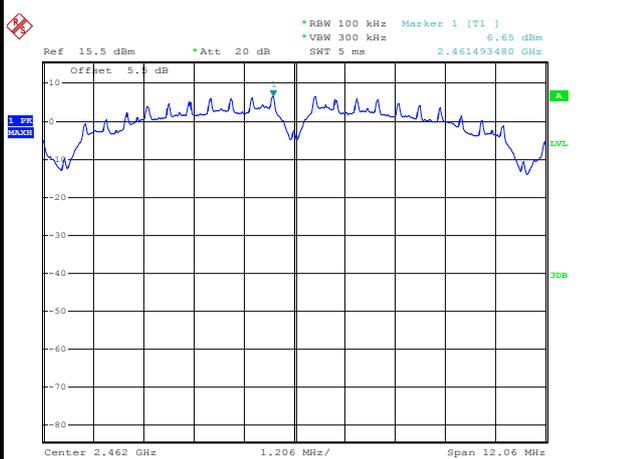


Date: 3.NOV.2015 18:39:28

High Channel Plot

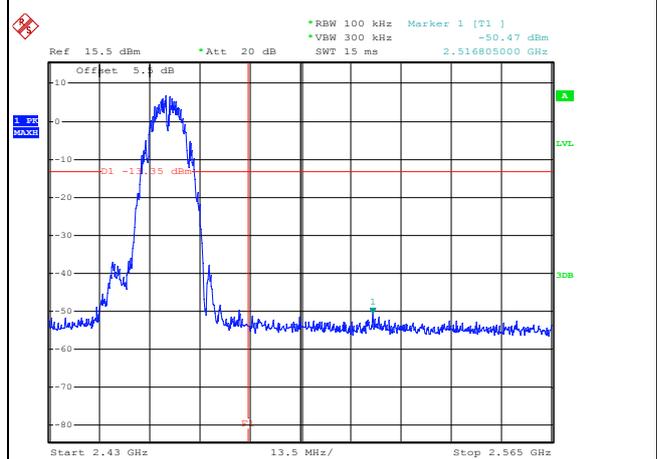


Date: 3.NOV.2015 18:41:27

Spurious Emission 30MHz~3GHz

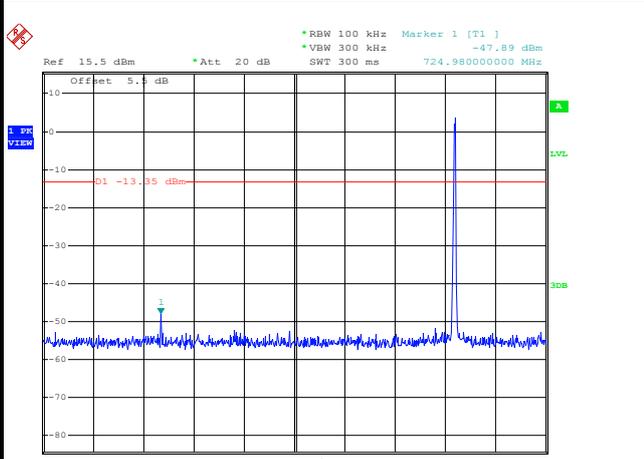

Date: 3.NOV.2015 18:41:46

Spurious Emission 2GHz~25GHz

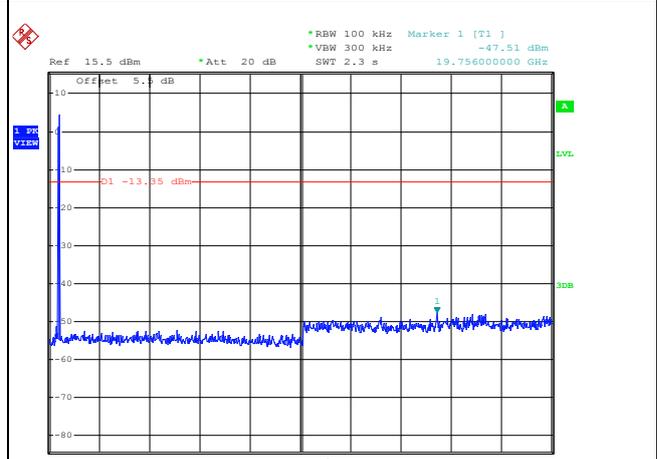


Date: 3.NOV.2015 18:41:55



Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song


WLAN 802.11g Channel 01

100kHz PSD reference Level

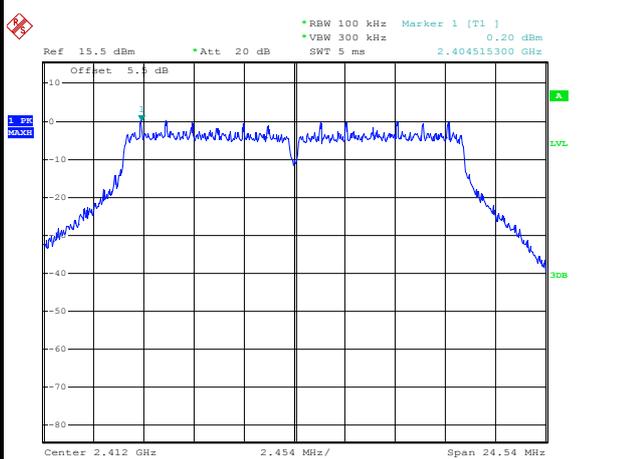


Date: 3.NOV.2015 18:50:57

Low Channel Plot

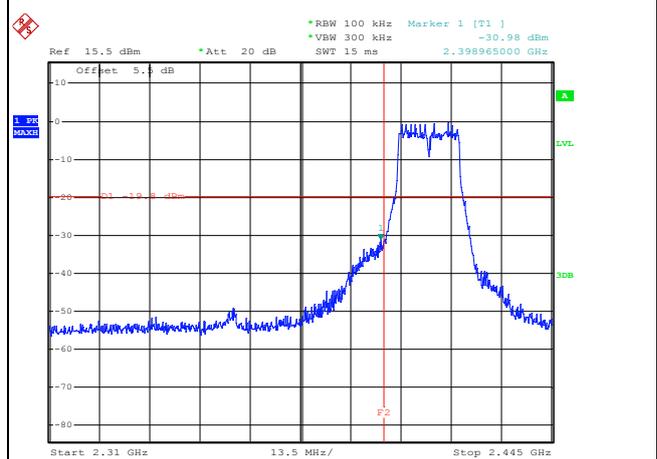


Date: 3.NOV.2015 18:52:50

Spurious Emission 30MHz~3GHz

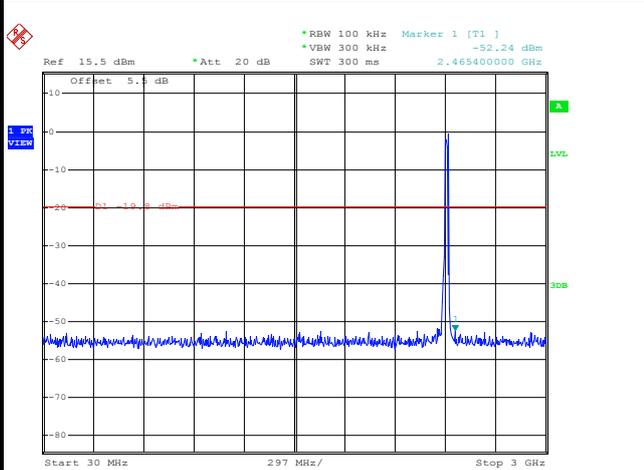

Date: 3.NOV.2015 18:51:39

Spurious Emission 2GHz~25GHz

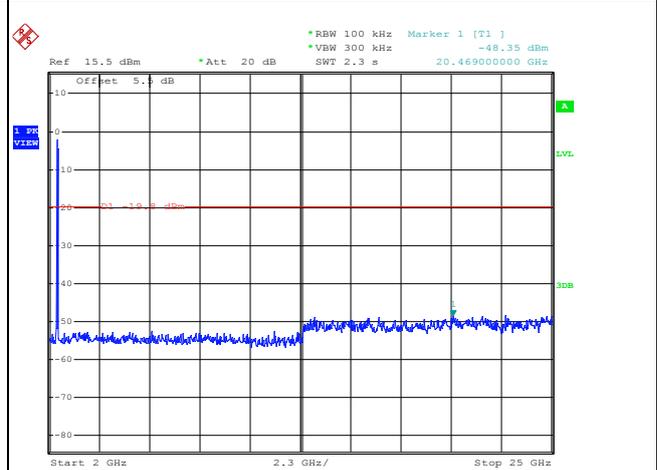


Date: 3.NOV.2015 18:51:48



Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11g Channel 06

100kHz PSD reference Level

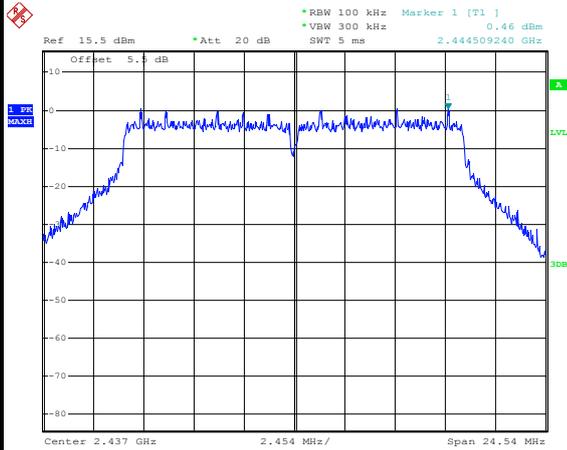


Date: 3.NOV.2015 18:54:37

Spurious Emission 30MHz~3GHz

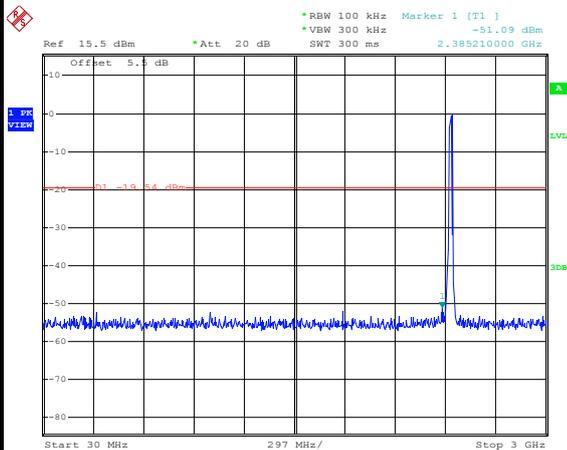

Date: 3.NOV.2015 19:00:47

Spurious Emission 2GHz~25GHz

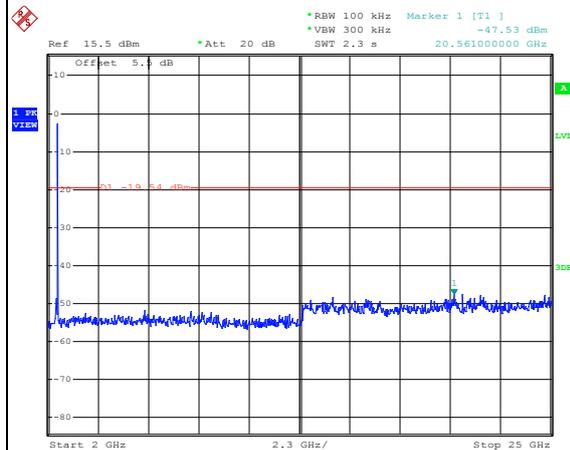


Date: 3.NOV.2015 19:00:55




Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song

WLAN 802.11g Channel 11


100kHz PSD reference Level

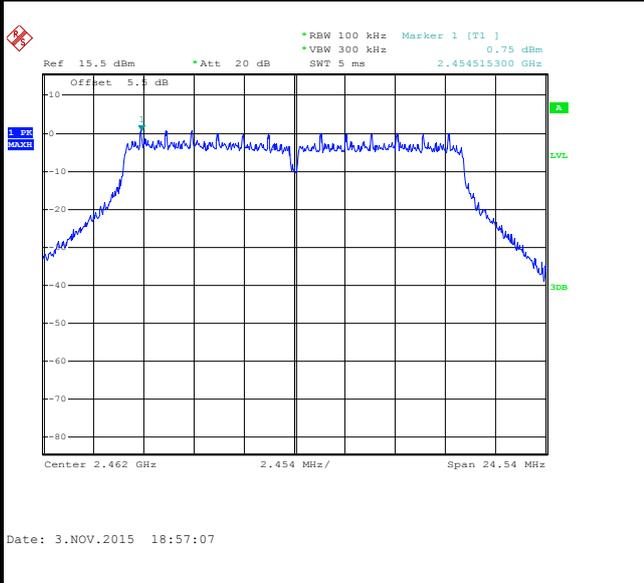


High Channel Plot

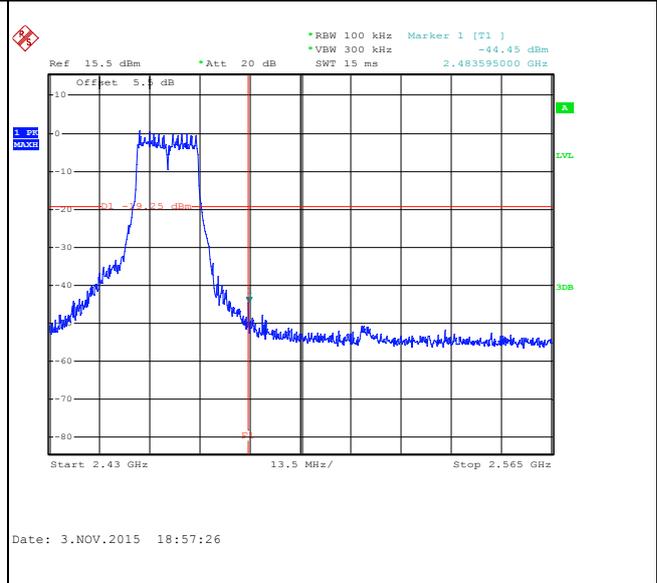

Spurious Emission 30MHz~3GHz

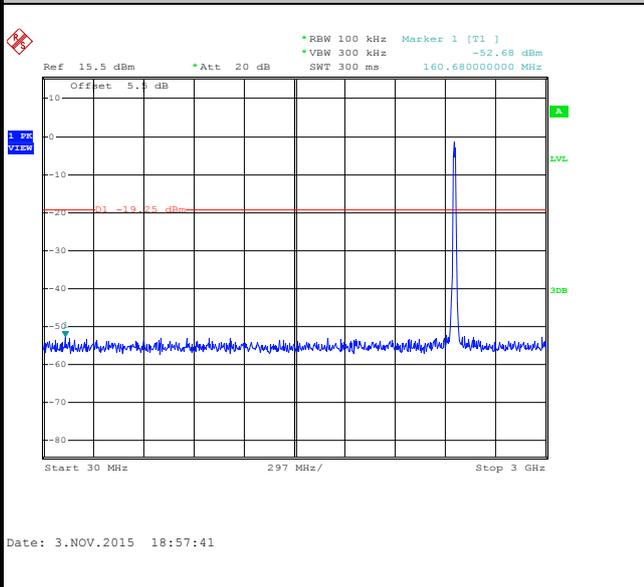

Spurious Emission 2GHz~25GHz

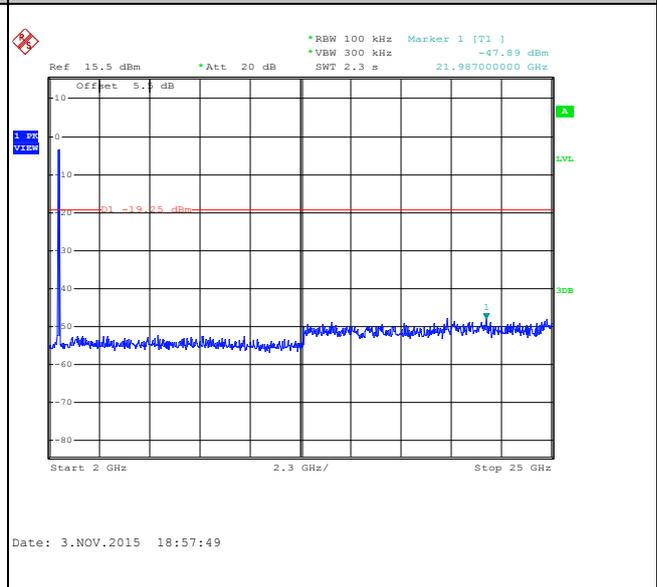




Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

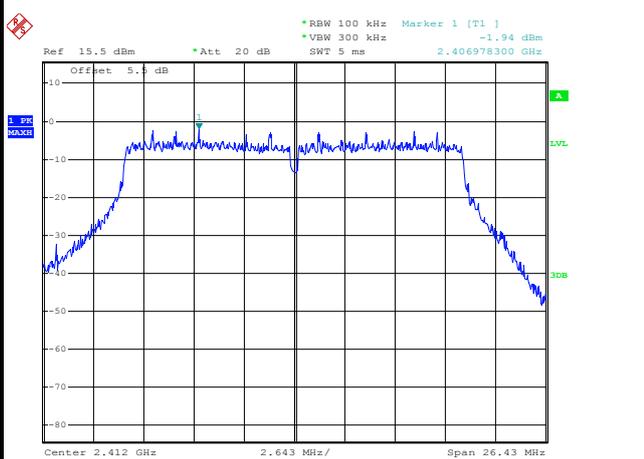


Date: 3.NOV.2015 19:06:05

Low Channel Plot

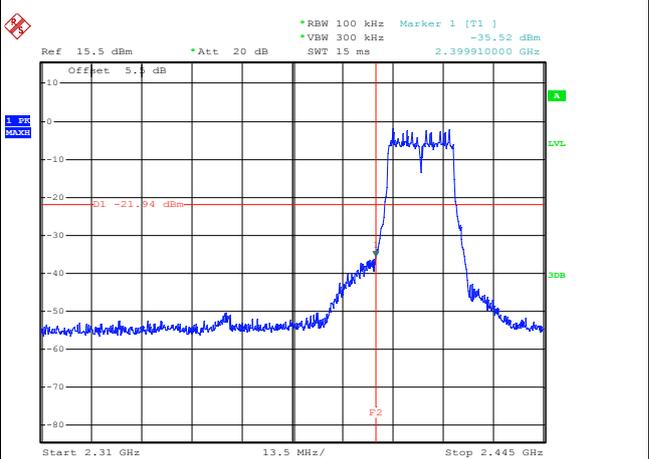


Date: 3.NOV.2015 19:06:20

Spurious Emission 30MHz~3GHz

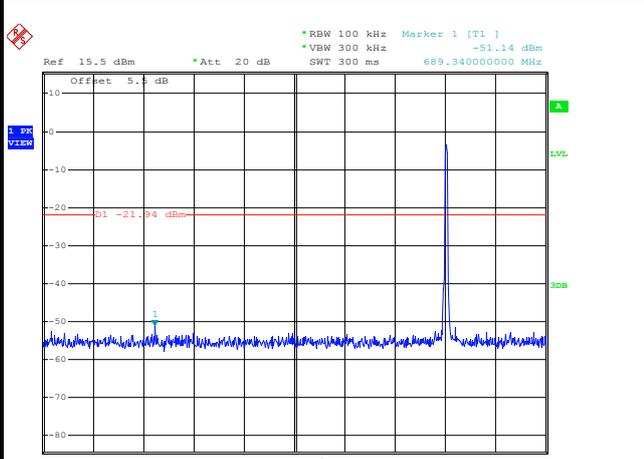

Date: 3.NOV.2015 19:06:33

Spurious Emission 2GHz~25GHz

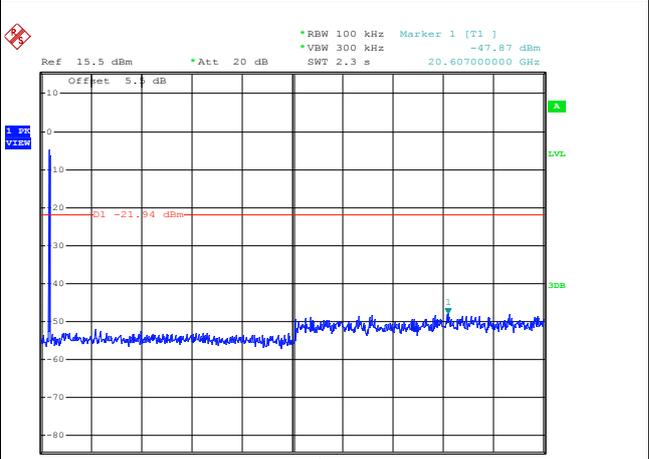


Date: 3.NOV.2015 19:06:41



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

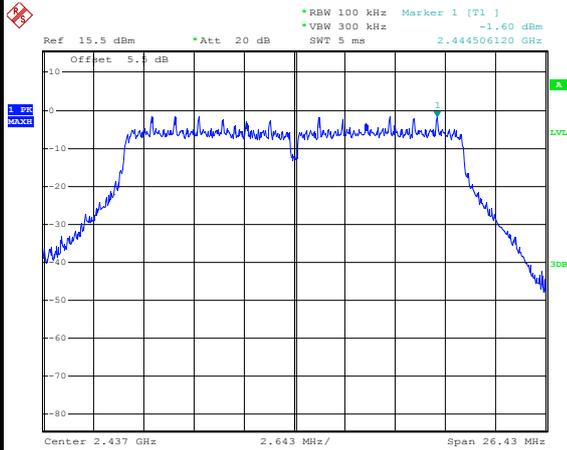


Date: 3.NOV.2015 19:08:34

Spurious Emission 30MHz~3GHz

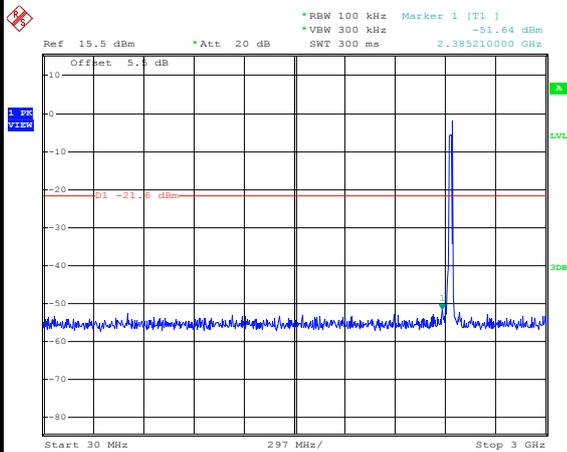

Date: 3.NOV.2015 19:08:54

Spurious Emission 2GHz~25GHz

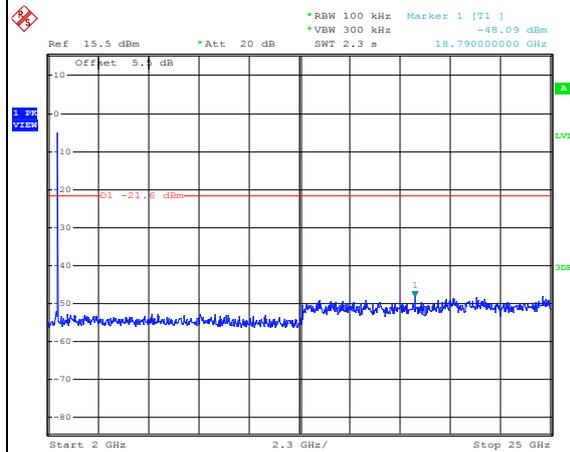


Date: 3.NOV.2015 19:09:02




Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song

WLAN 802.11n HT20 Channel 11


100kHz PSD reference Level

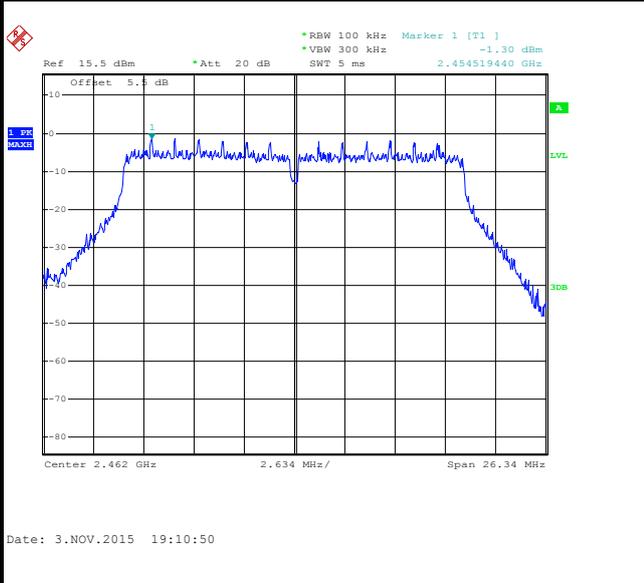


High Channel Plot

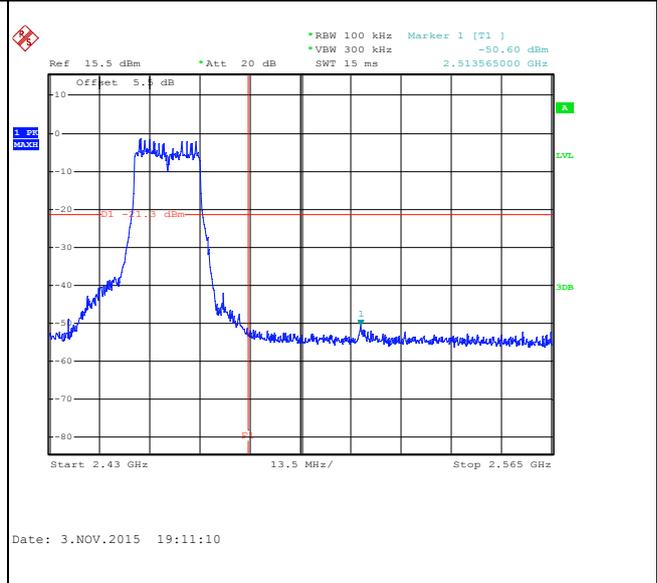

Spurious Emission 30MHz~3GHz

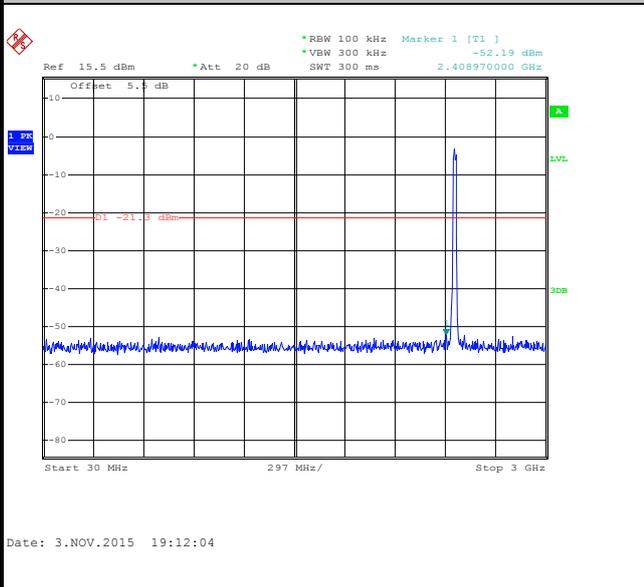

Spurious Emission 2GHz~25GHz

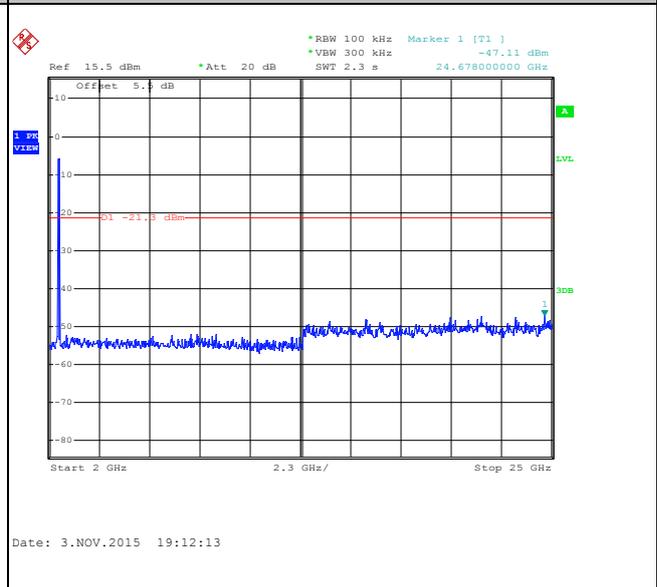



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.
 


For average measurement:

    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.63	8.24	0.12	300Hz
802.11g	87.26	1.37	0.73	1KHz
2.4GHz 802.11n HT20	86.64	1.28	0.78	1KHz

### 3.5.4 Test Setup


For radiated emissions below 30MHz

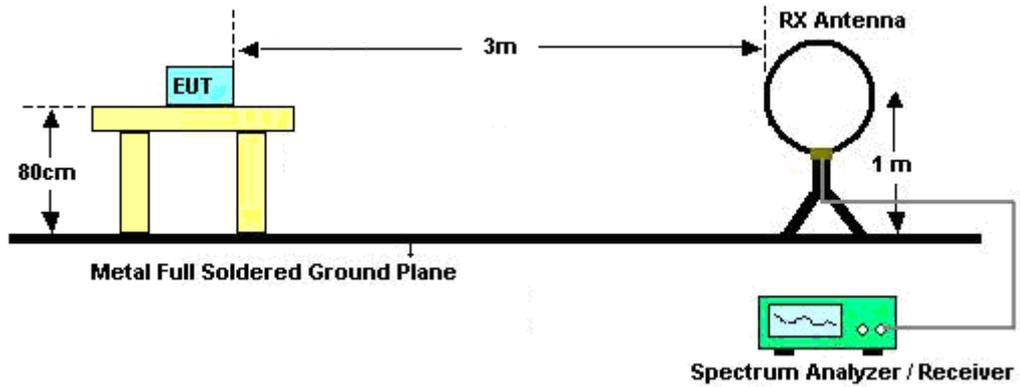

For radiated emissions from 30MHz to 1GHz

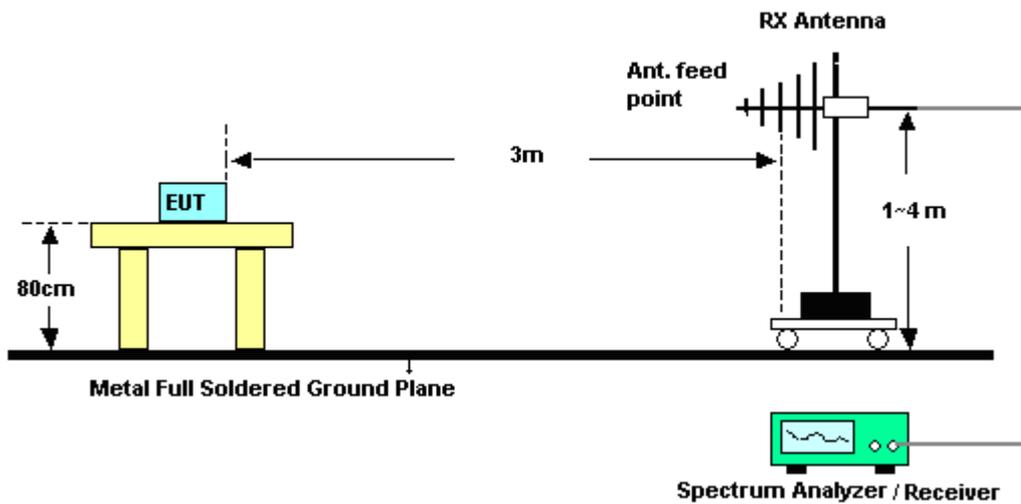

For radiated emissions above 1GHz

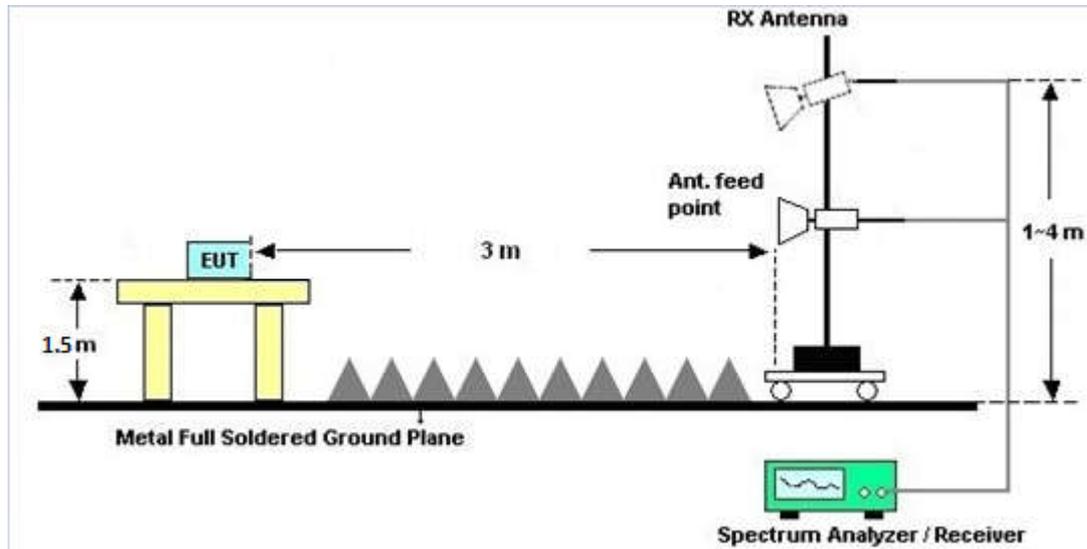

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

### 3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix B.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


### 3.6.4 Test Setup

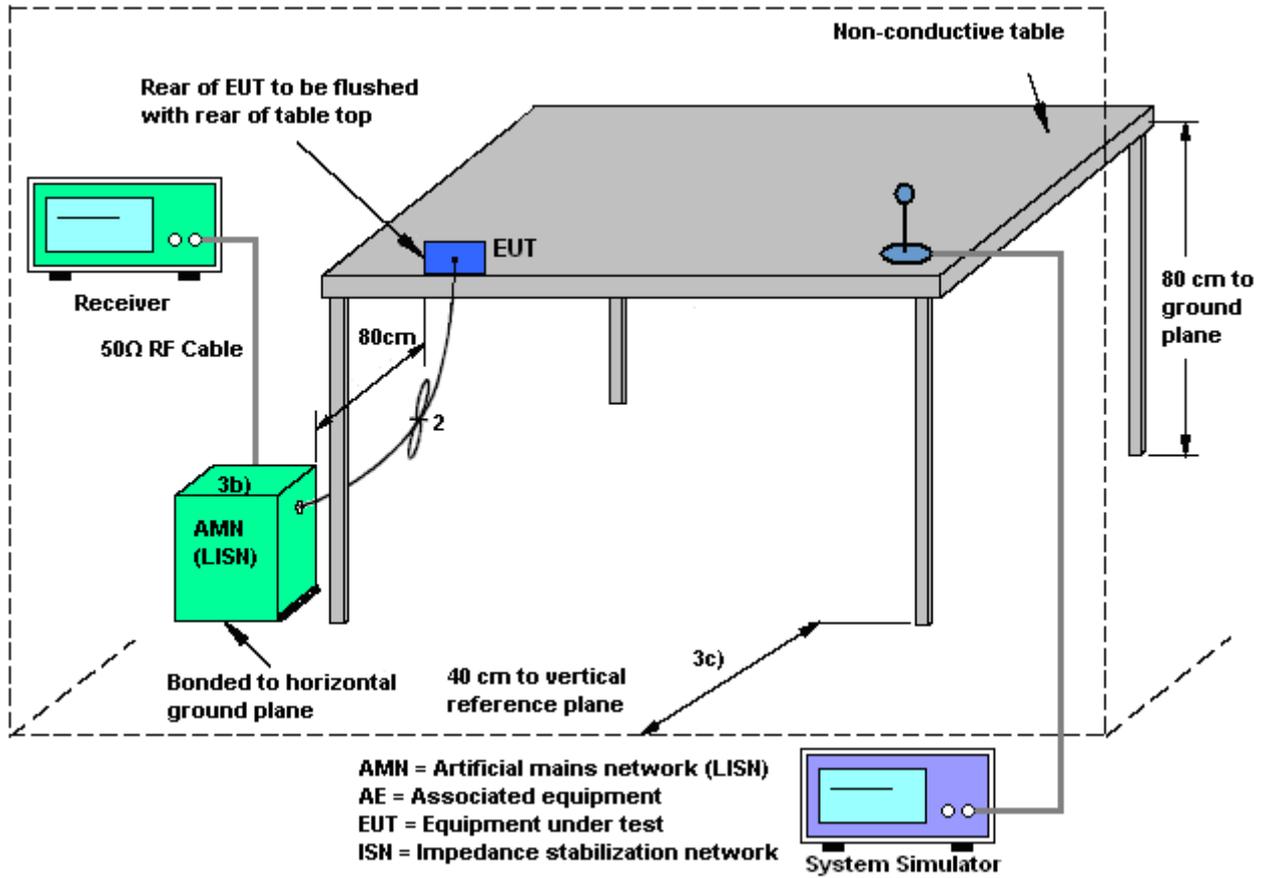



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

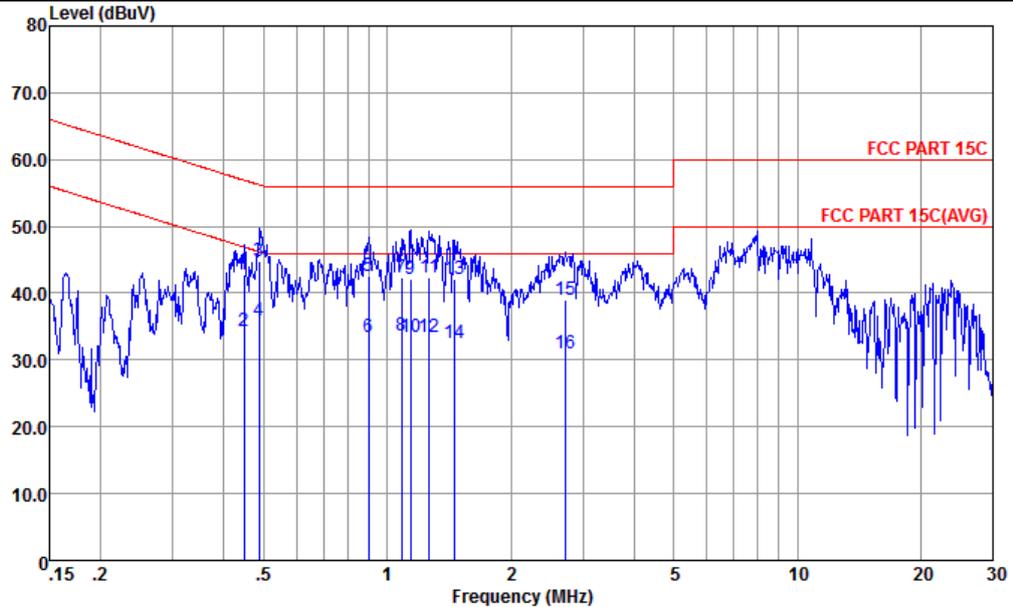


Site : CO01-KS  
 Condition : FCC PART 15C LISN-L20141025 LINE  
 mode : Mode 1  
 : 868504020005510

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.45	42.72	-14.21	56.93	32.30	0.25	10.17	QP
2	0.45	34.32	-12.61	46.93	23.90	0.25	10.17	Average
3	0.49	44.88	-11.35	56.23	34.51	0.21	10.16	QP
4 *	0.49	35.88	-10.35	46.23	25.51	0.21	10.16	Average
5	0.90	42.46	-13.54	56.00	32.20	0.12	10.14	QP
6	0.90	33.46	-12.54	46.00	23.20	0.12	10.14	Average
7	1.08	42.44	-13.56	56.00	32.20	0.10	10.14	QP
8	1.08	33.64	-12.36	46.00	23.40	0.10	10.14	Average
9	1.14	42.04	-13.96	56.00	31.80	0.10	10.14	QP
10	1.14	33.54	-12.46	46.00	23.30	0.10	10.14	Average
11	1.27	42.44	-13.56	56.00	32.20	0.10	10.14	QP
12	1.27	33.54	-12.46	46.00	23.30	0.10	10.14	Average
13	1.46	42.14	-13.86	56.00	31.90	0.10	10.14	QP
14	1.46	32.54	-13.46	46.00	22.30	0.10	10.14	Average
15	2.72	39.07	-16.93	56.00	28.80	0.12	10.15	QP
16	2.72	30.97	-15.03	46.00	20.70	0.12	10.15	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

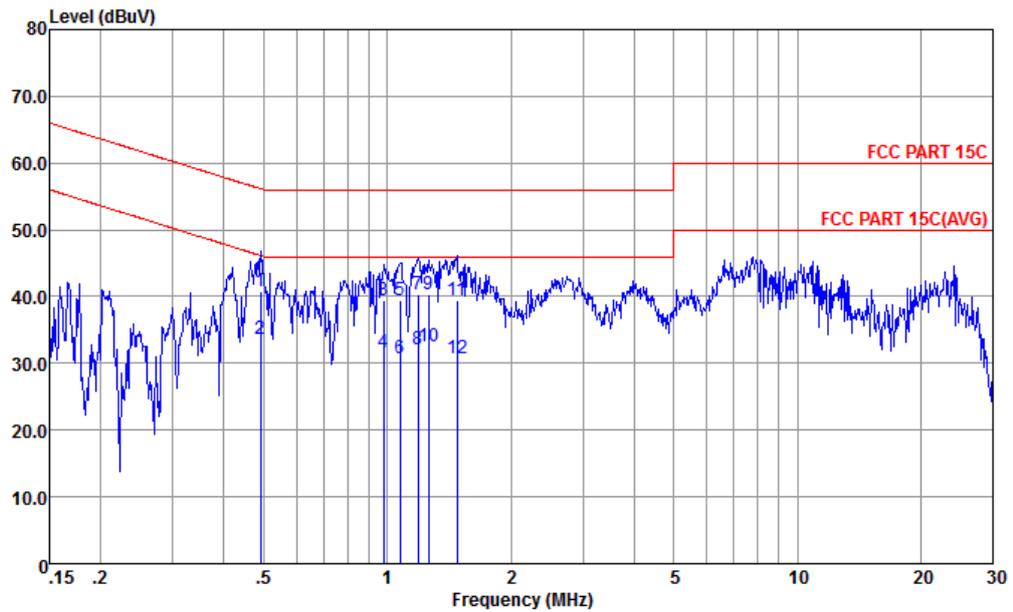

Site : CO01-KS  
 Condition : FCC PART 15C LISN-N20141025 NEUTRAL

mode : Mode 1  
 : 868504020005510

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.49	40.77	-15.37	56.14	30.30	0.31	10.16	QP
2 *	0.49	33.57	-12.57	46.14	23.10	0.31	10.16	Average
3	0.98	39.44	-16.56	56.00	29.20	0.10	10.14	QP
4	0.98	31.54	-14.46	46.00	21.30	0.10	10.14	Average
5	1.08	39.54	-16.46	56.00	29.30	0.10	10.14	QP
6	1.08	30.74	-15.26	46.00	20.50	0.10	10.14	Average
7	1.19	40.44	-15.56	56.00	30.20	0.10	10.14	QP
8	1.19	32.04	-13.96	46.00	21.80	0.10	10.14	Average
9	1.26	40.44	-15.56	56.00	30.20	0.10	10.14	QP
10	1.26	32.44	-13.56	46.00	22.20	0.10	10.14	Average
11	1.48	39.34	-16.66	56.00	29.10	0.10	10.14	QP
12	1.48	30.84	-15.16	46.00	20.60	0.10	10.14	Average



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 24, 2015	Nov. 03, 2015	Oct. 23, 2016	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Jan. 23, 2015	Nov. 03, 2015	Jan. 22, 2016	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 23, 2015	Nov. 03, 2015	Jan. 22, 2016	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Oct. 24, 2015	Nov. 04, 2015	Oct. 23, 2016	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Jun. 05, 2015	Nov. 04, 2015	Jun. 04, 2016	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 13, 2014	Nov. 04, 2015	Nov. 12, 2015	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Jun. 25, 2015	Nov. 04, 2015	Jun. 24, 2016	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Jun. 25, 2015	Nov. 04, 2015	Jun. 24, 2016	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz ~40GHz	Mar. 03, 2015	Nov. 04, 2015	Mar. 02, 2016	Radiation (03CH03-KS)
Amplifier	Burgeon	BPA-530	102212	0.01MHz~3000MHz	Aug. 10, 2015	Nov. 04, 2015	Aug. 09, 2016	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 24, 2015	Nov. 04, 2015	Oct. 23, 2016	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 04, 2015	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 04, 2015	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 04, 2015	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2015	Nov. 02, 2015	May 03, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 24, 2015	Nov. 02, 2015	Oct. 23, 2016	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 24, 2015	Nov. 02, 2015	Oct. 23, 2016	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	Nov. 02, 2015	Oct. 23, 2016	Conduction (CO01-KS)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5 dB
---	--------



## **Appendix A. Conducted Test Results**

Test Engineer:	Issac Song	Temperature:	24~25	°C
Test Date:	2015/11/3	Relative Humidity:	49~51	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.15	8.02	0.50	Pass
11b	1Mbps	1	6	2437	13.10	8.02	0.50	Pass
11b	1Mbps	1	11	2462	13.15	8.04	0.50	Pass
11g	6Mbps	1	1	2412	18.55	16.36	0.50	Pass
11g	6Mbps	1	6	2437	18.40	16.36	0.50	Pass
11g	6Mbps	1	11	2462	18.10	16.36	0.50	Pass
HT20	MCS0	1	1	2412	18.90	17.62	0.50	Pass
HT20	MCS0	1	6	2437	19.00	17.62	0.50	Pass
HT20	MCS0	1	11	2462	19.00	17.56	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	17.98	30.00	-3.00	14.98	36.00	Pass
11b	1Mbps	1	6	2437	18.57	30.00	-3.00	15.57	36.00	Pass
11b	1Mbps	1	11	2462	18.41	30.00	-3.00	15.41	36.00	Pass
11g	6Mbps	1	1	2412	21.91	30.00	-3.00	18.91	36.00	Pass
11g	6Mbps	1	6	2437	22.44	30.00	-3.00	19.44	36.00	Pass
11g	6Mbps	1	11	2462	22.11	30.00	-3.00	19.11	36.00	Pass
HT20	MCS0	1	1	2412	20.36	30.00	-3.00	17.36	36.00	Pass
HT20	MCS0	1	6	2437	20.86	30.00	-3.00	17.86	36.00	Pass
HT20	MCS0	1	11	2462	20.28	30.00	-3.00	17.28	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.10	15.21
11b	1Mbps	1	6	2437	0.10	15.53
11b	1Mbps	1	11	2462	0.10	15.49
11g	6Mbps	1	1	2412	0.59	12.17
11g	6Mbps	1	6	2437	0.59	12.80
11g	6Mbps	1	11	2462	0.59	12.51
HT20	MCS0	1	1	2412	0.62	10.15
HT20	MCS0	1	6	2437	0.62	10.78
HT20	MCS0	1	11	2462	0.62	10.50

**TEST RESULTS DATA**  
**Peak Power Density**

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-7.70	-3.00	8.00	Pass
11b	1Mbps	1	6	2437	-7.94	-3.00	8.00	Pass
11b	1Mbps	1	11	2462	-6.82	-3.00	8.00	Pass
11g	6Mbps	1	1	2412	-13.77	-3.00	8.00	Pass
11g	6Mbps	1	6	2437	-13.13	-3.00	8.00	Pass
11g	6Mbps	1	11	2462	-12.81	-3.00	8.00	Pass
HT20	MCS0	1	1	2412	-15.61	-3.00	8.00	Pass
HT20	MCS0	1	6	2437	-14.79	-3.00	8.00	Pass
HT20	MCS0	1	11	2462	-16.05	-3.00	8.00	Pass



## Appendix B. Radiated Test Results

### 2.4GHz 2400~2483.5MHz

#### WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 01 2412MHz	*	2410.771	104.48	-	-	108.74	27.13	5.61	37	111	128	P	H
	*	2410.855	101.27	-	-	105.53	27.13	5.61	37	111	128	A	H
		2389.74	52.4	-21.6	74	56.83	27	5.59	37.02	111	128	P	H
		2389.83	43.09	-10.91	54	47.52	27	5.59	37.02	111	128	A	H
	*	2410.855	106.71	-	-	110.97	27.13	5.61	37	100	65	P	V
	*	2410.771	104.62	-	-	108.88	27.13	5.61	37	100	65	A	V
		2390.0	53.86	-20.14	74	58.29	27	5.59	37.02	100	65	P	V
		2389.38	44.89	-9.11	54	49.32	27	5.59	37.02	100	65	A	V
802.11b CH 06 2437MHz	*	2435.822	106.08	-	-	110.18	27.26	5.63	36.99	100	120	P	H
	*	2435.905	103.56	-	-	107.66	27.26	5.63	36.99	100	120	A	H
	*	2435.822	106.62	-	-	110.72	27.26	5.63	36.99	145	11	P	V
	*	2435.905	103.73	-	-	107.83	27.26	5.63	36.99	145	11	A	V
802.11b CH 11 2462MHz	*	2460.788	103.43	-	-	107.21	27.51	5.67	36.96	137	129	P	H
	*	2460.872	101.38	-	-	105.16	27.51	5.67	36.96	137	129	A	H
		2487.56	53.28	-20.72	74	56.73	27.77	5.71	36.93	137	129	P	H
		2487.2	42.94	-11.06	54	46.55	27.64	5.69	36.94	137	129	A	H
	*	2460.705	105.32	-	-	109.1	27.51	5.67	36.96	103	68	P	V
	*	2460.872	102.76	-	-	106.54	27.51	5.67	36.96	103	68	A	V
		2487.28	54.18	-19.82	74	57.79	27.64	5.69	36.94	103	68	P	V
		2487.36	44.44	-9.56	54	48.05	27.64	5.69	36.94	103	68	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11b CH 01 2412MHz		4824	43.49	-30.51	74	40.81	31.51	7.85	36.68	100	229	P	H
		4824	43.54	-30.46	74	40.86	31.51	7.85	36.68	100	3	P	V
802.11b CH 06 2437MHz		4875	42.95	-31.05	74	40.13	31.59	7.89	36.66	144	78	P	H
		7311	45.8	-28.2	74	38.88	34.03	9.58	36.69	175	360	P	H
		4875	42.63	-31.37	74	39.81	31.59	7.89	36.66	100	334	P	V
		7311	46.18	-27.82	74	39.26	34.03	9.58	36.69	215	246	P	V
802.11b CH 11 2462MHz		4923	42.53	-31.47	74	39.59	31.67	7.92	36.65	100	219	P	H
		7386	46.4	-27.6	74	39.13	34.29	9.76	36.78	100	250	P	H
		4923	41.57	-32.43	74	38.63	31.67	7.92	36.65	205	250	P	V
		7386	45.58	-28.42	74	38.31	34.29	9.76	36.78	100	16	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz	*	2415.364	101.41	-	-	105.67	27.13	5.61	37	100	124	P	H
	*	2416.533	92.81	-	-	97.07	27.13	5.61	37	100	124	A	H
		2389.56	66	-8	74	70.43	27	5.59	37.02	100	124	P	H
	!	2389.83	50.9	-3.1	54	55.33	27	5.59	37.02	100	124	A	H
	*	2406.262	103.78	-	-	108.04	27.13	5.61	37	116	67	P	V
	*	2406.262	96.06	-	-	100.32	27.13	5.61	37	116	67	A	V
		2389.92	65.75	-8.25	74	70.18	27	5.59	37.02	116	67	P	V
	!	2389.56	52.31	-1.69	54	56.74	27	5.59	37.02	116	67	A	V
802.11g CH 06 2437MHz	*	2433.149	103.79	-	-	107.89	27.26	5.63	36.99	236	44	P	H
	*	2430.06	95.88	-	-	99.98	27.26	5.63	36.99	236	44	A	H
	*	2431.313	104	-	-	108.1	27.26	5.63	36.99	100	131	P	V
	*	2431.563	95.92	-	-	100.02	27.26	5.63	36.99	100	131	A	V
802.11g CH 11 2462MHz	*	2468.303	104.68	-	-	108.46	27.51	5.67	36.96	232	145	P	H
	*	2454.776	96.21	-	-	99.99	27.51	5.67	36.96	232	145	A	H
		2483.96	66.68	-7.32	74	70.29	27.64	5.69	36.94	232	145	P	H
	!	2483.6	49.09	-4.91	54	52.7	27.64	5.69	36.94	232	145	A	H
	*	2460.454	104.05	-	-	107.83	27.51	5.67	36.96	100	64	P	V
	*	2455.027	96.5	-	-	100.28	27.51	5.67	36.96	100	64	A	V
		2483.68	65.29	-8.71	74	68.9	27.64	5.69	36.94	100	64	P	V
	!	2483.52	49.55	-4.45	54	53.16	27.64	5.69	36.94	100	64	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz		4824	41.74	-32.26	74	39.06	31.51	7.85	36.68	300	317	P	H
		4824	42.17	-31.83	74	39.49	31.51	7.85	36.68	100	0	P	V
802.11g CH 06 2437MHz		4875	42.54	-31.46	74	39.72	31.59	7.89	36.66	100	353	P	H
		7311	45.59	-28.41	74	38.67	34.03	9.58	36.69	100	146	P	H
		4875	41.74	-32.26	74	38.92	31.59	7.89	36.66	100	185	P	V
		7311	45.76	-28.24	74	38.84	34.03	9.58	36.69	100	360	P	V
802.11g CH 11 2462MHz		4923	41.61	-32.39	74	38.67	31.67	7.92	36.65	100	80	P	H
		7386	45.62	-28.38	74	38.35	34.29	9.76	36.78	100	81	P	H
		4923	41.79	-32.21	74	38.85	31.67	7.92	36.65	100	360	P	V
		7386	45.08	-28.92	74	37.81	34.29	9.76	36.78	100	206	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz	*	2417.201	99.69	-	-	103.95	27.13	5.61	37	100	128	P	H
	*	2417.451	91.7	-	-	95.96	27.13	5.61	37	100	128	A	H
		2388.66	65.34	-8.66	74	69.77	27	5.59	37.02	100	128	P	H
		2389.83	49.7	-4.3	54	54.13	27	5.59	37.02	100	128	A	H
	*	2415.948	102.78	-	-	107.04	27.13	5.61	37	118	129	P	V
	*	2416.616	94.89	-	-	99.15	27.13	5.61	37	118	129	A	V
		2388.66	66.51	-7.49	74	70.94	27	5.59	37.02	118	129	P	V
		2389.92	51.02	-2.98	54	55.45	27	5.59	37.02	118	129	A	V
802.11n HT20 CH 06 2437MHz	*	2430.728	101.31	-	-	105.41	27.26	5.63	36.99	251	151	P	H
	*	2432.147	93.39	-	-	97.49	27.26	5.63	36.99	251	151	A	H
	*	2430.311	105.38	-	-	109.48	27.26	5.63	36.99	131	71	P	V
	*	2429.559	97.37	-	-	101.47	27.26	5.63	36.99	131	71	A	V
802.11n HT20 CH 11 2462MHz	*	2459.118	98.92	-	-	102.7	27.51	5.67	36.96	100	31	P	H
	*	2456.196	91.25	-	-	95.03	27.51	5.67	36.96	100	31	A	H
		2484.2	63.98	-10.02	74	67.59	27.64	5.69	36.94	100	31	P	H
		2483.64	45.39	-8.61	54	49	27.64	5.69	36.94	100	31	A	H
	*	2457.365	102.9	-	-	106.68	27.51	5.67	36.96	100	85	P	V
	*	2455.361	94.89	-	-	98.67	27.51	5.67	36.96	100	85	A	V
		2483.68	65.09	-8.91	74	68.7	27.64	5.69	36.94	100	85	P	V
	!	2484.08	48.61	-5.39	54	52.22	27.64	5.69	36.94	100	85	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz		4824	42.62	-31.38	74	39.94	31.51	7.85	36.68	100	0	P	H
		4824	42.28	-31.72	74	39.6	31.51	7.85	36.68	100	360	P	V
802.11n HT20 CH 06 2437MHz		4875	42.59	-31.41	74	39.77	31.59	7.89	36.66	131	215	P	H
		7311	44.73	-29.27	74	37.81	34.03	9.58	36.69	100	176	P	H
		4875	42.16	-31.84	74	39.34	31.59	7.89	36.66	100	273	P	V
		7311	44.41	-29.59	74	37.49	34.03	9.58	36.69	100	298	P	V
802.11n HT20 CH 11 2462MHz		4923	42.94	-31.06	74	40	31.67	7.92	36.65	100	215	P	H
		7386	44.72	-29.28	74	37.45	34.29	9.76	36.78	100	54	P	H
		4923	43.32	-30.68	74	40.38	31.67	7.92	36.65	100	360	P	V
		7386	45.68	-28.32	74	38.41	34.29	9.76	36.78	100	254	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz  
2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz 802.11g LF		83.35	24.94	-15.06	40	44.49	9.84	1.11	30.5	100	145	P	H
		191.99	23.3	-20.2	43.5	40.82	11.19	1.69	30.4	-	-	P	H
		305.48	24.61	-21.39	46	37.97	15	2.15	30.51	-	-	P	H
		343.31	29.76	-16.24	46	42.39	15.68	2.28	30.59	-	-	P	H
		691.54	21.29	-24.71	46	28.11	20.24	3.32	30.38	-	-	P	H
		969.93	25.76	-28.24	54	28.59	23.68	4.03	30.54	-	-	P	H
		30.97	32.42	-7.58	40	44.36	18.46	0.66	31.06	100	117	P	V
		84.32	24.78	-15.22	40	44.15	10.02	1.11	30.5	-	-	P	V
		152.22	19.83	-23.67	43.5	35.06	13.68	1.49	30.4	-	-	P	V
		305.48	23.94	-22.06	46	37.3	15	2.15	30.51	-	-	P	V
		359.8	29.13	-16.87	46	41.38	16.04	2.33	30.62	-	-	P	V
		583.87	22.34	-23.66	46	31.88	17.66	3.03	30.23	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.