



中国认可
国际互认
检测
TESTING
CNAS L2264

EMC TEST REPORT

Applicant ZTE Corporation
FCC ID SRQ-ZTEBLADEA521
Product LTE/WCDMA/GSM (GPRS)
Multi-Mode Digital Mobile Phone
Model ZTE BLADE A521/BLADE A521
Report No. RXA1704-0112EMC
Issue Date May 2, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2016)/ ANSI C63.4 (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Wei Liu

Guangchang Fan

Performed by: Wei Liu/ Manager

Approved by: Guangchang Fan/ Director

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility.....	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Client Information.....	6
2.2	General information.....	6
2.3	Applied Standards.....	7
2.4	Test Mode.....	8
3	Test Case Results.....	9
3.1	Radiated Emission.....	9
3.2	Conducted Emission.....	15
4	Main Test Instrument.....	18
	ANNEX A: The EUT Appearance and Test Configuration.....	19
	A.1 EUT Appearance.....	19
	A.2 Test Setup.....	22
	A.3 Host Product.....	24



Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	15.107, ANSI C63.4-2014	PASS
Test Date: April 12, 2017 ~ April 14, 2017			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

2.1 Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China

2.2 General information

EUT Description	
Device Type:	Portable Device
Product Name:	LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone
Model Number:	ZTE BLADE A521/BLADE A521
HW Version:	csrB
SW Version:	ATT_MX_BA521_V1.0
IMEI:	863908030029342
Antenna Type:	Internal Antenna
Used Host Product:	PC Manufacturer: lenovo Model: Thinkpad T540p (SN : SL10E37685)
Test Mode:	Transfer Data Mode
EUT Accessory	
Adapter	Manufacturer: SHENZHEN RUIJING INDUSTRIAL CO LTD Model: STC-A51A-Z Input power:100-240 VAC 50-60Hz 250mA Output power:5V DC 1000mA
Battery	Manufacturer: Zhongshan Tianmao Battery Co., Ltd Model: Li3824T44P4h716043 Power Rating: DC 3.85V, 2400mAh, Li-ion
Earphone	Manufacturer: Shen zhen FDC Electronic Co.,Ltd. Model: 500002134813
USB Cable	97cm Cable, Shielded
Remark: The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.	



2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2016)

ANSI C63.4 (2014)

2.4 Test Mode

Test Mode	
Mode 1:	Adapter + USB cable+ earphone + Camera On +GPS Rx +Idle
Mode 2:	Adapter + USB cable+ earphone +FM +Idle
Mode 3:	Adapter + USB cable+ earphone + MP3 +Idle
Mode 4:	Adapter + USB cable+ earphone +Idle
Mode 5:	Adapter + USB cable +Idle
Mode 6:	USB Copy(EUT with PC) + USB cable +earphone +Idle
Mode 7:	Camera On +earphone + GPS Rx +Idle
Mode 8:	Earphone+MP3+Idle
Mode 9:	Earphone +Idle

During the test, the preliminary test was performed in all modes (Camera/ FM /MP3 /GPS) with all frequency bands (GSM/ WCDMA/ LTE/ BT/ Wi-Fi), mode 6 (with Camera + FM + MP3 + GPS Rx + GSM/ WCDMA/ LTE/ BT/ Wi-Fi idle) selected as the worst condition. The test data of the worst-case condition was recorded in this report.

3 Test Case Results

3.1 Radiated Emission

Ambient condition

Temperature	Relative humidity	Pressure
24°C~26°C	45%~50%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.


During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

Test Setup

Below 1GHz

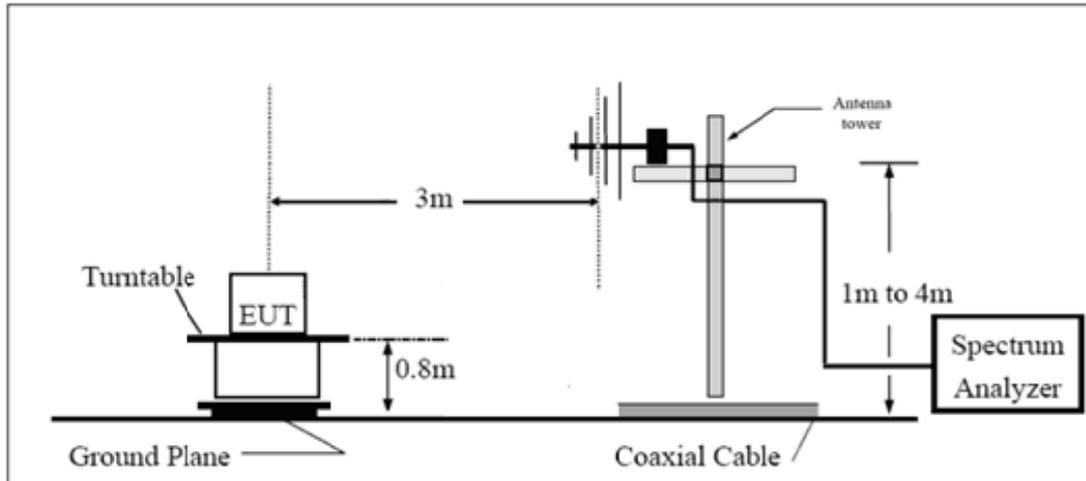

Above 1GHz

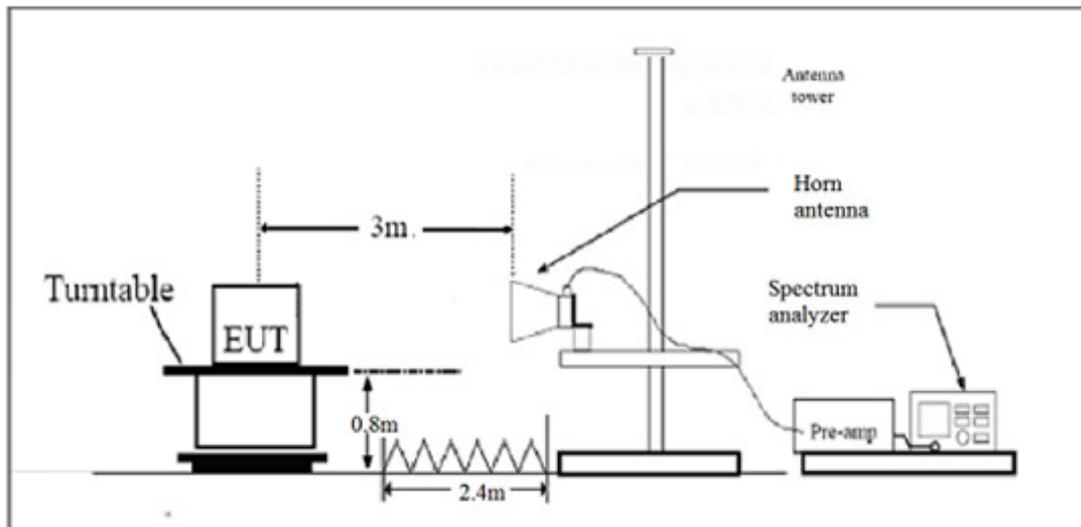

Note: Area side:2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits


Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 3.92$ dB.

Test Results

The following graphs display the maximum values of horizontal and vertical by software.
 For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

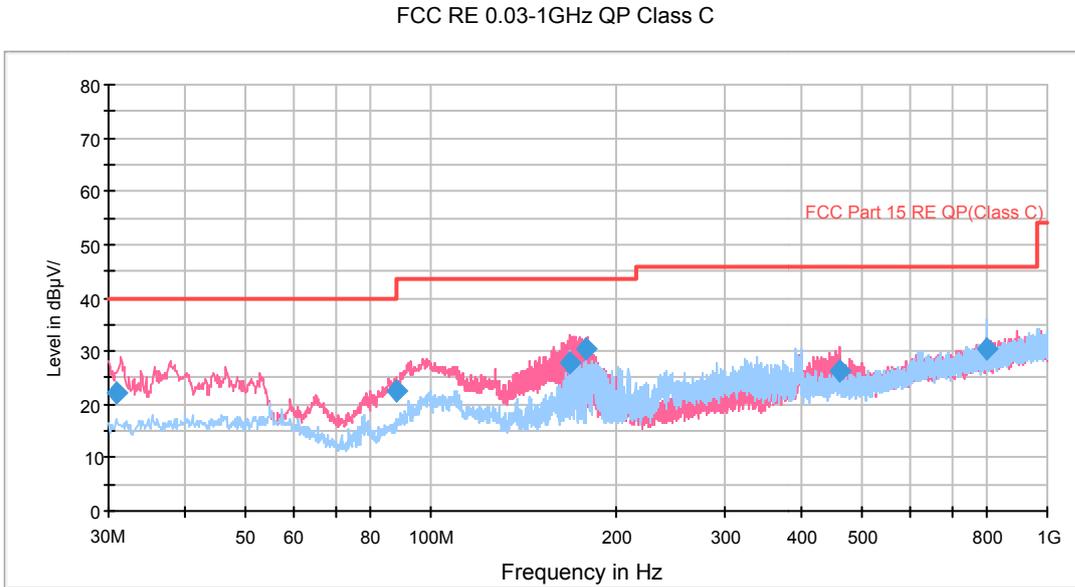


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.855000	22.2	34.3	100.0	V	79.0	-12.1	17.8	40.0
87.675000	22.6	33.8	125.0	V	292.0	-11.2	17.4	40.0
167.822500	27.6	37.9	100.0	V	289.0	-10.3	15.9	43.5
179.138750	30.3	41.3	100.0	V	303.0	-11.0	13.2	43.5
459.631250	26.3	45.9	100.0	V	234.0	-19.6	19.7	46.0
799.775000	30.3	55.6	100.0	H	231.0	-25.3	15.7	46.0

- Remark:**
1. Quasi-Peak = Reading value + Correction factor
 2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)
 3. Margin = Limit – Quasi-Peak

RE 1G-6GHz PK+AV

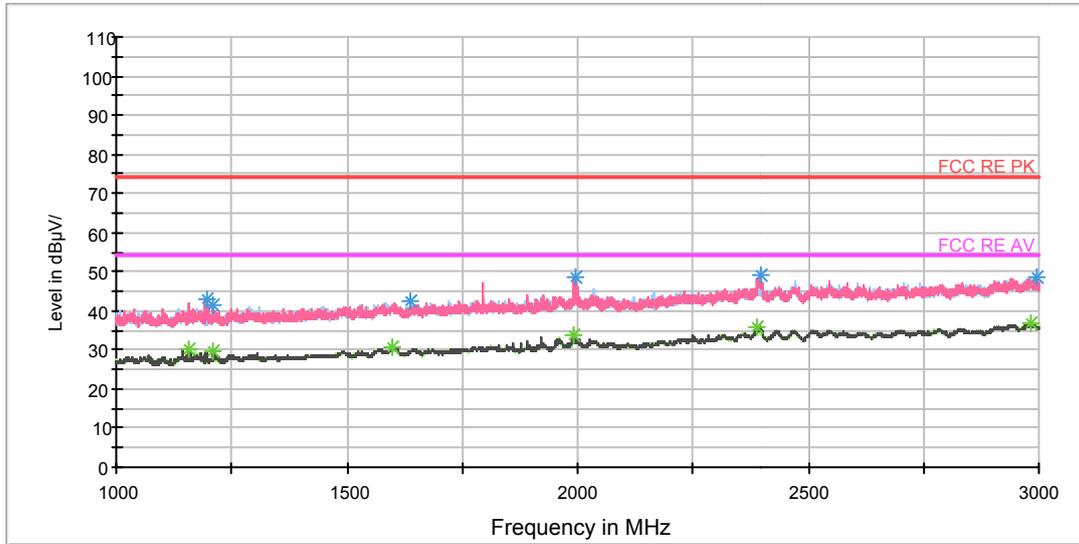


Radiated Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.000000	43.0	50.3	100.0	V	0.0	-7.3	31.0	74
1211.500000	41.6	49.1	100.0	V	302.0	-7.5	32.4	74
1637.000000	42.3	46.3	100.0	V	0.0	-4.0	31.7	74
1994.500000	48.7	51.1	100.0	V	25.0	-2.4	25.3	74
2395.750000	49.3	49.3	100.0	V	272.0	0.0	24.7	74
2994.250000	48.5	46.4	100.0	V	204.0	2.1	25.5	74

Frequency (MHz)	Average (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.000000	27.1	34.4	100.0	V	0.0	-7.3	26.9	54
1211.500000	29.7	37.2	100.0	V	302.0	-7.5	24.3	54
1637.000000	29.3	33.3	100.0	V	0.0	-4.0	24.7	54
1994.500000	32.5	34.9	100.0	V	25.0	-2.4	21.5	54
2395.750000	35.4	35.4	100.0	V	272.0	0.0	18.6	54
2994.250000	35.9	33.8	100.0	V	204.0	2.1	18.1	54

RE 3-18GHz PK+AV

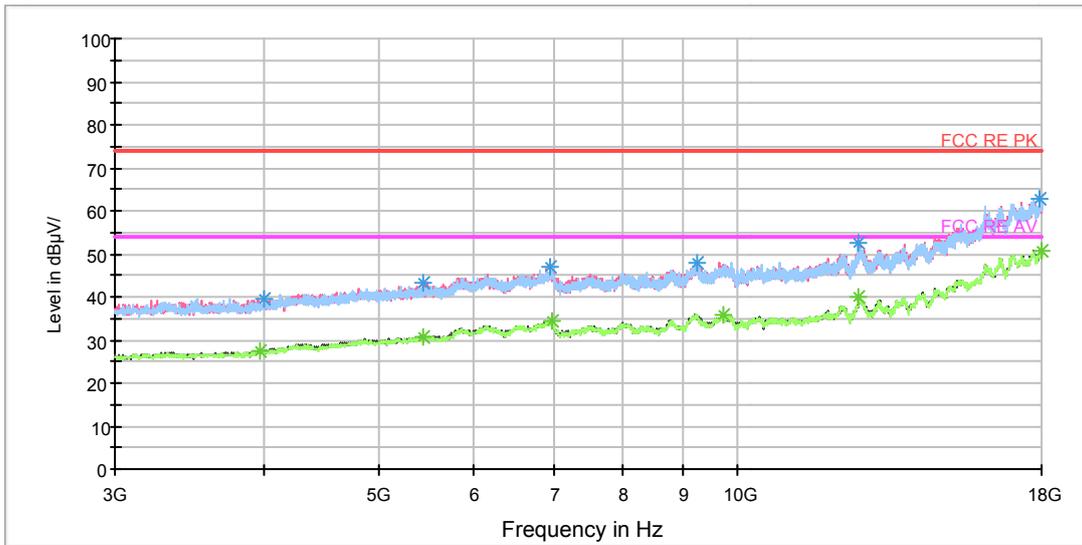

Radiated Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4001.250000	39.8	40.9	100.0	V	164.0	-1.1	34.2	74
5439.375000	43.2	40.3	100.0	V	0.0	2.9	30.8	74
6946.875000	46.8	40.6	100.0	H	60.0	6.2	27.2	74
9238.125000	48.1	38.2	100.0	V	164.0	9.9	25.9	74
12643.125000	52.3	37.9	100.0	H	0.0	14.4	21.7	74
17936.250000	62.8	37.7	100.0	V	220.0	25.1	11.2	74

Frequency (MHz)	Average (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4001.250000	27.2	28.3	100.0	V	164.0	-1.1	26.8	54
5439.375000	30.5	27.6	100.0	V	0.0	2.9	23.5	54
6946.875000	33.6	27.4	100.0	H	60.0	6.2	20.4	54
9238.125000	35.9	26.0	100.0	V	164.0	9.9	18.1	54
12643.125000	39.7	25.3	100.0	H	0.0	14.4	14.3	54
17936.250000	49.5	24.4	100.0	V	220.0	25.1	4.5	54

3.2 Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
24°C ~26°C	50%~55%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

Test Setup

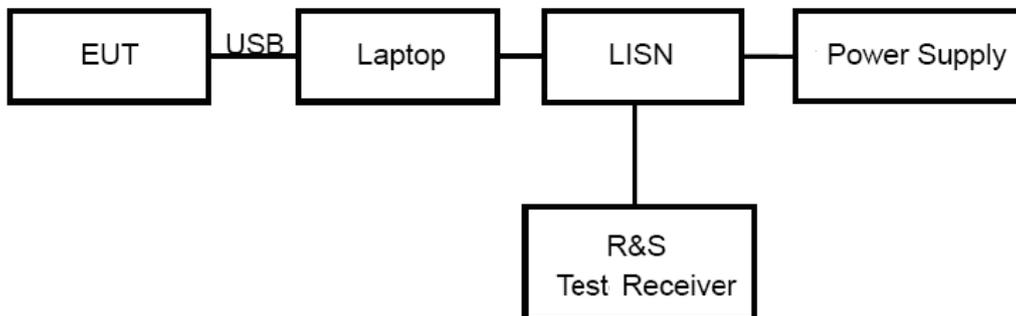

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50


*: Decreases with the logarithm of the frequency.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 2.69$ dB.

Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

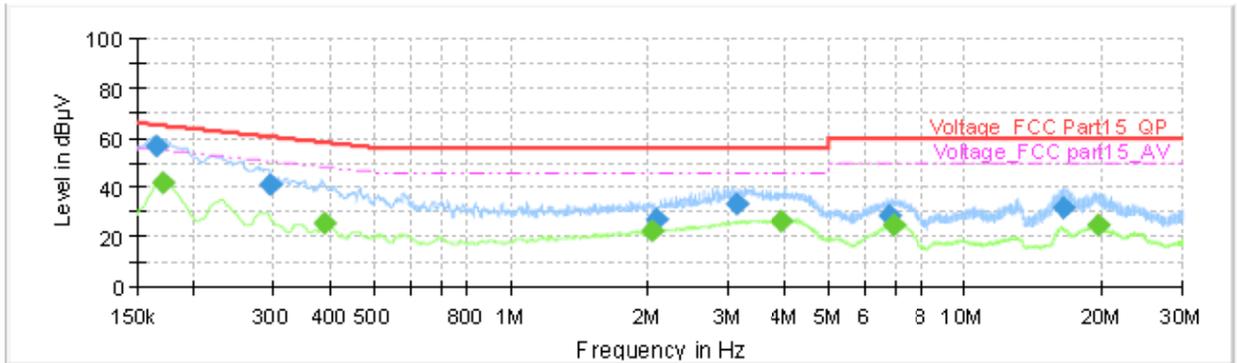


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.165750	56.83	---	65.17	8.34	1000.0	9.000	L1	ON	19.1
0.170250	---	41.89	54.95	13.06	1000.0	9.000	L1	ON	19.1
0.294000	41.43	---	60.41	18.98	1000.0	9.000	L1	ON	19.2
0.386250	---	25.57	48.14	22.57	1000.0	9.000	L1	ON	19.2
2.042250	---	22.26	46.00	23.74	1000.0	9.000	L1	ON	19.1
2.089500	27.50	---	56.00	28.50	1000.0	9.000	L1	ON	19.1
3.113250	33.51	---	56.00	22.49	1000.0	9.000	L1	ON	19.1
3.950250	---	26.69	46.00	19.31	1000.0	9.000	L1	ON	19.0
6.807750	28.64	---	60.00	31.36	1000.0	9.000	L1	ON	19.1
6.976500	---	24.55	50.00	25.45	1000.0	9.000	L1	ON	19.2
16.482750	31.85	---	60.00	28.15	1000.0	9.000	L1	ON	19.5
19.572000	---	24.93	50.00	25.07	1000.0	9.000	L1	ON	19.7

L line

Conducted Emission from 150 KHz to 30 MHz

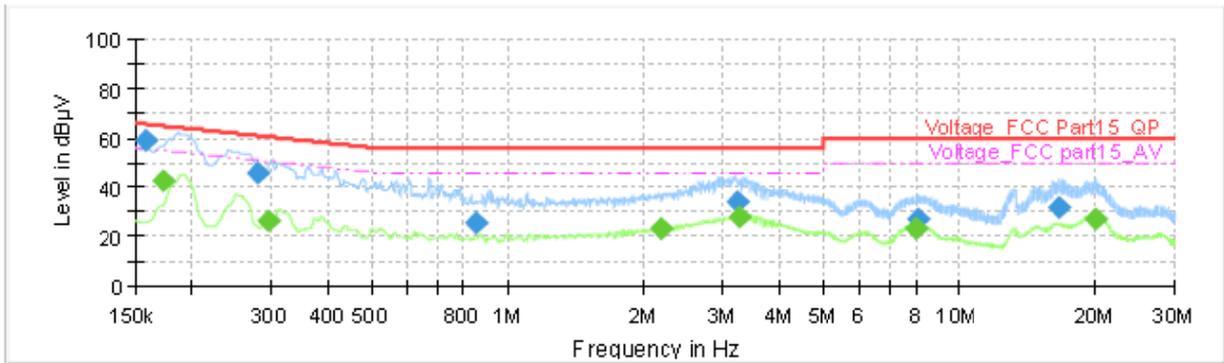

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.159000	58.76	---	65.52	6.76	1000.0	9.000	N	ON	19.1
0.172500	---	42.89	54.84	11.95	1000.0	9.000	N	ON	19.2
0.280500	45.44	---	60.80	15.36	1000.0	9.000	N	ON	19.2
0.296250	---	26.11	50.35	24.23	1000.0	9.000	N	ON	19.2
0.849750	25.69	---	56.00	30.31	1000.0	9.000	N	ON	19.2
2.181750	---	23.37	46.00	22.63	1000.0	9.000	N	ON	19.1
3.243750	34.44	---	56.00	21.56	1000.0	9.000	N	ON	19.1
3.275250	---	27.74	46.00	18.26	1000.0	9.000	N	ON	19.1
7.980000	---	23.16	50.00	26.84	1000.0	9.000	N	ON	19.2
8.056500	27.23	---	60.00	32.77	1000.0	9.000	N	ON	19.2
16.671750	31.80	---	60.00	28.20	1000.0	9.000	N	ON	19.5
20.044500	---	26.95	50.00	23.05	1000.0	9.000	N	ON	19.5

N line
 Conducted Emission from 150 KHz to 30 MHz

4 Main Test Instrument


Name	Type	Manufacturer	Serial Number	Last Cal.	Cal. Due Date
EMI Test Receiver	ESC13	R&S	100948	2016-06-01	2017-05-31
Signal Analyzer	FSV30	R&S	100815	2016-12-16	2017-12-15
Trilog Antenna	VULB 9163	SCHWARZBECK	9163-201	2014-12-06	2017-12-05
Horn Antenna	HF907	R&S	100126	2014-12-06	2017-12-05
Horn Antenna	3160-09	ETS-Lindgren	00102643	2015-01-30	2018-01-29
EMI Test Receiver	ESCS30	R&S	100138	2016-12-16	2017-12-15
LISN	ENV216	R&S	101171	2016-12-16	2019-12-15
Bore Sight Antenna mast	2171B	ETS	00058752	NA	NA

ANNEX A: The EUT Appearance and Test Configuration

A.1 EUT Appearance




Front Side

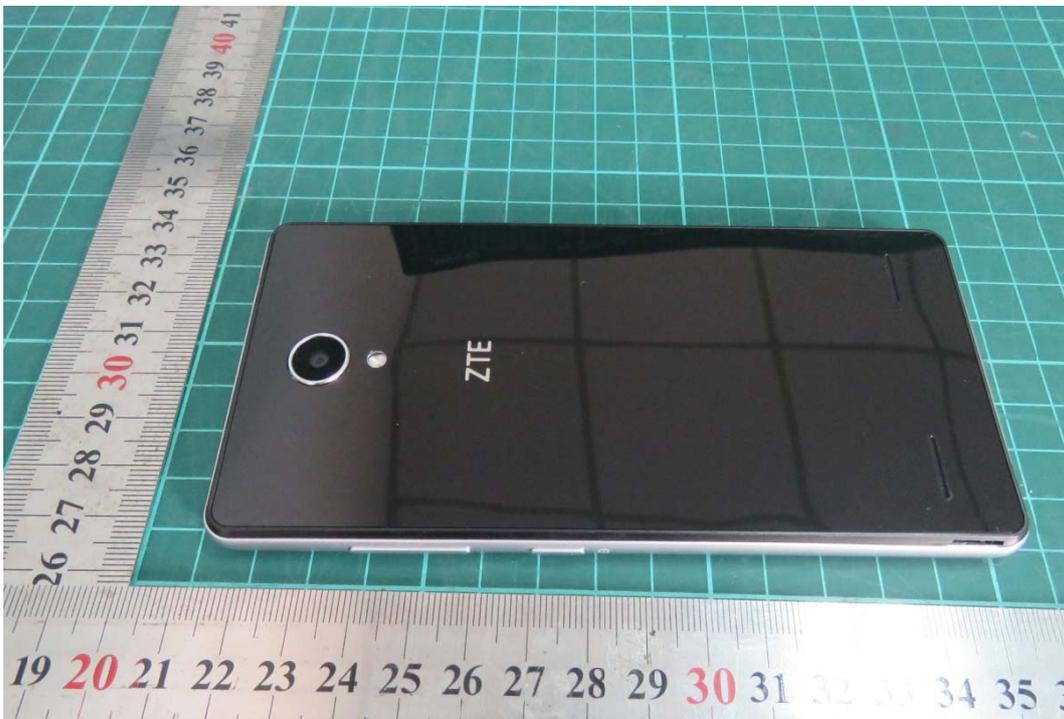

Back Side

a: EUT

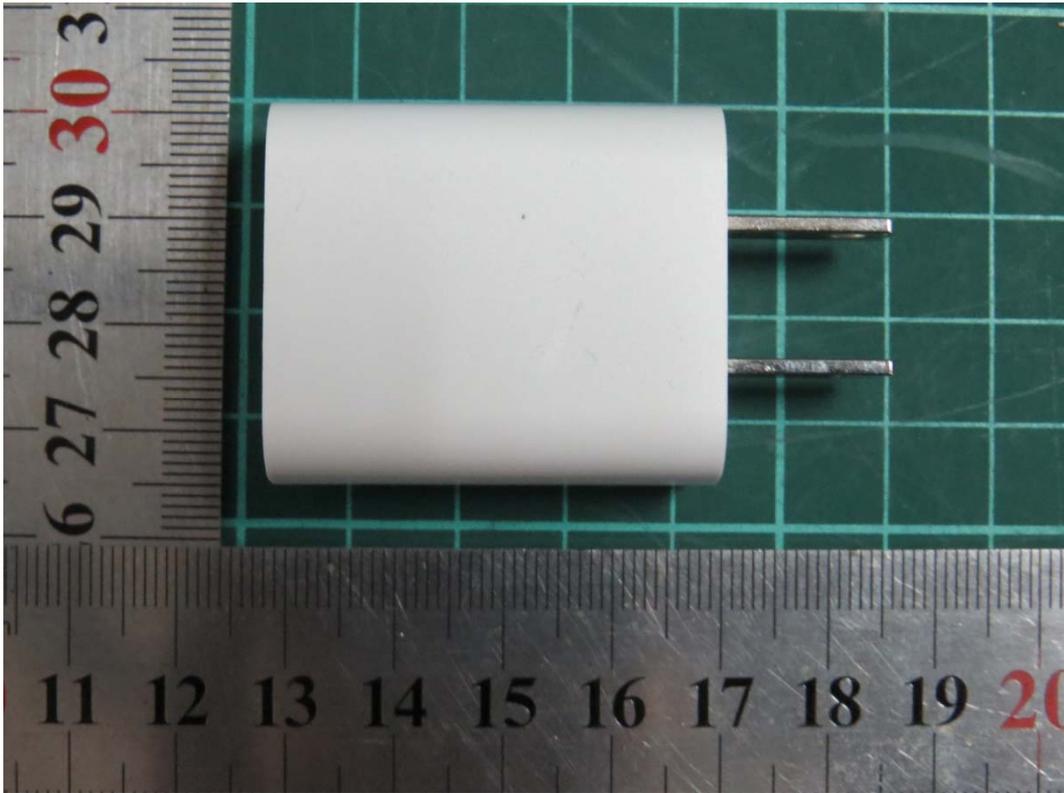

b: Adapter



c : USB Cable




d : Earphone
Picture 1 EUT

A.2 Test Setup




a: Below 1GHz

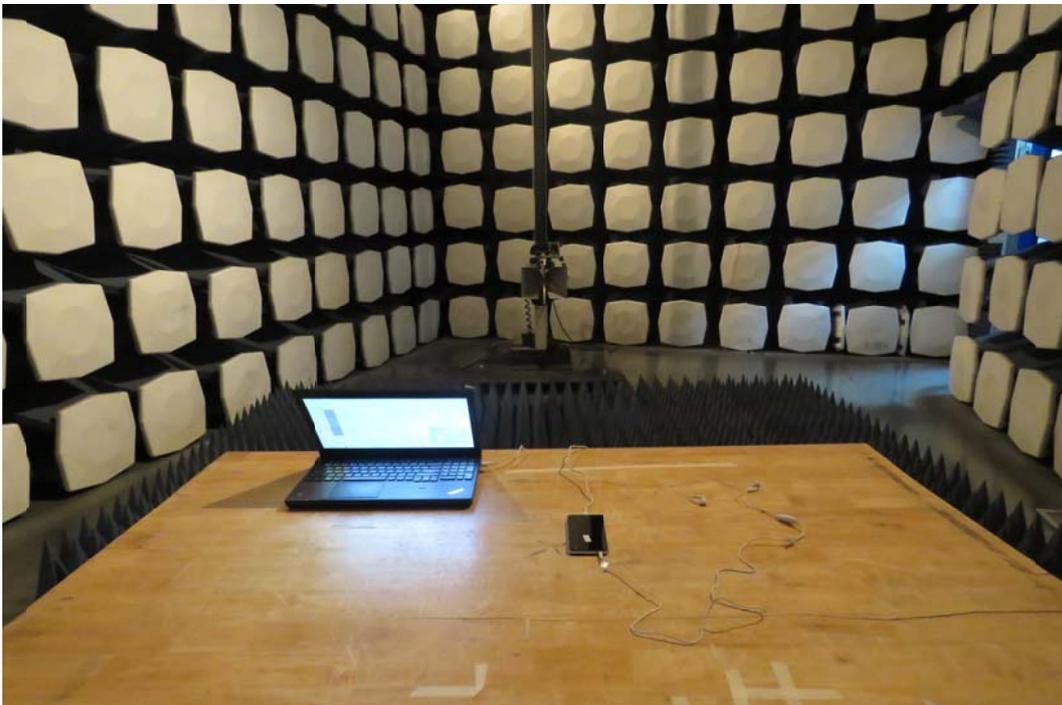

b: Above 1GHz

Picture 2 Radiated Emission Test Setup

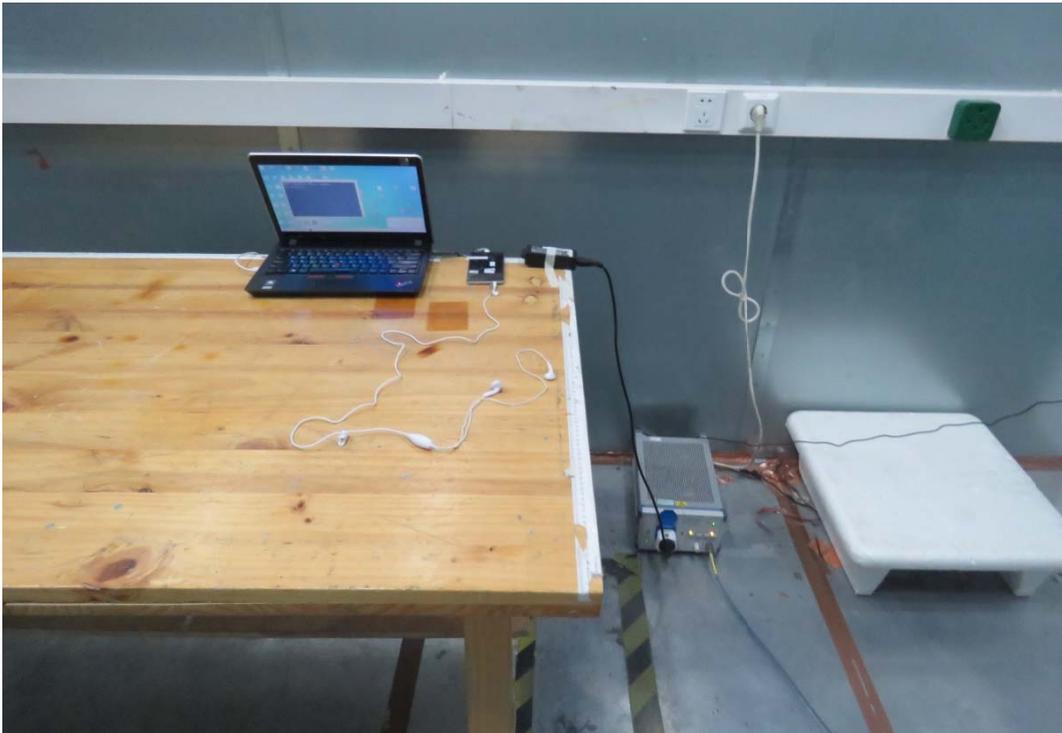

Picture 3 Conducted Emission Test Setup

A.3 Host Product

