



RF TEST REPORT

Applicant ZTE Corporation

FCC ID SRQ-ZTEBLADEV8Q

Product LTE/WCDMA/GSM(GPRS)
Multi-Mode Digital Mobile Phone

Model ZTE BLADE V0840 / ZTE BLADE V8Q /
BLADE V8Q

Report No. RXA1708-0309RF05R1

Issue Date October 17, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Test facility	4
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
3. Applied Standards	8
4. Test Configuration	9
5. Test Case Results	10
5.1. Average Power Output –Conducted.....	10
5.2. 6dB Bandwidth	14
5.3. Band Edge	18
5.4. Power Spectral Density	20
5.5. Spurious RF Conducted Emissions.....	24
5.6. Radiated Emissions in the Restricted Band	30
5.7. Radiates Emission	35
5.8. Conducted Emission	63
6. Main Test Instruments.....	65
ANNEX A: EUT Appearance and Test Setup	66
A.1 EUT Appearance	66
A.2 Test Setup	70



Summary of measurement results

Number	Summary of measurements of results	Clause in FCC rules	Verdict
1	Maximum Average conducted output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Radiated Emissions in restricted frequency bands	15.247(d),15.205,15.209	PASS
7	Radiated Emissions	15.247(d),15.205,15.209	PASS
8	Conducted Emissions	15.207	PASS
Date of Testing: August 31, 2017~September 22, 2017			



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

General information

EUT Description	
Model:	ZTE BLADE V0840 / ZTE BLADE V8Q / BLADE V8Q
IMEI:	866032030009464
Hardware Version:	MBV1.0
Software Version:	GEN_ZTE_V0840_V1.0
Power Supply:	Battery/AC adapter
Antenna Type:	Internal Antenna
Antenna Connector:	A permanently attached antenna
Antenna Gain:	-4.2 dBi
additional beamforming gain:	0 dB
Test Mode:	Bluetooth(Low Energy) 802.11b,802.11g, 802.11n(HT20);
Modulation Type:	BLE :GFSK 802.11b: DSSS; 802.11g/n(HT20): OFDM
Max. Conducted Power	Wi-Fi 2.4G :15.20dBm BLE : 0.33 dBm
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2462 MHz BLE: 2402 ~2480 MHz
EUT Accessory	
Adapter 1	Manufacturer: SHENZHEN RUIJING INDUSTRIAL CO LTD RUIJING Model: STC-A51A-Z
Adapter 2	Manufacturer: Jiangsu Chenyang Electronics Co., Ltd. Model: STC-A51A-Z
Adapter 3	Manufacturer: DONGGUAN AOHAI POWER TECHNOLOGY CO., LTD.



	Model: STC-A51A-Z
Adapter 4	Manufacturer: SHENZHEN RUIJING INDUSTRIAL CO LTD RUIJING Model: STC-A51A-A
Adapter 5	Manufacturer: Jiangsu Chenyang Electronics Co., Ltd. Model: STC-A51A-A
Battery	Manufacturer: Zhongshan tianmao battery co., ltd Model: Li3825T43P3h736037
Earphone 1	Manufacturer: GoerTek Inc Model: HA3-3
Earphone 2	Manufacturer: Shenzhen FDC Electronics Co. ,Ltd. Model: DEM-53
USB Extend Cable 1	Manufacturer: Chuan electronics co., ltd SN: 080410500049
USB Extend Cable 2	Manufacturer: KoEY Huaxing electronics co., ltd SN: 080410500049
<p>Note: The information of the EUT is declared by the manufacturer.</p> <p>2. There is more than one USB cable/one Adapter, each one should be applied throughout the compliance test respectively, and however, only the worst case (USB cable 1/ Adapter 1) will be recorded in this report.</p>	



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

- **FCC CFR47 Part 15C (2017) Radio Frequency Devices**
- **ANSI C63.10 (2013)**
- **KDB 558074 D01 DTS Meas Guidance v04**
-

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Band	Data Rate
Bluetooth(Low Energy)	1Mbps
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

Band	T _{on} (ms)	T _(on+off) (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11b	8.229	8.462	0.972	0.121
802.11g	1.360	1.560	0.872	0.596
802.11n HT20	1.270	1.470	0.864	0.635
BLE	0.390	0.624	0.625	2.041

Note: when Duty cycle>0.98, Duty cycle correction Factor not required.

5. Test Case Results

5.1. Average Power Output –Conducted


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Maximum Average Conducted Output Power Level Method in KDB 558074 D01 for this test.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.


Test Results

Single Antenna Power Index			
Packet Type	Antenna		
	CH1	CH6	CH11
802.11b	15	15	15
802.11g	12	12	12
802.11n HT20	11	11	11


Network Standards	Carrier frequency (MHz)	Average Output Power (dBm)	Limit (dBm)	Conclusion
802.11b	2412	15.201	30	PASS
	2437	14.121	30	PASS
	2462	14.461	30	PASS
802.11g	2412	11.536	30	PASS
	2437	11.016	30	PASS
	2462	11.376	30	PASS
802.11n HT20	2412	11.265	30	PASS
	2437	10.355	30	PASS
	2462	10.665	30	PASS
Bluetooth (Low Energy)	2402	-0.069	30	PASS
	2440	-0.139	30	PASS
	2480	0.331	30	PASS

Note: Output Power = Read Value + Duty cycle correction factor

802.11b, Carrier frequency (MHz): 2412

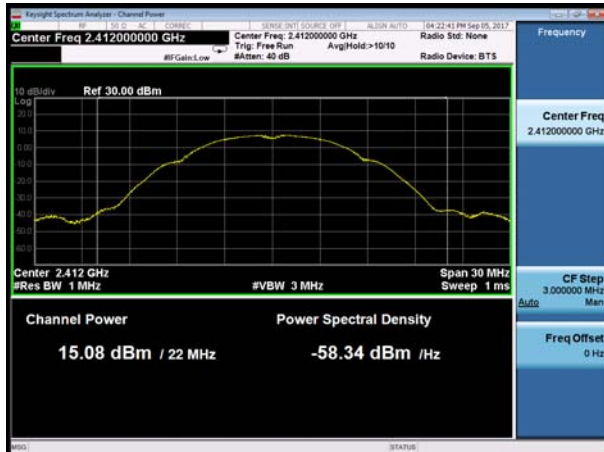


802.11g, Carrier frequency (MHz): 2412

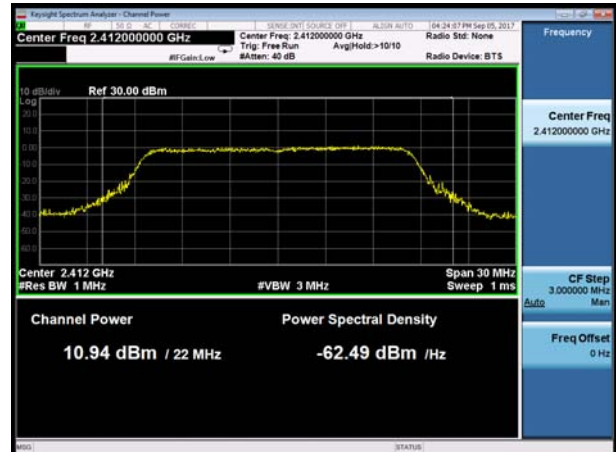

802.11b, Carrier frequency (MHz): 2437




802.11g, Carrier frequency (MHz): 2437

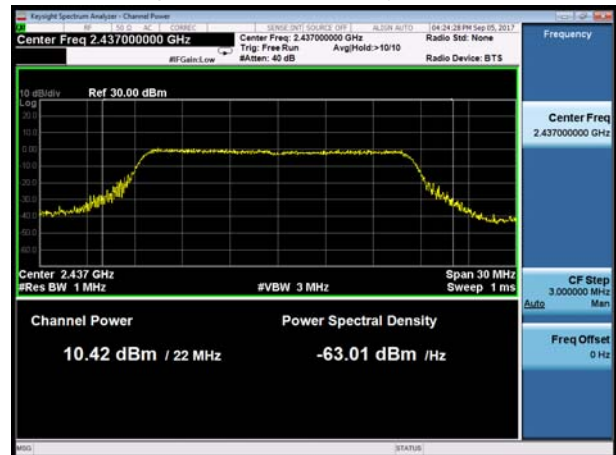

802.11b, Carrier frequency (MHz): 2462



802.11g, Carrier frequency (MHz): 2462

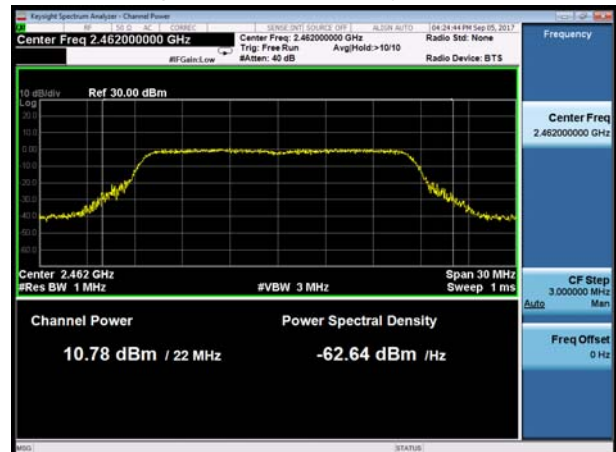




802.11n(HT20), Carrier frequency (MHz): 2412



BLE Carrier frequency (MHz): 2402




802.11n(HT20), Carrier frequency (MHz): 2437

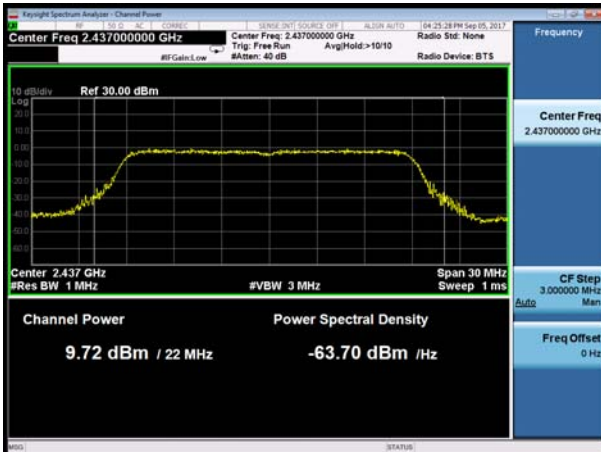

BLE Carrier frequency (MHz): 2440



802.11n(HT20), Carrier frequency (MHz):2462

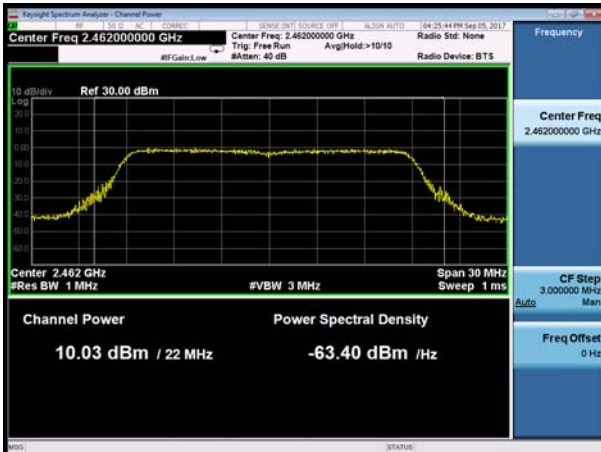

BLE Carrier frequency (MHz): 2480



5.2. 6dB Bandwidth


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.

Test Setup



Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

**Test Results:**

Network Standards	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	12.039	7.109	500	PASS
	2437	12.107	7.125	500	PASS
	2462	12.157	7.570	500	PASS
802.11g	2412	16.512	16.360	500	PASS
	2437	16.588	16.370	500	PASS
	2462	17.673	17.590	500	PASS
802.11n HT20	2412	17.673	17.590	500	PASS
	2437	17.710	17.570	500	PASS
	2462	17.681	17.600	500	PASS
Bluetooth (Low Energy)	2402	1.0855	0.6859	500	PASS
	2440	1.0847	0.6788	500	PASS
	2480	1.0857	0.6832	500	PASS




802.11b, Carrier frequency (MHz): 2412



802.11g, Carrier frequency (MHz): 2412



802.11b, Carrier frequency (MHz): 2437

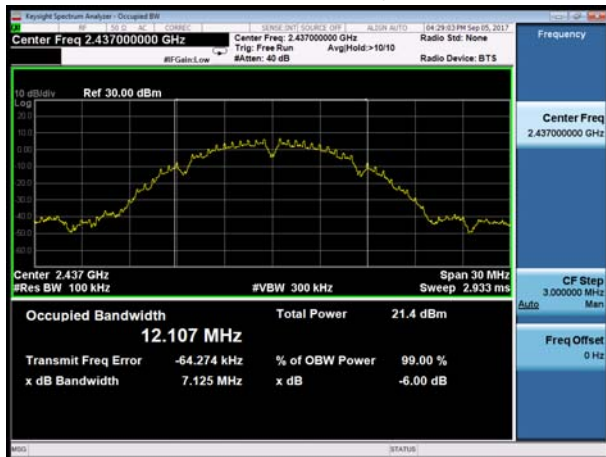

802.11g, Carrier frequency (MHz): 2437



802.11b, Carrier frequency (MHz): 2462




802.11g, Carrier frequency (MHz): 2462






802.11n(HT20), Carrier frequency (MHz): 2412

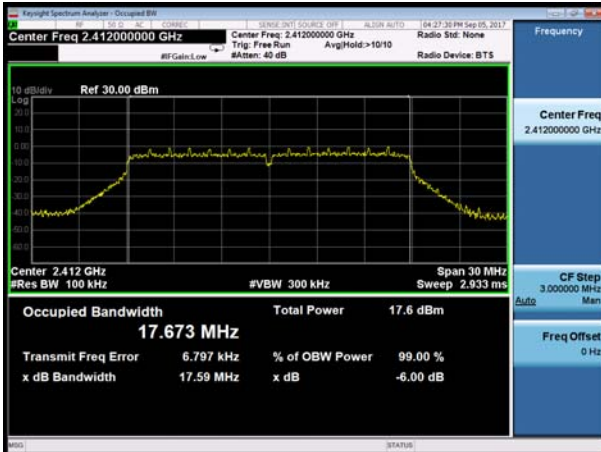

BLE Carrier frequency (MHz): 2402




802.11n(HT20), Carrier frequency (MHz): 2437

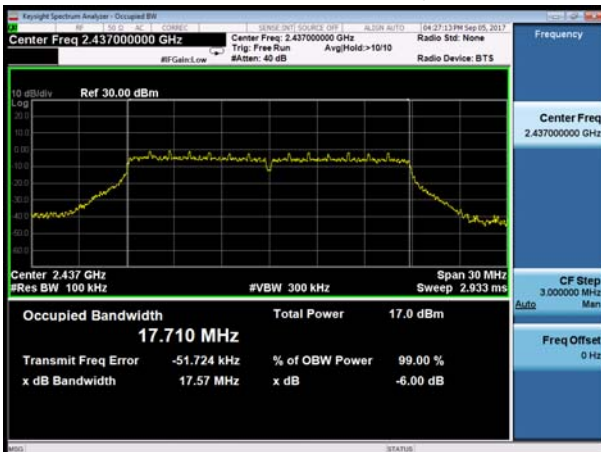

BLE Carrier frequency (MHz): 2440



802.11n(HT20), Carrier frequency (MHz):2462

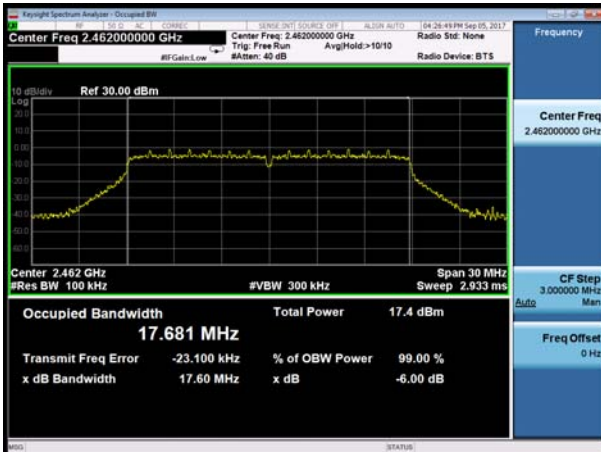

BLE Carrier frequency (MHz): 2480



5.3. Band Edge


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup

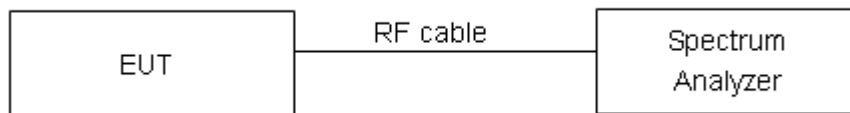

Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.”


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
2GHz-3GHz	1.407 dB



Test Results: PASS

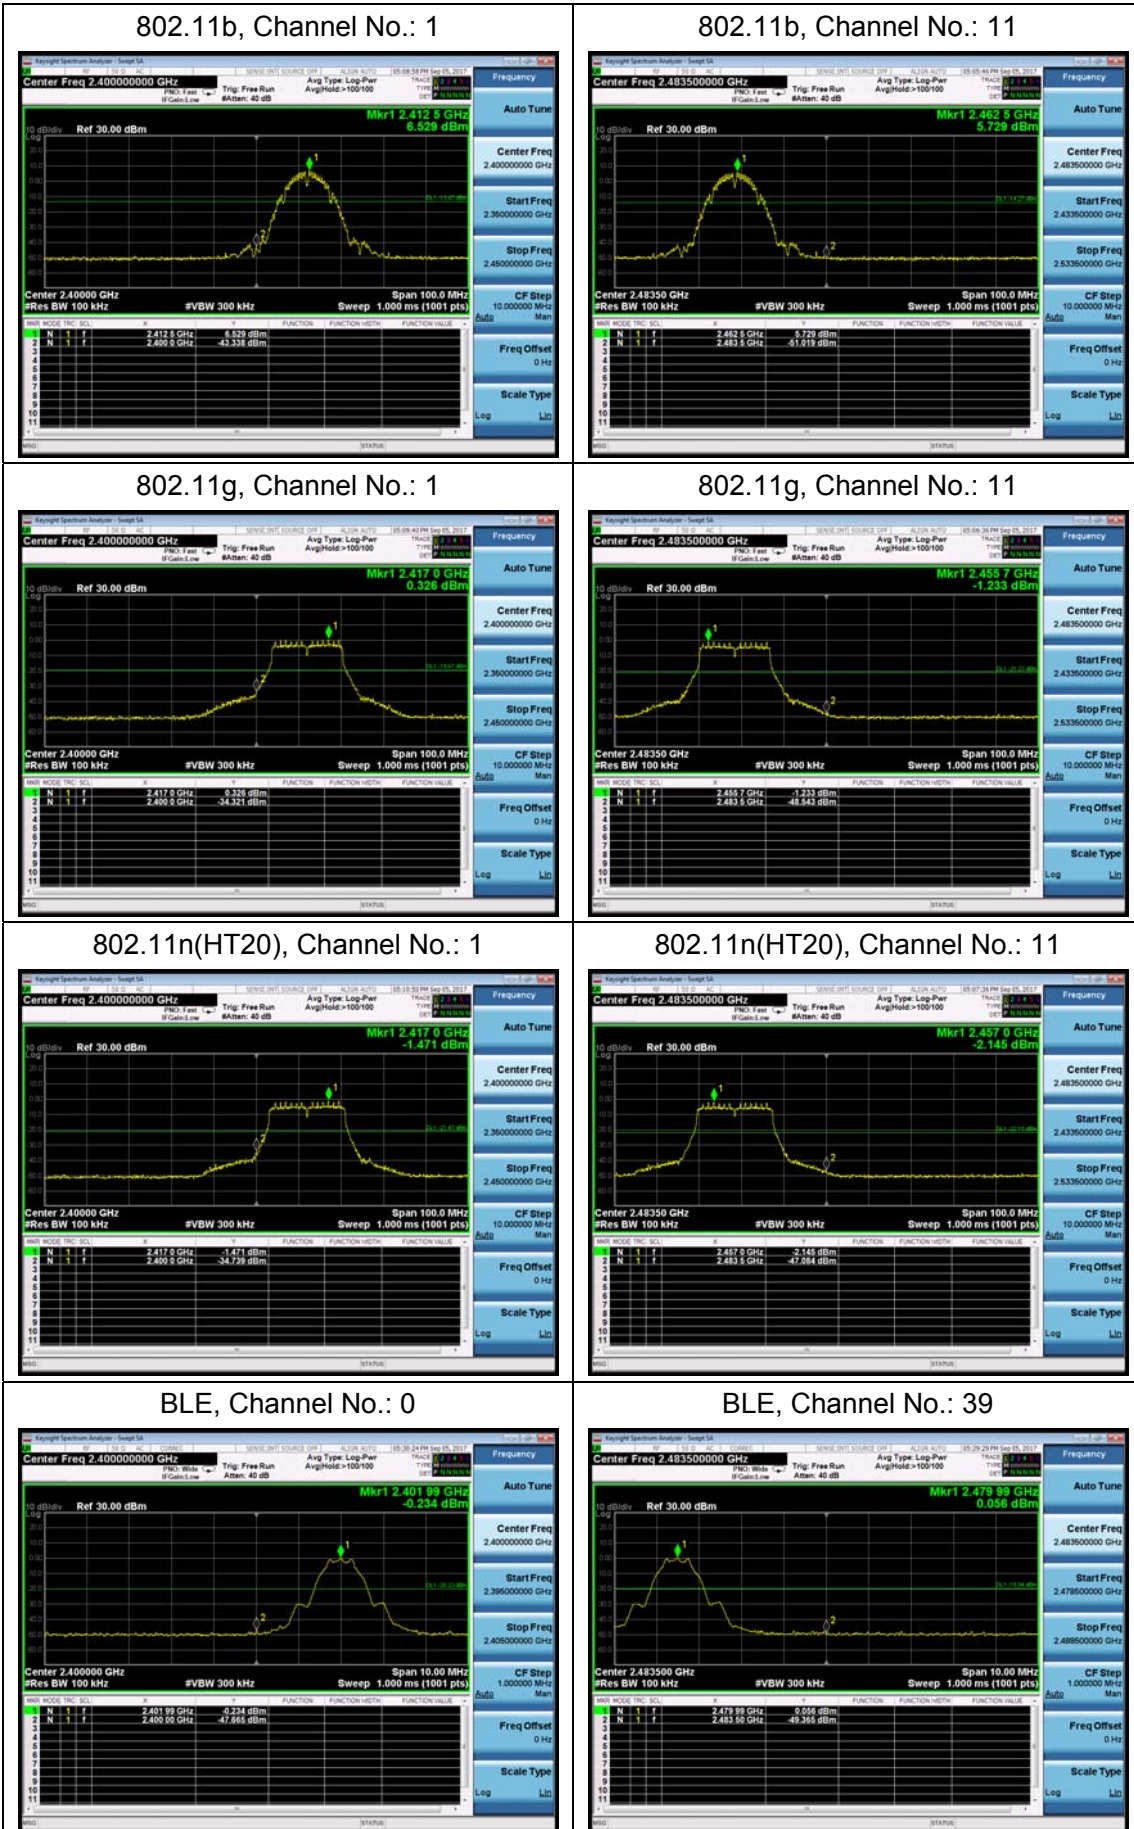

5.4. Power Spectral Density

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.

RBW is set to 3 kHz and VBW is set to 10 kHz for BLE/ Wi-Fi 2.4G on spectrum analyzer.

Set the span to 1.5 times the DTS channel bandwidth. Sweep time = auto couple. Trace mode = max hold. The Average power spectral density is recorded.

Test setup



Limits

Rule Part 15.247(e) specifies that” For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. ”

Limits	≤ 8 dBm / 3kHz
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

**Test Results:**

Network Standards	Channel Number	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-16.451	8	PASS
	6	-17.439	8	PASS
	11	-17.320	8	PASS
802.11g	1	-23.431	8	PASS
	6	-23.534	8	PASS
	11	-23.968	8	PASS
802.11n HT20	1	-24.193	8	PASS
	6	-24.456	8	PASS
	11	-25.014	8	PASS
Bluetooth (Low Energy)	0	-17.183	8	PASS
	19	-17.259	8	PASS
	39	-16.740	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor



802.11b, Channel No.: 1



802.11g, Channel No.: 1



802.11b, Channel No.: 6



802.11g, Channel No.: 6



802.11b, Channel No.: 11



802.11g, Channel No.: 11





802.11n(HT20), Channel No. 1



BLE, Channel No.: 0



802.11n(HT20), Channel No. 6




BLE, Channel No.: 19



802.11n(HT20), Channel No. 11



BLE, Channel No.: 39

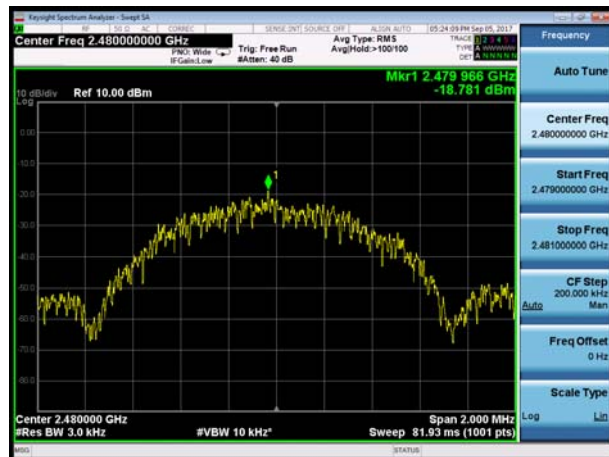

5.5. Spurious RF Conducted Emissions

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to100kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

Test setup



Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.”

Network Standards	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	9.477	-10.523
	2437	10.201	-9.799
	2462	9.862	-10.138
802.11g	2412	7.947	-12.053
	2437	6.016	-13.984
	2462	6.663	-13.337
802.11n HT20	2412	7.354	-12.646
	2437	5.760	-14.240
	2462	5.162	-14.838
Bluetooth (Low Energy)	2402	-3.210	-23.210
	2440	-2.778	-22.778
	2480	-2.360	-22.360




Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB




Test Results:

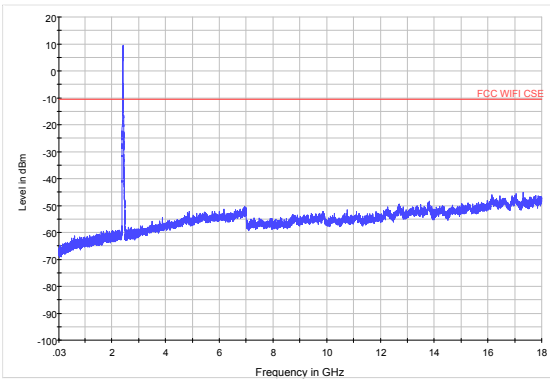


802.11b CH1 30MHz to 18GHz

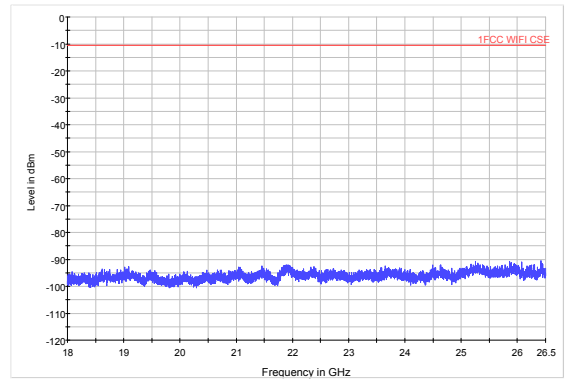


802.11b CH1 18GHz to 26.5GHz

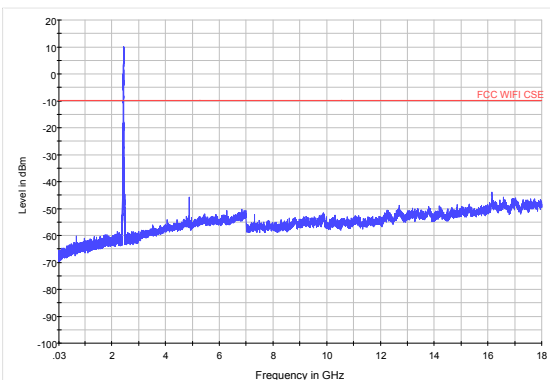


802.11b CH6 30MHz to 18GHz

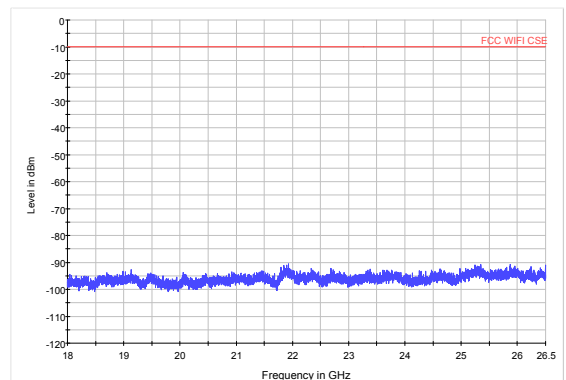


802.11b CH6 18GHz to 26.5GHz

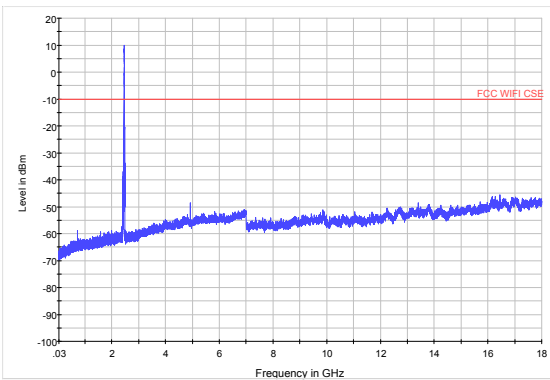


802.11b CH11 30MHz to 18GHz

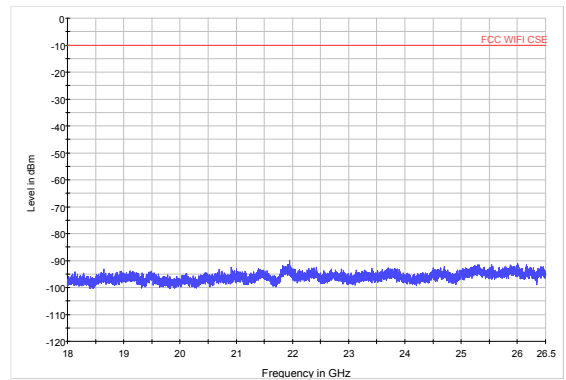


802.11b CH11 18GHz to 26.5GHz

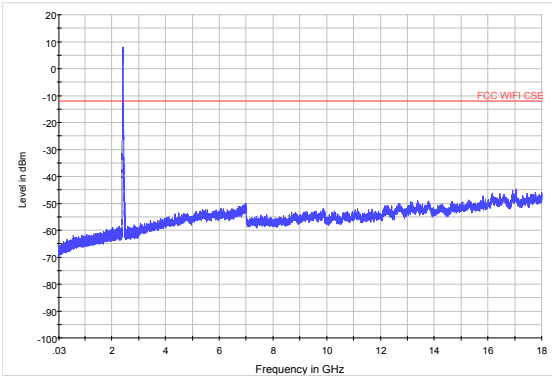


802.11g CH1 30MHz to 18GHz

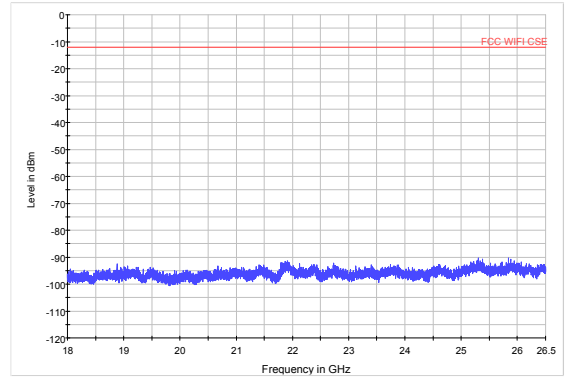


802.11g CH1 18GHz to 26.5GHz

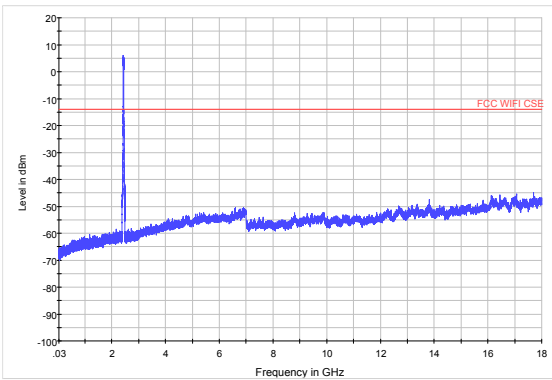


802.11g CH6 30MHz to 18GHz

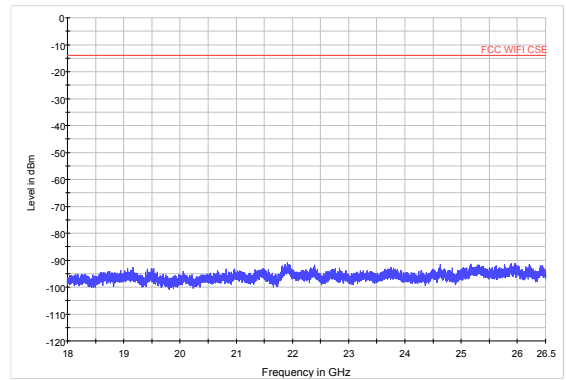


802.11g CH6 18GHz to 26.5GHz

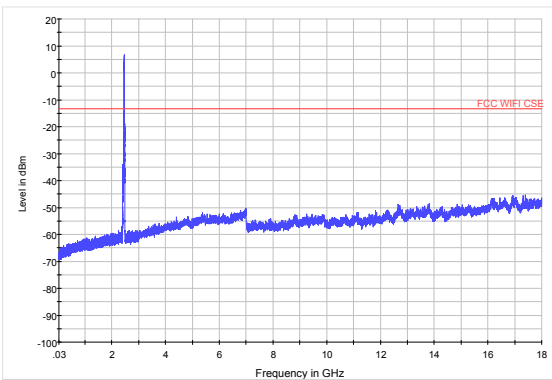


802.11g CH11 30MHz to 18GHz

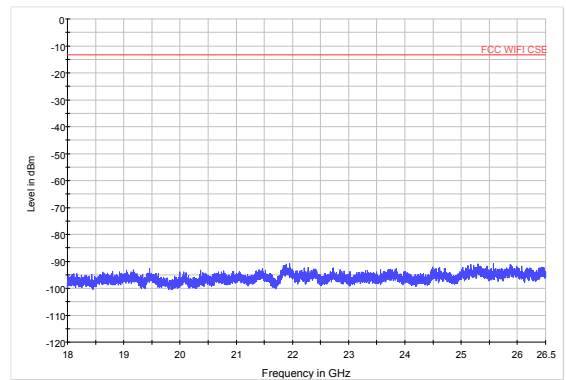


802.11g CH11 18GHz to 26.5GHz

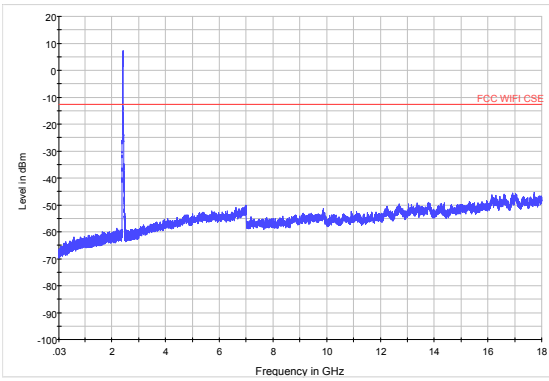


802.11n (HT20) CH1 30MHz to 18GHz

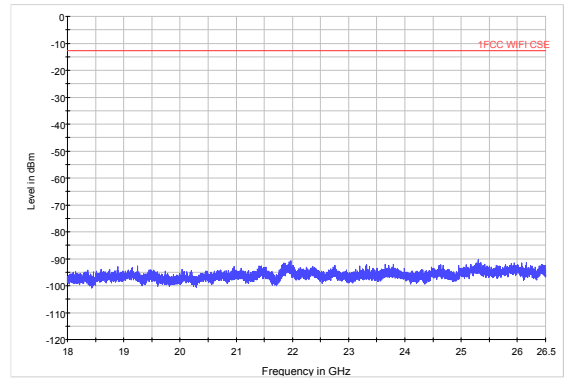


802.11n (HT20) CH1 18GHz to 26.5GHz

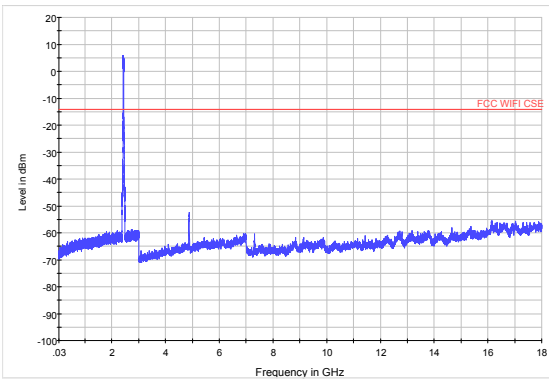


802.11n (HT20) CH6 30MHz to 18GHz

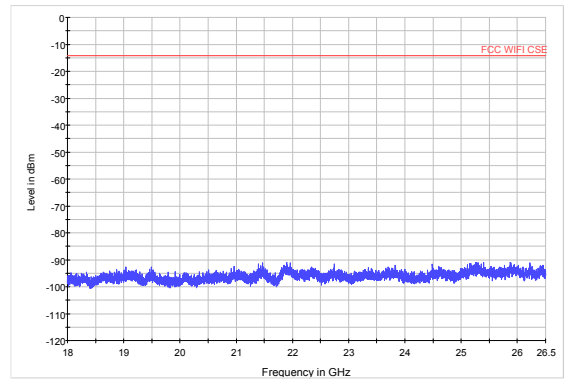


802.11n (HT20) CH6 18GHz to 26.5GHz

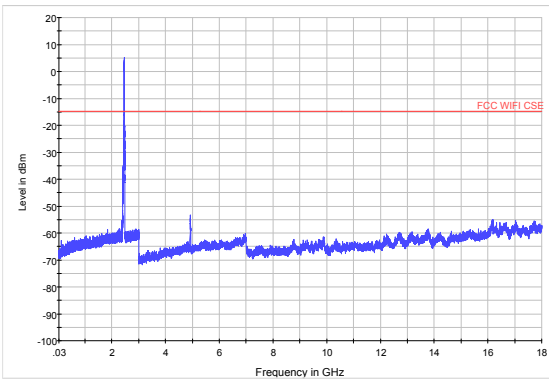


802.11n (HT20) CH11 30MHz to 18GHz

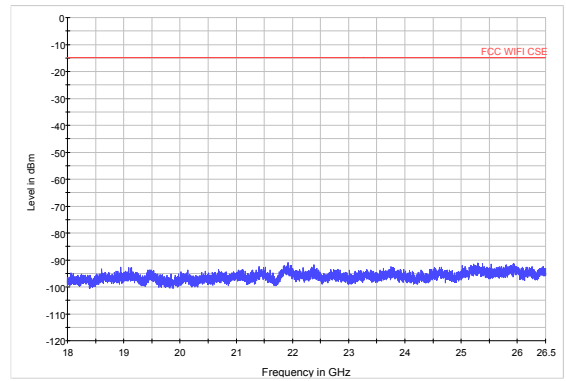


802.11n (HT20) CH11 18GHz to 26.5GHz

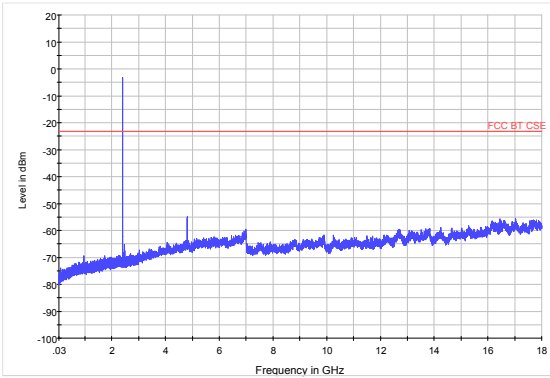


BLE CH0 30MHz to 18GHz

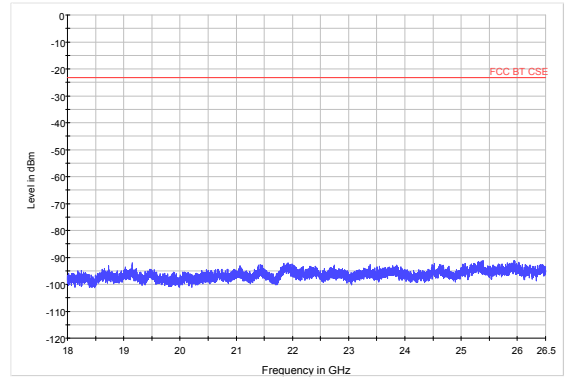


BLE CH0 18GHz to 26.5GHz

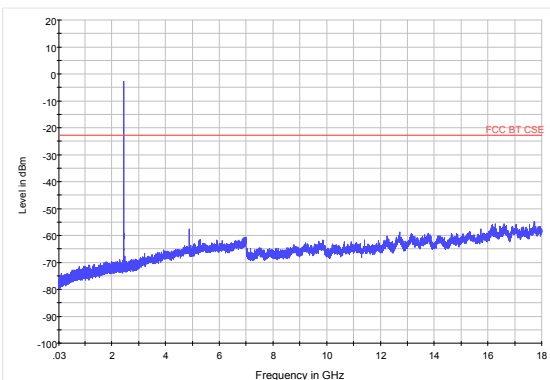


BLE CH19 3GHz to 18GHz

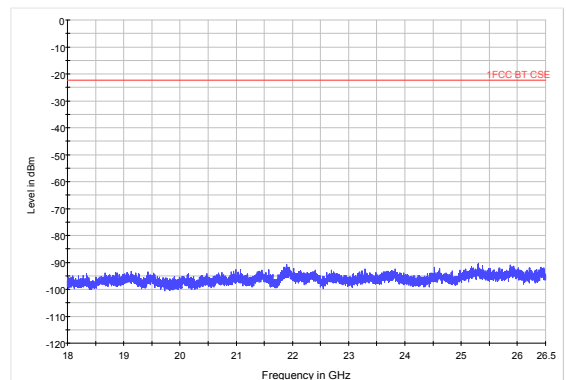

BLE CH39 18GHz to 26.5GHz

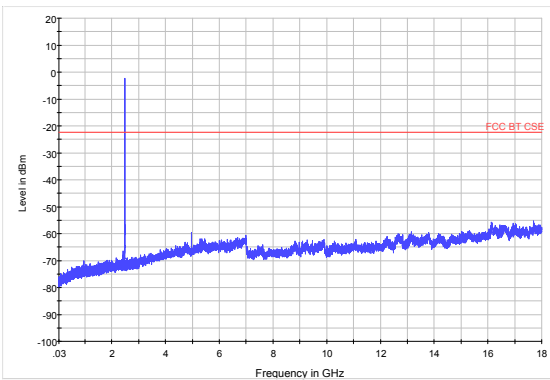

BLE CH39 3GHz to 18GHz

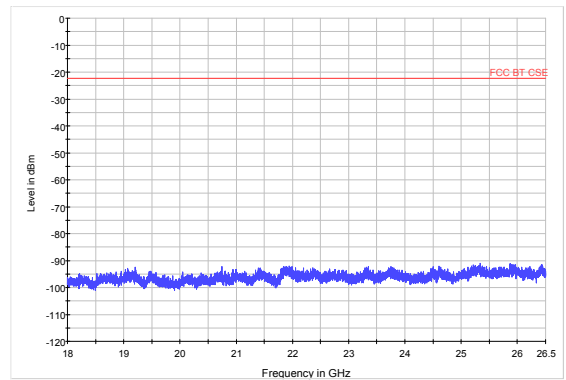

BLE CH39 18GHz to 26.5GHz

5.6. Radiated Emissions in the Restricted Band

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. RBW is set to 100kHz. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

Set the spectrum analyzer in the following:


- (a) PEAK: RBW=1MHz /VBW=3MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz /VBW=3MHz / Sweep=AUTO

This setting method can refer to **KDB 558074**.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Y axis) and the antenna is vertical.

The test is in transmitting mode.

Test setup

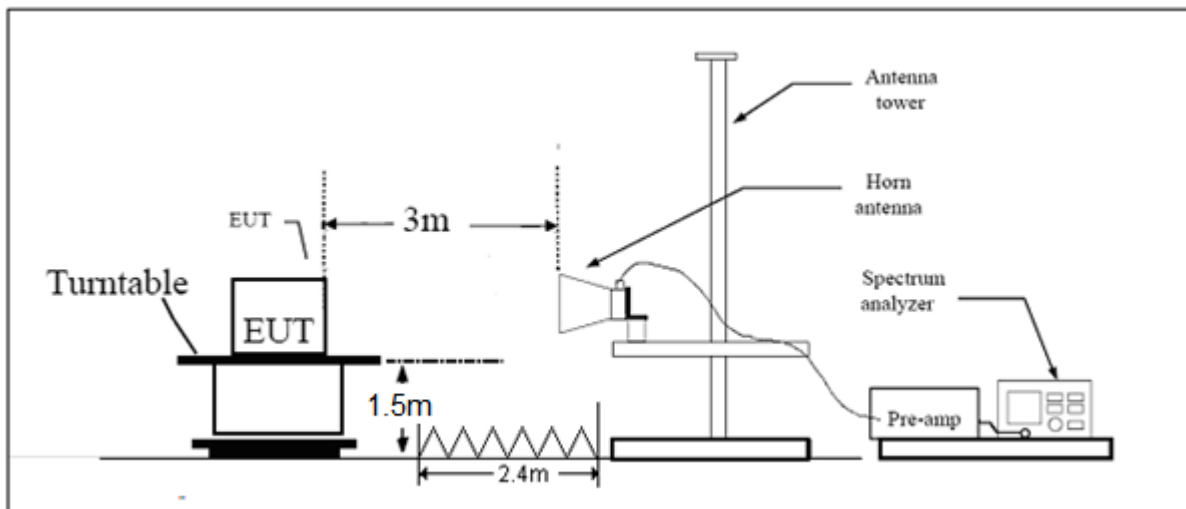

Note: Area side: 2.4mX3.6m

Limits

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.




Test Results:


PASS

The signal beyond the limit is carrier.


802.11b-Channel 1: Peak

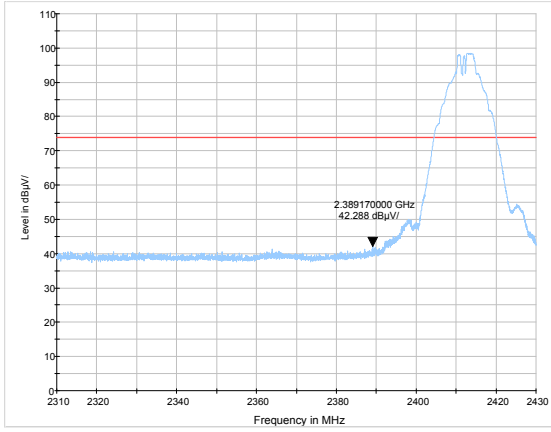


802.11b-Channel 11: Peak

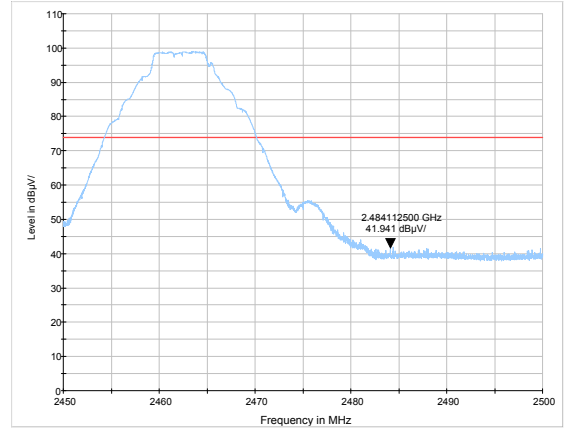


802.11b-Channel 1: Average

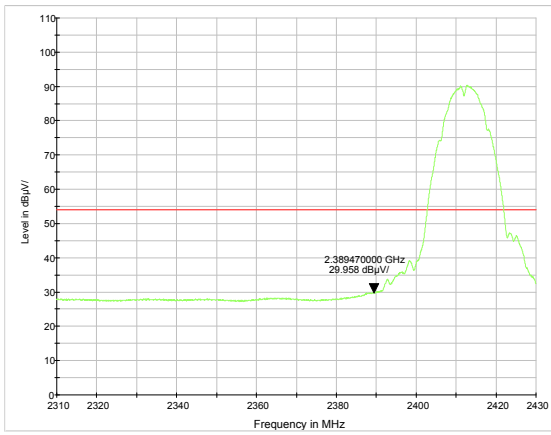


802.11b-Channel 11: Average

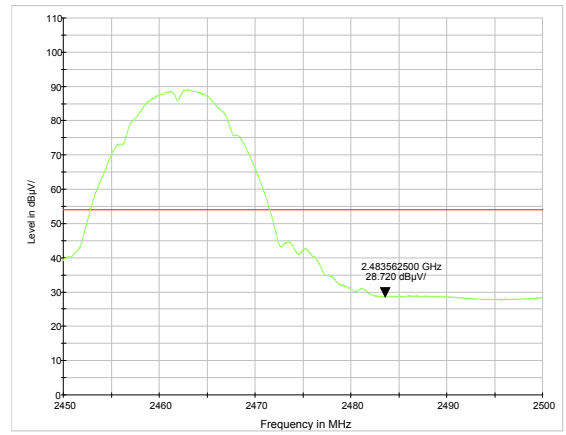


802.11g-Channel 1: Peak

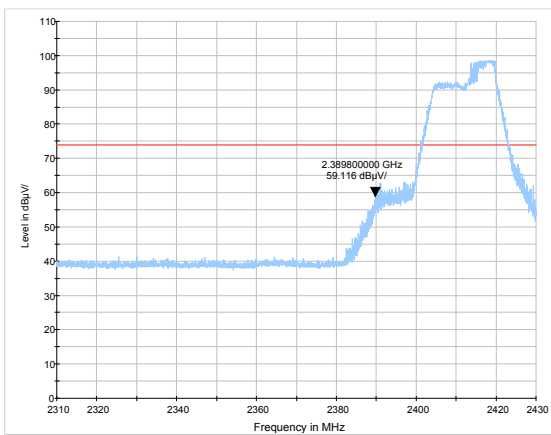


802.11g-Channel 11: Peak

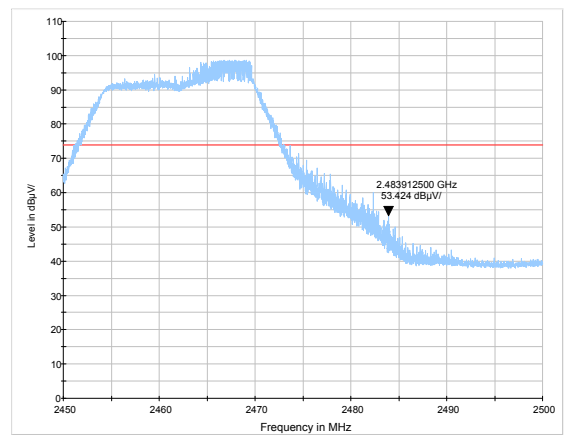


802.11g-Channel 1: Average

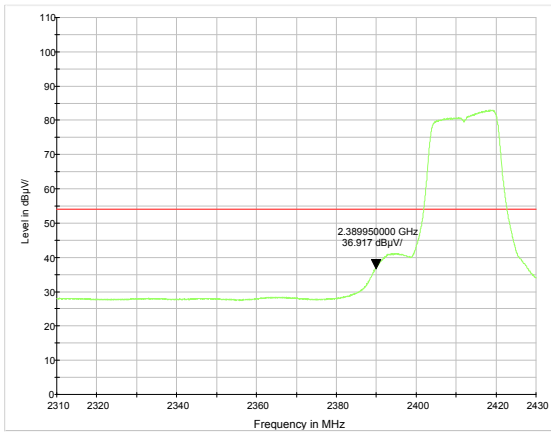


802.11g-Channel 11: Average

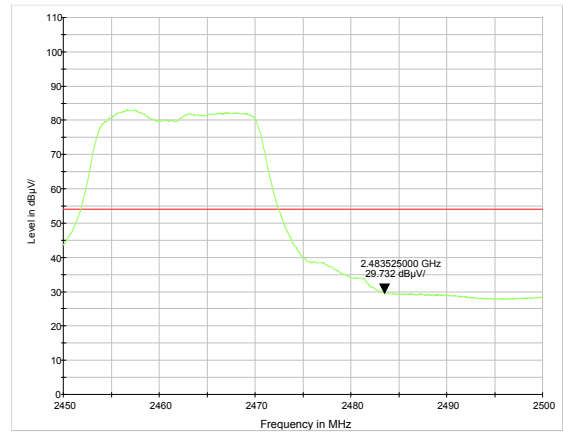


802.11n HT20 -Channel 1: Peak

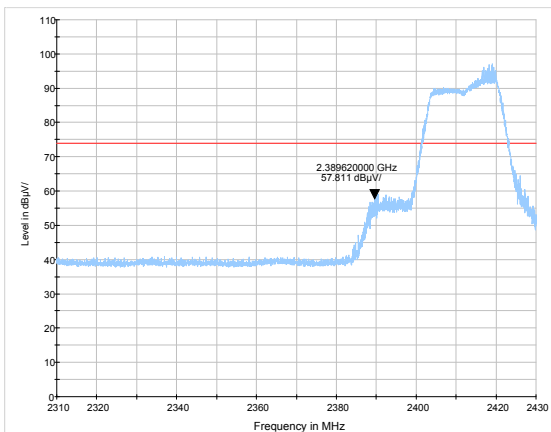


802.11n HT20-Channel 11: Peak

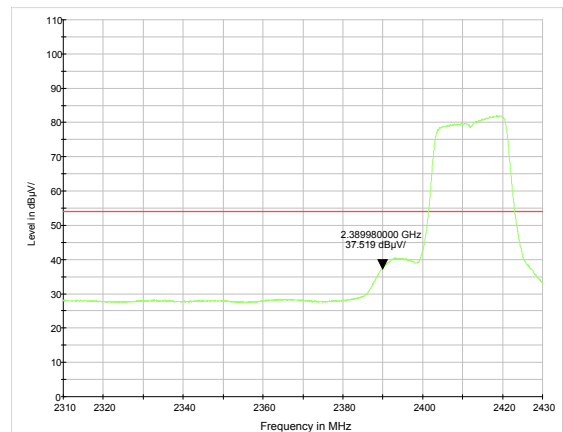

802.11n HT20-Channel 1: Average

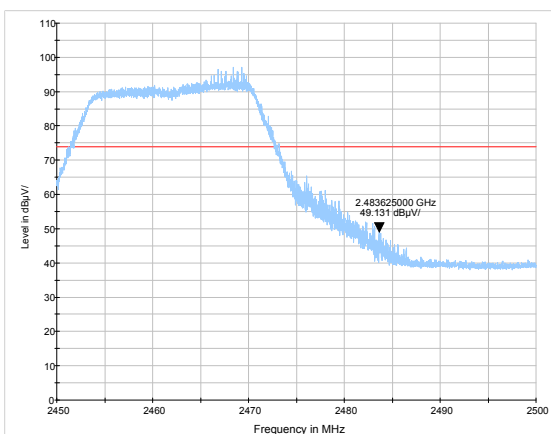


802.11n HT20-Channel 11: Average

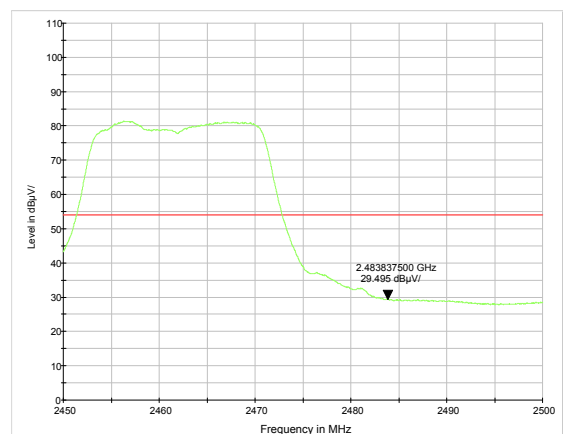





BLE -Channel 0: Peak

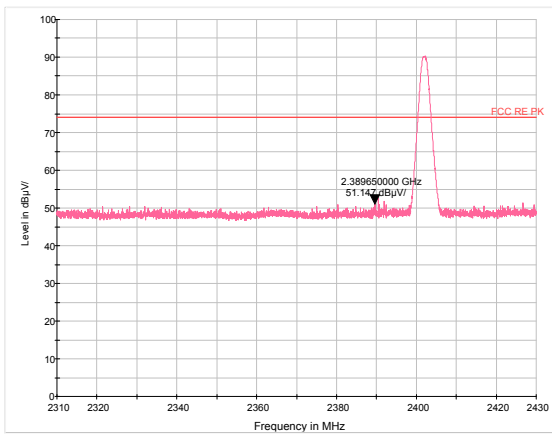


BLE -Channel 39: Peak

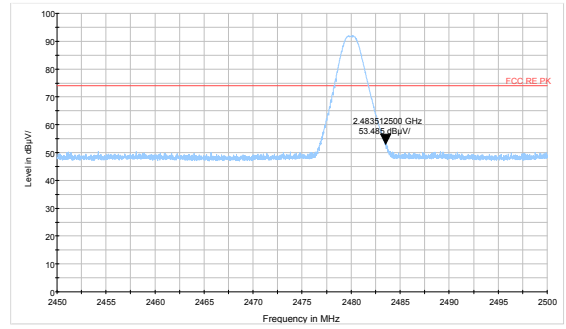

BLE -Channel 0: Average

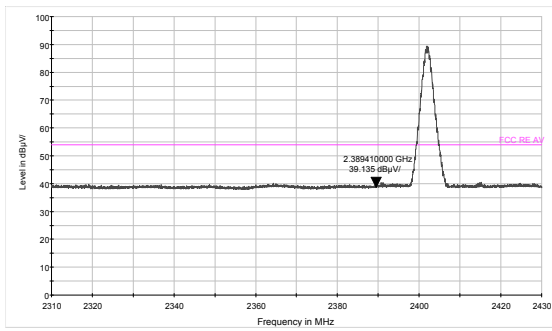

BLE -Channel 39: Average

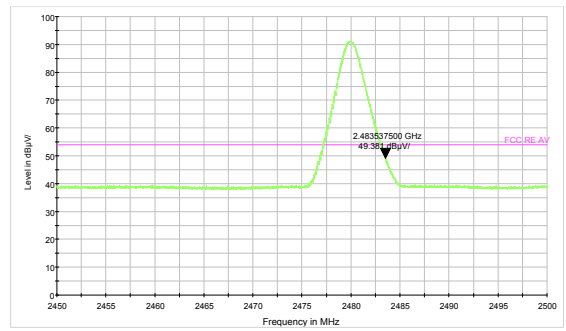

5.7. Radiates Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz (detector: Peak):

(a) PEAK: RBW=1MHz / VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.


The test is in transmitting mode.

Test setup


9KHz ~ 30MHz

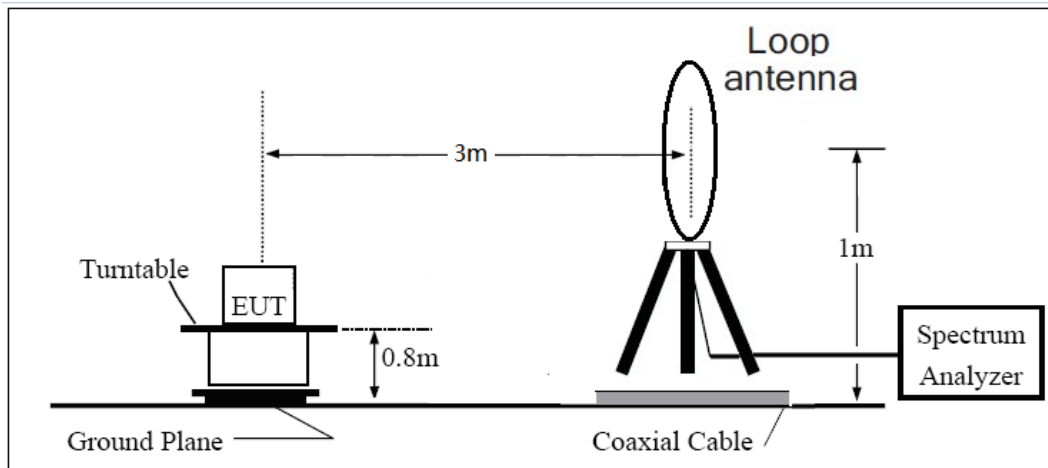

30MHz ~ 1GHz

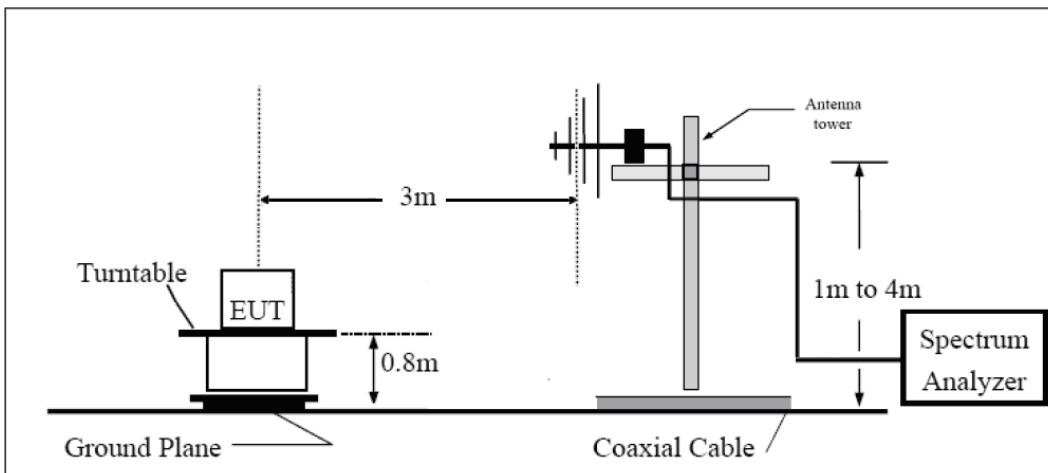

Above 1GHz

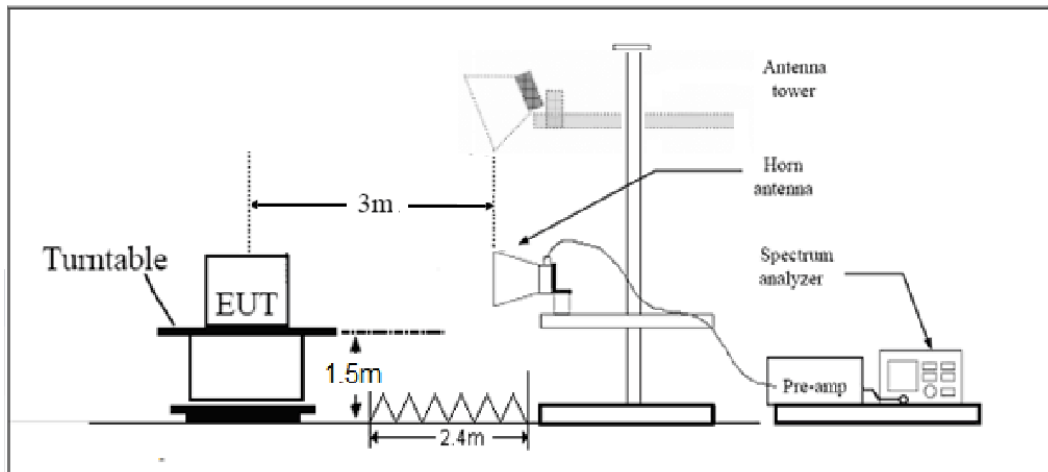

Note: Area side:2.4mX3.6m

**Limits**

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB

Test result


Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

Continuous TX mode:

FCC RE 0.03-1GHz QP Class B

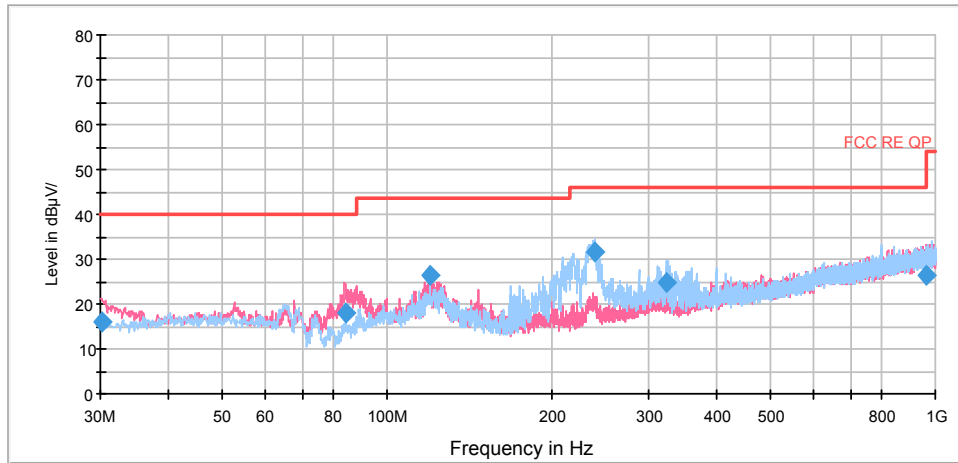

Radiates Emission from 30MHz to 1GHz



802.11b CH1


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1158.000000	37.1	100.0	H	280.0	44.8	-7.7	36.9	74
1395.000000	40.6	100.0	V	250.0	47.6	-7.0	33.4	74
1597.500000	43.2	100.0	V	182.0	49.5	-6.3	30.8	74
1897.500000	39.6	100.0	V	239.0	44.8	-5.2	34.4	74
2617.500000	40.5	100.0	H	0.0	43.2	-2.7	33.5	74
2991.000000	44.7	100.0	V	284.0	47.1	-2.4	29.3	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1158.000000	25.6	100.0	H	280.0	33.3	-7.7	28.4	54
1395.000000	26.8	100.0	V	250.0	33.8	-7.0	27.2	54
1597.500000	29.4	100.0	V	182.0	35.7	-6.3	24.6	54
1897.500000	34.7	100.0	V	239.0	39.9	-5.2	19.3	54
2617.500000	28.5	100.0	H	0.0	31.2	-2.7	25.5	54
2991.000000	28.7	100.0	V	284.0	31.1	-2.4	25.3	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-3GHz PK+AV Class B

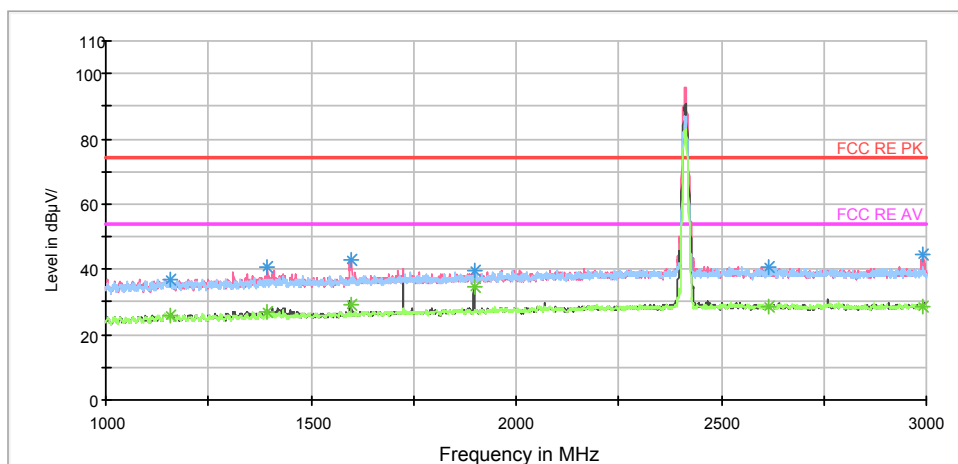


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

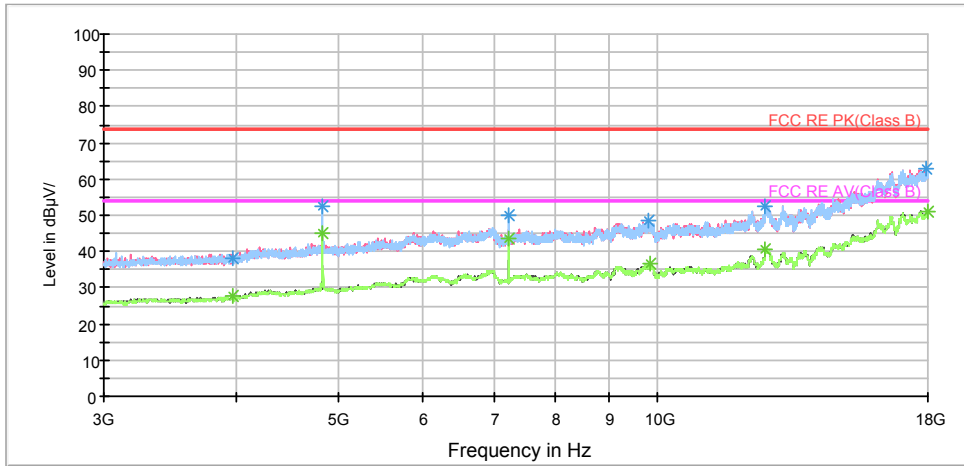

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

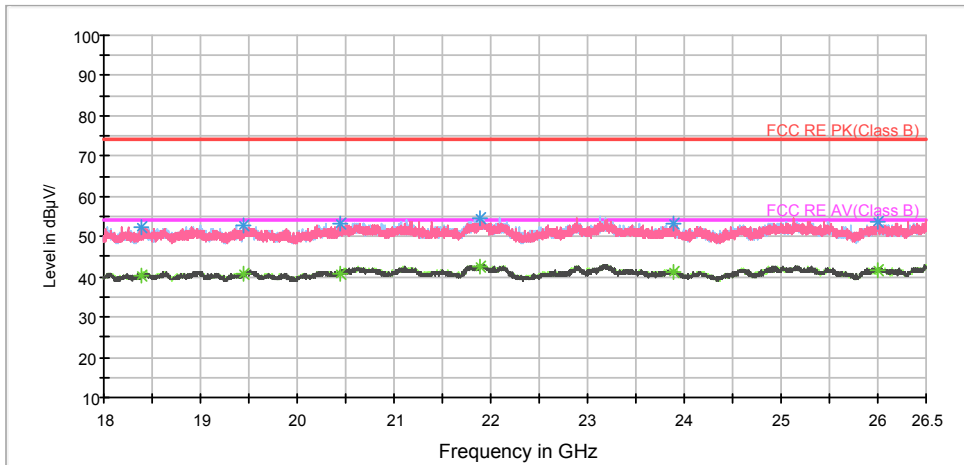

Radiates Emission from 18GHz to 26.5GHz



802.11b CH6


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1160.500000	37.4	100.0	V	276.0	45.1	-7.7	36.6	74
1401.000000	40.1	100.0	V	207.0	47.0	-6.9	33.9	74
1595.500000	40.4	100.0	V	207.0	46.7	-6.3	33.6	74
1725.000000	42.2	100.0	V	299.0	48.0	-5.8	31.8	74
2070.000000	40.1	100.0	H	96.0	44.6	-4.5	33.9	74
2996.000000	47.1	100.0	V	287.0	49.5	-2.4	26.9	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1160.500000	26.0	100.0	V	276.0	33.7	-7.7	28.0	54
1401.000000	28.6	100.0	V	207.0	35.5	-6.9	25.4	54
1595.500000	28.5	100.0	V	207.0	34.8	-6.3	25.5	54
1725.000000	35.7	100.0	V	299.0	41.5	-5.8	18.3	54
2070.000000	28.0	100.0	H	96.0	32.5	-4.5	26.0	54
2996.000000	28.6	100.0	V	287.0	31.0	-2.4	25.4	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-3GHz PK+AV Class B

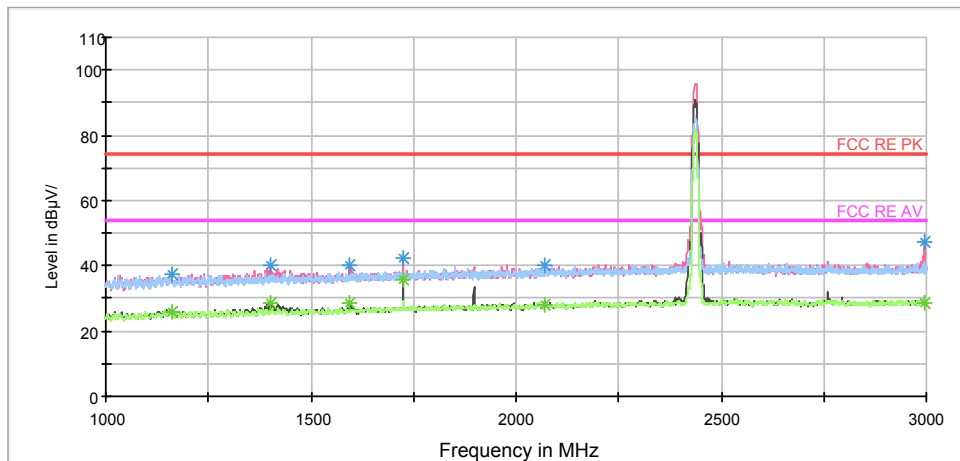


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

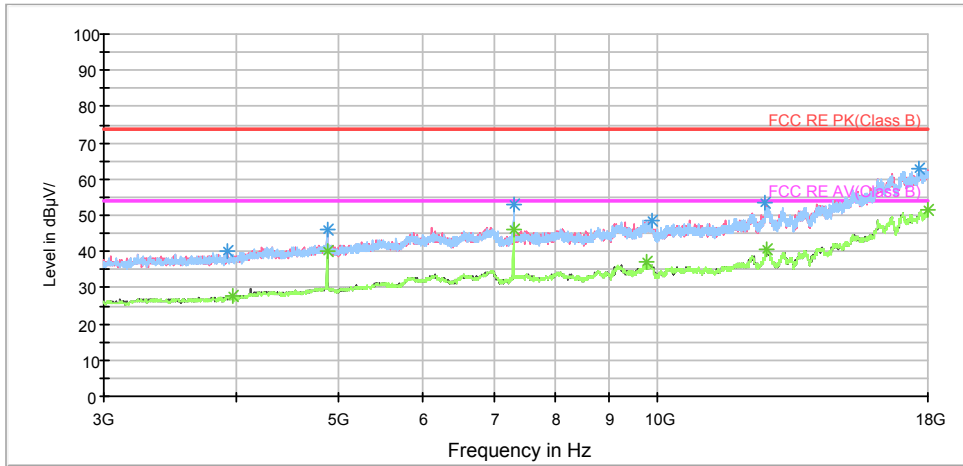

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

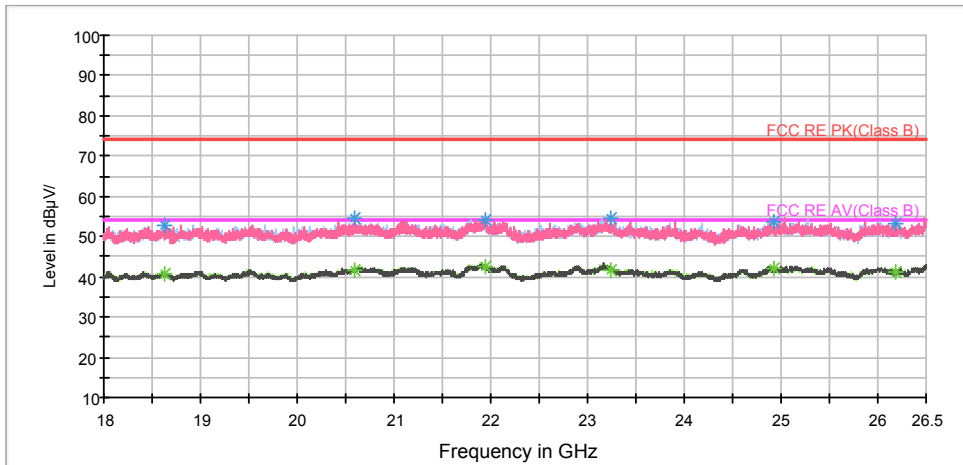

Radiates Emission from 18GHz to 26.5GHz



802.11b CH11


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1084.500000	37.4	100.0	V	131.0	45.3	-7.9	36.6	74
1398.000000	38.9	100.0	V	201.0	45.8	-6.9	35.1	74
1596.500000	41.7	100.0	V	166.0	48.0	-6.3	32.3	74
2041.000000	39.8	100.0	V	0.0	44.4	-4.6	34.2	74
2584.500000	40.9	100.0	H	129.0	43.7	-2.8	33.1	74
2990.000000	43.2	100.0	V	292.0	45.6	-2.4	30.8	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1084.500000	25.1	100.0	V	131.0	33.0	-7.9	28.9	54
1398.000000	26.5	100.0	V	201.0	33.4	-6.9	27.5	54
1596.500000	28.1	100.0	V	166.0	34.4	-6.3	25.9	54
2041.000000	28.0	100.0	V	0.0	32.6	-4.6	26.0	54
2584.500000	28.4	100.0	H	129.0	31.2	-2.8	25.6	54
2990.000000	29.2	100.0	V	292.0	31.6	-2.4	24.8	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-3GHz PK+AV Class B

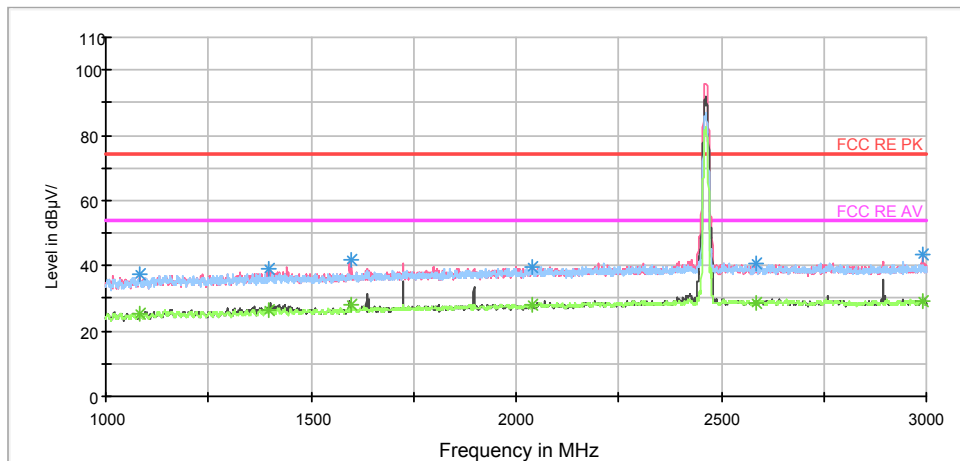


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

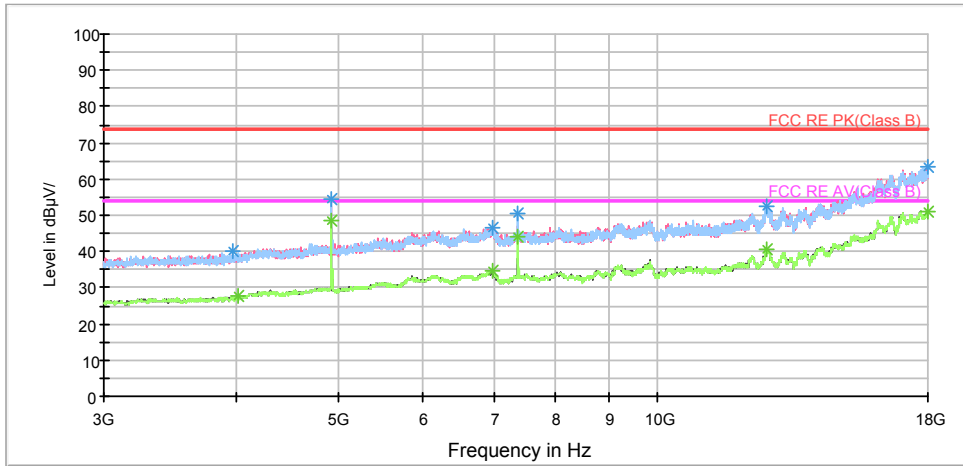

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

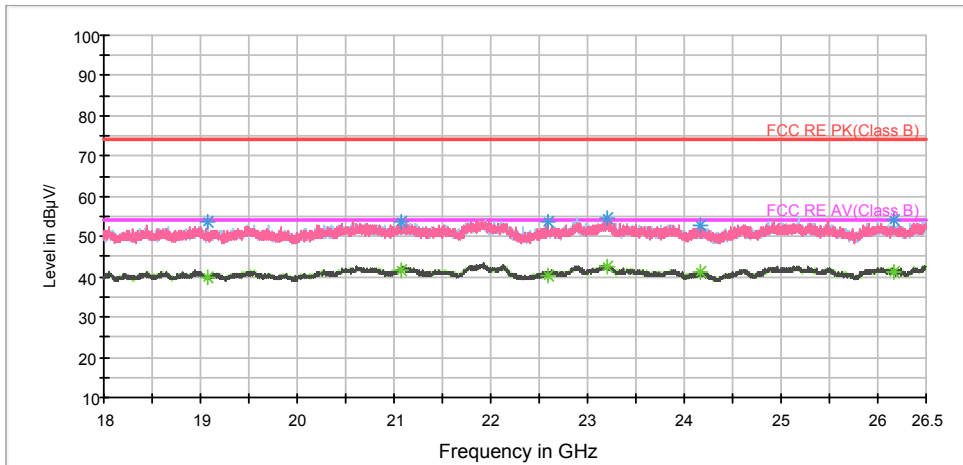

Radiates Emission from 18GHz to 26.5GHz



802.11g CH1


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1150.500000	37.6	100.0	H	243.0	45.3	-7.7	36.4	74
1395.500000	39.5	100.0	V	168.0	46.5	-7.0	34.5	74
1598.500000	41.9	100.0	V	168.0	48.2	-6.3	32.1	74
1897.500000	40.6	100.0	V	306.0	45.8	-5.2	33.4	74
2464.500000	42.2	100.0	V	328.0	45.2	-3.0	31.8	74
2990.500000	44.6	100.0	V	282.0	47.0	-2.4	29.4	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1150.500000	25.5	100.0	H	243.0	33.2	-7.7	28.5	54
1395.500000	26.5	100.0	V	168.0	33.5	-7.0	27.5	54
1598.500000	28.3	100.0	V	168.0	34.6	-6.3	25.7	54
1897.500000	33.2	100.0	V	306.0	38.4	-5.2	20.8	54
2464.500000	32.4	100.0	V	328.0	35.4	-3.0	21.6	54
2990.500000	29.4	100.0	V	282.0	31.8	-2.4	24.6	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-3GHz PK+AV Class B

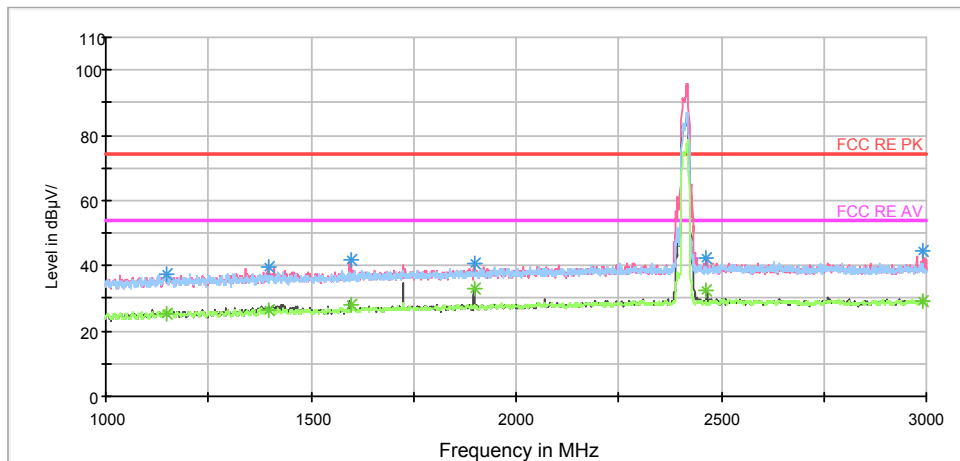


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

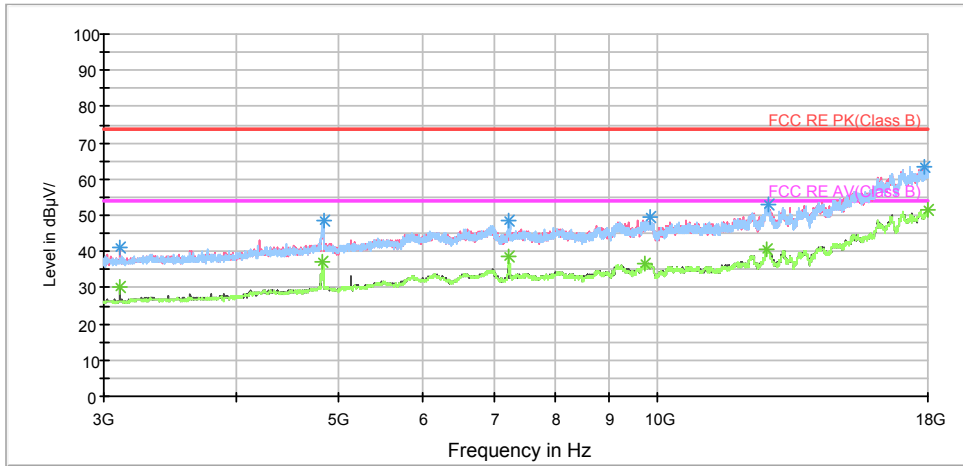

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

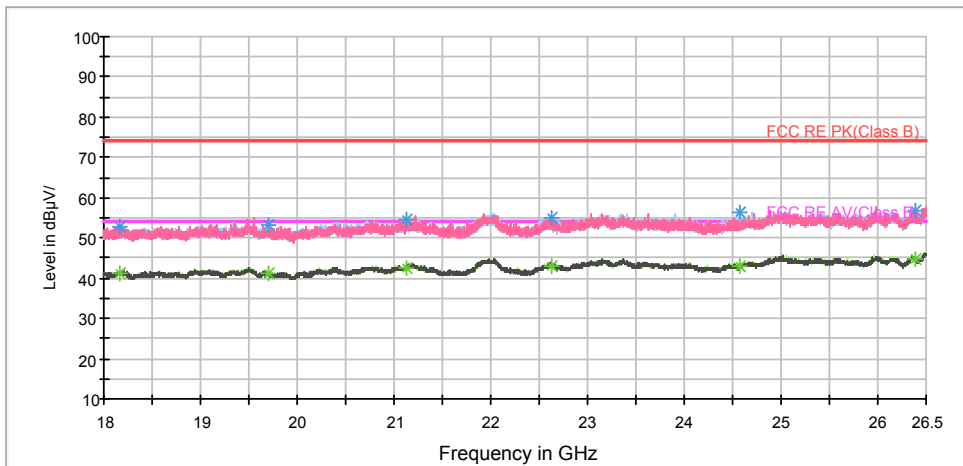

Radiates Emission from 18GHz to 26.5GHz



802.11g CH6


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1145.500000	37.5	100.0	H	0.0	45.2	-7.7	36.5	74
1417.500000	41.2	100.0	V	190.0	48.1	-6.9	32.8	74
1594.000000	42.7	100.0	V	179.0	49.0	-6.3	31.3	74
2058.000000	40.2	100.0	V	6.0	44.8	-4.6	33.8	74
2615.500000	40.7	100.0	V	77.0	43.4	-2.7	33.3	74
2990.500000	44.3	100.0	V	296.0	46.7	-2.4	29.7	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1145.500000	26.3	100.0	H	0.0	34.0	-7.7	27.7	54
1417.500000	27.0	100.0	V	190.0	33.9	-6.9	27.0	54
1594.000000	29.4	100.0	V	179.0	35.7	-6.3	24.6	54
2058.000000	28.2	100.0	V	6.0	32.8	-4.6	25.8	54
2615.500000	28.7	100.0	V	77.0	31.4	-2.7	25.3	54
2990.500000	29.1	100.0	V	296.0	31.5	-2.4	24.9	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-3GHz PK+AV Class B

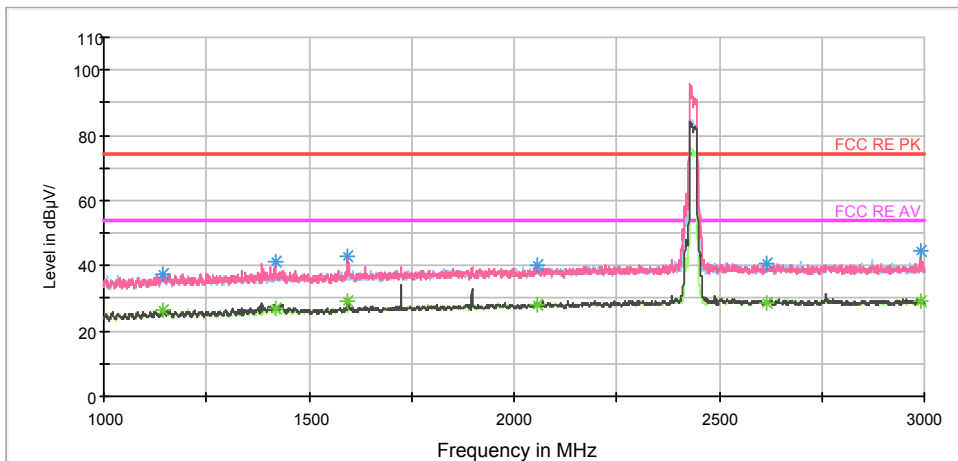


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

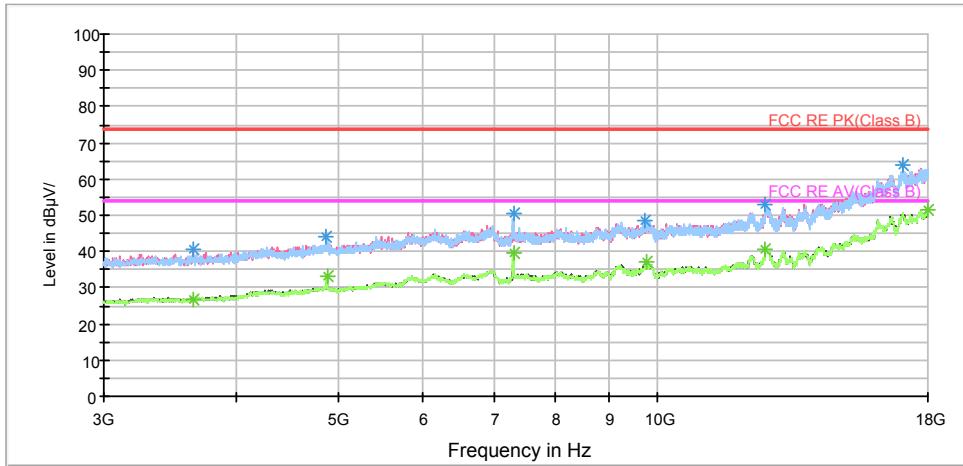

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

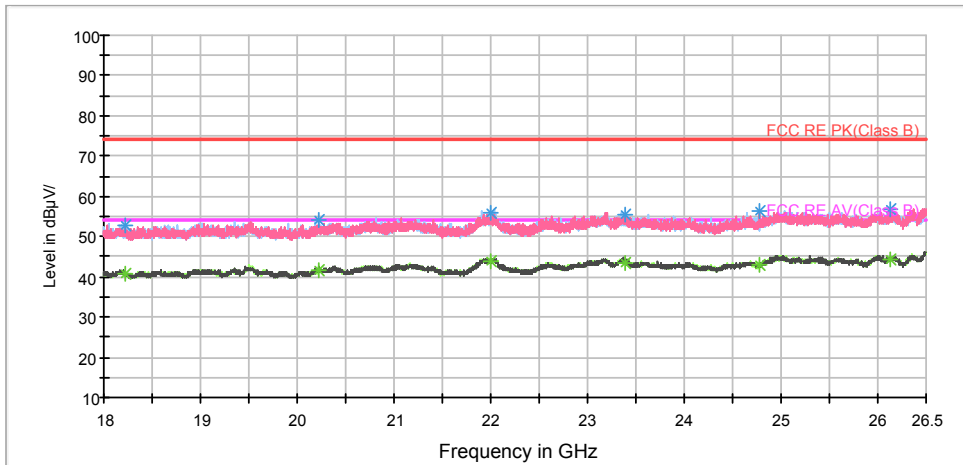

Radiates Emission from 18GHz to 26.5GHz



802.11g CH11


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.500000	37.0	100.0	H	314.0	44.6	-7.6	37.0	74
1394.500000	39.4	100.0	V	227.0	46.4	-7.0	34.6	74
1599.000000	42.9	100.0	V	180.0	49.2	-6.3	31.1	74
2080.000000	40.3	100.0	V	22.0	44.8	-4.5	33.7	74
2749.500000	40.3	100.0	V	227.0	42.9	-2.6	33.7	74
2994.500000	41.8	100.0	V	297.0	44.2	-2.4	32.2	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.500000	24.6	100.0	H	314.0	32.2	-7.6	29.4	54
1394.500000	28.0	100.0	V	227.0	35.0	-7.0	26.0	54
1599.000000	28.0	100.0	V	180.0	34.3	-6.3	26.0	54
2080.000000	28.0	100.0	V	22.0	32.5	-4.5	26.0	54
2749.500000	28.6	100.0	V	227.0	31.2	-2.6	25.4	54
2994.500000	28.9	100.0	V	297.0	31.3	-2.4	25.1	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-3GHz PK+AV Class B

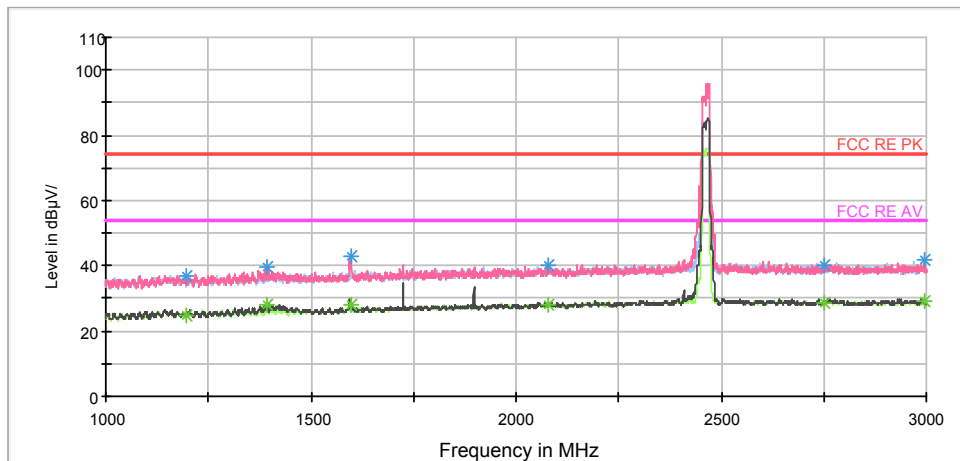


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

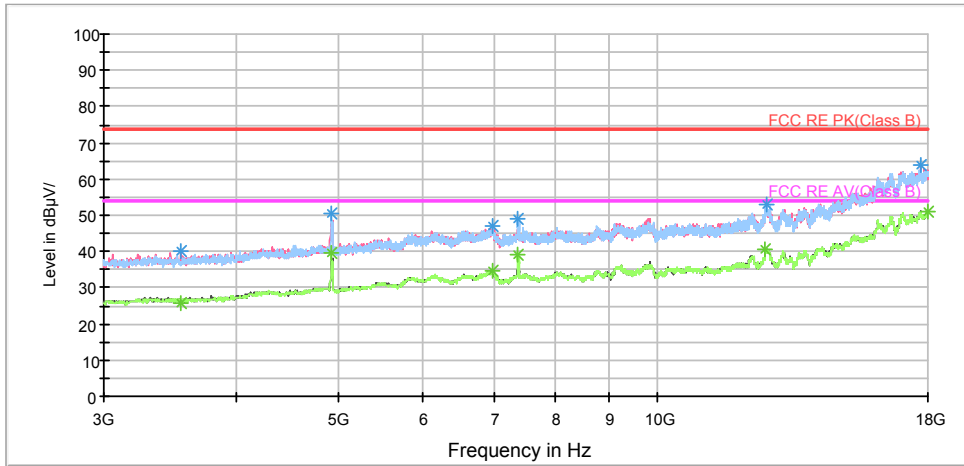

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

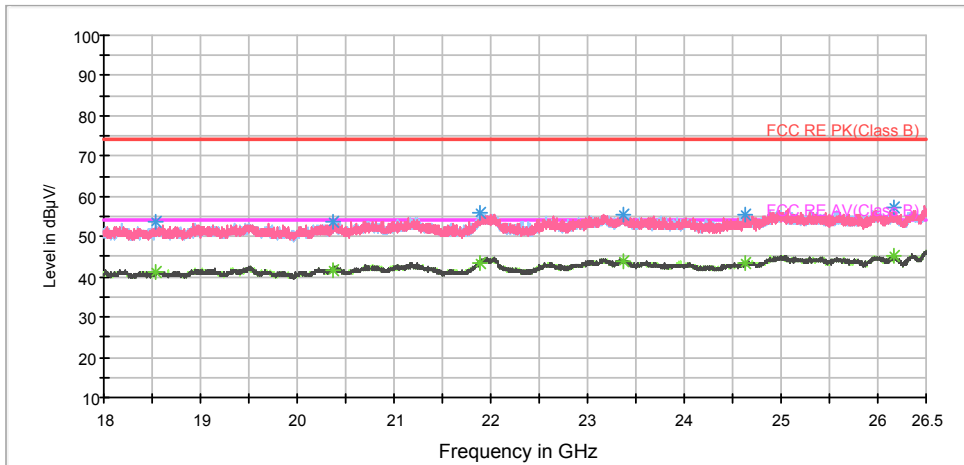

Radiates Emission from 18GHz to 26.5GHz



802.11n (HT20) CH1


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1143.500000	37.1	100.0	V	100.0	44.8	-7.7	36.9	74
1398.000000	42.5	100.0	V	179.0	49.4	-6.9	31.5	74
1599.000000	42.6	100.0	V	168.0	48.9	-6.3	31.4	74
1725.000000	40.7	100.0	V	271.0	46.5	-5.8	33.3	74
1898.000000	40.4	100.0	V	246.0	45.6	-5.2	33.6	74
2991.500000	43.5	100.0	V	235.0	45.9	-2.4	30.5	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1143.000000	26.1	100.0	H	324.0	33.8	-7.7	27.9	54
1398.000000	26.5	100.0	V	179.0	33.4	-6.9	27.5	54
1599.000000	30.0	100.0	V	168.0	36.3	-6.3	24.0	54
1725.000000	34.8	100.0	V	271.0	40.6	-5.8	19.2	54
1898.000000	31.5	100.0	V	246.0	36.7	-5.2	22.5	54
2991.500000	29.1	100.0	V	235.0	31.5	-2.4	24.9	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-3GHz PK+AV Class B

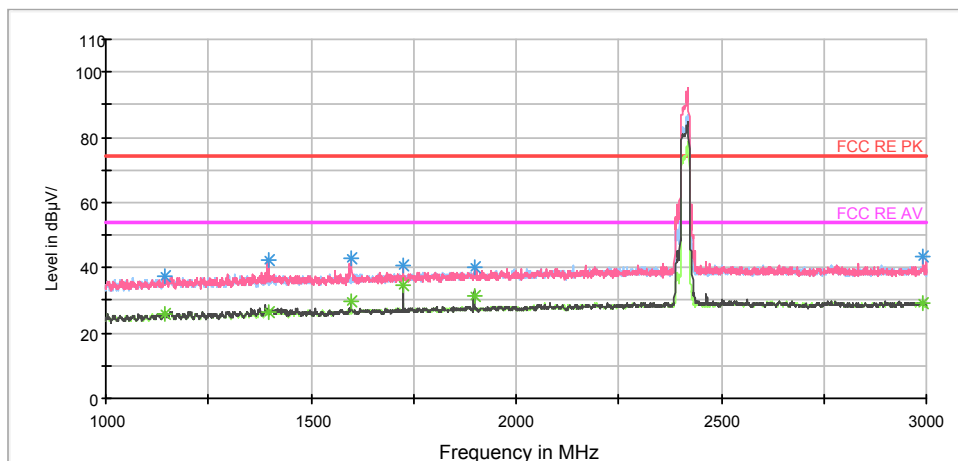


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

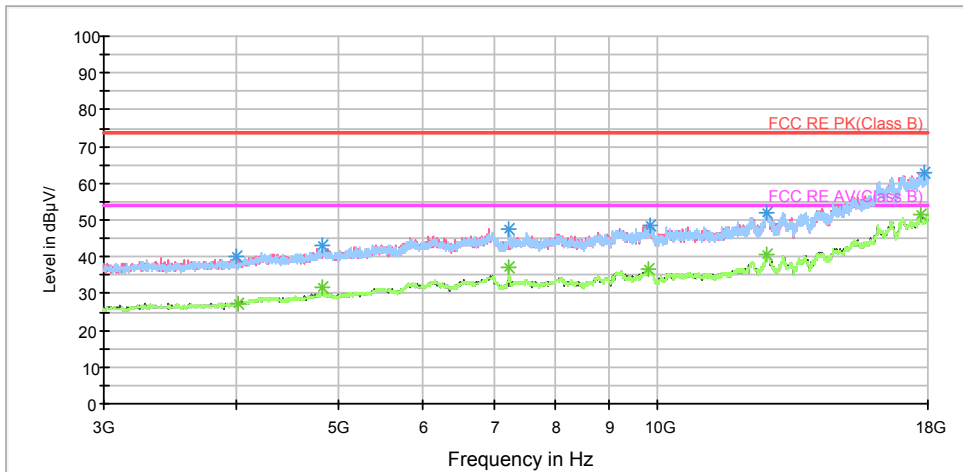

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

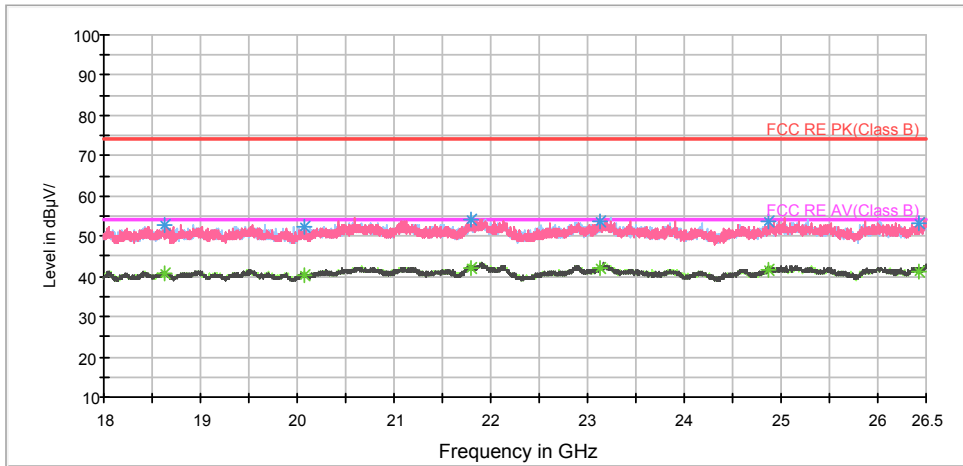

Radiates Emission from 18GHz to 26.5GHz



802.11n (HT20) CH6


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1146.500000	37.7	100.0	H	292.0	45.4	-7.7	36.3	74
1392.500000	40.0	100.0	V	216.0	47.0	-7.0	34.0	74
1725.000000	41.0	100.0	V	250.0	46.8	-5.8	33.0	74
1897.500000	40.4	100.0	V	250.0	45.6	-5.2	33.6	74
2760.000000	41.4	100.0	V	250.0	44.0	-2.6	32.6	74
2999.500000	42.8	100.0	V	272.0	45.2	-2.4	31.2	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1146.500000	26.2	100.0	H	292.0	33.9	-7.7	27.8	54
1392.500000	28.0	100.0	V	216.0	35.0	-7.0	26.0	54
1725.000000	36.7	100.0	V	250.0	42.5	-5.8	17.3	54
1897.500000	34.5	100.0	V	250.0	39.7	-5.2	19.5	54
2760.000000	32.4	100.0	V	250.0	35.0	-2.6	21.6	54
2999.500000	28.7	100.0	V	272.0	31.1	-2.4	25.3	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-3GHz PK+AV Class B

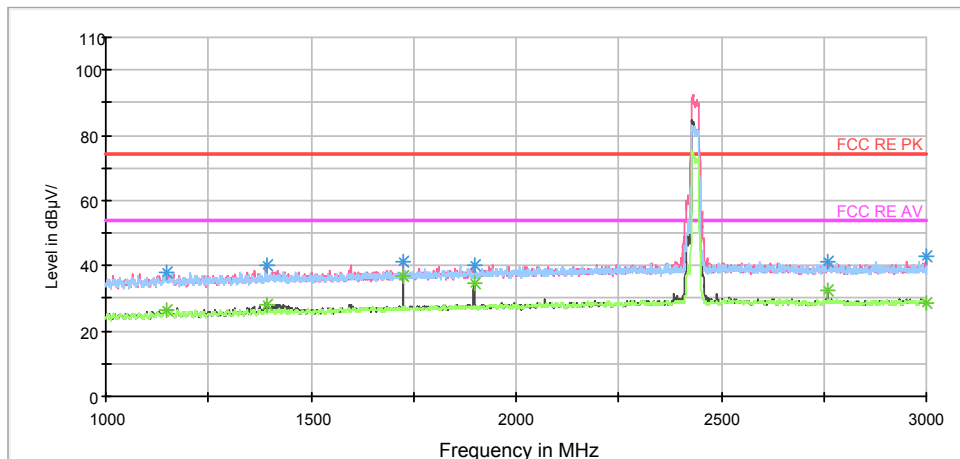


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

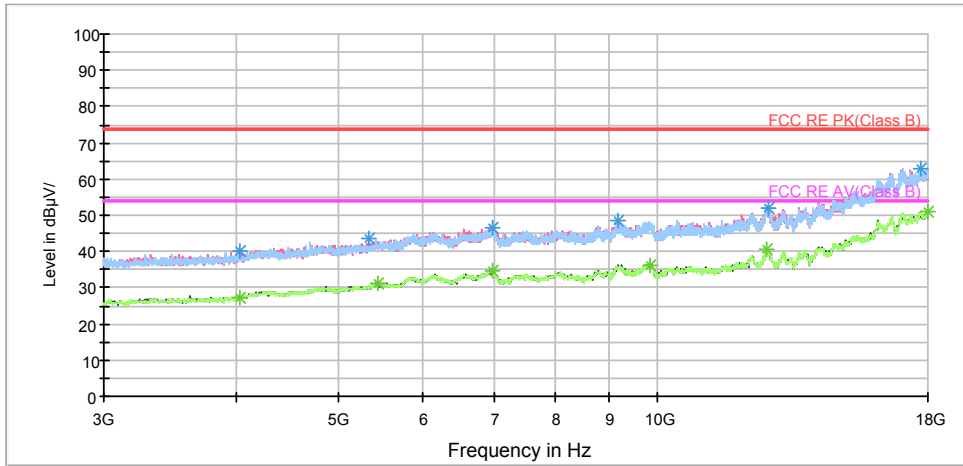

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

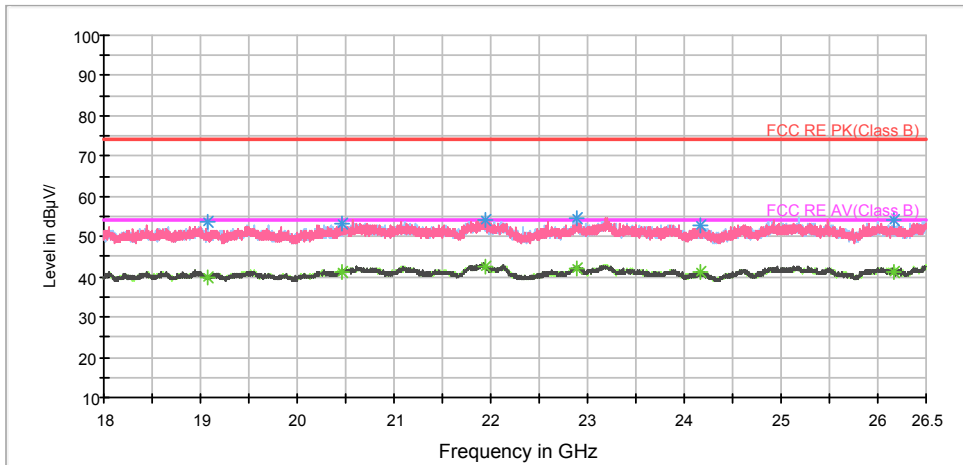

Radiates Emission from 18GHz to 26.5GHz



802.11n (HT20) CH11


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1190.500000	37.4	100.0	V	138.0	45.0	-7.6	36.6	74
1395.500000	39.7	100.0	V	195.0	46.7	-7.0	34.3	74
1596.500000	40.1	100.0	V	207.0	46.4	-6.3	33.9	74
2035.000000	40.0	100.0	V	5.0	44.7	-4.7	34.0	74
2777.000000	41.6	100.0	V	0.0	44.2	-2.6	32.4	74
2987.500000	43.2	100.0	V	265.0	45.6	-2.4	30.8	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1190.500000	25.5	100.0	V	138.0	33.1	-7.6	28.5	54
1395.500000	29.2	100.0	V	195.0	36.2	-7.0	24.8	54
1596.500000	27.2	100.0	V	207.0	33.5	-6.3	26.8	54
2035.000000	28.0	100.0	V	5.0	32.7	-4.7	26.0	54
2777.000000	28.8	100.0	V	0.0	31.4	-2.6	25.2	54
2987.500000	29.0	100.0	V	265.0	31.4	-2.4	25.0	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-3GHz PK+AV Class B

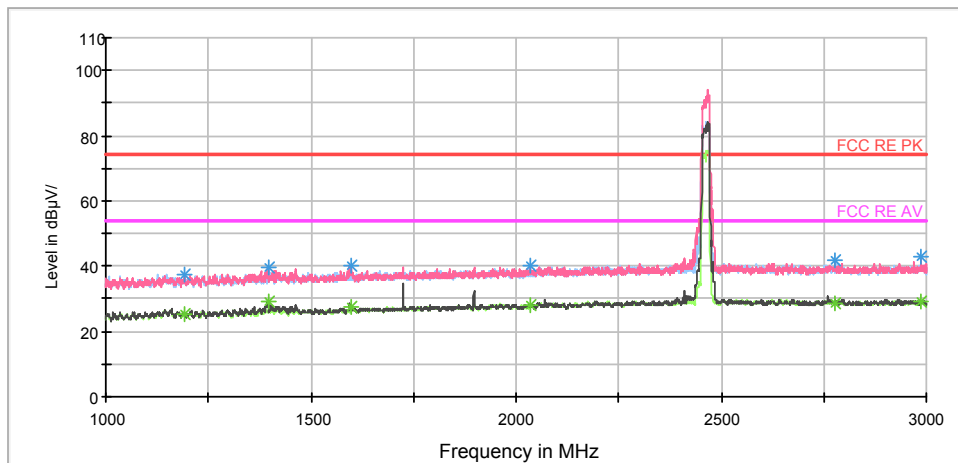


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

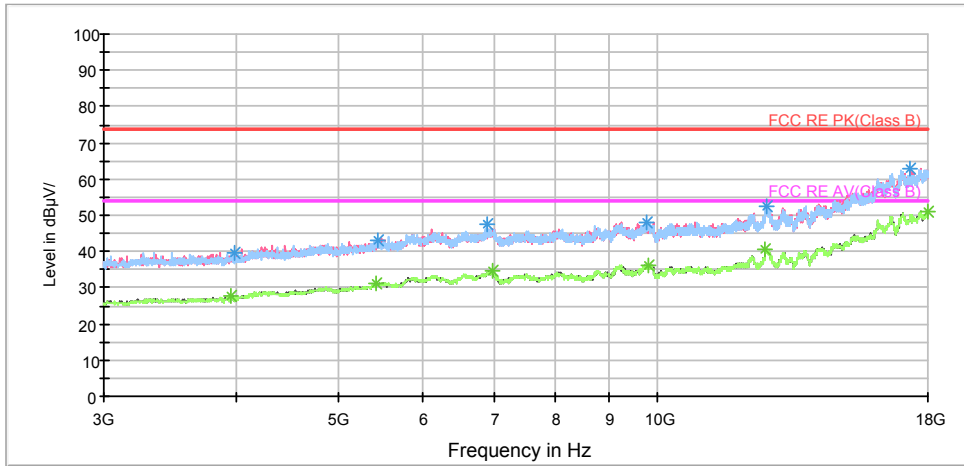

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

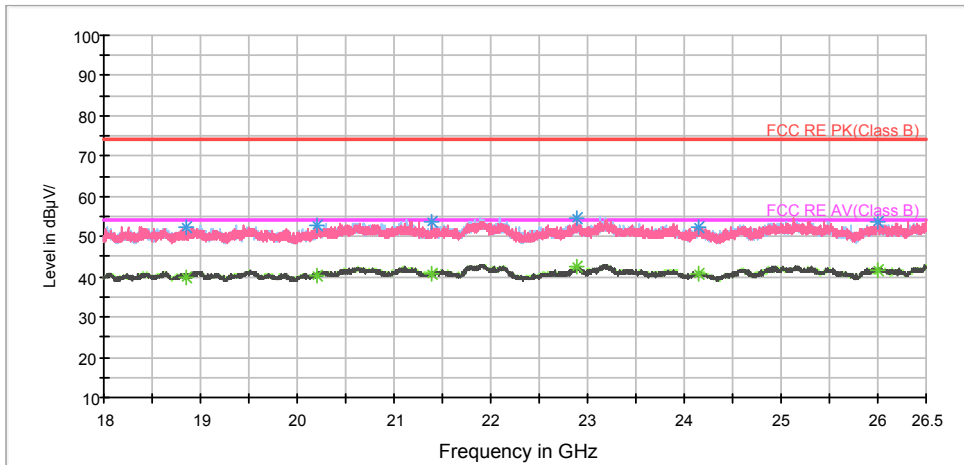

Radiates Emission from 18GHz to 26.5GHz

BLE-Channel 0


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1395.000000	40.1	100.0	V	0.0	47.1	-7.0	33.9	74
2069.500000	42.4	100.0	V	143.0	45.4	-3.0	31.6	74
1165.500000	34.7	100.0	V	254.0	43.1	-8.4	39.3	74
1725.000000	44.0	100.0	V	151.0	49.1	-5.1	30.0	74
1897.500000	42.1	100.0	V	275.0	46.2	-4.1	31.9	74
2760.750000	42.1	100.0	V	348.0	42.7	-0.6	31.9	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1158.750000	27.0	100.0	V	282.0	35.4	-8.4	27.0	54
1408.000000	29.6	100.0	V	356.0	36.5	-6.9	24.4	54
1725.000000	40.4	100.0	V	151.0	45.5	-5.1	13.6	54
1897.500000	37.6	100.0	V	275.0	41.7	-4.1	16.4	54
2760.000000	34.3	100.0	V	218.0	34.9	-0.6	19.7	54
2069.500000	34.5	100.0	V	143.0	37.5	-3.0	19.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


FCC RE 1G-18GHz PK+AV Class B

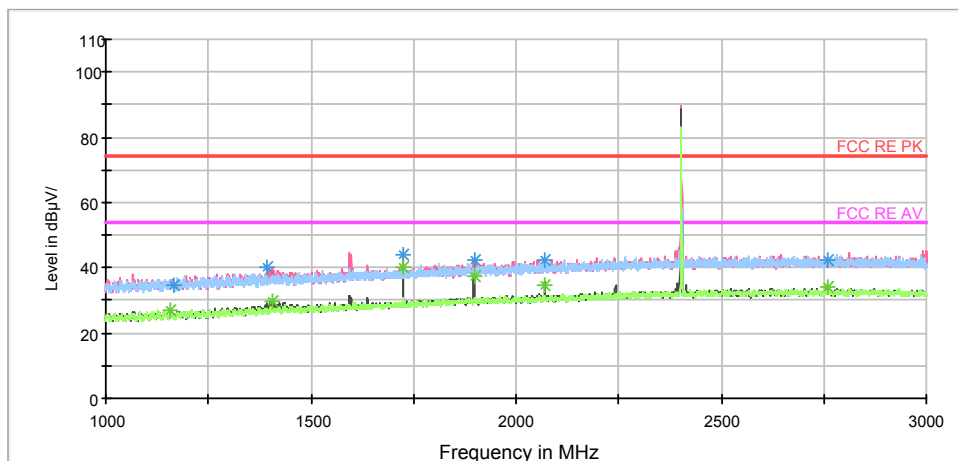

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz




RE 3-18GHz PK+AV

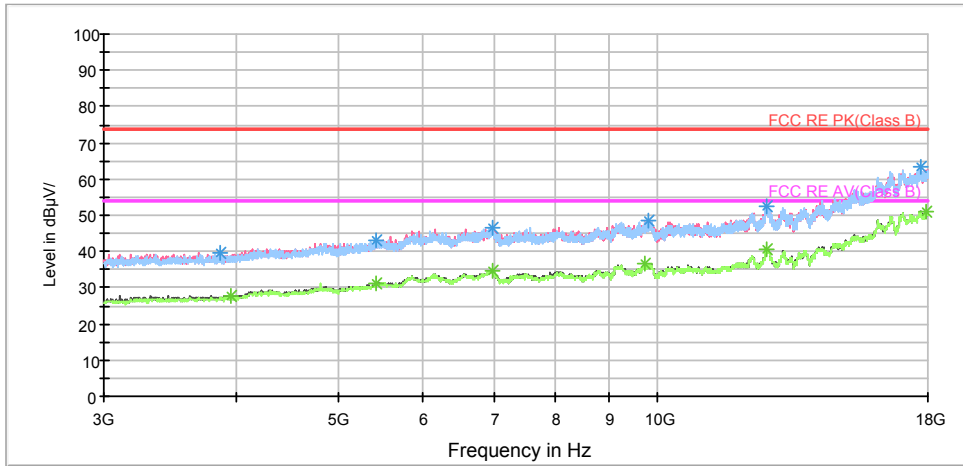

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

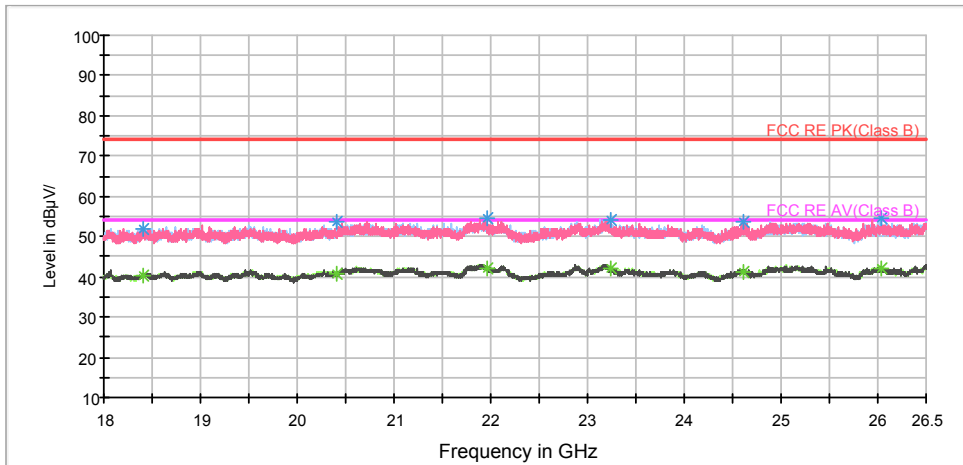

Radiates Emission from 18GHz to 26.5GHz




BLE-Channel 19

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1176.250000	36.7	100.0	H	66.0	45.1	-8.4	37.3	74
1397.750000	41.9	100.0	V	0.0	48.9	-7.0	32.1	74
1596.500000	43.9	100.0	V	0.0	49.8	-5.9	30.1	74
1724.750000	45.9	100.0	V	84.0	51.0	-5.1	28.1	74
1897.250000	41.7	100.0	V	225.0	45.8	-4.1	32.3	74
2987.500000	45.1	100.0	V	358.0	45.6	-0.5	28.9	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1158.750000	26.3	100.0	H	5.0	34.7	-8.4	27.7	54
1375.250000	30.7	100.0	V	152.0	37.8	-7.1	23.3	54
1598.750000	32.3	100.0	V	357.0	38.2	-5.9	21.7	54
1724.750000	40.3	100.0	V	84.0	45.4	-5.1	13.7	54
1897.500000	36.0	100.0	V	137.0	40.1	-4.1	18.0	54
2988.250000	32.4	100.0	V	114.0	32.9	-0.5	21.6	54

FCC RE 1G-18GHz PK+AV Class B

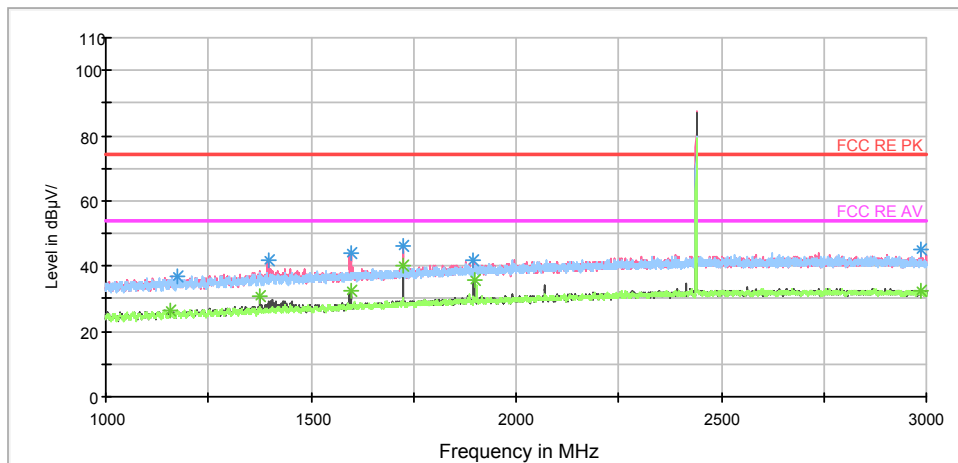


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

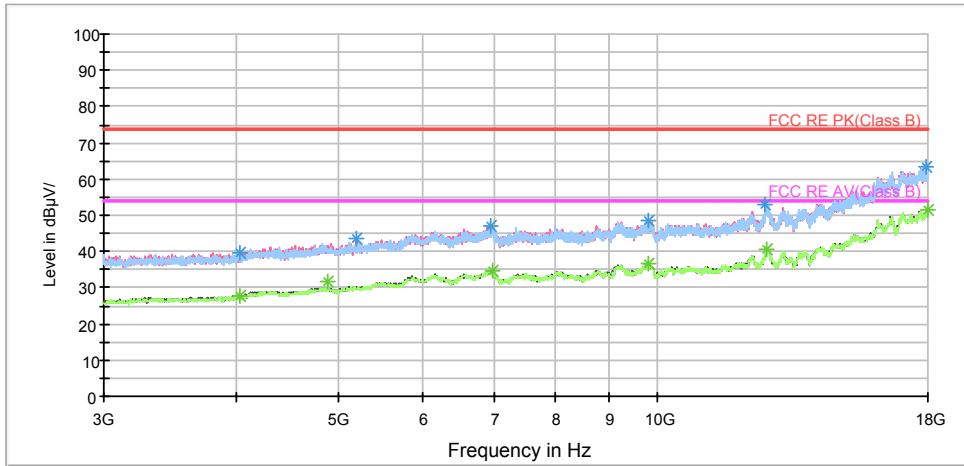

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

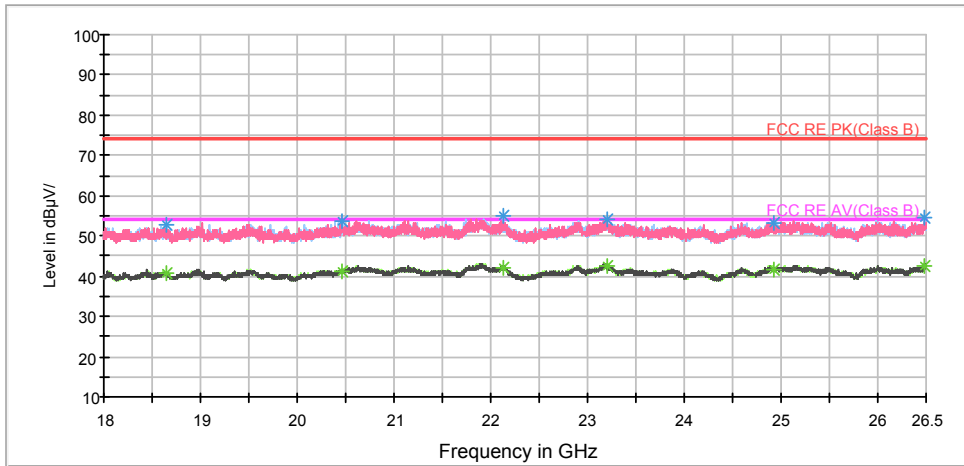

Radiates Emission from 18GHz to 26.5GHz




BLE-Channel 39

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1140.750000	37.6	100.0	H	3.0	46.1	-8.5	36.4	74
1397.500000	40.8	100.0	V	358.0	47.8	-7.0	33.2	74
1598.000000	43.9	100.0	V	0.0	49.8	-5.9	30.1	74
2987.250000	45.8	100.0	V	0.0	46.3	-0.5	28.2	74
1897.250000	40.8	100.0	V	275.0	44.9	-4.1	33.2	74
1725.000000	42.3	100.0	V	275.0	47.4	-5.1	31.7	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1393.250000	29.7	100.0	V	359.0	36.7	-7.0	24.3	54
1725.000000	38.4	100.0	V	275.0	43.5	-5.1	15.6	54
1897.500000	36.1	100.0	V	275.0	40.2	-4.1	17.9	54
2982.500000	32.2	100.0	V	202.0	32.6	-0.4	21.8	54
1595.000000	30.6	100.0	V	0.0	36.5	-5.9	23.4	54
1141.500000	25.9	100.0	H	16.0	34.4	-8.5	28.1	54


FCC RE 1G-18GHz PK+AV Class B

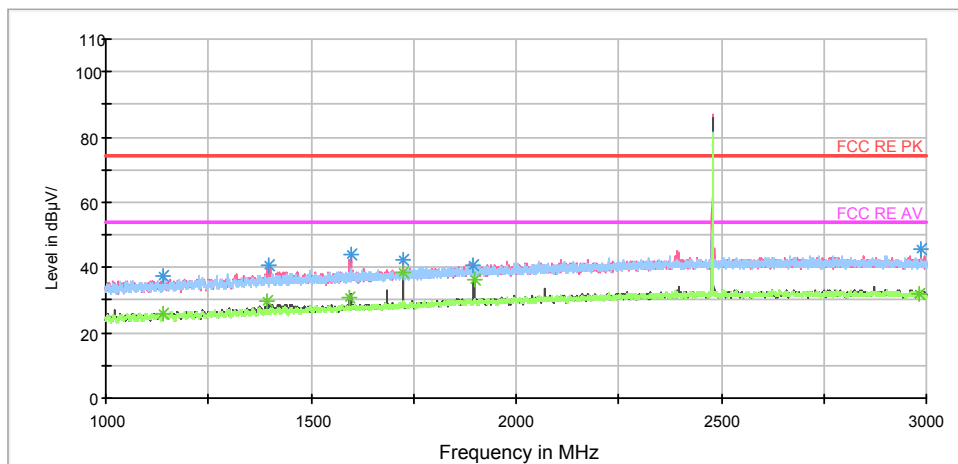

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz




RE 3-18GHz PK+AV

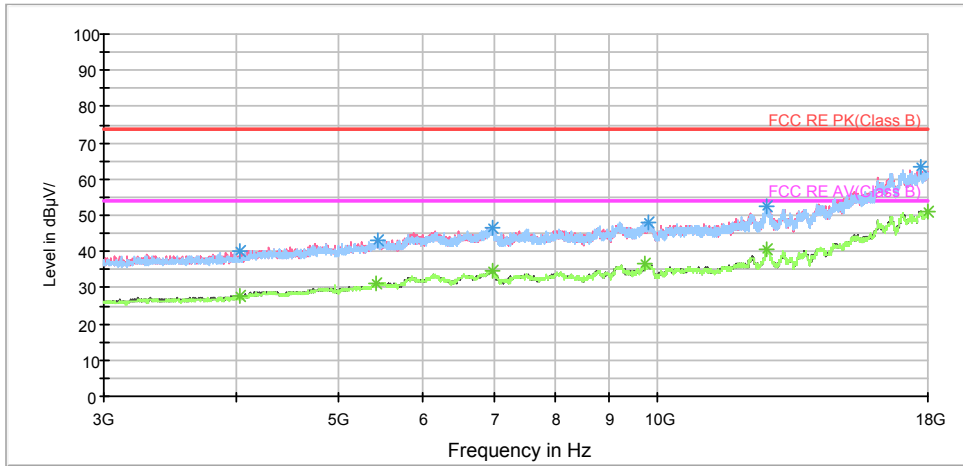

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

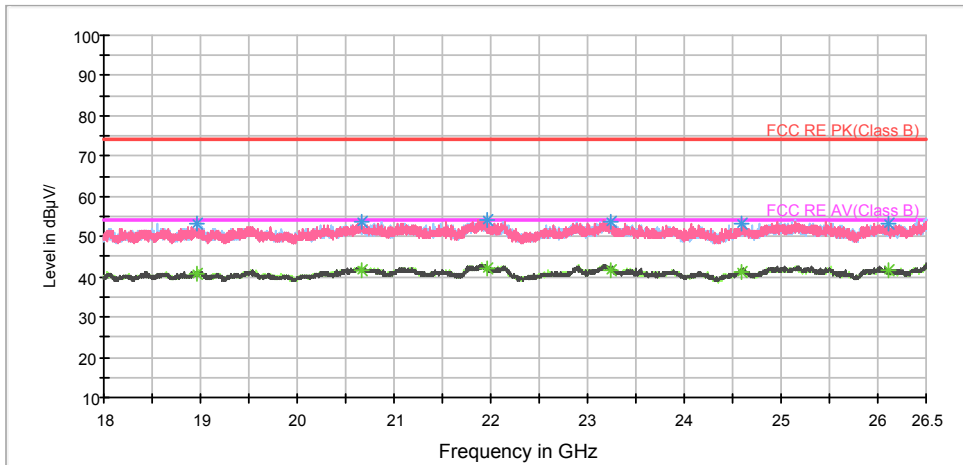

Radiates Emission from 18GHz to 26.5GHz

5.8. Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

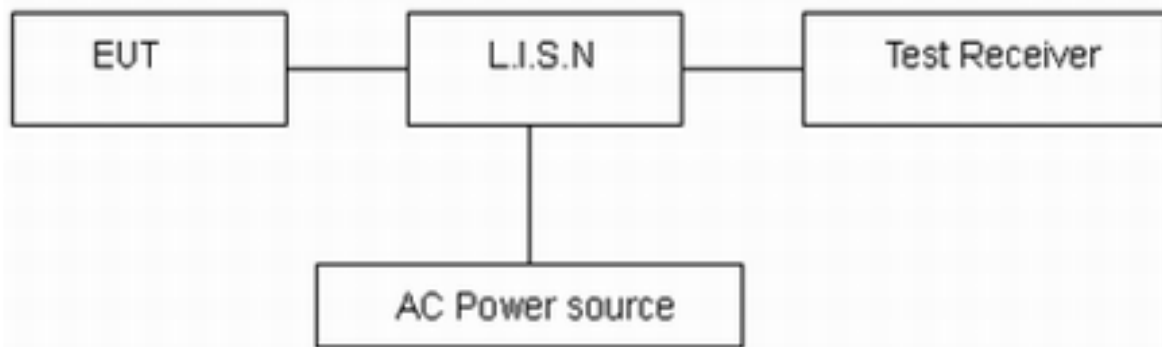

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50


*: Decreases with the logarithm of the frequency.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

Test Results:


Following plots, Blue trace uses the peak detection and Green trace uses the average detection.

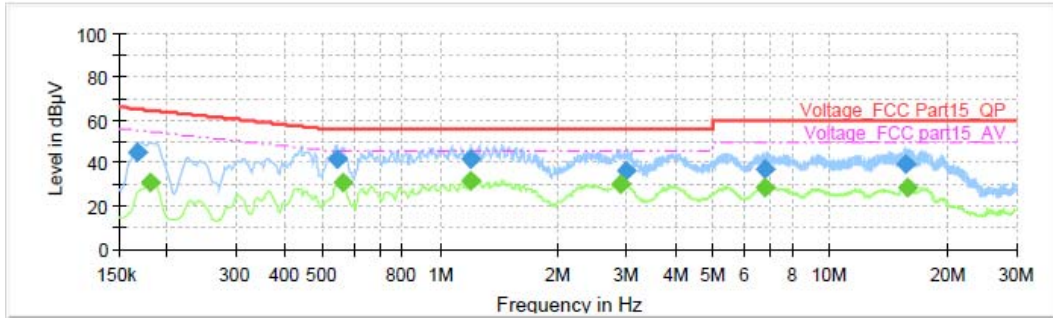

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.168000	45.09	---	65.06	19.97	1000.0	9.000	L1	ON	19.1
0.181500	---	30.78	54.42	23.64	1000.0	9.000	L1	ON	19.2
0.541500	41.86	---	56.00	14.14	1000.0	9.000	L1	ON	19.2
0.559500	---	30.89	46.00	15.11	1000.0	9.000	L1	ON	19.3
1.191750	41.64	---	56.00	14.36	1000.0	9.000	L1	ON	19.2
1.191750	---	31.75	46.00	14.25	1000.0	9.000	L1	ON	19.2
2.897250	---	29.96	46.00	16.04	1000.0	9.000	L1	ON	19.1
2.996250	36.61	---	56.00	19.39	1000.0	9.000	L1	ON	19.1
6.767250	37.52	---	60.00	22.48	1000.0	9.000	L1	ON	19.1
6.798750	---	29.03	50.00	20.97	1000.0	9.000	L1	ON	19.1
15.625500	39.23	---	60.00	20.77	1000.0	9.000	L1	ON	19.4
15.733500	---	29.02	50.00	20.98	1000.0	9.000	L1	ON	19.4

WIFI_L_0.15-30MHz

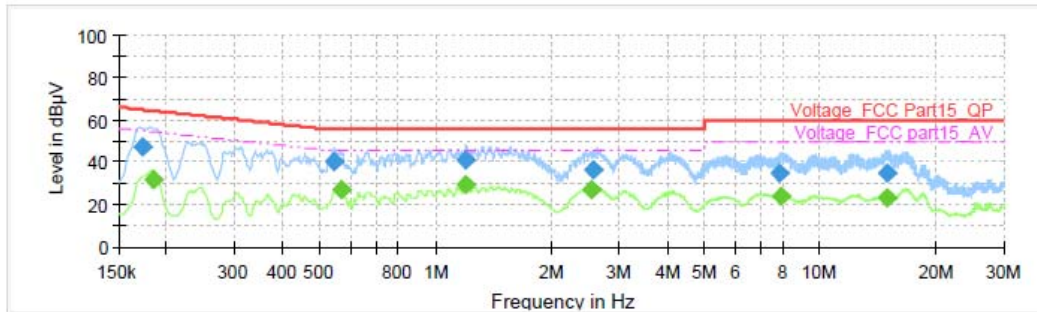

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.172500	47.19	---	64.84	17.65	1000.0	9.000	N	ON	19.2
0.183750	---	31.70	54.31	22.62	1000.0	9.000	N	ON	19.2
0.541500	40.59	---	56.00	15.41	1000.0	9.000	N	ON	19.2
0.566250	---	27.25	46.00	18.75	1000.0	9.000	N	ON	19.3
1.198500	40.92	---	56.00	15.08	1000.0	9.000	N	ON	19.2
1.198500	---	29.08	46.00	16.92	1000.0	9.000	N	ON	19.2
2.550750	---	27.15	46.00	18.85	1000.0	9.000	N	ON	19.0
2.557500	36.79	---	56.00	19.21	1000.0	9.000	N	ON	19.0
7.845000	34.83	---	60.00	25.17	1000.0	9.000	N	ON	19.2
7.894500	---	24.10	50.00	25.90	1000.0	9.000	N	ON	19.2
14.916750	---	22.90	50.00	27.10	1000.0	9.000	N	ON	19.5
14.919000	34.89	---	60.00	25.11	1000.0	9.000	N	ON	19.5

WIFI_N_0.15-30MHz



6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Time
Spectrum Analyzer	R&S	FSV30	100815	2016-12-16	2017-12-15
EMI Test Receiver	R&S	ESCI	100948	2017-05-20	2018-05-19
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-201	2014-12-06	2017-12-05
Double Ridged Waveguide Horn Antenna	R&S	HF907	100126	2014-12-06	2017-12-05
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-02-18	2020-02-17
Standard Gain Horn	ETS-Lindgren	3160-09	00102644	2015-01-30	2018-01-29
EMI Test Receiver	R&S	ESCS30	100138	2016-12-16	2017-12-15
LISN	R&S	ENV216	101171	2016-12-16	2019-12-15
Spectrum Analyzer	Agilent	N9010A	MY47191109	2017-05-20	2018-05-19
RF Cable	Agilent	SMA 15cm	0001	2017-08-04	2018-02-03

*****END OF REPORT *****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance



Front Side



Back Side

a: EUT



Adapter 1



Adapter 2



Adapter 3




Adapter 4




Adapter 5


b: Adapter

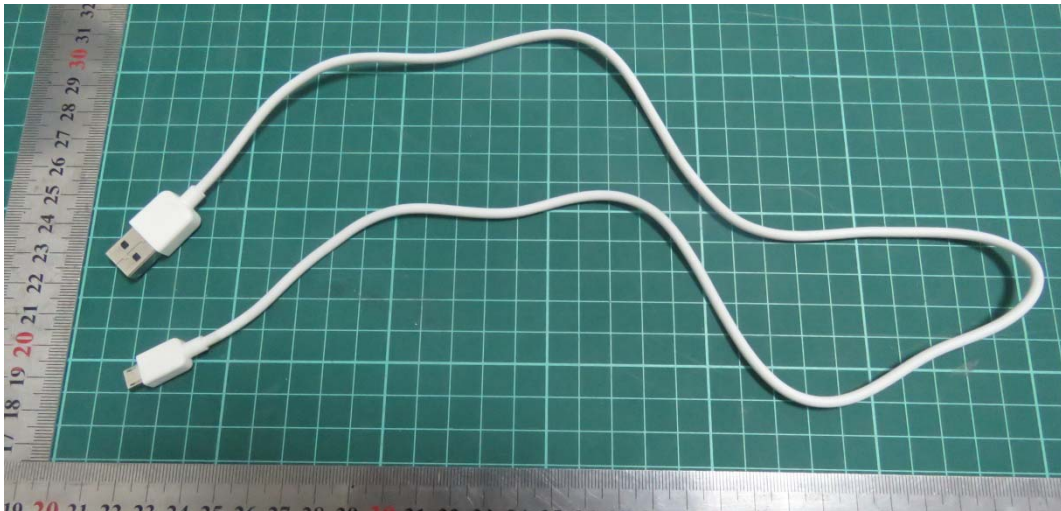

USB Cable 1

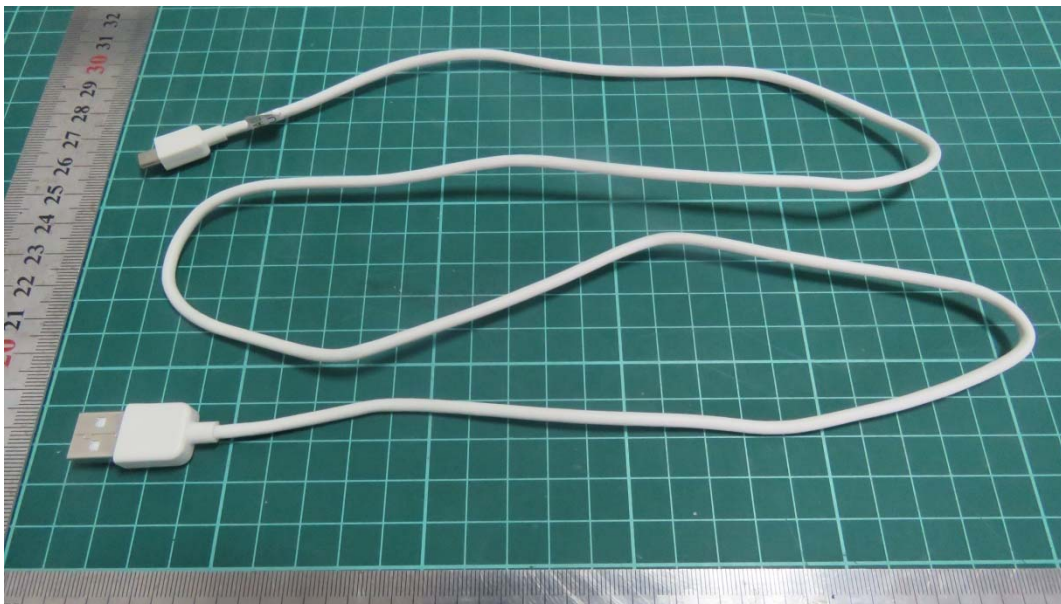

USB Cable 2
c: USB Cable

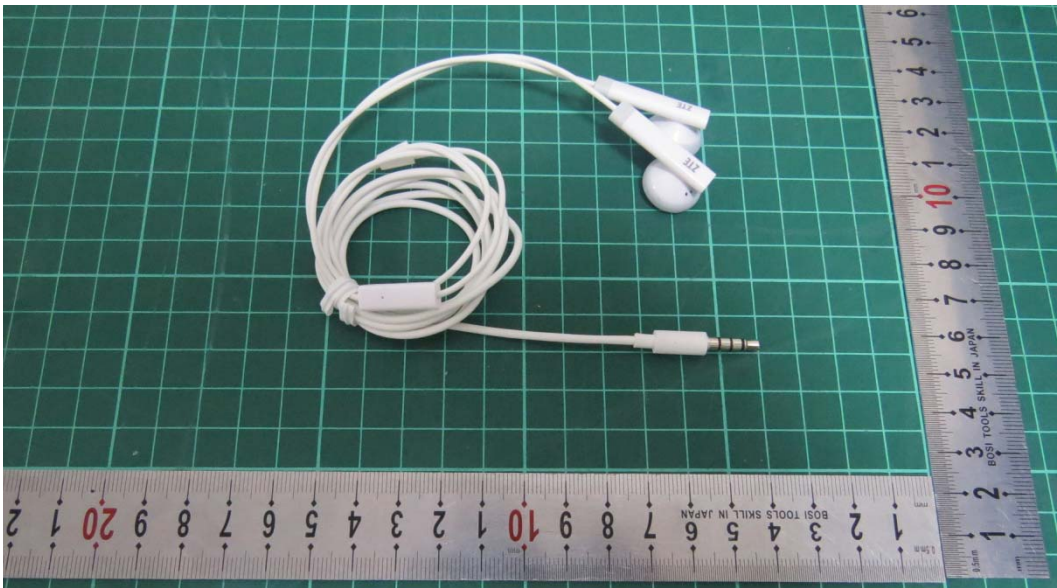

Earphone 1




Earphone 2

d: Earphone

Picture 1 EUT and Accessory

A.2 Test Setup

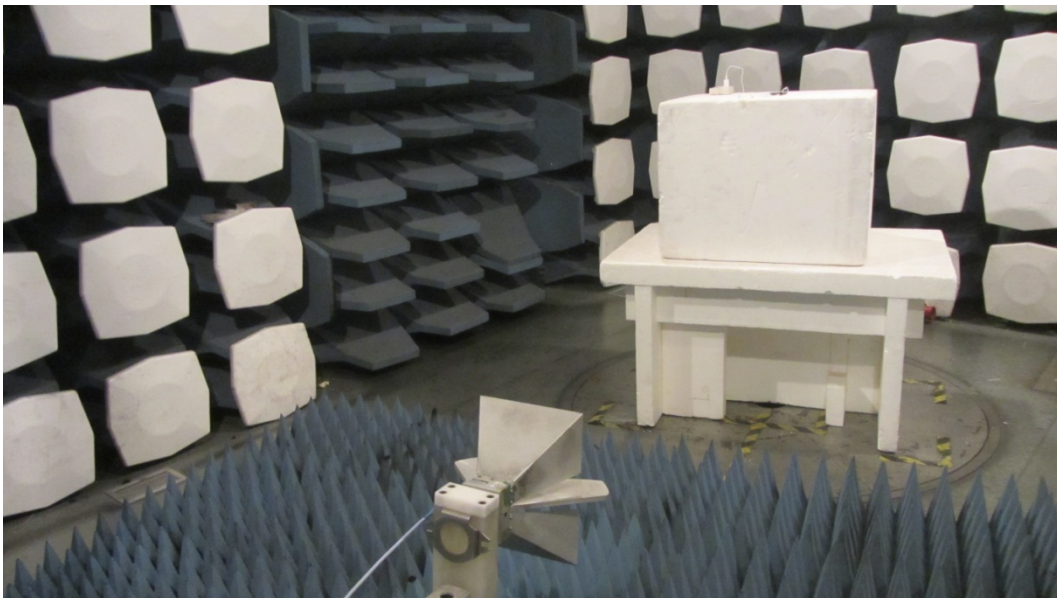

Picture 2 Radiated Emission Test Setup



Picture 3 Conducted Emission Test Setup