



TEST REPORT FOR WLAN TESTING

Report No: SRTC2018-9004(F)-18122402(F)

Product Name: LTE/WCDMA/GSM (GPRS) Multi-Mode

Digital Mobile Phone

Product Model: ZTE Blade V10 Vita

Applicant: ZTE Corporation

Manufacturer: ZTE Corporation

Specification: FCC Part 15, Subpart C (2018)

FCC ID: SRQ-ZTEV10VITA

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District,

Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. GENERAL INFORMATION	2
1.1 NOTES OF THE TEST REPORT	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY	2
1.3 APPLICANT’S DETAILS	2
1.4 MANUFACTURER’S DETAILS	2
1.5 TEST ENVIRONMENT	3
2 DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 FINAL EQUIPMENT BUILD STATUS	4
2.2 DESCRIPTION OF TEST MODES	5
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	5
2.3 DUTY CYCLE OF TEST SIGNAL	6
2.4 EUT OPERATING CONDITIONS	7
2.5 SUPPORT EQUIPMENT	7
3 REFERENCE SPECIFICATION	8
4 KEY TO NOTES AND RESULT CODES	8
5 RESULT SUMMARY	9
6 TEST RESULT	10
6.1 PEAK POWER OUTPUT	10
6.2 OCCUPIED BANDWIDTH	11
6.3 TRANSMITTER POWER SPECTRAL DENSITY	12
6.4 CONDUCTED OUT OF BAND EMISSION MEASUREMENT	13
6.5 BAND-EDGE MEASUREMENT	14
6.6 SPURIOUS RADIATED EMISSIONS	15
6.7 AC POWER LINE CONDUCTED EMISSION	20
7 MEASUREMENT UNCERTAINTIES	22
8 TEST EQUIPMENTS	23
APPENDIX A – TEST DATA OF CONDUCTED EMISSION	24
APPENDIX B – TEST DATA OF RADIATED EMISSION	41

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srhc.org.cn

1.3 Applicant's details

Company:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South,Hi-Tech, Industrial Park, Nanshan District,Shenzhen, P.R.China
City:	Shenzhen
Country or Region:	P.R.China
Contacted person:	Gong Yu
Tel:	86-21-68895397
Fax:	---
Email:	gongyu@zte.com.cn

1.4 Manufacturer's details

Company:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South,Hi-Tech, Industrial Park, Nanshan District,Shenzhen, P.R.China
City:	Shenzhen
Country or Region:	P.R.China
Contacted person:	Gong Yu
Tel:	86-21-68895397
Fax:	---
Email:	gongyu@zte.com.cn

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2018-12-24
Testing Start Date:	2018-12-24
Testing End Date:	2019-01-13

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	30

Normal Supply Voltage (V d.c.):	3.85
---------------------------------	------

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Band	2.412GHz~2.462GHz
Number of Channel For 20MHz	11
Modulation Type	DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM
Duplex Mode	TDD
Channel Spacing	5MHz
Data Rate	802.11b:1Mbps-11Mbps 802.11g:6Mbps-54Mbps 802.11n HT20:MCS0-MCS7
Power Supply	Battery/AC adapter
HW Version	ujyA
SW Version	TEL_MX_ZTE_Blade_V10_VitaV1.0
IMEI	868486040002380
Antenna type	Refer to Note
Antenna connector	Refer to Note

Note: The antenna provide to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency range(GHz)	Antenna type	Connecter Type
N/A	N/A	-7.0dBi	2.412GHz~2.462GHz	Fixed Internal Antenna	N/A

Manufacturers ensure that their designs will not be modified by the user or third parties arbitrary antenna parameters and performance.

2.2 Description of Test Modes

11 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	---	---

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE ≥ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE 1G**: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK/ BPSK	1,6,6.5

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK/ BPSK	1,6,6.5

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK	1

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1,3, 6,9, 11	DBPSK/ BPSK	1,6,6.5

2.3 Duty Cycle of Test Signal

Modulation Type	Data Rate	Duty Cycle	Correction factor
11b	1Mbps	98.9%	N/A
11g	6Mbps	93.4%	0.30dB
11n(HT20)	6.5Mbps	93.0%	0.32dB

Duty cycle of test signal is $> 98\%$, duty factor shall not be considered.
Correction factor = $10 * \log(1/\text{duty cycle})$

2.4 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:

Equipment	Battery
Manufacturer	Zhongshan Tianmao Battery Co.,LTD
Model Number	Li3931T44P8h806139
Equipment	Charger1
Manufacturer	SHENZHEN RUIJING INDUSTRIAL CO LTD
Model Number	STC-A515A-Z
Equipment	Charger2
Manufacturer	Jiangsu Chenyang Electron Co.,Ltd
Model Number	STC-A515A-Z
Equipment	Charger3
Manufacturer	Shenzhen Dokocom Energy Technology Co.,Ltd
Model Number	STC-A515A-Z
Equipment	USB Cable1
Manufacturer	King Power Electronics Co., Ltd.
Model Number	USB-MU5-W-70-L
Equipment	USB Cable2
Manufacturer	Shen Zhen Shi Yi HUA XING Electron Co.,Ltd
Model Number	USB-MU5-W-70-L

3 REFERENCE SPECIFICATION

Specification	Version	Title
15.35	2018	Measurement detector functions and bandwidths.
15.209	2018	Radiated emission limits; general requirements.
15.247	2018	Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.
15.203	2018	Antenna requirement
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01	v05, August 24,2018,	GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247




4 KEY TO NOTES AND RESULT CODES

The following are the definition of the test result.

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.
NTC	Nominal voltage, Normal Temperature
HV	High voltage, Normal Temperature
LV	Low voltage, Normal Temperature
HTHV	high voltage, High Temperature
LTHV	High voltage, Low Temperature
HTLV	Low voltage, High Temperature
LTLV	Low voltage, Low Temperature

5 RESULT SUMMARY

No.	Test case	Reference	Verdict
1	Peak Power Output	15.247(a)(2)	Pass
2	Occupied Bandwidth	15.247(b)(3))	Pass
3	Transmitter Power Spectral Density	15.247(e))	Pass
4	Conducted Out of band emission measurement	15.247(d)	Pass
5	Band Edge	15.247(d)	Pass
6	Spurious Radiated Emissions	15.247(d)/15.35(b)/15.209	Pass
7	AC Power line Conducted Emission	15.207	Pass
8	Antenna requirement	15.203	Pass (refer to section 2.1)

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. He Dengshun 	Issued date: 20190118

6 TEST RESULT

6.1 Peak Power Output

6.1.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.5kPa

6.1.2 Test Description

A transmitter antenna terminal of EUT is connected to the power meter. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies.

6.1.3 Test limit

FCC Part15.247(b)(3)

The maximum permissible conducted output power is 1 Watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

==> Maximum Output Power: 30.0 dBm

6.1.4 Test Procedure Used


KDB 558074 D01 DTS Meas Guidance v05 - Section 9.1.3

6.1.5 Test Settings

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

6.1.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

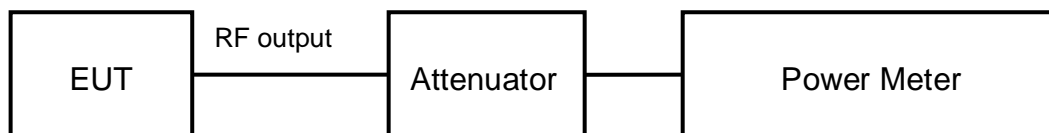

6.1.7 Test result

The test results are shown in Appendix A .

6.2 Occupied Bandwidth

6.2.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.5kPa

6.2.2 Test Description

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer and Bluetooth test set via a power splitter with a known loss. Which connected to the transmitter antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies. All modes of operation were investigated and the worst case configuration results are reported in this section.

6.2.3 Test limit

FCC Part15.247(a)(2)

The minimum permissible 6dB bandwidth is 500 kHz

6.2.4 Test Procedure Used


KDB 558074 D01 DTS Meas Guidance v05 - Section 8.1 Option 1

6.2.5 Test Settings

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.2.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

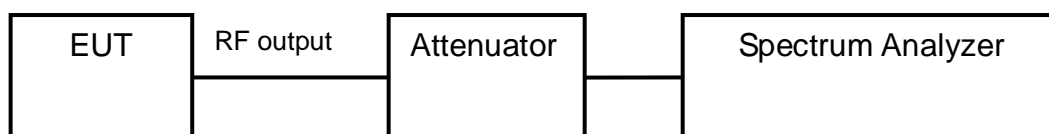

6.2.7 Test result

The test results are shown in Appendix A.

6.3 Transmitter Power Spectral Density

6.3.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.5kPa

6.3.2 Test Description

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

6.3.3 Test limit

FCC Part15.247(e)

The maximum permissible power spectral density is 8.0 dBm in any 3 kHz band.

6.3.4 Test Procedure Used


KDB 558074 D01 DTS Meas Guidance v05 Section 10.2.

6.3.5 Test Settings

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

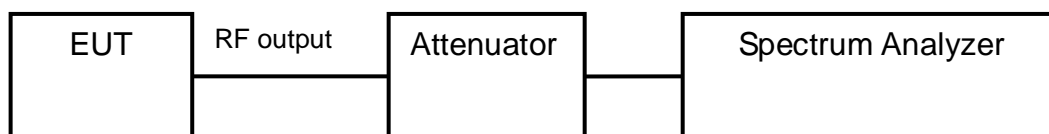

6.3.7 Test result

The test results are shown in Appendix A.

6.4 Conducted Out of band emission measurement

6.4.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.5kPa

6.4.2 Test Description

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration.

6.4.3 Test limit

FCC Part 15.247(d)

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.


6.4.4 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05 Section 11.3

6.4.5 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100kHz.
- Set the VBW \geq 300kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.4.6 Test Setup

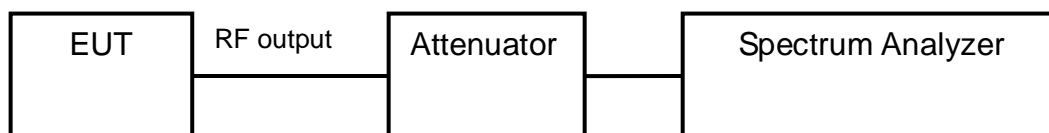

6.4.7 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

The test results are shown in Appendix A.


6.5 Band-edge measurement

6.5.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.5kPa

6.5.2 Test Description

For the following out of band conducted spurious emissions plots, the EUT was set to transmit at maximum power with the largest packet size available. The worst case spurious emissions were found in this configuration.

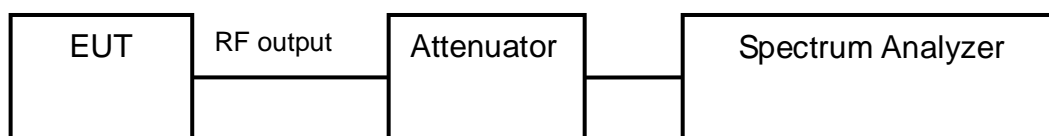

6.5.3 Test limit

Part 15.247(d)

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.5.4 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05 Section 12.1

6.5.5 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100kHz.
- Set the VBW \geq 300kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

6.5.7 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A .

6.6 Spurious Radiated Emissions

6.6.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.5kPa

6.6.2 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.6.3 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209.

Frequency [MHz]	Field strength [μV/m]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dBμV/m) = 20 log (Limit (μV/m)/1μV/m)

Frequency [MHz]	Detector	Unit (dBμV/m)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits

6.6.4 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05 – Section 12.2.7

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The

final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.6.5 Test Settings

Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz > 1/T
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times (1/duty cycle) traces

Peak Field Strength Measurements per Section 12.2.7of KDB 558074 (Part 15.35)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.6 Test Setup


For Radiated emission below 30MHz

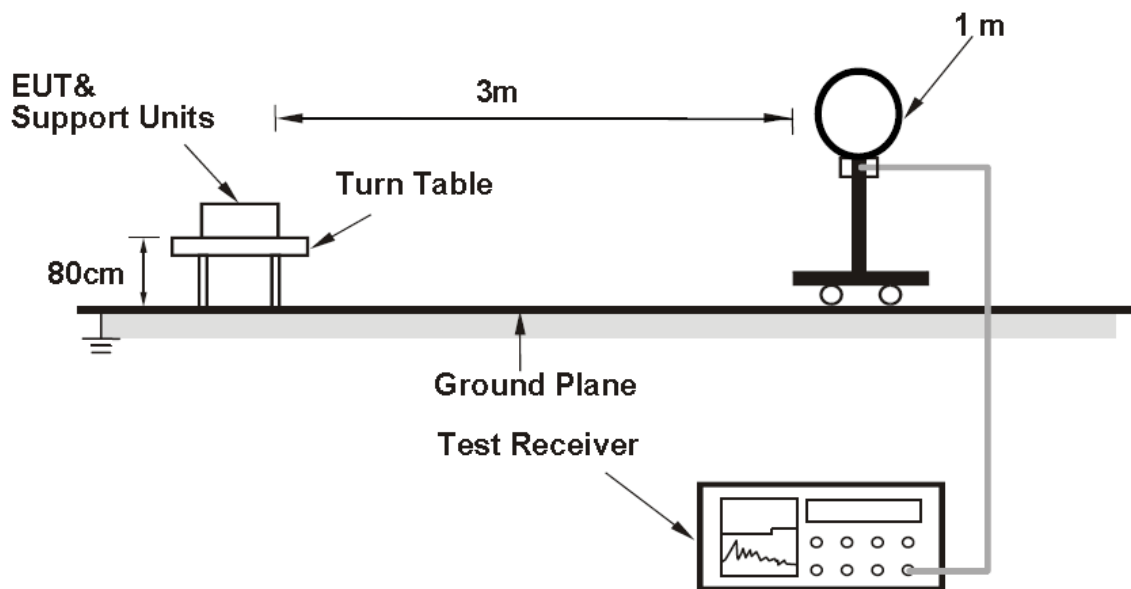

For Radiated emission 30MHz to 1GHz

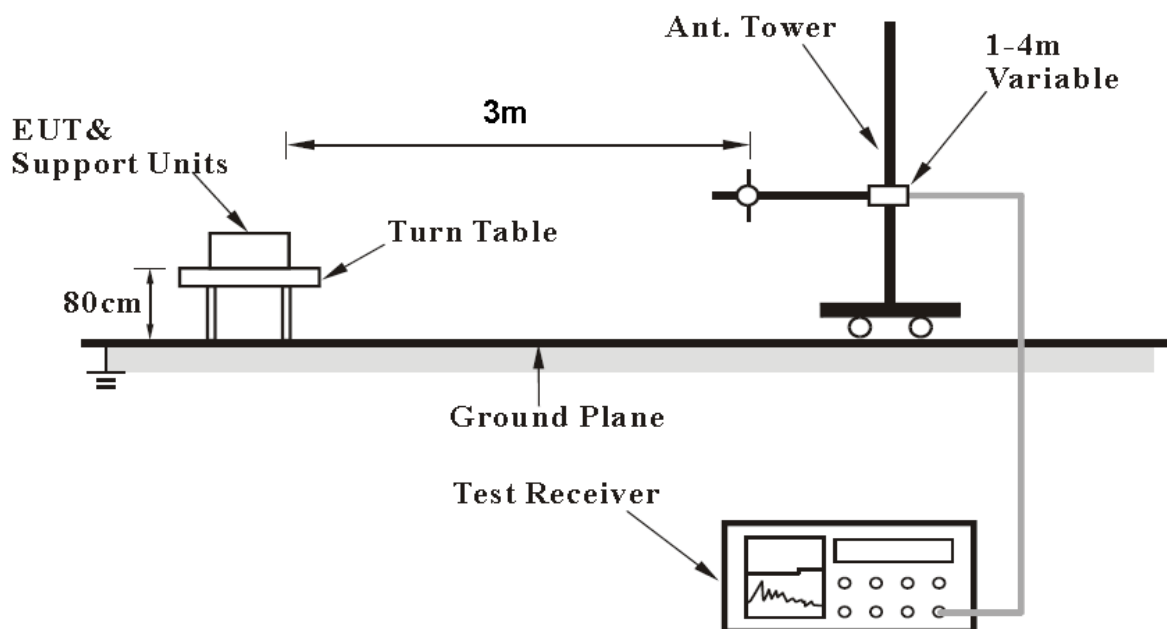

For Radiated emission above 1GHz

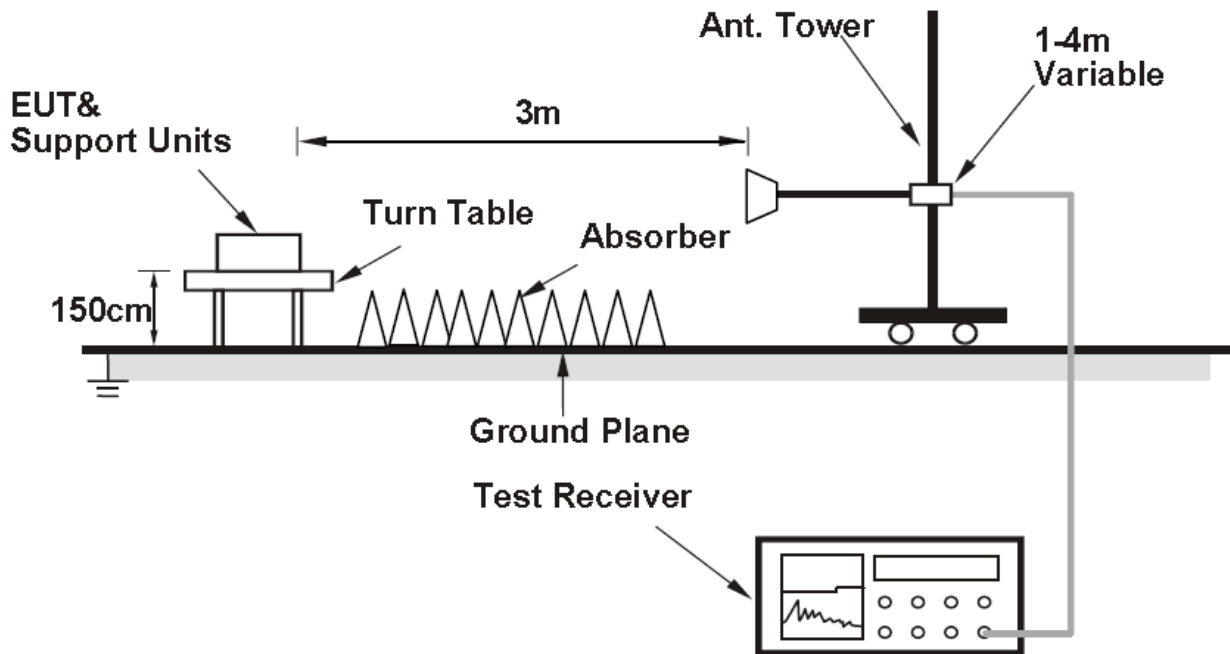

6.6.7 Test result

The test results are shown in Appendix B.

6.7 AC Power line Conducted Emission

6.7.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.5kPa

6.7.2 Test limit

FCC Part15.207, RSS-247

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

6.7.3 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.


b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/60Hz.

6.7.4 Test Setup

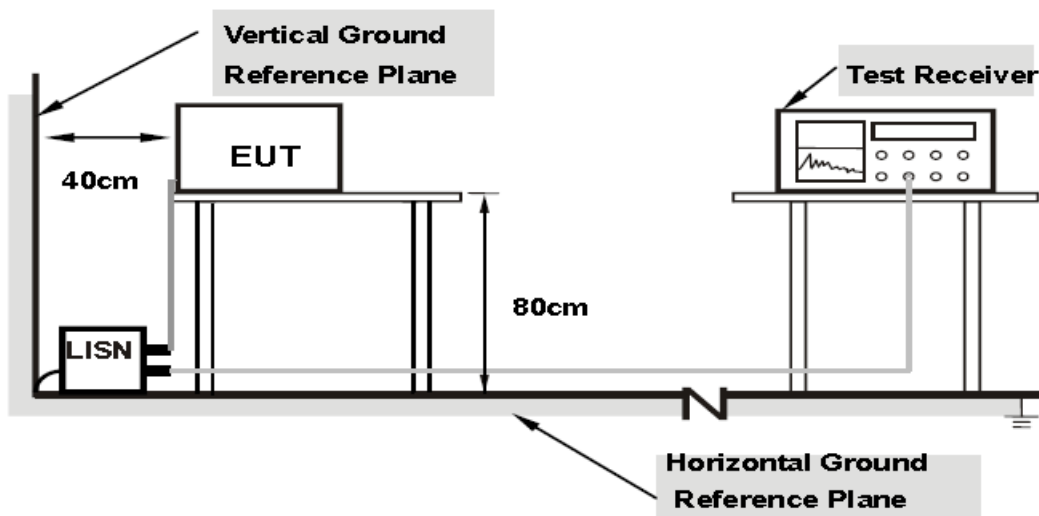

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.5 Test result

The test results are shown in AppendixB .

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
Occupied Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Spurious emissions	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB

8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer FSV	ROHDE&SCHWARZ	101065	2018.08.20	2019.08.19
2.	Power Meter E4416A	Agilent	MY52370013	2018.03.01	2019.02.28
3.	Power Sensor E9327A	Agilent	MY52420006	2018.03.01	2019.02.28
4.	Attenuator 6810.17.B	HUBER+SUHNER	768710	2018.08.20	2019.08.19
5.	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	----	----
6.	Turn table Diameter:5m	FRANKONIA	----	----	----
7.	Antenna master SAC(MA4.0)	MATURO	----	----	----
8.	9.080m×5.255m×3.525m Shielding room	FRANKONIA	----	----	----
9.	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100512	2018.08.20	2019.08.19
10.	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2018.08.20	2019.08.19
11.	ESI 40 EMI test receiver	R&S	100015	2018.08.20	2019.08.19
12.	ESCS30 EMI test receiver	R&S	100029	2018.08.20	2019.08.19
13.	HL562 Receive antenna	R&S	100167	2018.08.20	2019.08.19
14.	ENV216 AMN	R&S	3560.6550.12	2018.08.20	2019.08.19

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

Please refer to the attachment.

APPENDIX B – TEST DATA OF RADIATED EMISSION

Please refer to the attachment.

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
802.11b	1Mbps
802.11g	6Mbps
802.11n HT20	MCS0(6.5 Mbps)

Conducted power

Modulation type	Peak power output (dBm)		
	2412MHz	2437MHz	2462MHz
11b	18.02	18.32	17.77
11g	20.45	20.79	19.97
11n HT20	20.55	20.94	20.01


Modulation type	Average power output (dBm)		
	2412MHz	2437MHz	2462MHz
11b	15.48	15.86	15.30
11g	12.76	13.48	12.47
11n HT20	13.35	13.38	12.08

6dB Bandwidth

Offset 10.8dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 0.6dB


Test Mode: 802.11b

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(kHz)
2412	1	9065.0
2437	6	8591.1
2462	11	9101.1

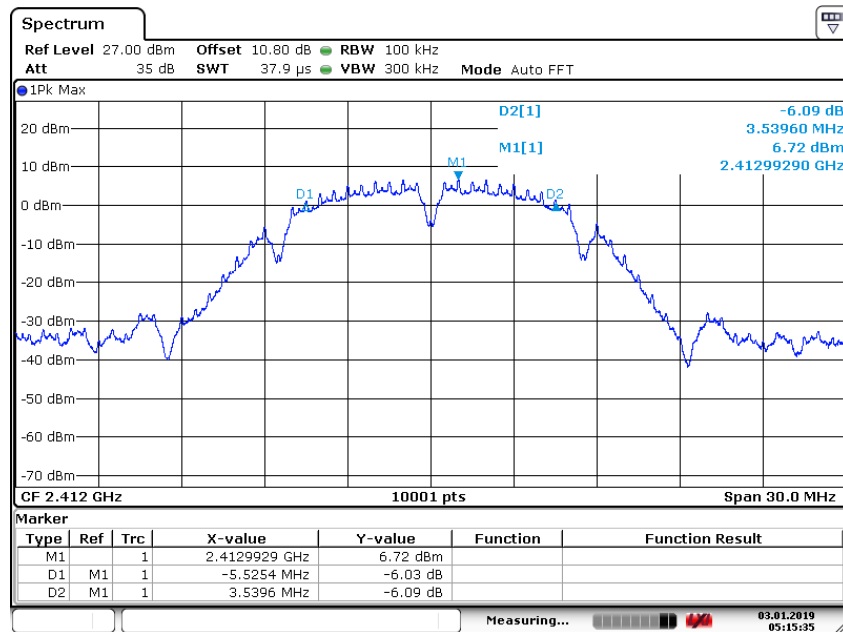


Date: 3 JAN 2019 05:15:35

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11b

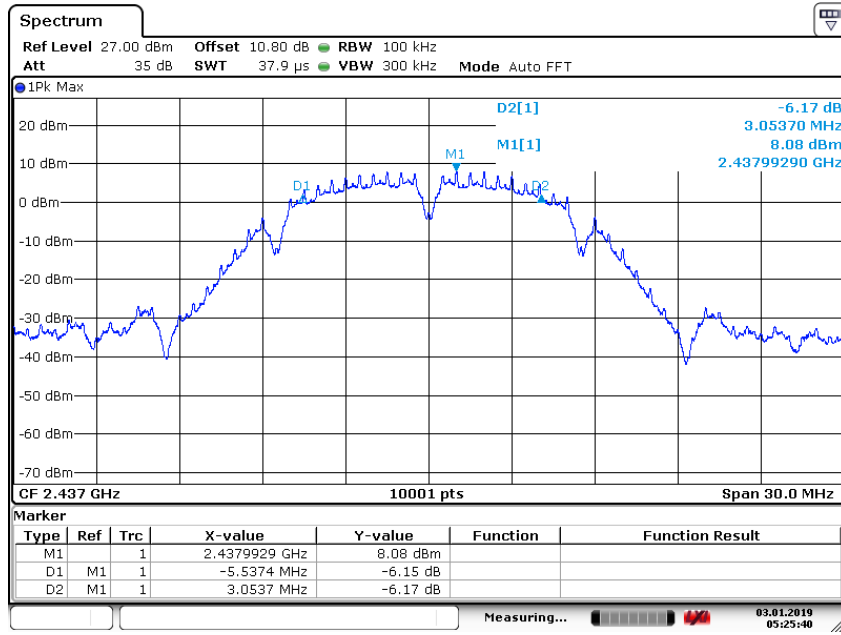

Date: 3.JAN.2019 05:25:40

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11b

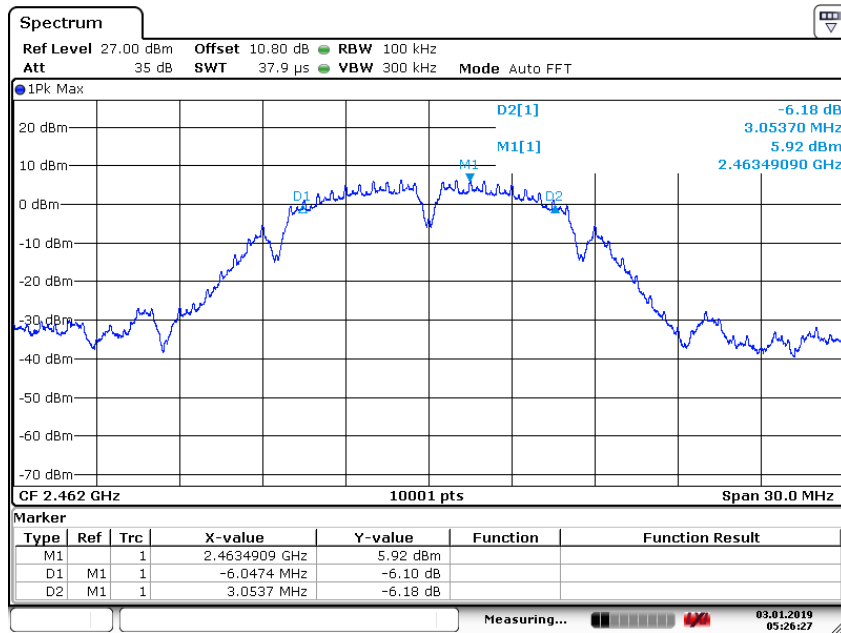


Date: 3.JAN.2019 05:26:27

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b


Test Mode: 802.11g

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(kHz)
2412	1	16338.3
2437	6	16328.4
2462	11	16338.4

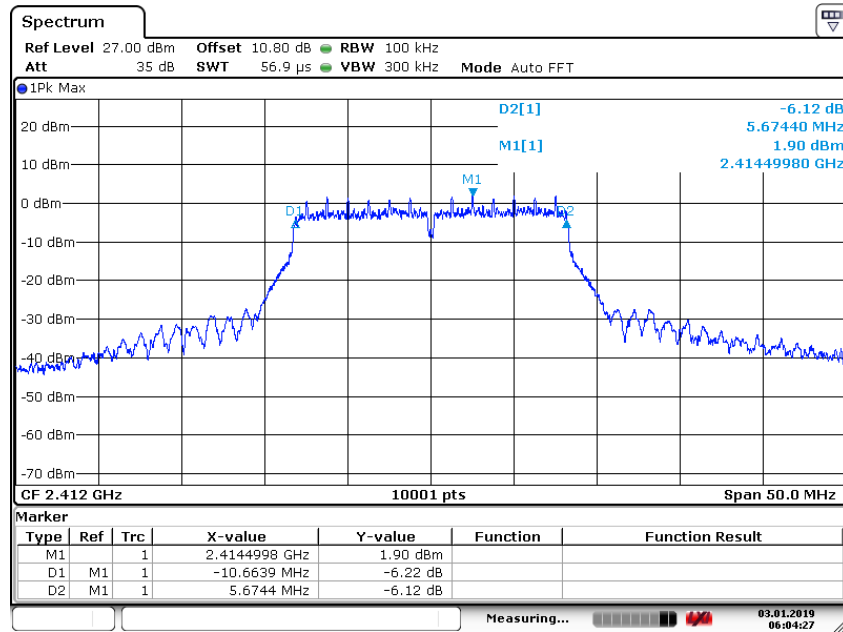


Date: 3 JAN 2019 06:04:28

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g

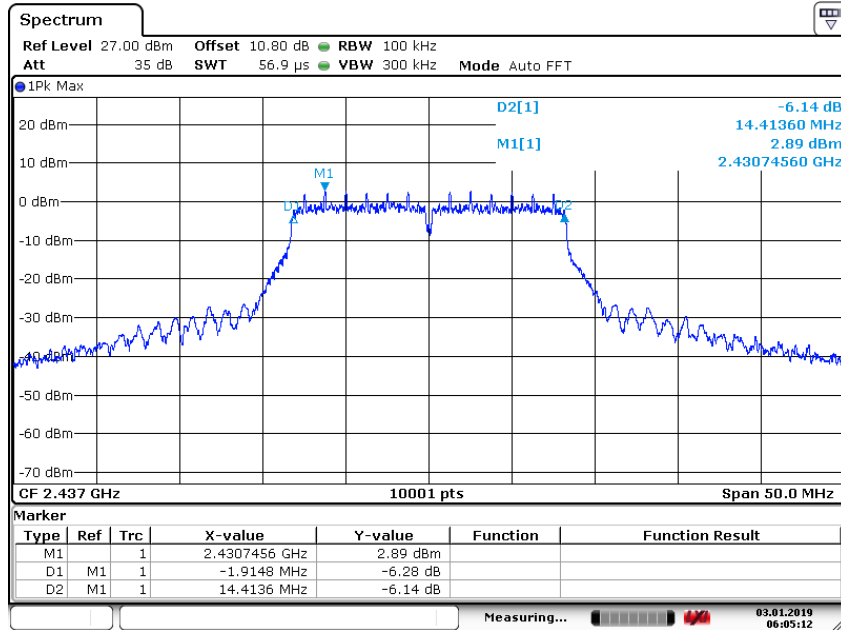

Date: 3 JAN 2019 06:05:12

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11g

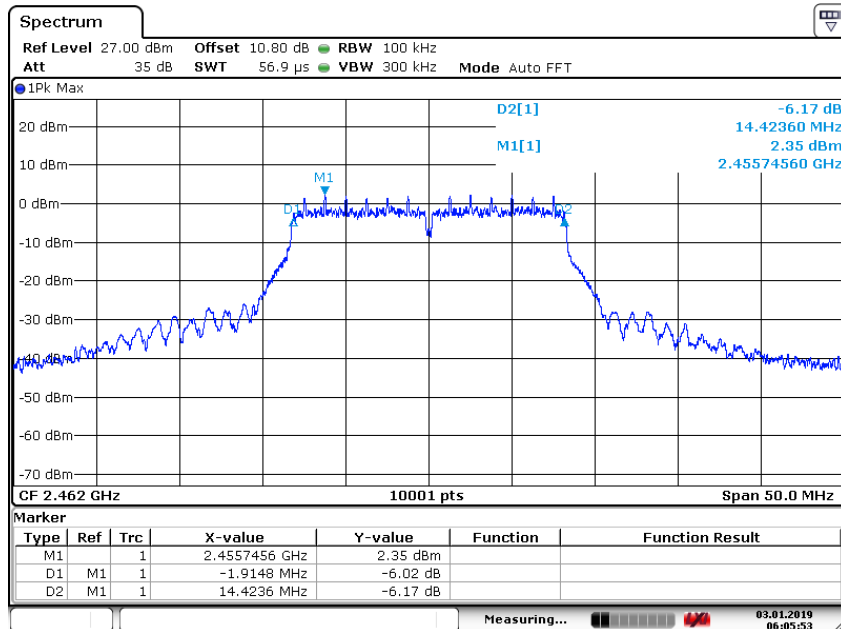


Date: 3 JAN 2019 06:05:53

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g


Test Mode: 802.11n (HT20)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(kHz)
2412	1	17568.3
2437	6	17558.2
2462	11	17578.2

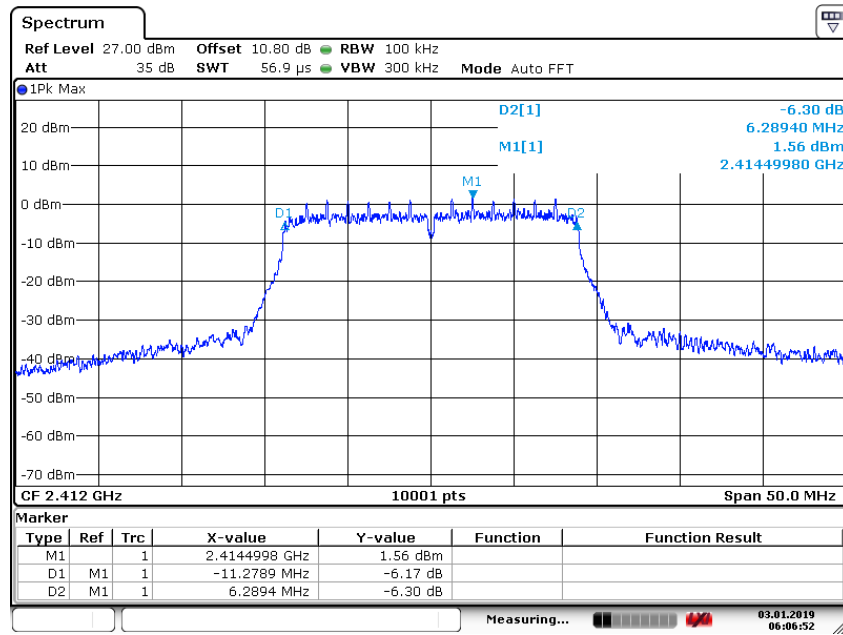


Date: 3 JAN 2019 06:06:52

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n (HT20)

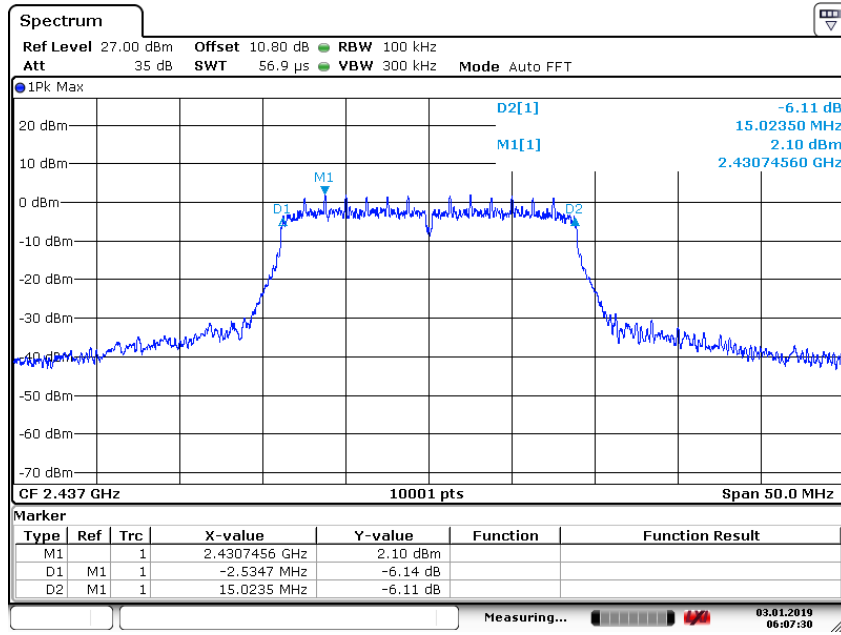

Date: 3.JAN.2019 06:07:30

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11n (HT20)

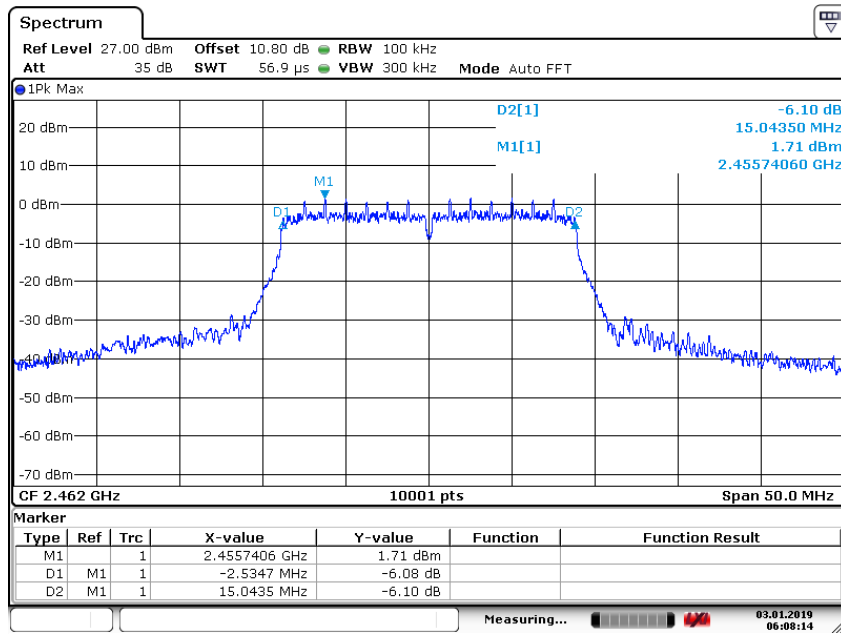

Date: 3.JAN.2019 06:08:14


Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n (HT20)

Transmitter Power Spectral Density

Offset 10.8dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 0.6dB


Test Mode: 802.11b

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	5.11
2437	6	5.52
2462	11	4.88

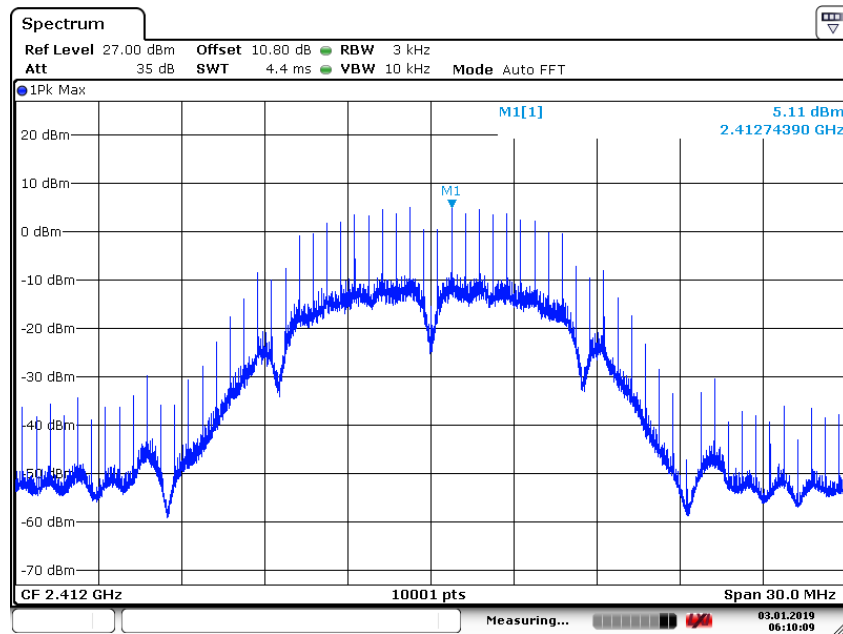


Date: 3 JAN 2019 06:10:09

Carrier frequency (MHz): 2412
Channel No.1
Test Mode: 802.11b

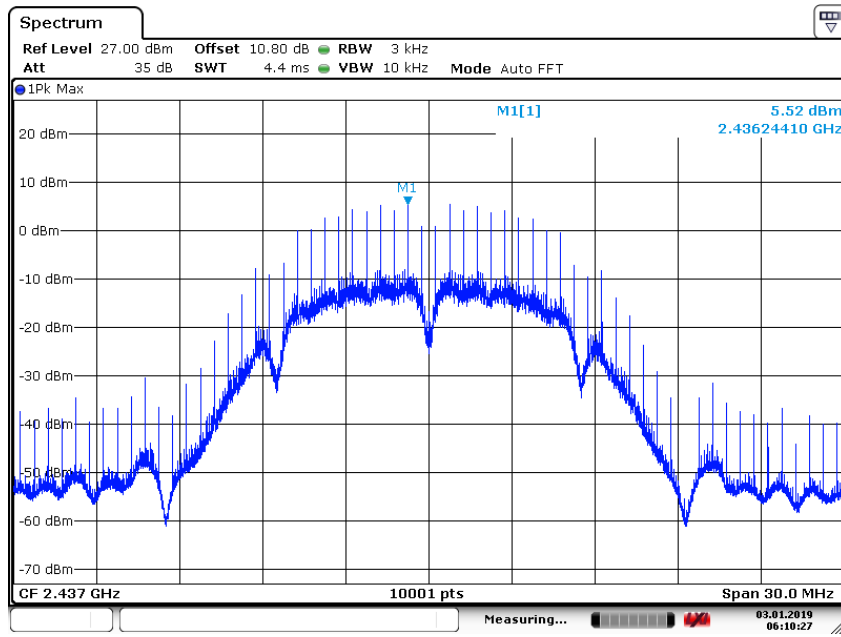

Date: 3 JAN 2019 06:10:27

Carrier frequency (MHz): 2437
 Channel No.6
 Test Mode: 802.11b

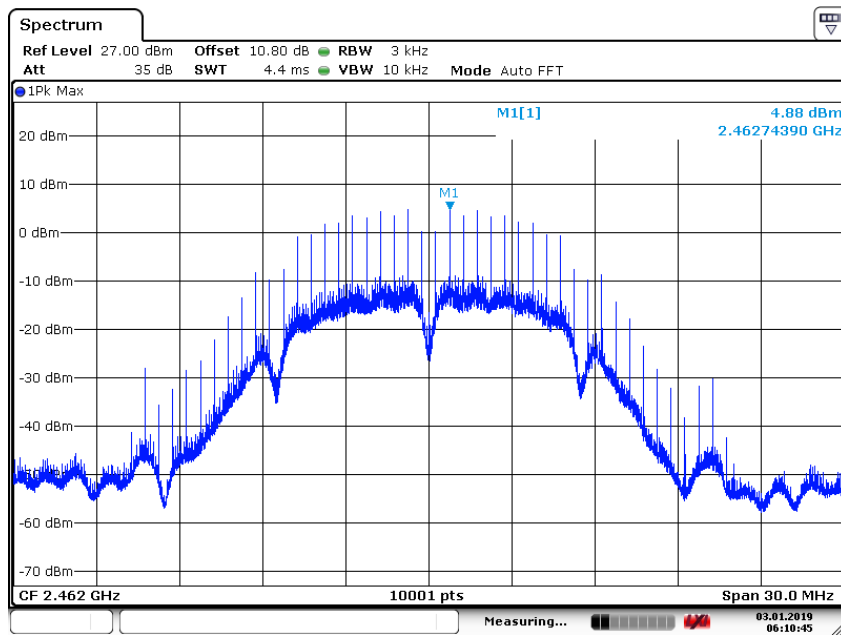


Date: 3 JAN 2019 06:10:45

Carrier frequency (MHz): 2462
 Channel No.11
 Test Mode: 802.11b


Test Mode: 802.11g

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-14.41
2442	6	-11.49
2472	11	-12.71

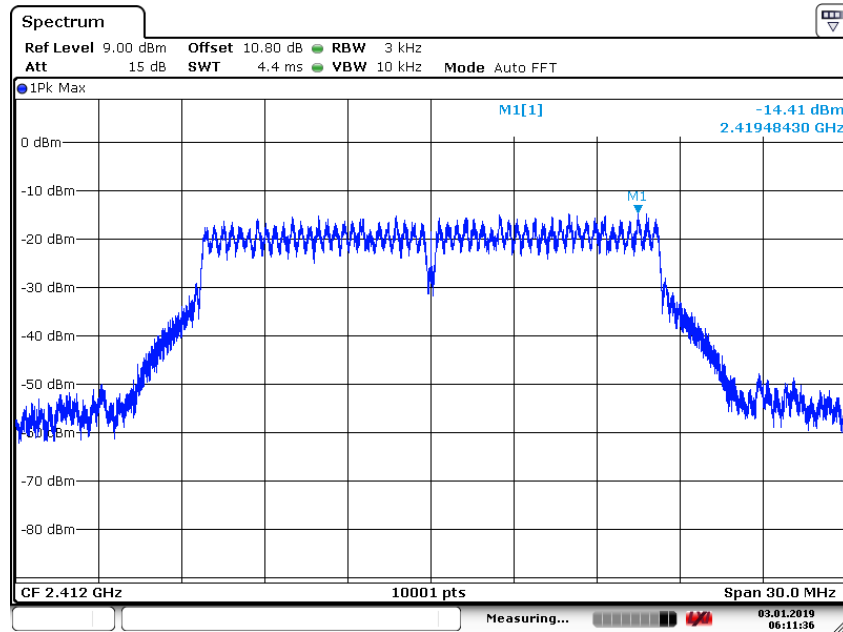


Date: 3 JAN 2019 06:11:37

Carrier frequency (MHz): 2412
Channel No.1
Test Mode: 802.11g

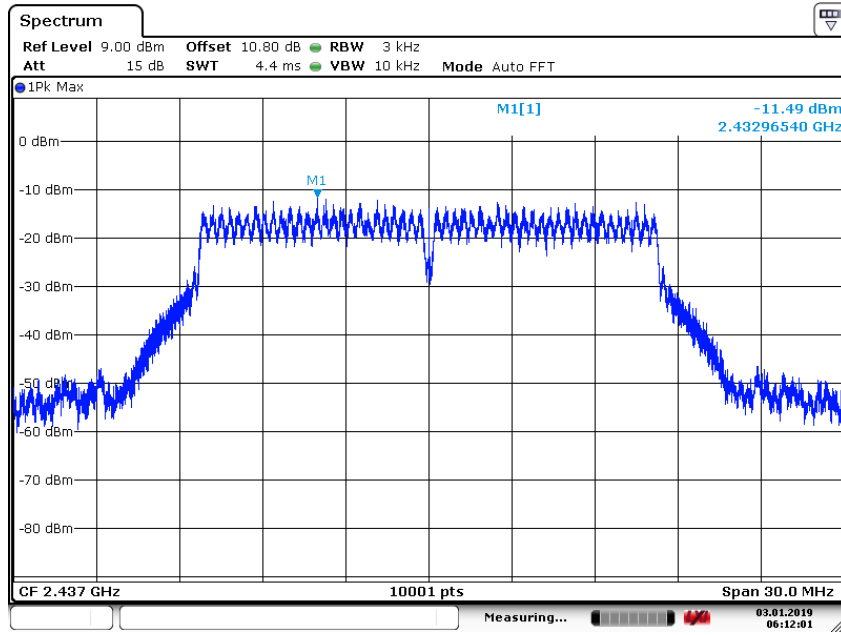

Date: 3 JAN 2019 06:12:01

Carrier frequency (MHz): 2437
Channel No.6
Test Mode: 802.11g

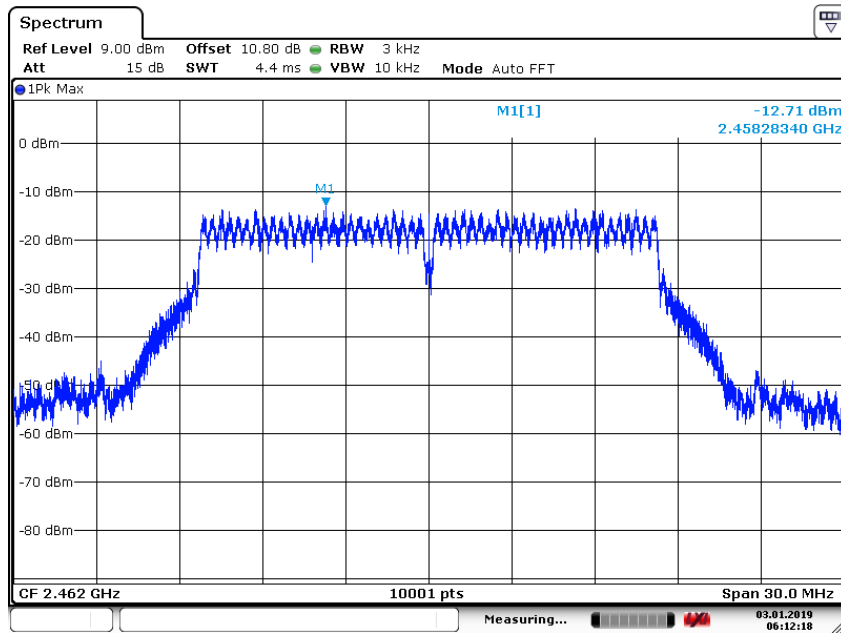


Date: 3 JAN 2019 06:12:18

Carrier frequency (MHz): 2462
Channel No.11
Test Mode: 802.11g


Test Mode: 802.11n (HT20)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-13.07
2437	6	-12.30
2462	11	-13.81

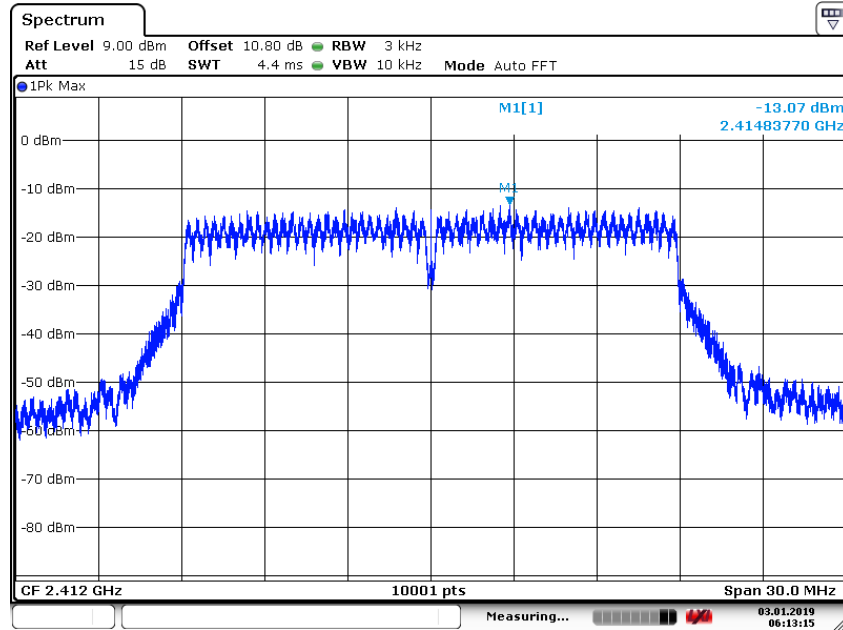


Date: 3 JAN 2019 06:13:15

Carrier frequency (MHz): 2412
Channel No.1
Test Mode: 802.11n (HT20)

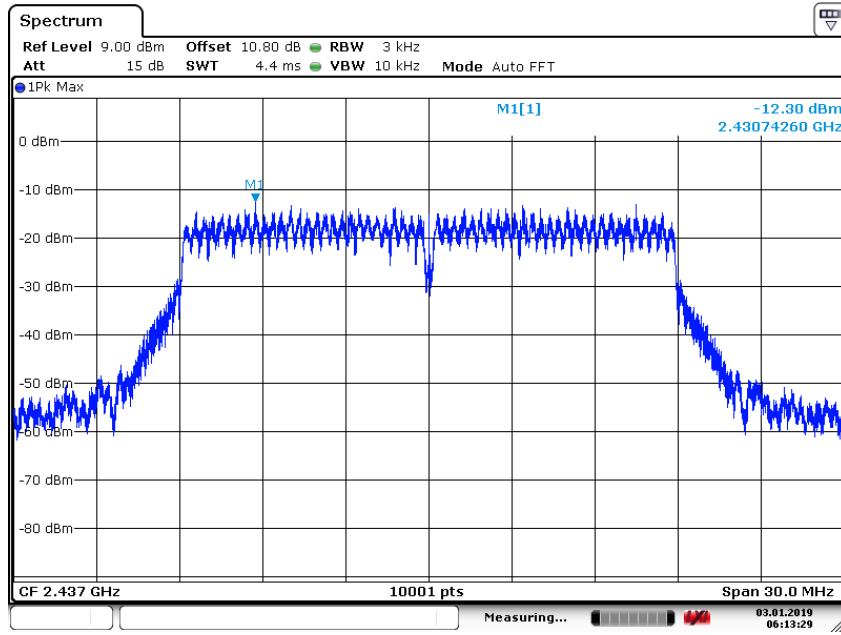

Date: 3 JAN 2019 06:13:29

Carrier frequency (MHz): 2437
Channel No.6
Test Mode: 802.11n (HT20)

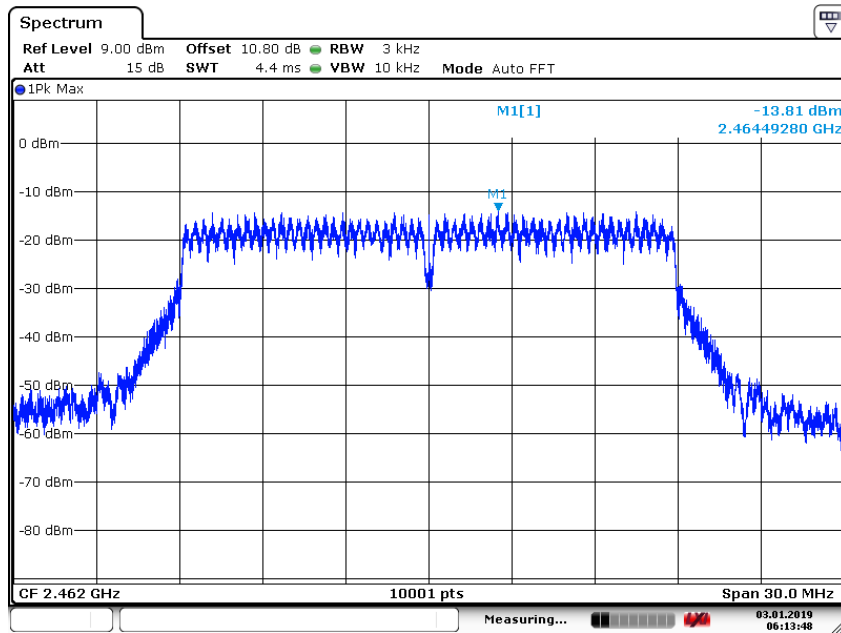

Date: 3 JAN 2019 06:13:48



Carrier frequency (MHz): 2462
Channel No.11
Test Mode: 802.11n (HT20)

Conducted Out of band emission measurement



Offset 10.8dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 0.6dB

802.11b



CH1

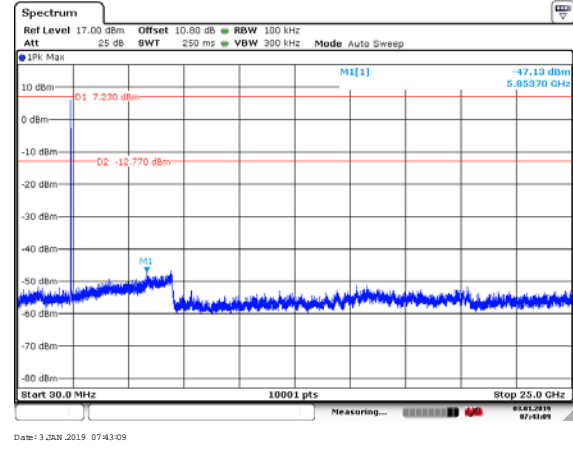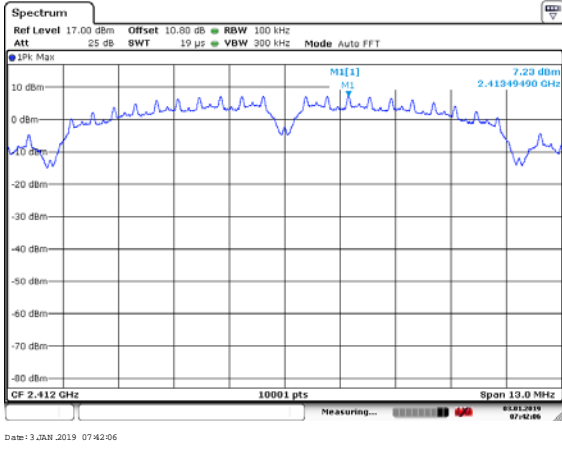

CH6

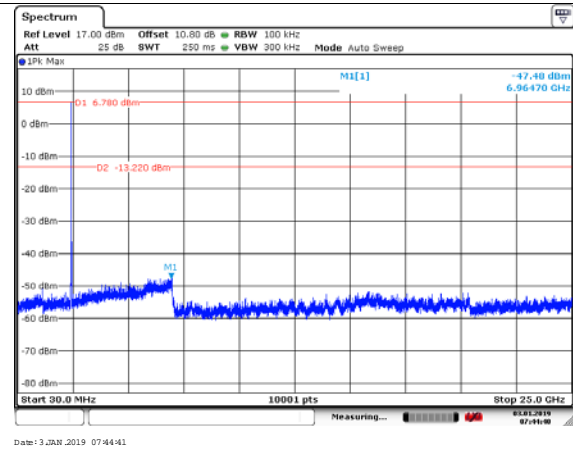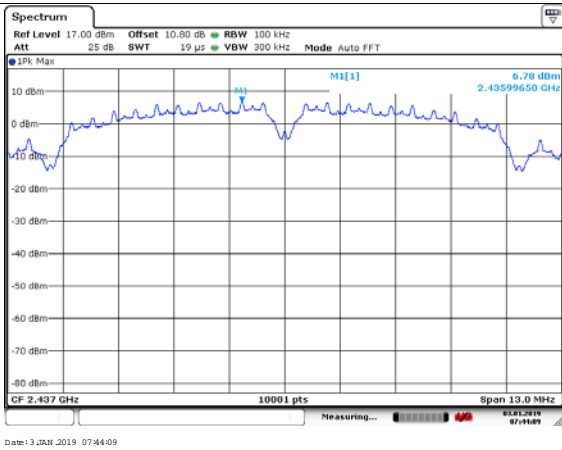


CH11

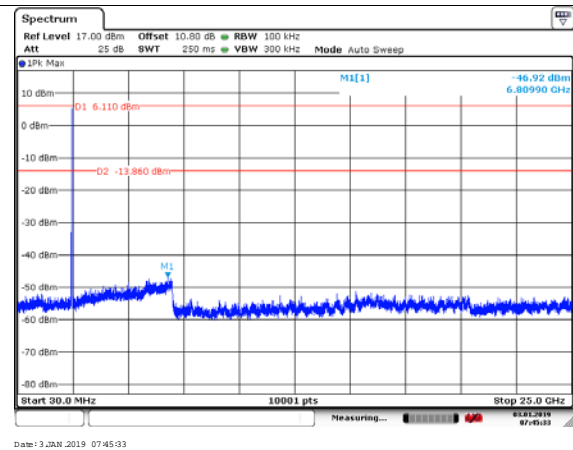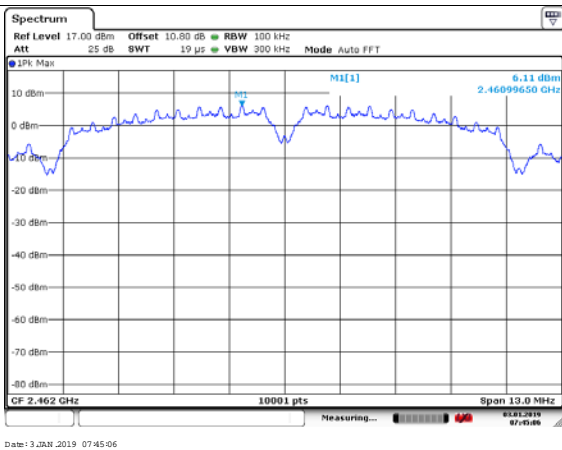


802.11g

CH1

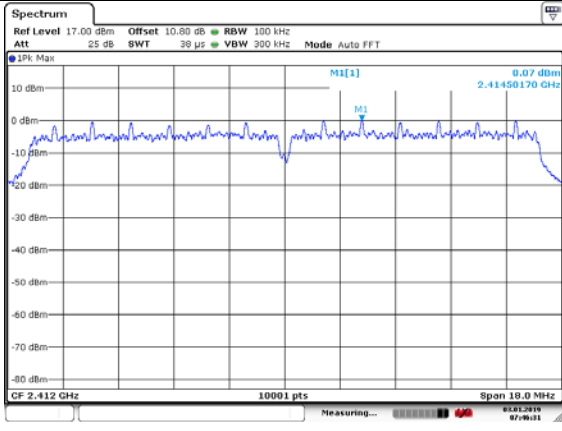


Date: 3 JAN 2019 07:46:32

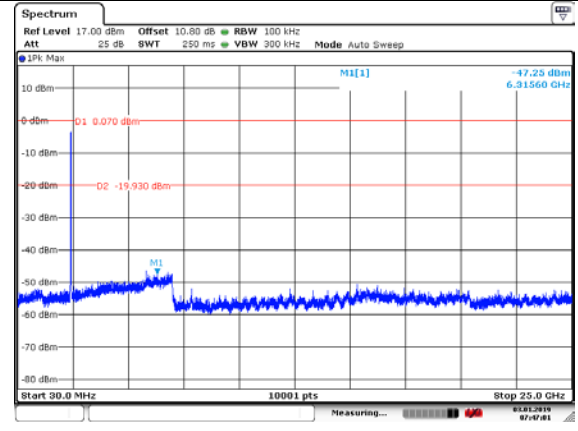


Date: 3 JAN 2019 07:47:02

CH6

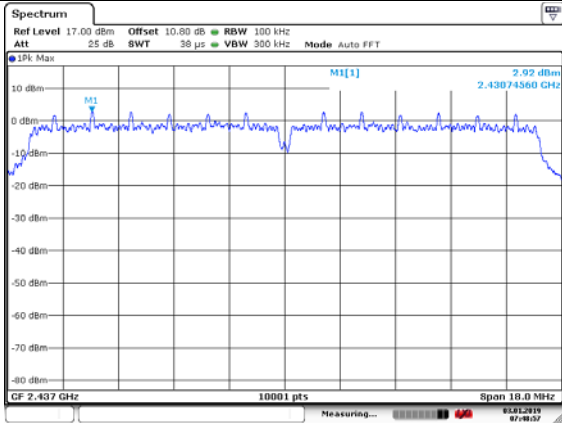


Date: 3 JAN 2019 07:48:57

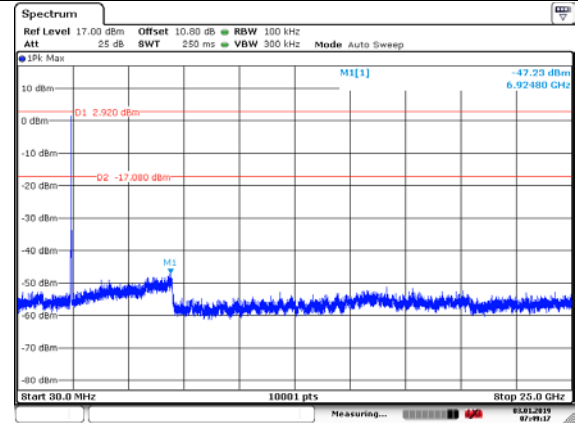


Date: 3 JAN 2019 07:49:17

CH11

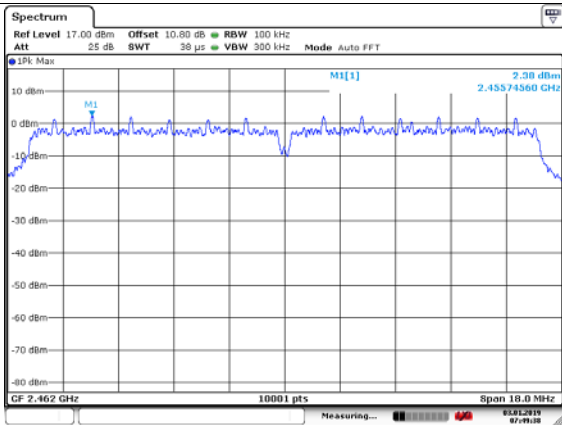



Date: 3 JAN 2019 07:49:38

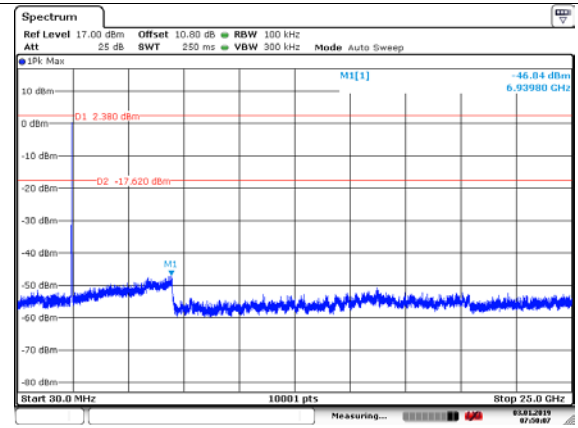

Date: 3 JAN 2019 07:50:07

802.11n (HT20)



CH1

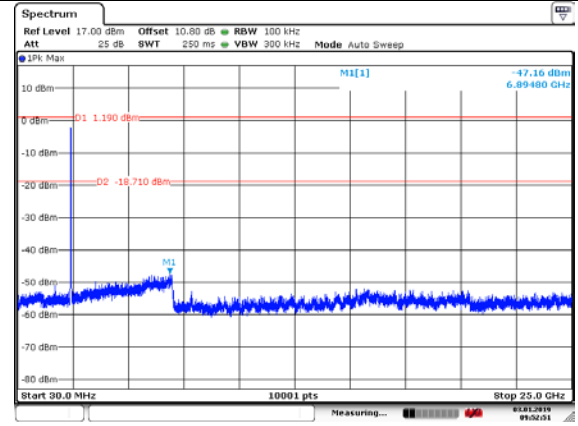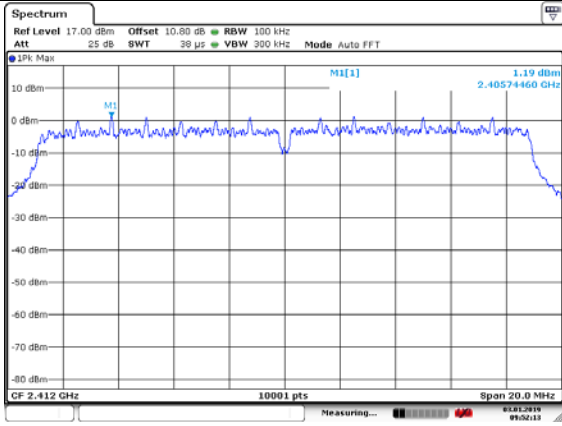

Date: 3 JAN 2019 09:52:13

Date: 3 JAN 2019 09:52:50



CH6

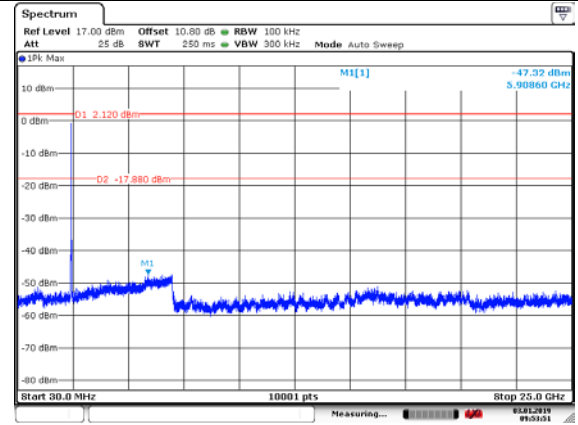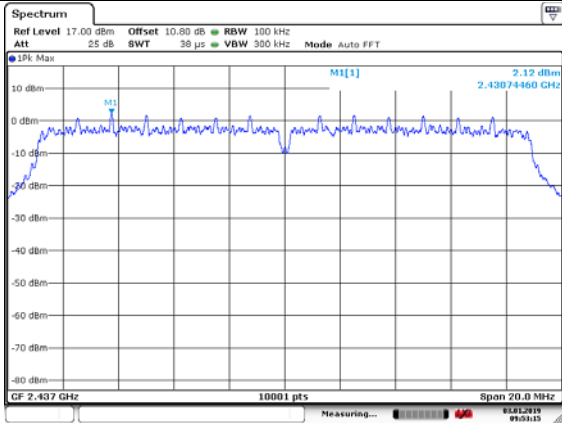

Date: 3 JAN 2019 09:53:15

Date: 3 JAN 2019 09:53:51

CH11

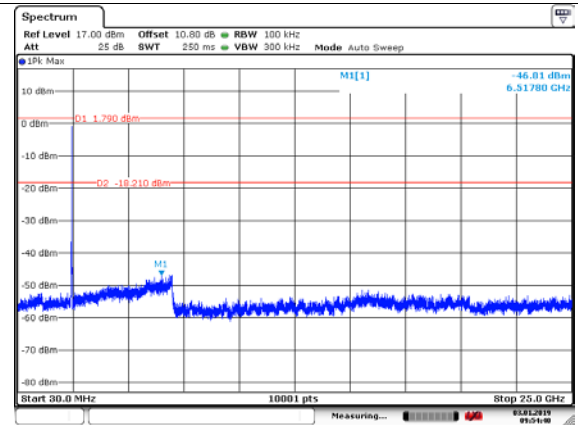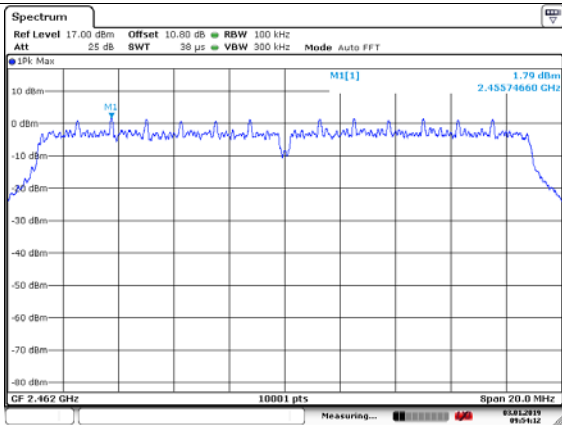


Date: 3 JAN 2019 09:54:12

Date: 3 JAN 2019 09:54:40


Band edge measurement (RF Conducted measurement)

Offset 10.8dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 0.6dB
802.11b

CH1

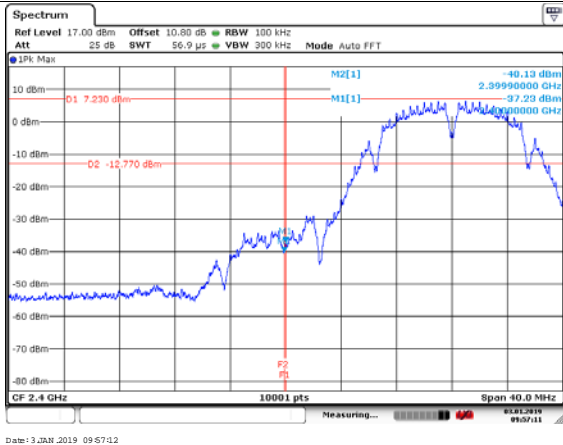


CH11

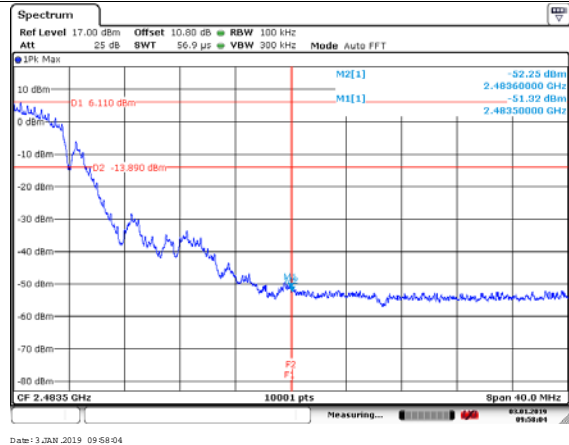


802.11g

CH1

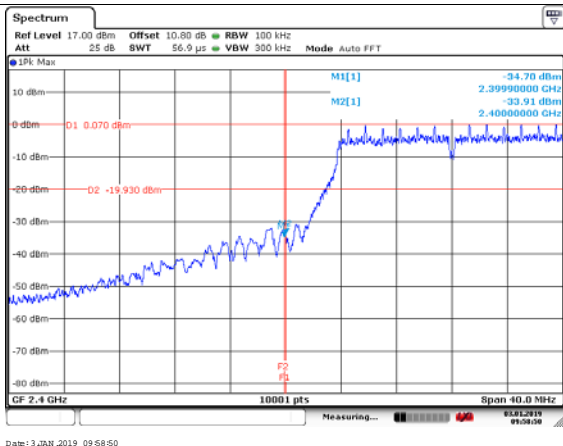


CH11

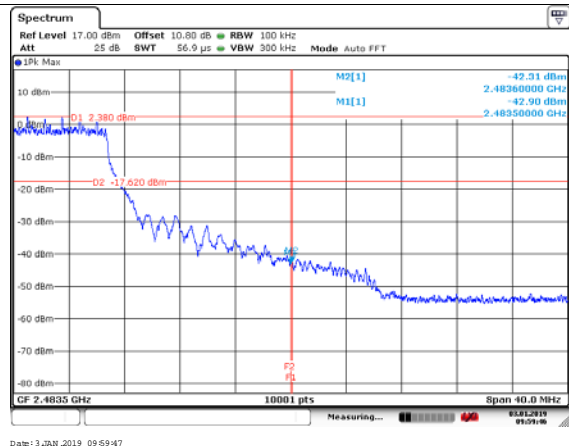


802.11n (HT20)

CH1

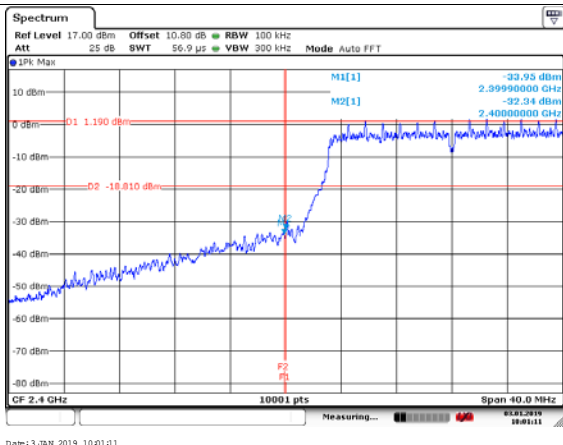

CH11

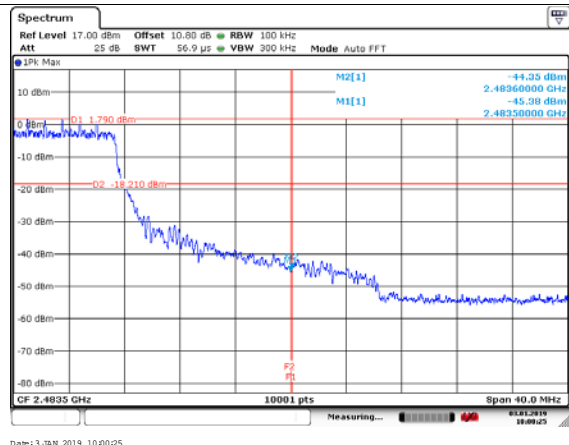

APPENDIX B – TEST DATA OF RADIATED EMISSION

Radiated Emission Band Edge

The worst case attitude: The mobile lay down.

Peak detector: RBW=1MHz,VBW=3MHz,sweep time=200ms;

Average detector: RBW=1MHz,VBW=3MHz,sweep time=auto;

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	103.50	69.50	N/A	N/A	8.90	25.10
2	2390	49.32	15.32	-24.68	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	95.55	61.55	N/A	N/A	8.90	25.10
2	2390	44.55	10.55	-29.45	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	89.17	55.17	N/A	N/A	8.90	25.10
2	2390	36.15	2.15	-17.85	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	85.51	51.51	N/A	N/A	8.90	25.10
2	2390	35.61	1.61	-18.39	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	102.47	68.47	N/A	N/A	8.90	25.10
2	2483.5	49.59	15.59	-24.41	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	97.16	63.16	N/A	N/A	8.90	25.10
2	2483.5	43.30	9.30	-30.70	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Vertical
Detector: AVerage

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	87.27	53.27	N/A	N/A	8.90	25.10
2	2483.5	38.07	4.07	-15.93	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Horizontal
Detector: AVerage

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	86.37	52.37	N/A	N/A	8.90	25.10
2	2483.5	37.13	3.13	-16.87	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	102.80	68.80	N/A	N/A	8.90	25.10
2	2390	50.00	16.00	-24.00	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	96.29	62.29	N/A	N/A	8.90	25.10
2	2390	45.10	11.10	-28.90	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity: Vertical
Detector: AVerage

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	89.09	55.09	N/A	N/A	8.90	25.10
2	2390	36.48	2.48	-17.52	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity:Horizontal
Detector: AVerage

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	83.63	49.63	N/A	N/A	8.90	25.10
2	2390	35.63	1.63	-18.37	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	102.81	68.81	N/A	N/A	8.90	25.10
2	2483.5	49.29	15.29	-24.71	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	96.52	62.52	N/A	N/A	8.90	25.10
2	2483.5	45.68	11.68	-28.32	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity: Vertical
Detector: AVerage

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	89.51	55.51	N/A	N/A	8.90	25.10
2	2483.5	36.93	2.93	-17.07	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity:Horizontal
Detector: AVerage

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	85.13	51.13	N/A	N/A	8.90	25.10
2	2483.5	35.73	1.73	-18.27	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	2412	102.01	68.01	N/A	N/A	8.90	25.10
2	2390	46.94	12.94	-27.06	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	2412	95.21	61.21	N/A	N/A	8.90	25.10
2	2390	45.60	11.60	-28.40	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: AVerage

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	2412	89.53	55.53	N/A	N/A	8.90	25.10
2	2390	36.99	2.99	-17.01	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: AVerage

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	2412	84.65	50.65	N/A	N/A	8.90	25.10
2	2390	35.86	1.86	-18.14	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	103.31	69.31	N/A	N/A	8.90	25.10
2	2483.5	48.11	14.11	-25.89	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	96.27	62.27	N/A	N/A	8.90	25.10
2	2483.5	46.60	12.60	-27.40	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: AVerage

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	89.26	55.26	N/A	N/A	8.90	25.10
2	2483.5	36.89	2.89	-17.11	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: AVerage

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	87.85	53.85	N/A	N/A	8.90	25.10
2	2483.5	35.55	1.55	-18.45	54.00	8.90	25.10

For 802.11b Channel No.:1

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.737917	28.49	-14.2	42.69	Horizontal	40.00
33.758750	26.45	-15.2	41.65	Vertical	40.00
35.617917	20.56	-16.0	36.56	Horizontal	40.00
37.557917	26.10	-16.9	43.00	Vertical	40.00
39.578750	24.51	-17.8	42.31	Vertical	40.00
41.518750	25.29	-18.9	44.19	Vertical	40.00
43.377917	25.09	-20.0	45.09	Vertical	40.00
44.590417	20.92	-20.7	41.62	Horizontal	40.00
45.317917	21.84	-21.2	43.04	Vertical	40.00
914.761250	27.19	-4.6	31.79	Vertical	46.00

For 802.11b Channel No.:6

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.970000	29.61	-13.9	43.51	Vertical	40.00
34.890417	27.04	-15.7	42.74	Horizontal	40.00
36.790000	24.86	-16.5	41.36	Vertical	40.00
38.770417	23.60	-17.4	41.00	Vertical	40.00
40.710417	26.90	-18.4	45.30	Vertical	40.00
42.690833	25.68	-19.6	45.28	Horizontal	40.00
44.590417	20.17	-20.7	40.87	Vertical	40.00
46.530417	22.22	-22.0	44.22	Horizontal	40.00
48.551250	19.93	-23.2	43.13	Vertical	40.00
52.350417	21.82	-24.8	46.62	Vertical	40.00

For 802.11b Channel No.:11

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.808333	24.29	-13.8	38.09	Vertical	40.00
32.748333	22.59	-14.7	37.29	Horizontal	40.00
34.688333	26.54	-15.6	42.14	Vertical	40.00
36.628333	25.49	-16.5	41.99	Vertical	40.00
38.527917	24.50	-17.3	41.80	Horizontal	40.00
40.508333	27.72	-18.3	46.02	Vertical	40.00
42.448333	23.07	-19.4	42.47	Horizontal	40.00
44.388333	23.25	-20.6	43.85	Vertical	40.00
46.287917	23.25	-21.8	45.05	Vertical	40.00
50.208333	20.44	-24.2	44.64	Vertical	40.00

For 802.11g Channel No.:1

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.848750	26.84	-13.8	40.64	Vertical	40.00
34.728750	26.12	-15.6	41.72	Horizontal	40.00
36.709167	24.42	-16.5	40.92	Vertical	40.00
38.649167	24.86	-17.4	42.26	Vertical	40.00
40.589167	27.00	-18.3	45.30	Horizontal	40.00
42.529167	23.44	-19.5	42.94	Vertical	40.00
44.428750	19.92	-20.6	40.52	Horizontal	40.00
46.368750	23.54	-21.9	45.44	Vertical	40.00
51.622917	18.42	-24.6	43.02	Vertical	40.00
52.188750	20.70	-24.7	45.40	Horizontal	40.00

For 802.11g Channel No.:6

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.425000	25.60	-14.6	40.20	Vertical	40.00
34.405417	26.11	-15.5	41.61	Vertical	40.00
35.617917	21.59	-16.0	37.59	Horizontal	40.00
36.345417	21.41	-16.3	37.71	Vertical	40.00
38.285417	24.73	-17.2	41.93	Vertical	40.00
40.225417	24.44	-18.1	42.54	Vertical	40.00
42.205833	20.35	-19.3	39.65	Vertical	40.00
44.065000	23.80	-20.4	44.20	Vertical	40.00
46.005000	24.30	-21.6	45.90	Horizontal	40.00
51.825000	20.15	-24.6	44.75	Vertical	40.00

For 802.11g Channel No.:11

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.131667	25.64	-13.9	39.54	Vertical	40.00
33.112083	19.26	-14.9	34.16	Vertical	40.00
35.011667	19.76	-15.7	35.46	Horizontal	40.00
36.951667	18.54	-16.6	35.14	Vertical	40.00
38.891667	18.48	-17.5	35.98	Vertical	40.00
40.831667	18.74	-18.5	37.24	Vertical	40.00
42.771667	21.34	-19.6	40.94	Vertical	40.00
48.591667	20.02	-23.3	43.32	Horizontal	40.00
50.531667	19.36	-24.3	43.66	Vertical	40.00
52.512083	18.47	-24.8	43.27	Vertical	40.00

For 802.11n(HT20) Channel No.:1

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.121250	22.25	-13.5	35.75	Vertical	40.00
32.101667	17.52	-14.4	31.92	Horizontal	40.00
33.960833	22.24	-15.3	37.54	Vertical	40.00
39.821250	22.19	-17.9	40.09	Vertical	40.00
41.761250	21.04	-19.0	40.04	Vertical	40.00
43.701250	19.24	-20.2	39.44	Horizontal	40.00
45.641250	19.78	-21.4	41.18	Vertical	40.00
47.581250	20.26	-22.6	42.86	Vertical	40.00
49.521250	19.18	-23.9	43.08	Vertical	40.00
53.401250	20.35	-25.0	45.35	Vertical	40.00

For 802.11n(HT20) Channel No.:6


Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.404167	25.38	-13.6	38.98	Vertical	40.00
32.263333	17.55	-14.5	32.05	Horizontal	40.00
34.243750	22.46	-15.4	37.86	Vertical	40.00
36.183750	21.13	-16.3	37.43	Horizontal	40.00
40.104167	19.51	-18.0	37.51	Vertical	40.00
42.003750	21.20	-19.2	40.40	Vertical	40.00
47.823750	19.85	-22.8	42.65	Vertical	40.00
53.643750	18.71	-25.1	43.81	Horizontal	40.00
73.730833	17.26	-24.2	41.46	Vertical	40.00
74.539167	18.78	-24.1	42.88	Vertical	40.00

For 802.11n(HT20) Channel No.:11

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.404167	18.94	-13.6	32.54	Horizontal	40.00
32.344167	19.07	-14.5	33.57	Vertical	40.00
34.243750	24.14	-15.4	39.54	Horizontal	40.00
36.183750	20.26	-16.3	36.56	Vertical	40.00
40.104167	22.60	-18.0	40.60	Vertical	40.00
42.044167	22.29	-19.2	41.49	Vertical	40.00
47.864167	20.62	-22.8	43.42	Vertical	40.00
51.744167	18.92	-24.6	43.52	Horizontal	40.00
53.684167	19.43	-25.1	44.53	Vertical	40.00
73.973333	17.23	-24.2	41.43	Vertical	40.00

Carrier frequency (MHz): 2412
 Channel No.:1


Full Spectrum

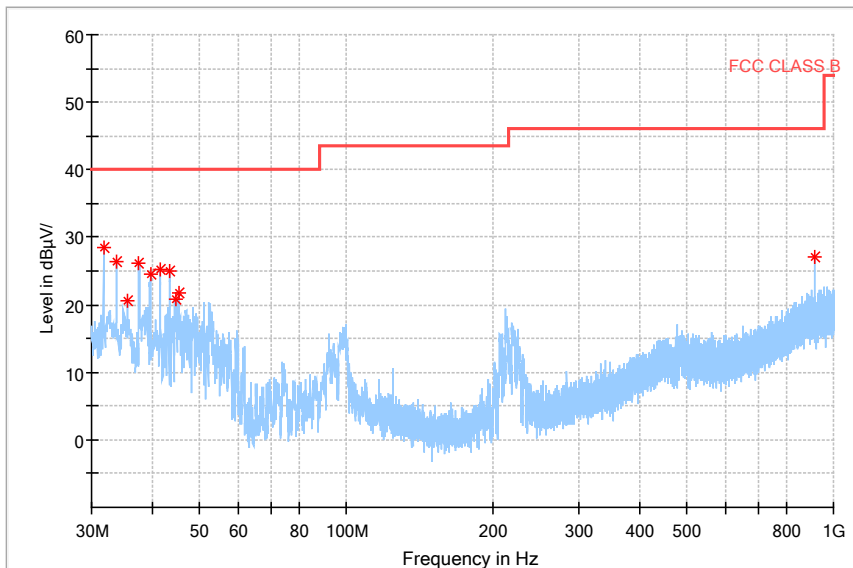

— Preview Result 1-PK+ * Critical_Freqs PK+ — FCC CLASS B

Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Test Mode: 802.11b

Full Spectrum

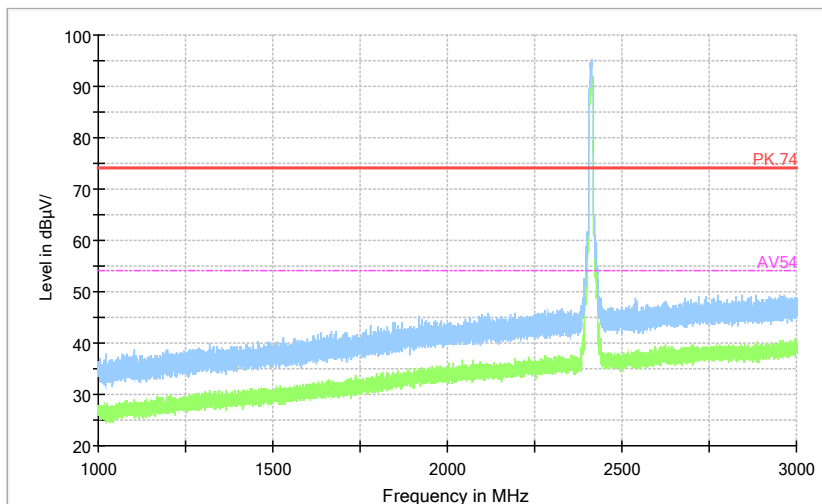


— Preview Result 2-AVG — Preview Result 1-PK+ — PK.74 - - - AV54

Comment

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b

Full Spectrum

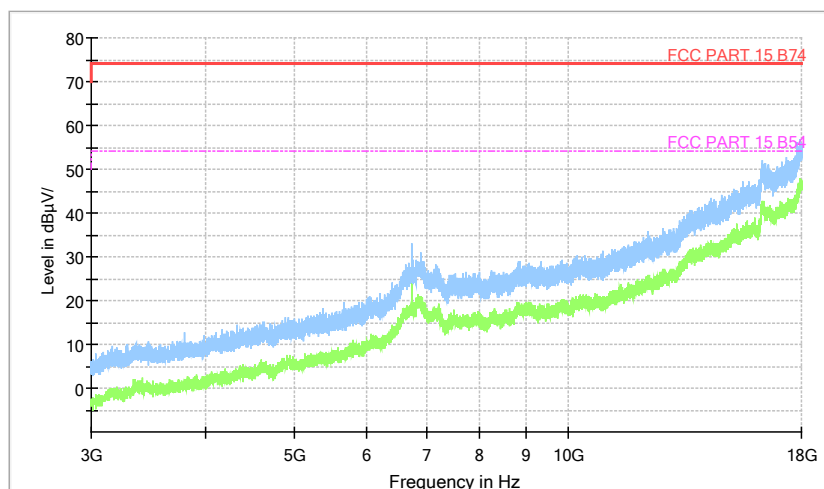


Preview Result 2-AVG Preview Result 1-PK+
FCC PART 15 B74 FCC PART 15 B54

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

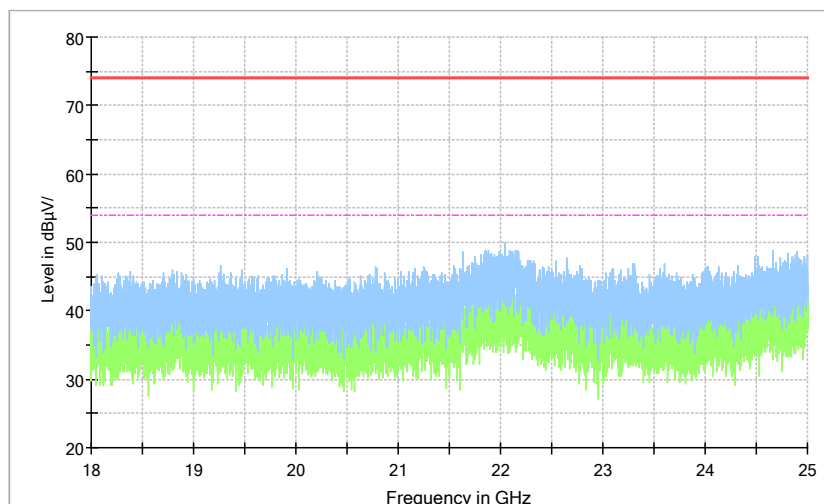


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz -25GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Carrier frequency (MHz): 2437
Channel No.:6

Full Spectrum

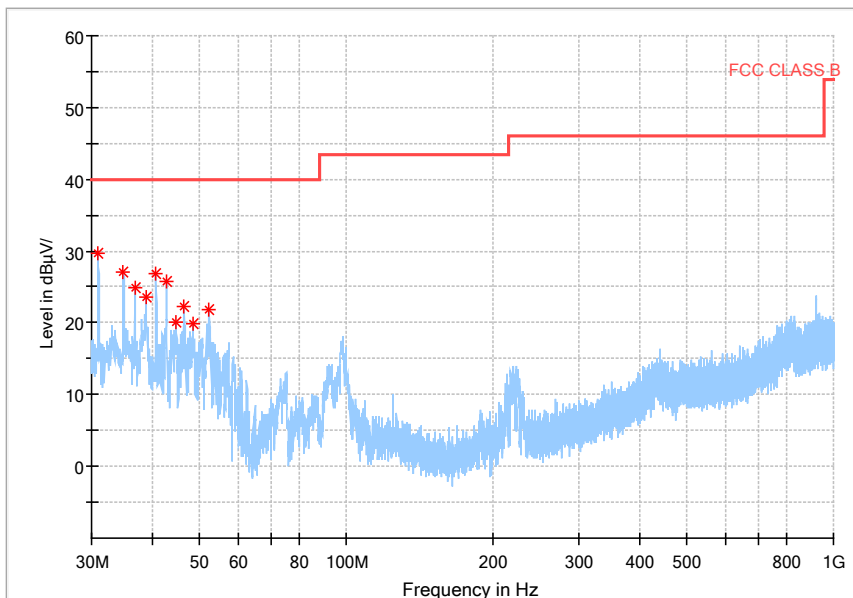

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

Full Spectrum

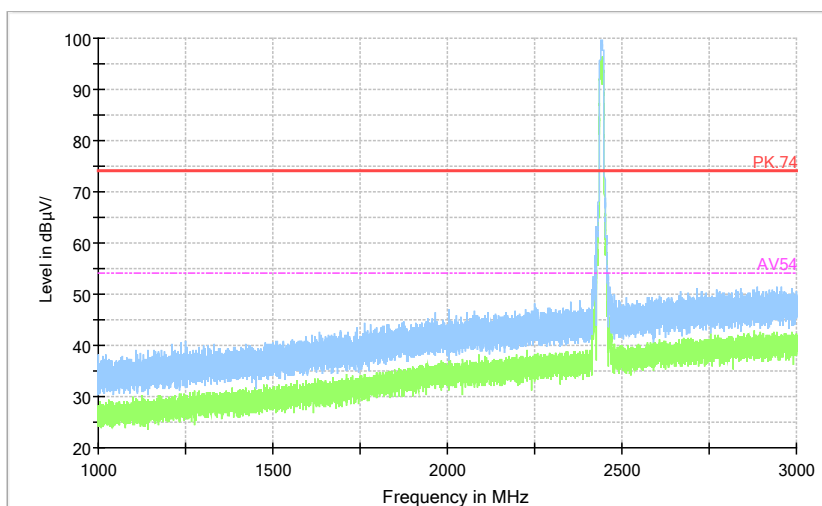


Preview Result 2-AVG Preview Result 1-PK+ PK.74 AV54

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

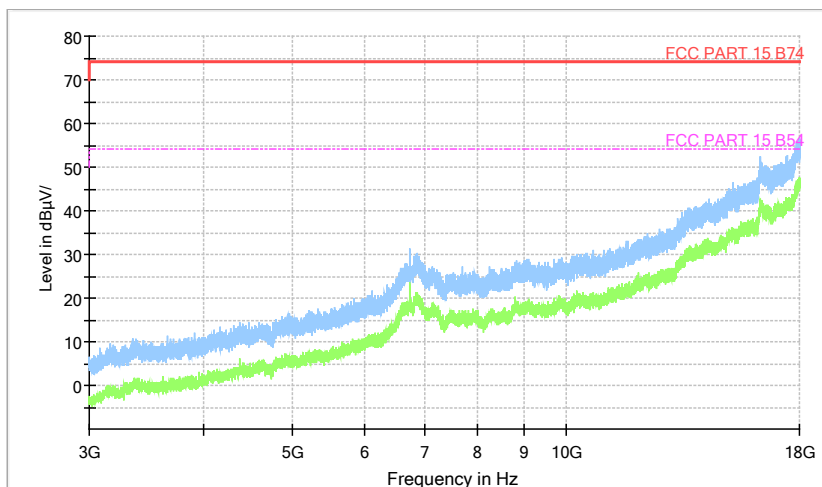


Preview Result 2-AVG Preview Result 1-PK+
FCC PART 15 B74 FCC PART 15 B54

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

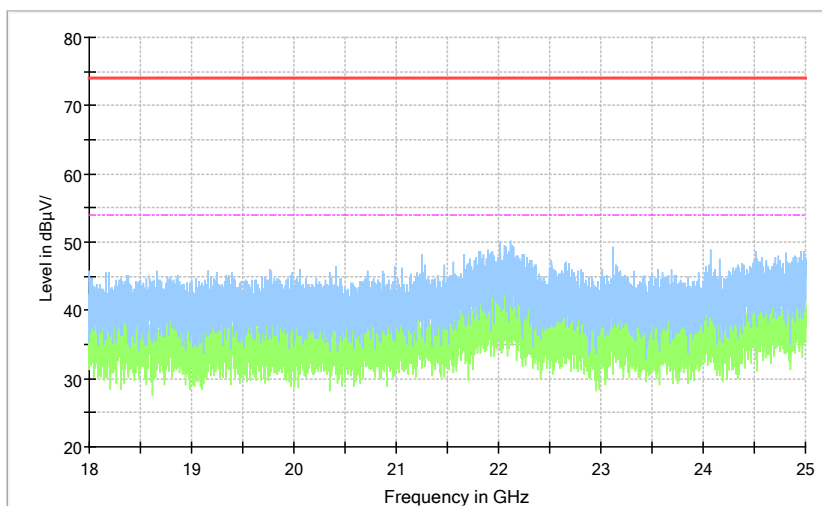


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz -25GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Carrier frequency (MHz): 2462
Channel No.:11


Full Spectrum

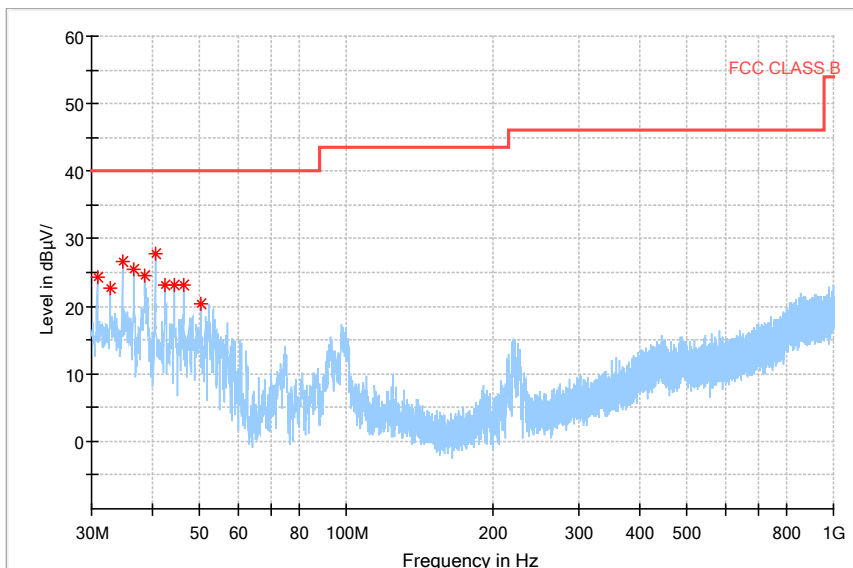

— Preview Result 1-PK+ * Critical_Freqs PK+ — FCC CLASS B

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

Full Spectrum

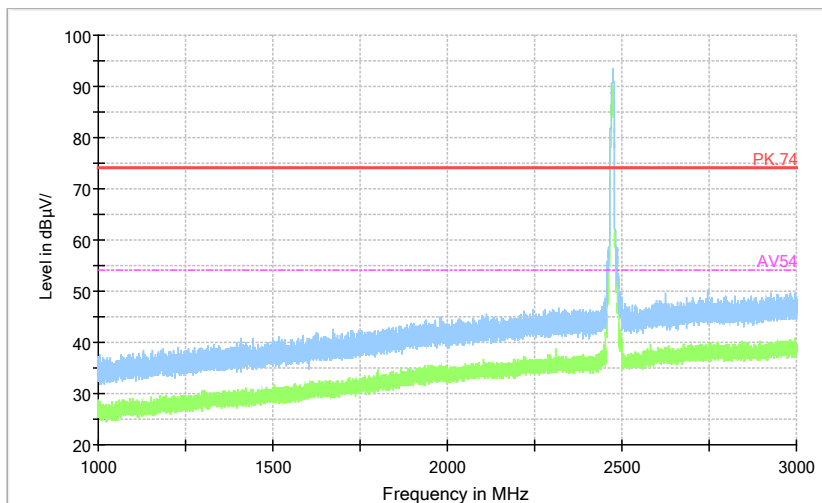


— Preview Result 2-AVG — Preview Result 1-PK+ — PK.74 - - AV54

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

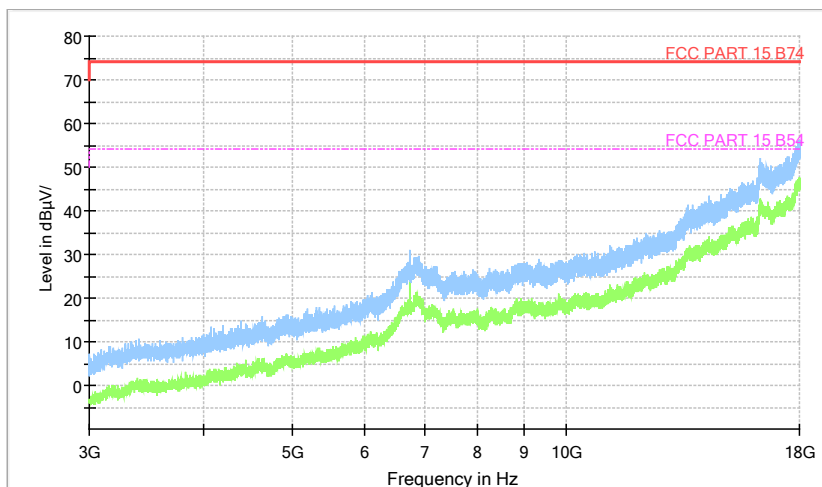


Preview Result 2-AVG Preview Result 1-PK+
FCC PART 15 B74 FCC PART 15 B54

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

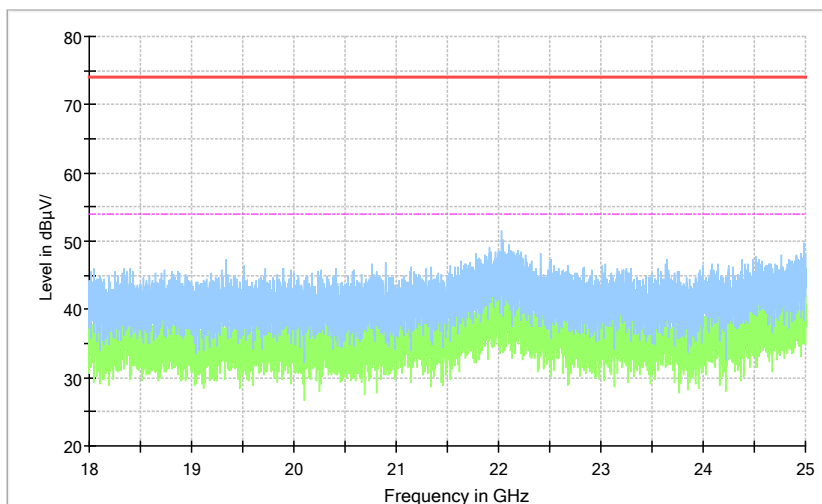


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz -25GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Carrier frequency (MHz): 2412
Channel No.:1

Full Spectrum

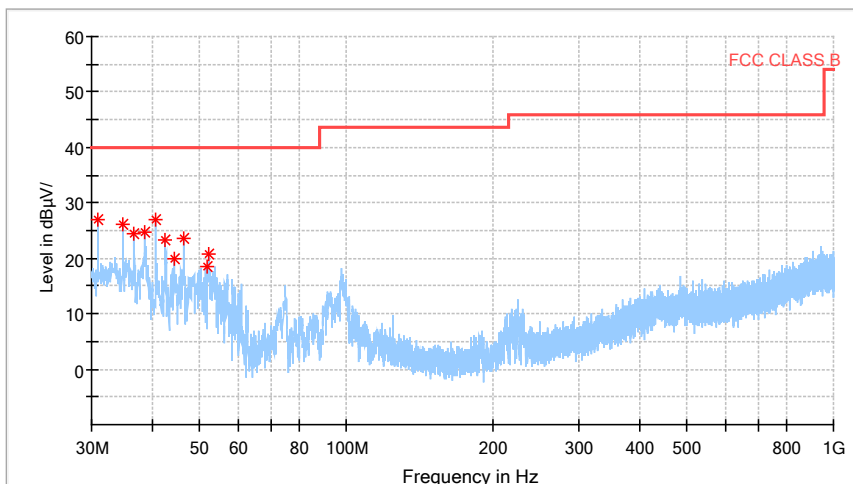


— Preview Result 1-PK+ [Preview Result 1.Result:2]
* Critical_Freqs PK+ [Critical_Freqs.Result:4]
— FCC CLASS B [..]

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g

Full Spectrum

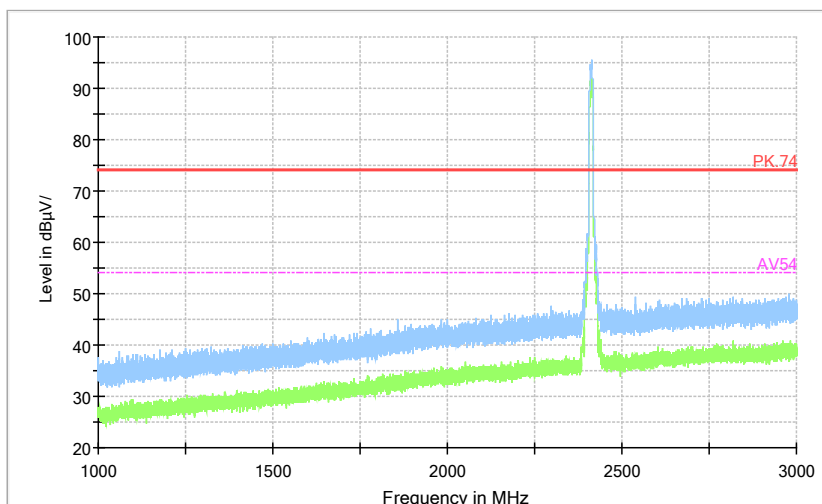


— Preview Result 2-AVG — Preview Result 1-PK+ — PK.74 — AV54

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode

Modulation type: 802.11g


Full Spectrum

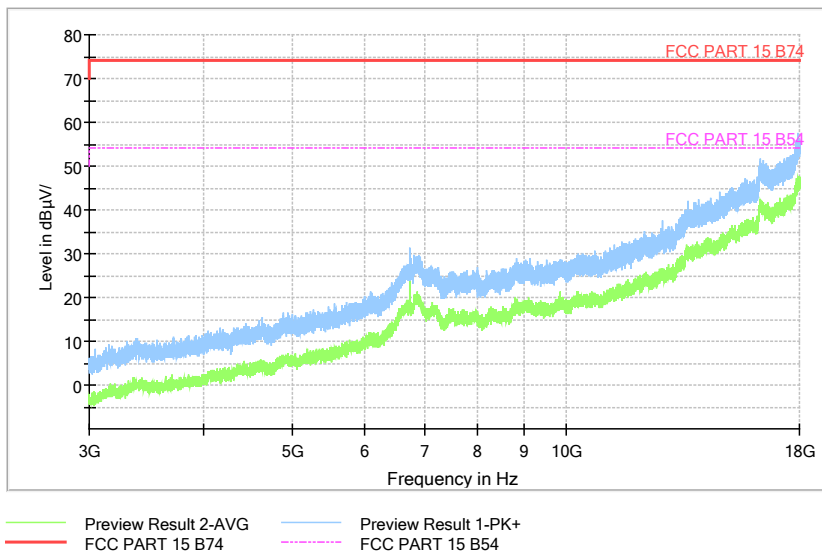

Comment

Frequency Range: 3GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g

Full Spectrum

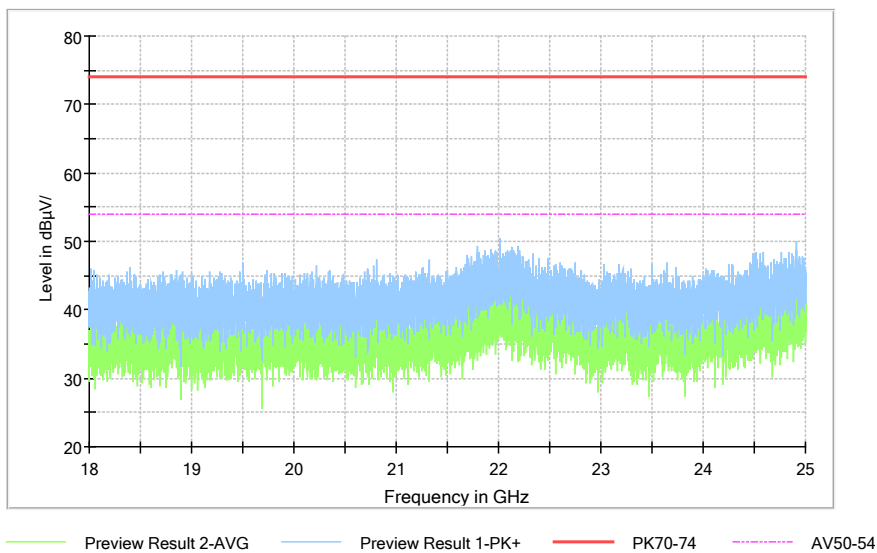


Comment

Frequency Range: 18GHz -25GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g

Carrier frequency (MHz): 2437
Channel No.:6

Full Spectrum

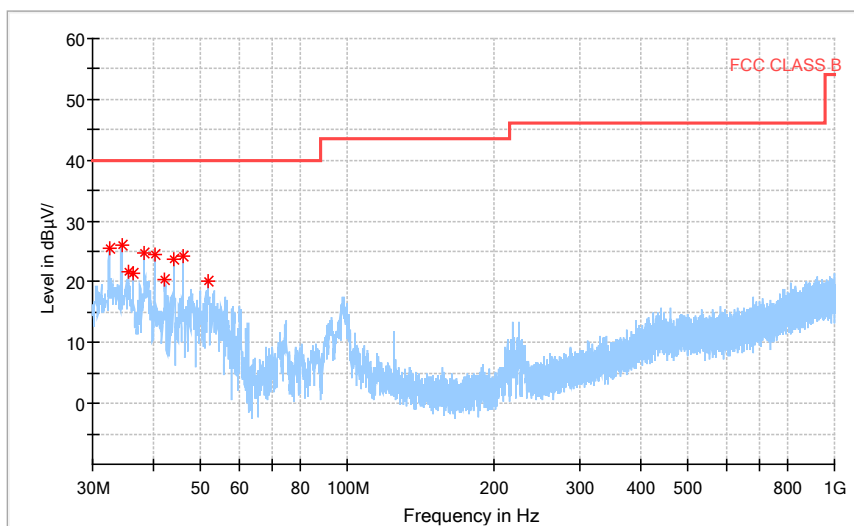


— Preview Result 1-PK+ * Critical_Freqs PK+ — FCC CLASS B

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g

Full Spectrum

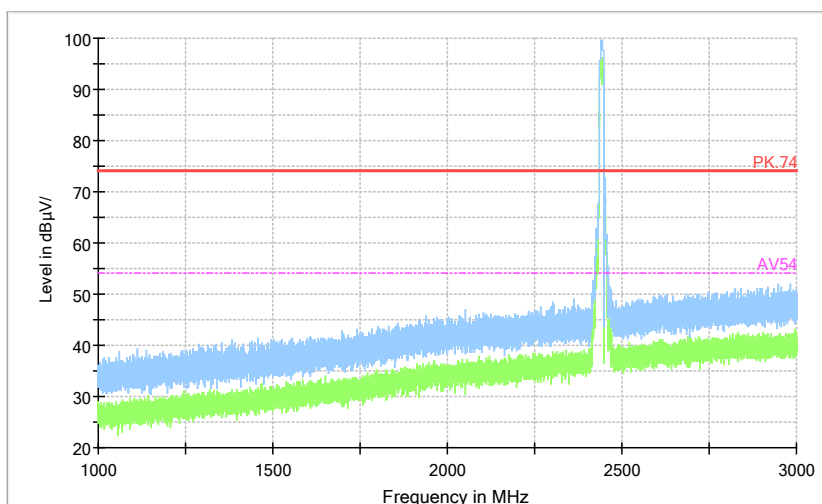


— Preview Result 2-AVG — Preview Result 1-PK+ — PK.74 — AV54

Comment

Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode
Modulation type: 802.11g


Full Spectrum

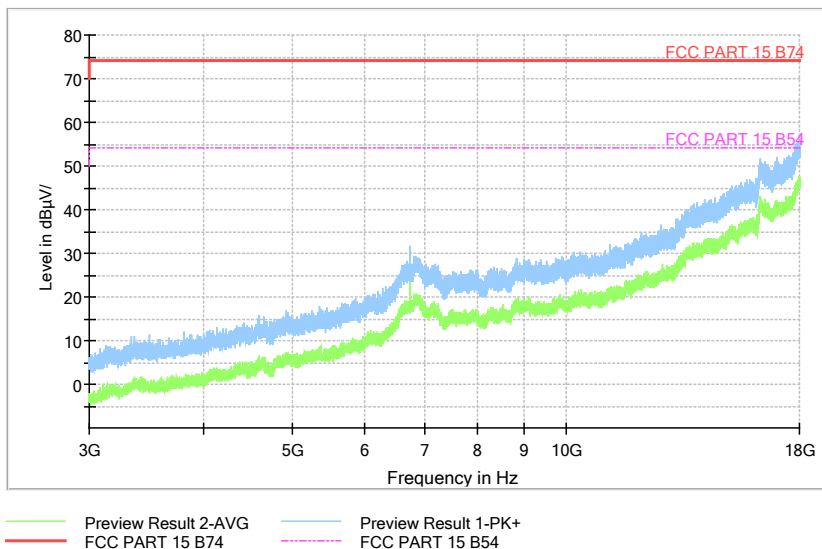

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

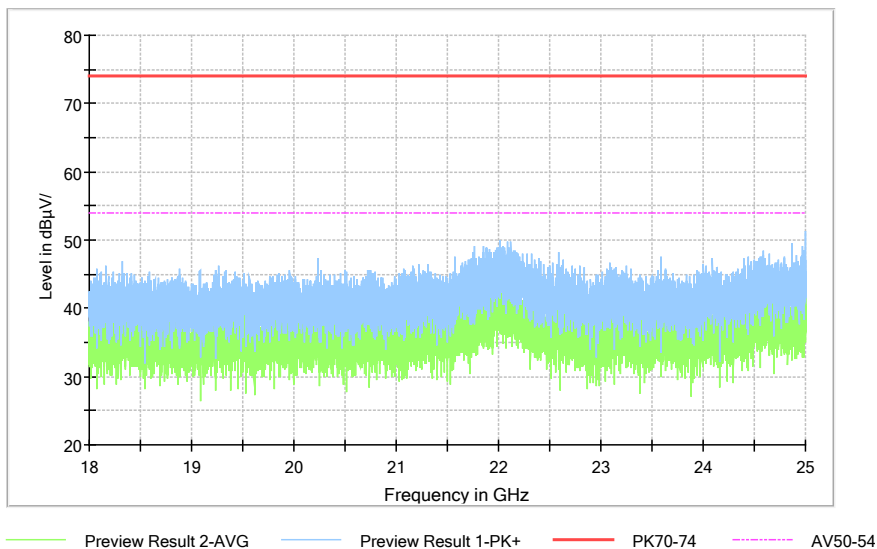


Comment

Frequency Range: 18GHz -25GHz
Detector: Av mode and PK mode
Modulation type: 802.11g


Carrier frequency (MHz): 2462
 Channel No.:11

Full Spectrum

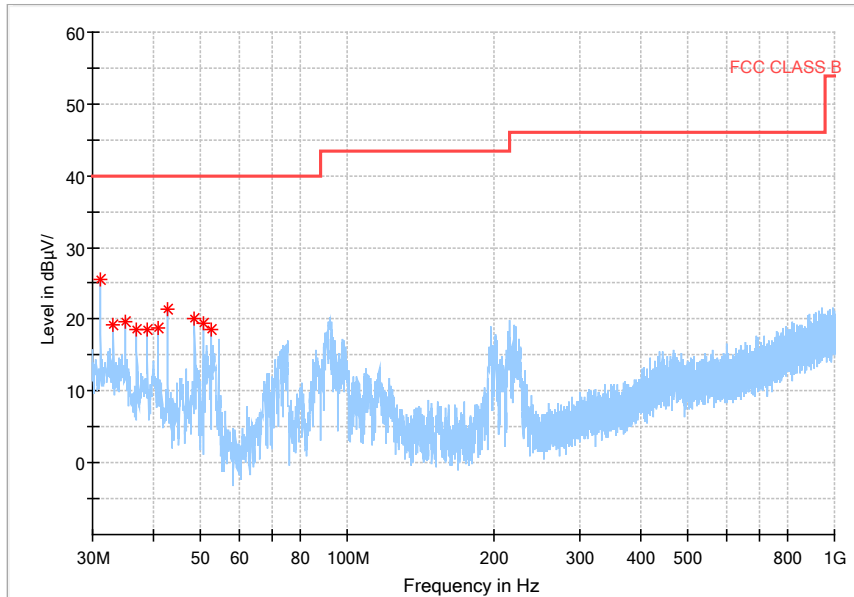

Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Modulation type: 802.11g

Full Spectrum

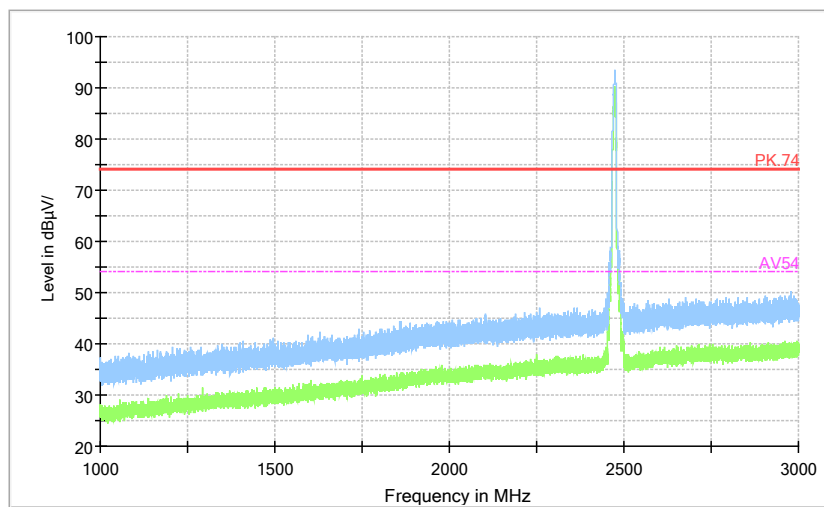


Preview Result 2-AVG Preview Result 1-PK+ PK.74 AV54

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

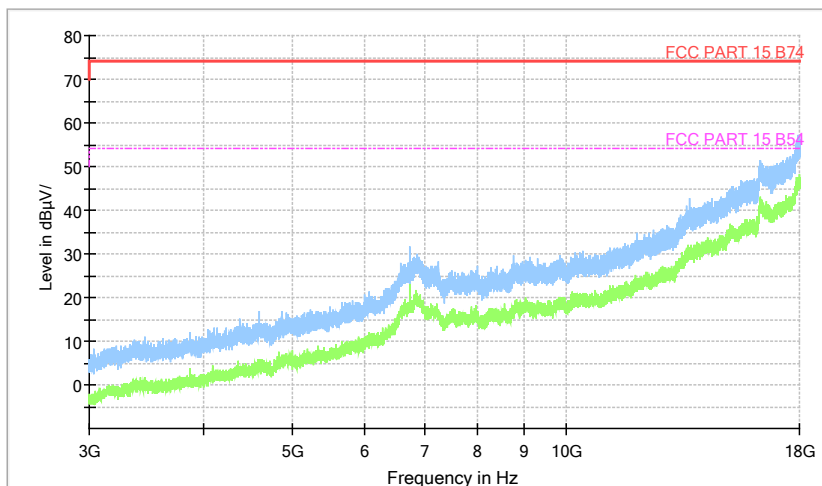


Preview Result 2-AVG Preview Result 1-PK+
FCC PART 15 B74 FCC PART 15 B54

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

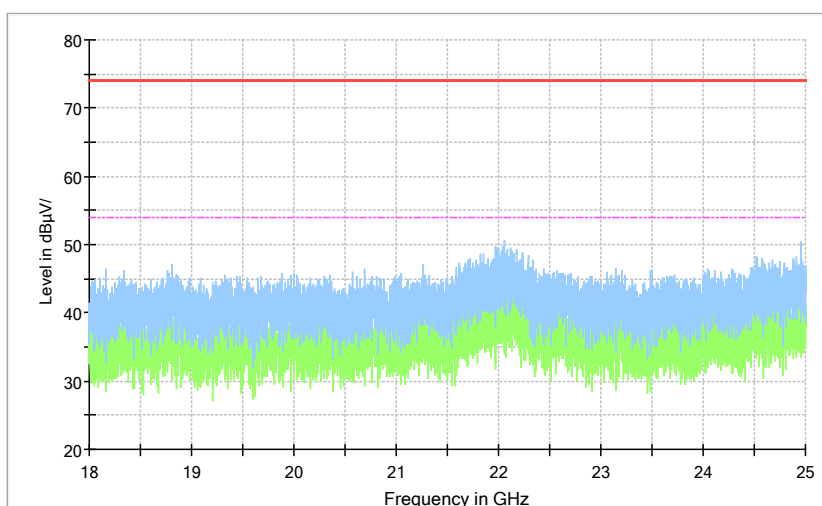


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz -25GHz
Detector: Av mode and PK mode
Modulation type: 802.11g


Carrier frequency (MHz): 2412
 Channel No.:1

Full Spectrum

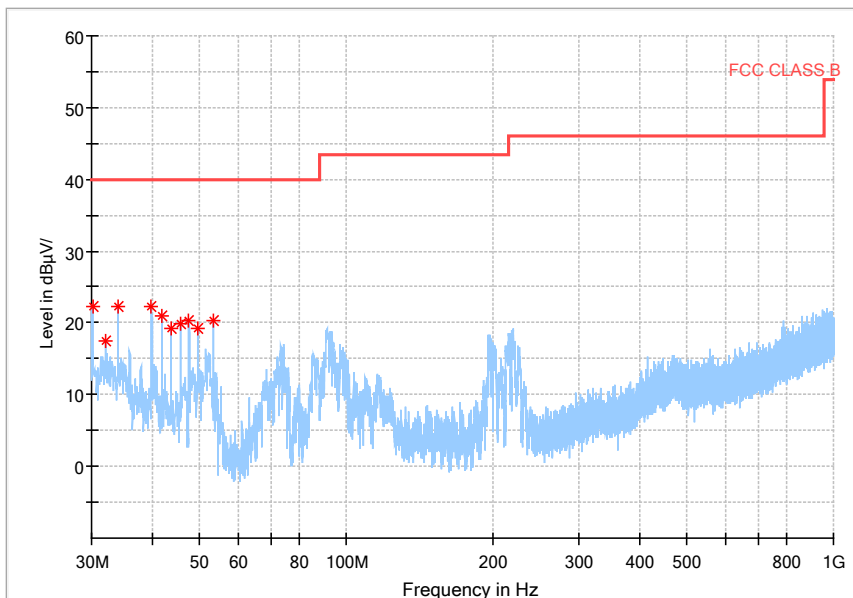

Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Test Mode: 802.11n(HT20)

Full Spectrum

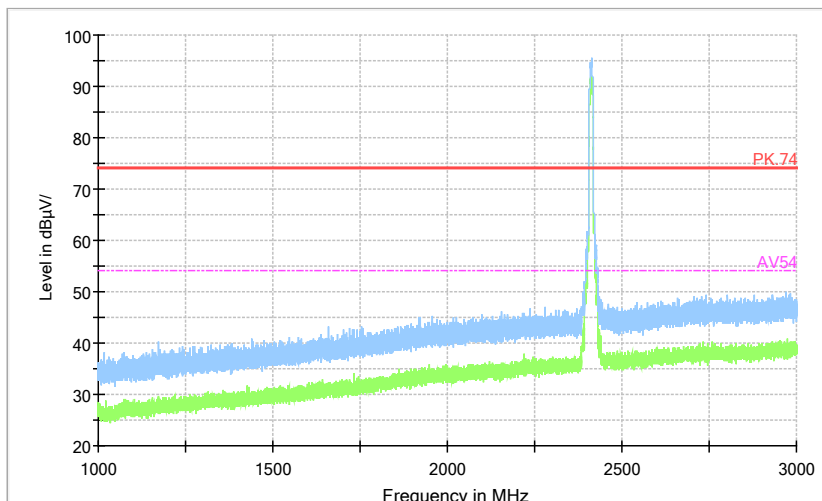


Preview Result 2-AVG Preview Result 1-PK+ PK.74 AV54

Comment

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)

Full Spectrum

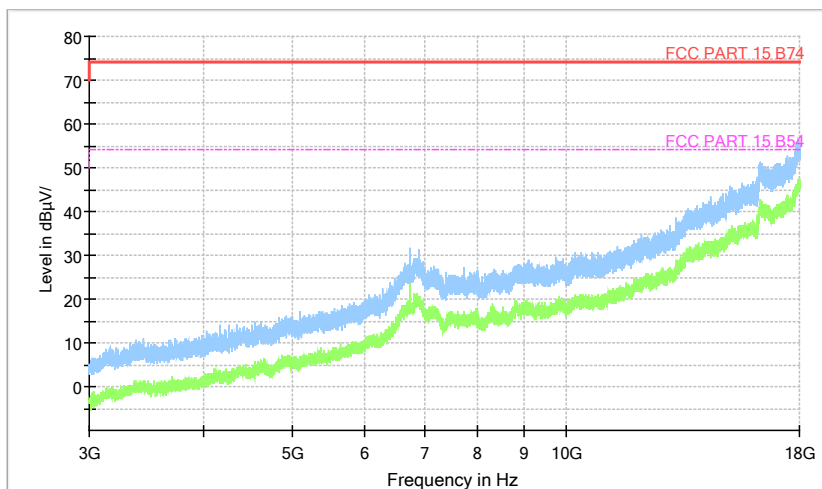


— Preview Result 2-AVG — Preview Result 1-PK+
— FCC PART 15 B74 - - - FCC PART 15 B54

Comment

Frequency Range: 3GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)

Full Spectrum

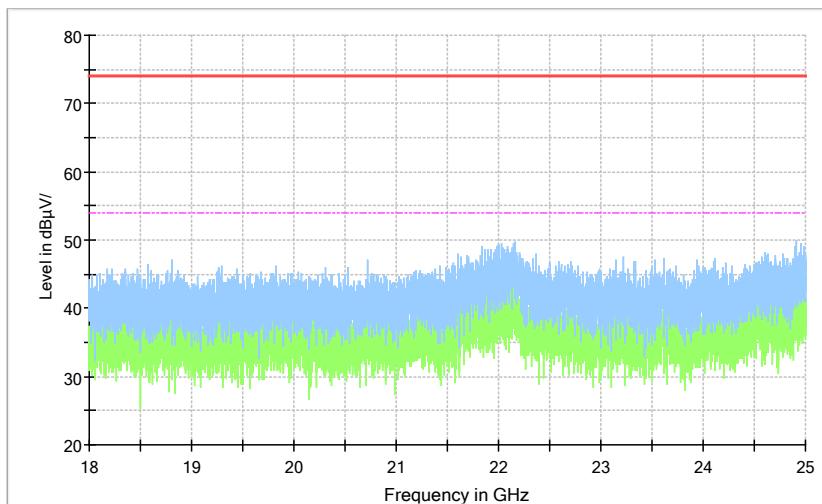


— Preview Result 2-AVG — Preview Result 1-PK+ — PK70-74 - - - AV50-54


Comment

Frequency Range: 18GHz -25GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)

Carrier frequency (MHz): 2437
 Channel No.:6

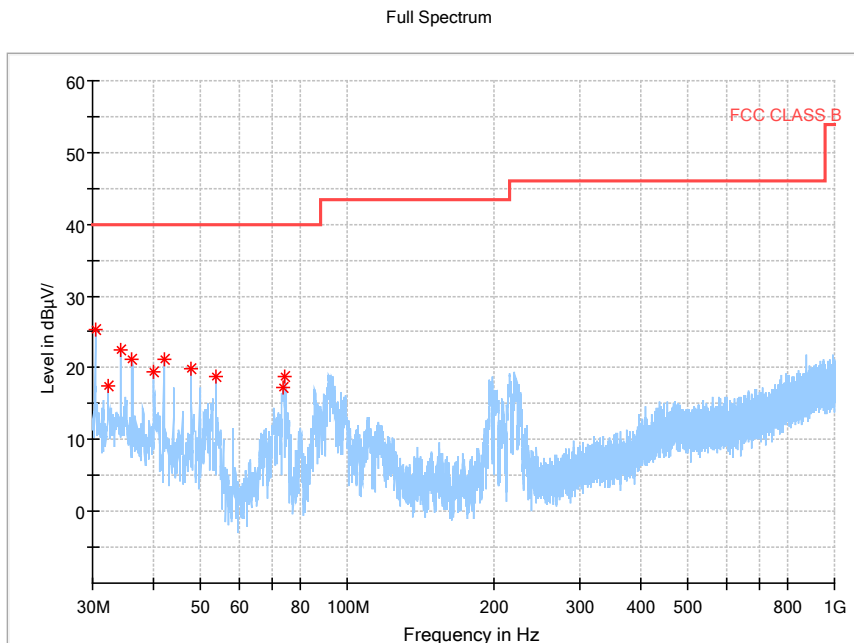

Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Test Mode: 802.11n(HT20)

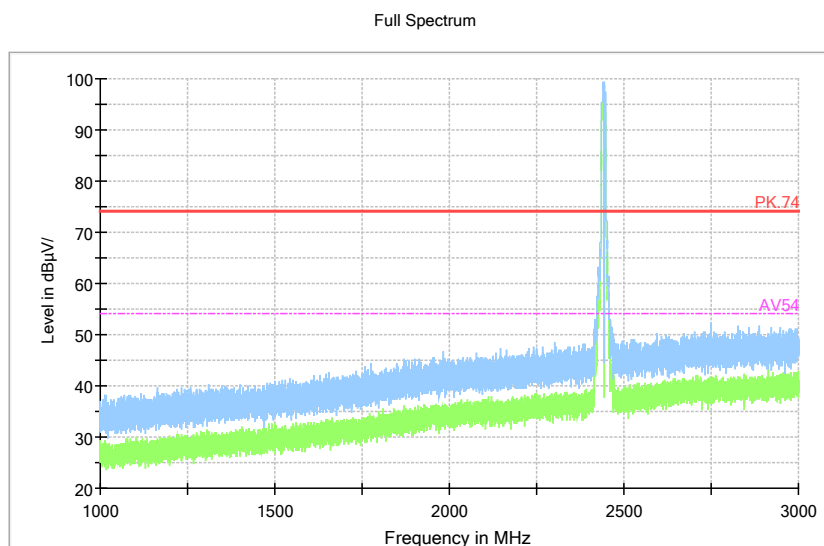


Preview Result 2-AVG Preview Result 1-PK+ PK.74 AV54

Comment

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode

Modulation type: 802.11n(HT20)


Full Spectrum

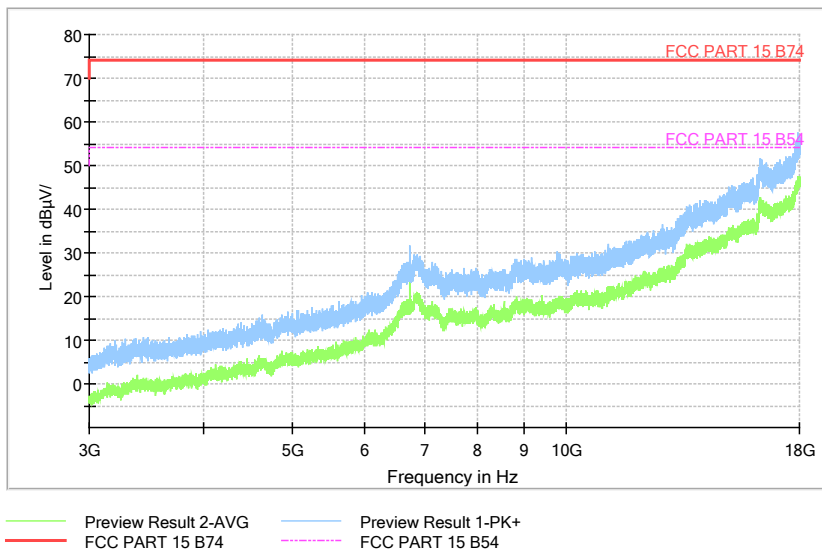

Comment

Frequency Range: 3GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)

Full Spectrum

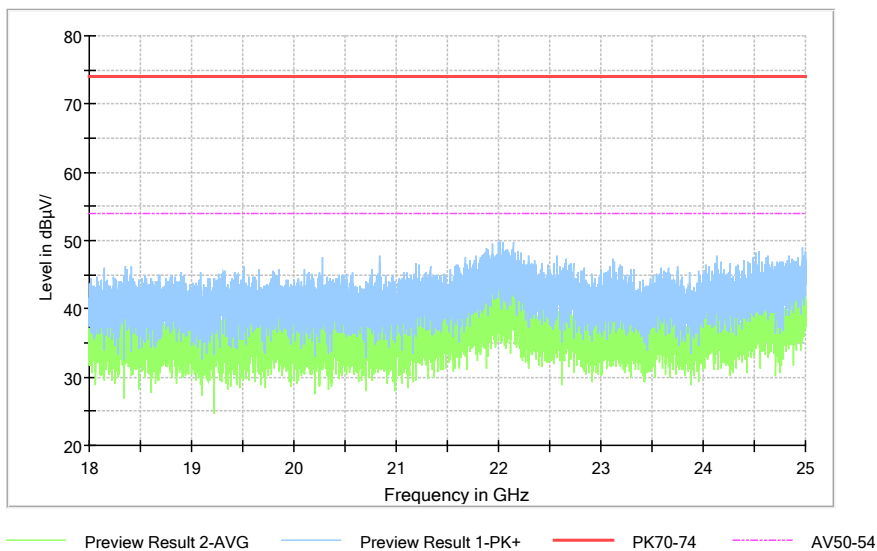


Comment

Frequency Range: 18GHz -25GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)


Carrier frequency (MHz): 2462
 Channel No.:11

Full Spectrum

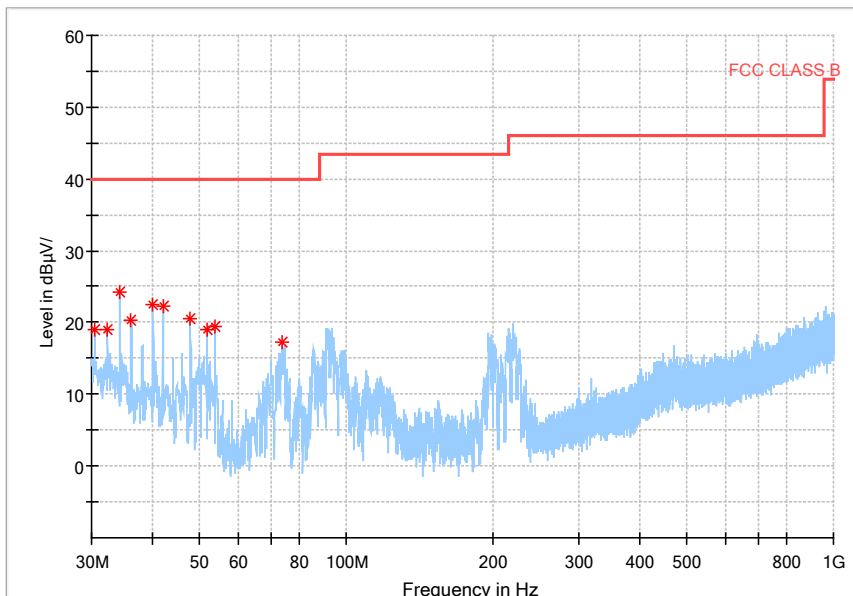

Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Test Mode: 802.11n(HT20)

Full Spectrum

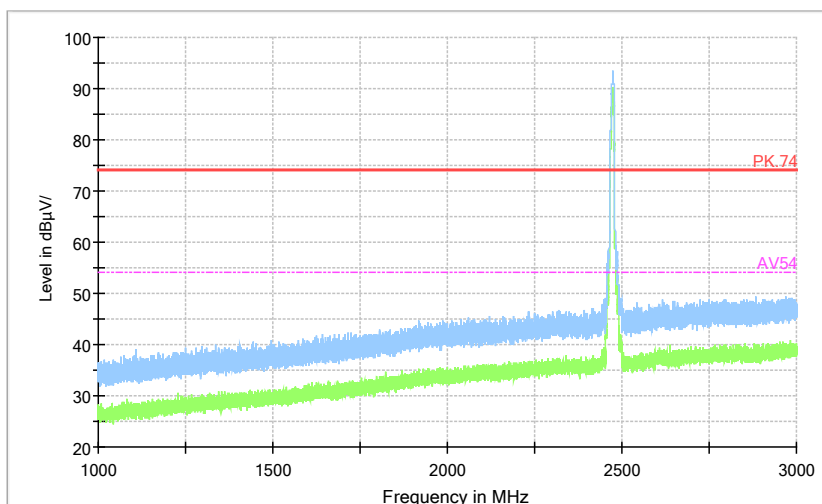


Preview Result 2-AVG Preview Result 1-PK+ PK.74 AV54

Comment

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)


Full Spectrum

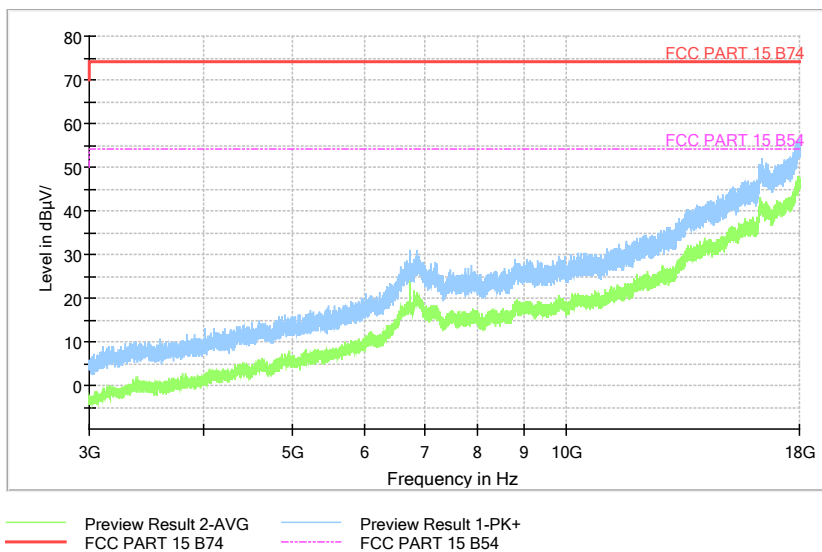

Comment

Frequency Range: 3GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)

Full Spectrum

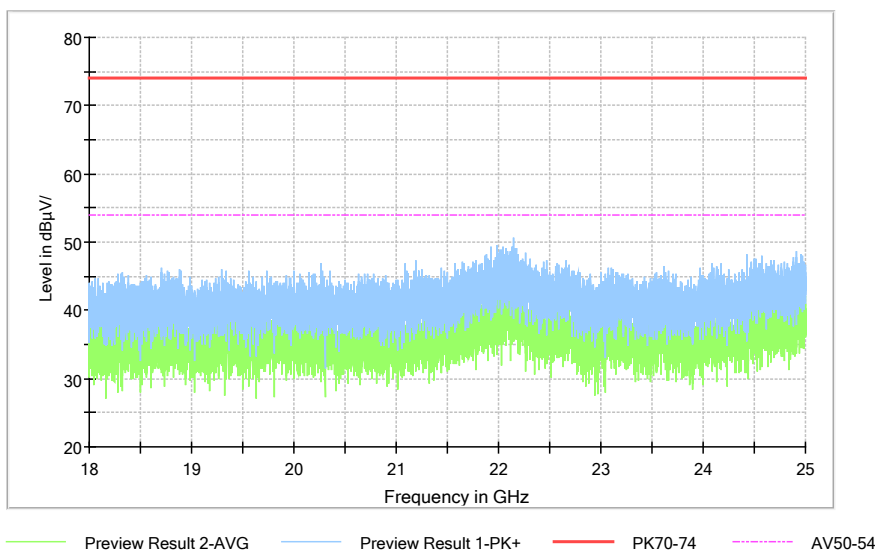


Comment

Frequency Range: 18GHz -25GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)

AC Power line Conducted Emission(EUT TX on (802.11b) + charging)

Full Spectrum

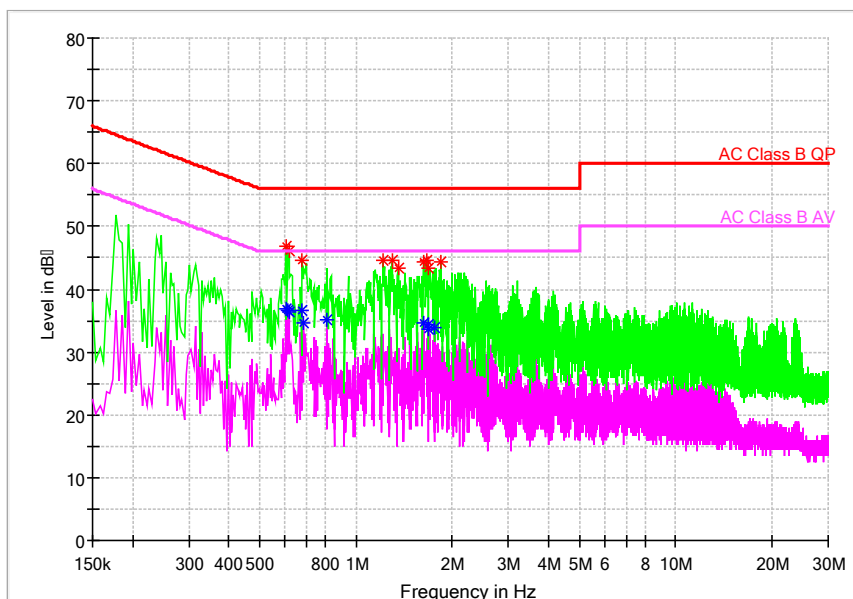

L +N Line

MEASUREMENT RESULT:

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.602000	46.98	---	56.00	9.02	L1	29.7
0.602000	---	36.97	46.00	9.03	L1	29.7
0.610000	---	36.51	46.00	9.49	N	29.7
0.618000	46.10	---	56.00	9.90	N	29.7
0.618000	---	36.38	46.00	9.62	L1	29.7
0.678000	44.57	---	56.00	11.43	L1	29.7
0.678000	---	36.58	46.00	9.42	L1	29.7
0.686000	---	34.68	46.00	11.32	L1	29.7
0.814000	---	35.16	46.00	10.84	N	29.7
1.218000	44.58	---	56.00	11.42	L1	29.8
1.294000	44.58	---	56.00	11.42	N	29.8
1.354000	43.41	---	56.00	12.59	L1	29.8
1.622000	---	34.70	46.00	11.30	L1	29.8
1.622000	44.35	---	56.00	11.65	L1	29.8
1.658000	44.49	---	56.00	11.51	N	29.8
1.682000	---	33.75	46.00	12.25	L1	29.8
1.690000	---	34.37	46.00	11.63	L1	29.8
1.690000	43.42	---	56.00	12.58	L1	29.8
1.758000	---	33.84	46.00	12.16	L1	29.8
1.846000	44.36	---	56.00	11.64	N	29.8

---End of Test Report---