



EMC TEST REPORT

Report No.: SET2020-05843

Product Name: 5G NR Multi model smart phone

FCC ID: SRQ-ZTG01

Model No. : ZTG01

Applicant: ZTE Corporation

Address: ZTE Plaza, Keji Road South, Shenzhen, China

Received Date: 2020.05.15

Dates of Testing: 15/05/2020 —15/05/2020

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street,
Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **19** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description4**
- 1.2 Test Standards and Results5**
- 1.3 Facilities and Accreditations6**
- 1.3.1 Facilities6
- 1.3.2 Test Environment Conditions6
- 1.3.3 Measurement Uncertainty6
- 2. TEST CONDITIONS SETTING.....7**
- 2.1 Test Mode7**
- 2.2 Test Setup and Equipments List.....8**
- 2.2.1 Conducted Emission.....8
- 2.2.2 Radiated Emission.....8
- 3. 47 CFR PART 15B REQUIREMENTS 11**
- 3.1 Conducted Emission 11**
- 3.1.1 Requirement 11
- 3.1.2 Test Description 11
- 3.1.3 Test Result 11
- 3.2 Radiated Emission14**
- 3.2.1 Requirement 14
- 3.2.2 Test Description 15
- 3.2.3 Test Result 15

Change History		
Issue	Date	Reason for change
1.0	2020.06.15	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name : 5G NR Multi model smart phone

Trade Name..... : ZTE

Brand Name..... : ZTE

Hardware Version..... : ZTG01HW1.1

Software Version : 0.4.0

Power supply..... : Battery

Model No.: Li3939T44P8h756547

Capacitance:4000mAh

Rated Voltage:3.87V

Charge Limit:4.45V

Manufacturer: Zhuhai CosMX Battery Co.,Ltd

*Note1:*The EUT is a 5G NR Multi model smart phone;

*Note 2:*For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B 2018	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.



1.3 Facilities and Accreditations

1.3.1 Facilities

FCC-Registration No.: CN5031

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2020.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until December 31, 2020.

NVLAP Lab Code: 201008

CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.6 dB (k=2)
Uncertainty of Radiated Emission:	Uc = 4.5 dB (k=2)



2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	ThinkPad	E430C	A131101550	N/A
Mouse	Logitech	M100r	25011051	DOC

Support Cable:

Description	Shield Type	Ferrite Core	Length
USB Cable	shielding	Yes	1.2m
PC Power adapter Cable	Un- shielding	No	1.2m
Mouse Cable	Un- shielding	No	1m

2.2 Test Mode

The EUT have the following typical setups during the test:

Setup1: EUT(GSM850 Traffic)+ Mouse + Notebook PC

Setup2: EUT(WCDMA850 Traffic)+ Mouse + Notebook PC

Setup3: EUT(LTE B5 Traffic)+ Mouse + Notebook PC

Setup5: EUT(FM Receiver)+ earphone+Mouse + Notebook PC


Setup6: EUT+ AC Adapter

Note: only worst-case mode setup 1 mode data provide at the report

2.3 Test Setup and Equipments List

2.3.1 Conducted Emission

A. Test Setup:

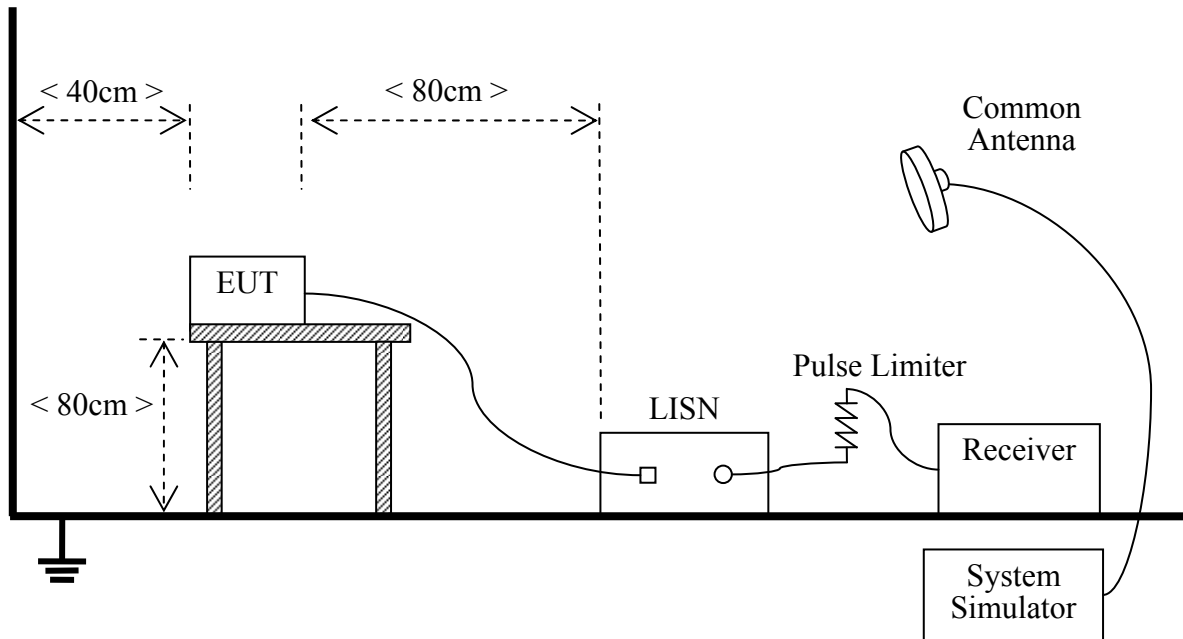

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


B. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2019.11.21	2020.11.21
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2019.11.21	2020.11.21
Cable	MATCHING PAD	W7	/	2019.08.02	2020.08.01


2.3.2 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

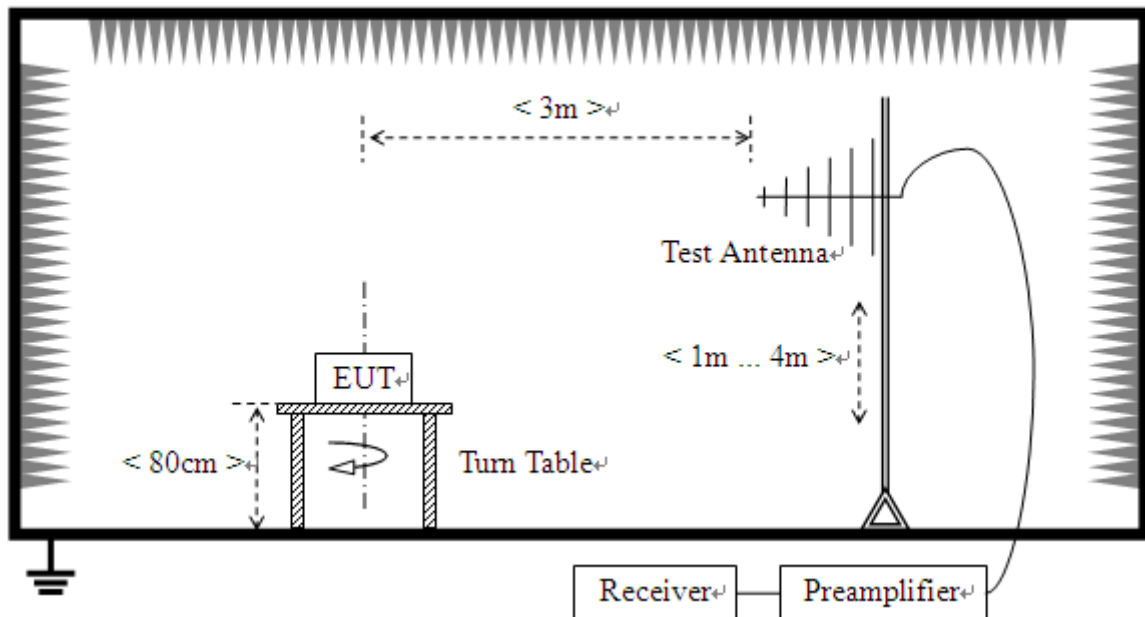

2) For radiated emissions above 1GHz

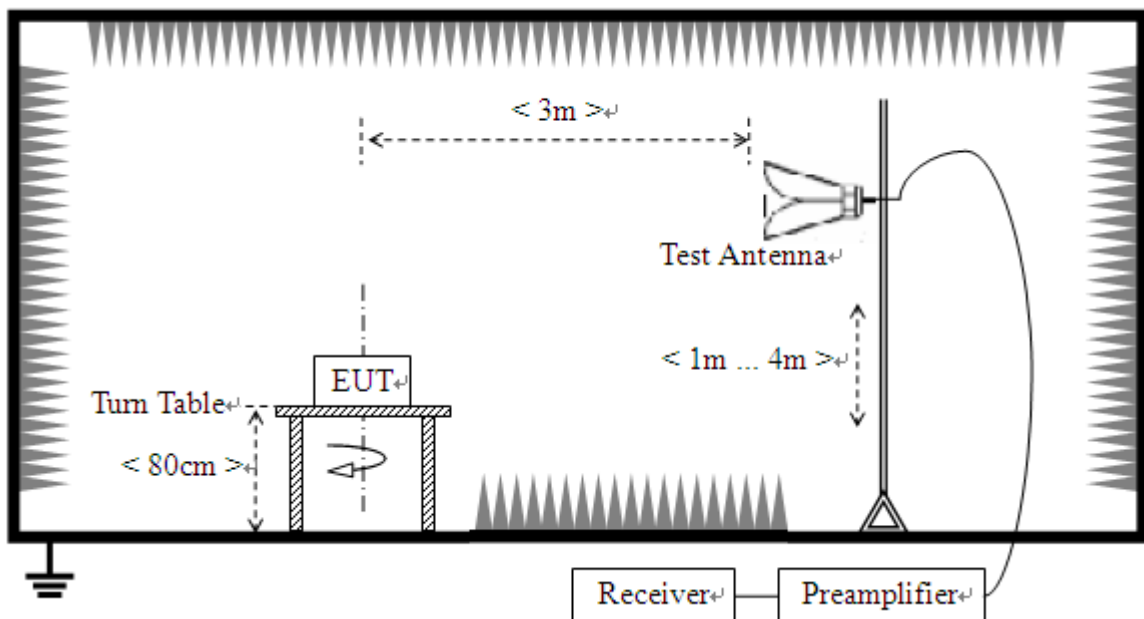

B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a



variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2019.11.21	2020.11.21
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2019.11.21	2020.11.21
Shield Room	Xinju Electronics	L7300*W4500 *H3100	A181003226	2018.09.06	2021.09.05
EMI Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2019.07.30	2020.07.29
Broadband Ant.	2786	ETC	A150402239	2018.09.17	2021.09.16
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2019.10.22	2020.10.21
System Simulator	ROHDE&SCHWARZ	CMW500	A150802214	2019.07.30	2021.07.29
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2019.03.25	2023.03.24
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2019.04.17	2022.04.17



3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2 Test Description

See section 2.3.1 of this report.

3.1.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.


Note:

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.



Test voltage and frequency (120V AC,60Hz)

A. Mains terminal disturbance voltage, L phase

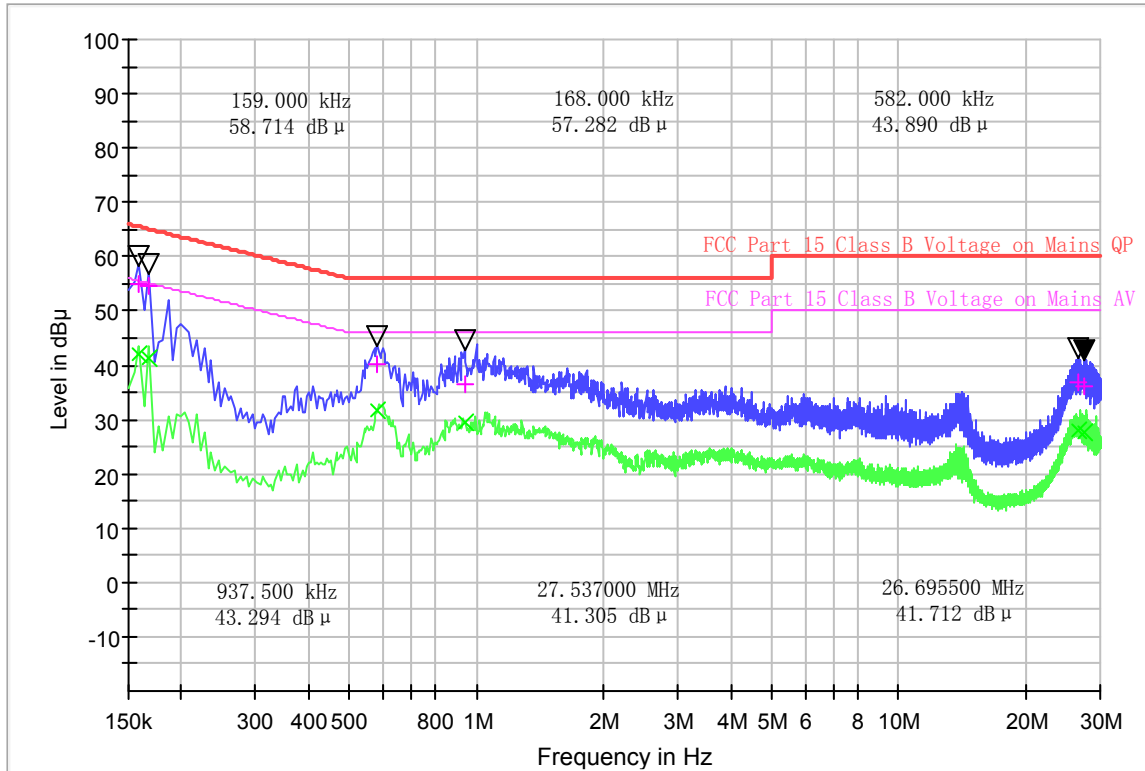


(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB µ V)	CAverage (dB µ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB µ V)
0.159000	55.07	41.92	0.1	21.8	10.45	65.5	13.60	55.5
0.168000	54.72	41.35	0.1	21.7	10.34	65.1	13.71	55.1
0.582000	40.19	31.83	0.1	20.1	15.81	56.0	14.17	46.0
0.937500	36.39	29.33	0.1	20.5	19.61	56.0	16.67	46.0
26.69550	36.74	28.14	0.1	20.7	23.26	60.0	21.86	50.0
27.53700	36.28	27.72	0.2	20.7	23.72	60.0	22.28	50.0

Note: Correction factor=Cabel loss+ attenuation factor
attenuation factor=10dB



B. Mains terminal disturbance voltage, N phase

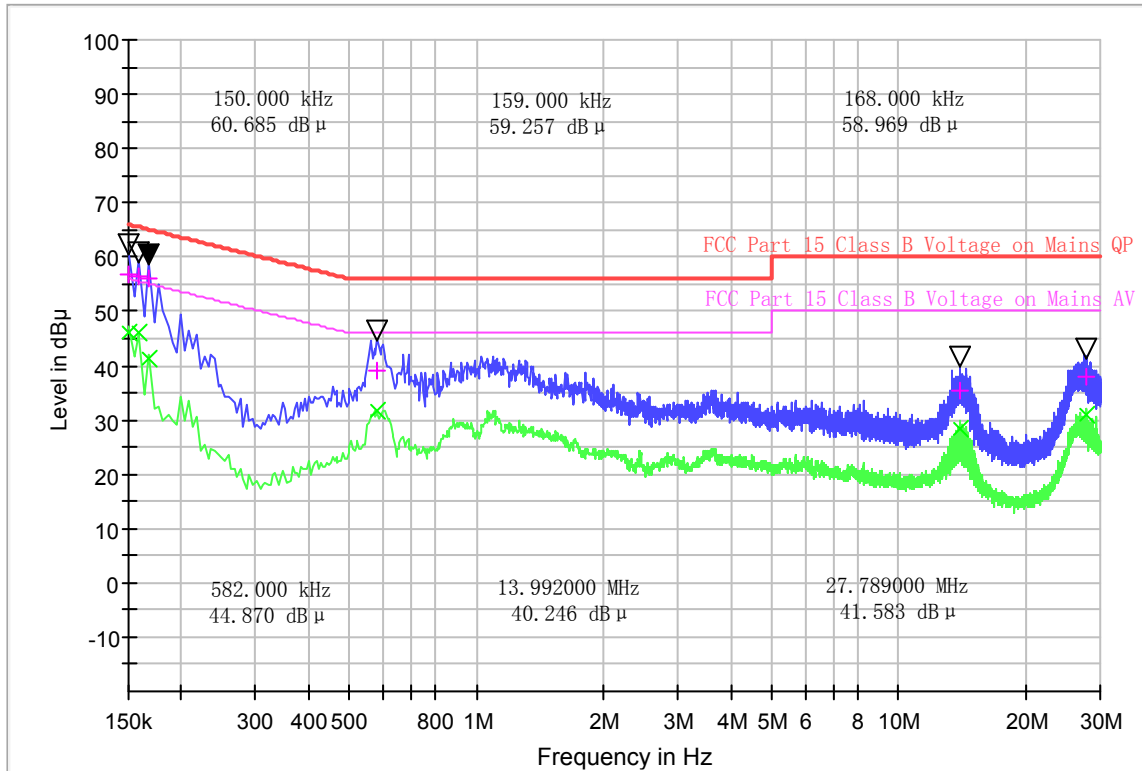

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB µ V)	CAverage (dB µ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB µ V)
0.150000	56.79	46.14	0.1	21.8	9.21	66.0	9.86	56.0
0.159000	56.45	45.92	0.1	21.7	9.07	65.5	9.60	55.5
0.168000	56.08	41.34	0.1	21.6	8.98	65.1	13.72	55.1
0.582000	38.99	31.77	0.1	20.1	17.01	56.0	14.23	46.0
13.99200	35.29	28.38	0.1	20.4	24.71	60.0	21.62	50.0
27.78900	37.86	31.00	0.2	20.6	22.14	60.0	19.00	50.0



3.2 Radiated Emission

3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	(uV/m)	(dBuV/m)
0.009 - 0.490	2400/F(kHz)	300m	10000* 2400/F(kHz)	20log 2400/F(kHz) + 80
0.490 - 1.705	2400/F(kHz)	30m	100* 2400/F(kHz)	20log 2400/F(kHz) + 40
1.705 - 30.00	30	30m	100*30	20log 30 + 40
30.0 - 88.0	100	3m	100	20log 100
88.0 - 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

- a) As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- b) Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- c) For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- d) For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by $20\log \text{Emission Level}(\text{uV/m})$.
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is 30uV/m , then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\text{uV/m} * (10)^2 = 100 * 30\text{uV/m}.$$



3.2.2 Test Description

See section 2.3.2 of this report.

3.2.3 Test Result


The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.



A.Radiation disturbances, antenna polarization:Vertical

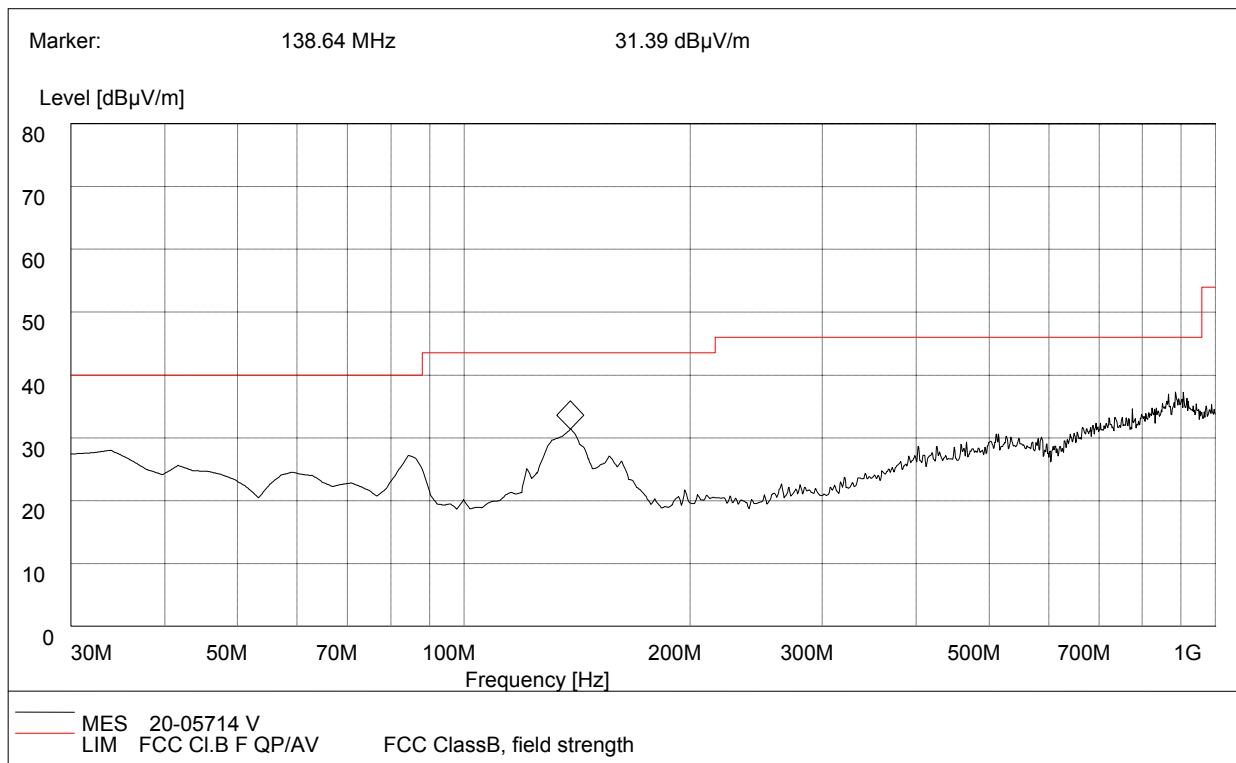


(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB µ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB µ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	27.62	120.000	208.0	40.00	12.38	Vertical	0.4	26.3	Pass
33.25	28.01	120.000	129.0	40.00	11.99	Vertical	0.6	26.3	Pass
132.66	29.68	120.000	147.0	43.50	13.82	Vertical	0.5	26.3	Pass
138.46	30.75	120.000	169.0	43.50	12.75	Vertical	0.7	29.0	Pass
873.6	34.25	120.000	207.0	46.00	11.75	Vertical	0.5	29.0	Pass
898.26	35.67	120.000	207.0	46.00	10.33	Vertical	1.1	28.9	Pass



B.Radiation disturbances, antenna polarization: Horizontal

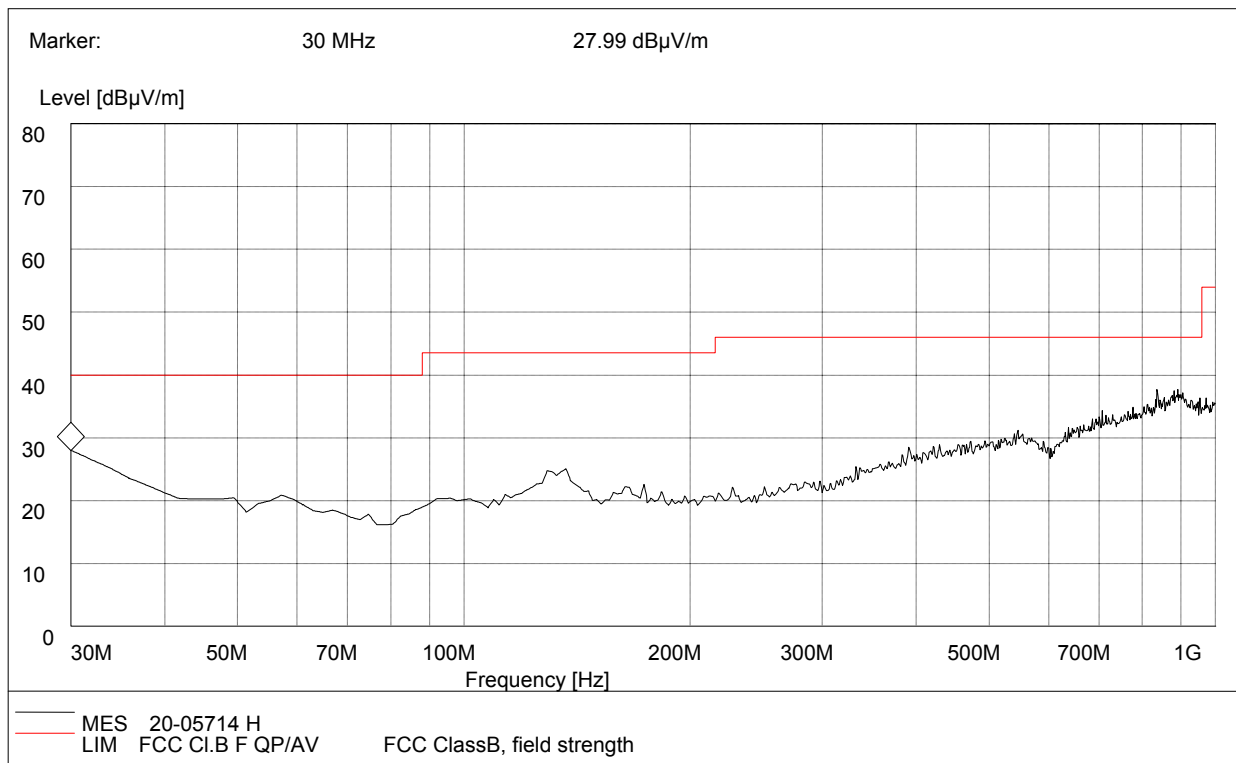


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB µ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB µ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	27.33	120.000	223.0	40.00	12.67	Horizontal	0.5	26.3	Pass
31.61	26.25	120.000	209.0	40.00	13.75	Horizontal	0.5	26.3	Pass
127.45	25.62	120.000	126.0	43.50	17.88	Horizontal	0.6	29.0	Pass
130.38	25.74	120.000	268.0	43.50	17.76	Horizontal	0.6	29.0	Pass
842.76	34.28	120.000	214.0	46.00	11.72	Horizontal	0.6	29.0	Pass
898.26	35.35	120.000	364.0	46.00	10.65	Horizontal	1.2	28.9	Pass

Test Result: PASS

A.Radiation disturbances, antenna polarization: Horizontal

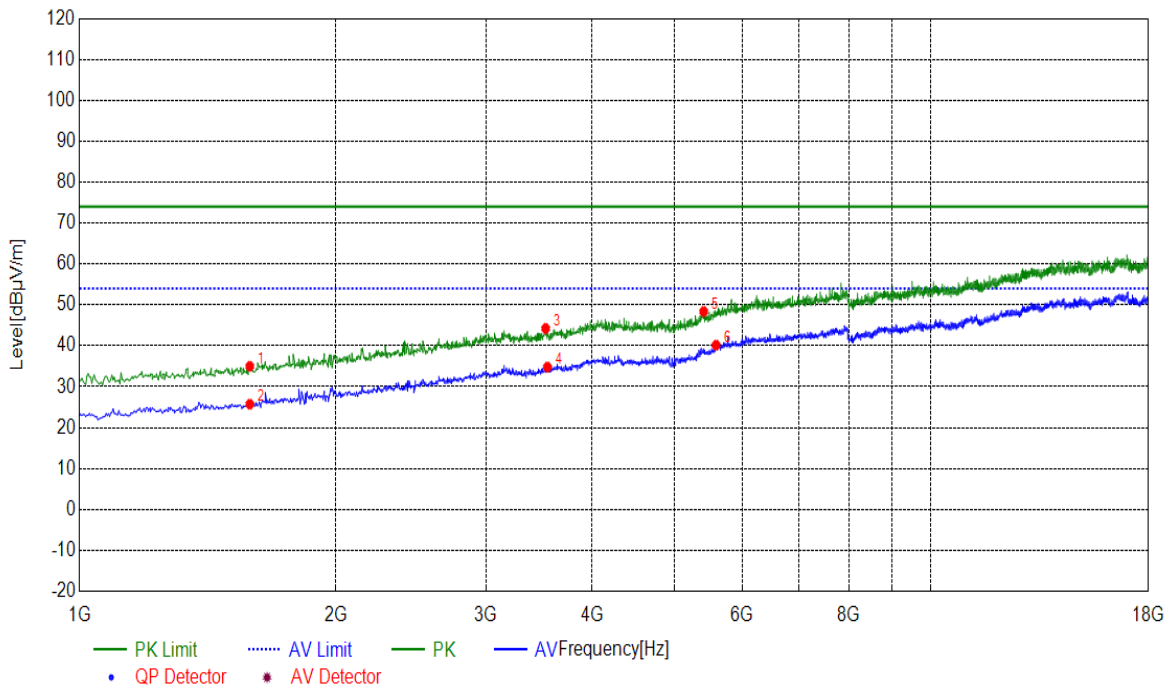


(Plot M: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1584.91	35.01	-12.81	74.00	38.99	PK	100	230	Horizontal
2	1584.91	25.73	-12.81	54.00	28.27	AV	100	50	Horizontal
3	3526.70	44.25	-3.75	74.00	29.75	PK	100	290	Horizontal
4	3543.70	34.81	-3.68	54.00	19.19	AV	100	280	Horizontal
5	5407.28	48.38	1.91	74.00	25.62	PK	100	90	Horizontal
6	5590.91	40.18	2.61	54.00	13.82	AV	100	230	Horizontal



B.Radiation disturbances, antenna polarization: Vertical

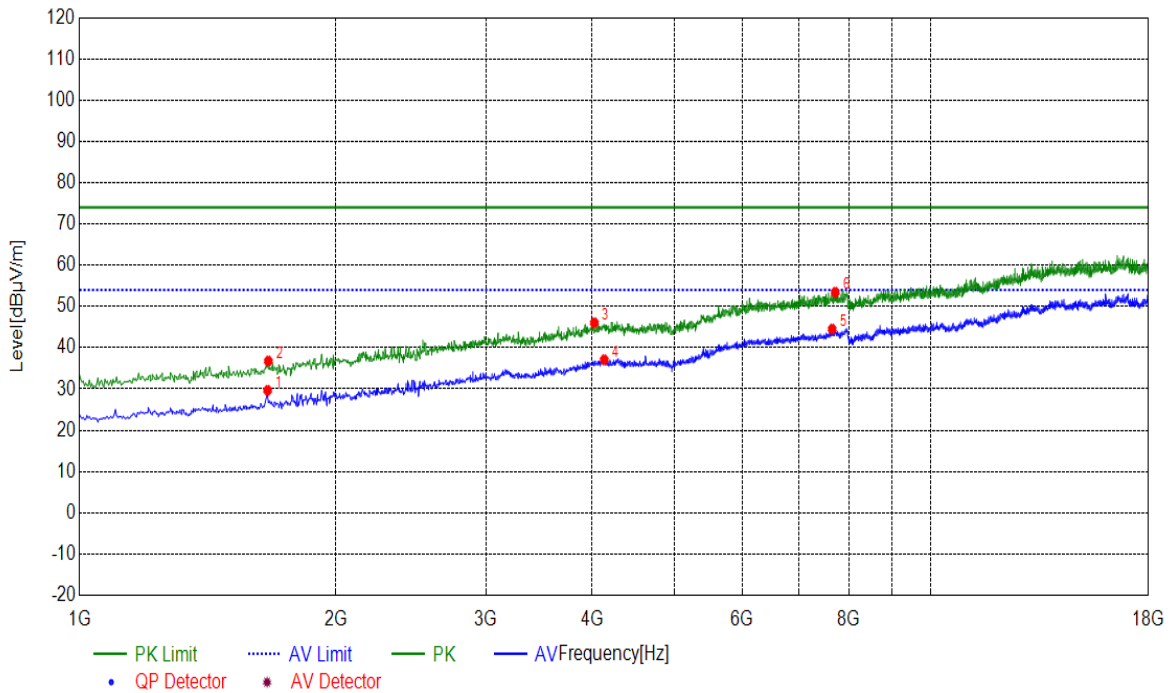

(Plot N: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1663.13	29.68	-12.32	54.00	24.32	AV	100	110	Vertical
2	1666.53	36.78	-12.30	74.00	37.22	PK	100	350	Vertical
3	4023.20	46.05	-0.95	74.00	27.95	PK	100	360	Vertical
4	4132.02	37.09	-0.82	54.00	16.91	AV	100	130	Vertical
5	7651.73	44.53	6.91	54.00	9.47	AV	100	360	Vertical
6	7716.34	53.44	7.21	74.00	20.56	PK	100	180	Vertical

-----End of Report-----