

# TEST REPORT

of

FCC Part 22 Subpart H and Part 24 Subpart E

FCC ID : SS4MAA

Equipment Under Test : GSM//WCDMA PDA Phone with BT and WLAN  
Model Name : BM-170  
Serial No. : N/A  
Applicant : Bluebird Soft, Inc.  
Manufacturer : Bluebird Soft, Inc.  
Date of Test(s) : 2010.03.29 ~ 2010.04.23  
Date of Issue : 2010.05.27

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date

2010.05.27

Grant Lee

Approved By



Date

2010.05.27

Charles Kim

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

---

# INDEX

<u>TABLE OF CONTENTS</u>	Page
1. General Information -----	3
2. RF radiated output power & spurious radiated emission -----	7
3. Conducted Output Power -----	16
4. Occupied Bandwidth 99 % -----	18
5. Spurious Emissions At Antenna Terminal-----	28
6. Band Edge -----	37
7. Frequency Stability -----	46

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1. General information

### 1.1. Testing laboratory

SGS Testing Korea Co., Ltd.

- 705, Dongchun-Dong Sooji-Gu, Yongin-Shi, Kyungki-Do, South Korea.

- Wireless Div. 2FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040

[www.electrolab.kr.sgs.com](http://www.electrolab.kr.sgs.com)

Telephone : +82 +31 428 5700

FAX : +82 +31 427 2371

### 1.2. Details of applicant

Applicant : Bluebird Soft, Inc.  
 Address : 1242, Gaepo-dong, Kangnam-gu, Seoul, Korea  
 Contact Person : Kim In-Gu  
 Phone No. : +82 +70 7730 8252

### 1.3. Description of EUT

<b>Kind of Product</b>	GSM/WCDMA PDA Phone with BT and WLAN
<b>Model Name</b>	BM-170
<b>Serial Number</b>	N/A
<b>Power Supply</b>	DC 3.7 V (Li-poly Battery)
<b>Rated Power</b>	GSM850 : 28.47dBm GSM1900 : 27.52 dBm WCDMA850 : 20.34 dBm WCDMA1900 : 22.16 dBm
<b>Frequency Range</b>	GSM850 : 824.2 MHz ~ 848.8 MHz GSM1900 : 1 850.2 MHz ~ 1 909.8 MHz WCDMA850 : 826.4 MHz ~ 846.6 MHz WCDMA1900 : 1 852.4 MHz ~ 1 907.6 MHz Bluetooth : 2 402 ~ 2 480 MHz WLAN : 2 412 ~ 2 462 MHz
<b>Number of Channels</b>	GSM850 : 125 GSM1900 : 300 WCDMA850 : 102 WCDMA1900 : 277 Bluetooth : 79 WLAN : 11
<b>Class of GPRS</b>	Class 10

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

#### 1.4. Description of test mode

Band	Frequency (MHz)	Voice GSM (dBm)	GPRS Data			
			GPRS 1 TX Slot (dBm)	GPRS 2 TX Slot (dBm)	GPRS 3 TX Slot (dBm)	GPRS 4 TX Slot (dBm)
GSM850	824.2	31.17	31.17	29.60		
	836.6	31.58	31.52	29.91		
	848.8	31.74	31.71	30.08		
GSM1900	1 850.2	28.04	27.96	26.37		
	1 880.0	28.11	28.04	26.45		
	1 909.8	28.18	28.10	26.53		

Band	Frequency (MHz)	EDGE Data			
		EDGE 1 TX Slot (dBm)	EDGE 2 TX Slot (dBm)	EDGE 3 TX Slot (dBm)	EDGE 4 TX Slot (dBm)
GSM850	824.2	26.18	26.10		
	836.6	26.52	26.42		
	848.8	26.70	26.61		
GSM1900	1 850.2	24.57	24.50		
	1 880.0	24.65	24.57		
	1 909.8	24.73	24.63		

3GPP Release version	Mode	3GPP 34.121 Sutest	Cellular Band[dBm]			PCS Band[dBm]		
			4132	4183	4233	9262	9400	9538
99	WCDMA	12.2kbps RMC	21.70	21.60	21.72	22.42	22.22	21.29
5	HSDPA	Sutest1	21.62	21.44	21.50	22.28	22.02	21.19
5		Sutest2	19.41	19.30	19.43	20.10	19.98	19.49
5		Sutest3	19.23	19.20	19.40	19.68	19.63	18.83
5		Sutest4	17.71	17.23	17.96	18.61	18.48	17.80

GSM (850 / 1900)

We found out the test mode with the highest power level after we analyze all the data rates. So we chose GSM (850 / 1900) **GSM Voice** and WCDMA (850/1900) **12.2 kbps RMC** (worst case) as a representative.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 1.5. Test equipment list

Equipment	Manufacturer	Model	Cal Due.
Signal Generator	Agilent	E4438C	Mar. 31, 2011
Signal Generator	Rohde & Schwarz	SMR40	Sep. 25, 2010
Spectrum Analyzer	Rohde & Schwarz	FSP40	Mar. 31, 2011
Mobile Test Unit	Agilent	E5515C	Mar. 31, 2011
Directional Coupler	Narda	4226-20	Jan. 07, 2011
High Pass Filter	Wainwright	WHK3.0/18G-10SS	Sep. 29, 2010
Band Reject Filter	Wainwright	WRCG824/849-814/85 960/10SS	Apr. 01, 2011
DC power Supply	Agilent	U8002A	Jan. 06, 2011
Preamplifier	H.P.	8447F	Jul. 02, 2010
Preamplifier	Rohde & Schwarz	8449B	Mar. 31, 2011
Test Receiver	R & S	ESU26	Apr. 08, 2011
Bilog Antenna	SCHWARZBECK MESSELEKTRONIK	VULB9163	Jul. 22, 2010
Horn Antenna	Rohde & Schwarz	HF 906	Oct. 08, 2011
Horn Antenna	SCHWARZBECK	BBH 9120D	Nov. 09, 2011
Dipole Antenna	VHAP/UHAP	975/958	Oct. 10, 2011
Antenna Master	EMCO	1050	N.C.R
Turn Table	Daeil EMC	DI-1500	N.C.R
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 6.4 m x 6.6 m)	Jan. 27, 2011

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1.6. Summary of test results

The EUT has been tested according to the following specifications:

APPLIED STANDARD : FCC Part 22, 24		
Section in FCC part	Test Item	Result
§2.1046 §22.913(a) §24.232(b)	RF Radiated Output Power	Complied
§2.1053 §22.917(e) §24.238(a)	Spurious Radiated Emission	Complied
§2.1046(a)	Conducted Output Power	Complied
§2.1049(h) (i)	Occupied Bandwidth	Complied
§2.1051 §22.917(e) §24.238(a)	Spurious Emission at Antenna Terminal	Complied
§2.1055 §22.355 §24.235	Frequency Stability	Complied
§22.917(e) §24.238(a)	Band Edge	Complied

## 1.7. Test report revision


Revision	Report number	Description
0	F690501/RF-RTL003865	Initial

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*


## 2. RF radiated output power & spurious radiated emission

### 2.1. Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

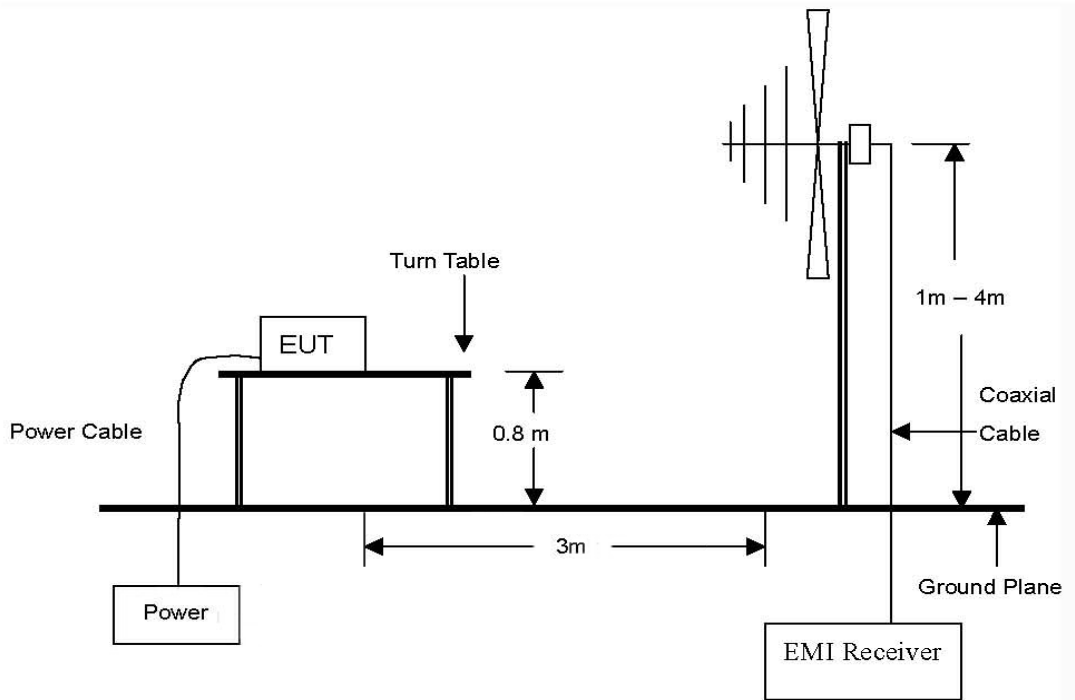


The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 18 GHz Emissions.

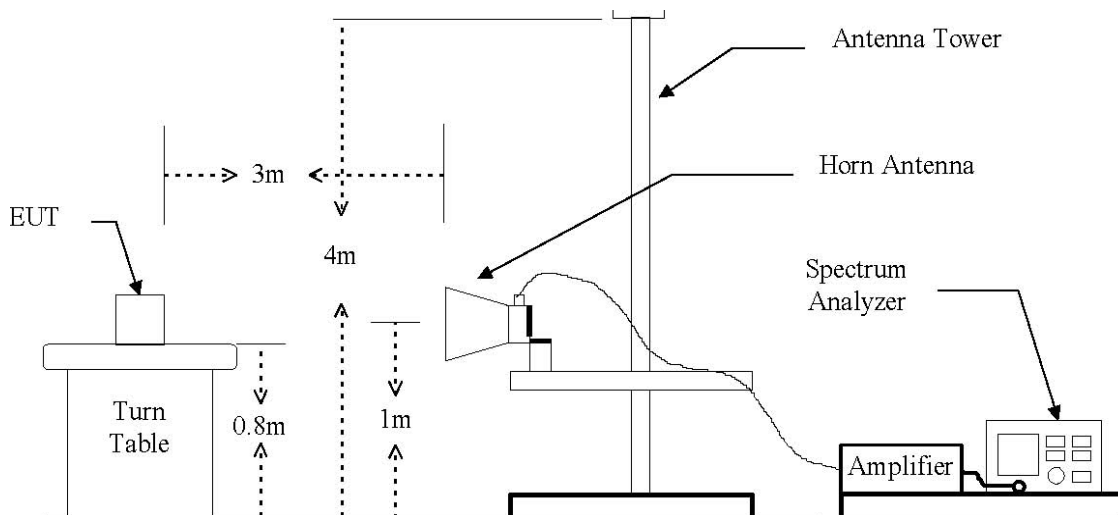

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

The diagram below shows the test setup for substituted method

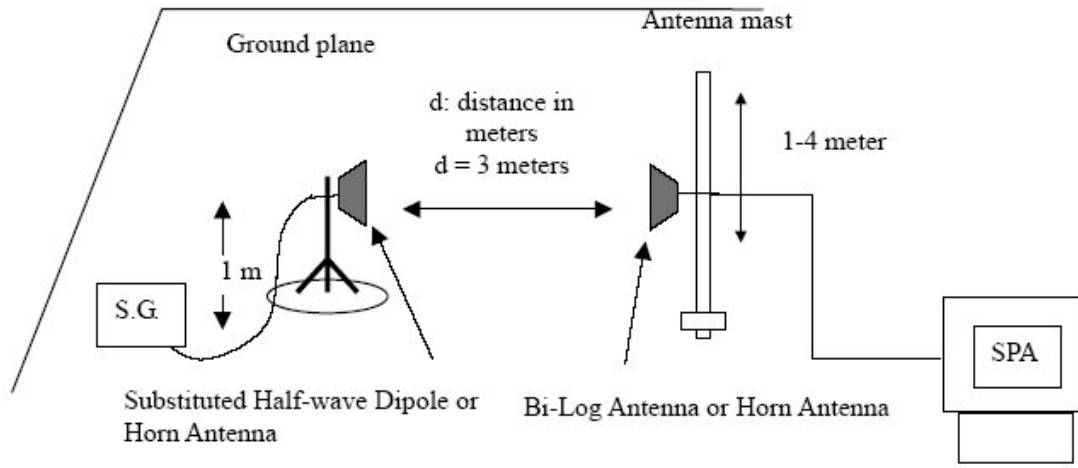

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*



## 2.2. Limit

FCC §22.913(a), the ERP of mobile transmitters must not exceed 7 watts. FCC §24.232(b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

## 2.3. Test procedure : Based on ANSI/TIA 603C: 2004

1. On a test site, the EUT shall be placed at 80cm height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. During the measurement of the EUT, the resolution bandwidth was to 1 MHz and the average bandwidth was set to 1 MHz.
5. The transmitter shall be switched on, the measuring receiver shall be tuned to the frequency of the transmitter under test.
6. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
7. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
8. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
9. The maximum signal level detected by the measuring receiver shall be noted.
10. The EUT was replaced by half-wave dipole (824 ~ 849 MHz) or horn antenna (1 850 ~ 1 910 MHz) connected to a signal generator.
11. In necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
12. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
13. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
14. The input level to the substitution antenna shall be recorded as power level in dB m, corrected for any change of input attenuator setting of the measuring receiver.
15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.4. Test result for RF radiated output power

Ambient temperature : (24 ± 2) °C  
 Relative humidity : 47 % R.H.

### GSM850

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
824.2	H	41.81	3.42	-10.44	27.95	624.13
824.2	V	34.62	3.42	-10.44	20.76	119.20
836.6	H	41.58	3.38	-10.48	27.72	591.55
836.6	V	34.20	3.38	-10.48	20.34	108.14
848.8	H	42.33	3.33	-10.53	28.47	702.74
848.8	V	32.87	3.33	-10.53	19.01	79.58

### GSM850 (EDGE)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
824.2	H	37.07	3.42	-10.44	23.21	209.55
824.2	V	29.98	3.42	-10.44	16.12	40.95

### GSM1900

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P.	
					(dB m)	(mW)
1 850.2	H	18.45	4.87	6.97	20.55	113.50
1 850.2	V	24.53	4.87	6.97	26.63	459.78
1 880.0	H	16.97	4.91	7.05	19.11	81.40
1 880.0	V	25.38	4.91	7.05	27.52	565.26
1 909.8	H	18.27	4.94	7.12	20.45	110.96
1 909.8	V	23.20	4.94	7.12	25.39	346.00

### GSM1900 (EDGE)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
1 880.0	H	13.90	4.91	7.05	16.04	40.15
1 880.0	V	21.61	4.91	7.05	23.75	237.27

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**WCDMA 850**

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
826.4	H	34.20	3.42	-10.44	20.34	108.21
826.4	V	24.86	3.42	-10.44	11.00	12.60
836.6	H	32.01	3.38	-10.48	18.15	65.31
836.6	V	23.97	3.38	-10.48	10.11	10.26
846.6	H	32.44	3.33	-10.53	18.58	72.08
846.6	V	23.46	3.33	-10.53	9.60	9.12

**HSDPA 850**

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
826.4	H	30.93	3.42	-10.44	17.07	50.97
826.4	V	24.36	3.42	-10.44	10.50	11.23

**WCDMA 1900**

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
1852.4	H	19.39	4.87	6.97	21.49	140.89
1852.4	V	13.79	4.87	6.97	15.89	38.85
1880.0	H	20.02	4.91	7.05	22.16	164.53
1880.0	V	13.12	4.91	7.05	15.26	33.55
1907.6	H	17.54	4.94	7.12	19.72	93.76
1907.6	V	13.79	4.94	7.12	15.97	39.57

**HSDPA 1900**

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
1880.0	H	19.88	4.91	7.05	22.02	159.31
1880.0	V	13.78	4.91	7.05	15.92	39.05

Remark:

1. E.R.P. & E.I.R.P = [S.G level + Amp.](dB m) - Cable loss(dB) + Ant. gain (dB d/dB i)
2. The E.I.R.P was measured in three orthogonal EUT position(x-axis, y-axis and z-axis). Worst cases are z-axis.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 2.5. Spurious radiated emission

- Modulation Signal : GSM850
- Measured output Power : 28.47 dB m = 0.703 W
- Distance : 3 meters
- Limit :  $-(43 + 10\log_{10}(W)) = -41.47$  dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P (dB m)	dB c	Margin (dB)
Low Channel (824.2 MHz)							
1 648.40	V	-36.76	4.54	6.44	-34.85	-63.32	21.85
1 648.40	H	-45.96	4.54	6.44	-44.06	-72.53	31.06
Middle Channel (836.6 MHz)							
1 673.20	V	-36.57	4.58	6.51	-34.64	-63.11	21.64
1 673.20	H	-46.65	4.58	6.51	-44.72	-73.19	31.72
High Channel (848.8 MHz)							
1 697.60	V	-37.40	4.62	6.57	-35.45	-63.92	22.45
1 697.60	H	-47.57	4.62	6.57	-45.62	-74.09	32.62

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- Modulation Signal : GSM1900
- Measured output Power : 27.52 dB m = 0.565 W
- Distance : 3 meters
- Limit :  $-(43 + 10\log_{10}(W)) = -40.52$  dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P (dB m)	dB c	Margin (dB)
Low Channel(1 850.2 MHz)							
3 700.40	V	-49.73	7.13	11.85	-45.01	-72.53	32.01
3 700.40	H	-46.50	7.13	11.85	-41.78	-69.30	28.78
Middle Channel(1 880.0 MHz)							
3 760.00	V	-48.59	7.23	11.85	-43.98	-71.50	30.98
3 760.00	H	-49.87	7.23	11.85	-45.26	-72.78	32.26
High Channel(1 909.8 MHz)							
3 819.60	V	-48.85	7.33	11.84	-44.34	-71.86	31.34
3 819.60	H	-51.46	7.33	11.84	-46.95	-74.47	33.95

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- Modulation Signal : WCDMA850
- Measured output Power : 20.34 dB m = 0.108 W
- Distance : 3 meters
- Limit :  $-(43 + 10\log_{10}(W)) = -33.33$  dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P (dB m)	dB c	Margin (dB)
Low Channel (826.4 MHz)							
1 652.80	V	-49.69	4.54	6.45	-47.78	-68.12	34.78
1 652.80	H	-50.31	4.54	6.45	-48.40	-68.74	35.40
Middle Channel (836.6 MHz)							
1 673.20	V	-48.73	4.58	6.51	-46.80	-67.14	33.80
1 673.20	H	-52.50	4.58	6.51	-50.57	-70.91	37.57
High Channel (846.60 MHz)							
1 693.20	V	-44.13	4.61	6.56	-42.18	-62.52	29.18
1 693.20	H	-52.81	4.61	6.56	-50.86	-71.20	37.86

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

- Modulation Signal : WCDMA1900
- Measured output Power : 22.16 dB m = 0.164 W
- Distance : 3 meters
- Limit :  $-(43 + 10\log_{10}(W)) = -35.148$  dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P (dB m)	dB c	Margin (dB)
Low Channel(1 852.40 MHz)							
3 704.80	V	-48.01	7.14	11.85	-43.30	-65.46	30.30
3 704.80	H	-43.94	7.14	11.85	-39.23	-61.39	26.23
Middle Channel(1 880.0 MHz)							
3 760.00	V	-45.27	7.23	11.85	-40.66	-62.82	27.66
3 760.00	H	-45.72	7.23	11.85	-41.11	-63.27	28.11
High Channel(1 907.60 MHz)							
3 815.20	V	-44.80	7.33	11.84	-40.28	-62.44	27.28
3 815.20	H	-47.83	7.33	11.84	-43.31	-65.47	30.31

**Remark:**

1.  $E.R.P. \ \& \ E.I.R.P = S.G \ level \ (dB \ m) - Cable \ loss \ (dB) + Ant. \ gain \ (dB \ d/dB \ i)$
2. No more harmonic above 3<sup>rd</sup> harmonic for all channel.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


### 3. Conducted Output Power

#### 3.1. Limit

Requirements: CFR 47, Section §2.1046

#### 3.2. Test Procedure

1. The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
2. The mobile was set up for the max. output power with pseudo random data modulation.
3. The power was measured with Mobile Communication Tester.



---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*



### 3.3. Test Result

Ambient temperature : (24 ± 2) °C  
 Relative humidity : 47 % R.H.

Band	Frequency (MHz)	Voice GSM (dBm)	GPRS Data			
			GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot
			(dBm)	(dBm)	(dBm)	(dBm)
GSM850	824.2	31.17	31.17	29.60		
	836.6	31.58	31.52	29.91		
	848.8	31.74	31.71	30.08		
GSM1900	1 850.2	28.04	27.96	26.37		
	1 880.0	28.11	28.04	26.45		
	1 909.8	28.18	28.10	26.53		

Band	Frequency (MHz)	EDGE Data			
		EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
		(dBm)	(dBm)	(dBm)	(dBm)
GSM850	824.2	26.18	26.10		
	836.6	26.52	26.42		
	848.8	26.70	26.61		
GSM1900	1 850.2	24.57	24.50		
	1 880.0	24.65	24.57		
	1 909.8	24.73	24.63		

3GPP Release version	Mode	3GPP 34.121 Sutest	Cellular Band[dBm]			PCS Band[dBm]		
			4132	4183	4233	9262	9400	9538
99	WCDMA	12.2kbps RMC	21.70	21.60	21.72	22.42	22.22	21.29
5	HSDPA	Sutest1	21.62	21.44	21.50	22.28	22.02	21.19
5		Sutest2	19.41	19.30	19.43	20.10	19.98	19.49
5		Sutest3	19.23	19.20	19.40	19.68	19.63	18.83
5		Sutest4	17.71	17.23	17.96	18.61	18.48	17.80

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


## 4. Occupied Bandwidth 99 %

### 4.1. Limit

Requirements: CFR 47, Section §2.1049.

### 4.2. Test Procedure

1. The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
2. The resolution bandwidth of the spectrum analyzer was set.  
Occupied Bandwidth 99 % was tested under

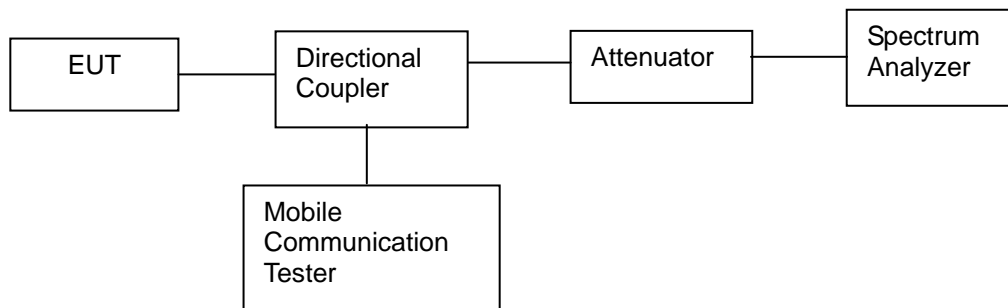

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 4.3 Test Results


Ambient temperature : (24 ± 2) °C  
 Relative humidity : 47 % R.H.

Band	Mode	Frequency (MHz)	Occupied Bandwidth (MHz)
GSM850	GMSK	824.2	0.246
		836.6	0.246
		848.8	0.246
	EDGE	848.8	0.244
GSM1900	GSM	1 850.2	0.246
		1 880.0	0.248
		1 909.8	0.246
	EDGE	1 880.0	0.244
WCDMA850	Voice	826.4	4.160
		836.6T	4.180
		848.6	4.180
	HSDPA	848.6	4.200
WCDMA1900	Voice	1 852.4	4.180
		1 880.0	4.180
		1 907.6	4.180
	HSUPA	1 907.6	4.200


Please refer to the following plots.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**GSM850**  
99 %  
Low Channel

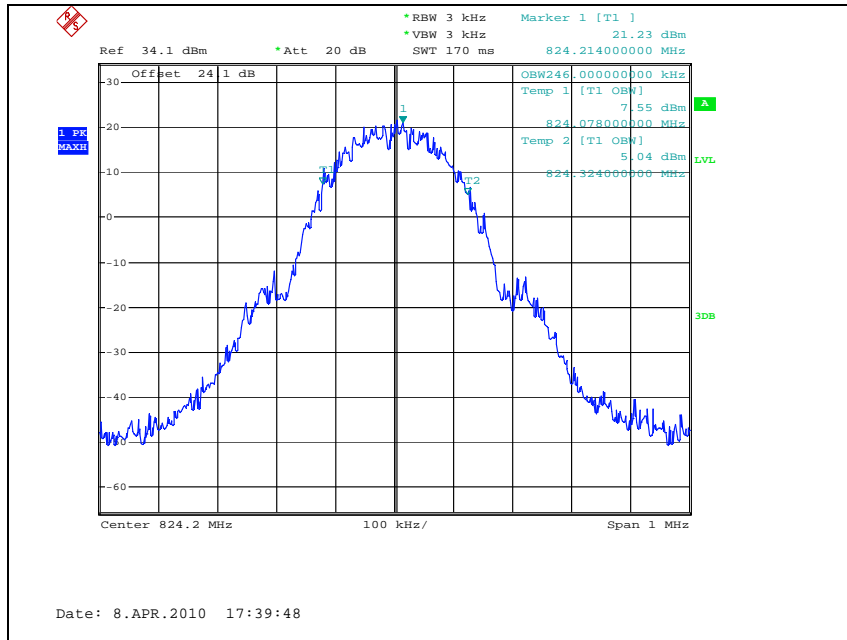


Middle Channel

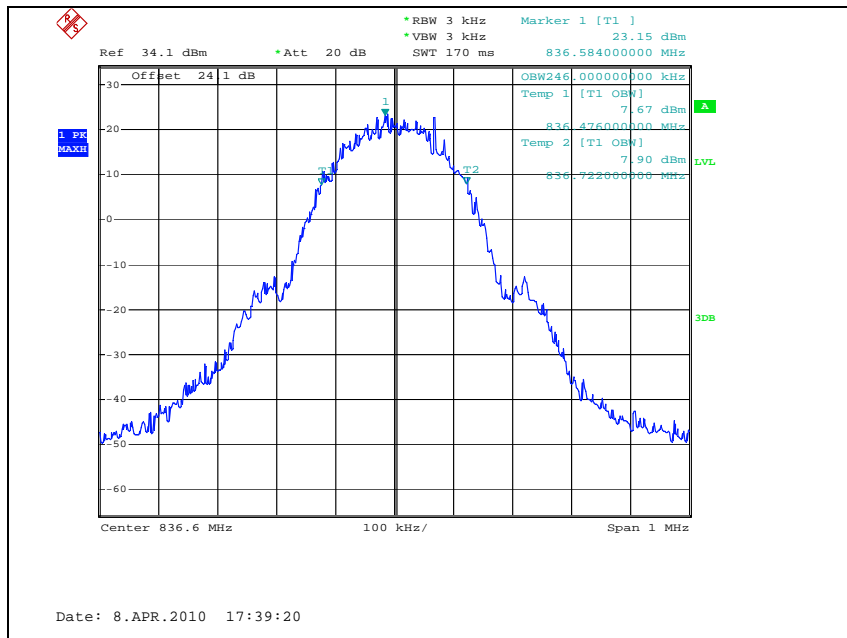

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


## High Channel

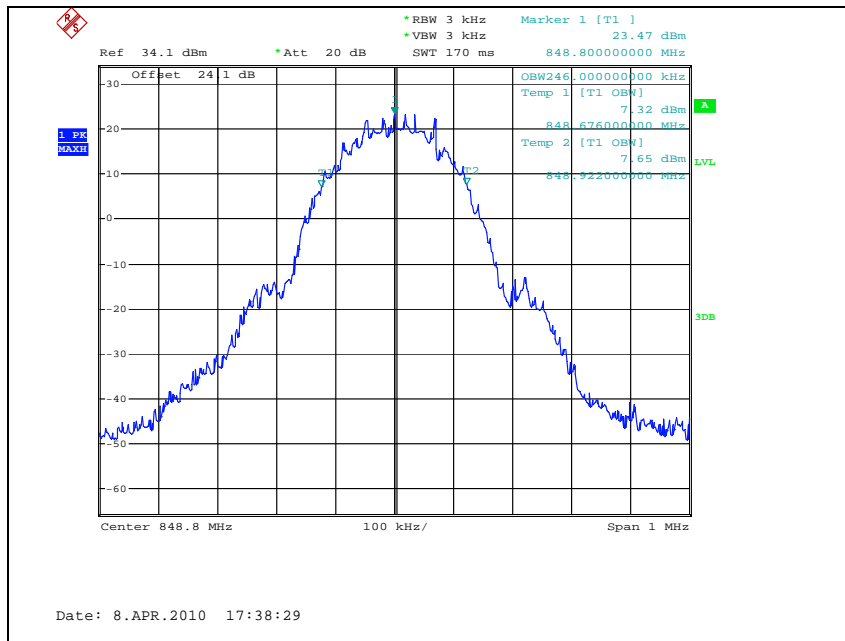

## GSM850 EDGE


99 %

## High Channel

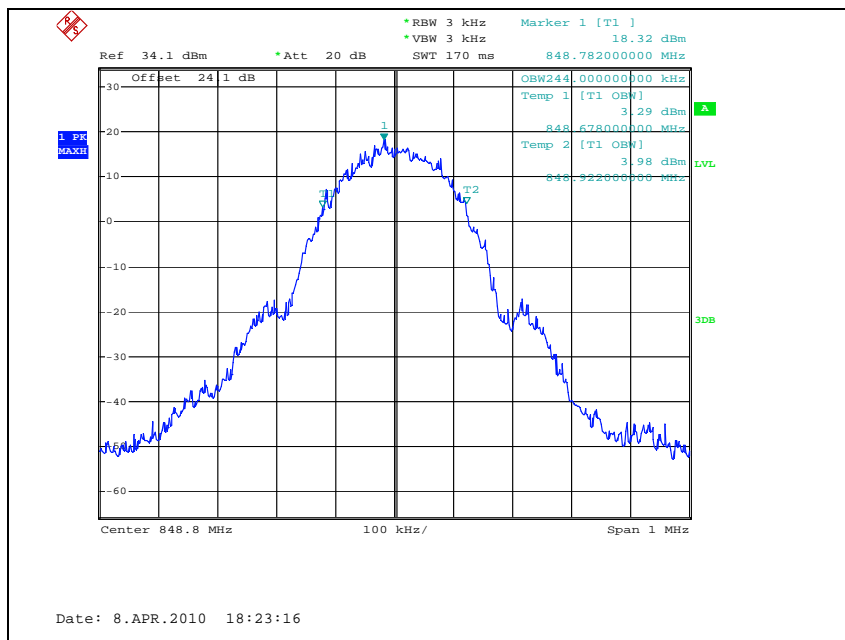


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**GSM1900**  
99 %  
Low Channel

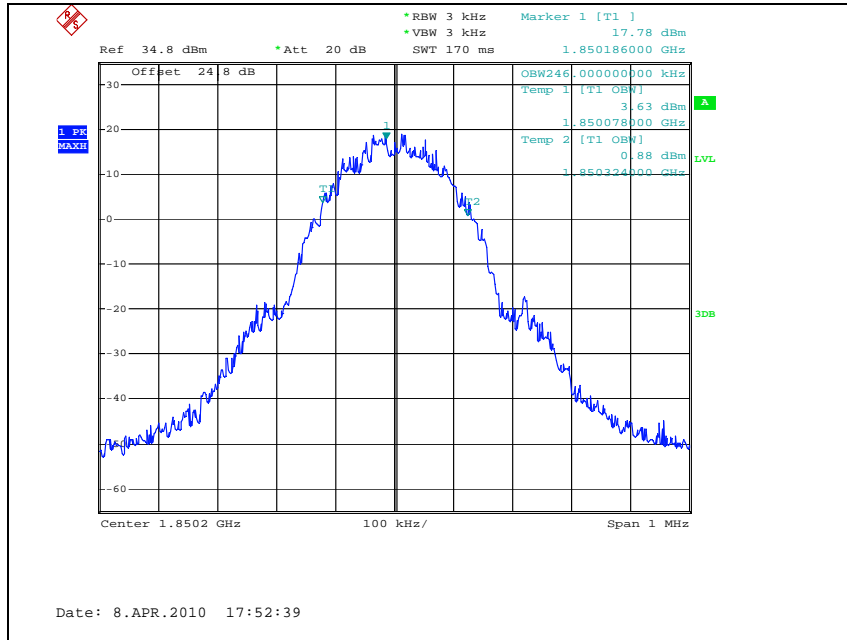


Middle Channel

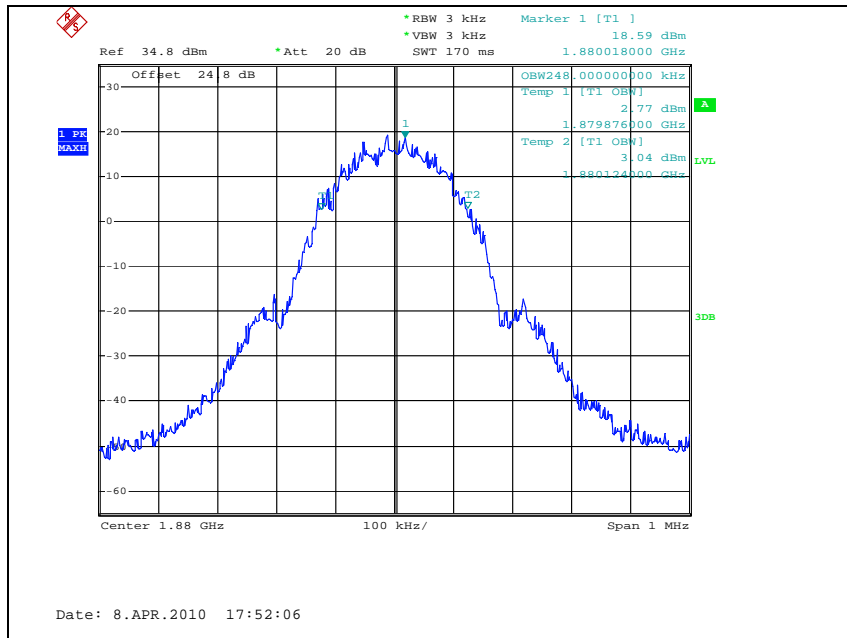


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## High Channel

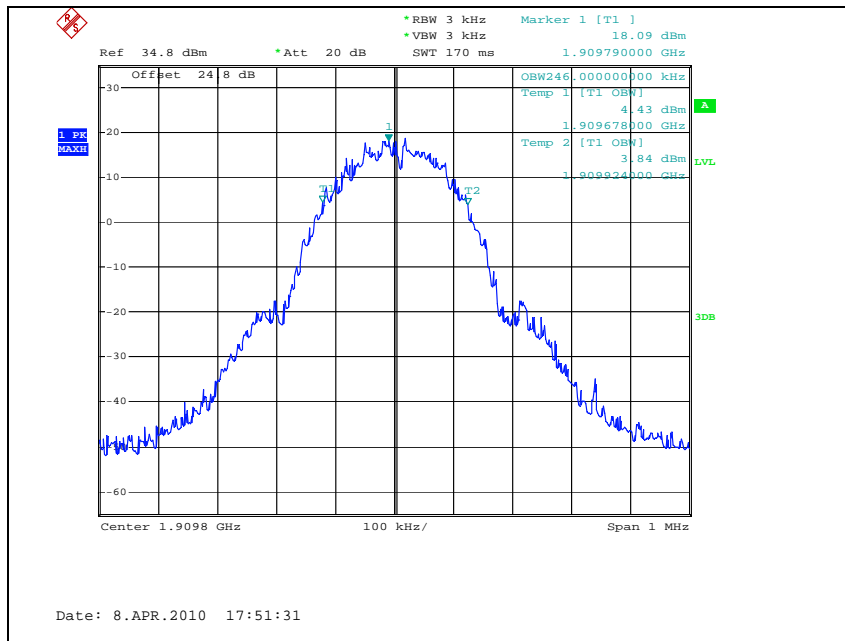

## GSM1900 EDGE 99 % Middle Channel

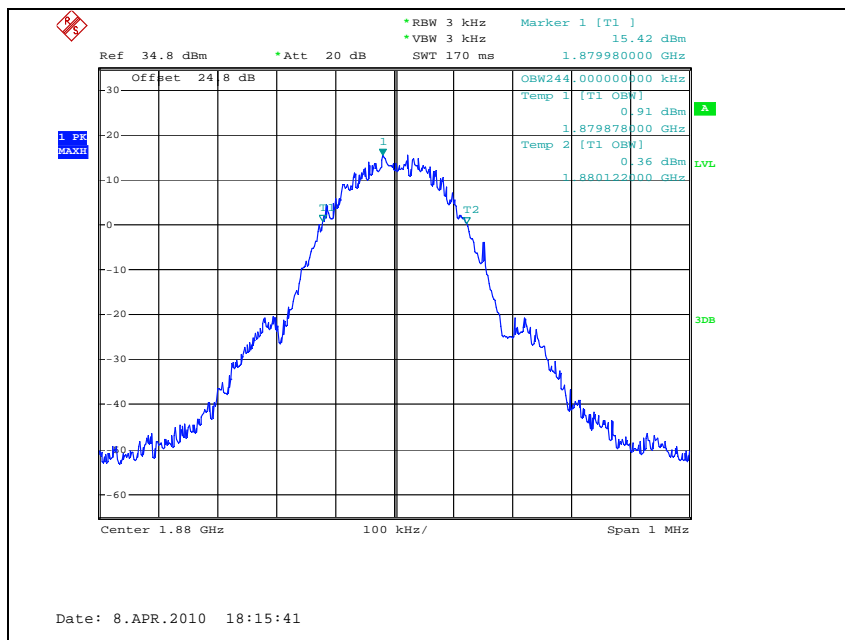


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


## WCDMA 850

99 %

Low Channel

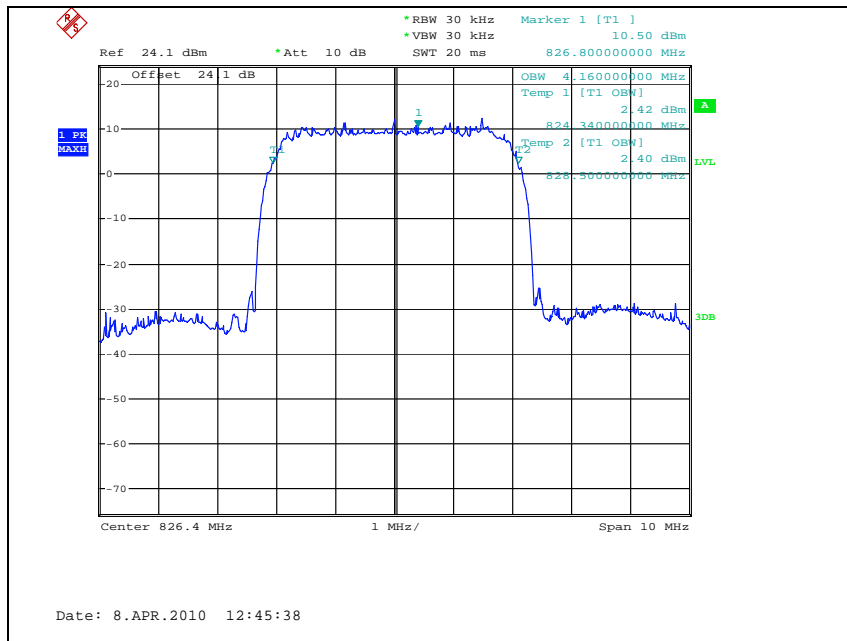


## Middle Channel

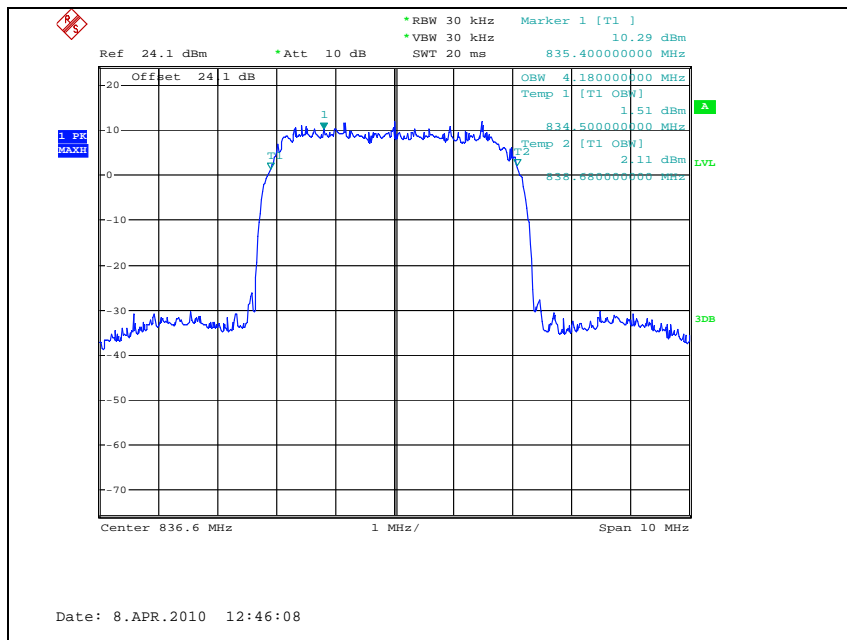

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.




## High Channel

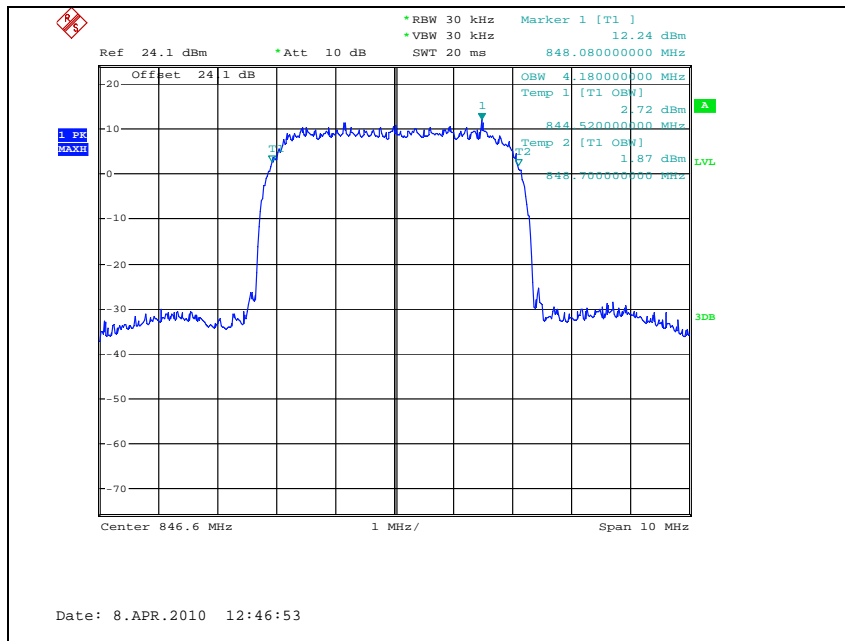

## HSDPA850

99 %

## High Channel

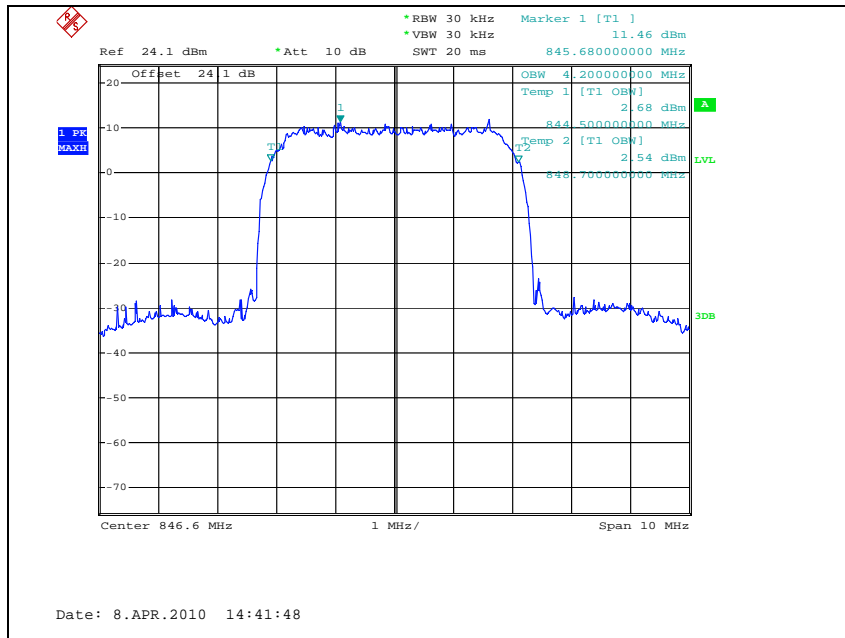


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


## WCDMA 1900

99 %

Low Channel

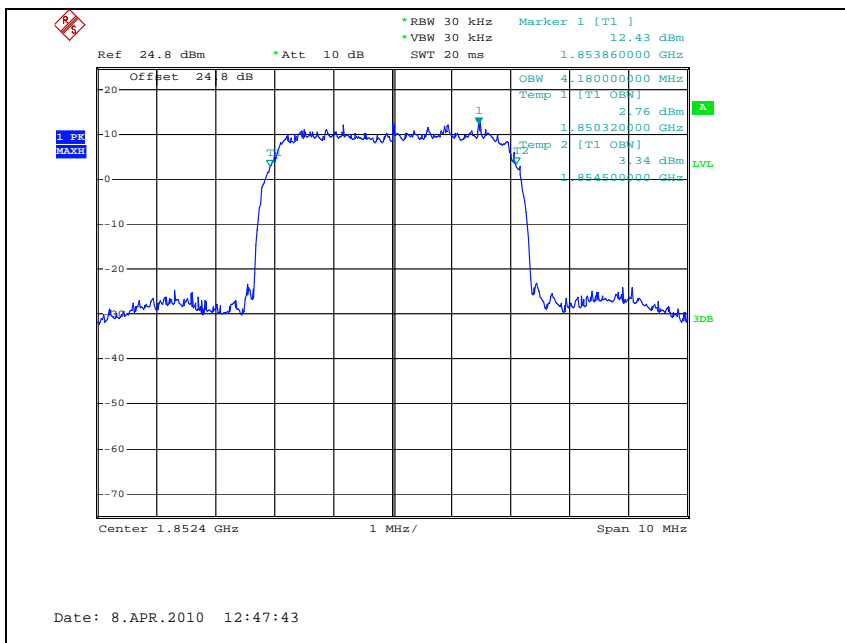


## Middle Channel

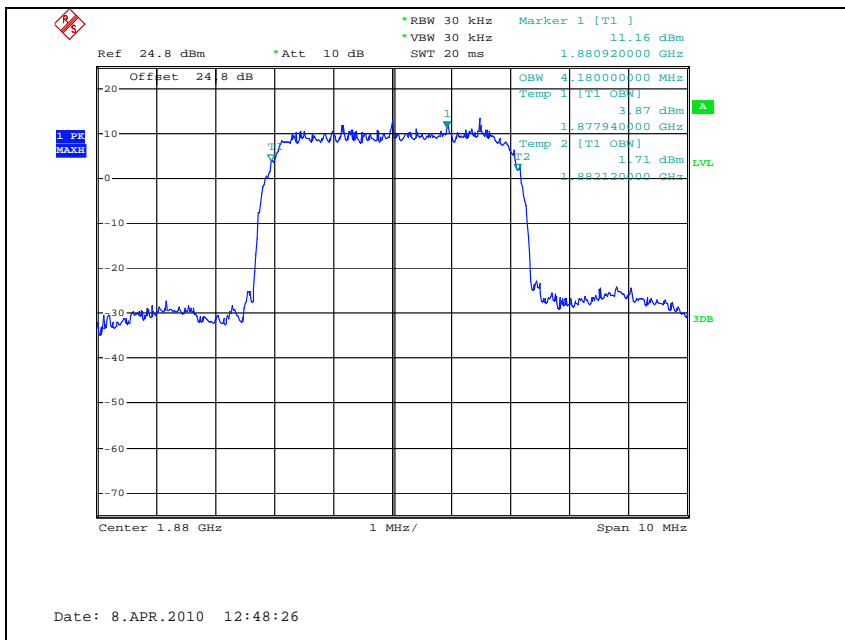

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


## High Channel

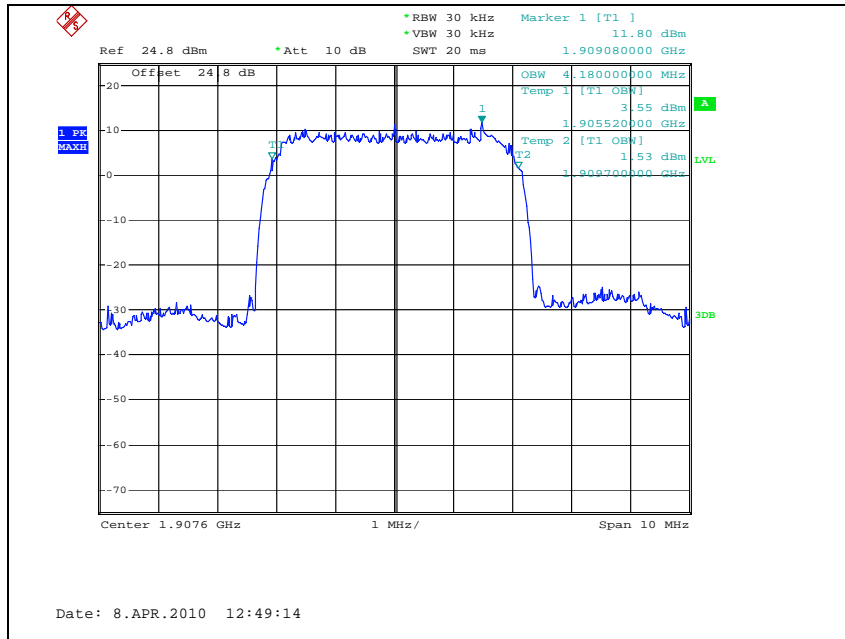

## HSDPA1900

99 %

## Middle Channel

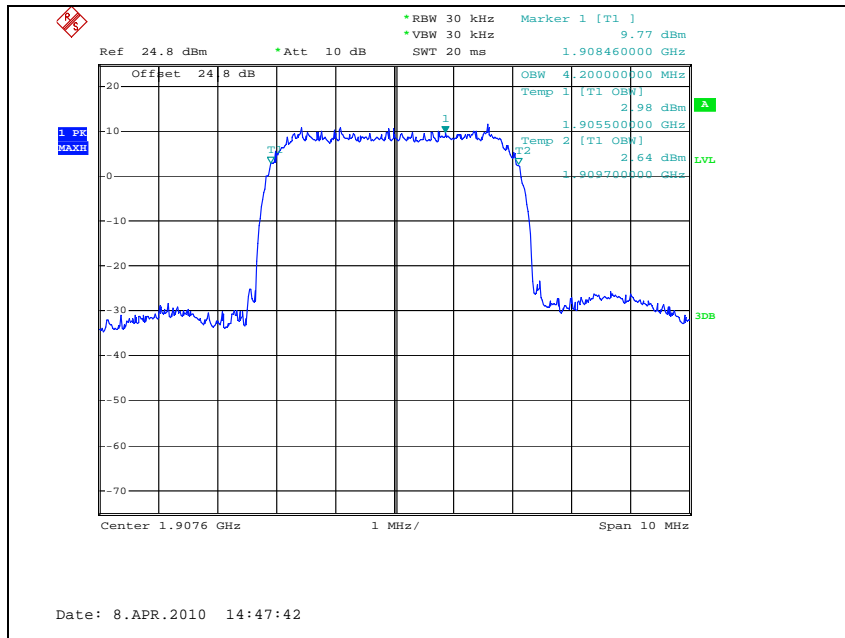

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


## 5. Spurious Emissions at Antenna Terminal

### 5.1. Limit

§ 22.917(e) and §24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency must be attenuated below the transmitting (P) by a factor of at least  $43 + 10\log(P)$  dB.

### 5.2. Test Procedure

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. The resolution bandwidth of the spectrum analyzer was set at 1 MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.
3. Spurious Emission was tested under

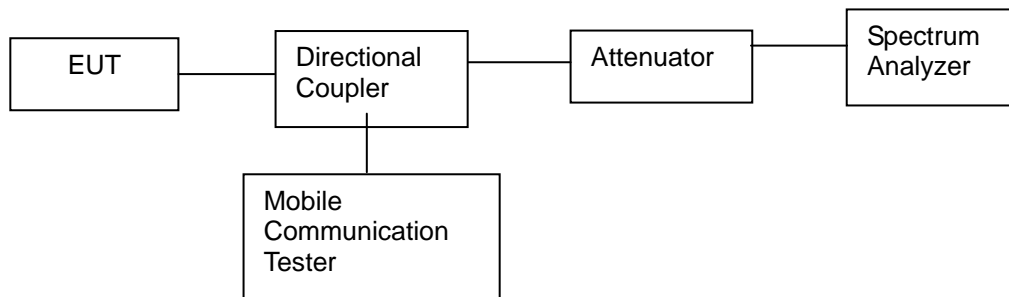


### 5.3. Test Results

Ambient temperature :  $(24 \pm 2)$  °C  
 Relative humidity : 47 % R.H.


Please refer to the following plots.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## GSM850 Low Channel

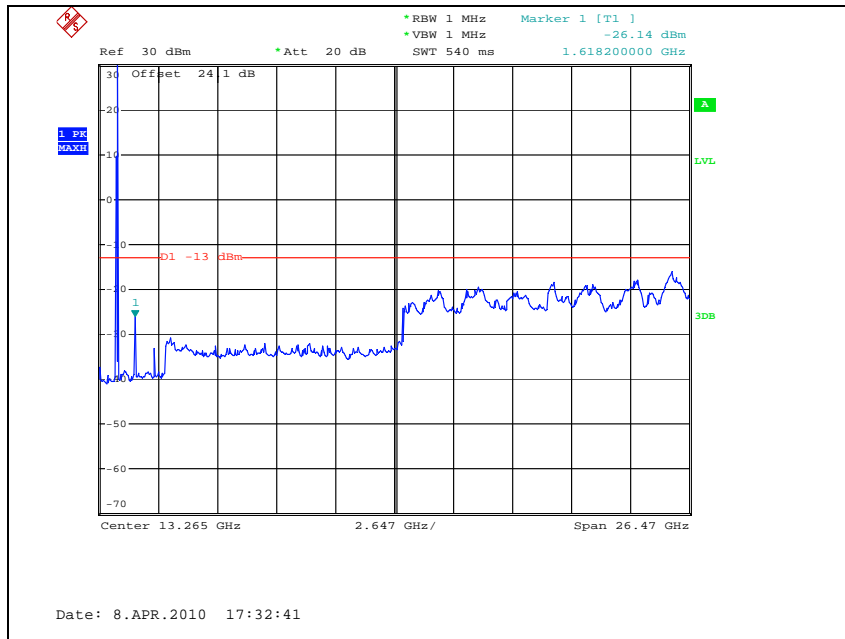


## Middle Channel

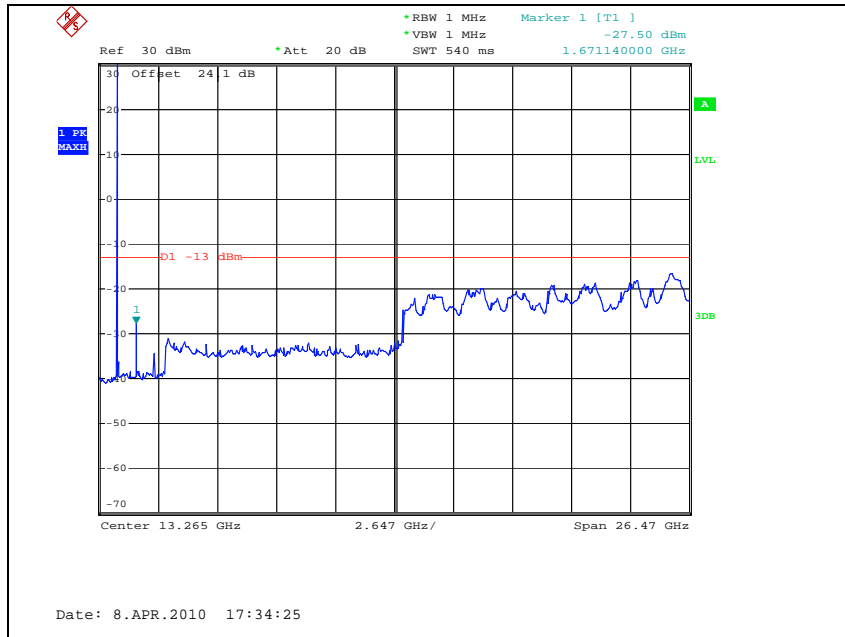


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

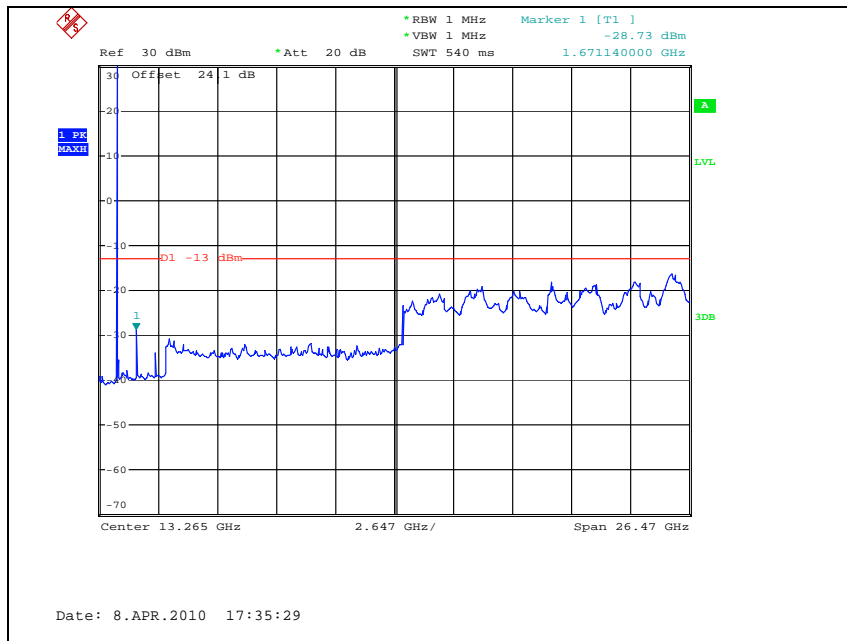


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## GSM1900 Low Channel

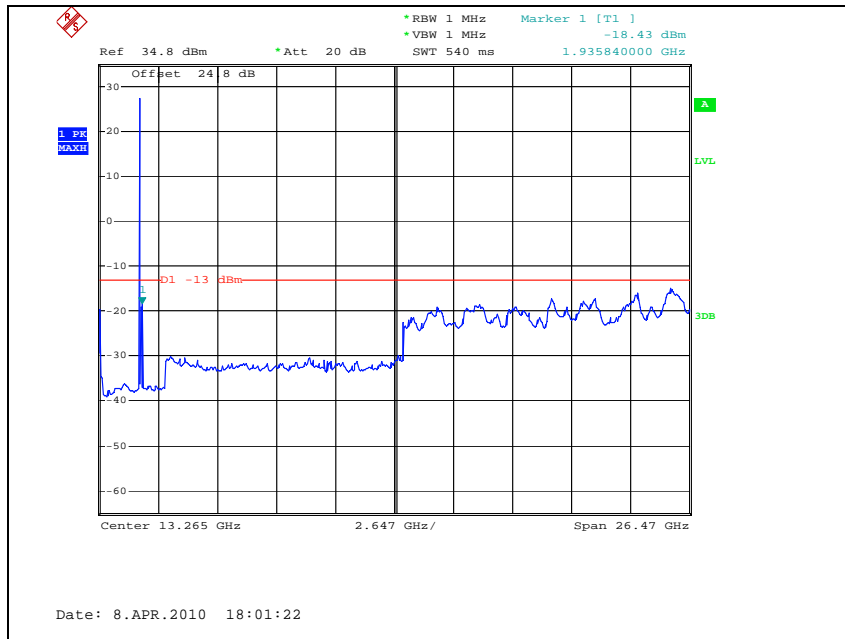


## Middle Channel

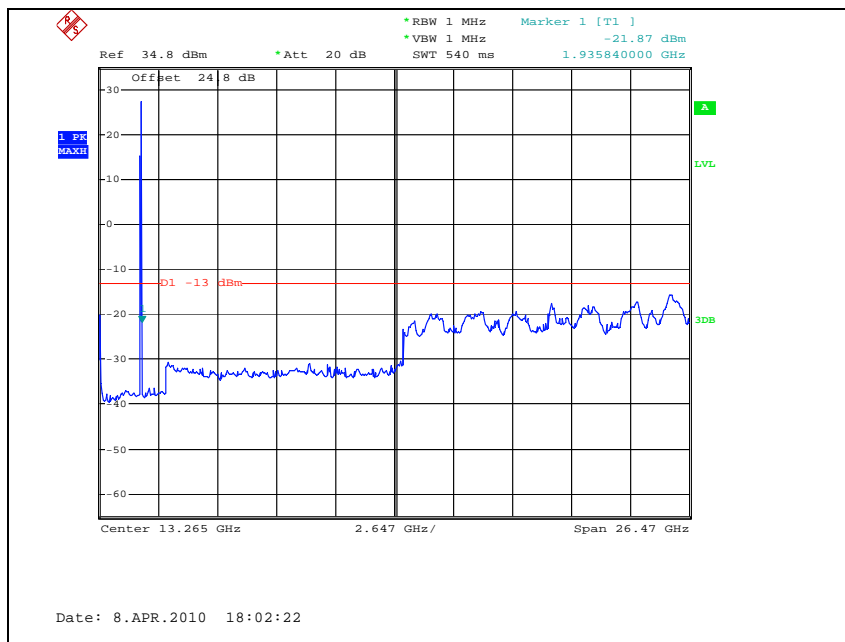

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

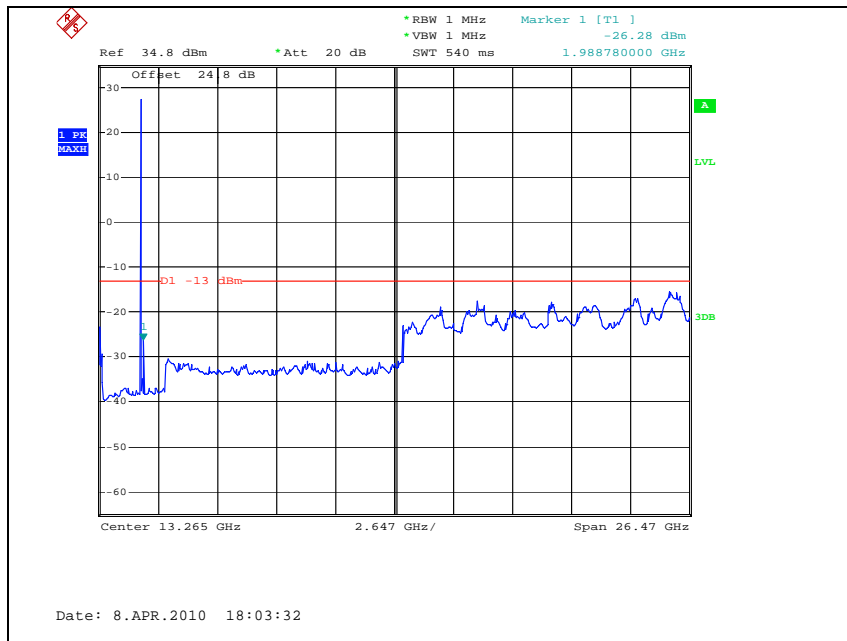


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



## WCDMA850 Low Channel

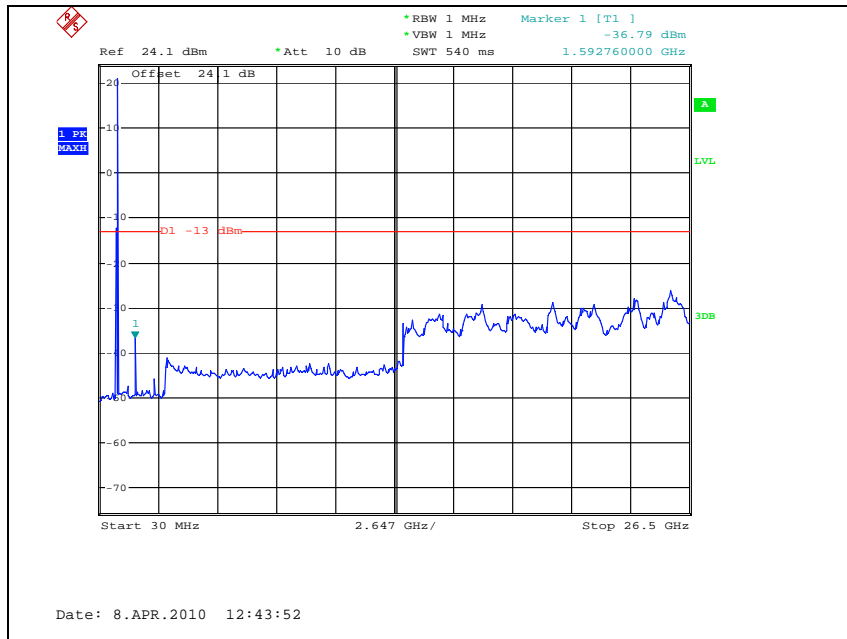


## Middle Channel

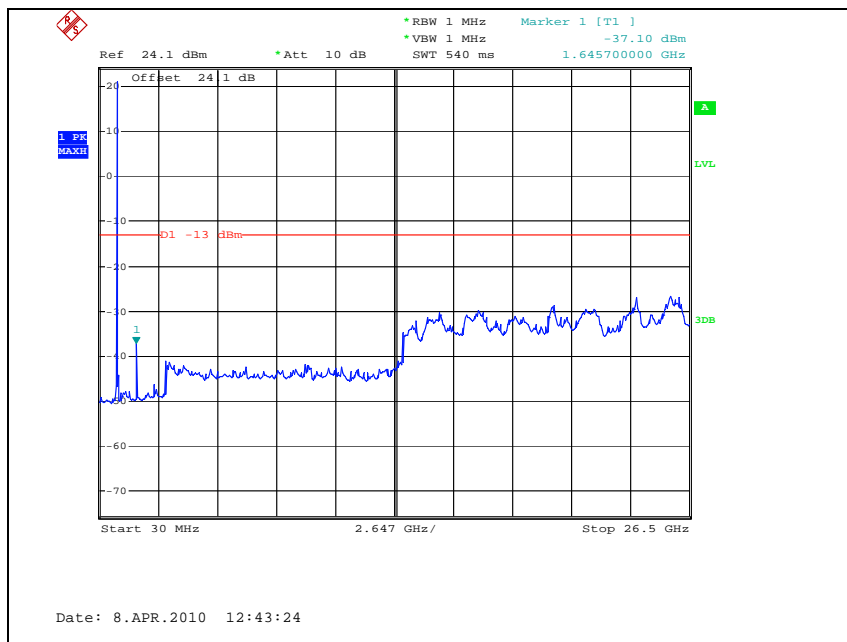


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

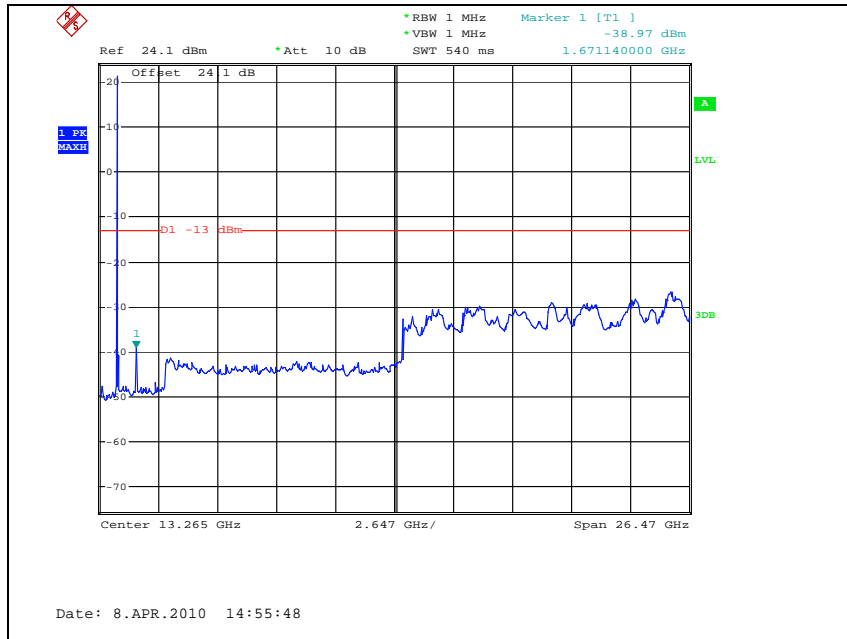


HSDPA850  
High Channel

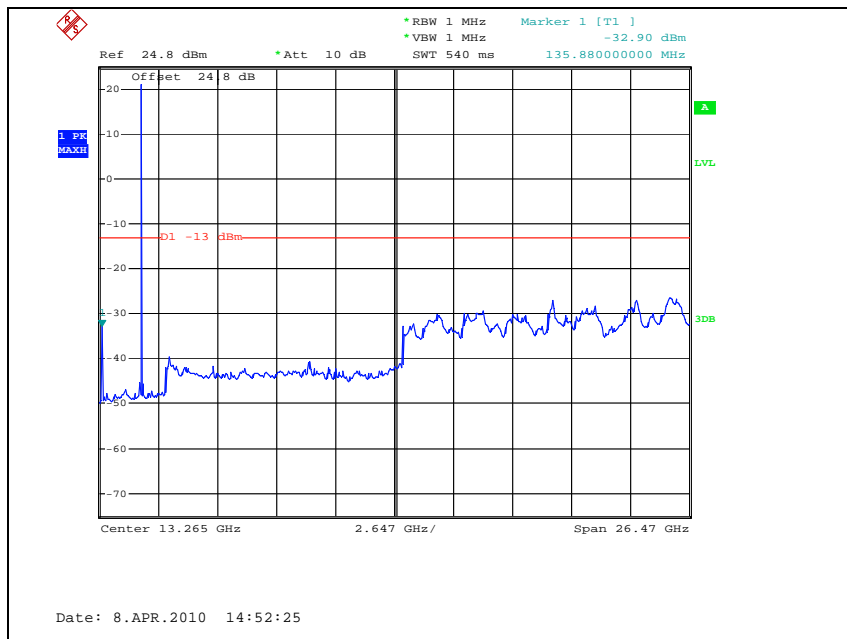


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**WCDMA1900**  
Low Channel

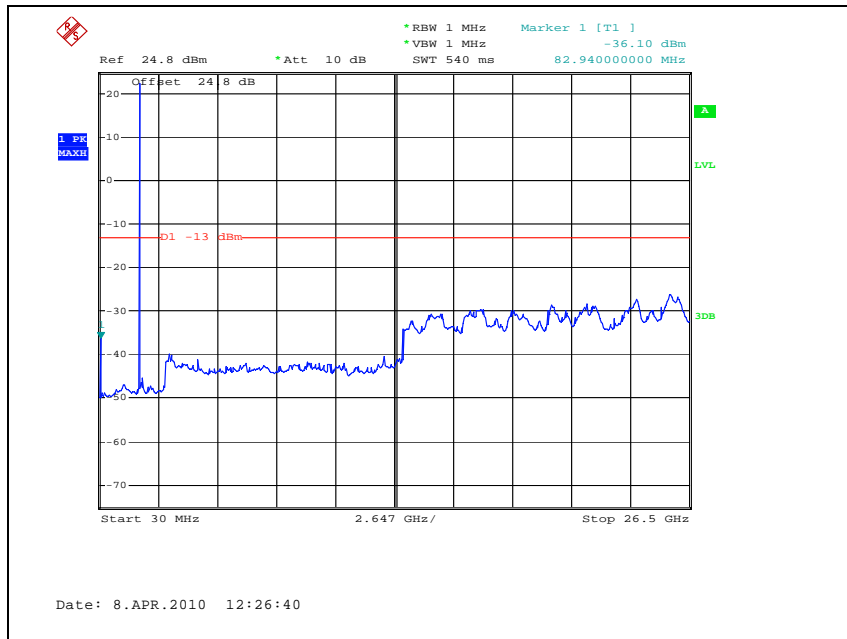


Middle Channel

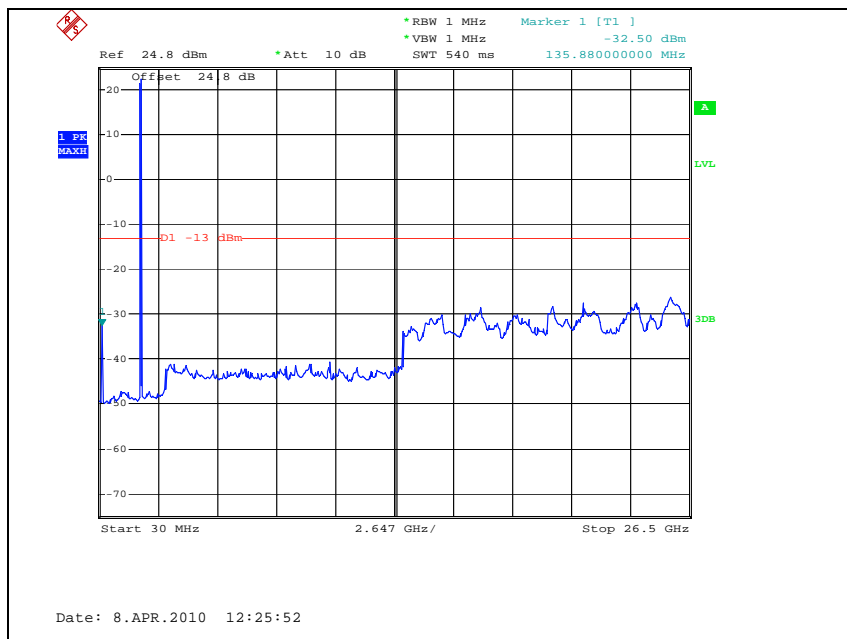


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

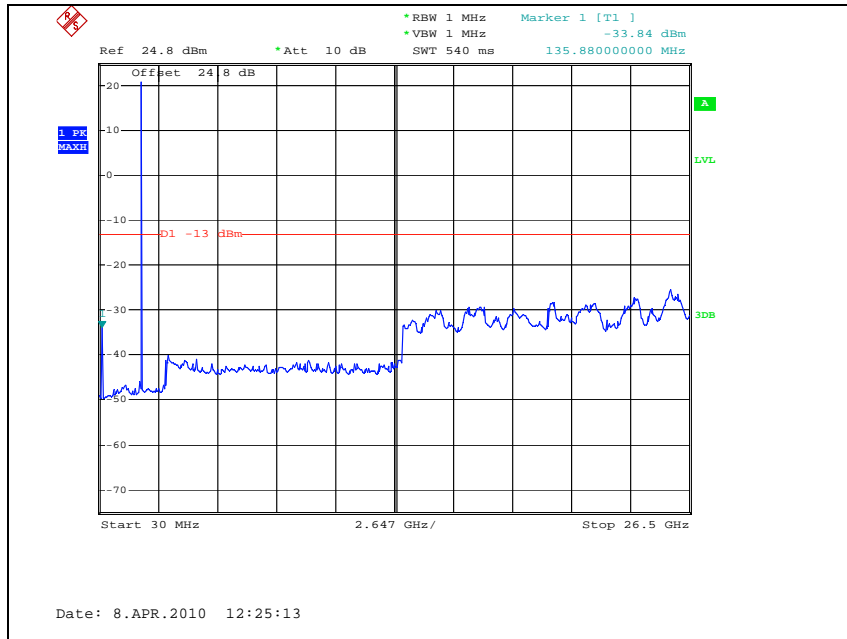

HSDPA1900  
High Channel

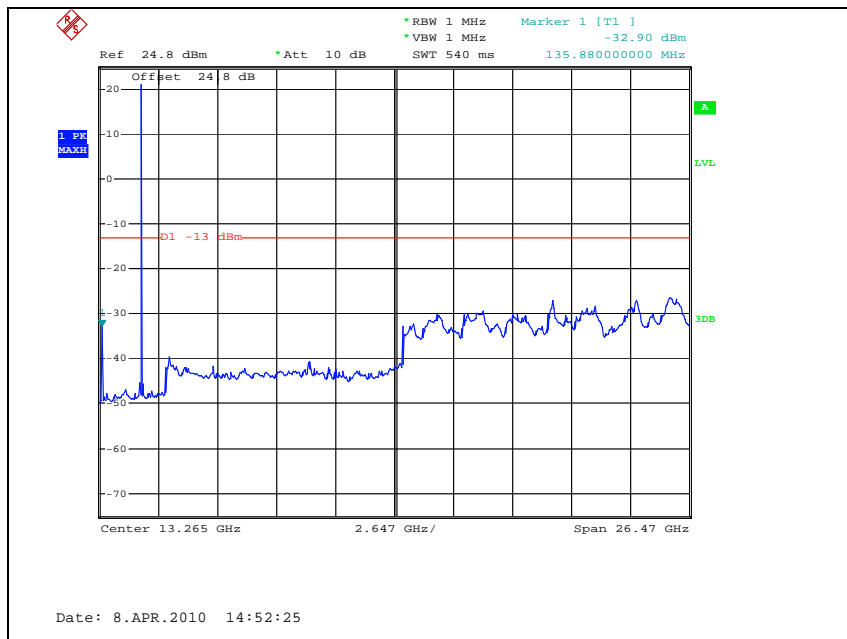

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


## 6. Band Edge

### 6.1. Limit

§ 22.917(e) and §24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency must be attenuated below the transmitting (P) by a factor of at least  $43+10\log(P)$ dB.

### 6.2. Test Procedure

1. The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
2. The center of the spectrum analyzer was set to block edge frequency.

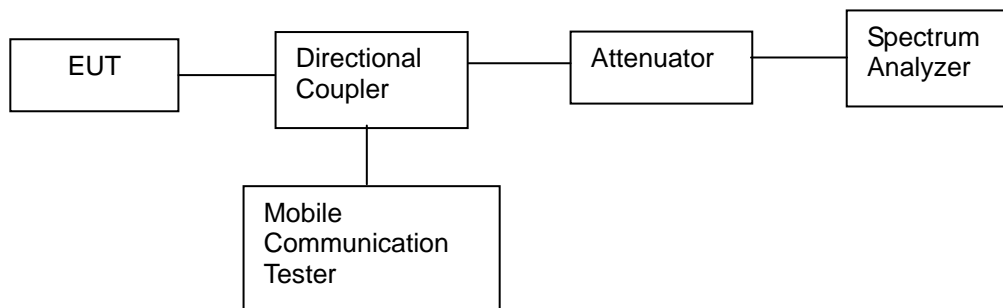


### 6.3. Test Results

Ambient temperature :  $(24 \pm 2)$  °C  
 Relative humidity : 47 % R.H.


Please refer to the following plots.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**GSM850**  
Low Channel

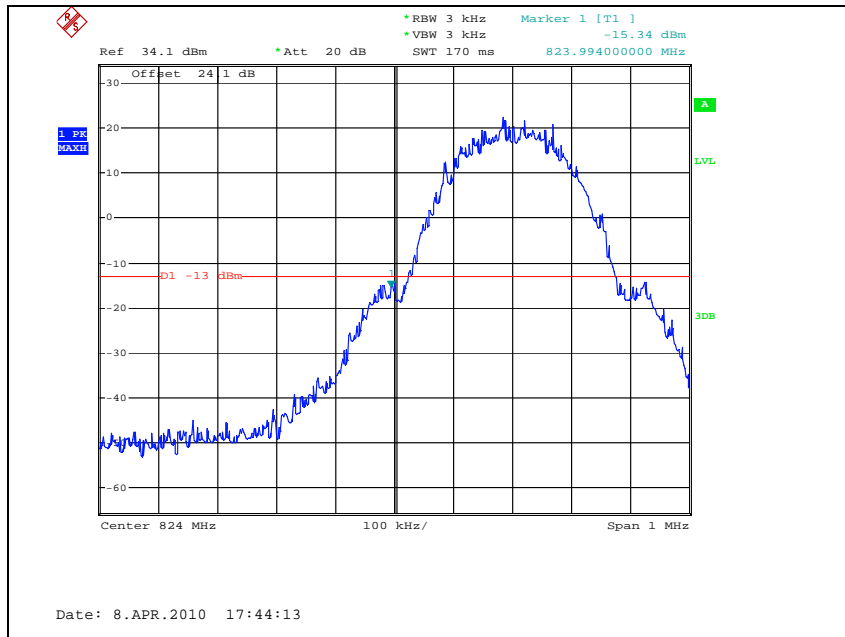


High Channel

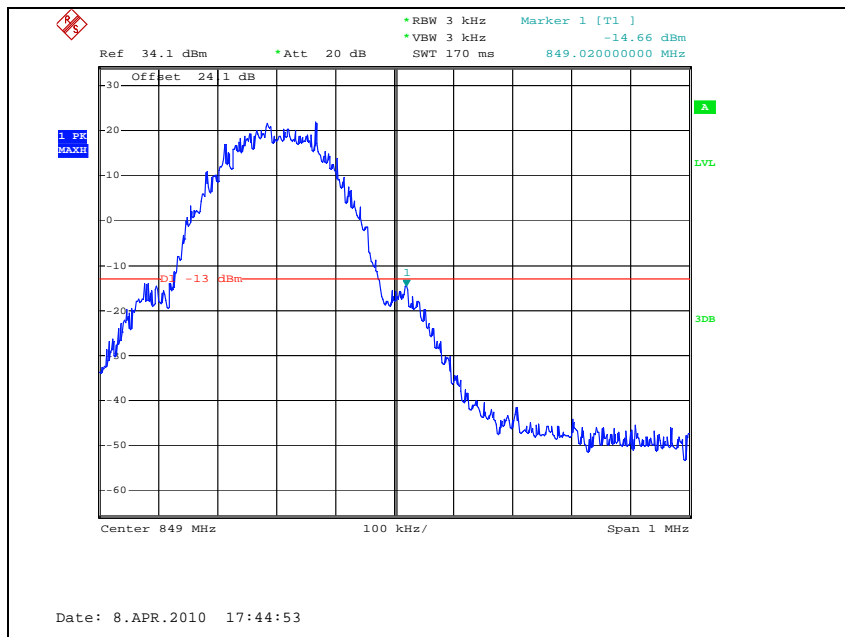


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## GSM850 EDGE Low Channel

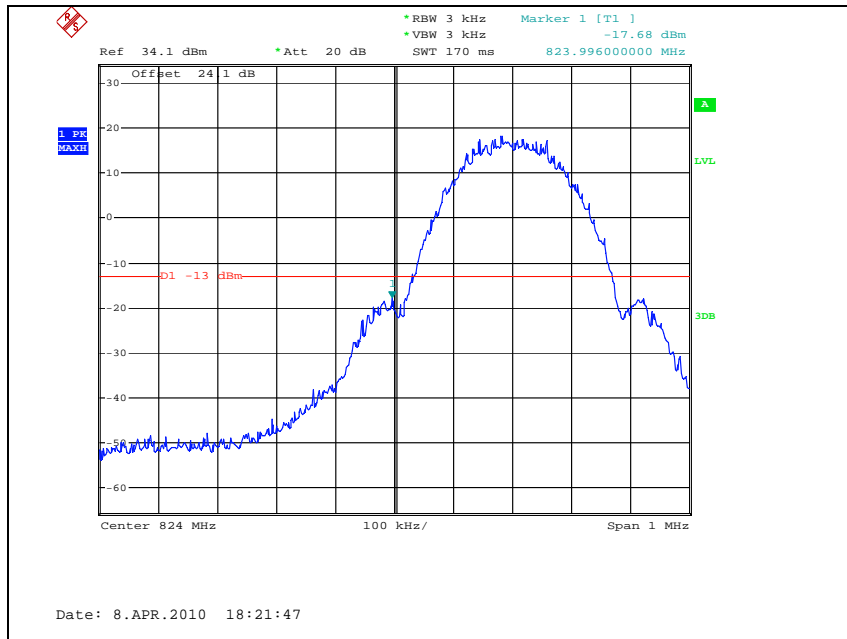


## High Channel

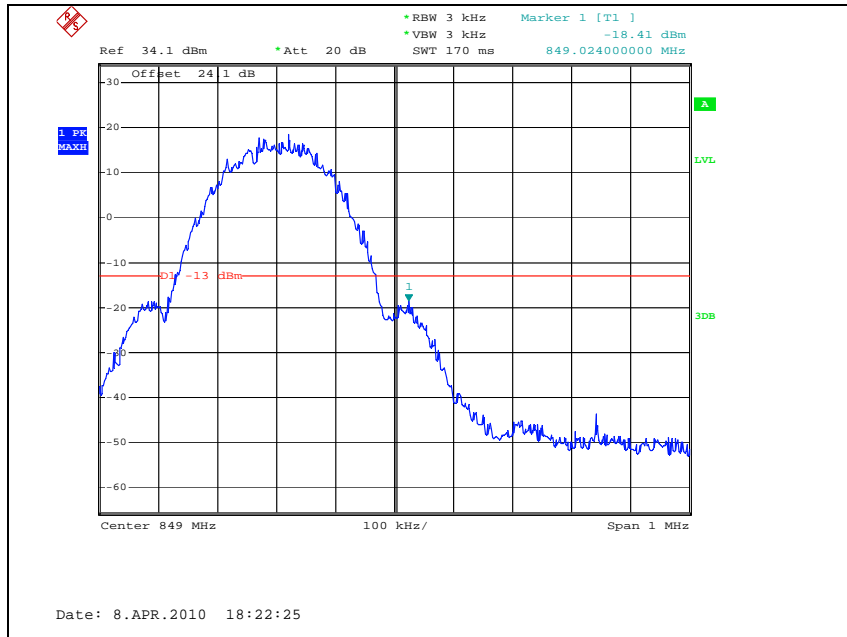


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**GSM1900**  
Low Channel

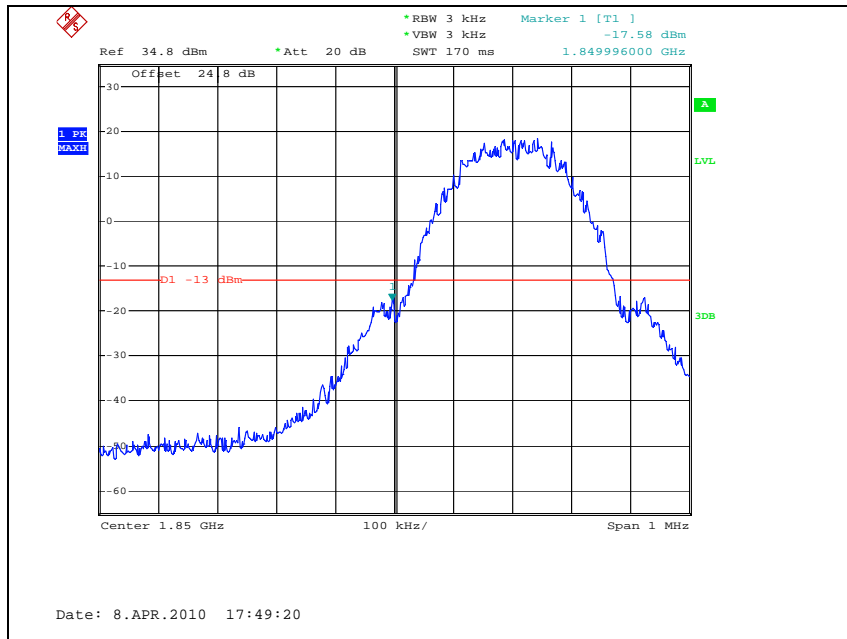


High Channel

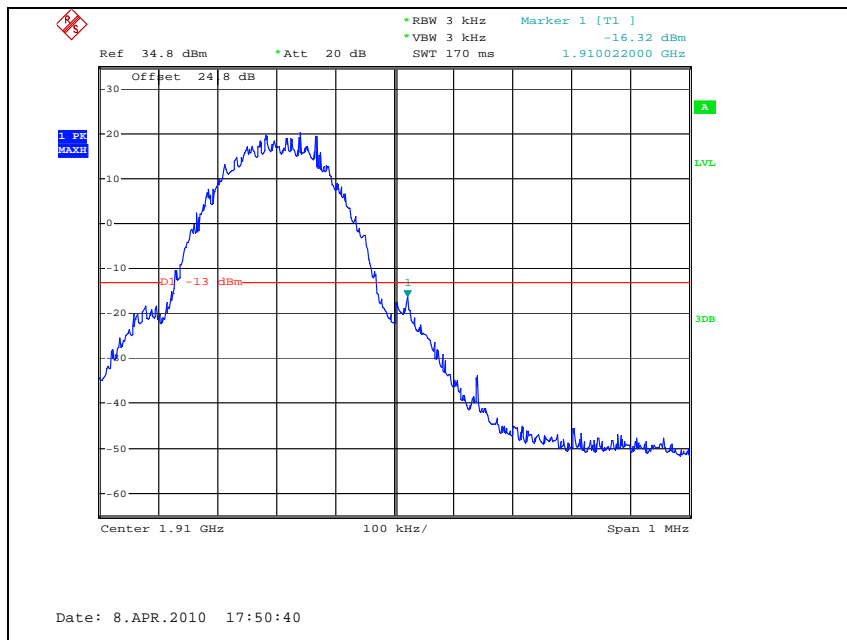


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



**GSM1900 EDGE**  
Low Channel

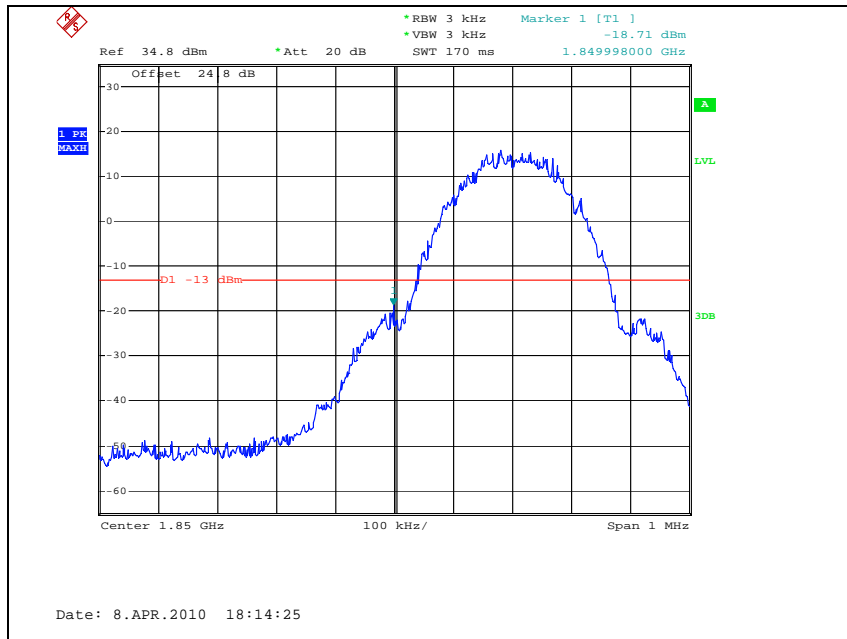


High Channel

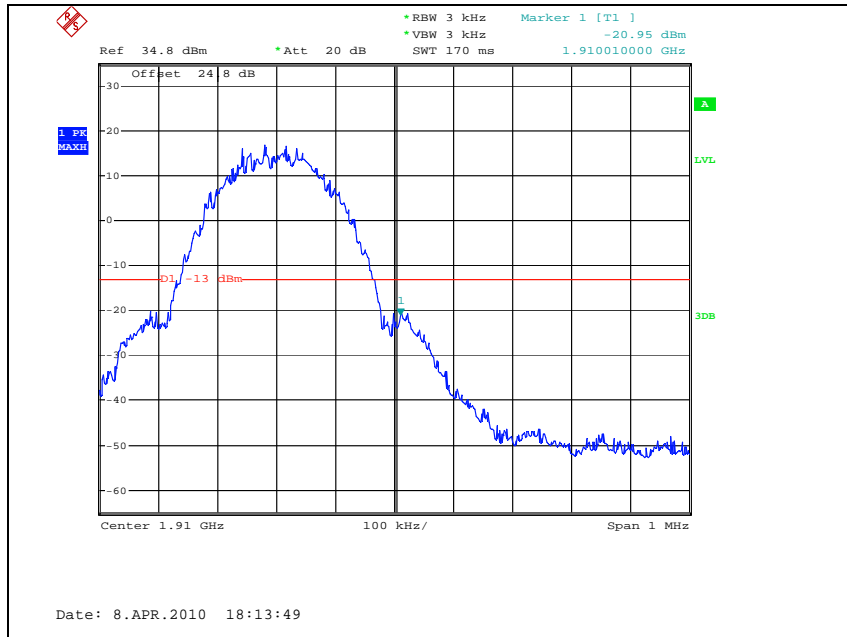


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## WCDMA850 Low Channel

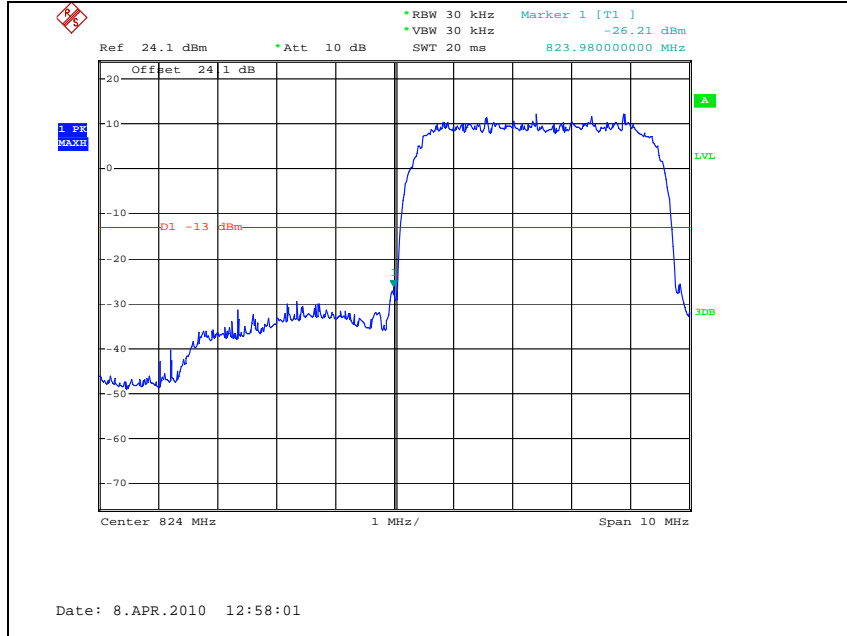


## High Channel

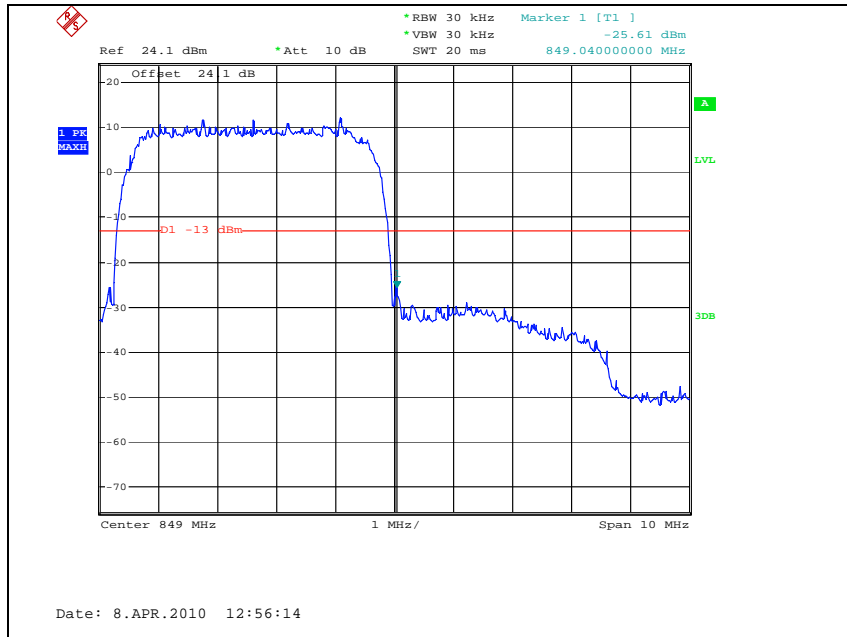


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## HSDPA 850 Low Channel

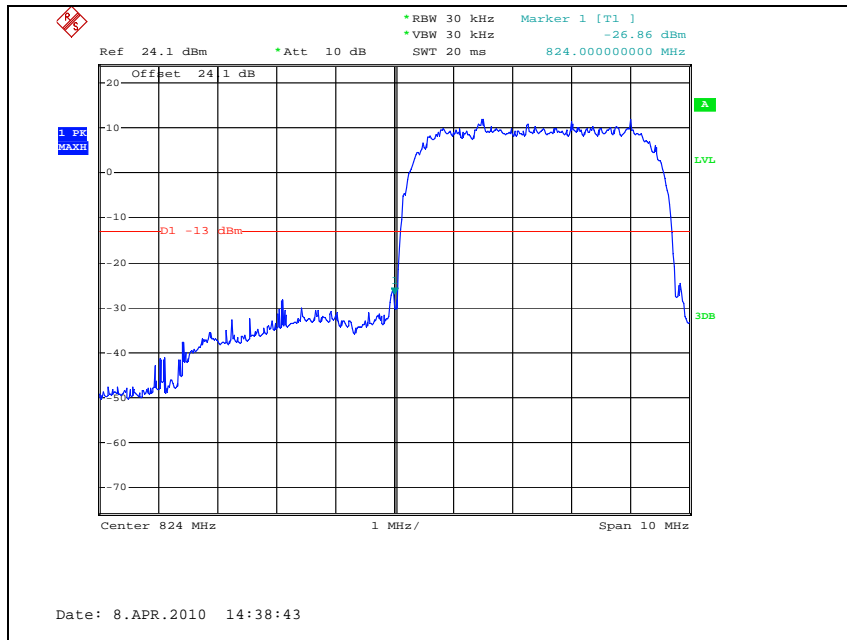


## High Channel

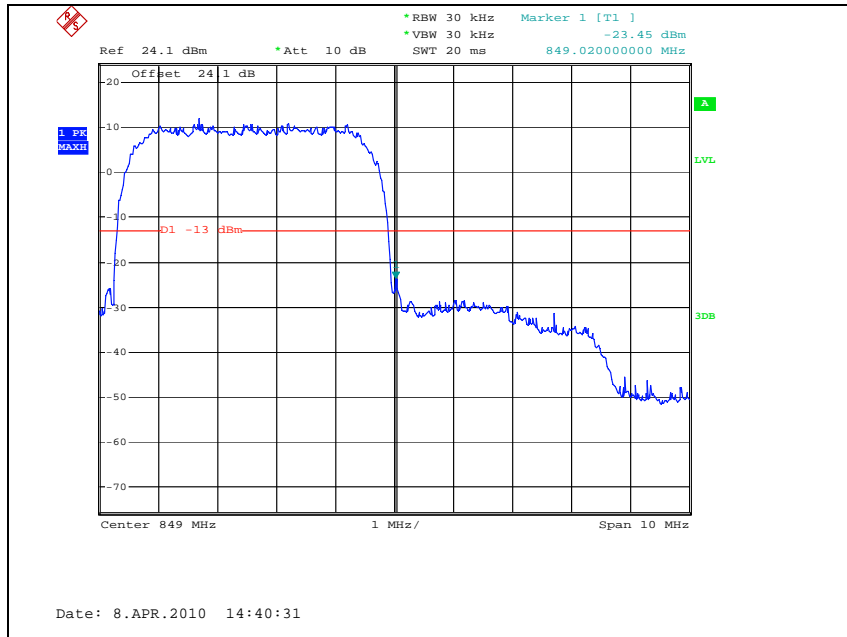


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## WCDMA1900 Low Channel

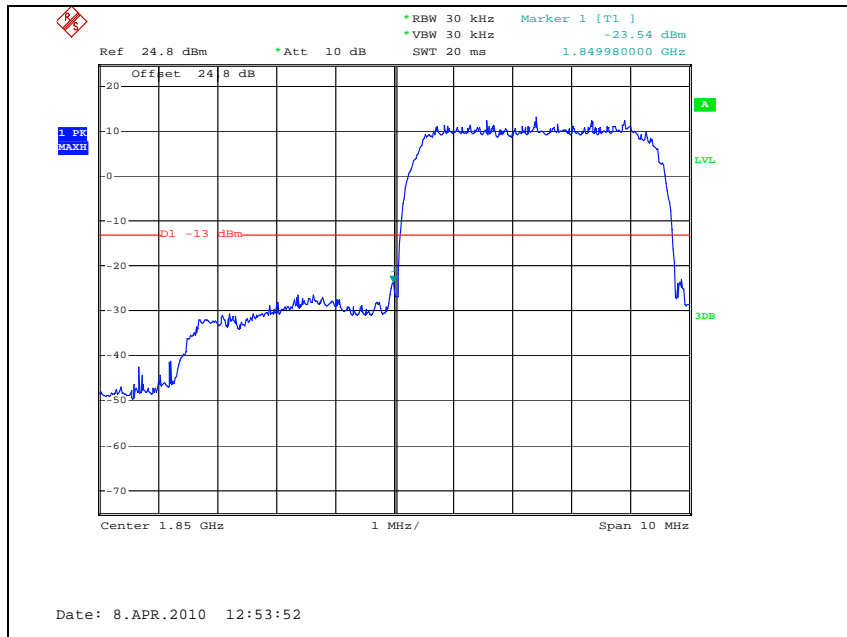


## High Channel

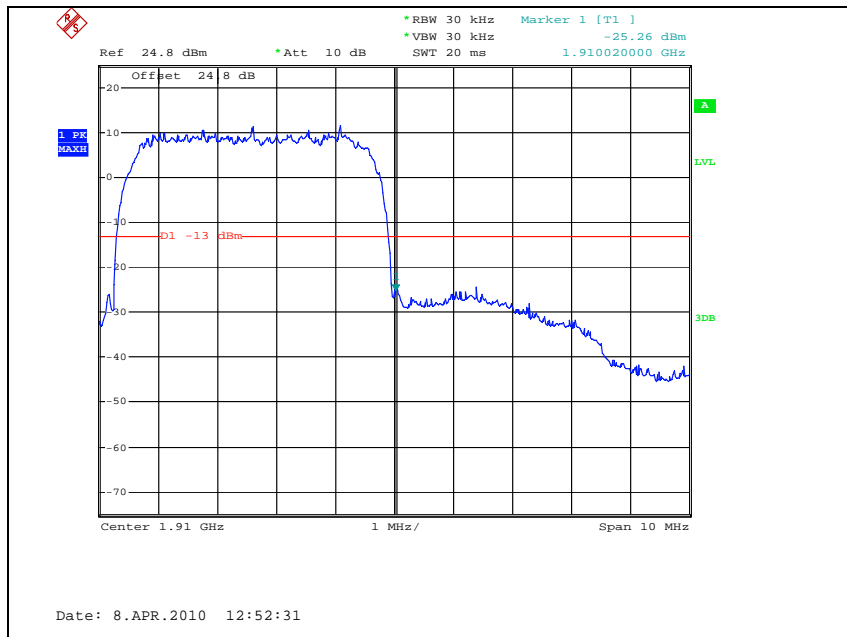


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## HSDPA 1900 Low Channel

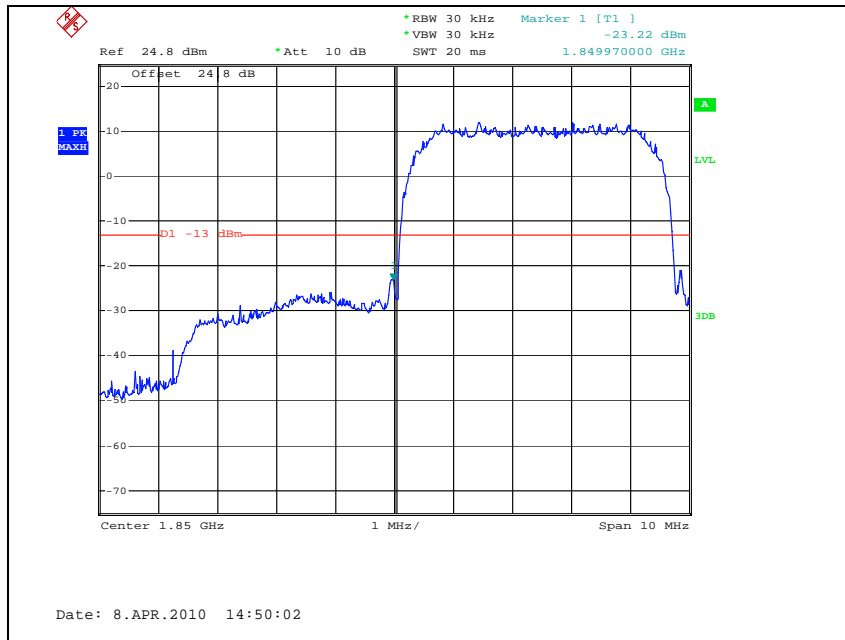

## High Channel

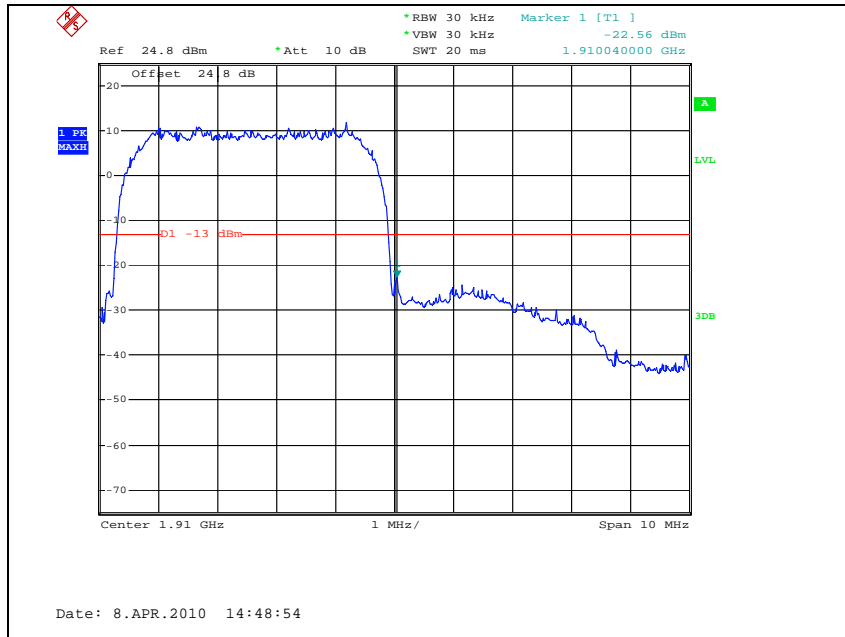

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 7. Frequency Stability

### 7.1. Limit

Requirements: FCC § 2.1055 (a), § 2.1055 (d) & following:


According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table of this section.

For Mobile devices operating in the 824 to 849 MHz band at a power level less than or equal to 3 Watts, the limit specified in Table C-1 is +/- 2.5 ppm.

§24.235 The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 7.2. Test Procedure

1. Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators.
2. The EUT was placed inside the temperature chamber.
3. After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.



*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 7.3. Test Results

Ambient temperature : (24 ± 2) °C  
 Relative humidity : 47 % R.H.

#### GSM850 mode at middle channel

Reference Frequency: 836.6 MHz, Limit: 2.5 ppm			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	3.7	-40	-0.048
40		-49	-0.059
30		-37	-0.044
24		-44	-0.053
10		-39	-0.047
0		-37	-0.044
-10		-46	-0.055
-20		-36	-0.043
-30		-43	-0.051
Frequency Stability versus power Supply			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
24	4.0	-45	-0.054
	2.70 (batt. End point)	-50	-0.060

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**GSM1900 mode at middle channel**

Reference Frequency: 1880.0 MHz, Limit: 2.5 ppm			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	3.7	-43	-0.023
40		-55	-0.029
30		-46	-0.024
24		-55	-0.029
10		-43	-0.023
0		-44	-0.023
-10		-40	-0.021
-20		-47	-0.025
-30		-49	-0.026
Frequency Stability versus power Supply			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
24	4.0	-51	-0.027
	2.70 (batt. End point)	-49	-0.026

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



**WCDMA850 mode at middle channel**

Reference Frequency: 836.6 MHz, Limit: 2.5 ppm			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	3.7	-50	-0.060
40		-38	-0.045
30		-40	-0.048
24		-37	-0.044
10		-37	-0.044
0		-50	-0.060
-10		-42	-0.050
-20		-50	-0.060
-30		-50	-0.060
Frequency Stability versus power Supply			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
24	4.0	-49	-0.059
	2.70 (batt. End point)	-48	-0.057

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**WCDMA1900 mode at middle channel**

Reference Frequency: 1 880.0 MHz, Limit: 2.5 ppm			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	3.7	-49	-0.026
40		-52	-0.028
30		-43	-0.023
24		-54	-0.029
10		-53	-0.028
0		-44	-0.023
-10		-42	-0.022
-20		-48	-0.026
-30		-49	-0.026
Frequency Stability versus power Supply			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
24	4.0	-53	-0.028
	2.70 (batt. End point)	-51	-0.027

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.