


# TEST REPORT

For WiFi-2.4GHz Band

Report No. .... : **CHEW22120055** Report Verification: 

Project No..... : **SHT2208214102EW**

FCC ID..... : **SS4SF650**

Applicant's name..... : **BLUEBIRD INC.**

Address..... : 3F, 115, Irwon-ro, Gangnam-gu, Seoul, Republic of Korea

Product Name ..... : **Smart Full Touch Handheld Computer**

Trade Mark ..... : BLUEBIRD

Model No. .... : SF650

Listed Model(s) ..... : -




Standard ..... : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample..... : Nov.15, 2022

Date of testing..... : Nov.16, 2022-Dec.07, 2022

Date of issue..... : Dec.08, 2022

**Result..... : PASS**

Compiled by ( position+printedname+signature)....:	File administrators Fanghui Zhu	
Supervised by (position+printedname+signature)....:	Project Engineer Xiaodong Zhao	
Approved by (Position+Printed name+Signature):	RF Manager Hans Hu	

**Testing Laboratory Name ..... : Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,  
Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

## Contents

<b>1.</b>	<b>TEST STANDARDS AND REPORT VERSION</b>	<b>3</b>
1.1.	Test Standards	3
1.2.	Report version	3
<b>2.</b>	<b>TEST DESCRIPTION</b>	<b>4</b>
<b>3.</b>	<b>SUMMARY</b>	<b>5</b>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	6
3.4.	Testing Laboratory Information	6
<b>4.</b>	<b>TEST CONFIGURATION</b>	<b>7</b>
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test mode	7
4.4.	Test sample information	8
4.5.	Support unit used in test configuration and system	8
4.6.	Testing environmental condition	8
4.7.	Statement of the measurement uncertainty	9
4.8.	Equipment Used during the Test	10
<b>5.</b>	<b>TEST CONDITIONS AND RESULTS</b>	<b>12</b>
5.1.	Antenna Requirement	12
5.2.	AC Conducted Emission	13
5.3.	Peak Output Power	15
5.4.	Power Spectral Density	16
5.5.	6dB bandwidth	17
5.6.	99% Occupied Bandwidth	18
5.7.	Duty Cycle	19
5.8.	Conducted Band edge and Spurious Emission	20
5.9.	Radiated Band edge Emission	22
5.10.	Radiated Spurious Emission	27
<b>6.</b>	<b>TEST SETUP PHOTOS</b>	<b>35</b>
<b>7.</b>	<b>EXTERNAL AND INTERNAL PHOTOS</b>	<b>36</b>
<b>8.</b>	<b>APPENDIX REPORT</b>	<b>36</b>

# 1. TEST STANDARDS AND REPORT VERSION

## 1.1. Test Standards

The tests were performed according to following standards:

- [FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- [ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

## 1.2. Report version

Revision No.	Date of issue	Description
N/A	2022-12-08	Original

## 2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result	Test Engineer
5.1	Antenna Requirement	15.203/15.247(c)	PASS	Xiaoxiao Li
5.2	AC Conducted Emission	15.207	PASS	Dongyang Wu
5.3	Peak Output Power	15.247(b)(3)	PASS	Xiaoxiao Li
5.4	Power Spectral Density	15.247(e)	PASS	Xiaoxiao Li
5.5	6dB Bandwidth	15.247(a)(2)	PASS	Xiaoxiao Li
5.6	99% Occupied Bandwidth	-	PASS <sup>*1</sup>	Xiaoxiao Li
5.7	Duty cycle	-	PASS <sup>*1</sup>	Xiaoxiao Li
5.8	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS	Xiaoxiao Li
5.9	Radiated Band Edge Emission	15.205/15.209	PASS	Yifan Wang
5.10	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS	Quanhai Deng

Note:

- The measurement uncertainty is not included in the test result.
- \*1: No requirement on standard, only report these test data.

### 3. SUMMARY

#### 3.1. Client Information

Applicant:	BLUEBIRD INC.
Address:	3F, 115, Irwon-ro, Gangnam-gu, Seoul, Republic of Korea
Manufacturer:	BLUEBIRD INC.
Address:	3F, 115, Irwon-ro, Gangnam-gu, Seoul, Republic of Korea
Factory1:	Bluebird Inc.
Address:	SSang-young IT Twin tower-B 7~8F), 531, Dunchon-daero, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea
Factory2:	TOP INTERCUBE ELECTRONICS VINA CO., LTD
Address:	Lo C1,Ba thien II Industrial park, Thien Ke Ward, Binh Xuyen District,Vinh Phuc Province, Vietnam

#### 3.2. Product Description

Main unit information:	
Product Name:	Smart Full Touch Handheld Computer
Trade Mark:	BLUEBIRD
Model No.:	SF650
Listed Model(s):	-
Power supply:	DC 3.85V from Battery
Hardware version:	V01
Software version:	SF650-AND12-EN-20221119_R1.00-user
Accessory unit information:	
Battery information:	Model: BAT-500001 Type: LI-ION POLYMER BATTERY Rated/Min: 4850mAh, 18.67Wh Typical Capacity: 5000mAh, 19.25Wh Limited Charge Voltage: 4.4V Nominal Voltage: 3.85V
Adapter information:	Model: KSA29B0500200D5 Input: 100-240Va.c., 50/60Hz 0.5A Output: 5.0Vd.c., 2.0A 10.0W

### 3.3. Radio Specification Description

Support type <sup>*2</sup> :	<input checked="" type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n
Support bandwidth:	<input checked="" type="checkbox"/> 20MHz	<input checked="" type="checkbox"/> 40MHz	
Modulation:	802.11b:	DBPSK, DQPSK, BPSK, QPSK	
	802.11g/n:	BPSK, QPSK, 16QAM, 64QAM	
Operation frequency:	802.11b/g/n(HT20):	2412MHz~2462MHz	
	802.11n(HT40)	2422MHz~2452MHz	
Channel number:	802.11b/g/n(HT20):	11	
	802.11n(HT40)	7	
Channel separation:	5MHz		
Antenna technology:	<input checked="" type="checkbox"/> SISO	<input type="checkbox"/> MIMO	
Antenna type:	PIFA Antenna		
Antenna gain:	-1.5 dBi		

Note:

\*2: only show the RF function associated with this report.

### 3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Phone: 86-755-26715499 E-mail: <a href="mailto:cs@szhtw.com.cn">cs@szhtw.com.cn</a> <a href="http://www.szhtw.com.cn">http://www.szhtw.com.cn</a>	
Qualifications	Type	Accreditation Number
	FCC	762235

## 4. TEST CONFIGURATION

### 4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

802.11b/g/n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	03	2422
02	2417	04	2427
· : 06	· : 2437	· : 06	· : 2437
· : 10	· : 2457	· : 08	· : 2447
11	2462	09	2452

### 4.2. Descriptions of Test mode

Preliminary tests were performed in different data rates, final test modes are considering the modulation and worse data rates as below table.

Modulation	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0

### 4.3. Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

#### 4.4. Test sample information

Test item	HTW sample no.
RF Conducted test items	Please refer to the description in the appendix report
RF Radiated test items	YPHT22082141010
EMI test items	YPHT22082141011

Note:

RF Conducted test items: Peak Output Power, Power Spectral Density, 6dB Bandwidth, 99% Occupied Bandwidth, Duty cycle, Conducted Band Edge and Spurious Emission

RF Radiated test items: Radiated Band Edge Emission, Radiated Spurious Emission

EMI test items: AC Conducted Emission

#### 4.5. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?			
✓ No			
Item	Equipment	Trade Name	Model No.
1			
2			

#### 4.6. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar



#### 4.7. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	AC Conducted Emission	3.21dB
2	Peak Output Power	1.07
3	Power Spectral Density	1.07
4	6dB Bandwidth	0.002%
5	99% Occupied Bandwidth	0.002%
6	Duty cycle	-
7	Conducted Band Edge and Spurious Emission	1.68dB
8	Radiated Band Edge Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz
9	Radiated Spurious Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

#### 4.8. Equipment Used during the Test

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2022/08/30	2023/08/29
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2022/08/29	2023/08/28
●	Pulse Limiter	R&S	HTWE0193	ESH3-Z2	101447	2022/08/29	2023/08/28
●	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLE X_142	EF-NM-BNCM-2M	2022/09/17	2023/09/16
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-6th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2023/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2022/08/30	2023/08/29
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2021/04/06	2024/04/05
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2021/04/06	2024/04/05
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2022/11/04	2023/11/03
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2022/02/25	2023/02/24
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX104	501184/4	2022/02/25	2023/02/24
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-7th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2018/09/27	2023/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2022/08/25	2023/08/24
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2020/04/27	2023/04/26
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2022/11/04	2023/11/03
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2022/02/28	2023/02/27
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2022/02/25	2023/02/24
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2022/02/25	2023/02/24
●	RF Connection Cable	HUBER+SUHNER	HTWE0119-05	6m 3GHz RG Serisa	N/A	2022/02/25	2023/02/24
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2022/02/25	2023/02/24
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	HTWE0242	FSV40	100048	2022/08/25	2023/08/24
●	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2022/08/25	2023/08/24
●	Spectrum Analyzer	Agilent	HTWE0286	N9020A	MY50510187	2022/08/25	2023/08/24
●	Radio communication tester	R&S	HTWE0287	CMW500	137688-Lv	2022/08/25	2023/08/24
●	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A

## 5. TEST CONDITIONS AND RESULTS

### 5.1. Antenna Requirement

#### REQUIREMENT

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST RESULT

**Passed**       **Not Applicable**

The antenna type is a PIFA antenna, the directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



## 5.2. AC Conducted Emission


### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST CONFIGURATION

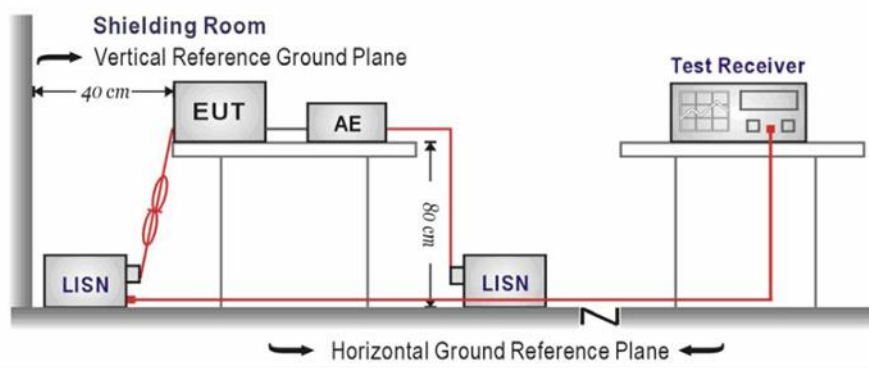

### TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

### TEST MODE


Please refer to the clause 4.2

### TEST RESULT

Passed  Not Applicable

Test Line:

L

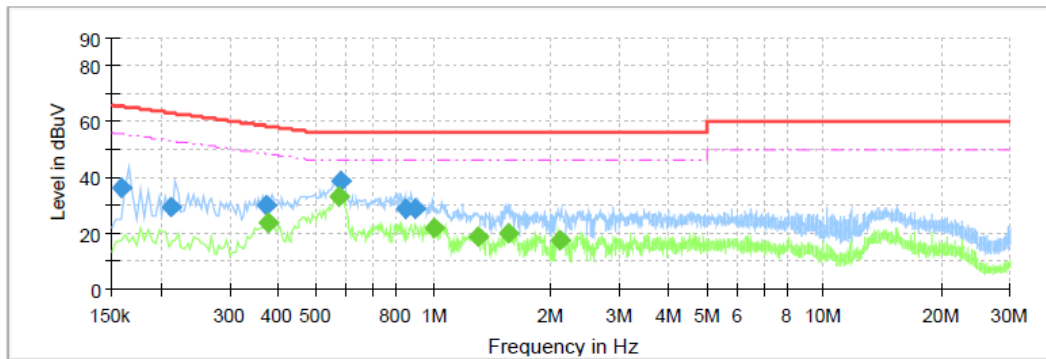


**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.158000	36.00	---	65.57	29.57	L1	10.0
0.211500	29.11	---	63.15	34.04	L1	10.0
0.371500	29.71	---	58.47	28.75	L1	10.0
0.375500	---	23.48	48.38	24.90	L1	10.0
0.571500	---	33.22	46.00	12.78	L1	10.0
0.575500	38.82	---	56.00	17.18	L1	10.0
0.843500	29.00	---	56.00	27.00	L1	10.0
0.899500	28.85	---	56.00	27.15	L1	10.0
0.999500	---	22.06	46.00	23.94	L1	10.0
1.295500	---	18.90	46.00	27.10	L1	10.0
1.559500	---	19.92	46.00	26.08	L1	10.0
2.107500	---	17.49	46.00	28.51	L1	10.0

Test Line:

N

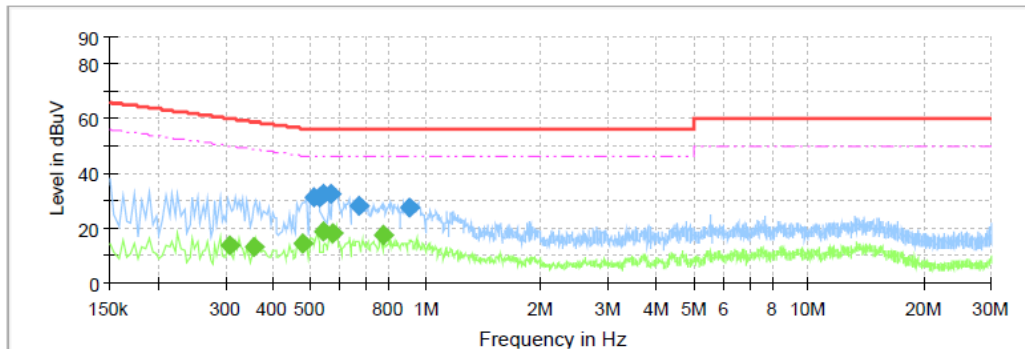

**Final Result**


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.307500	---	13.64	50.04	36.40	N	10.0
0.355500	---	12.94	48.83	35.90	N	10.0
0.479500	---	14.22	46.35	32.13	N	10.0
0.511500	31.11	---	56.00	24.89	N	10.0
0.527500	31.37	---	56.00	24.63	N	10.0
0.539500	---	18.64	46.00	27.36	N	10.0
0.543500	32.41	---	56.00	23.59	N	10.0
0.563500	32.33	---	56.00	23.67	N	10.0
0.571500	---	17.95	46.00	28.05	N	10.0
0.672500	27.90	---	56.00	28.10	N	10.0
0.775500	---	17.63	46.00	28.37	N	10.0
0.904500	27.41	---	56.00	28.59	N	10.0

### 5.3. Peak Output Power

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

#### TEST CONFIGURATION

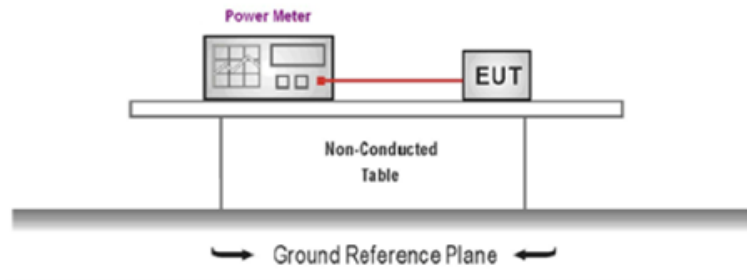

#### TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10 and KDB 558074 D01 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

#### TEST MODE

Please refer to the clause 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Please refer to appendix A on the appendix report


## 5.4. Power Spectral Density

### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

### TEST CONFIGURATION

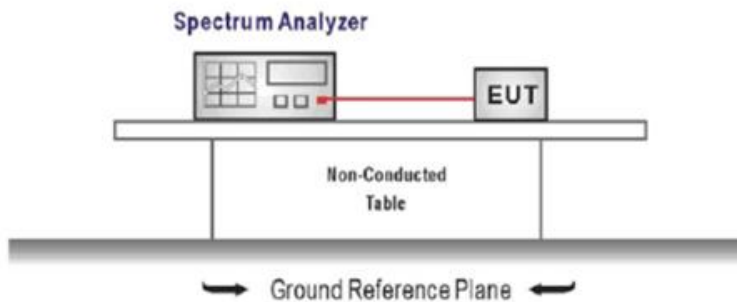

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:  
Center frequency=DTS channel center frequency  
Span =1.5 times the DTS bandwidth  
RBW = 3 kHz ≤ RBW ≤ 100 kHz, VBW ≥ 3 × RBW  
Sweep time = auto couple  
Detector = peak  
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST MODE

Please refer to the clause 4.2

### TEST RESULT

Passed       Not Applicable

### TEST DATA

Please refer to appendix B on the appendix report




## 5.5. 6dB bandwidth

### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### TEST CONFIGURATION

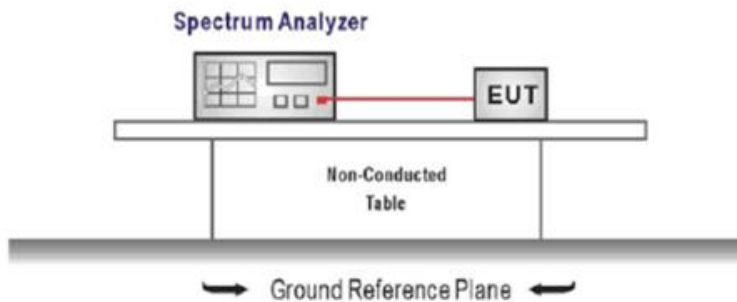

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).  
Center Frequency =DTS channel center frequency  
Span=2 x DTS bandwidth  
RBW = 100 kHz, VBW  $\geq 3 \times$  RBW  
Sweep time= auto couple  
Detector = Peak  
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

### TEST MODE

Please refer to the clause 4.2

### TEST RESULT

Passed       Not Applicable

### TEST DATA


Please refer to appendix C on the appendix report

## 5.6. 99% Occupied Bandwidth

### LIMIT

N/A

### TEST CONFIGURATION

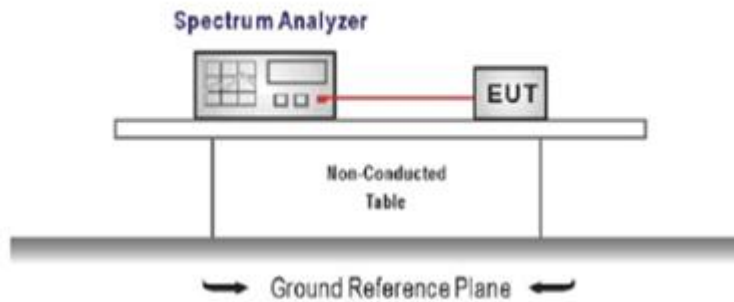

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).  
Center Frequency = channel center frequency  
Span  $\geq 1.5 \times$  OBW  
RBW = 1%~5%OBW  
VBW  $\geq 3 \times$  RBW  
Sweep time = auto couple  
Detector = Peak  
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

### TEST MODE

Please refer to the clause 4.2

### TEST RESULT

Passed       Not Applicable

### TEST DATA


Please refer to appendix D on the appendix report

## 5.7. Duty Cycle

### LIMIT

N/A

### TEST CONFIGURATION

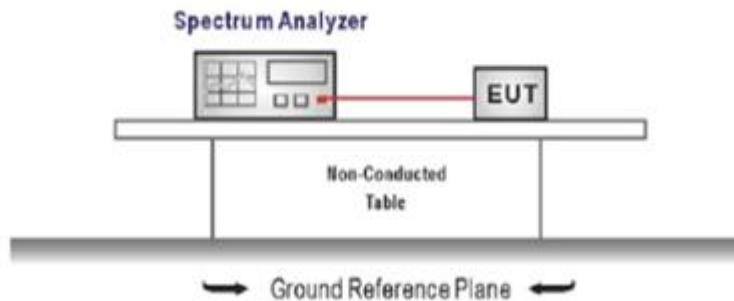

### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
Span=zero span, Frequency=centered channel, RBW= 1 MHz, VBW  $\geq$  RBW  
Sweep=as necessary to capture the entire dwell time,  
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

### TEST MODE

Please refer to the clause 4.2

### TEST DATA


Please refer to appendix E on the appendix report

## 5.8. Conducted Band edge and Spurious Emission

### LIMIT

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### TEST CONFIGURATION

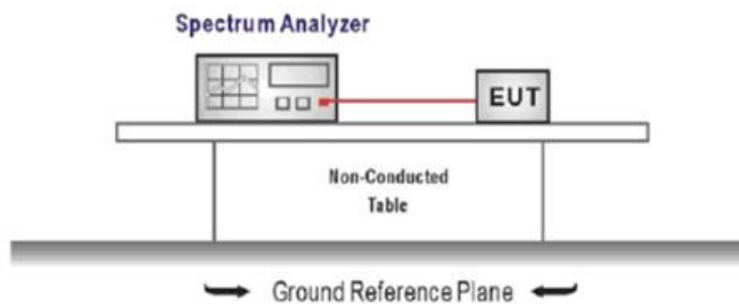

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure  
Center frequency=DTS channel center frequency  
The span = 1.5 times the DTS bandwidth.  
RBW = 100 kHz, VBW  $\geq 3 \times$  RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

3. Emission level measurement  
Set the center frequency and span to encompass frequency range to be measured  
RBW = 100 kHz, VBW  $\geq 3 \times$  RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

### TEST MODE

Please refer to the clause 4.2

**TEST RESULT**

**Passed**       **Not Applicable**

**TEST DATA**

Please refer to appendix F on the appendix report


## 5.9. Radiated Band edge Emission

### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

### TEST CONFIGURATION

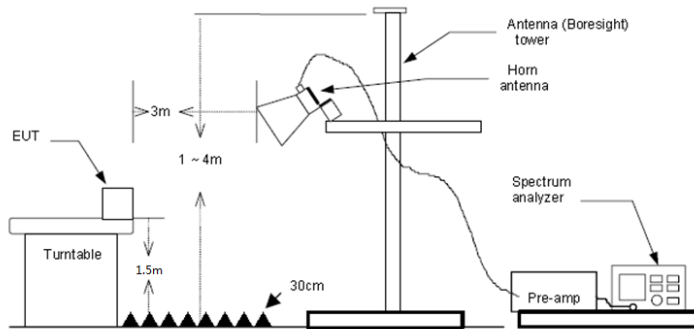

### TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
  - a) Span shall wide enough to fully capture the emission being measured
  - b) Set RBW=100kHz for <1GHz, VBW=3\*RBW, Sweep time=auto, Detector=peak, Trace=max hold
  - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

  - VBW=10Hz, When duty cycle is no less than 98 percent
  - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

### TEST MODE

Please refer to the clause 4.2

### TEST RESULT

Passed       Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level- Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m).

Type	802.11b		Test channel		CH01		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	40.37	27.96	3.89	37.56	20.00	54.66	74.00	-19.34	Peak
2	2390.01	39.89	27.72	3.99	37.45	20.00	54.15	74.00	-19.85	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	34.96	27.96	3.89	37.56	20.00	49.25	54.00	-4.75	Average
2	2390.01	34.58	27.72	3.99	37.45	20.00	48.84	54.00	-5.16	Average

Type	802.11b		Test channel		CH01		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	40.16	27.96	3.89	37.56	20.00	54.45	74.00	-19.55	Peak
2	2390.01	40.09	27.72	3.99	37.45	20.00	54.35	74.00	-19.65	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	34.14	27.96	3.89	37.56	20.00	48.43	54.00	-5.57	Average
2	2390.01	33.82	27.72	3.99	37.45	20.00	48.08	54.00	-5.92	Average

Type	802.11b		Test channel		CH11		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	39.77	27.43	4.03	37.26	20.00	53.97	74.00	-20.03	Peak
2	2500.00	40.95	27.40	4.04	37.26	20.00	55.13	74.00	-18.87	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	34.15	27.43	4.03	37.26	20.00	48.35	54.00	-5.65	Average
2	2500.00	33.56	27.40	4.04	37.26	20.00	47.74	54.00	-6.26	Average

Type	802.11b		Test channel		CH11		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	40.63	27.43	4.03	37.26	20.00	54.83	74.00	-19.17	Peak
2	2500.00	41.24	27.40	4.04	37.26	20.00	55.42	74.00	-18.58	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	34.33	27.43	4.03	37.26	20.00	48.53	54.00	-5.47	Average
2	2500.00	33.17	27.40	4.04	37.26	20.00	47.35	54.00	-6.65	Average

Type	802.11g		Test channel	CH01	Polarity			Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	40.64	27.96	3.89	37.56	20.00	54.93	74.00	-19.07	Peak
2	2389.79	47.75	27.72	3.99	37.45	20.00	62.01	74.00	-11.99	Peak
3	2390.01	44.39	27.72	3.99	37.45	20.00	58.65	74.00	-15.35	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	29.34	27.96	3.89	37.56	20.00	43.63	54.00	-10.37	Average
2	2390.01	31.73	27.72	3.99	37.45	20.00	45.99	54.00	-8.01	Average

Type	802.11g		Test channel	CH01	Polarity			Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	40.18	27.96	3.89	37.56	20.00	54.47	74.00	-19.53	Peak
2	2390.01	42.19	27.72	3.99	37.45	20.00	56.45	74.00	-17.55	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	29.35	27.96	3.89	37.56	20.00	43.64	54.00	-10.36	Average
2	2390.01	30.71	27.72	3.99	37.45	20.00	44.97	54.00	-9.03	Average

Type	802.11g		Test channel	CH11	Polarity			Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	44.80	27.43	4.03	37.26	20.00	59.00	74.00	-15.00	Peak
2	2500.00	40.79	27.40	4.04	37.26	20.00	54.97	74.00	-19.03	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	30.61	27.43	4.03	37.26	20.00	44.81	54.00	-9.19	Average
2	2500.00	28.98	27.40	4.04	37.26	20.00	43.16	54.00	-10.84	Average

Type	802.11g		Test channel	CH11	Polarity			Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	43.85	27.43	4.03	37.26	20.00	58.05	74.00	-15.95	Peak
2	2500.00	39.82	27.40	4.04	37.26	20.00	54.00	74.00	-20.00	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	32.65	27.43	4.03	37.26	20.00	46.85	54.00	-7.15	Average
2	2500.00	29.04	27.40	4.04	37.26	20.00	43.22	54.00	-10.78	Average



Type		802.11n(HT20)		Test channel		CH01		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	40.68	27.96	3.89	37.56	20.00	54.97	74.00	-19.03	Peak	
2	2390.01	45.62	27.72	3.99	37.45	20.00	59.88	74.00	-14.12	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	29.47	27.96	3.89	37.56	20.00	43.76	54.00	-10.24	Average	
2	2390.01	33.99	27.72	3.99	37.45	20.00	48.25	54.00	-5.75	Average	
Type		802.11n(HT20)		Test channel		CH01		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	40.17	27.96	3.89	37.56	20.00	54.46	74.00	-19.54	Peak	
2	2390.01	44.24	27.72	3.99	37.45	20.00	58.50	74.00	-15.50	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	29.42	27.96	3.89	37.56	20.00	43.71	54.00	-10.29	Average	
2	2390.01	31.70	27.72	3.99	37.45	20.00	45.96	54.00	-8.04	Average	

Type		802.11n(HT20)		Test channel		CH11		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.49	50.24	27.43	4.03	37.26	20.00	64.44	74.00	-9.56	Peak	
2	2500.00	40.93	27.40	4.04	37.26	20.00	55.11	74.00	-18.89	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.49	33.45	27.43	4.03	37.26	20.00	47.65	54.00	-6.35	Average	
2	2500.00	29.02	27.40	4.04	37.26	20.00	43.20	54.00	-10.80	Average	
Type		802.11n(HT20)		Test channel		CH11		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.49	45.04	27.43	4.03	37.26	20.00	59.24	74.00	-14.76	Peak	
2	2500.00	40.40	27.40	4.04	37.26	20.00	54.58	74.00	-19.42	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.49	31.20	27.43	4.03	37.26	20.00	45.40	54.00	-8.60	Average	
2	2500.00	29.07	27.40	4.04	37.26	20.00	43.25	54.00	-10.75	Average	

Type		802.11n(HT40)		Test channel		CH03		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	44.37	27.96	0.00	37.56	20.00	54.77	74.00	-19.23	Peak	
2	2389.87	55.57	27.72	0.00	37.45	20.00	65.84	74.00	-8.16	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	33.41	27.96	0.00	37.56	20.00	43.81	54.00	-10.19	Average	
2	2389.99	39.95	27.72	0.00	37.45	20.00	50.22	54.00	-3.78	Average	
Type		802.11n(HT40)		Test channel		CH03		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	44.29	27.96	0.00	37.56	20.00	54.69	74.00	-19.31	Peak	
2	2389.99	55.76	27.72	0.00	37.45	20.00	66.03	74.00	-7.97	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	29.51	27.96	3.89	37.56	20.00	43.80	54.00	-10.20	Average	
2	2389.99	36.30	27.72	3.99	37.45	20.00	50.56	54.00	-3.44	Average	

Type		802.11n(HT40)		Test channel		CH09		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.61	58.85	27.43	0.00	37.26	20.00	69.02	74.00	-4.98	Peak	
2	2500.00	44.72	27.40	0.00	37.26	20.00	54.86	74.00	-19.14	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.50	39.35	27.43	0.00	37.26	20.00	49.52	74.00	-24.48	Peak	
2	2500.00	33.21	27.40	0.00	37.26	20.00	43.35	74.00	-30.65	Peak	
Type		802.11n(HT40)		Test channel		CH09		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.50	54.44	27.43	4.03	37.26	20.00	68.64	74.00	-5.36	Peak	
2	2500.00	40.38	27.40	4.04	37.26	20.00	54.56	74.00	-19.44	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.50	37.82	27.43	0.00	37.26	20.00	47.99	54.00	-6.01	Average	
2	2500.00	33.30	27.40	0.00	37.26	20.00	43.44	54.00	-10.56	Average	

### 5.10. Radiated Spurious Emission

**LIMIT**

**FCC CFR Title 47 Part 15 Subpart C Section 15.209**

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40\*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40\*log(30/3)= Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

**TEST CONFIGURATION**


- 9 kHz ~ 30 MHz

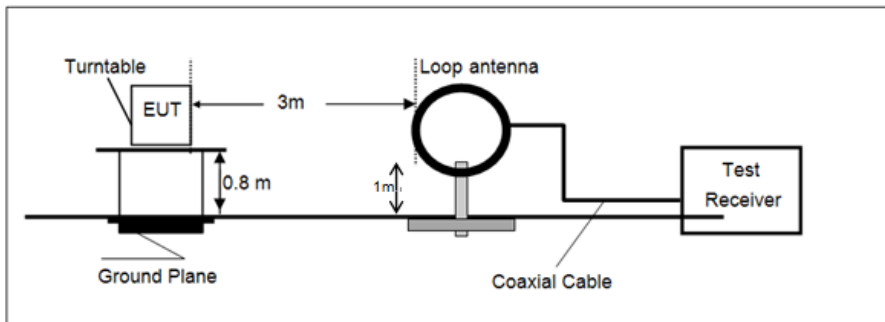

- 30 MHz ~ 1 GHz

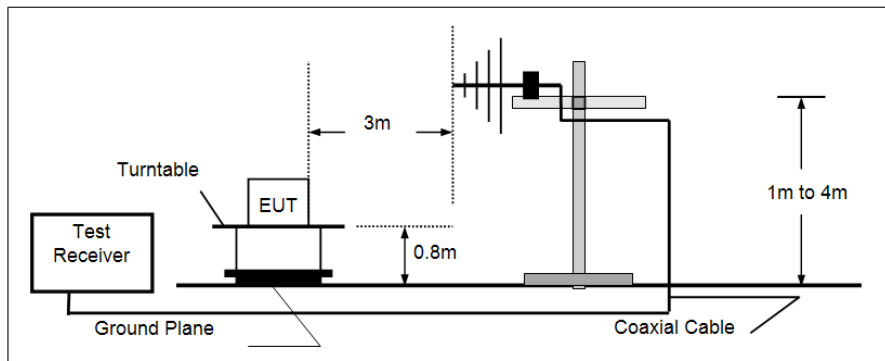

- Above 1 GHz

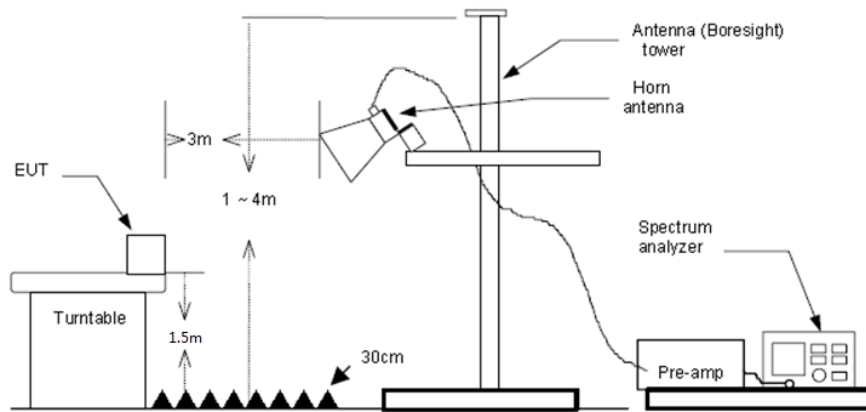

## **TEST PROCEDURE**

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - a) Span shall wide enough to fully capture the emission being measured;
  - b) Below 1 GHz:
    - RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
    - If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement
    - For average measurement:
      - VBW=10Hz, When duty cycle is no less than 98 percent
      - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

## **TEST MODE**

Please refer to the clause 4.2

## **TEST RESULT**

**Passed**       **Not Applicable**

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level– Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

**For 9 kHz ~ 30 MHz**


The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

**For 30 MHz ~ 1000 MHz**

Have pre-scan all test channel, found CH06 of 802.11b which it was worst case, so only show the worst case's data on this report.

Polarization:

Horizontal

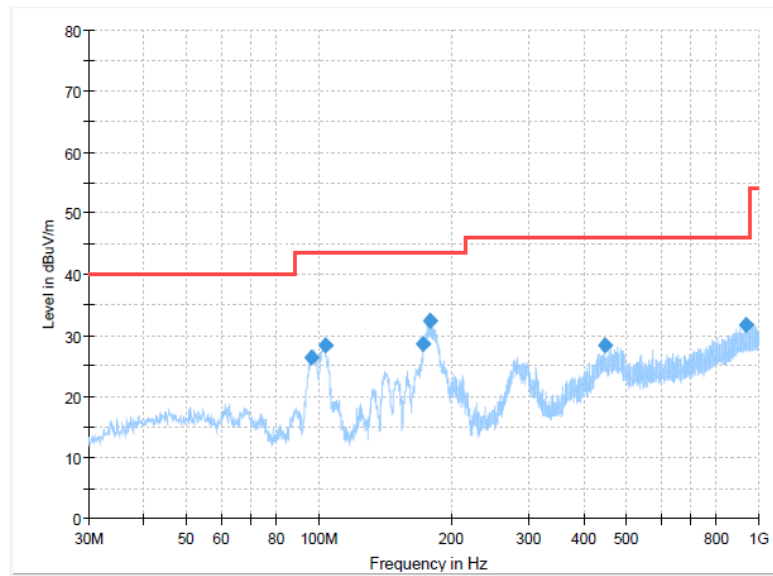


**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
96.323750	26.42	43.50	17.08	300.0	H	299.0	-11.7
103.477500	28.30	43.50	15.20	300.0	H	120.0	-11.2
173.196250	28.69	43.50	14.81	100.0	H	115.0	-13.0
179.258750	32.42	43.50	11.08	100.0	H	261.0	-12.5
447.221250	28.45	46.00	17.55	100.0	H	16.0	-3.4
932.463750	31.81	46.00	14.19	100.0	H	2.0	6.8

Polarization:

Vertical

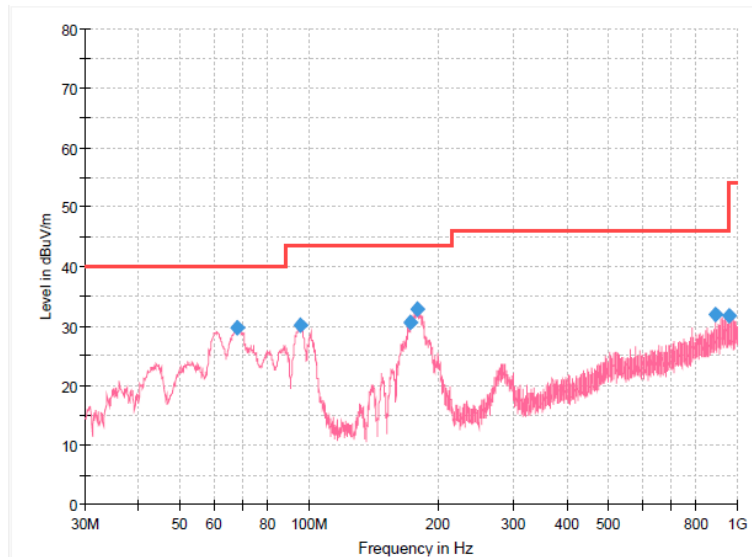

**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
68.315000	29.67	40.00	10.33	100.0	V	280.0	-12.7
95.596250	30.24	43.50	13.26	100.0	V	131.0	-11.9
173.075000	30.62	43.50	12.88	100.0	V	101.0	-13.0
178.773750	32.96	43.50	10.54	100.0	V	90.0	-12.6
888.692500	31.97	46.00	14.03	100.0	V	0.0	6.0
959.866250	31.69	46.00	14.31	100.0	V	138.0	7.2

**For 1 GHz ~ 25 GHz**

Type	802.11b		Test channel	CH01			Polarity	Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1323.14	39.91	26.14	2.89	36.35	32.59	74.00	-41.41	Peak
2	4821.76	50.90	31.40	5.74	35.24	52.80	74.00	-21.20	Peak
3	4821.76	47.09	31.40	5.74	35.24	48.99	54.00	-5.01	Average
4	7227.39	38.68	36.45	7.24	34.03	48.34	74.00	-25.66	Peak
5	10534.09	36.92	40.03	9.00	37.06	48.89	74.00	-25.11	Peak
Type	802.11b		Test channel	CH01			Polarity	Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1238.41	39.94	25.83	2.80	36.55	32.02	74.00	-41.98	Peak
2	4821.76	43.31	31.40	5.74	35.24	45.21	74.00	-28.79	Peak
3	7245.81	39.74	36.41	7.26	34.06	49.35	74.00	-24.65	Peak
4	9685.35	35.99	39.54	8.46	36.65	47.34	74.00	-26.66	Peak
Type	802.11b		Test channel	CH06			Polarity	Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1313.08	39.10	26.08	2.87	36.33	31.72	74.00	-42.28	Peak
2	4871.10	47.41	31.40	5.82	35.16	49.47	74.00	-24.53	Peak
3	7301.36	37.76	36.40	7.30	34.12	47.34	74.00	-26.66	Peak
4	9685.35	36.22	39.54	8.46	36.65	47.57	74.00	-26.43	Peak
Type	802.11b		Test channel	CH06			Polarity	Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1241.56	40.04	25.85	2.81	36.53	32.17	74.00	-41.83	Peak
2	4871.10	42.20	31.40	5.82	35.16	44.26	74.00	-29.74	Peak
3	7301.36	39.18	36.40	7.30	34.12	48.76	74.00	-25.24	Peak
4	10888.51	35.69	40.57	9.10	36.76	48.60	74.00	-25.40	Peak
Type	802.11b		Test channel	CH11			Polarity	Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1210.36	40.48	25.66	2.79	36.63	32.30	74.00	-41.70	Peak
2	3151.99	40.73	29.00	4.60	37.18	37.15	74.00	-36.85	Peak
3	4920.96	39.09	31.44	5.85	35.21	41.17	74.00	-32.83	Peak
4	8104.56	35.23	37.18	7.67	33.33	46.75	74.00	-27.25	Peak
Type	802.11b		Test channel	CH11			Polarity	Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1176.94	40.61	25.51	2.75	36.68	32.19	74.00	-41.81	Peak
2	4920.96	38.85	31.44	5.85	35.21	40.93	74.00	-33.07	Peak
3	8377.24	35.68	36.61	7.89	33.68	46.50	74.00	-27.50	Peak
4	11226.25	36.20	40.33	9.28	36.53	49.28	74.00	-24.72	Peak

Type	802.11g		Test channel	CH01			Polarity	Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1254.27	39.51	25.91	2.81	36.48	31.75	74.00	-42.25	Peak
2	4821.76	39.13	31.40	5.74	35.24	41.03	74.00	-32.97	Peak
3	7432.62	35.83	36.60	7.33	33.98	45.78	74.00	-28.22	Peak
4	10888.51	34.97	40.57	9.10	36.76	47.88	74.00	-26.12	Peak
Type	802.11g		Test channel	CH01			Polarity	Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1303.09	39.15	26.02	2.85	36.30	31.72	74.00	-42.28	Peak
2	5099.49	37.94	32.20	5.91	35.48	40.57	74.00	-33.43	Peak
3	7508.69	34.97	36.58	7.39	33.87	45.07	74.00	-28.93	Peak
4	10860.83	34.66	40.48	9.09	36.78	47.45	74.00	-26.55	Peak
Type	802.11g		Test channel	CH06			Polarity	Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1192.01	40.90	25.57	2.77	36.65	32.59	74.00	-41.41	Peak
2	3672.11	41.25	29.40	4.95	37.03	38.57	74.00	-35.43	Peak
3	5099.49	37.35	32.20	5.91	35.48	39.98	74.00	-34.02	Peak
4	8063.40	35.17	37.20	7.65	33.32	46.70	74.00	-27.30	Peak
Type	802.11g		Test channel	CH06			Polarity	Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1251.08	40.21	25.90	2.81	36.50	32.42	74.00	-41.58	Peak
2	5112.49	37.10	32.15	5.92	35.47	39.70	74.00	-34.30	Peak
3	8125.22	34.48	37.10	7.69	33.36	45.91	74.00	-28.09	Peak
4	10888.51	35.92	40.57	9.10	36.76	48.83	74.00	-25.17	Peak
Type	802.11g		Test channel	CH11			Polarity	Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1207.28	40.28	25.64	2.78	36.64	32.06	74.00	-41.94	Peak
2	4920.96	38.96	31.44	5.85	35.21	41.04	74.00	-32.96	Peak
3	7489.60	35.07	36.60	7.37	33.94	45.10	74.00	-28.90	Peak
4	9228.06	36.71	38.91	8.38	36.04	47.96	74.00	-26.04	Peak
Type	802.11g		Test channel	CH11			Polarity	Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1293.17	39.08	25.99	2.84	36.32	31.59	74.00	-42.41	Peak
2	3168.08	41.11	28.96	4.63	37.12	37.58	74.00	-36.42	Peak
3	4664.81	39.06	31.26	5.69	35.94	40.07	74.00	-33.93	Peak
4	9636.16	36.51	39.34	8.55	36.89	47.51	74.00	-26.49	Peak





Type	802.11n(HT20)		Test channel	CH01			Polarity	Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1260.67	39.56	25.92	2.82	36.46	31.84	74.00	-42.16	Peak
2	5112.49	38.22	32.15	5.92	35.47	40.82	74.00	-33.18	Peak
3	7245.81	35.70	36.41	7.26	34.06	45.31	74.00	-28.69	Peak
4	10723.47	35.29	40.15	9.05	36.90	47.59	74.00	-26.41	Peak
Type	802.11n(HT20)		Test channel	CH01			Polarity	Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1329.89	38.74	26.18	2.90	36.37	31.45	74.00	-42.55	Peak
2	5125.52	37.33	32.10	5.94	35.46	39.91	74.00	-34.09	Peak
3	7432.62	35.45	36.60	7.33	33.98	45.40	74.00	-28.60	Peak
4	11486.41	34.52	40.86	9.45	36.38	48.45	74.00	-25.55	Peak
Type	802.11n(HT20)		Test channel	CH06			Polarity	Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1254.27	39.79	25.91	2.81	36.48	32.03	74.00	-41.97	Peak
2	4883.52	39.87	31.40	5.84	35.18	41.93	74.00	-32.07	Peak
3	7981.72	35.75	37.03	7.60	33.31	47.07	74.00	-26.93	Peak
4	9784.47	35.91	39.60	8.44	36.17	47.78	74.00	-26.22	Peak
Type	802.11n(HT20)		Test channel	CH06			Polarity	Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1228.98	39.33	25.78	2.80	36.58	31.33	74.00	-42.67	Peak
2	4034.78	40.33	29.97	5.26	36.30	39.26	74.00	-34.74	Peak
3	5762.24	36.44	31.92	6.63	34.86	40.13	74.00	-33.87	Peak
4	11515.68	34.37	40.85	9.47	36.37	48.32	74.00	-25.68	Peak
Type	802.11n(HT20)		Test channel	CH11			Polarity	Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1263.88	39.00	25.93	2.82	36.44	31.31	74.00	-42.69	Peak
2	5125.52	38.95	32.10	5.94	35.46	41.53	74.00	-32.47	Peak
3	8042.90	35.37	37.19	7.64	33.31	46.89	74.00	-27.11	Peak
4	9809.40	36.33	39.58	8.46	36.19	48.18	74.00	-25.82	Peak
Type	802.11n(HT20)		Test channel	CH11			Polarity	Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1188.98	40.35	25.56	2.77	36.66	32.02	74.00	-41.98	Peak
2	3993.90	39.33	29.90	5.29	36.37	38.15	74.00	-35.85	Peak
3	8022.46	34.38	37.14	7.62	33.31	45.83	74.00	-28.17	Peak
4	11341.14	34.33	40.48	9.36	36.46	47.71	74.00	-26.29	Peak

Type	802.11n(HT40)		Test channel	CH03			Polarity	Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1326.51	39.40	26.16	2.90	36.36	32.10	74.00	-41.90	Peak
2	3463.29	40.37	28.95	4.78	36.56	37.54	74.00	-36.46	Peak
3	5047.83	37.39	32.19	5.85	35.37	40.06	74.00	-33.94	Peak
4	9784.47	35.22	39.60	8.44	36.17	47.09	74.00	-26.91	Peak
Type	802.11n(HT40)		Test channel	CH03			Polarity	Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1195.05	40.21	25.58	2.77	36.65	31.91	74.00	-42.09	Peak
2	3480.97	40.29	29.02	4.78	36.59	37.50	74.00	-36.50	Peak
3	4946.07	37.82	31.49	5.83	35.20	39.94	74.00	-34.06	Peak
4	9834.41	36.17	39.53	8.50	36.42	47.78	74.00	-26.22	Peak
Type	802.11n(HT40)		Test channel	CH06			Polarity	Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1333.28	39.38	26.20	2.91	36.38	32.11	74.00	-41.89	Peak
2	3634.91	40.72	29.40	4.94	37.00	38.06	74.00	-35.94	Peak
3	8002.06	34.83	37.10	7.61	33.31	46.23	74.00	-27.77	Peak
4	9784.47	35.85	39.60	8.44	36.17	47.72	74.00	-26.28	Peak
Type	802.11n(HT40)		Test channel	CH06			Polarity	Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1316.42	39.00	26.10	2.88	36.34	31.64	74.00	-42.36	Peak
2	5073.59	38.36	32.20	5.88	35.43	41.01	74.00	-32.99	Peak
3	7961.43	35.26	36.95	7.58	33.32	46.47	74.00	-27.53	Peak
4	10860.83	35.50	40.48	9.09	36.78	48.29	74.00	-25.71	Peak
Type	802.11n(HT40)		Test channel	CH09			Polarity	Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1213.44	40.35	25.68	2.79	36.63	32.19	74.00	-41.81	Peak
2	5490.18	38.41	31.86	6.14	35.33	41.08	74.00	-32.92	Peak
3	8022.46	34.24	37.14	7.62	33.31	45.69	74.00	-28.31	Peak
4	10888.51	35.12	40.57	9.10	36.76	48.03	74.00	-25.97	Peak
Type	802.11n(HT40)		Test channel	CH09			Polarity	Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1319.78	39.44	26.12	2.88	36.34	32.10	74.00	-41.90	Peak
2	5099.49	37.71	32.20	5.91	35.48	40.34	74.00	-33.66	Peak
3	8063.40	34.87	37.20	7.65	33.32	46.40	74.00	-27.60	Peak
4	9834.41	35.84	39.53	8.50	36.42	47.45	74.00	-26.55	Peak

## 6. TEST SETUP PHOTOS

Radiated Emission

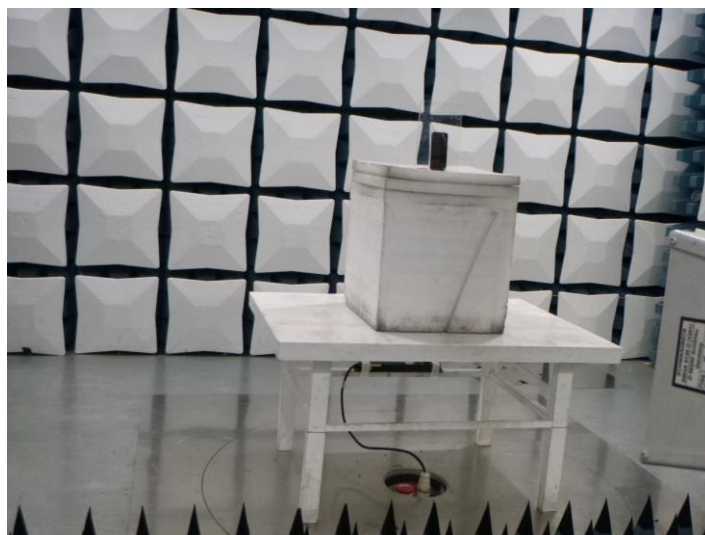

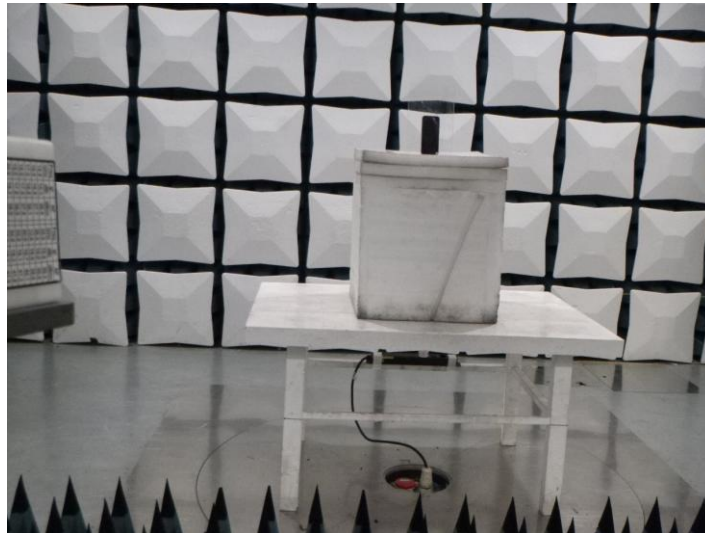

AC Conducted Emission



## **7. EXTERNAL AND INTERNAL PHOTOS**

Refer to the test report No.: CHTEW22120050

## **8. APPENDIX REPORT**