



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM170100065401
Page: 1 of 100

TEST REPORT

Application No.: SZEM1701000654CR
Applicant: MODERN ELECTRONICS FACTORY LTD
Address of Applicant: FLAT C, 10/F, PHASE 4, KWUN TONG INDUSTRIAL CENTRE, 472-478 KWUN TONG ROAD, HONG KONG
Manufacturer: MODERN ELECTRONICS FACTORY LTD
Address of Manufacturer: FLAT C, 10/F, PHASE 4, KWUN TONG INDUSTRIAL CENTRE, 472-478 KWUN TONG ROAD, HONG KONG
Factory: Keng Fu Jia Electronics (Shenzhen) Co., Ltd.
Address of Factory: Sui Wai Sun Chuen, Tai Long, Lung Wah, Shenzhen, GDGZ
Equipment Under Test (EUT):
EUT Name: Suitcase Turntable
Model No.: KT-3007
Trade mark: 

FCC ID: SSMMEF3007
Standards: 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2017-01-24
Date of Test: 2017-02-07 to 2017-04-06
Date of Issue: 2017-04-13

Test Result :	Pass*
----------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2017-04-13		Original

Authorized for issue by:			
Tested By			2017-04-06
	<hr/>	Peter Geng /Project Engineer	Date
Checked By			2017-04-13
	<hr/>	Eric Fu /Reviewer	Date



2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Disturbance at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass*
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6	47 CFR Part 15, Subpart C 15.247(d)	Pass

*The EUT passed the Conducted Disturbance at AC Power Line test after modification. This modification method is only for the purpose of fixing the EMC compliance problem while other subject matters or issues such as safety compliance, hazards, RoHS compliance or even production issue etc., are not addressed in this report.



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION.....	6
4.1 DETAILS OF E.U.T.	6
4.2 DESCRIPTION OF SUPPORT UNITS.....	6
4.3 MEASUREMENT UNCERTAINTY.....	7
4.4 TEST LOCATION	8
4.5 TEST FACILITY	8
4.6 DEVIATION FROM STANDARDS.....	8
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	8
5 EQUIPMENT LIST.....	9
6 RADIO SPECTRUM TECHNICAL REQUIREMENT.....	11
6.1 ANTENNA REQUIREMENT	11
6.1.1 Test Requirement:.....	11
6.1.2 Conclusion.....	11
6.2 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM HOPPING SEQUENCE.....	12
6.2.1 Test Requirement:.....	12
6.2.2 Conclusion.....	12
7 RADIO SPECTRUM MATTER TEST RESULTS	14
7.1 CONDUCTED DISTURBANCE AT AC POWER LINE(150kHz-30MHz).....	14
7.1.1 E.U.T. Operation.....	15
7.1.2 Test Setup Diagram.....	15
7.1.3 Measurement Data.....	15
7.2 20dB BANDWIDTH.....	18
7.2.1 E.U.T. Operation.....	18
7.2.2 Test Setup Diagram.....	18
7.2.3 Measurement Data.....	18
7.3 CONDUCTED PEAK OUTPUT POWER.....	19
7.3.1 E.U.T. Operation.....	20
7.3.2 Test Setup Diagram.....	20
7.3.3 Measurement Data.....	20
7.4 CARRIER FREQUENCIES SEPARATION.....	21
7.4.1 E.U.T. Operation.....	21
7.4.2 Test Setup Diagram.....	21
7.4.3 Measurement Data.....	21
7.5 HOPPING CHANNEL NUMBER.....	22
7.5.1 E.U.T. Operation.....	23
7.5.2 Test Setup Diagram.....	23
7.5.3 Measurement Data.....	23
7.6 DWELL TIME.....	24
7.6.1 E.U.T. Operation.....	25
7.6.2 Test Setup Diagram.....	25
7.6.3 Measurement Data.....	25
7.7 CONDUCTED SPURIOUS EMISSIONS.....	26



7.7.1	E.U.T. Operation.....	26
7.7.2	Test Setup Diagram.....	26
7.7.3	Measurement Data.....	26
7.8	RADIATED SPURIOUS EMISSIONS	27
7.8.1	E.U.T. Operation.....	28
7.8.2	Test Setup Diagram.....	28
7.8.3	Measurement Data.....	29
7.9	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	35
7.9.1	E.U.T. Operation.....	35
7.9.2	Test Setup Diagram.....	35
7.9.3	Measurement Data.....	36
7.10	CONDUCTED BAND EDGES MEASUREMENT	41
7.10.1	E.U.T. Operation	41
7.10.2	Test Setup Diagram.....	41
7.10.3	Measurement Data.....	41
8	PHOTOGRAPHS.....	42
8.1	CONDUCTED DISTURBANCE AT AC POWER LINE(150KHZ-30MHZ) TEST SETUP.....	42
8.2	RADIATED SPURIOUS EMISSIONS TEST SETUP.....	43
8.3	EUT CONSTRUCTIONAL DETAILS	44
9	APPENDIX.....	45
9.1	APPENDIX 15.247.....	45-100

4 General Information

4.1 Details of E.U.T.

Power supply:	adapter model: HK15-HASF0901500
	INPUT: AC 100-240V, 50/60Hz
	OUTPUT: DC 9V, 1500mA
Cable:	DC line: 150cm, unshielded
Bluetooth version:	2.1+EDR
Modulation type:	GFSK, PI/4DQPSK
Frequency range:	2402-2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	Integral antenna
Antenna gain;	2dBi

4.2 Description of Support Units

The EUT has been tested as an independent unit.

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.25 x 10 ⁻⁸
2	Duty cycle	0.37%
3	Occupied Bandwidth	3%
4	RF conducted power	0.75dB
5	RF power density	2.84dB
6	Conducted Spurious emissions	0.75dB
7	RF Radiated power	4.5dB (below 1GHz)
		4.8dB (above 1GHz)
8	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
9	Temperature test	1 °C
10	Humidity test	3%
11	Supply voltages	1.5%
12	Time	3%



4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Disturbance at AC Power Line(150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13
LISN	Rohde & Schwarz	ENV216	SEM007-01	2016-10-09	2017-10-09
LISN	ETS-LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25
8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	EMC0120	2016-09-28	2017-09-28
4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	EMC0121	2016-09-28	2017-09-28
2 Line ISN	Fischer Custom	FCC-TLISN-T2-02	EMC0122	2016-09-28	2017-09-28

20dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

Conducted Peak Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

Carrier Frequencies Separation					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09



Hopping Channel Number					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

Dwell Time					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

Conducted Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

Conducted Band Edges Measurement					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2016-10-12	2017-10-12
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2016-10-12	2017-10-12
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2016-10-12	2017-10-12
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2016-05-18	2017-05-18

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247

6.1.2 Conclusion

Standard Requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.

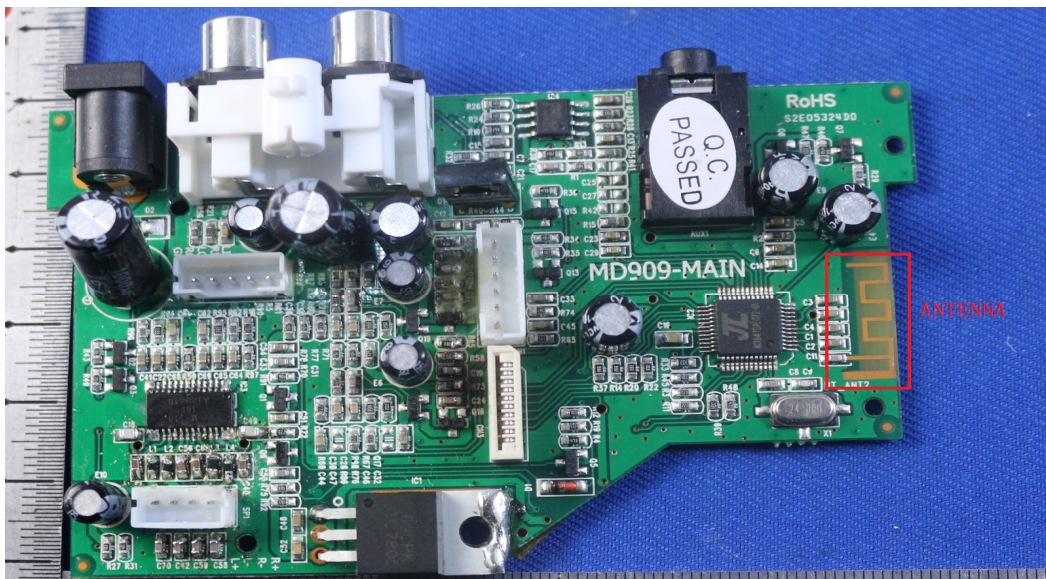

6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247

6.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

> Number of shift register stages: 9

> Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

> Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):



According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individ



7 Radio Spectrum Matter Test Results

7.1 Conducted Disturbance at AC Power Line(150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207
Test Method: ANSI C63.10 (2013) Section 6.2
Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.0 °C Humidity: 55 % RH Atmospheric Pressure: 1020 mbar

Test mode: a:Tx mode


7.1.2 Test Setup Diagram

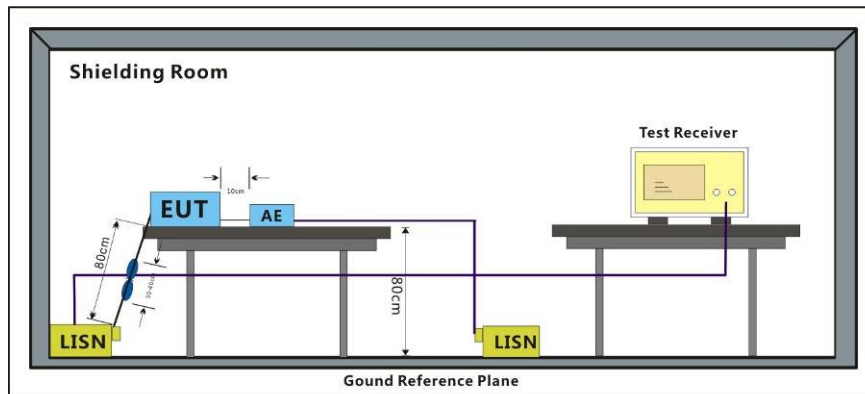

7.1.3 Measurement Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Mode:a; Line:Live Line

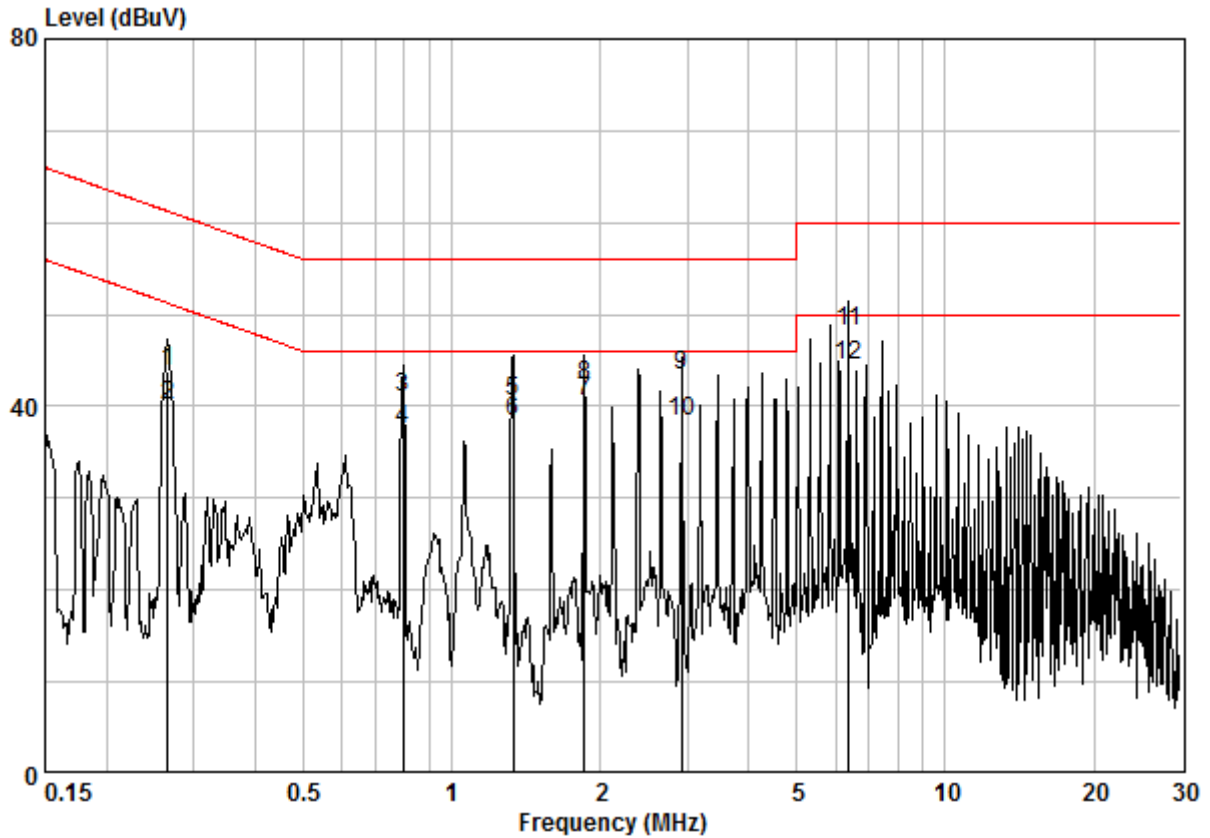

Site : Shielding Room
 Condition : CE LINE
 Job No. : 00654CR
 Test Mode : a

	Freq	Cable Loss	LISN Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.26583	0.02	9.64	34.24	43.90	61.25	-17.35	QP
2	0.26583	0.02	9.64	30.54	40.20	51.25	-11.04	Average
3	0.79600	0.03	9.65	31.27	40.95	56.00	-15.05	QP
4	0.79600	0.03	9.65	27.74	37.42	46.00	-8.58	Average
5	1.331	0.03	9.66	30.95	40.64	46.00	-5.36	Average
6	1.331	0.03	9.66	28.71	38.40	56.00	-17.60	QP
7	1.858	0.03	9.67	30.84	40.54	46.00	-5.46	Average
8	1.858	0.03	9.67	32.57	42.27	56.00	-13.73	QP
9	2.915	0.03	9.69	33.59	43.30	56.00	-12.70	QP
10	2.915	0.03	9.69	28.57	38.28	46.00	-7.72	Average
11	6.386	0.06	9.78	38.26	48.10	60.00	-11.90	QP
12	6.386	0.06	9.78	34.71	44.55	50.00	-5.45	Average

Mode:a; Line:Neutral Line

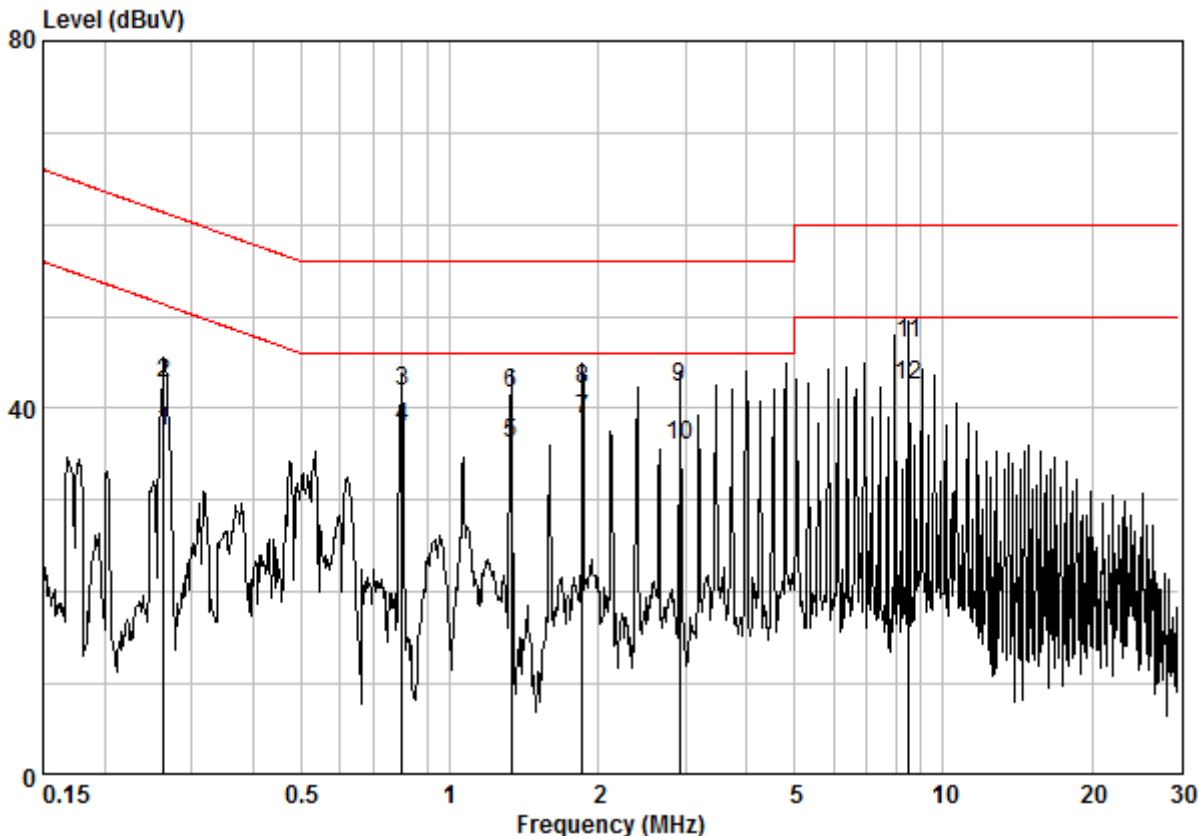

Site : Shielding Room
 Condition : CE NEUTRAL
 Job No. : 00654CR
 Test Mode : a

	Freq	Cable Loss	LISN Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.26303	0.02	9.64	27.88	37.54	51.34	-13.80	Average
2	0.26303	0.02	9.64	33.17	42.83	61.34	-18.51	QP
3	0.80023	0.03	9.65	32.14	41.82	56.00	-14.18	QP
4	0.80023	0.03	9.65	28.20	37.87	46.00	-8.13	Average
5	1.331	0.03	9.66	26.53	36.22	46.00	-9.78	Average
6	1.331	0.03	9.66	32.01	41.70	56.00	-14.30	QP
7 @	1.858	0.03	9.67	29.21	38.91	46.00	-7.09	Average
8	1.858	0.03	9.67	32.27	41.97	56.00	-14.03	QP
9	2.915	0.03	9.69	32.67	42.38	56.00	-13.62	QP
10	2.915	0.03	9.69	26.36	36.07	46.00	-9.93	Average
11	8.501	0.11	9.82	37.08	47.01	60.00	-12.99	QP
12	8.501	0.11	9.82	32.49	42.42	50.00	-7.58	Average


7.2 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)
Test Method: ANSI C63.10 (2013) Section 7.8.7

7.2.1 E.U.T. Operation

Operating Environment:
Temperature: 25.0 °C Humidity: 52 % RH Atmospheric Pressure: 1020 mbar
Test mode: a:Tx mode

7.2.2 Test Setup Diagram

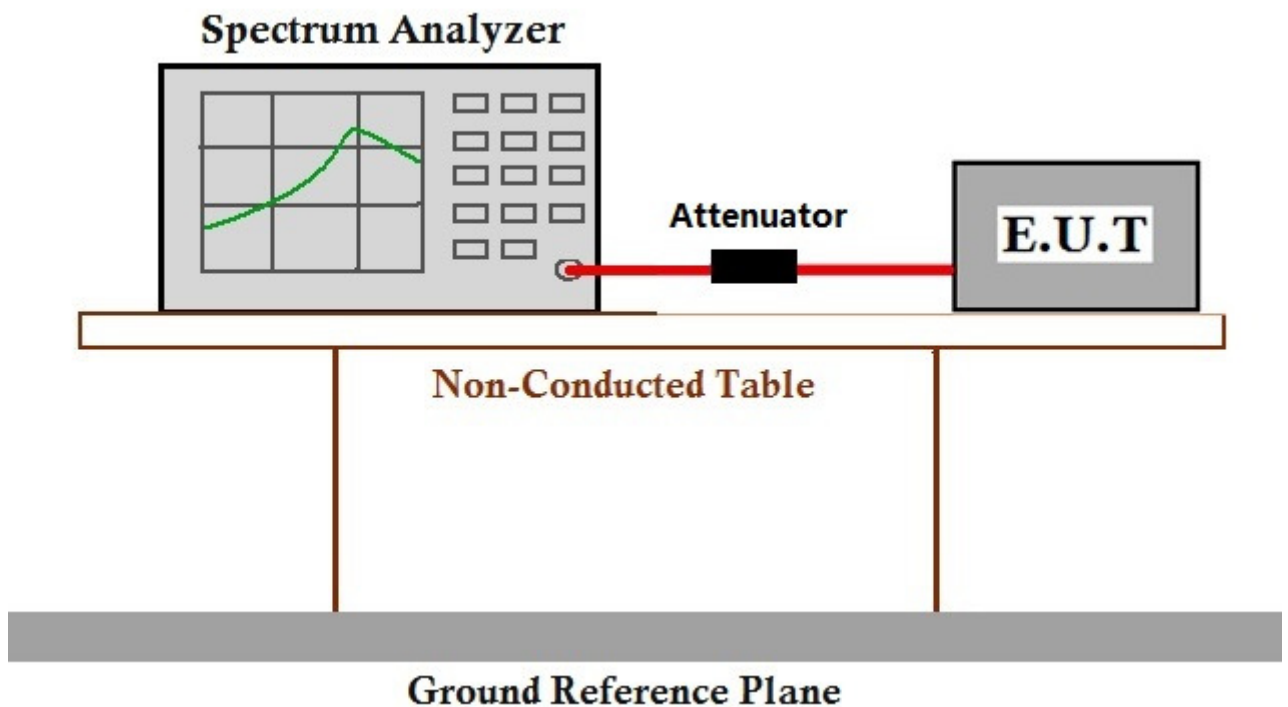

7.2.3 Measurement Data

The detailed test data see: Appendix 15.247



7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)
Test Method: ANSI C63.10 (2013) Section 7.8.5
Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 25.0 °C Humidity: 52 % RH Atmospheric Pressure: 1020 mbar

Test mode: a:Tx mode

7.3.2 Test Setup Diagram

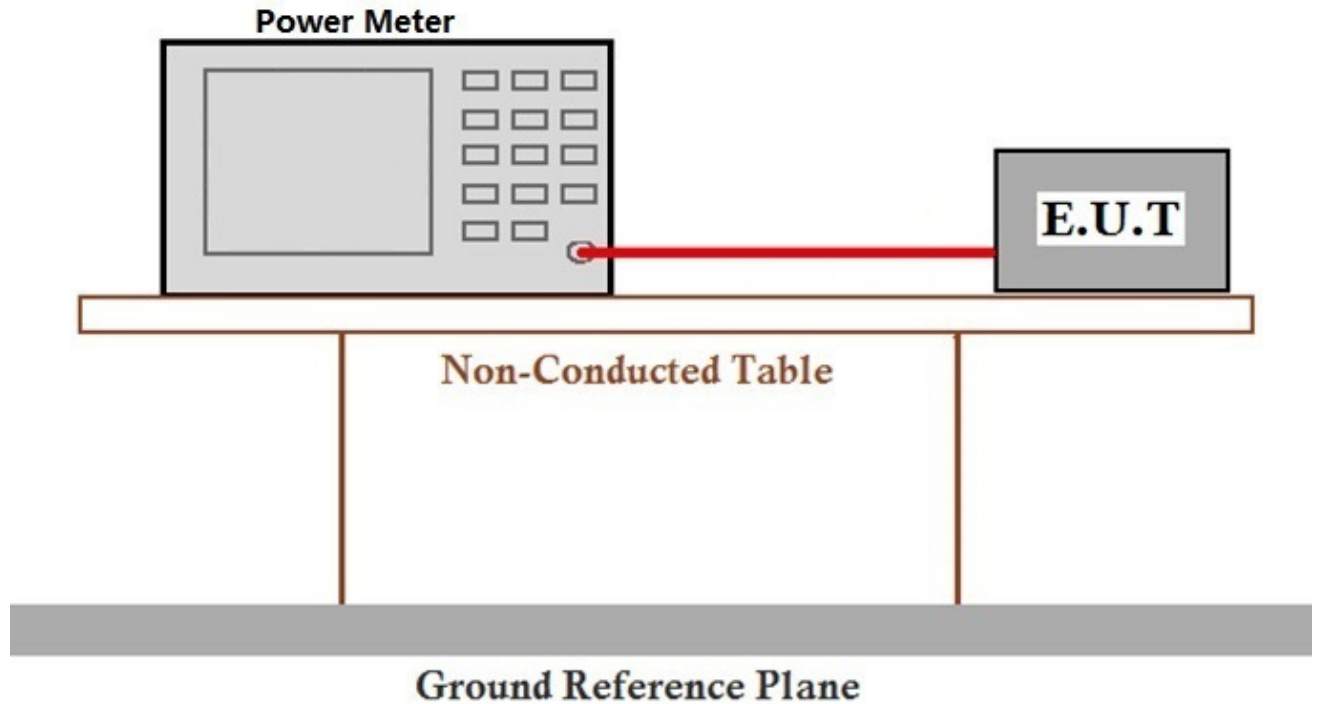

7.3.3 Measurement Data

The detailed test data see: Appendix 15.247


7.4 Carrier Frequencies Separation

Test Requirement: 47 CFR Part 15, Subpart C 15.247a(1)
 Test Method: ANSI C63.10 (2013) Section 7.8.2
 Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

7.4.1 E.U.T. Operation

Operating Environment:
 Temperature: 25.0 °C Humidity: 52 % RH Atmospheric Pressure: 1020 mbar
 Test mode: a:Tx mode

7.4.2 Test Setup Diagram

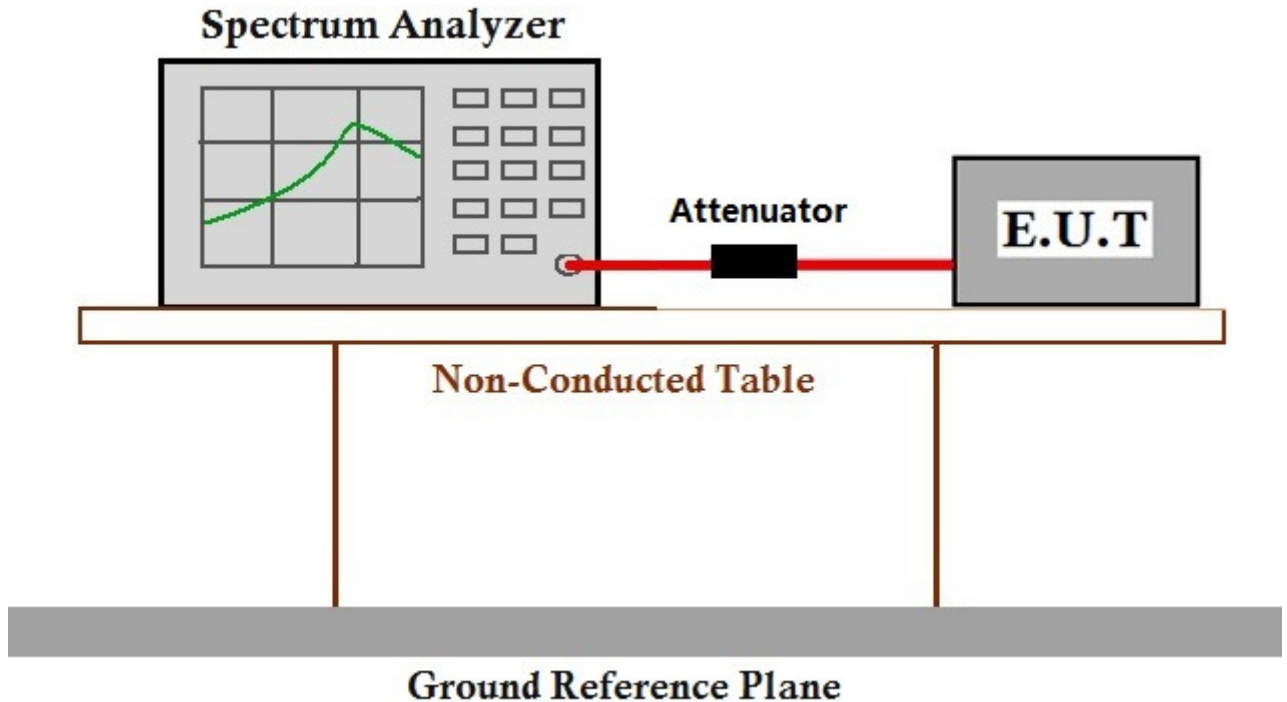

7.4.3 Measurement Data

The detailed test data see: Appendix 15.247



7.5 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)
Test Method: ANSI C63.10 (2013) Section 7.8.3
Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75


7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.0 °C Humidity: 52 % RH Atmospheric Pressure: 1020 mbar

Test mode: a:Tx mode

7.5.2 Test Setup Diagram

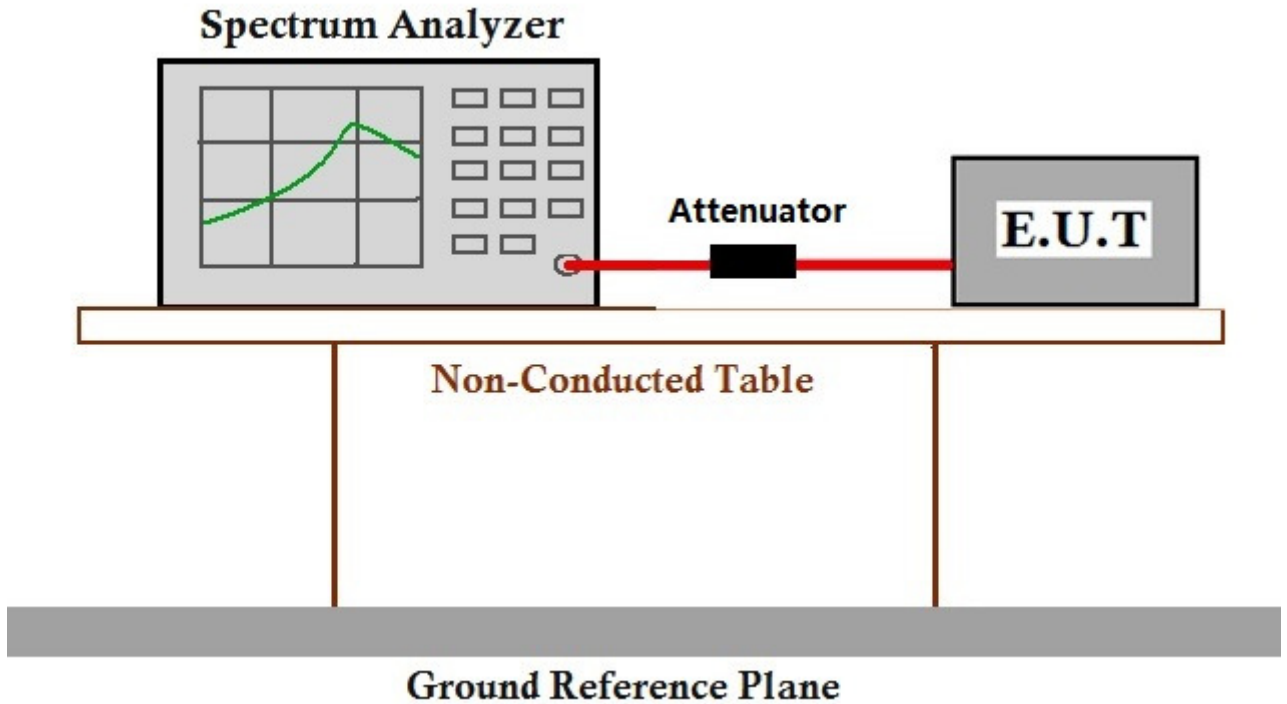

7.5.3 Measurement Data

The detailed test data see: Appendix 15.247



7.6 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)
Test Method: ANSI C63.10 (2013) Section 7.8.4
Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period


7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.0 °C Humidity: 52 % RH Atmospheric Pressure: 1020 mbar

Test mode: a:Tx mode

7.6.2 Test Setup Diagram

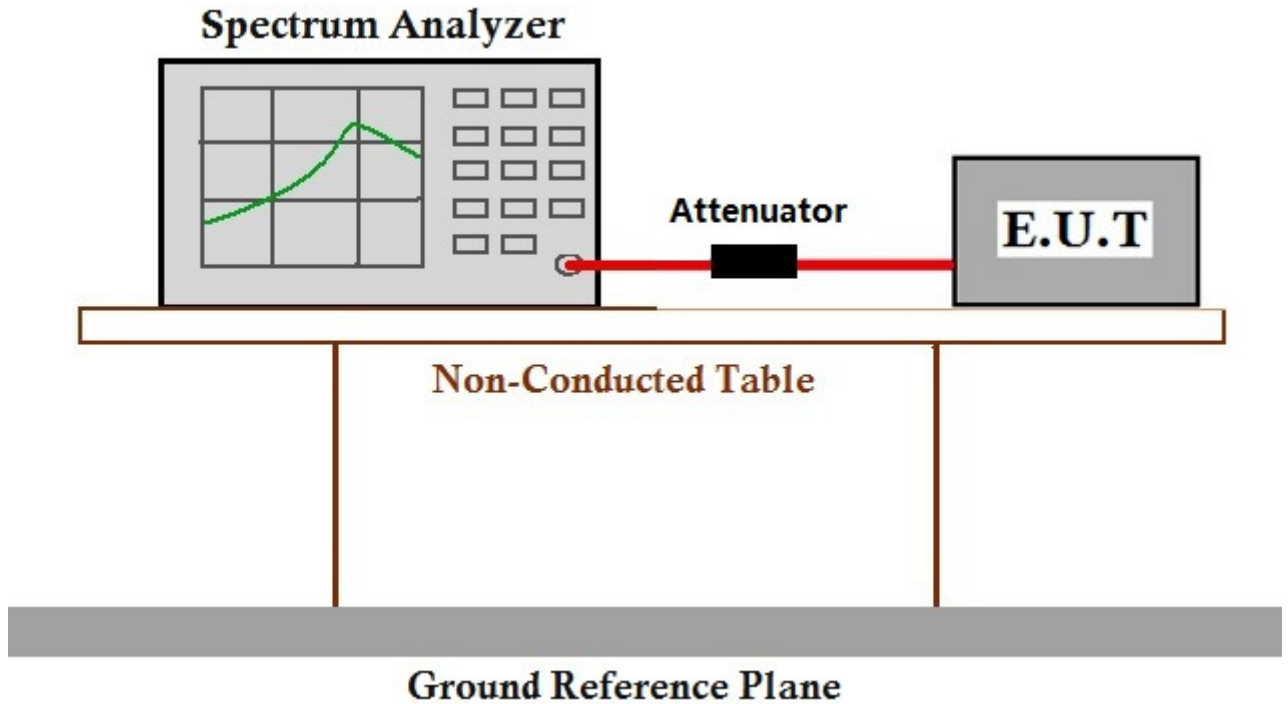

7.6.3 Measurement Data

The detailed test data see: Appendix 15.247


7.7 Conducted Spurious Emissions

Test Requirement: 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2013) Section 7.8.8
 Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.7.1 E.U.T. Operation

Operating Environment:
 Temperature: 25.0 °C Humidity: 52 % RH Atmospheric Pressure: 1020 mbar
 Test mode: a:Tx mode

7.7.2 Test Setup Diagram

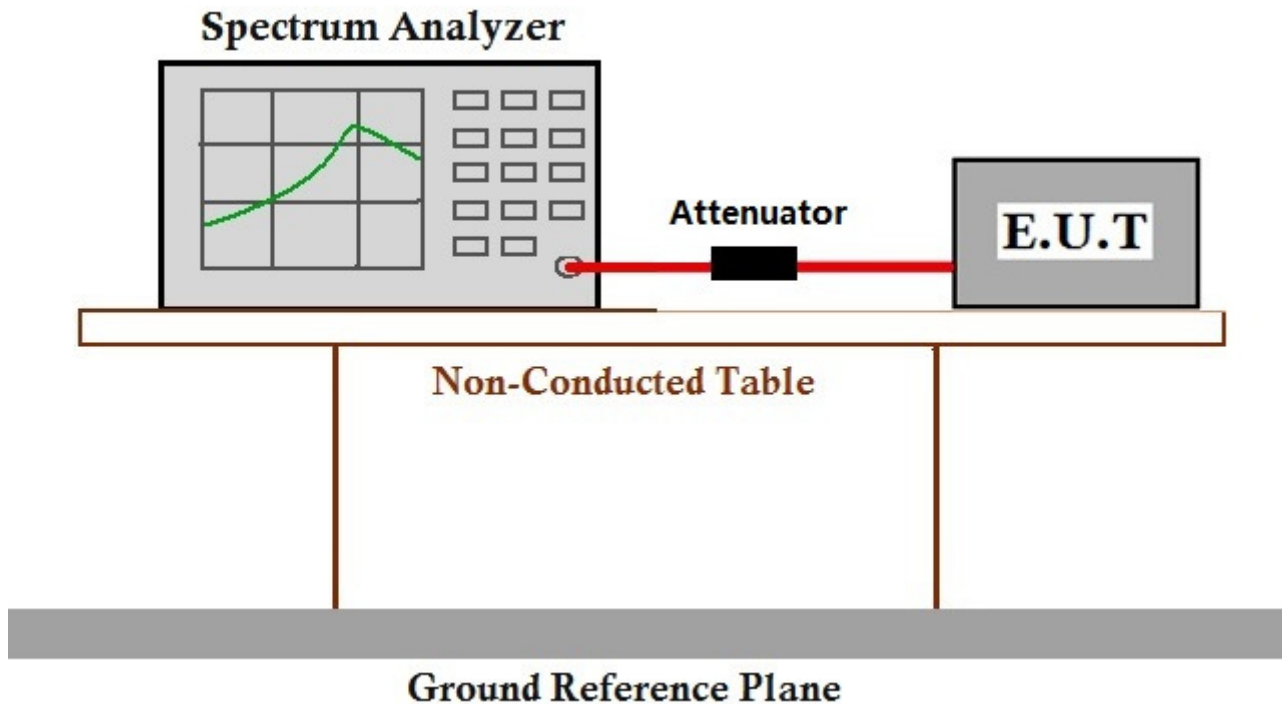

7.7.3 Measurement Data

The detailed test data see: Appendix 15.247



7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 25.0 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar


Test mode: a:Tx mode

7.8.2 Test Setup Diagram

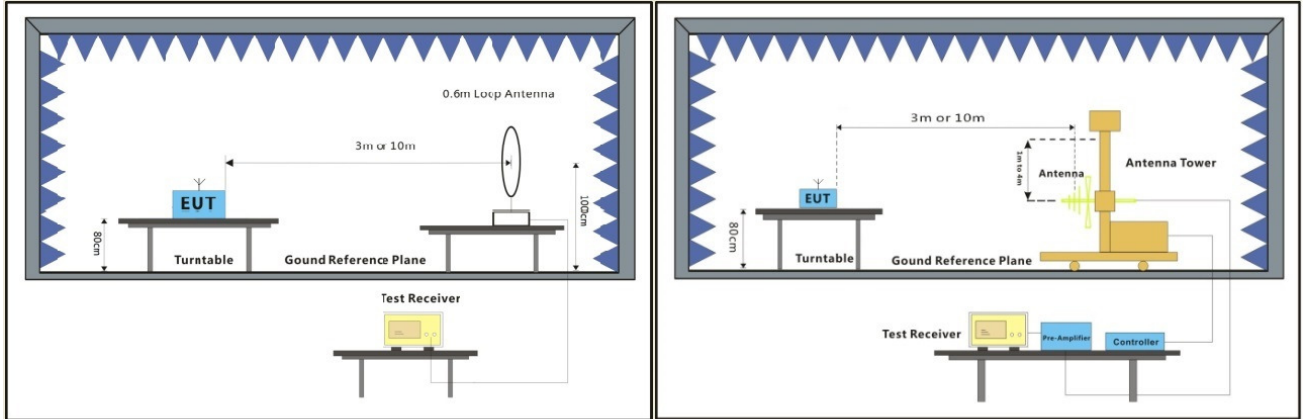

Below 30MHz

30MHz-1GHz

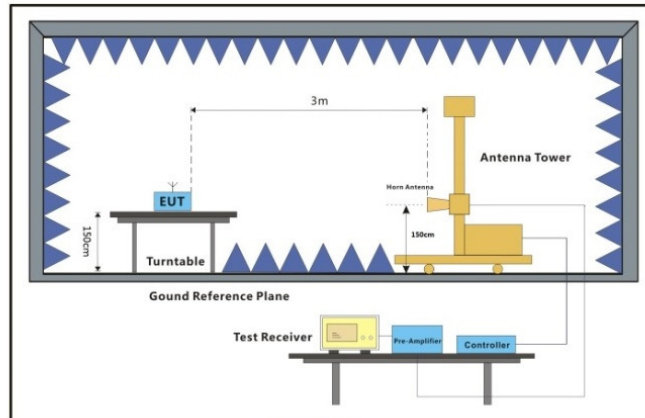

Above 1GHz




7.8.3 Measurement Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Below 1GHz:


Mode:a; Polarization:Horizontal

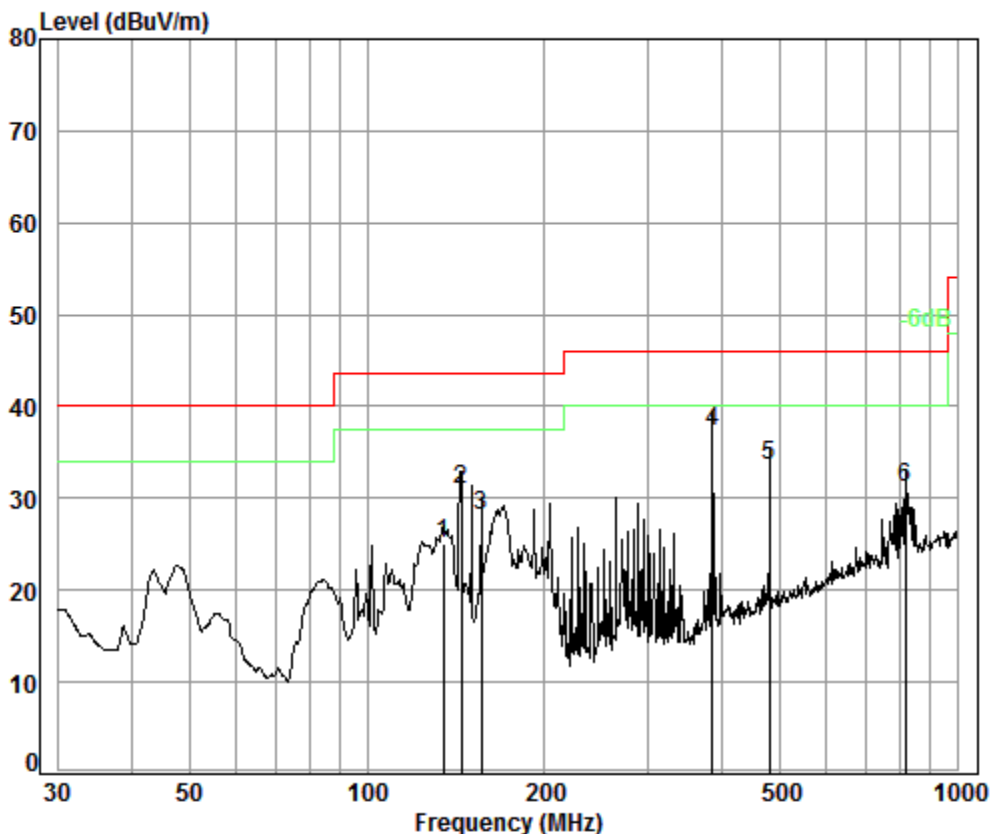

Condition: 3m HORIZONTAL
 Job No. : 00654CR
 Test mode: a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	134.56	1.29	7.88	26.98	42.79	24.98	43.50	-18.52
2	144.33	1.31	8.49	26.94	48.05	30.91	43.50	-12.59
3	155.91	1.33	9.35	26.88	44.27	28.07	43.50	-15.43
4 pp	383.93	2.16	16.11	27.03	46.14	37.38	46.00	-8.62
5	480.53	2.53	17.80	27.60	40.75	33.48	46.00	-12.52
6	815.97	3.27	22.29	27.20	32.76	31.12	46.00	-14.88

Mode:a; Polarization:Vertical

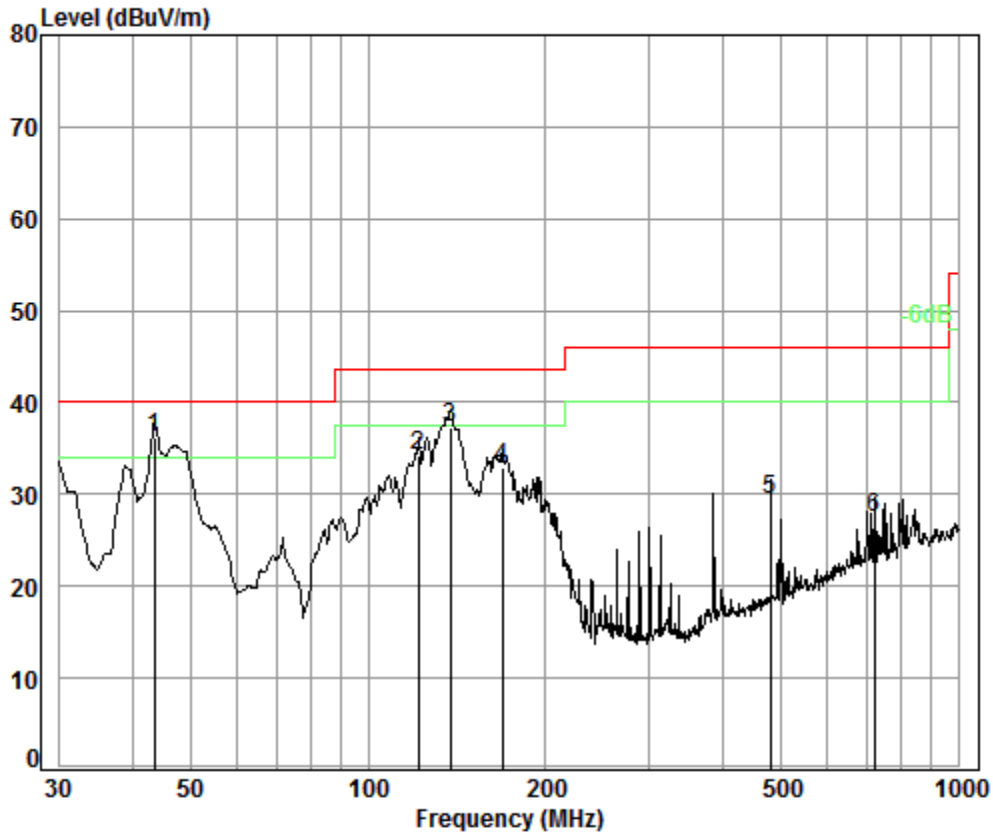

Condition: 3m VERTICAL
Job No. : 00654CR
Test mode: a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	43.51	0.68	11.56	27.31	51.20	36.13	40.00	-3.87
2	121.98	1.26	7.86	27.06	52.16	34.22	43.50	-9.28
3	137.90	1.29	8.02	26.97	54.83	37.17	43.50	-6.33
4	169.01	1.35	9.51	26.82	48.86	32.90	43.50	-10.60
5	480.53	2.53	17.80	27.60	36.78	29.51	46.00	-16.49
6	719.20	2.96	21.60	27.39	30.38	27.55	46.00	-18.45



Above 1GHz:

Mode:a; Polarization:Horizontal High channel

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over limit (dB)
3776.027	33.00	7.73	37.98	43.93	46.68	74	-27.32
4960.000	34.43	9.09	38.48	42.13	47.17	74	-26.83
6051.874	34.74	10.49	38.25	43.76	50.74	74	-23.26
7440.000	36.32	10.77	36.90	40.40	50.59	74	-23.41
9920.000	37.58	12.67	34.94	37.23	52.54	74	-21.46
12067.890	38.64	14.50	35.76	35.99	53.37	74	-20.63

Mode:a; Polarization:Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over limit (dB)
3786.970	33.03	7.74	37.98	45.14	47.93	74	-26.07
4804.000	34.16	8.87	38.40	42.61	47.24	74	-26.76
5982.226	34.69	10.51	38.30	43.77	50.67	74	-23.33
7206.000	36.42	10.68	37.11	41.06	51.05	74	-22.95
9608.000	37.52	12.50	35.10	37.45	52.37	74	-21.63
12120.390	38.67	14.46	35.89	36.08	53.32	74	-20.68

Mode:a; Polarization:Horizontal Middle channel

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over limit (dB)
3743.387	32.90	7.72	37.97	44.99	47.64	74	-26.36
4882.000	34.30	8.98	38.44	42.67	47.51	74	-26.49
6060.637	34.75	10.48	38.24	44.18	51.17	74	-22.83
7323.000	36.37	10.72	37.01	41.91	51.99	74	-22.01
9764.000	37.55	12.58	35.02	37.46	52.57	74	-21.43
11980.900	38.58	14.54	35.60	35.84	53.36	74	-20.64



Mode:a; Polarization:Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3589.562	32.46	7.66	37.96	44.63	46.79	74	-27.21
4960.000	34.43	9.09	38.48	42.48	47.52	74	-26.48
6008.249	34.71	10.55	38.29	44.12	51.09	74	-22.91
7440.000	36.32	10.77	36.90	42.16	52.35	74	-21.65
9920.000	37.58	12.67	34.94	37.54	52.85	74	-21.15
12297.040	38.78	14.31	36.31	36.87	53.65	74	-20.35

Mode:a; Polarization:Vertical Low channel

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3743.387	32.90	7.72	37.97	44.59	47.24	74	-26.76
4804.000	34.16	8.87	38.40	42.67	47.30	74	-26.70
5820.005	34.59	10.06	38.34	45.49	51.80	74	-22.20
7206.000	36.42	10.68	37.11	42.63	52.62	74	-21.38
9608.000	37.52	12.50	35.10	37.12	52.04	74	-21.96
12102.870	38.66	14.47	35.85	35.73	53.01	74	-20.99

Mode:a; Polarization:Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3831.060	33.15	7.75	37.98	45.34	48.26	74	-25.74
4882.000	34.30	8.98	38.44	43.50	48.34	74	-25.66
6034.386	34.73	10.52	38.27	43.61	50.59	74	-23.41
7323.000	36.37	10.72	37.01	39.96	50.04	74	-23.96
9764.000	37.55	12.58	35.02	37.56	52.67	74	-21.33
12173.120	38.71	14.42	36.02	36.52	53.63	74	-20.37



Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.


7.9 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2013) Section 6.10.5
 Measurement Distance: 3m

7.9.1 E.U.T. Operation

Operating Environment:
 Temperature: 23.0 °C Humidity: 53 % RH Atmospheric Pressure: 1020 mbar
 Test mode: a:Tx mode

7.9.2 Test Setup Diagram

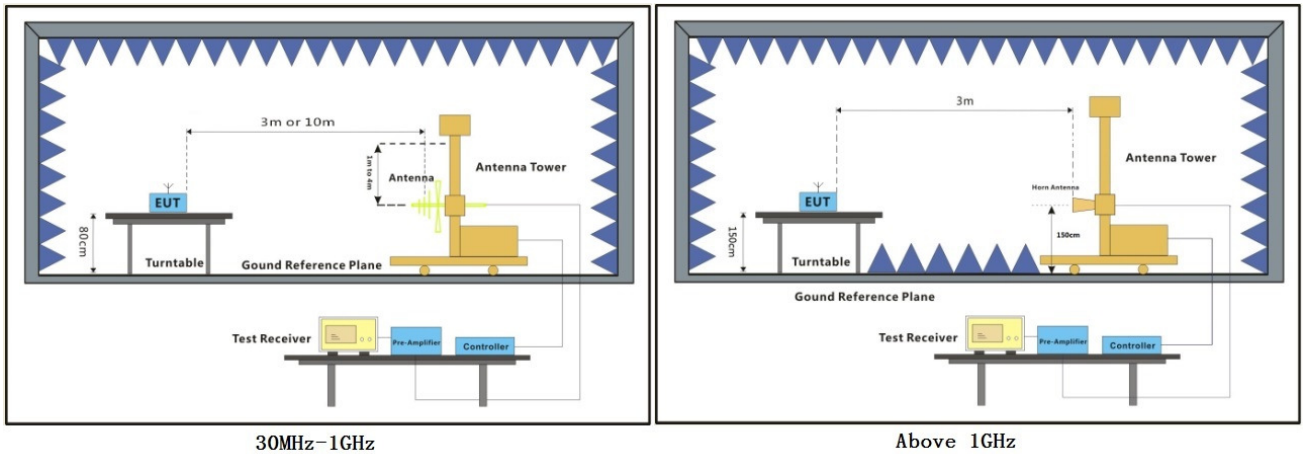




7.9.3 Measurement Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel,the middle channel,the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.



Mode:a; Polarization:Horizontal

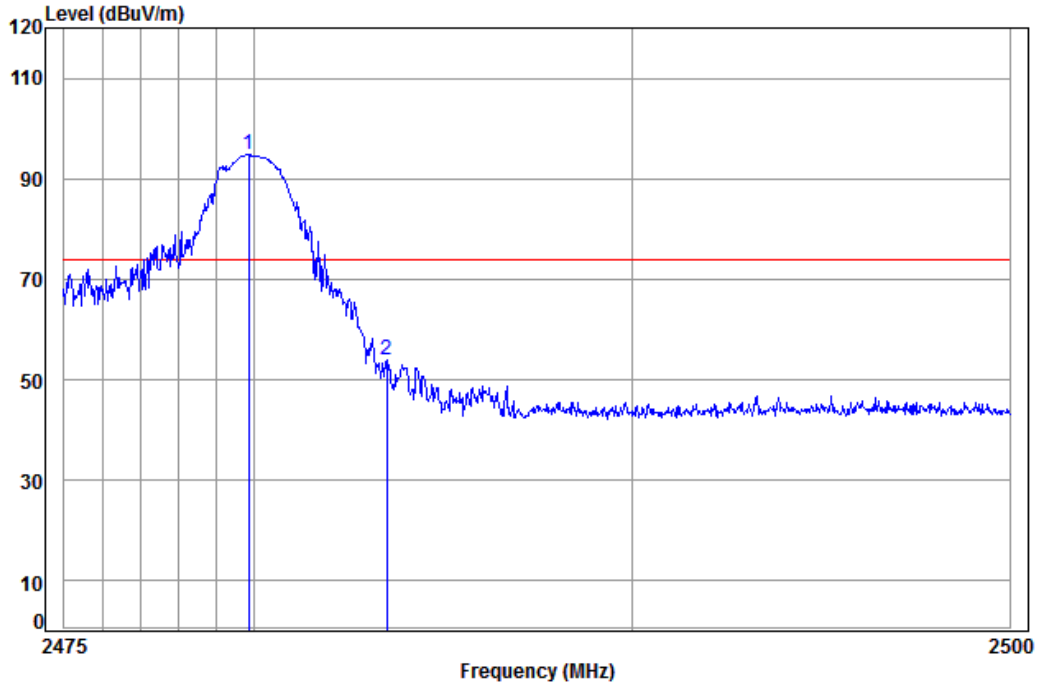


Condition: 3m HORIZONTAL
Job No: : 0654CR
Mode: : 2480 Band edge
: BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.855	5.41	29.34	37.95	97.92	94.72	74.00	20.72	
2	2483.500	5.41	29.35	37.95	57.13	53.94	74.00	-20.06	



Mode:a; Polarization:Horizontal

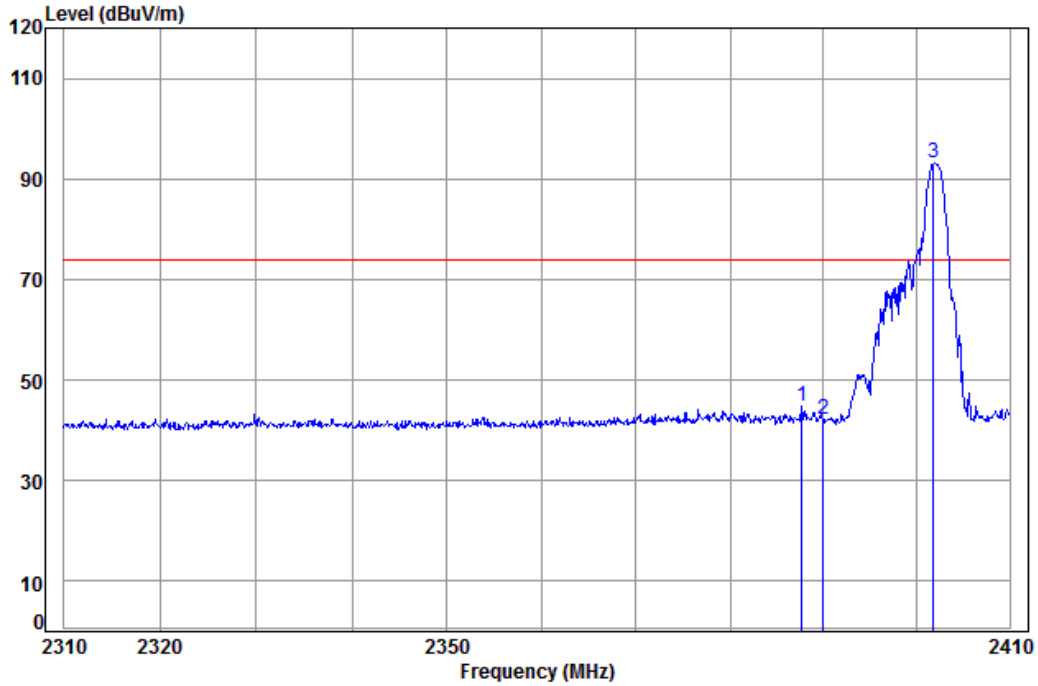


Condition: 3m Horizontal
Job No: : 0654CR
Mode: : 2402 Band edge
: BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2387.635	5.34	29.07	37.96	48.27	44.72	74.00	-29.28	
2	2390.000	5.34	29.08	37.96	45.57	42.03	74.00	-31.97	
3	pp 2401.843	5.35	29.11	37.96	96.61	93.11	74.00	19.11	



Mode:a; Polarization:Vertical

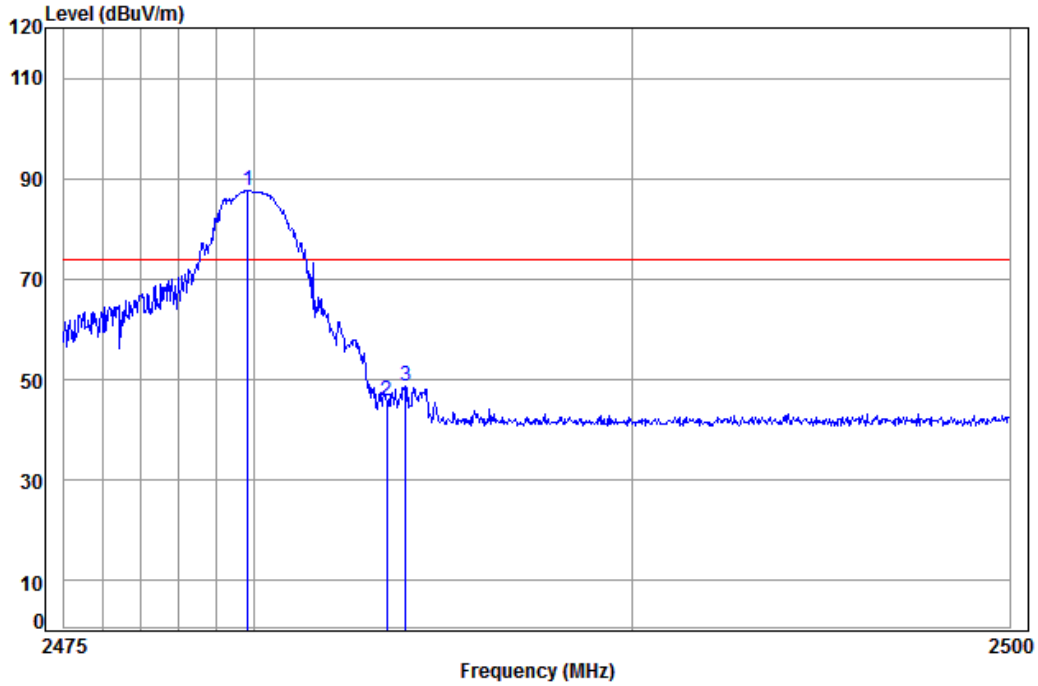


Condition: 3m VERTICAL
Job No: : 0654CR
Mode: : 2480 Band edge
: BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.830	5.41	29.34	37.95	90.77	87.57	74.00	13.57	
2	2483.500	5.41	29.35	37.95	49.00	45.81	74.00	-28.19	
3	2483.996	5.41	29.35	37.95	51.96	48.77	74.00	-25.23	



Mode:a; Polarization:Vertical

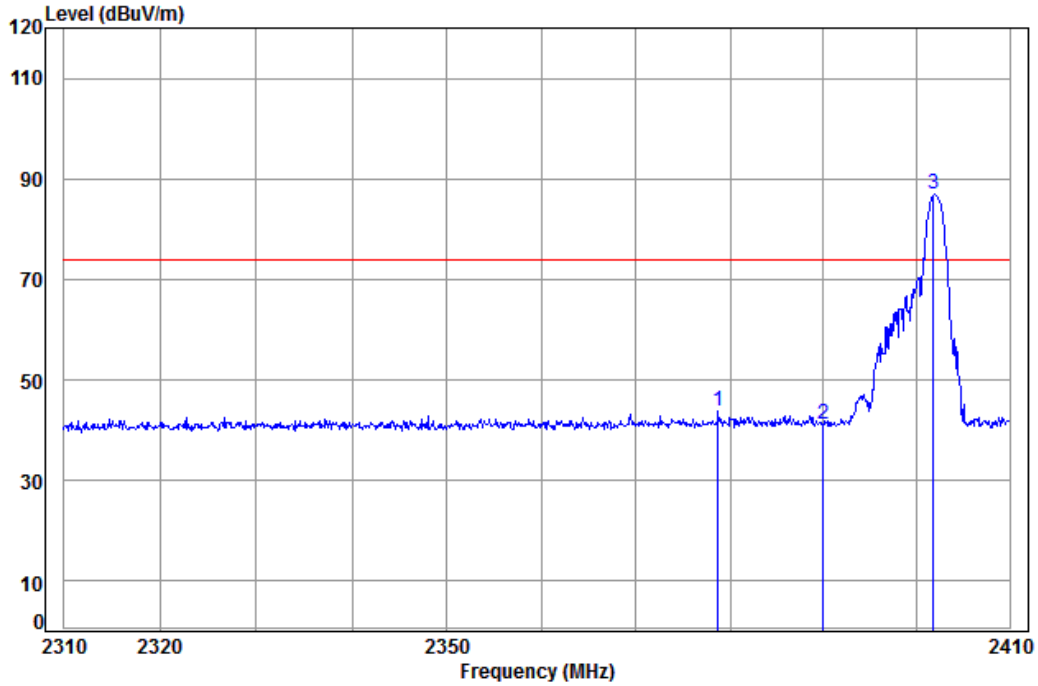

Condition: 3m VERTICAL
Job No: : 0654CR
Mode: : 2402 Band edge
: BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2378.747	5.33	29.04	37.96	47.29	43.70	74.00	-30.30	
2	2390.000	5.34	29.08	37.96	44.63	41.09	74.00	-32.91	
3	pp 2401.843	5.35	29.11	37.96	90.36	86.86	74.00	12.86	


7.10 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2013) Section 7.8.6

7.10.1 E.U.T. Operation

Operating Environment:
 Temperature: 25.0 °C Humidity: 52 % RH Atmospheric Pressure: 1020 mbar
 Test mode: a:Tx mode

7.10.2 Test Setup Diagram

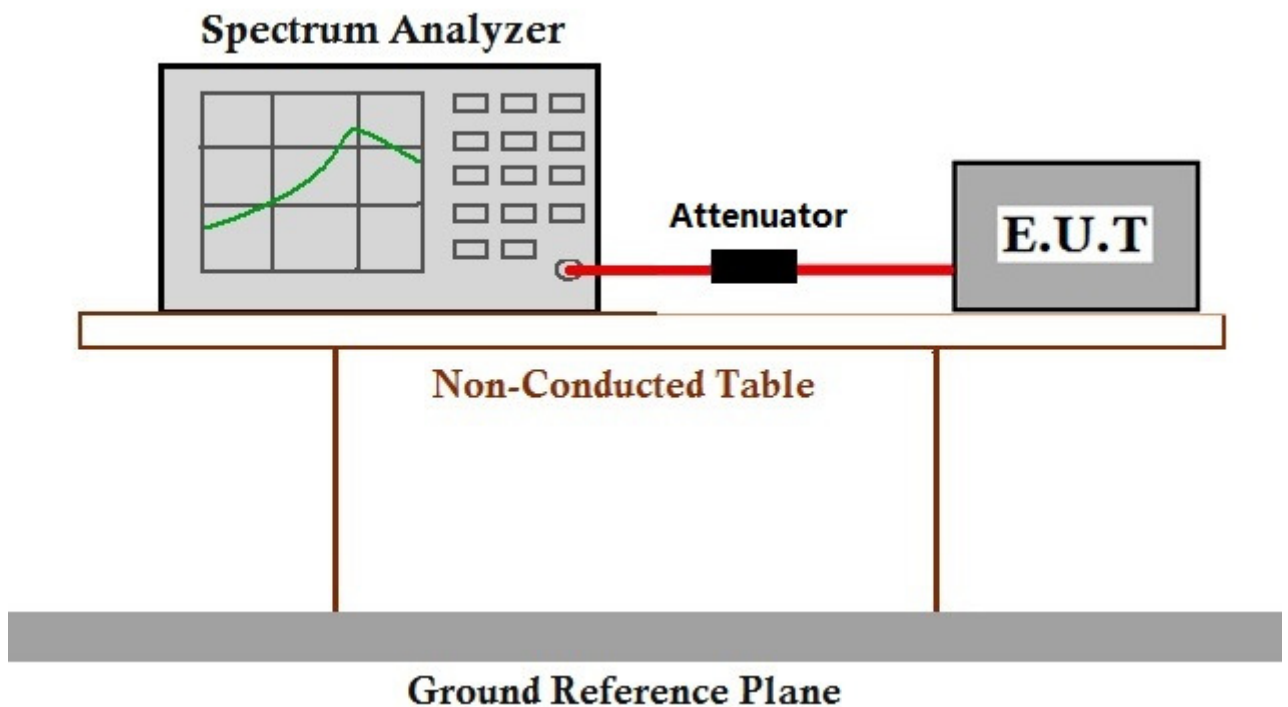

7.10.3 Measurement Data



The detailed test data see: Appendix 15.247

8 Photographs

8.1 Conducted Disturbance at AC Power Line(150kHz-30MHz) Test Setup



8.2 Radiated Spurious Emissions Test Setup

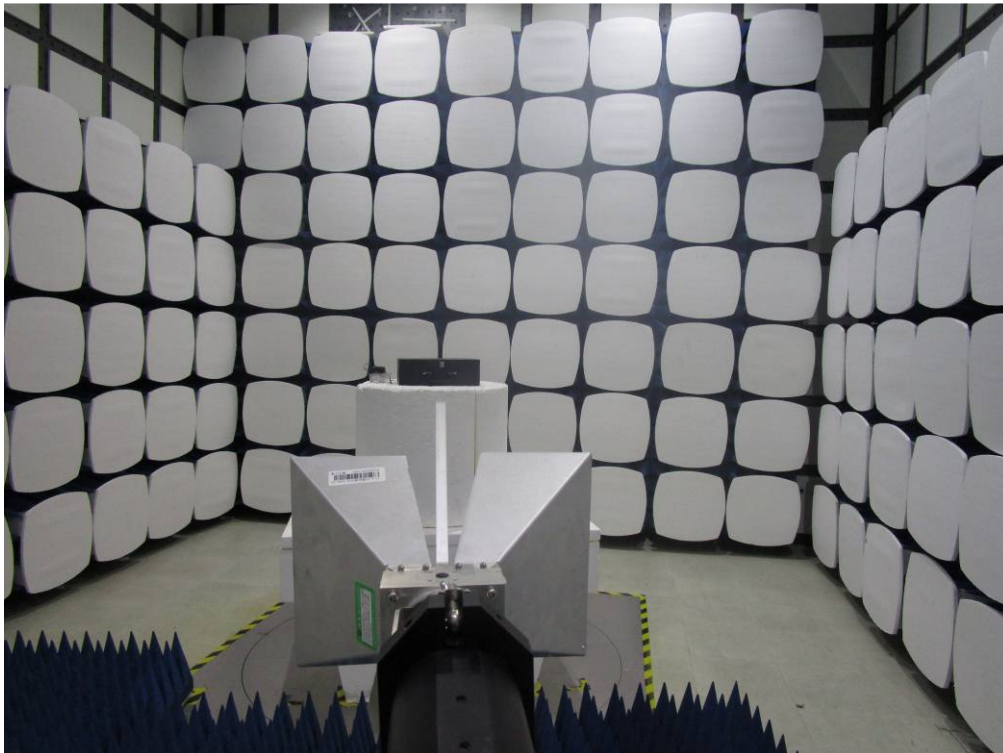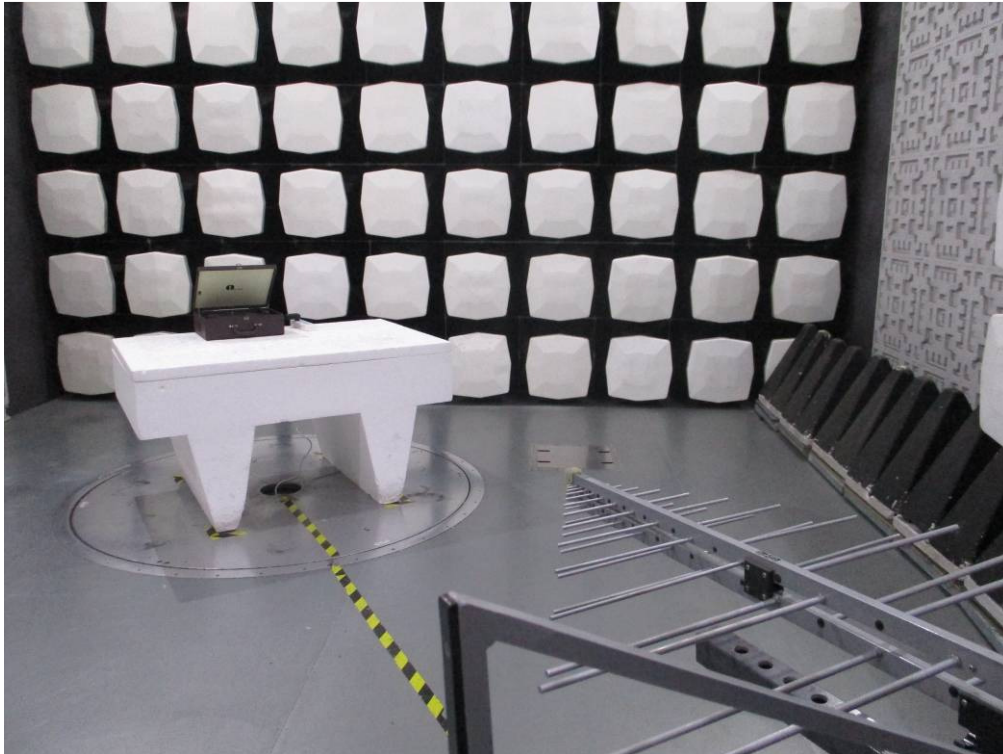



8.3 EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1701000654CR.





9 Appendix


9.1 Appendix 15.247


1.20 dB Bandwidth


Test Mode	Test Channel	EBW[MHz]	Limit	Verdict
DH5	2402	1.122	---	PASS
DH5	2441	1.134	---	PASS
DH5	2480	1.118	---	PASS
2DH5	2402	1.376	---	PASS
2DH5	2441	1.374	---	PASS
2DH5	2480	1.372	---	PASS

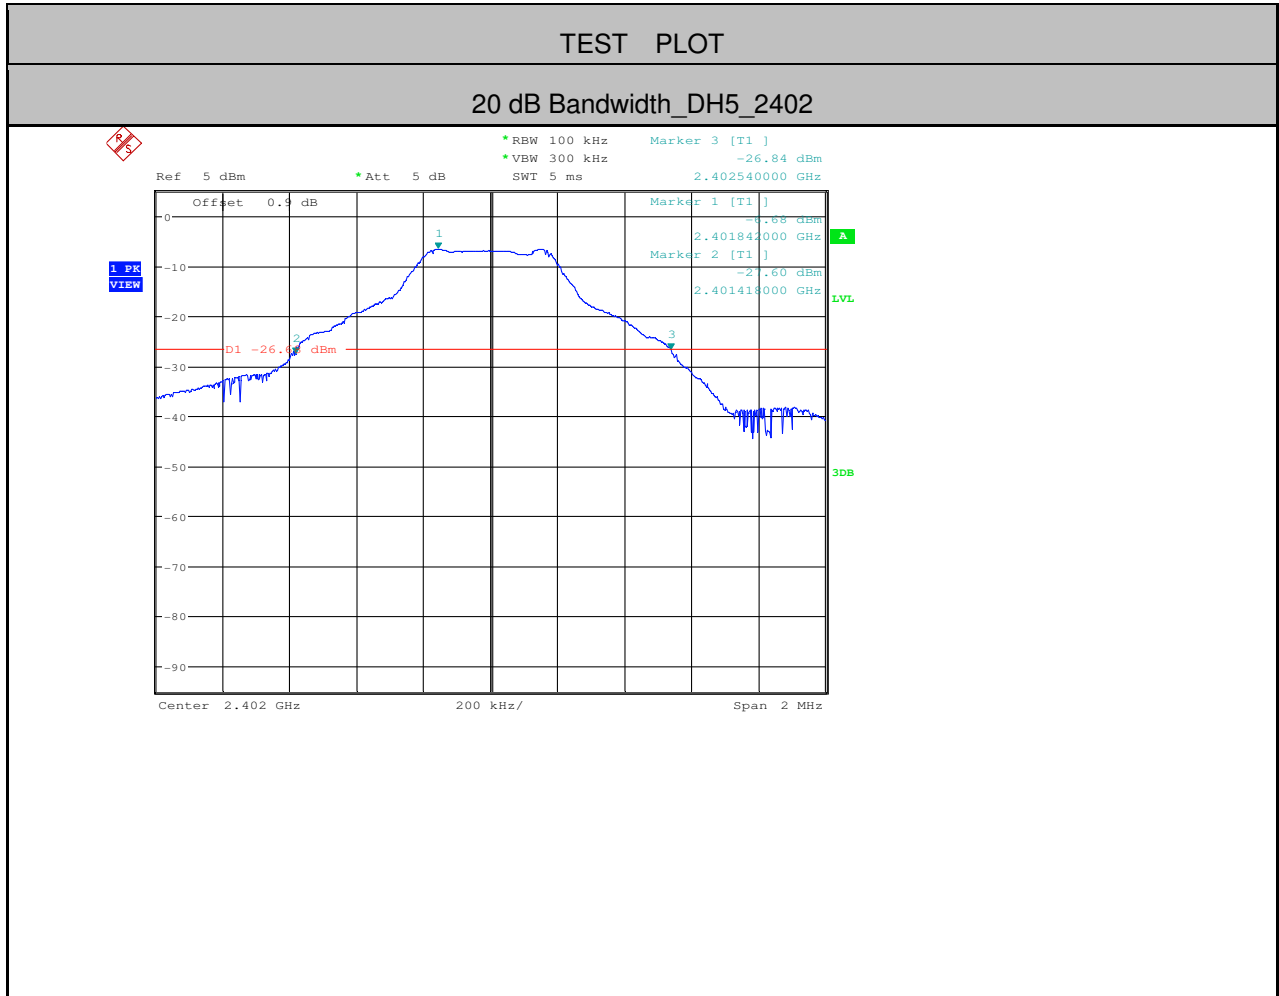


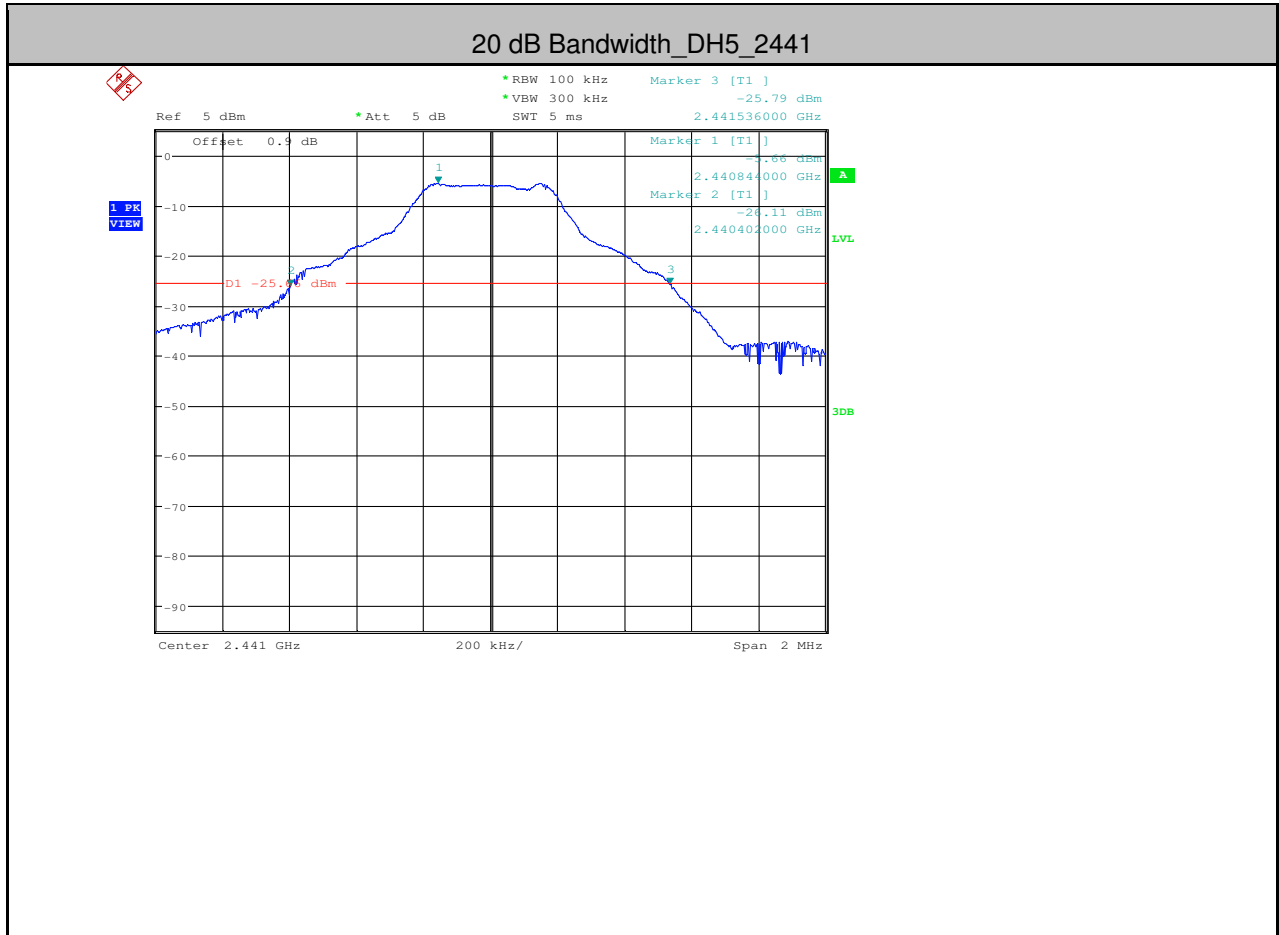

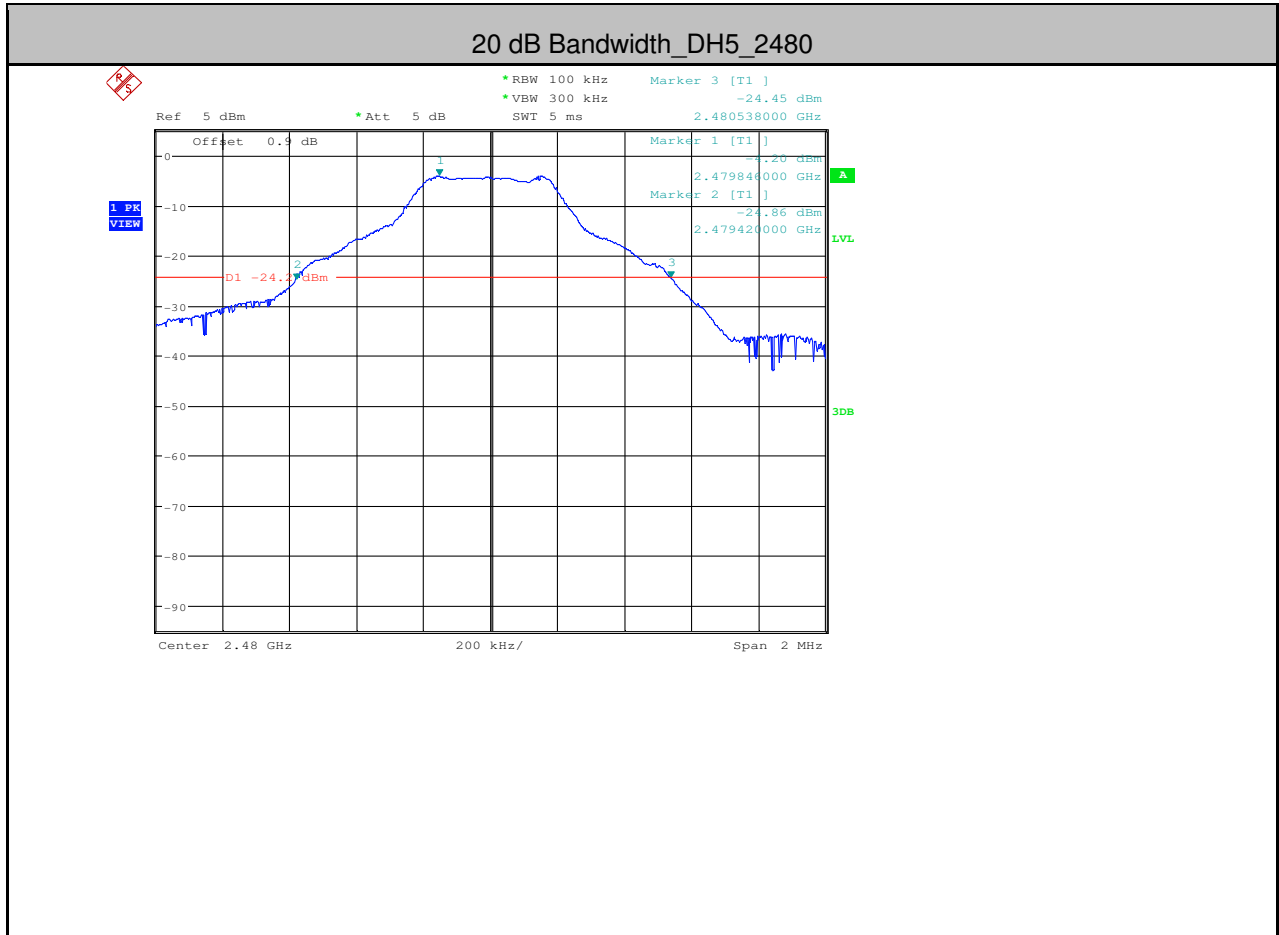

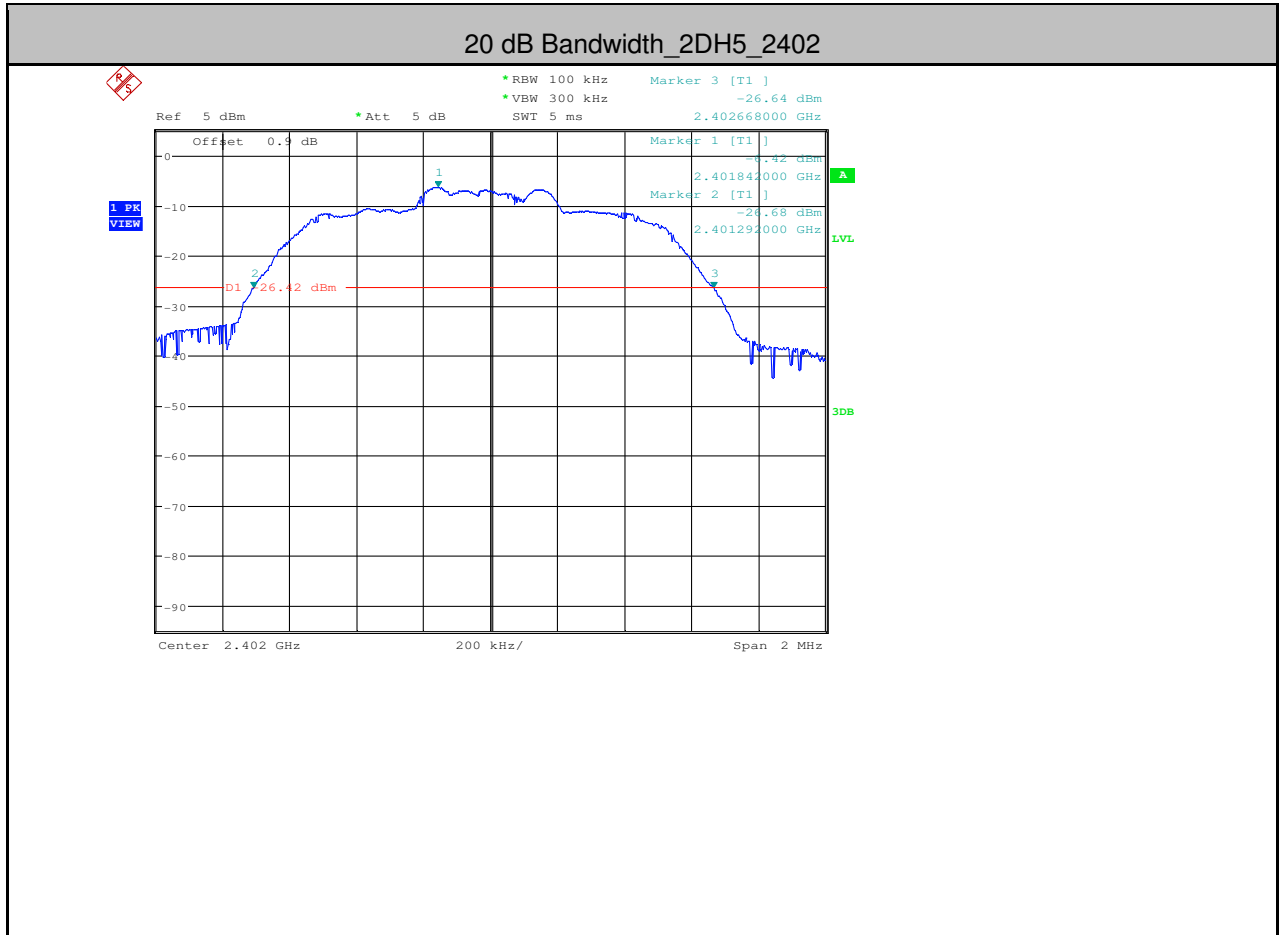

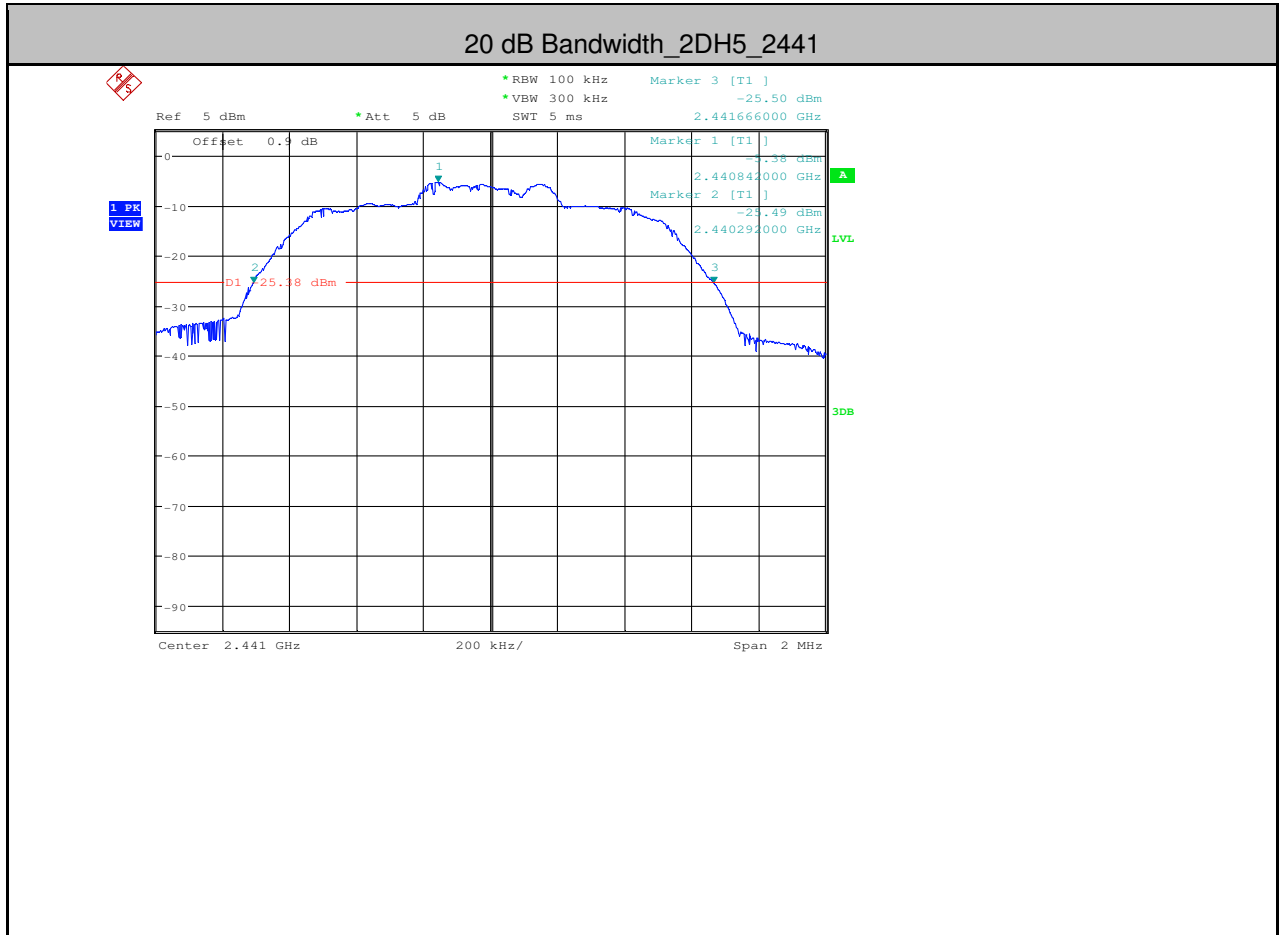


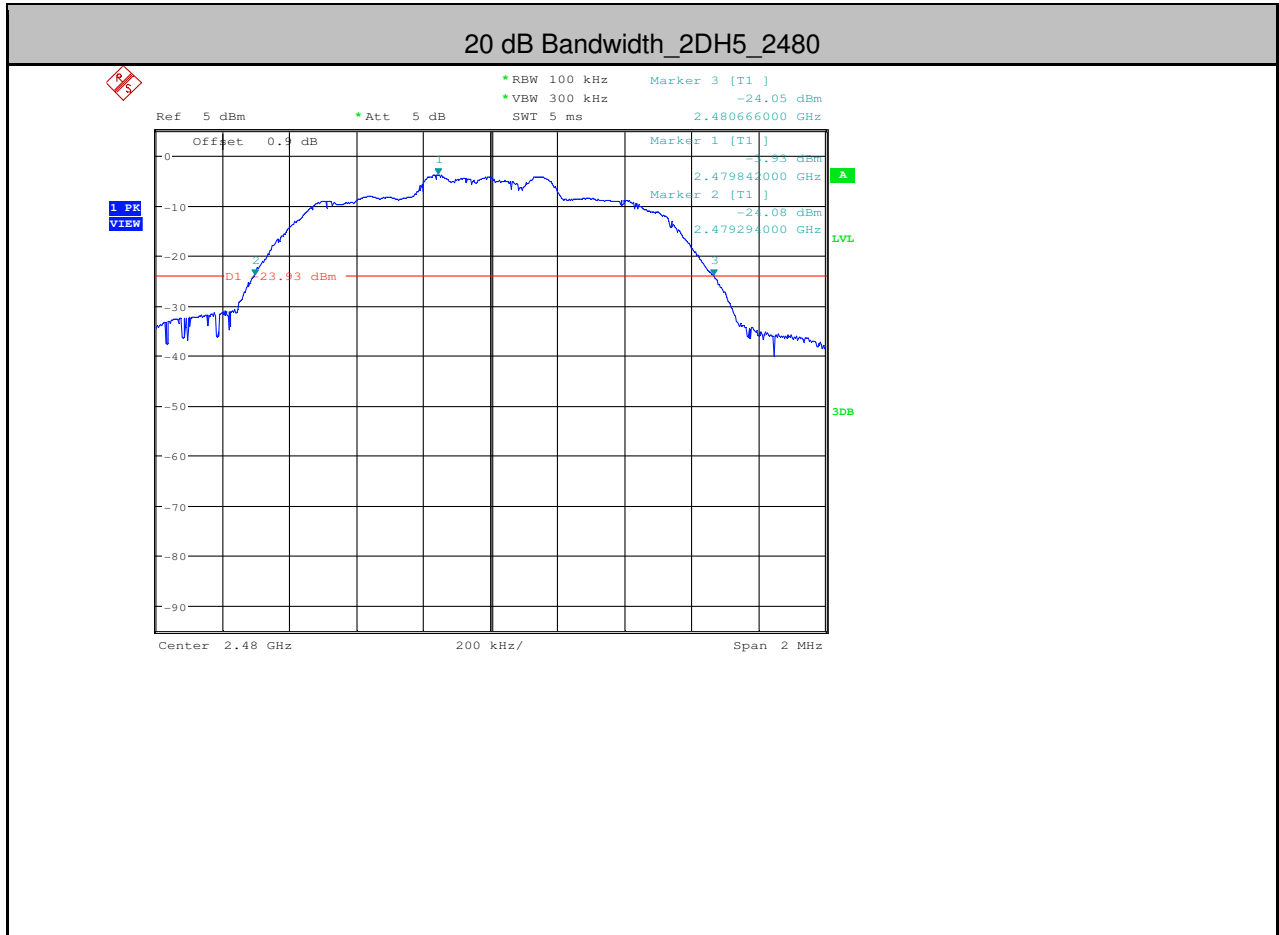






2.Occupied Bandwidth


Test Mode	Test Channel	OBW[MHz]	EBW[MHz]	Verdict
DH5	2402	0.964	---	PASS
DH5	2441	0.976	---	PASS
DH5	2480	0.962	---	PASS
2DH5	2402	1.208	---	PASS
2DH5	2441	1.208	---	PASS
2DH5	2480	1.206	---	PASS

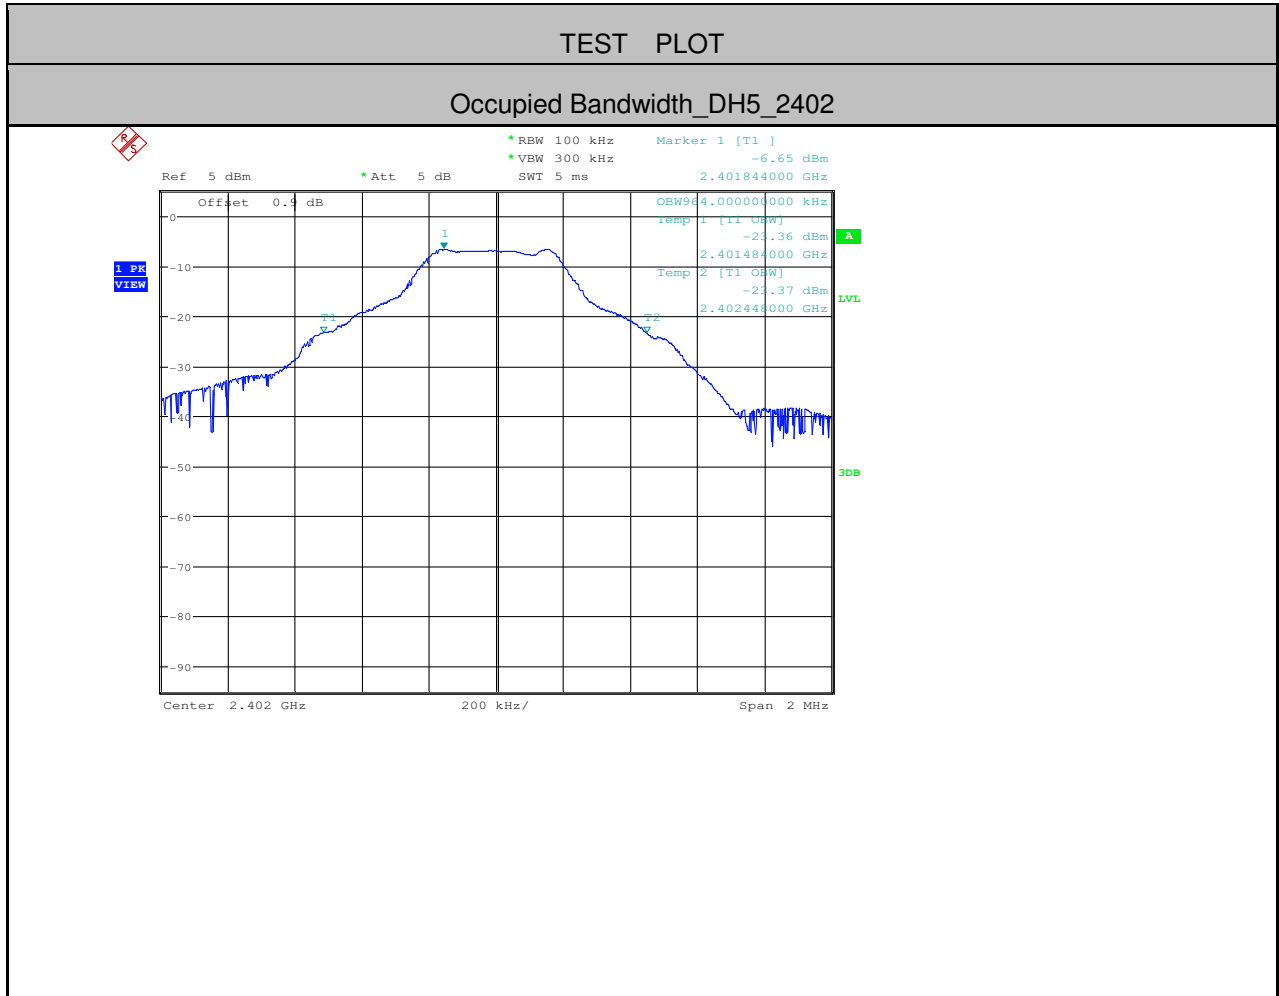


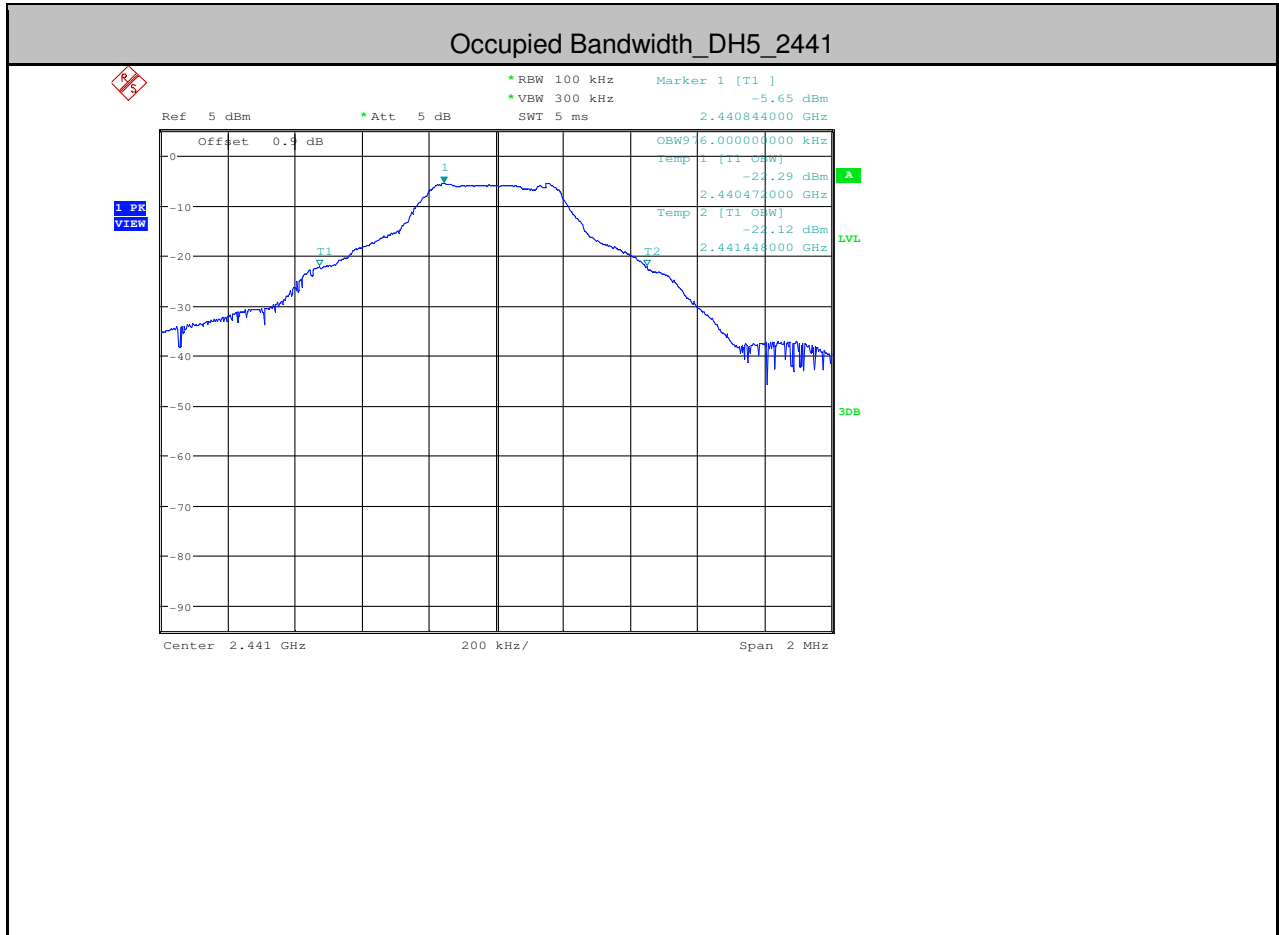

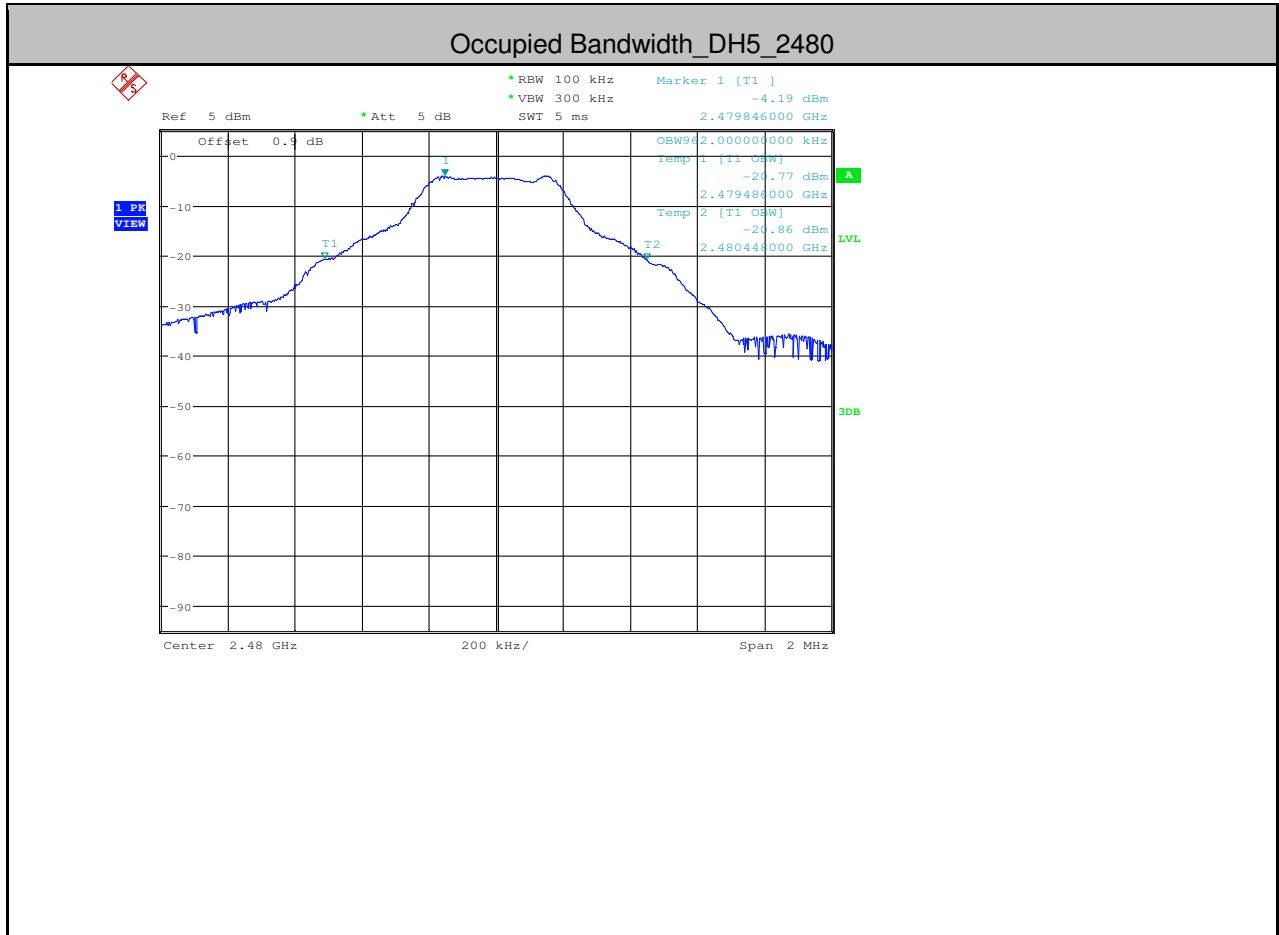

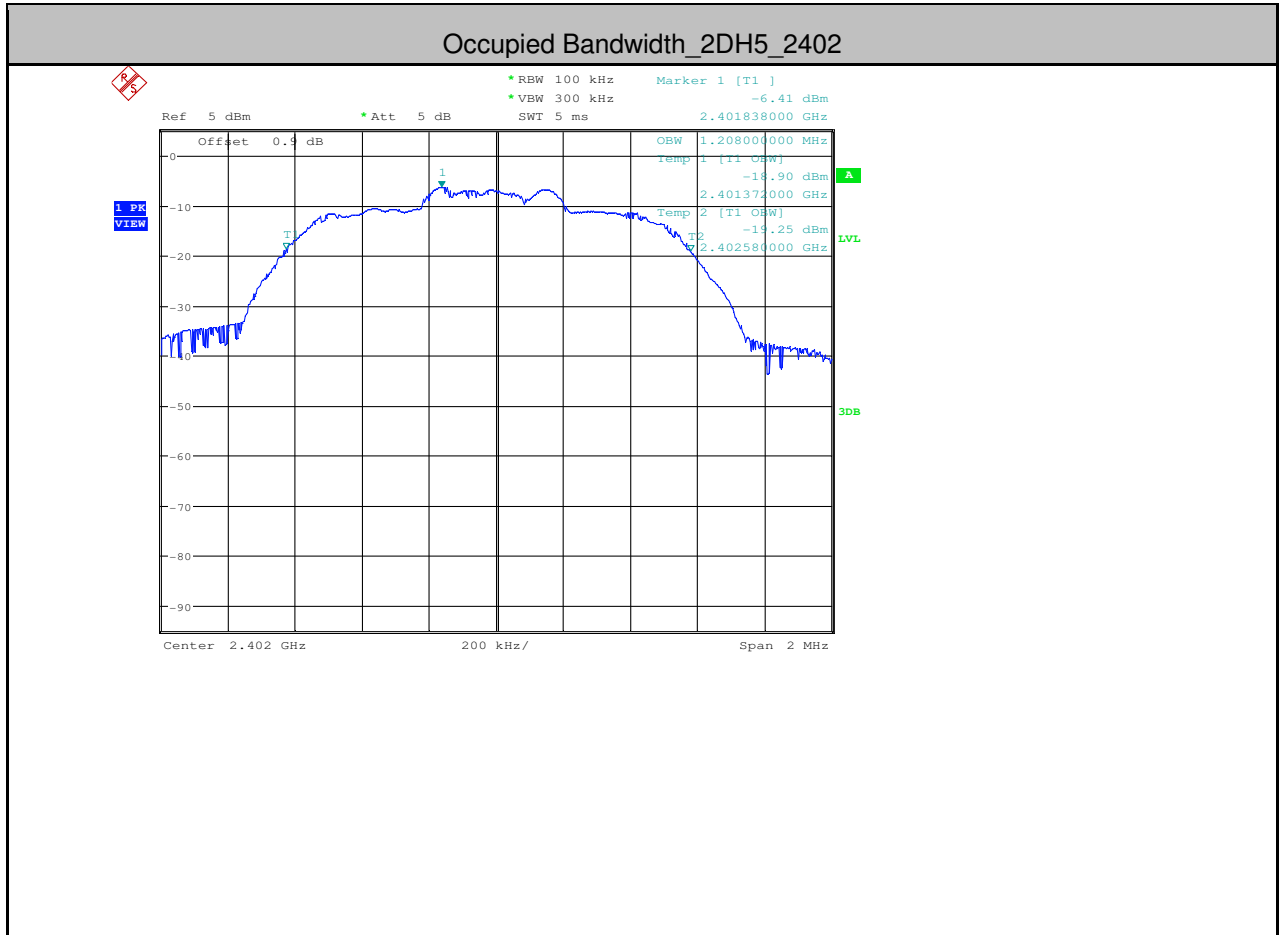

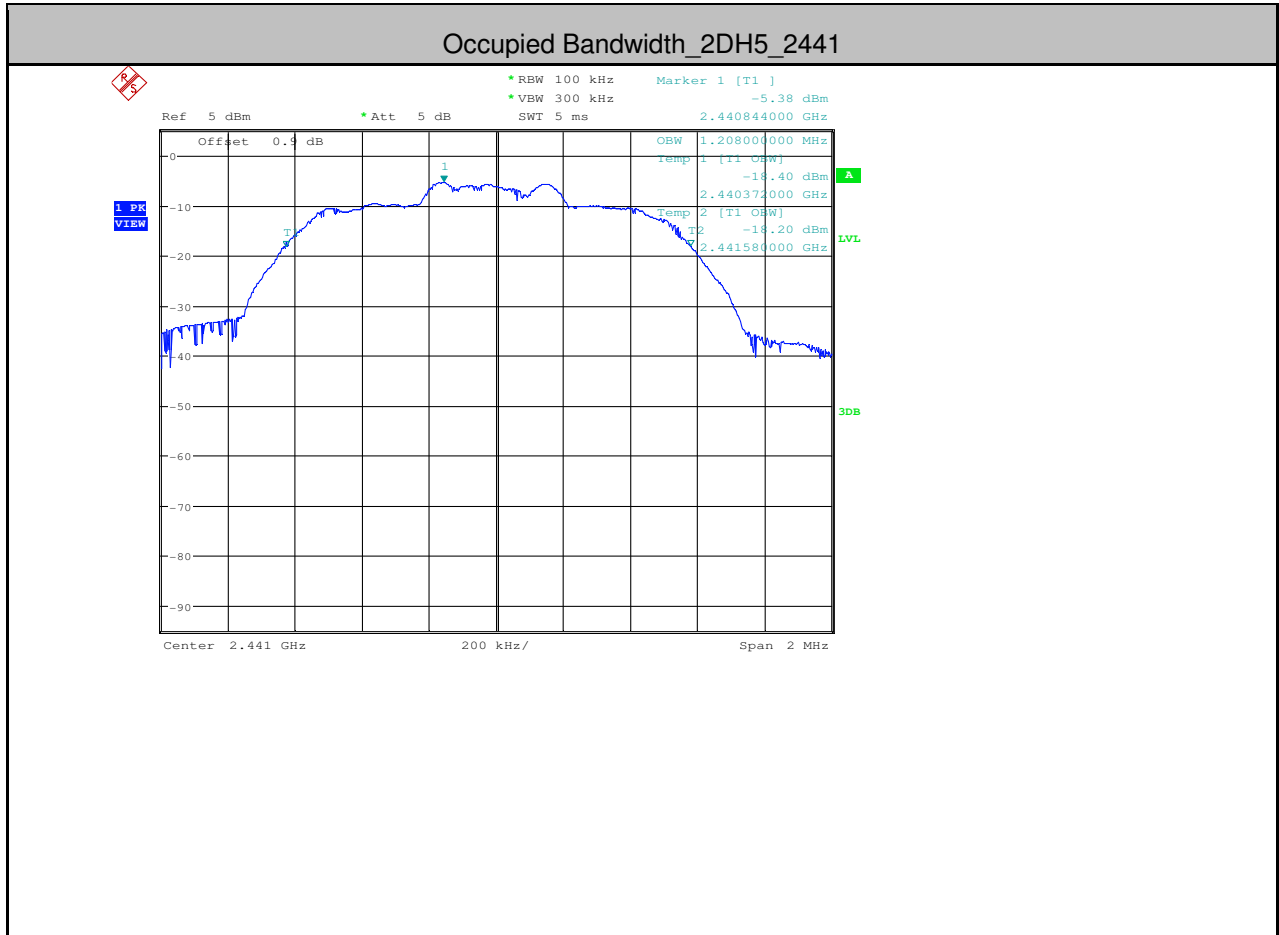


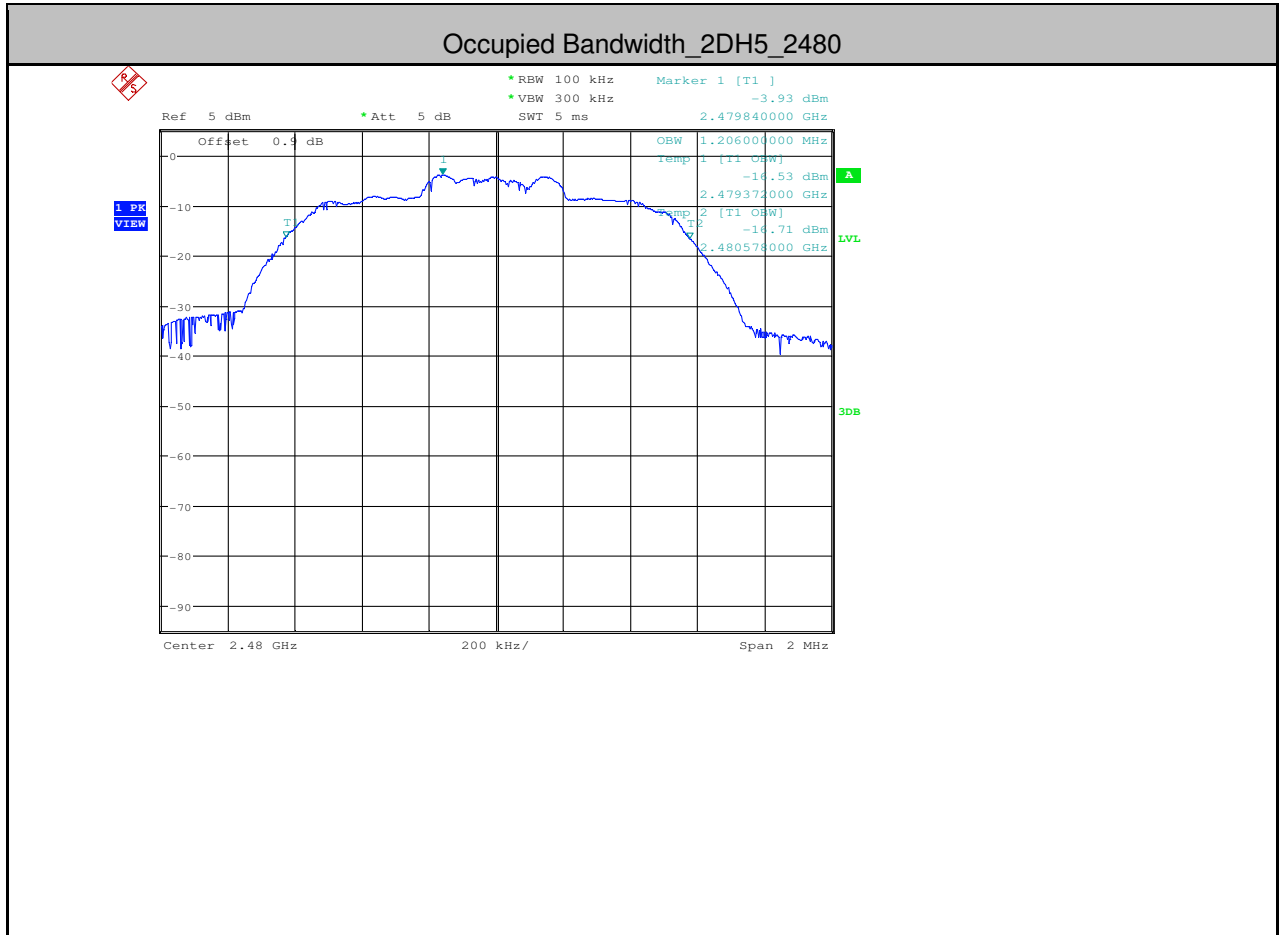






3. Conducted Peak Output Power


Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
DH5	2402	-5.22	<20.97dBm(125mW)	PASS
DH5	2441	-4.22	<20.97dBm(125mW)	PASS
DH5	2480	-2.75	<20.97dBm(125mW)	PASS
2DH5	2402	-4.95	<20.97dBm(125mW)	PASS
2DH5	2441	-3.93	<20.97dBm(125mW)	PASS
2DH5	2480	-2.46	<20.97dBm(125mW)	PASS

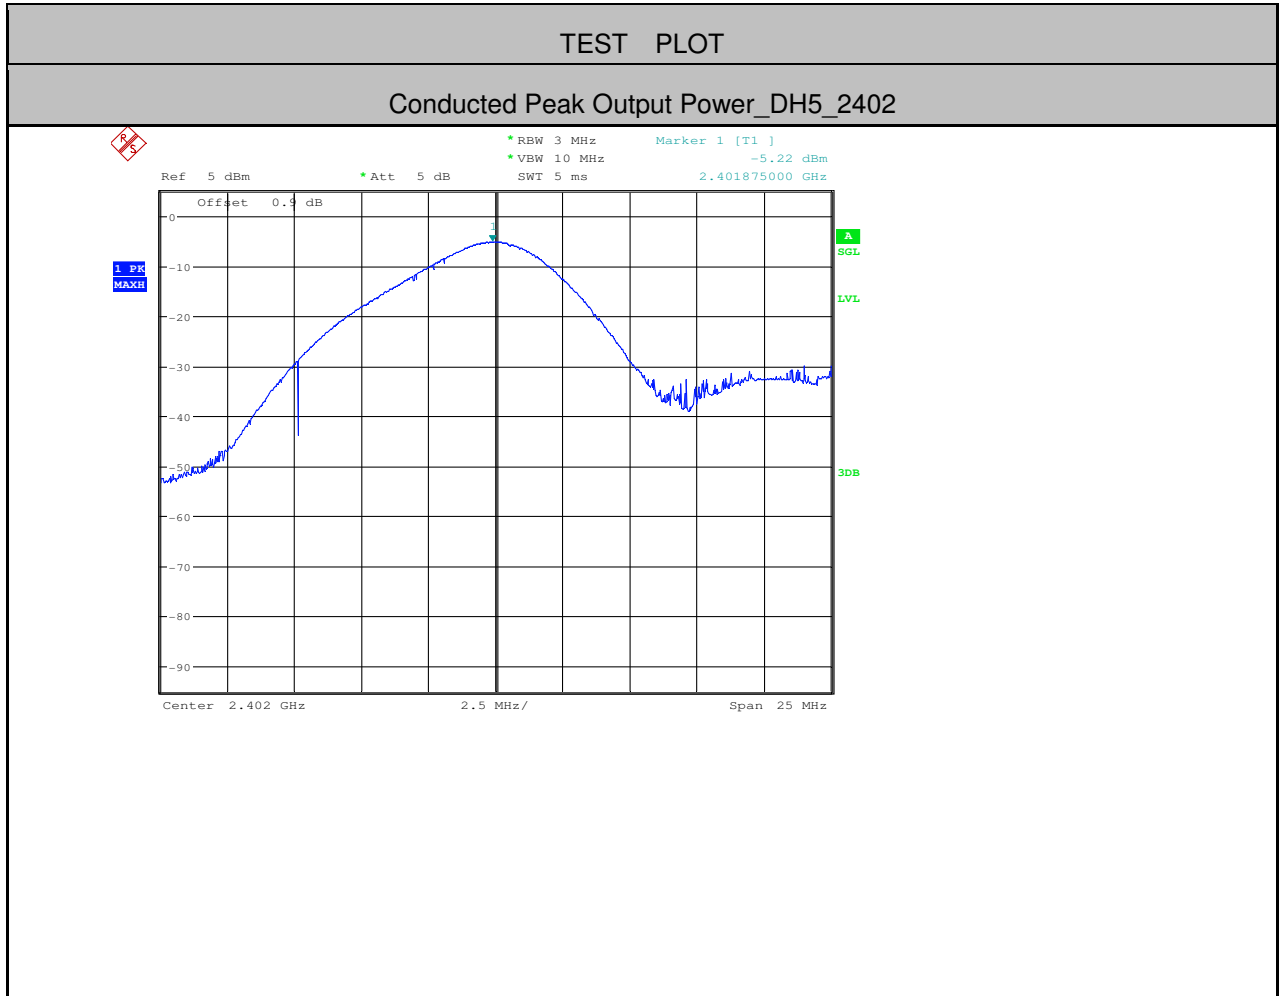


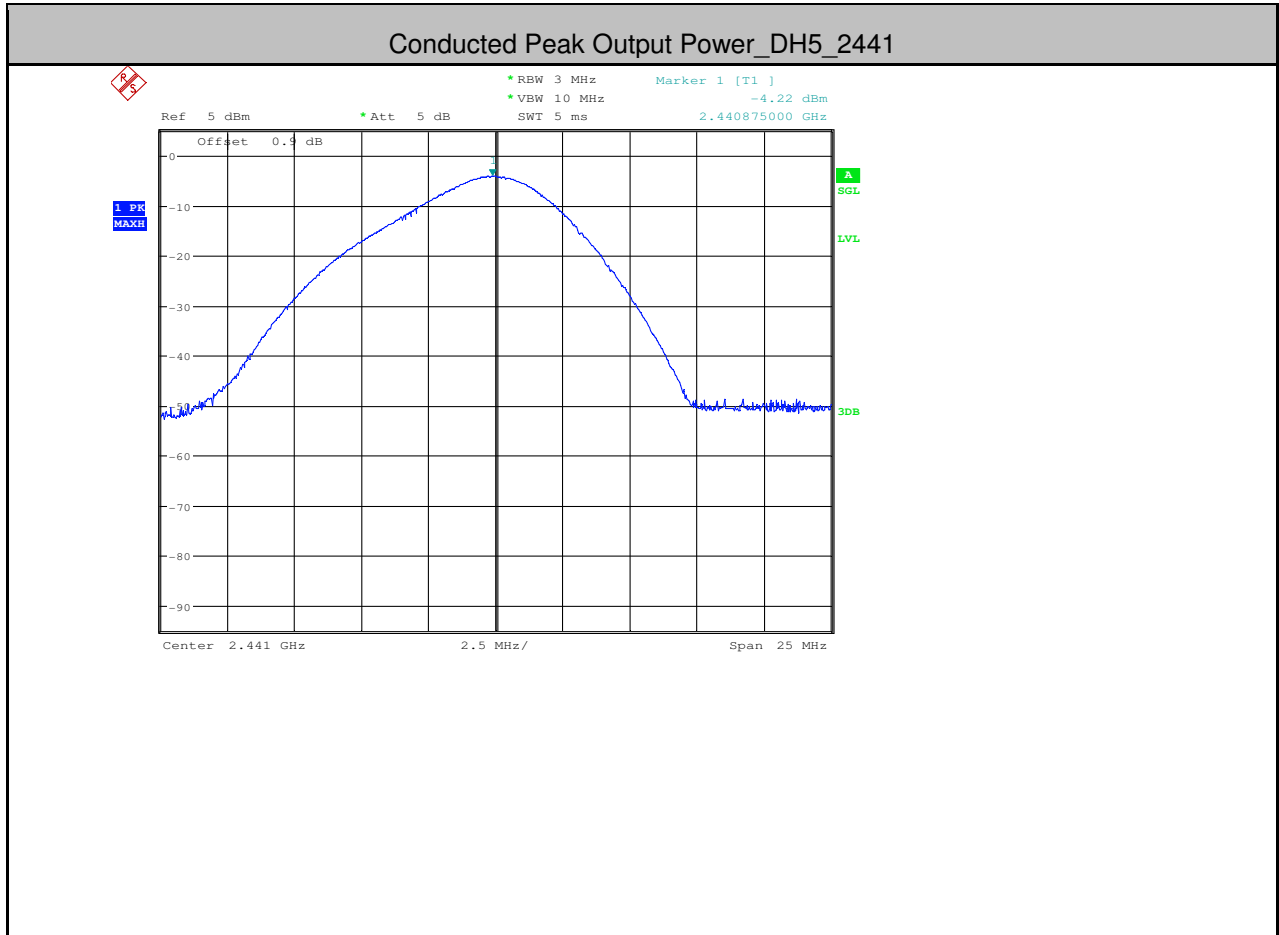

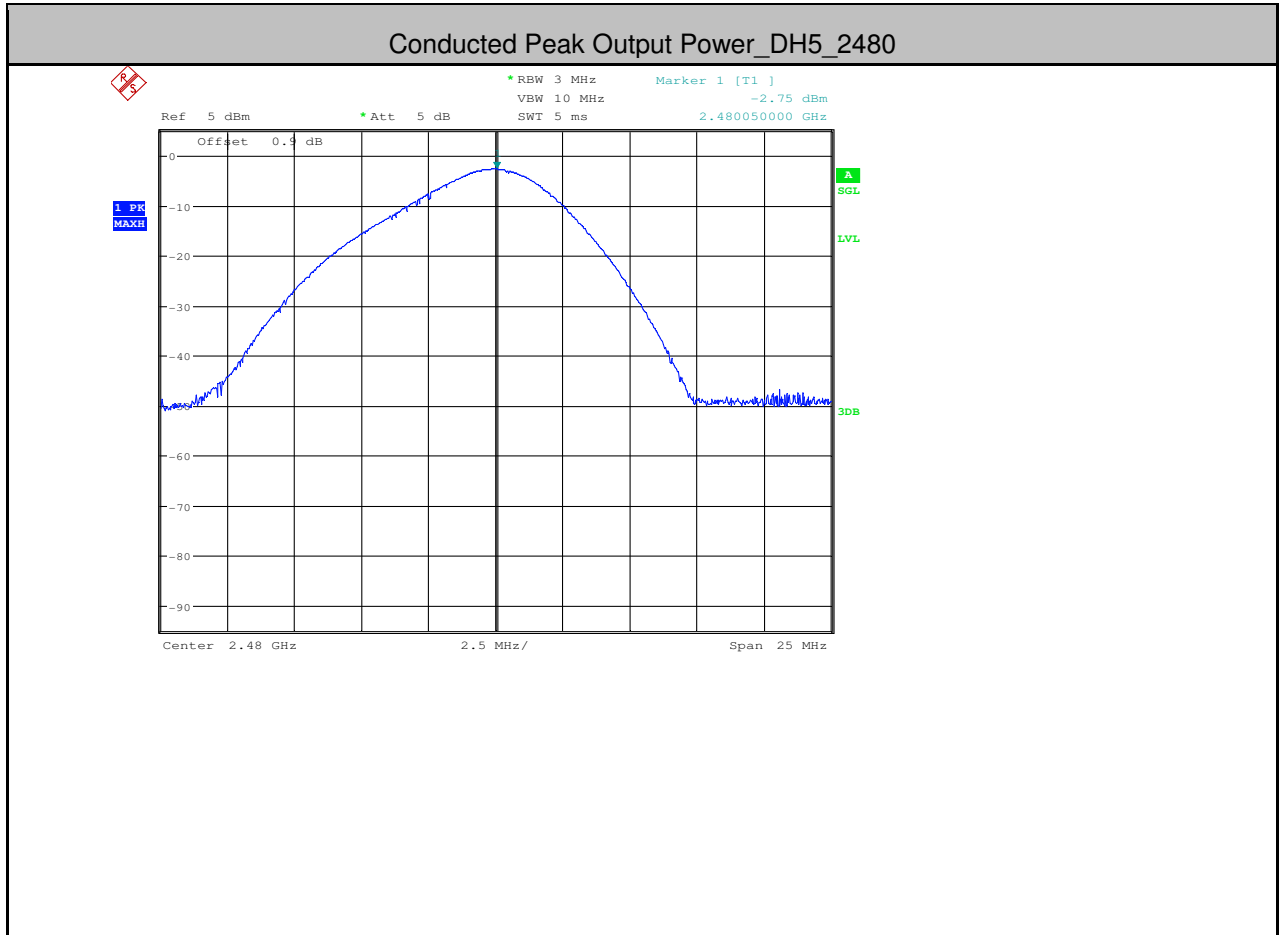

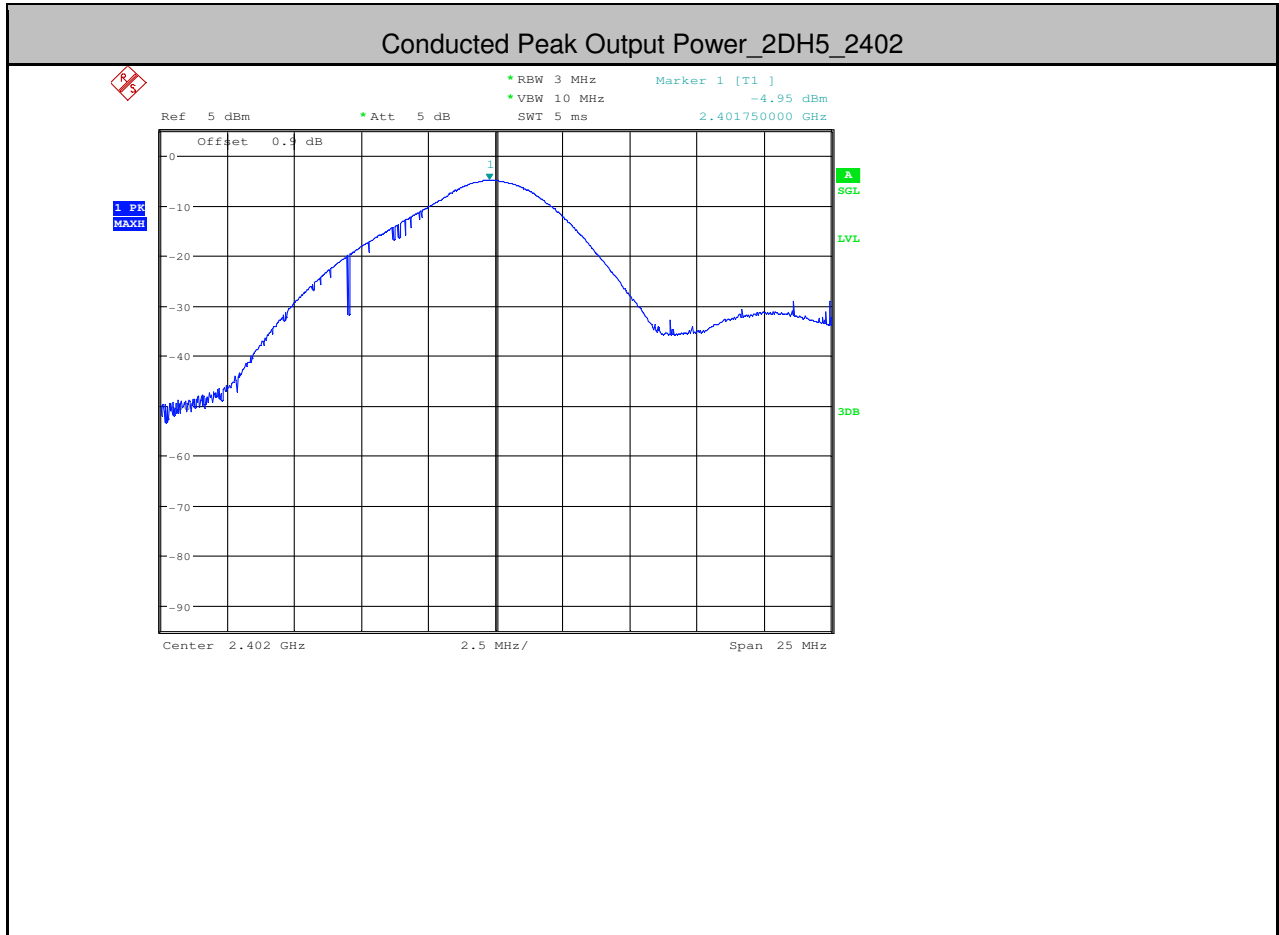

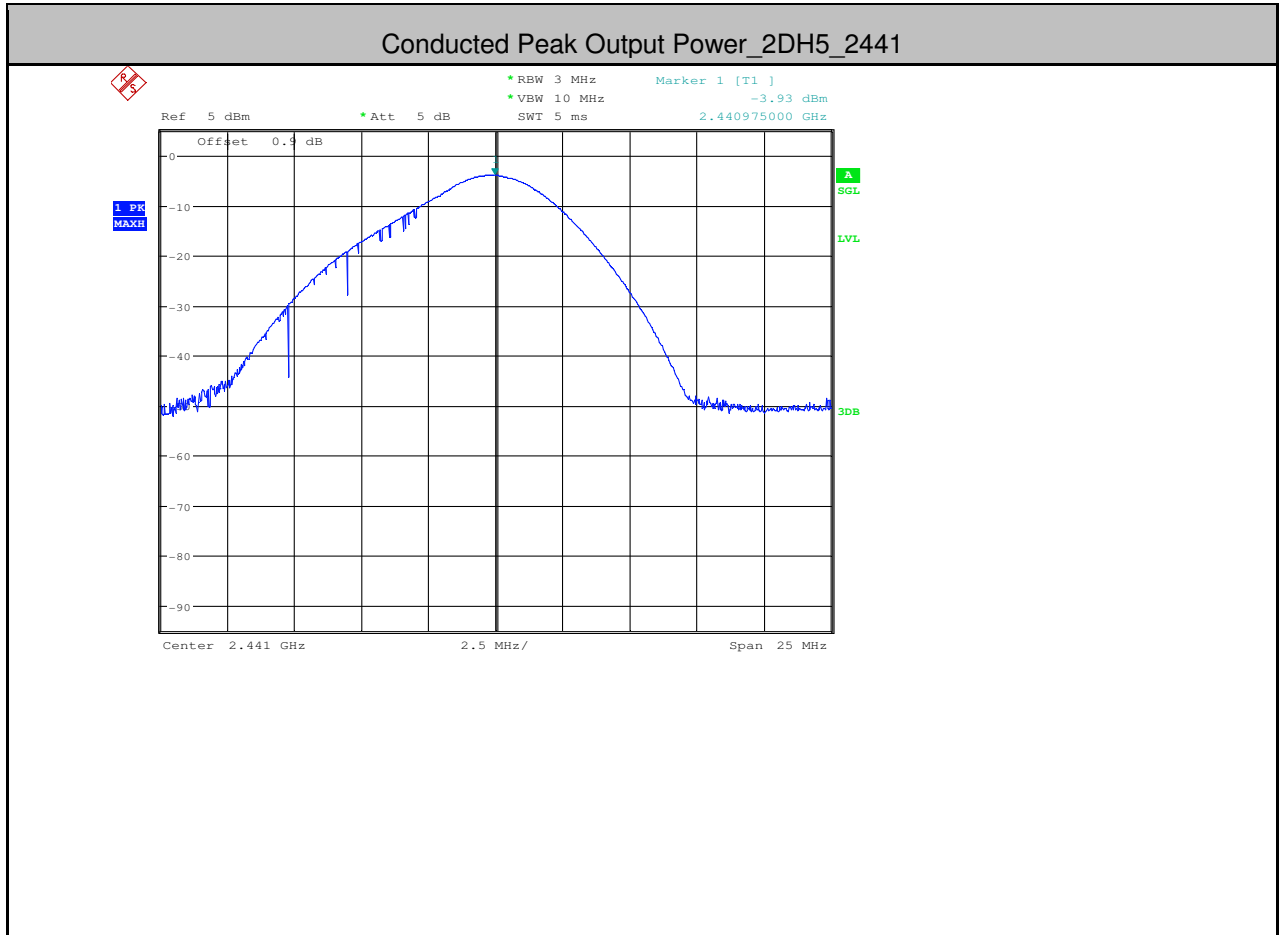


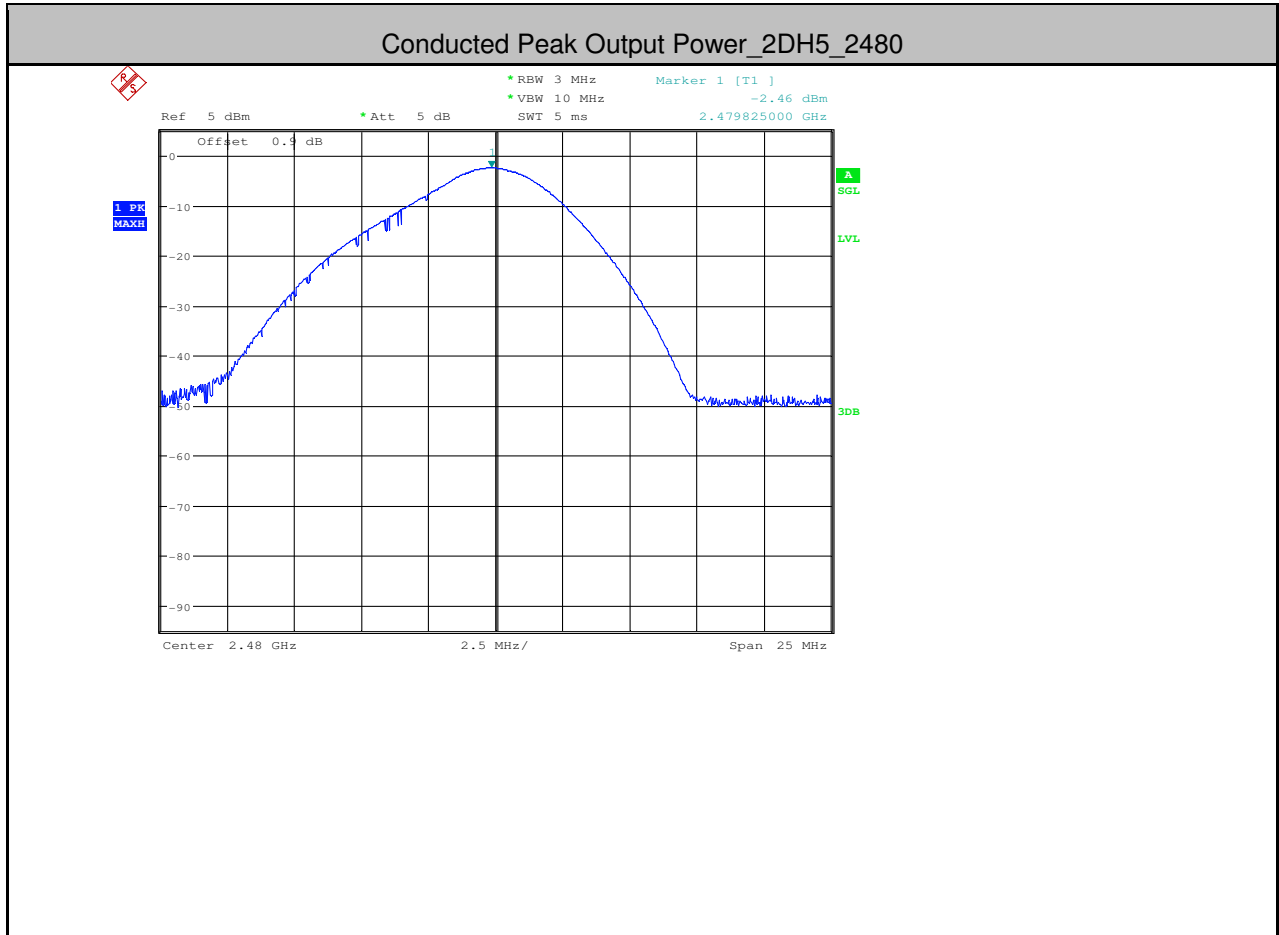




4. Carrier Frequency Separation

Test Mode	Test Channel	Result[MHz]	Limit (kHz)	Verdict
DH5	2441	1.005	756	PASS
2DH5	2441	0.996	917.3	PASS

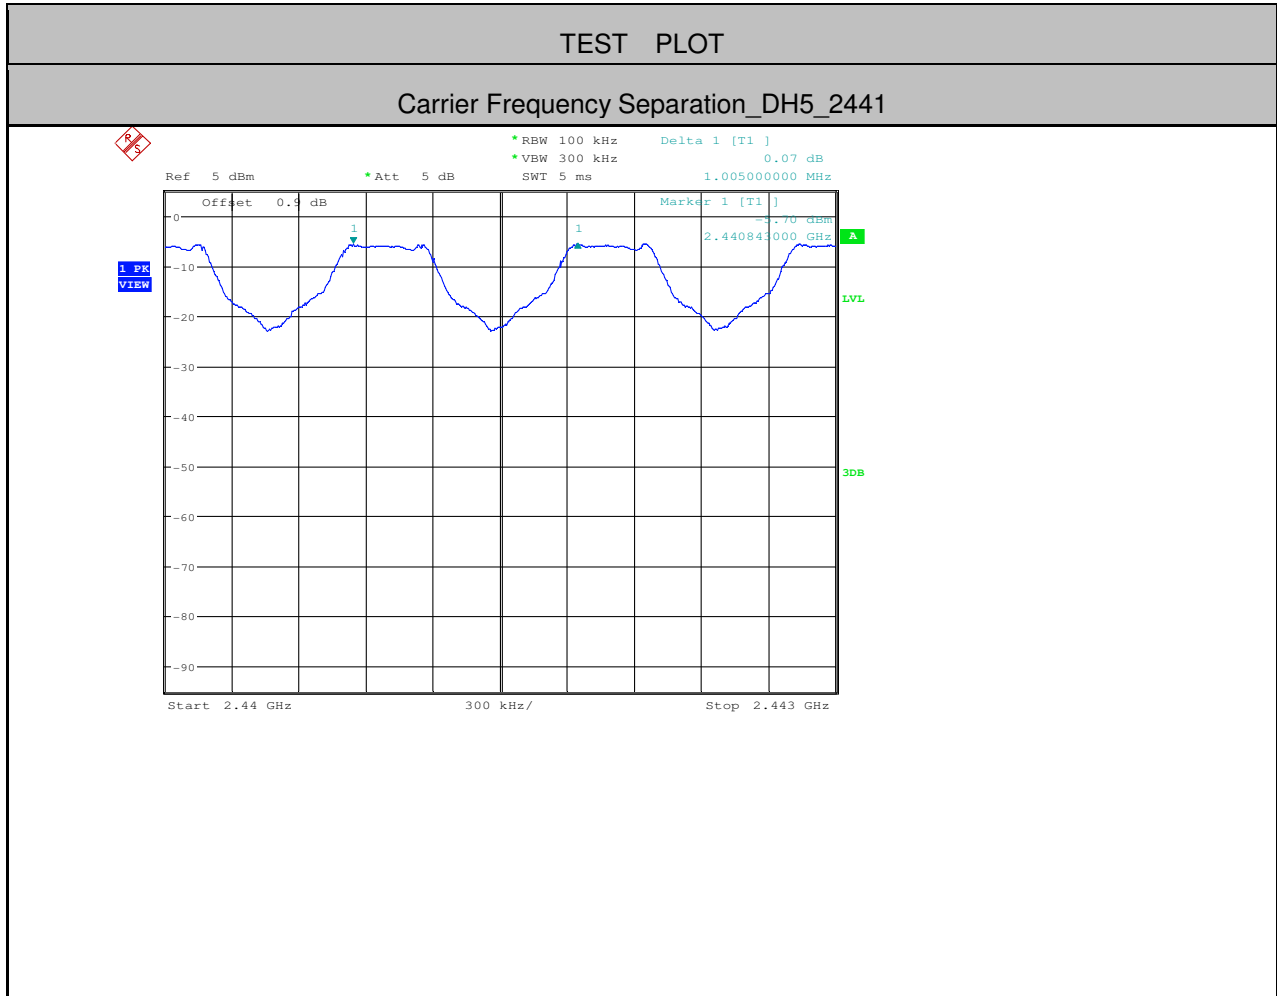

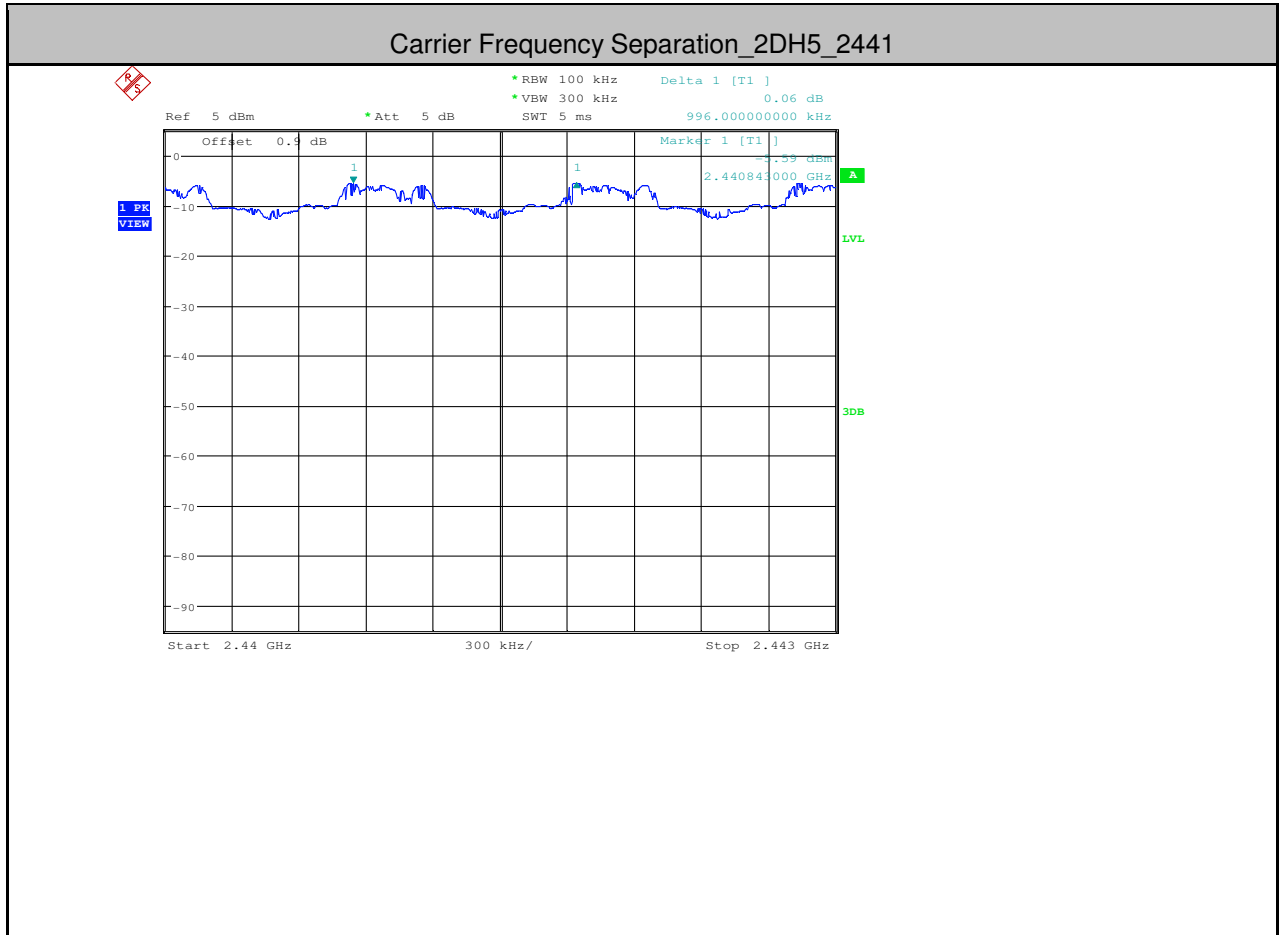





5.Dwell Time



Test Mode	Test Channel	Burst Width[ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Limit[s]	Verdict
DH1	2402	0.36	320	0.115	<0.4	PASS
DH3	2402	0.36	320	0.115	<0.4	PASS
DH5	2402	2.86	100	0.286	<0.4	PASS
2DH1	2402	0.37	320	0.118	<0.4	PASS
2DH3	2402	1.63	170	0.277	<0.4	PASS
2DH5	2402	2.87	120	0.344	<0.4	PASS

TEST PLOT

Dwell Time_DH1_2402

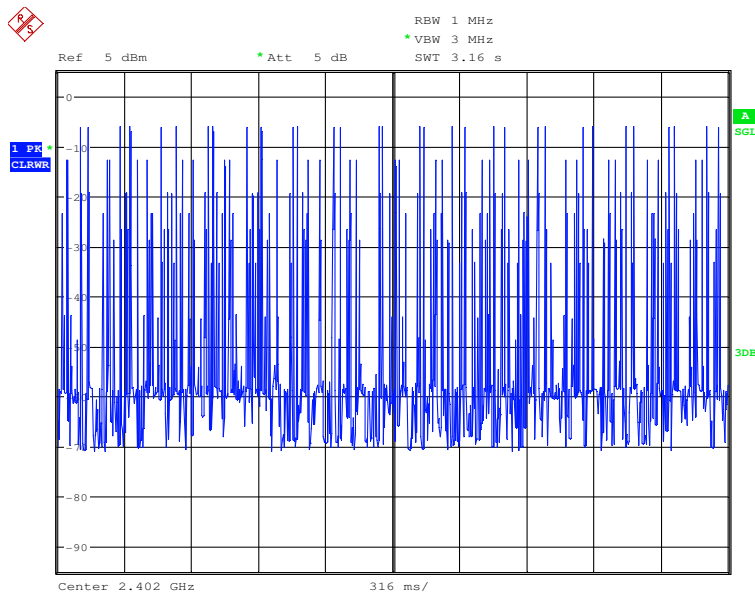
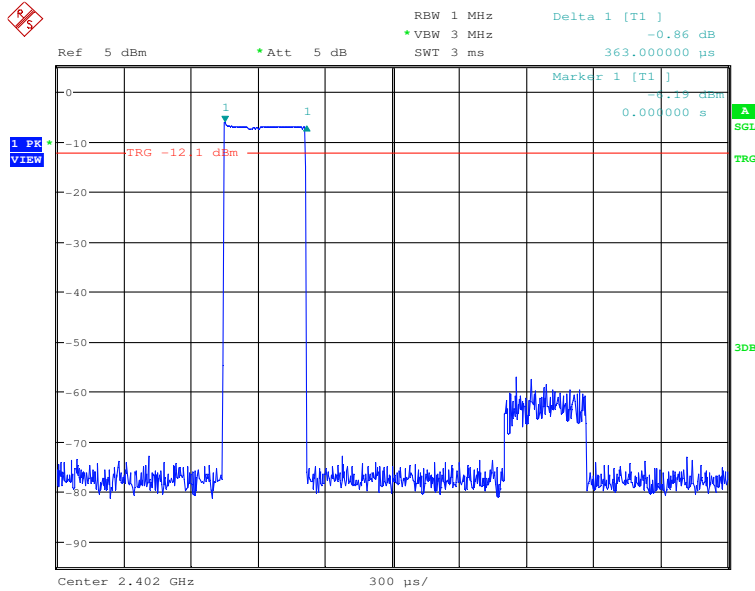


Dwell Time_DH3_2402

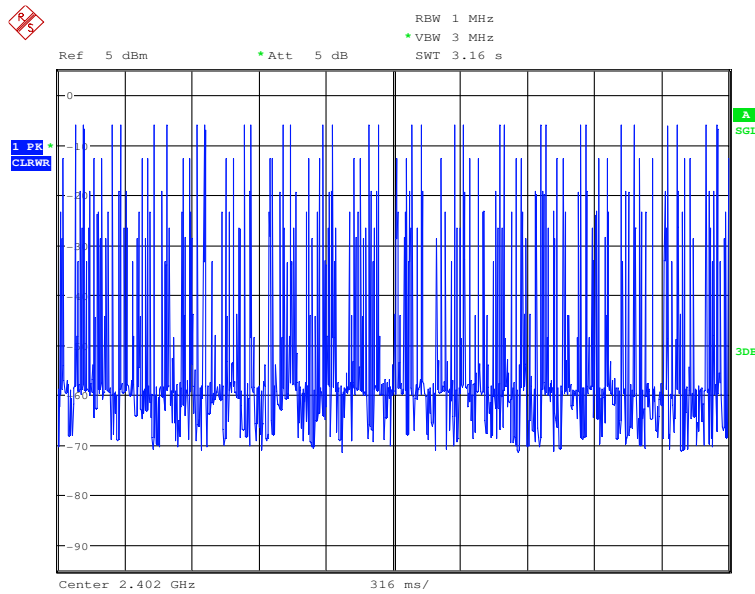
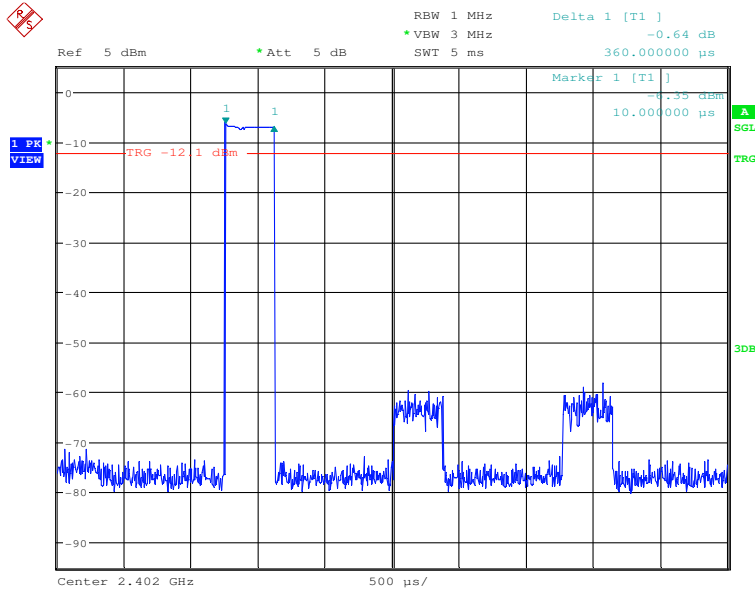






Dwell Time_DH5_2402

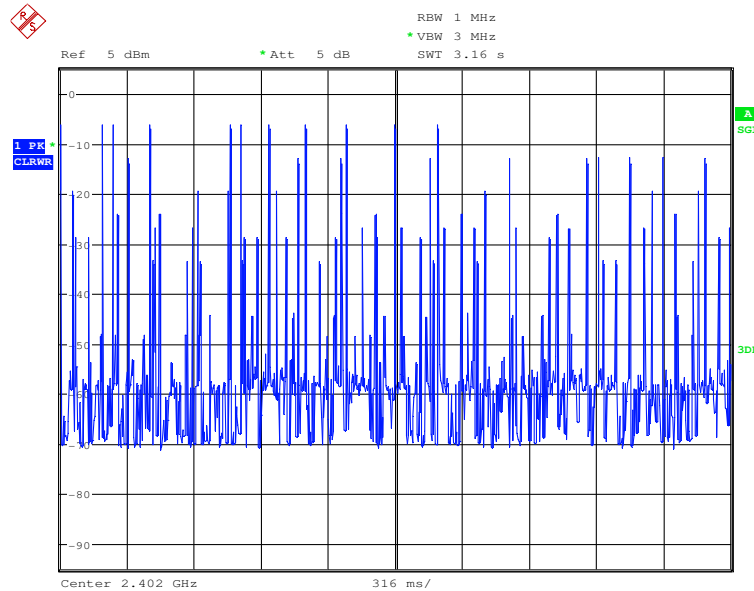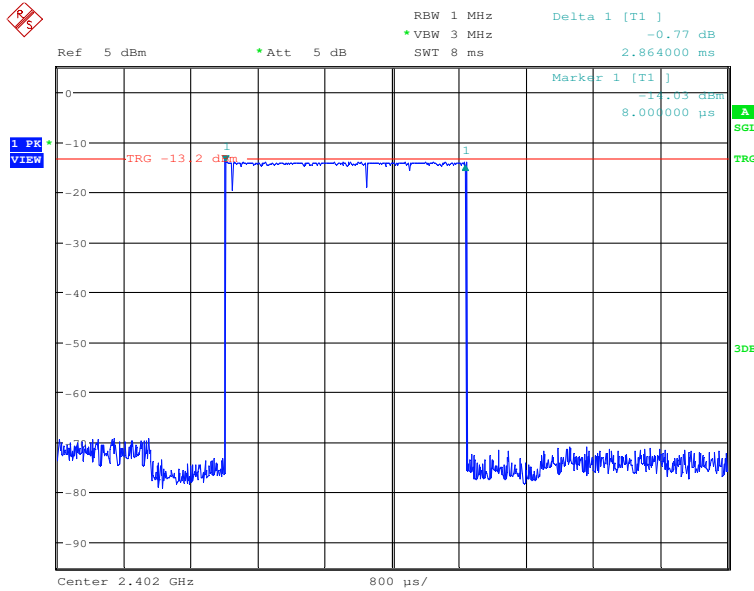

Dwell Time_2DH1_2402

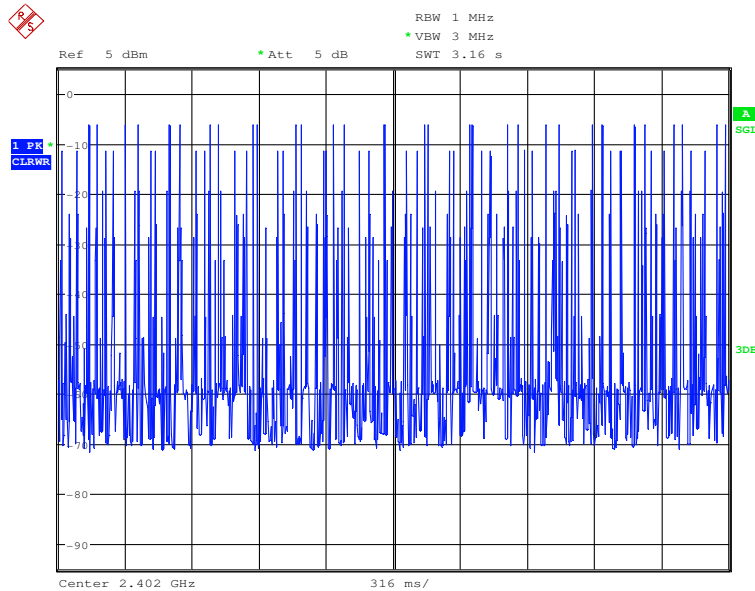
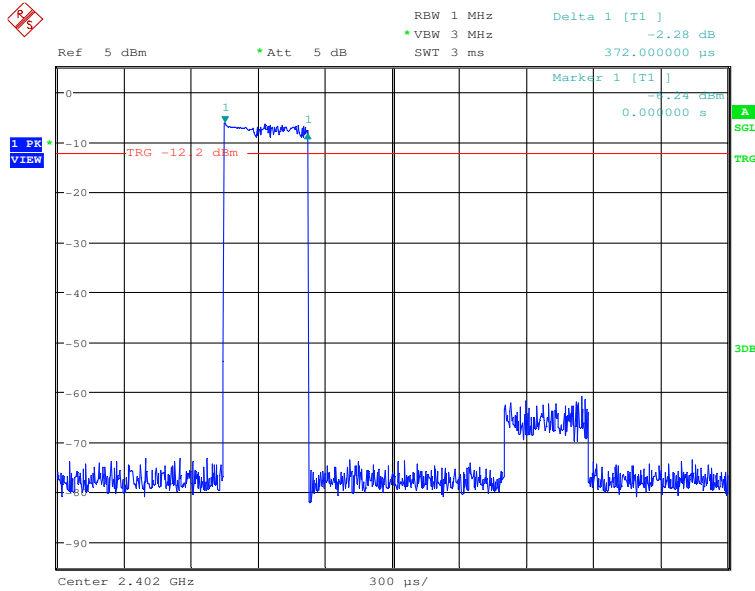


Dwell Time_2DH3_2402

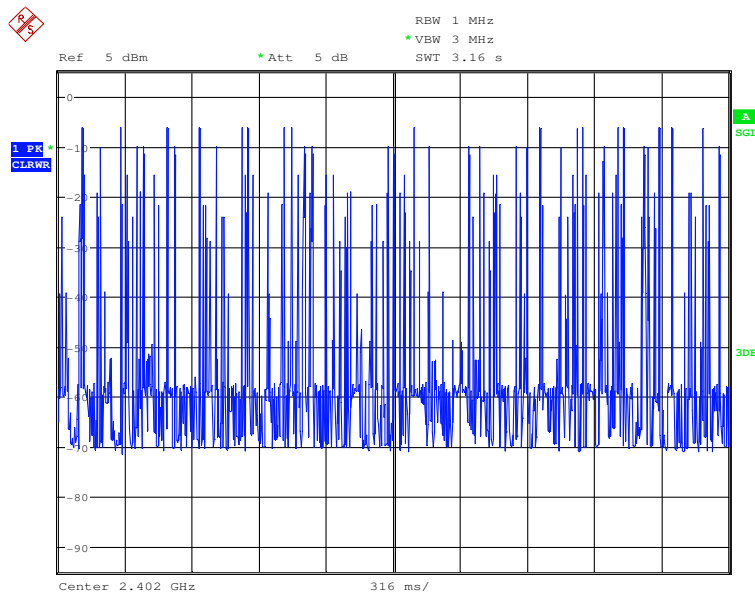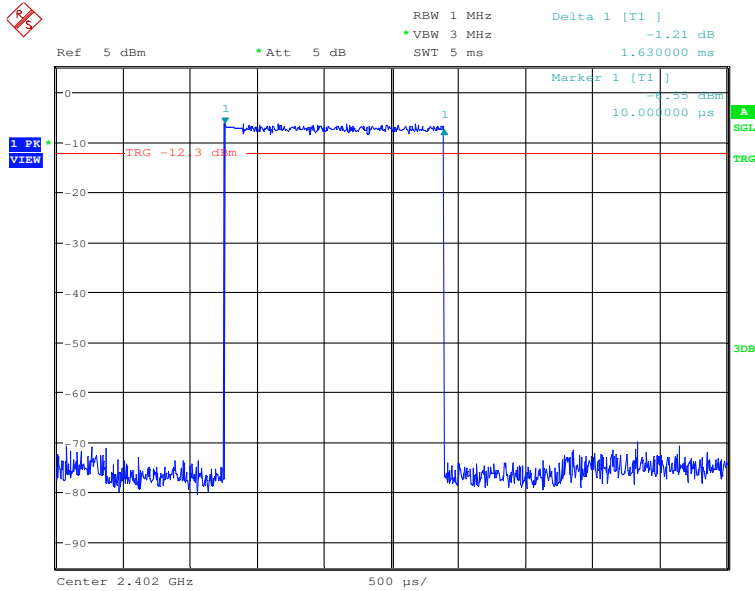




Dwell Time_2DH5_2402

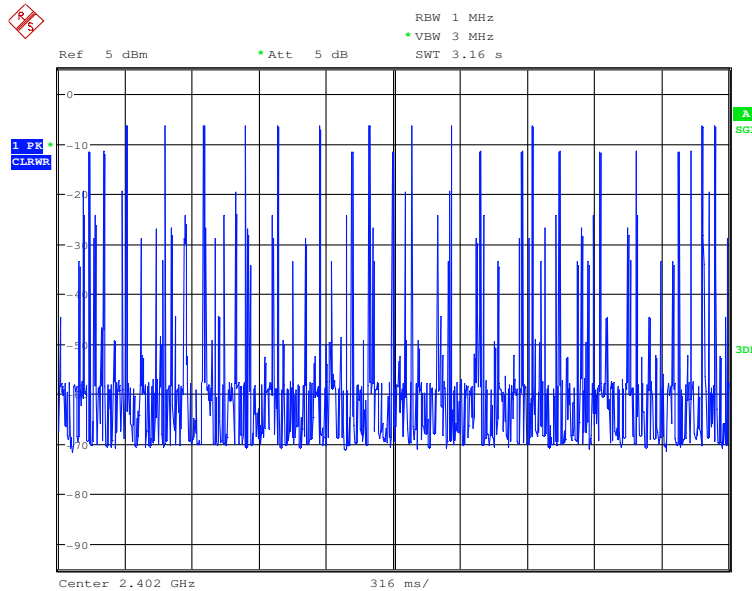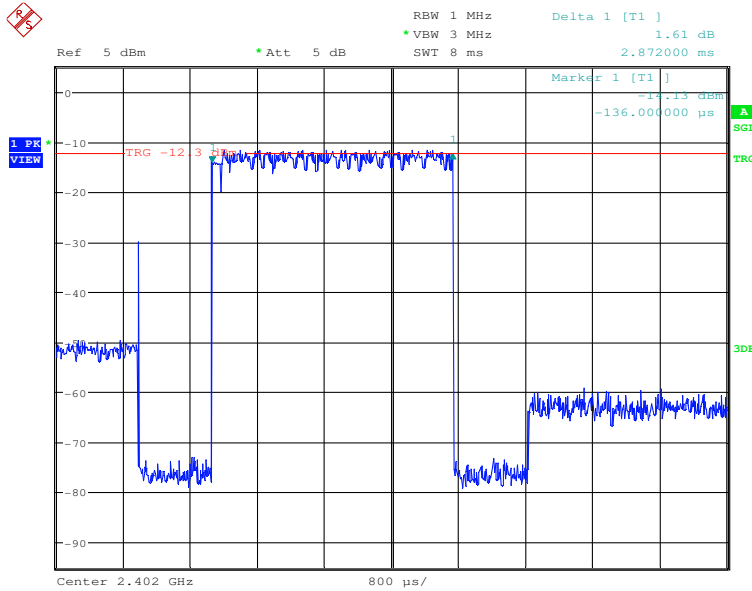




6.Hopping Channel Number

Test Mode	Test Channel	Number of Hopping Channel[N]	Limit[N]	Verdict
DH5	2402	79	>=15	PASS
2DH5	2402	79	>=15	PASS

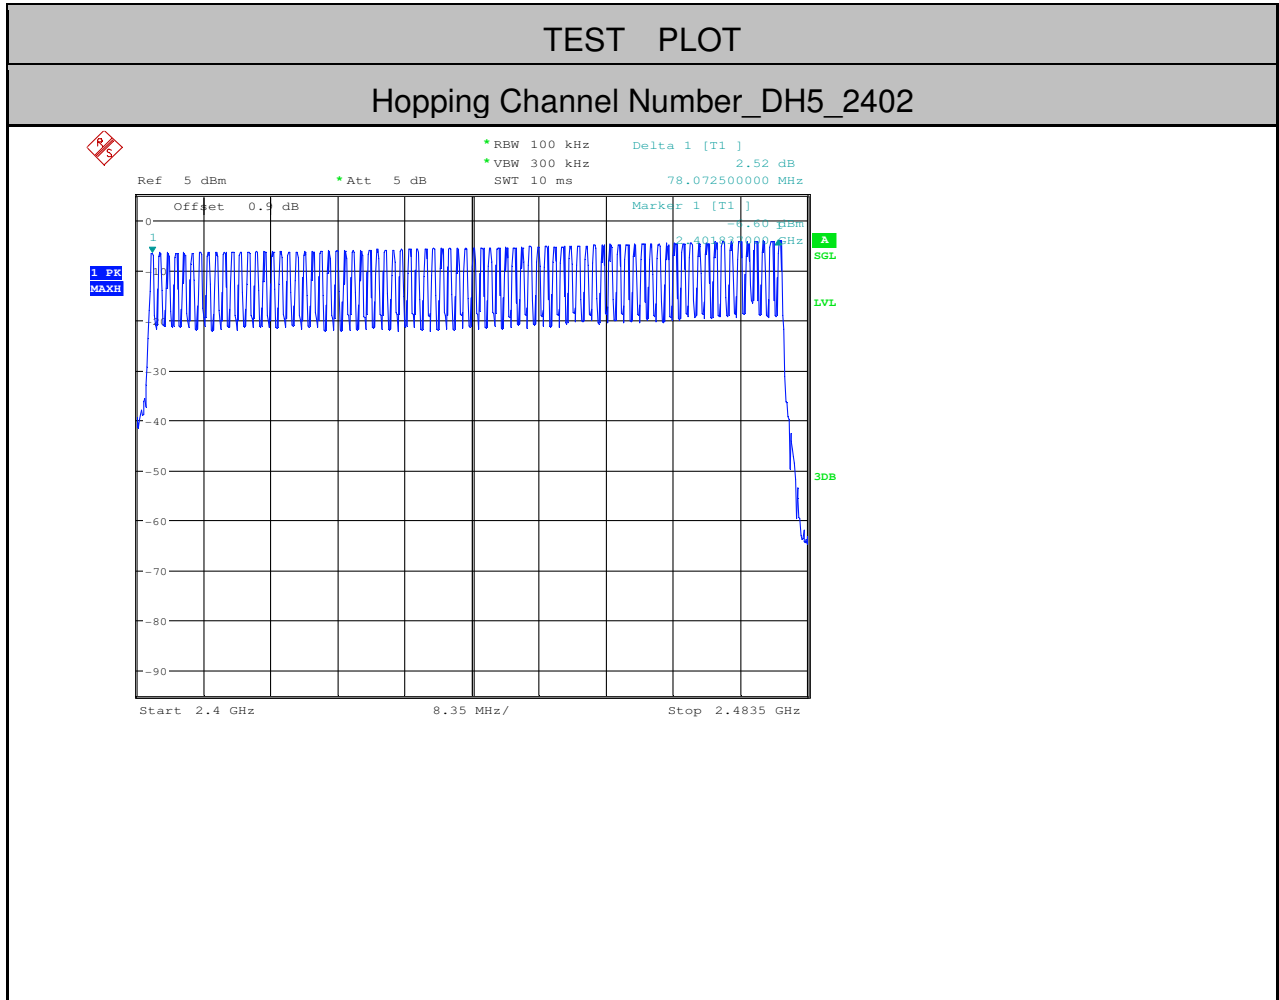


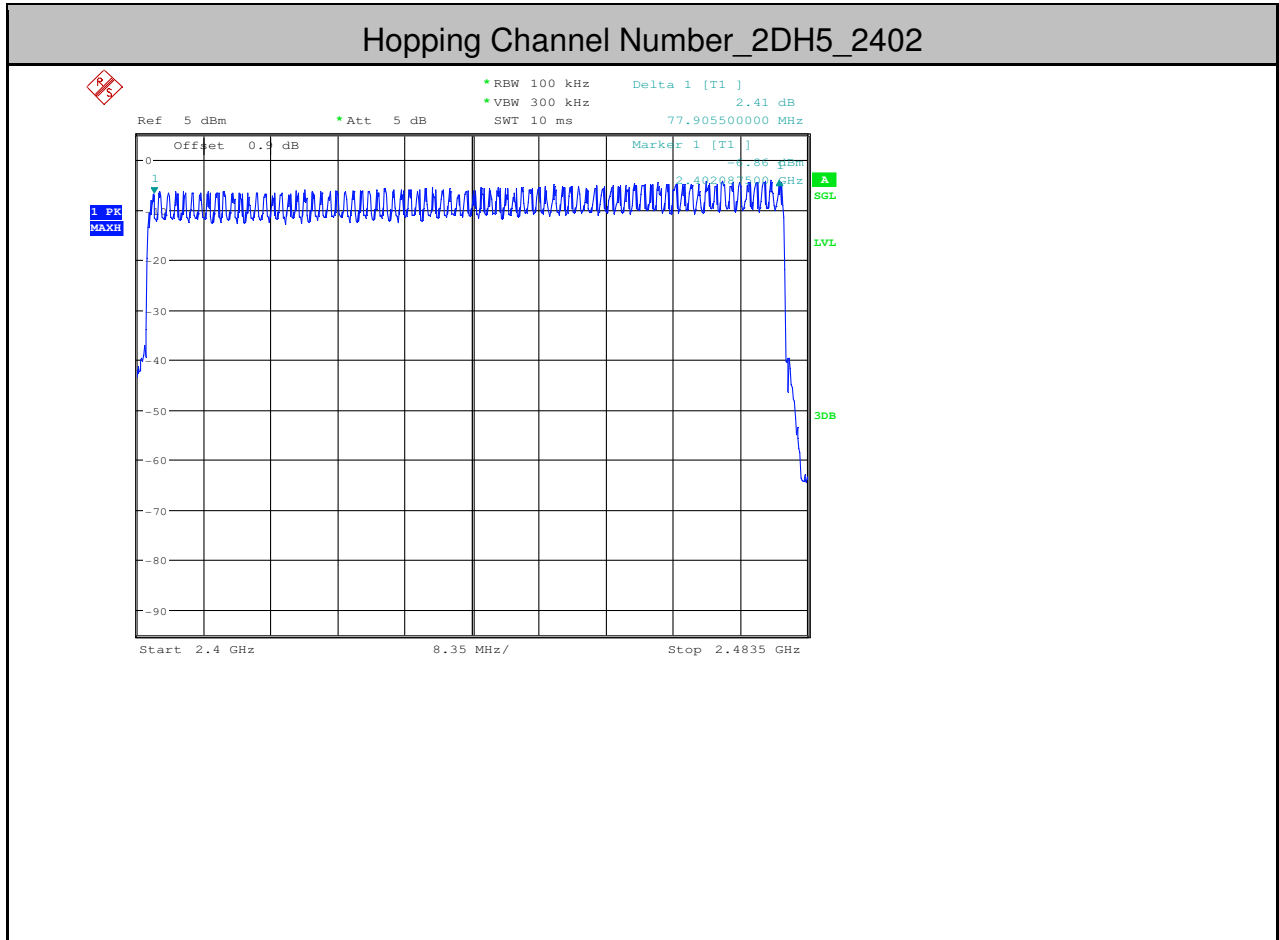






7. Band-edge for RF Conducted Emissions


Test Mode	Test Channel	Hopping	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit[dBm]	Verdict
DH5	2402	Off	-6.450	-64.457	<-26.45	PASS
DH5	2480	Off	-4.320	-60.576	<-24.32	PASS
2DH5	2402	Off	-8.850	-65.823	<-28.85	PASS
2DH5	2480	Off	-4.020	-62.208	<-24.02	PASS
DH5	2402	On	-6.390	-64.661	<-26.39	PASS
DH5	2480	On	-4.310	-61.351	<-24.31	PASS
2DH5	2402	On	-6.600	-64.826	<-26.6	PASS
2DH5	2480	On	-4.210	-61.995	<-24.21	PASS

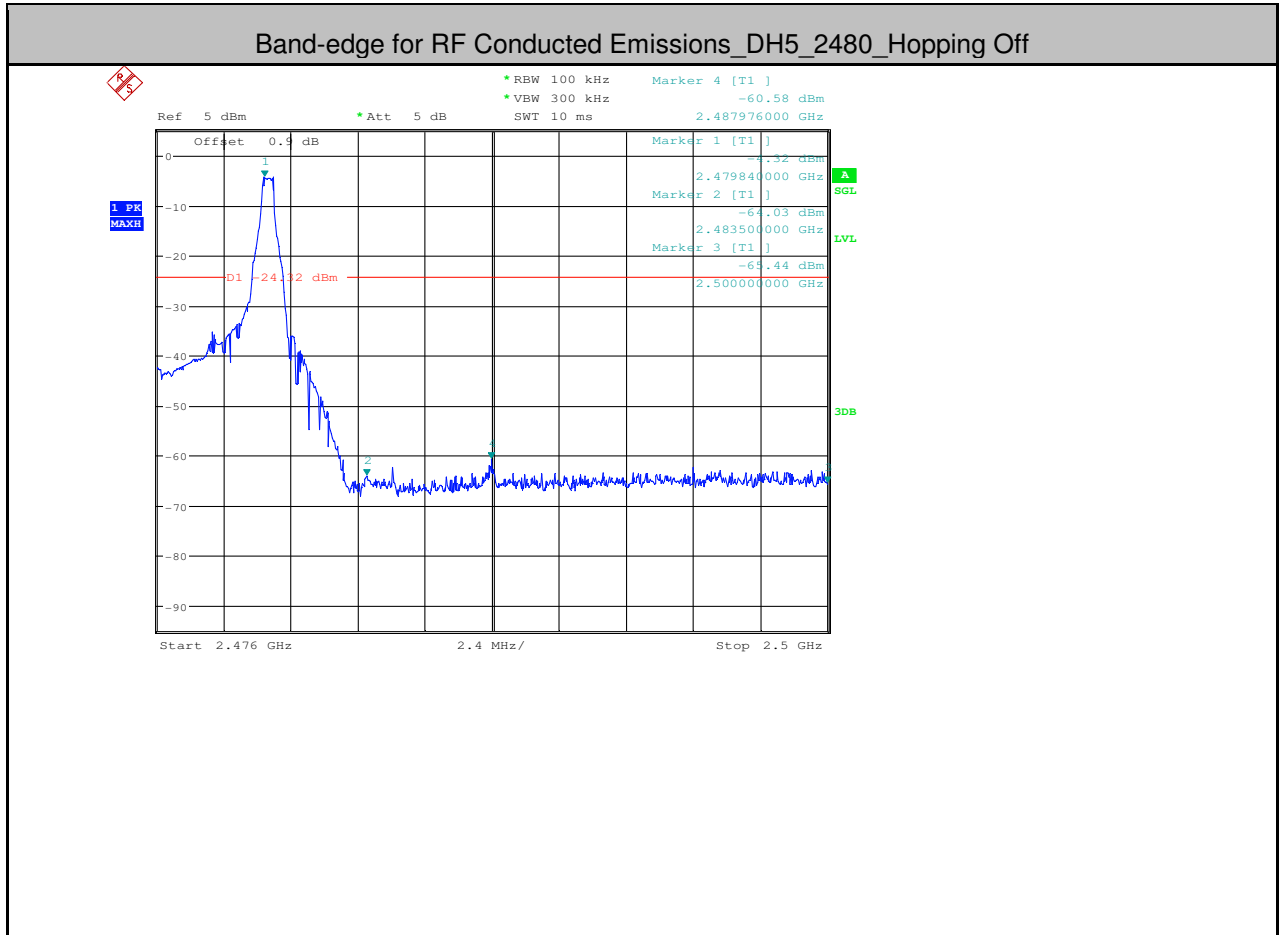


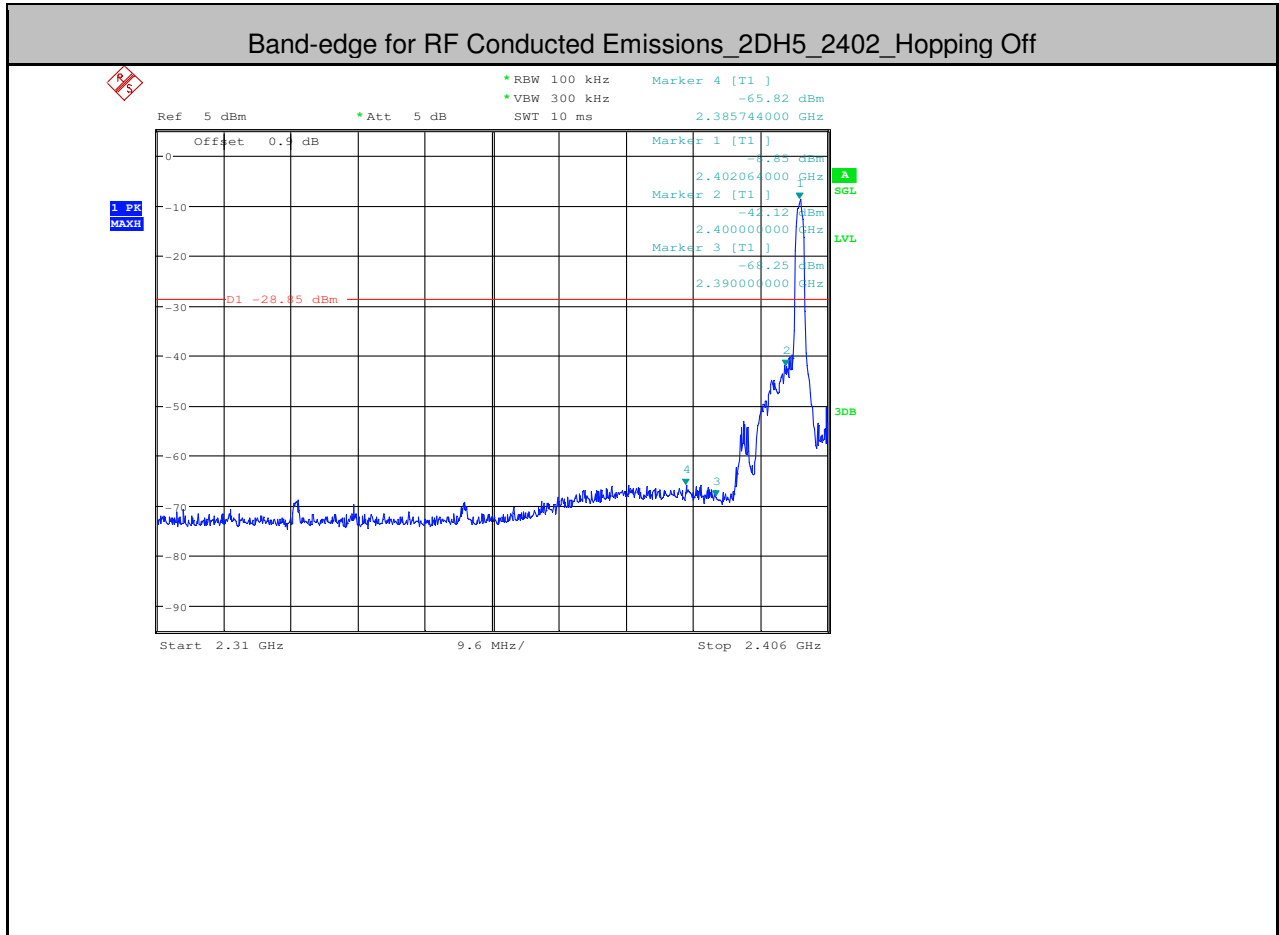


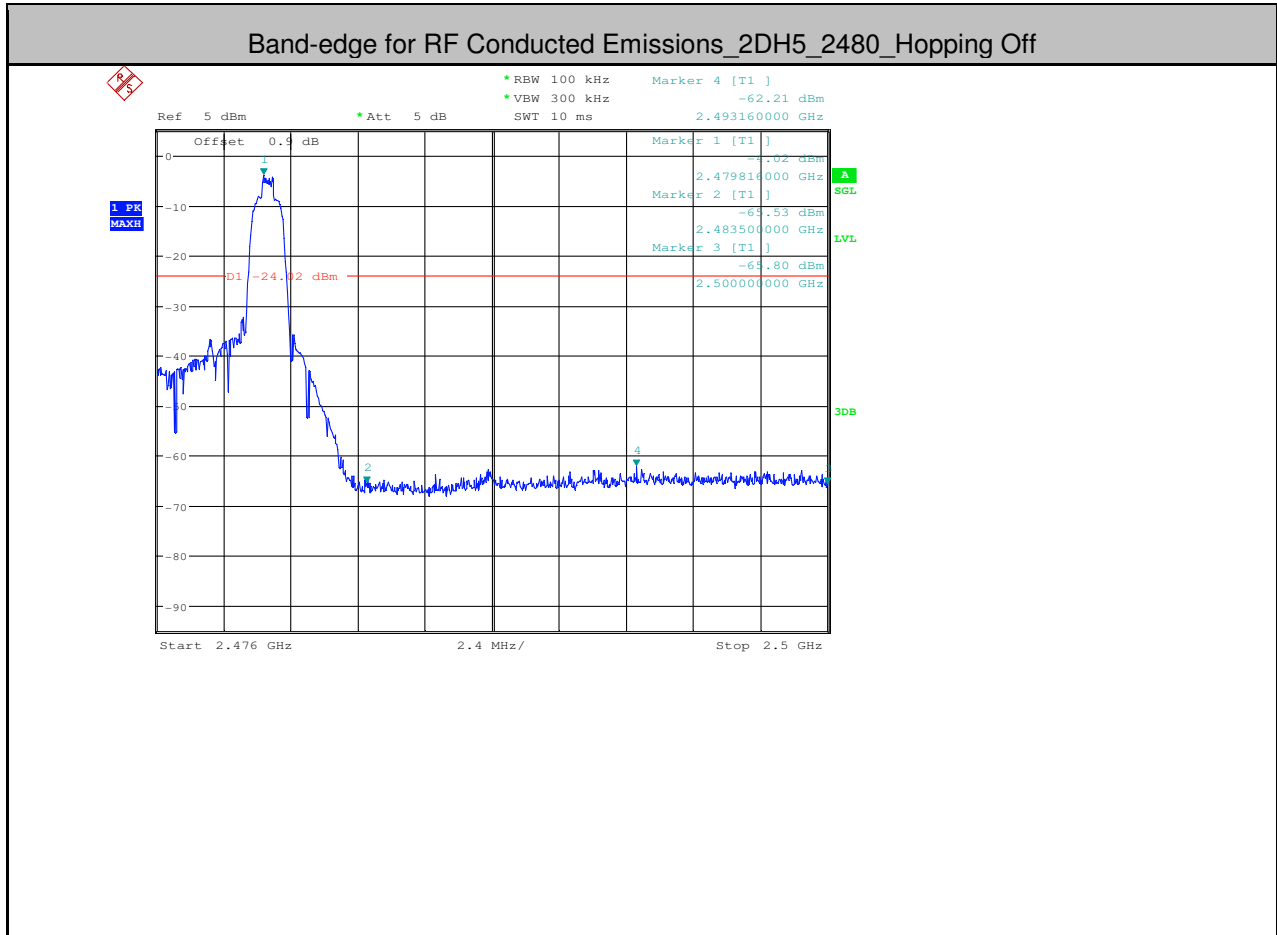

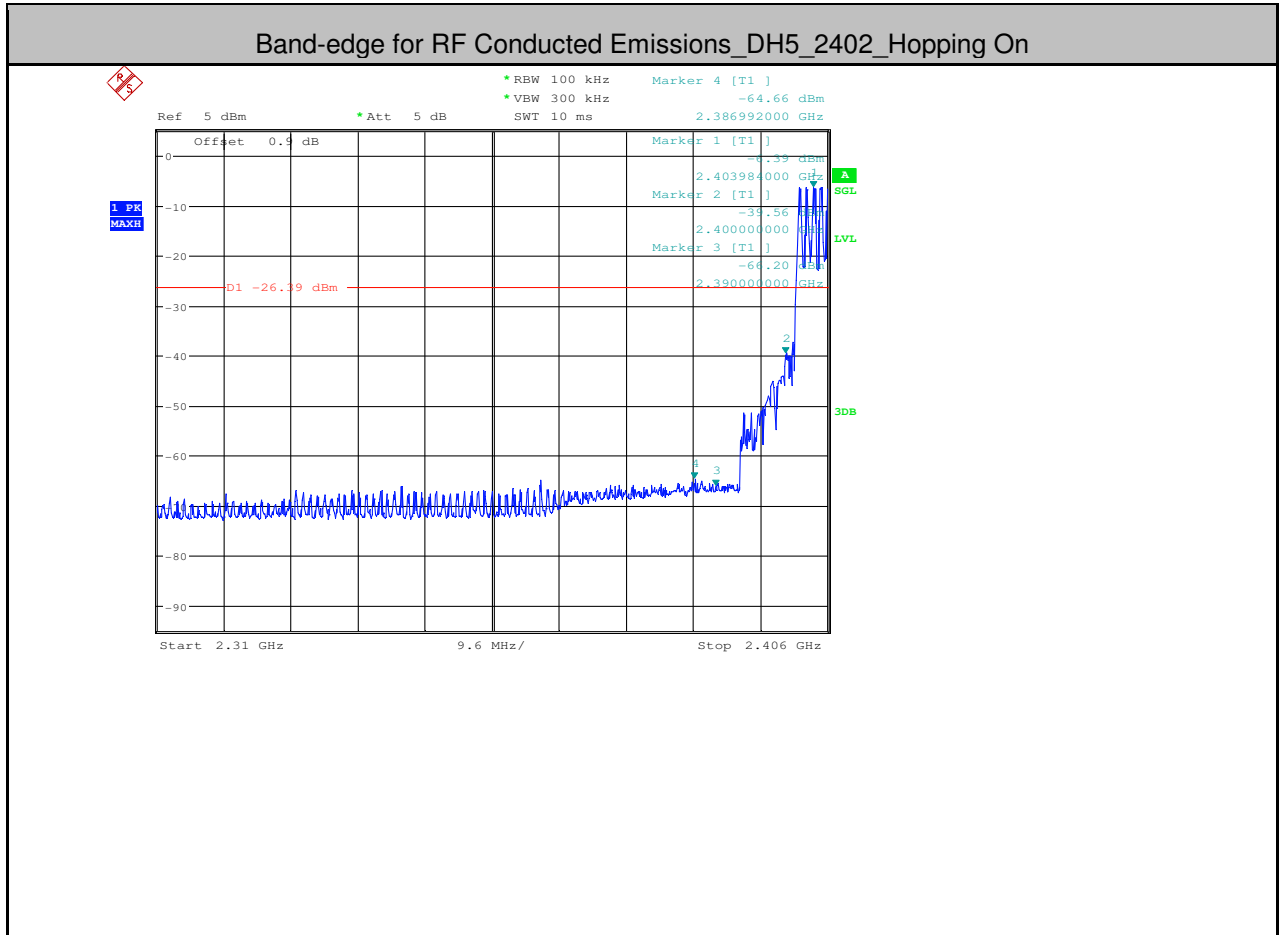

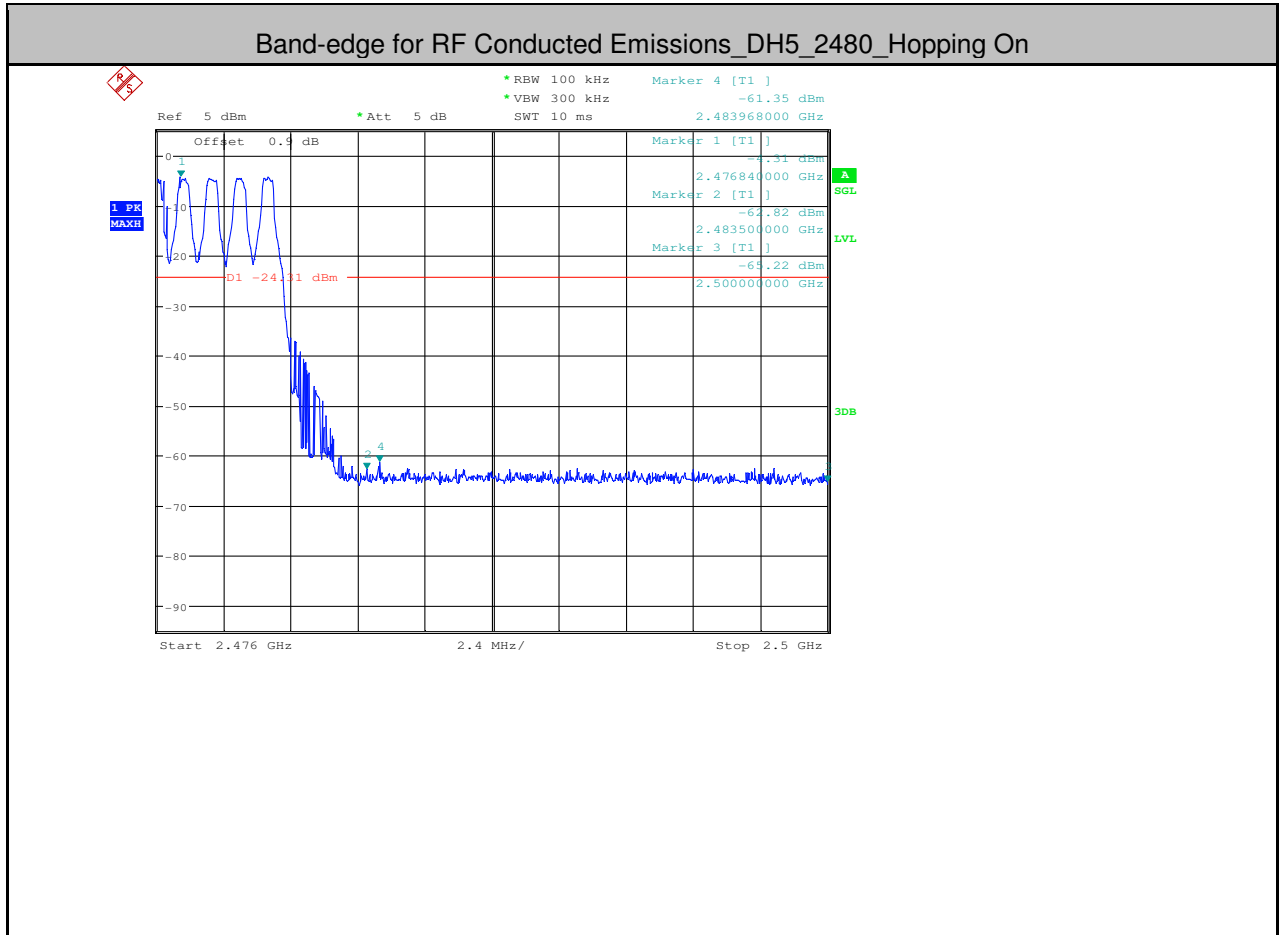

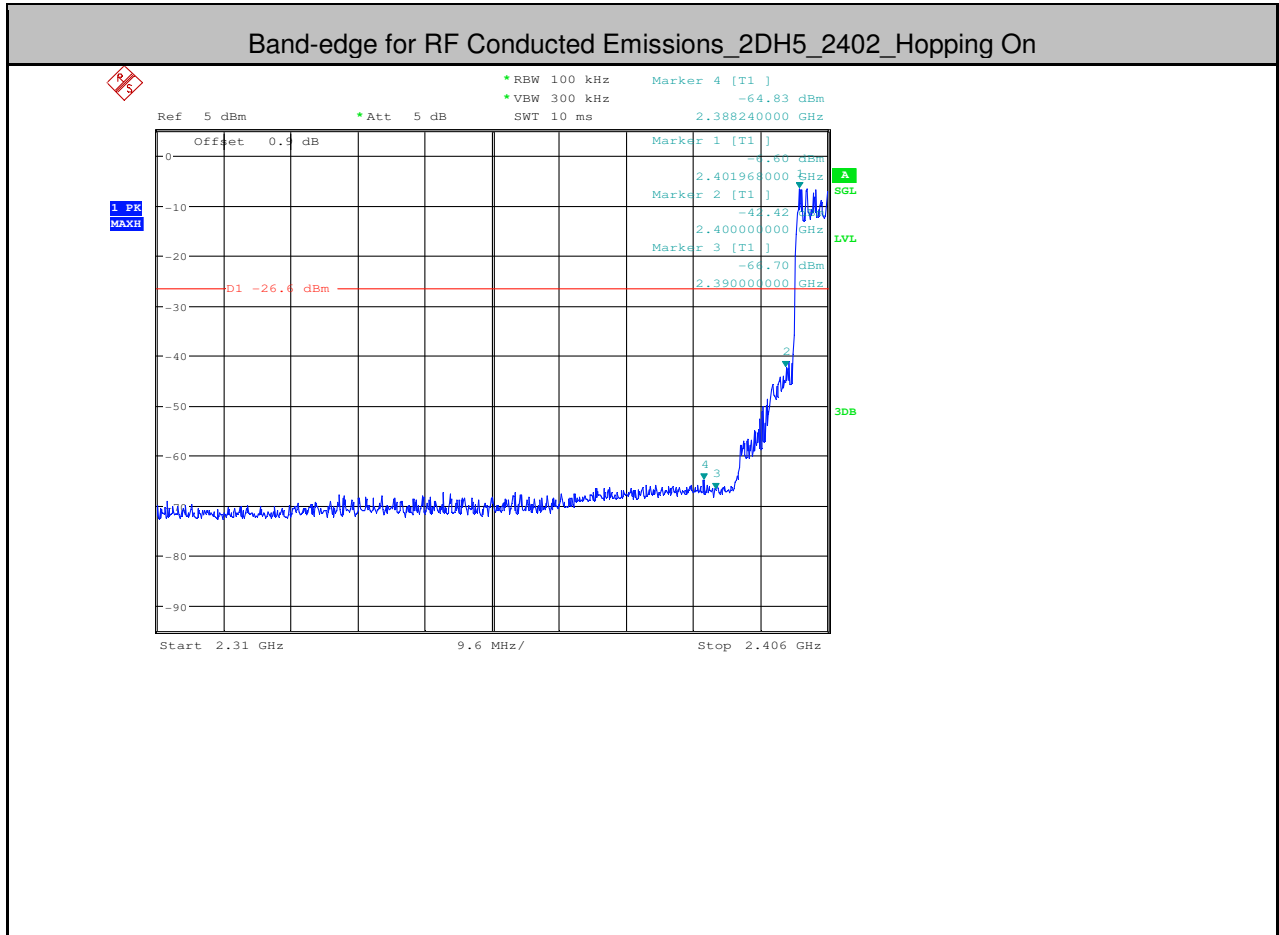


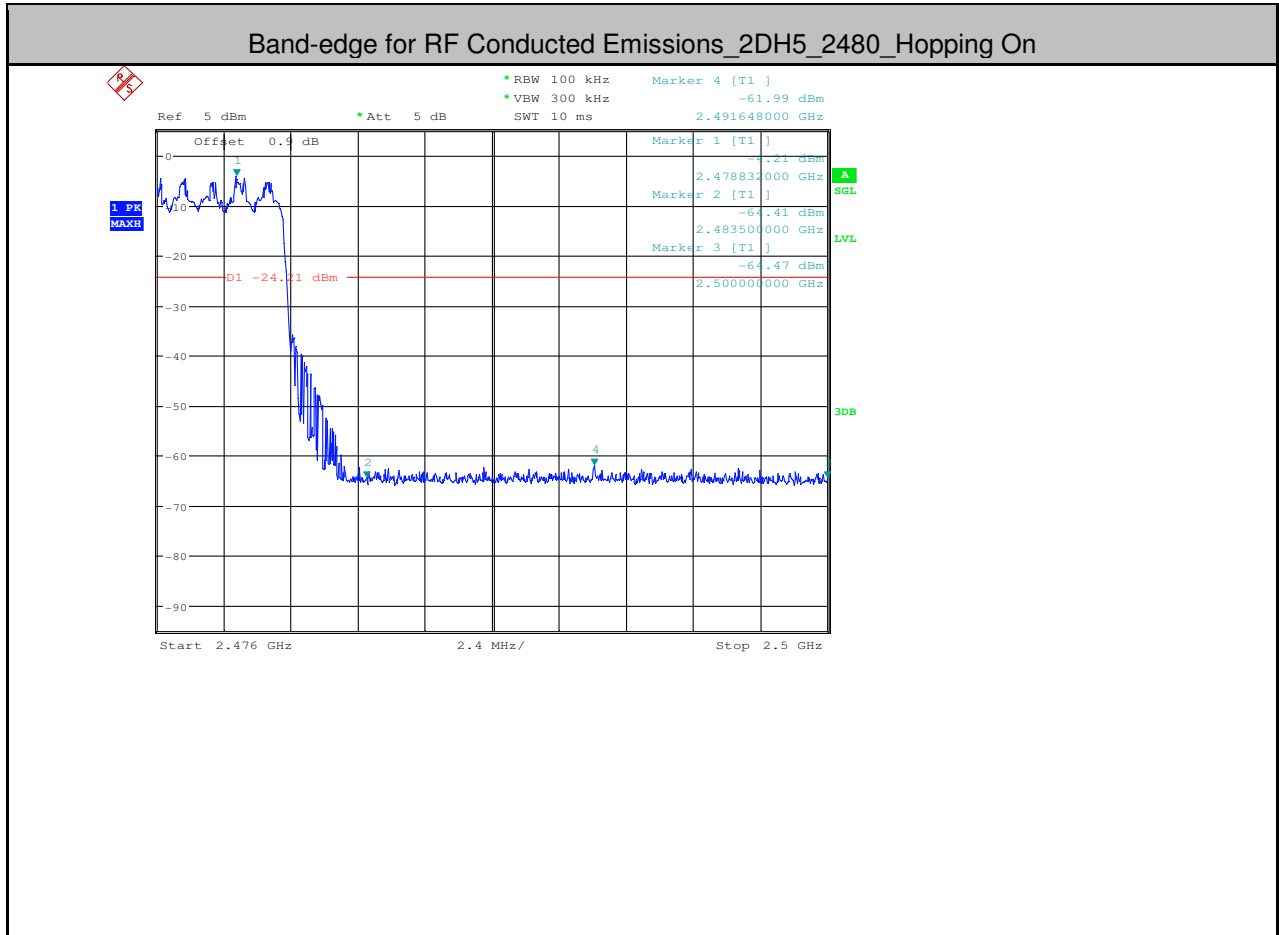





8.RF Conducted Spurious Emissions

Test Mode	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
DH5	2402	30	10000	1000	3000	-6.36	-32.630	<-26.36	PASS
DH5	2402	10000	25000	1000	3000	-6.36	-68.070	<-26.36	PASS
DH5	2441	30	10000	1000	3000	-5.39	-33.520	<-25.39	PASS
DH5	2441	10000	25000	1000	3000	-5.39	-66.900	<-25.39	PASS
DH5	2480	30	10000	1000	3000	-3.89	-34.680	<-23.89	PASS
DH5	2480	10000	25000	1000	3000	-3.89	-67.110	<-23.89	PASS
2DH5	2402	30	10000	1000	3000	-6.45	-31.580	<-26.45	PASS
2DH5	2402	10000	25000	1000	3000	-6.45	-68.060	<-26.45	PASS
2DH5	2441	30	10000	1000	3000	-5.35	-32.620	<-25.35	PASS
2DH5	2441	10000	25000	1000	3000	-5.35	-67.710	<-25.35	PASS
2DH5	2480	30	10000	1000	3000	-3.84	-33.690	<-23.84	PASS
2DH5	2480	10000	25000	1000	3000	-3.84	-66.800	<-23.84	PASS

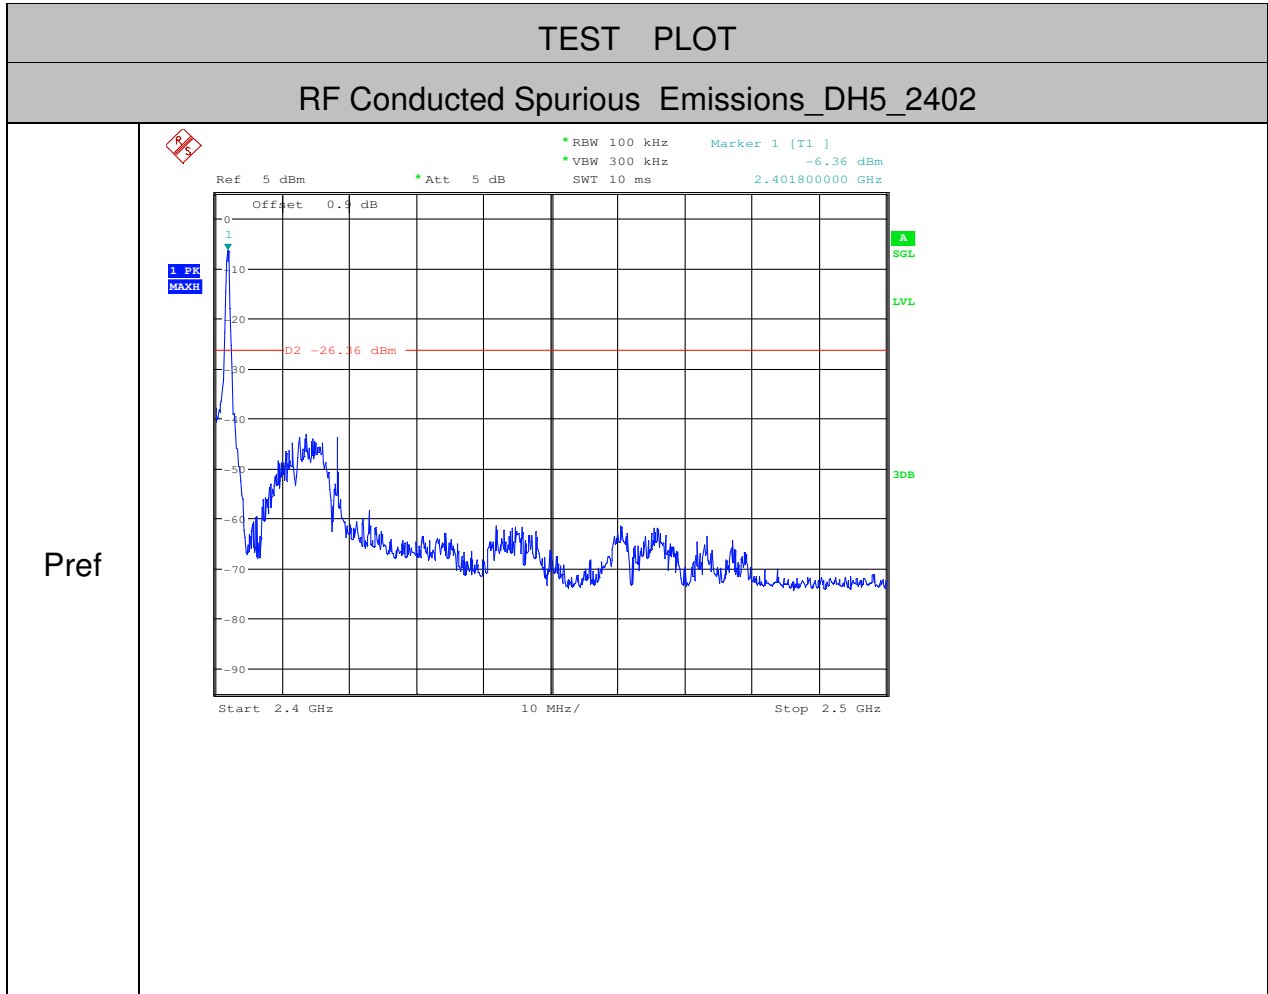

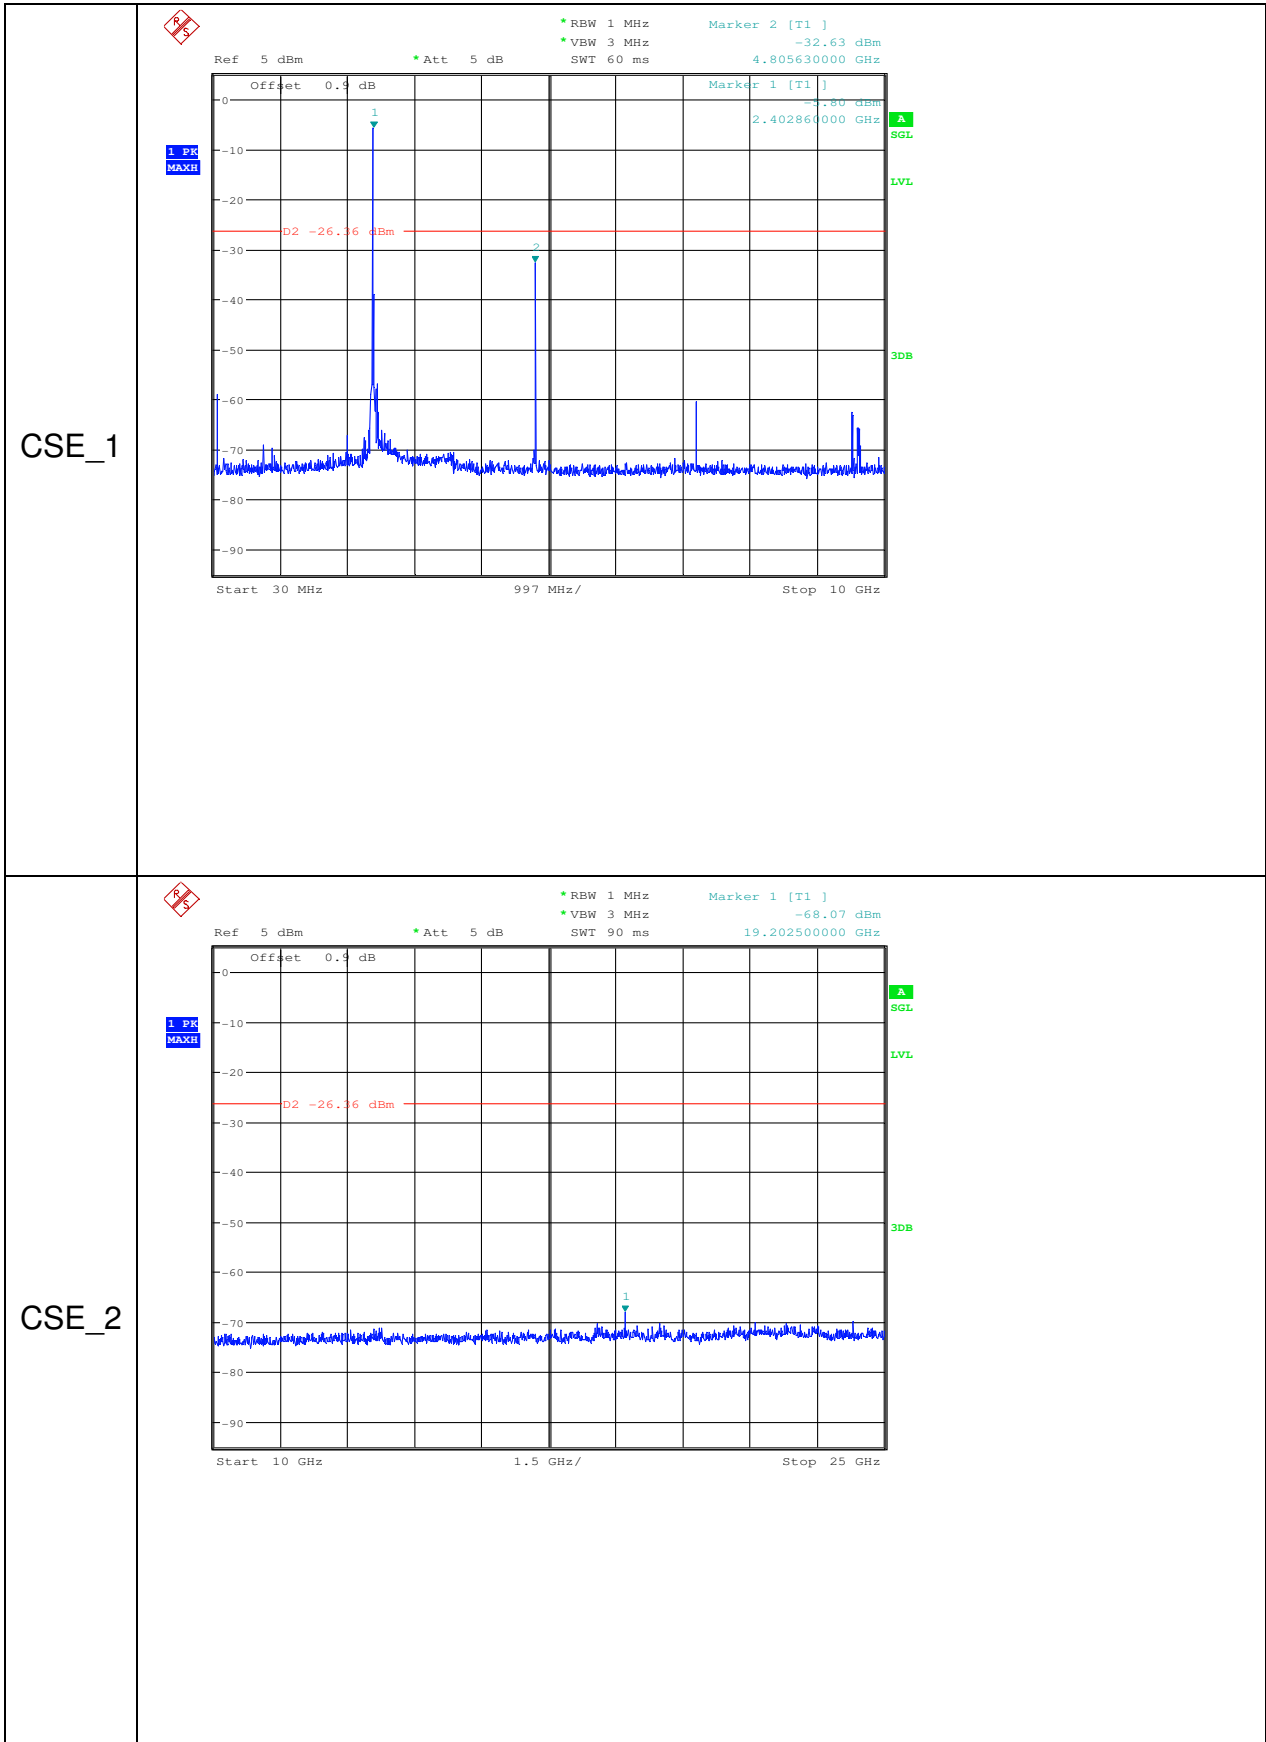


RF Conducted Spurious Emissions_DH5_2441

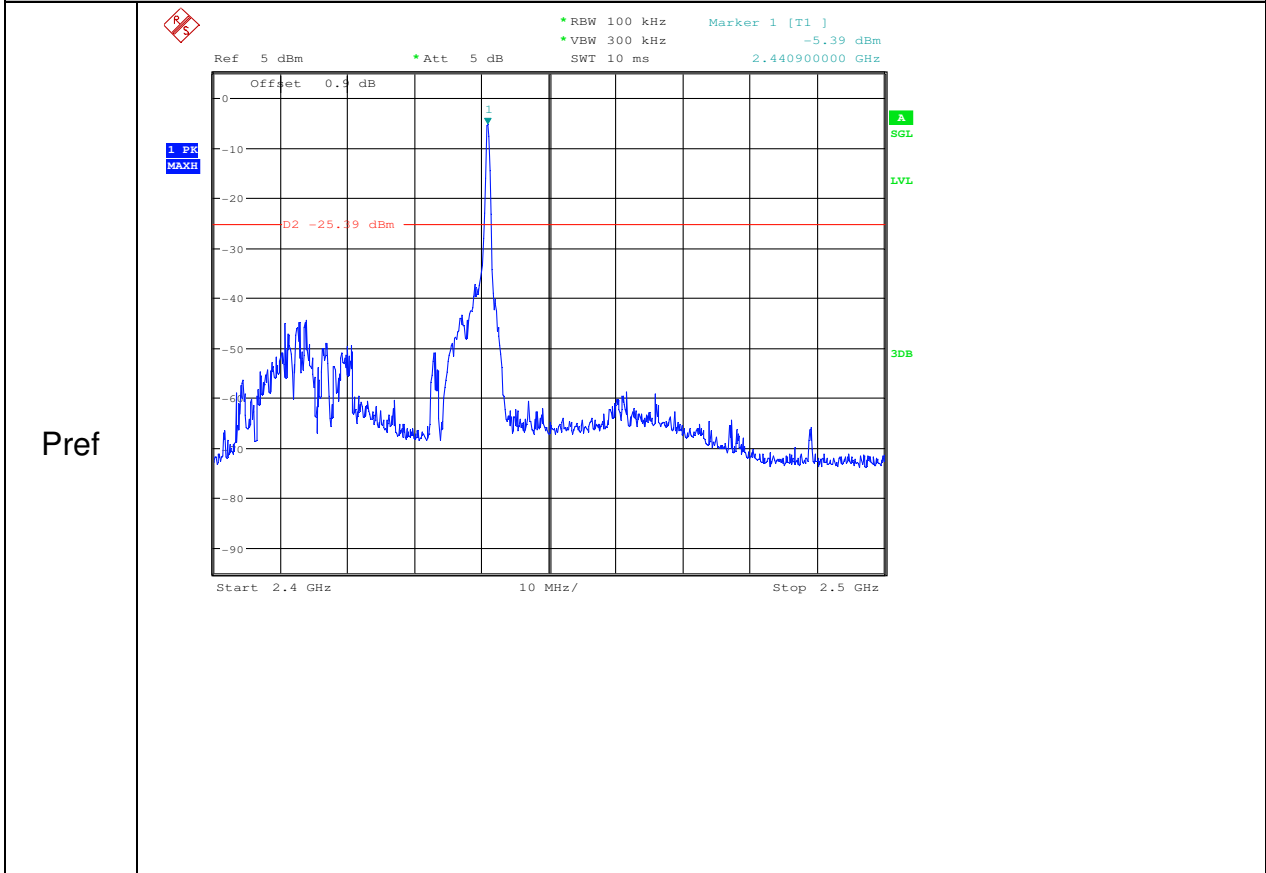





CSE_1

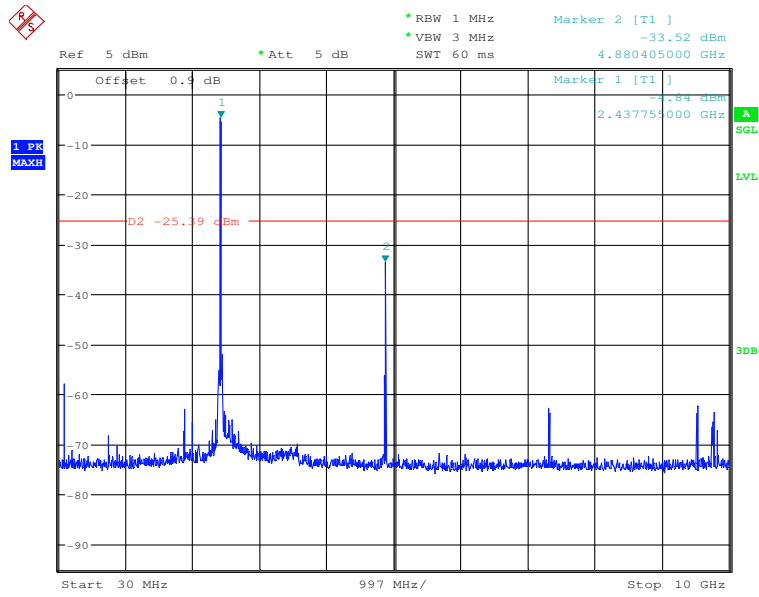


CSE_2

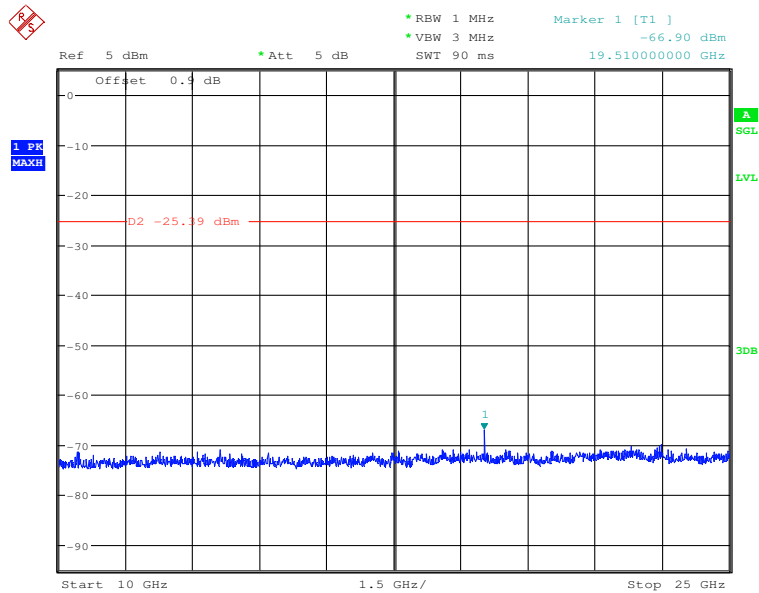


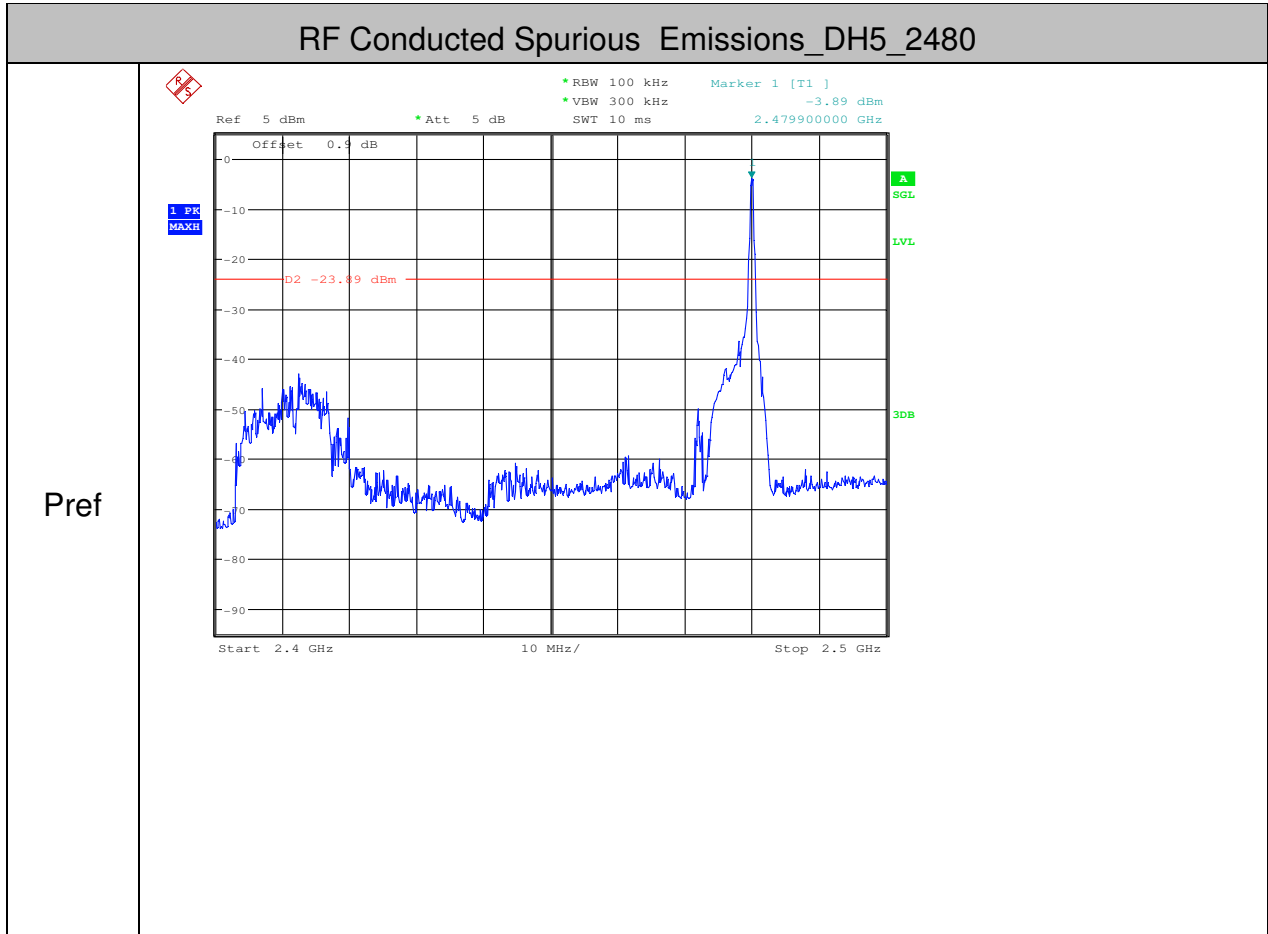


CSE_1

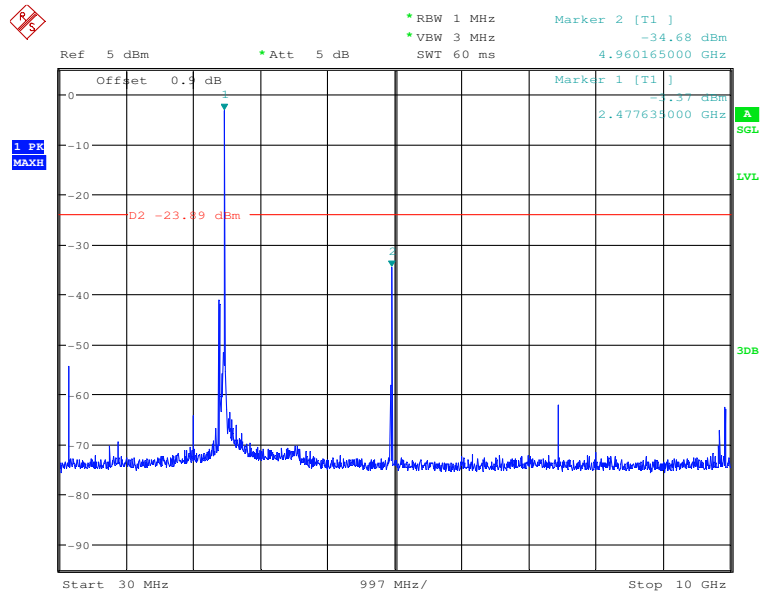


CSE_2

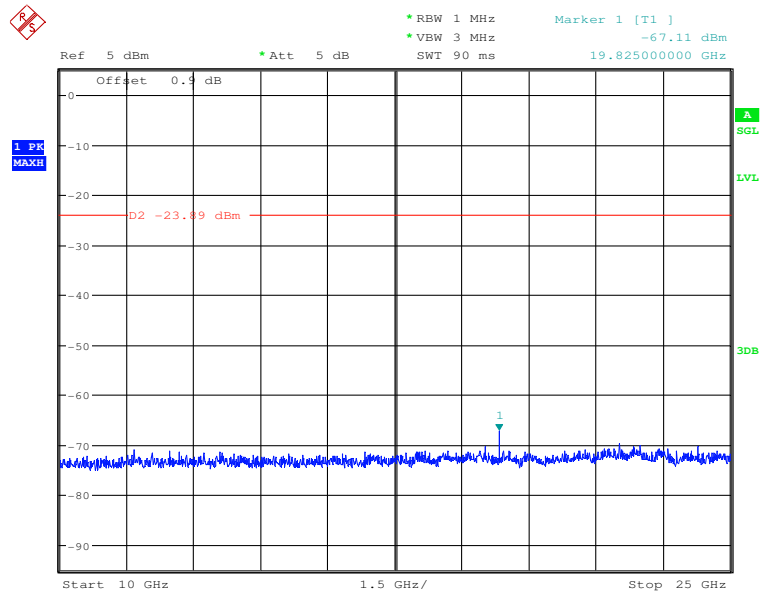



RF Conducted Spurious Emissions_2DH5_2402

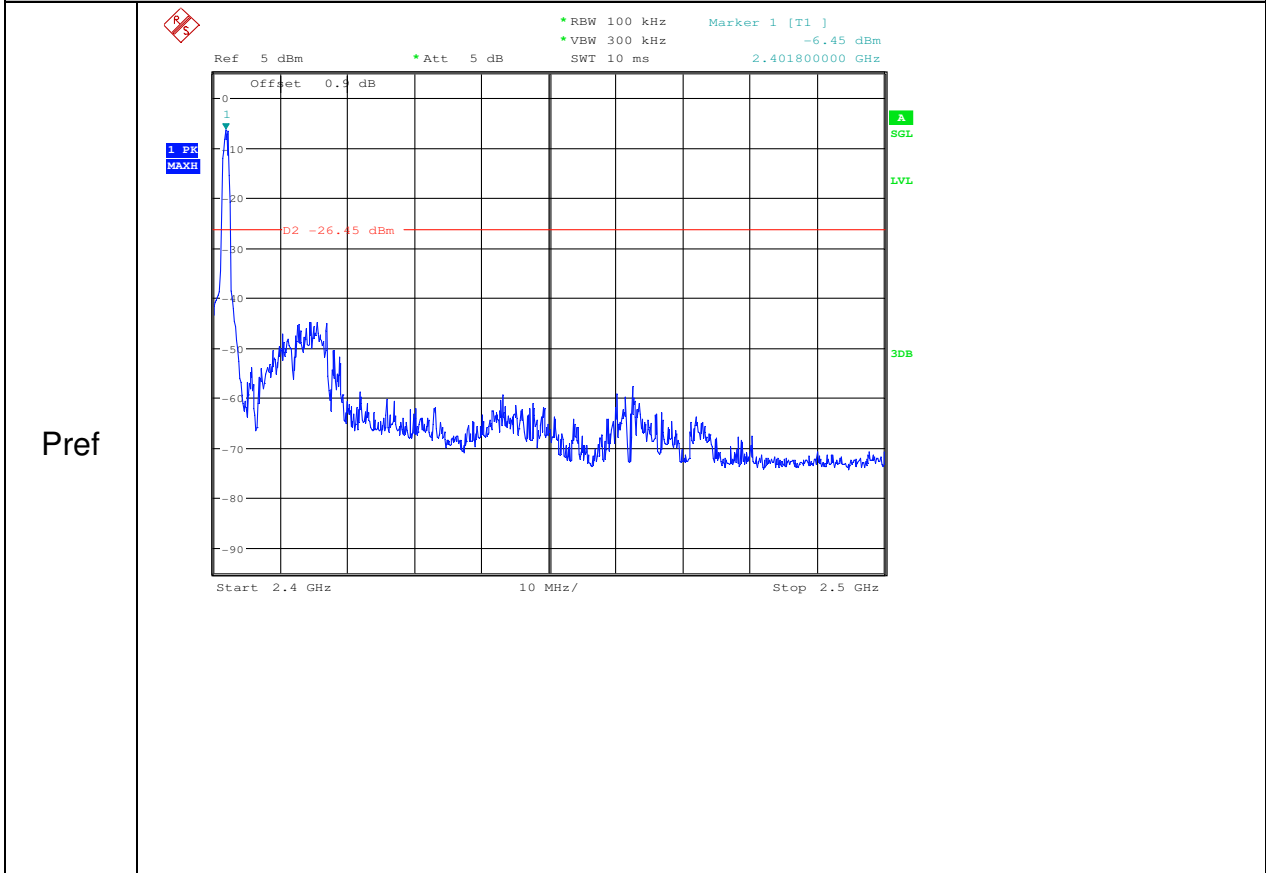


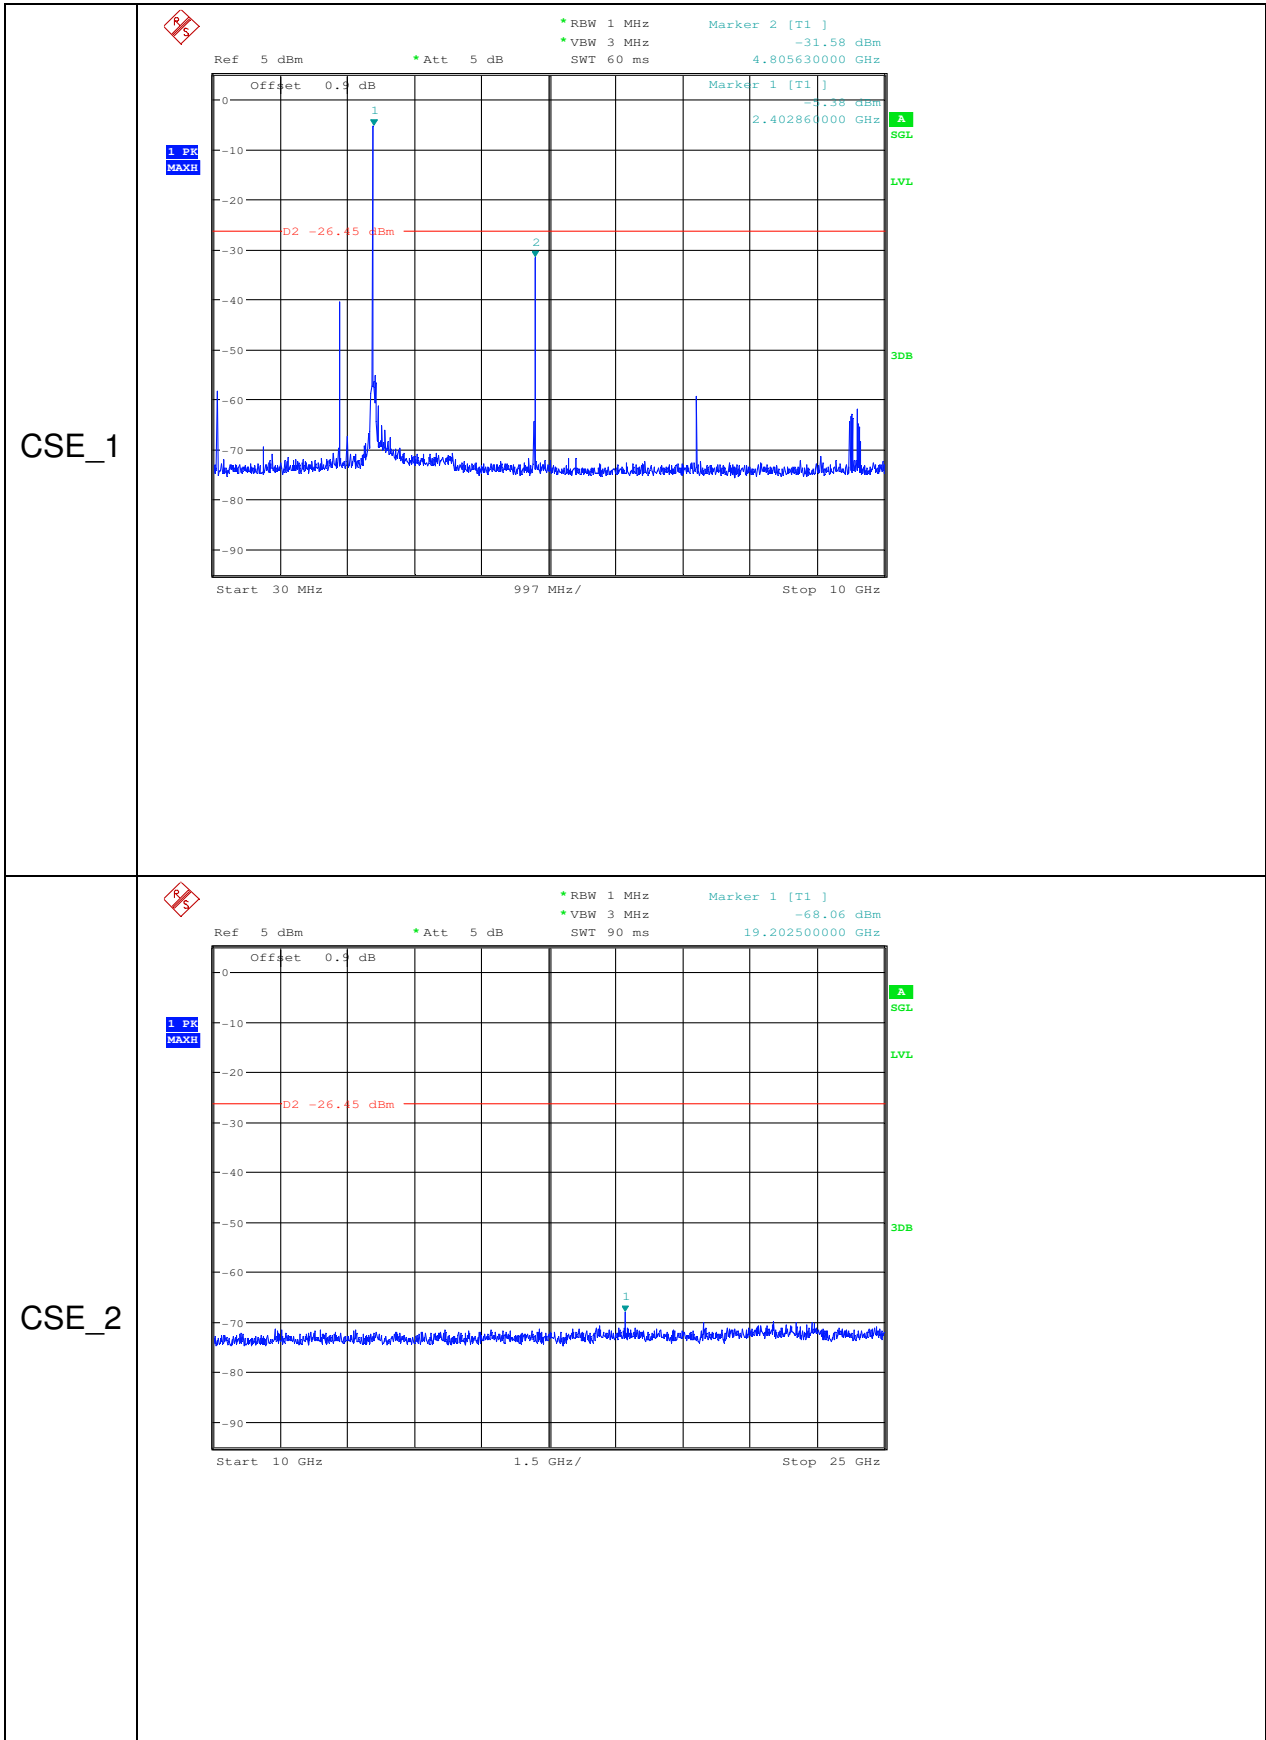

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

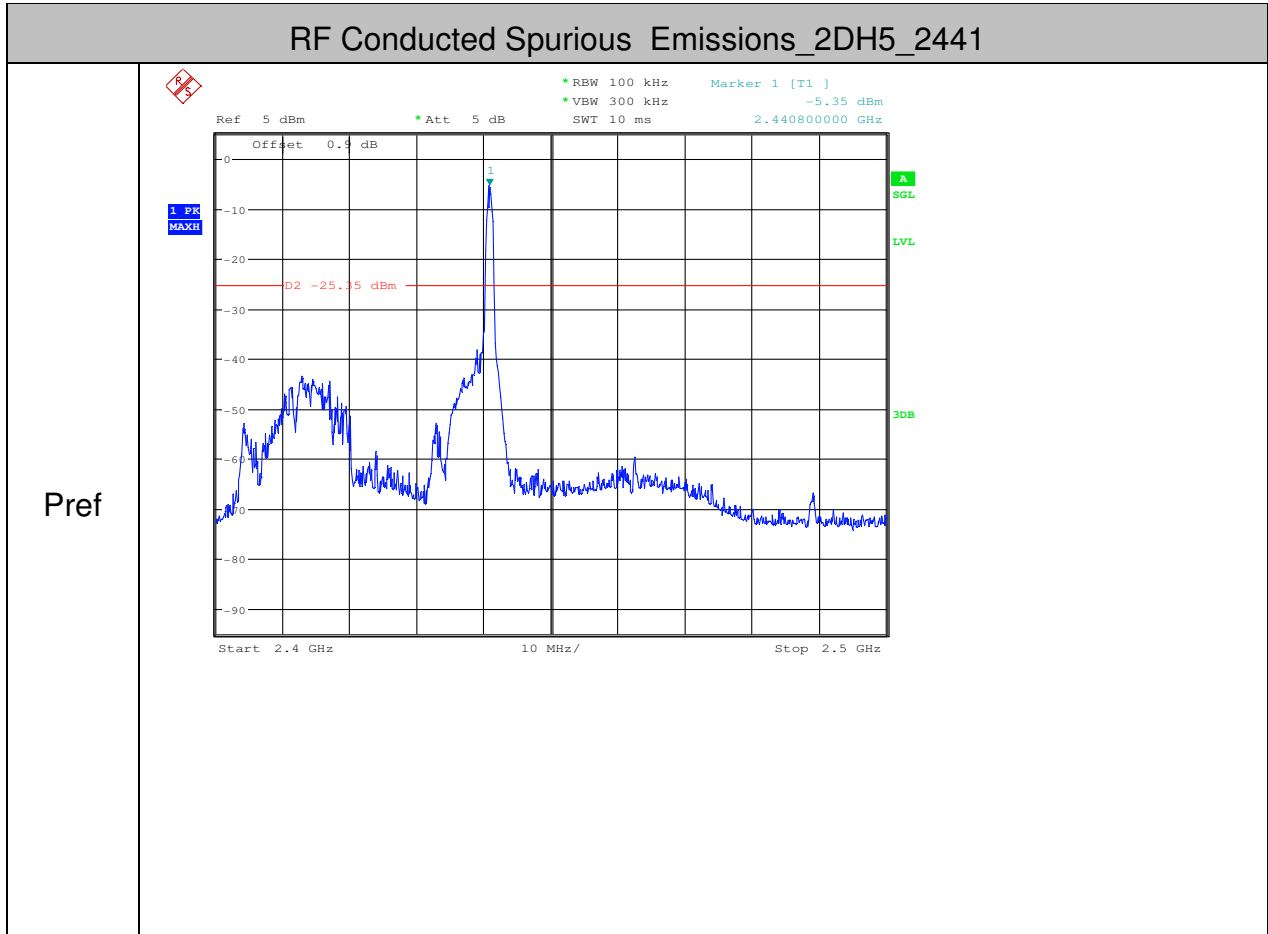


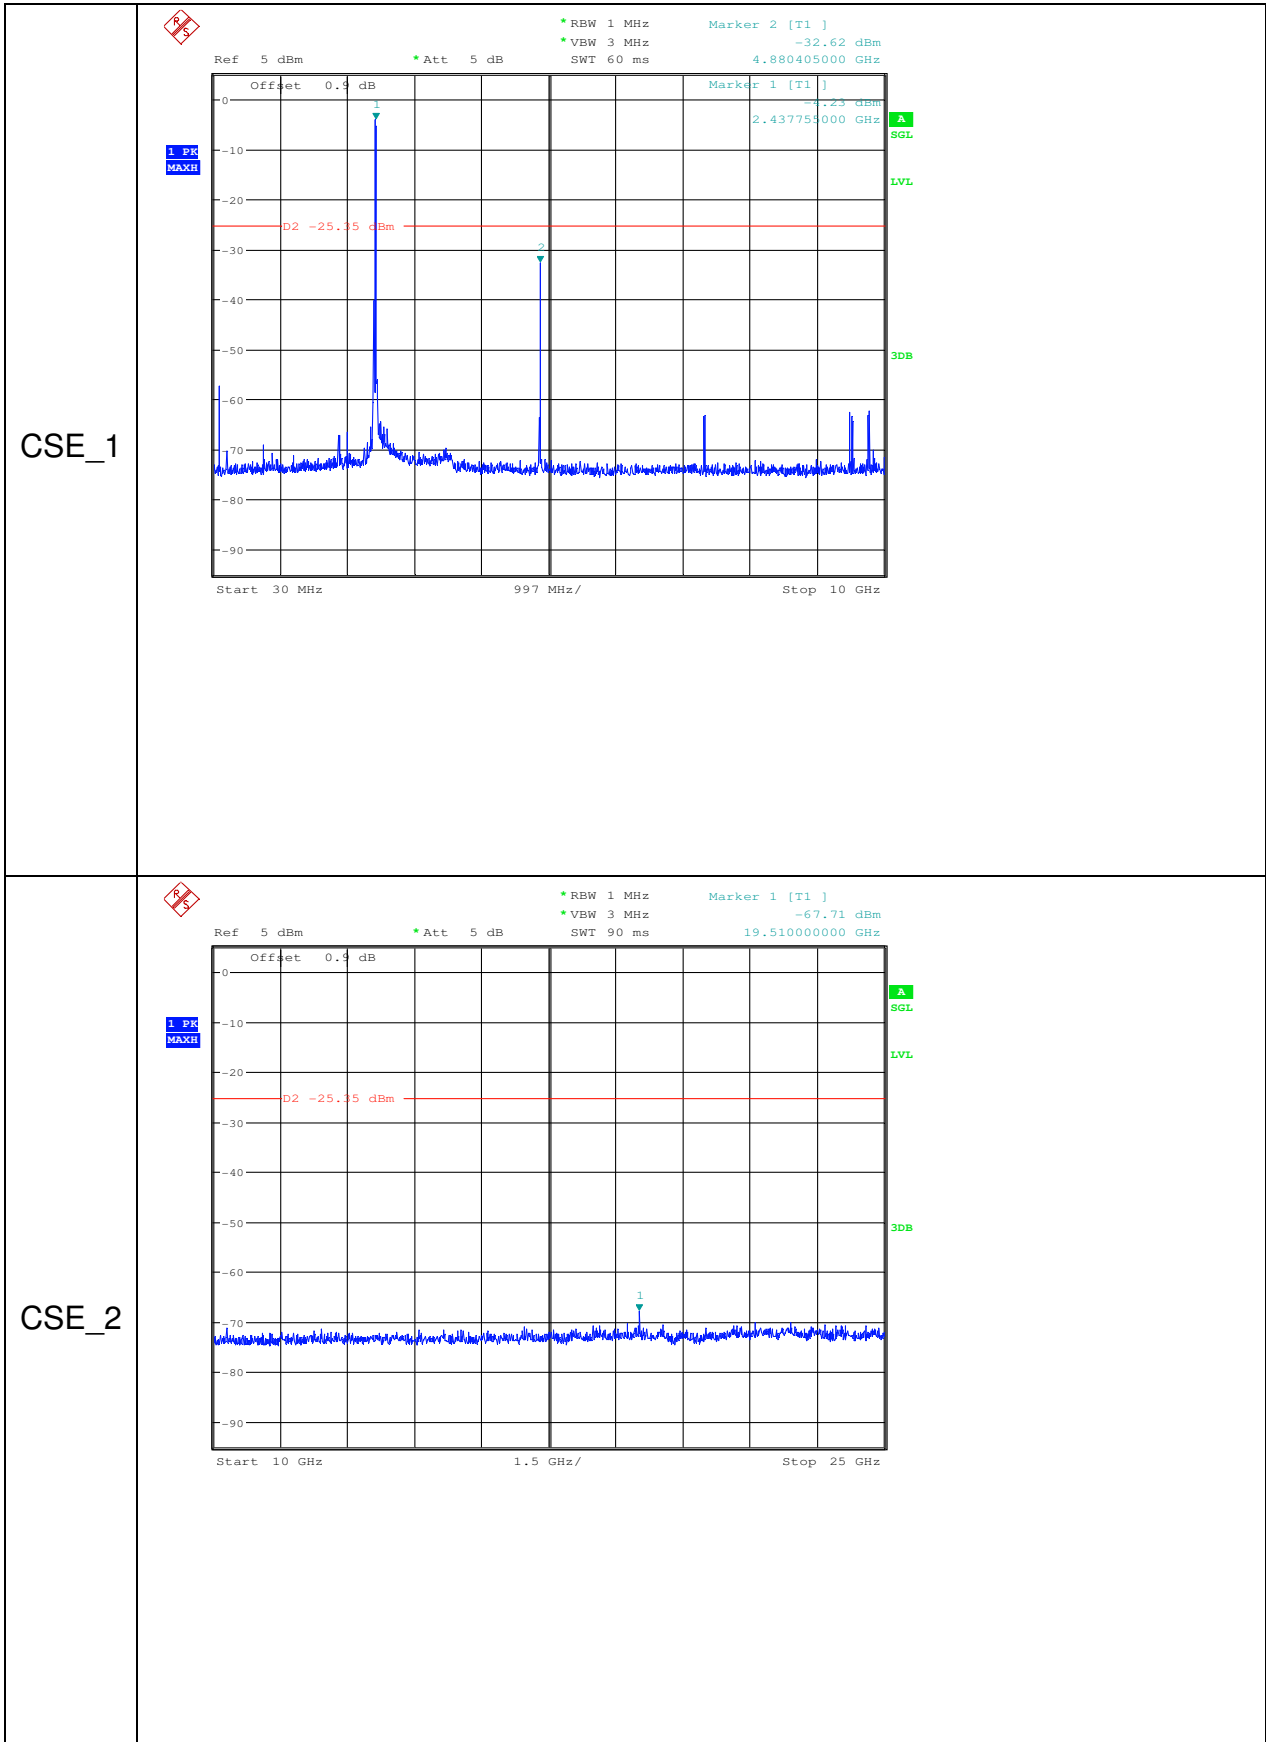

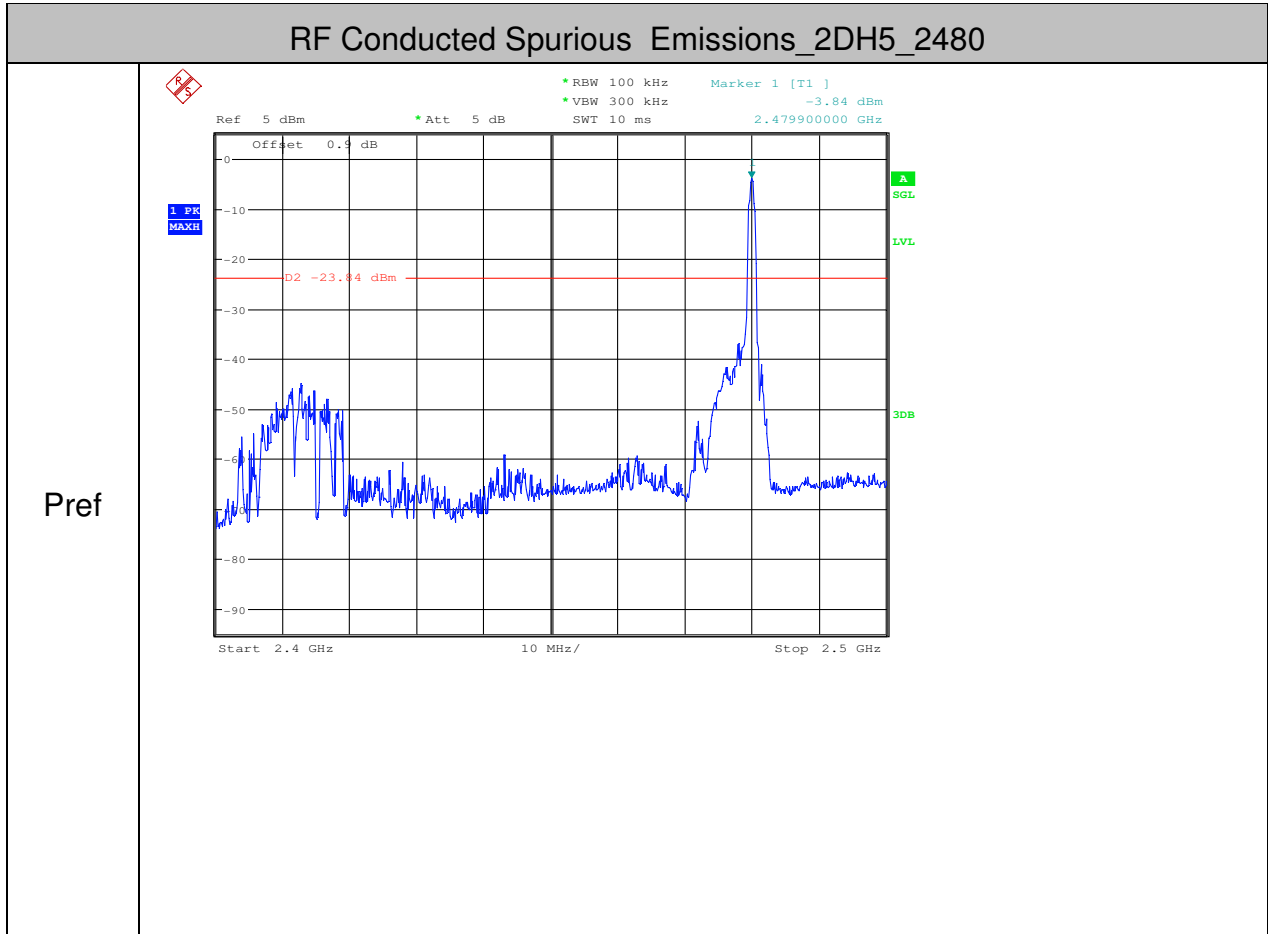



CSE_1

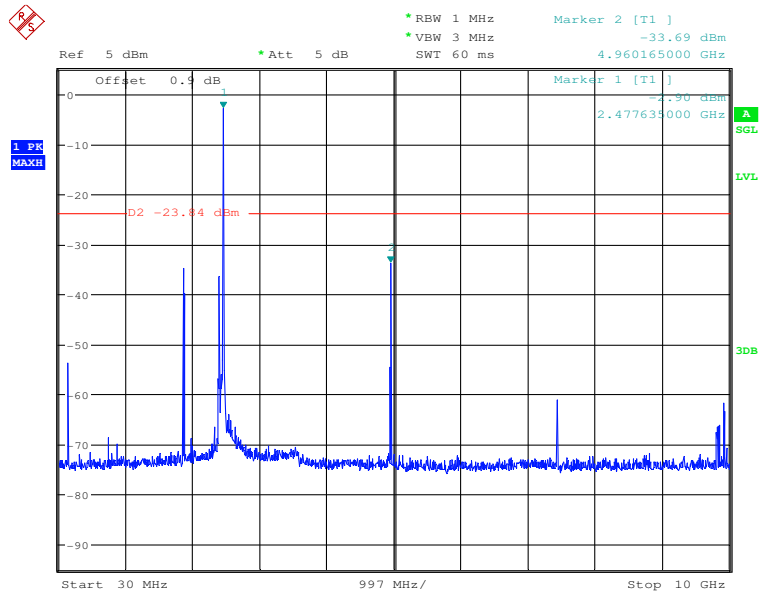

CSE_2

