

Advanced
Compliance Laboratory

6 Randolph Way
Hillsborough, NJ 08844
Tel: (908) 927 9288
Fax: (908) 927 0728

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT of

MICRO TAG
MODEL: IT-717E/IT-710E/IT-720E
FCC ID: ST2-IT717E IC:6012A-IT717E

May 8, 2015

This report concerns (check one): Original grant Class II change
Equipment type: Low Power Intentional Radiator

Test Specifications:

- FCC Part 15C Sec. 15.249
 Industry Canada RSS-210 (Issue 8) & RSS-Gen (Issue 3)

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes no
If yes, defer until: _____ (date)

Company agrees to notify the Commission by _____ (date)
of the intended date of announcement of the product so that the grant can be
issued on that date.

Report prepared for:
Report prepared by:
Report number:

CENTRAK, INC.
Advanced Compliance Lab
0048-150424-01



Lab Code: 200101 The test result in this report IS supported and covered by the NVLAP accreditation

Table of Contents

Report Cover Page	1
Table of Contents	2
Figures.....	3
1. GENERAL INFORMATION	4
1.1 Verification of Compliance.....	4
1.2 Equipment Modifications	5
1.3 Product Information	6
1.4 Test Methodology	6
1.5 Test Facility	6
1.6 Test Equipment	6
1.7 Statement for the Document Use	7
2. PRODUCT LABELING	8
3. SYSTEM TEST CONFIGURATION	9
3.1 Justification.....	9
3.2 Special Accessories.....	9
3.3 Configuration of Tested System	9
4. SYSTEM SCHEMATICS	13
5. RADIATED EMISSION DATA	14
5.1 Field Strength Calculation	14
5.2 Test Methods and Conditions	14
5.3 Test Data	14
6. EUT RECEIVING MODE VERIFICATION.....	20
7. PHOTOS OF TESTED EUT	22

Figures

Figure 2.1 FCC/IC ID Label	8
Figure 2.2 Location of Label	8
Figure 3.1 Radiated Test Setup	10
Figure 4.1 EUT Schematics.....	12
Figure 7.1 Front View.....	21
Figure 7.2 Back View.....	22
Figure 7.3 PCB Component Side View	24
Figure 7.4 PCB Foil Side View.....	25

1. GENERAL INFORMATION

1.1 Verification of Compliance

EUT: MICRO TAG

Model: IT-717E/IT-710E/IT-720E
(all models are electrical identical)

Applicant: CENTRAK, INC.

Test Type: FCC Part 15.249 &
IC RSS-210 (Issue 8) A2.9 & RSS-Gen (Issue 3)

Result: PASS

Tested by: ADVANCED COMPLIANCE LABORATORY

Test Date: May 8, 2015

Report Number: 0048-150424-01

The above equipment was tested by Compliance Laboratory, Advanced Technologies, Inc. for compliance with the requirement set forth in the FCC rules and regulations Part 15 subpart C. This said equipment in the configuration described in the report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

The estimated uncertainty of the test result is given as following. The method of uncertainty calculation is provided in Advanced Compliance Lab. Doc. No. 0048-01-01.

	Prob. Dist.	Uncertainty(dB)	Uncertainty(dB)	Uncertainty(dB)
		30-1000MHz	1-6.5GHz	Conducted
Combined Std. Uncertainty u_c	norm.	±2.36	±2.99	±1.83



Wei Li
Lab Manager
Advanced Compliance Lab

Date May 8, 2015

1.2 Equipment Modifications

N/A

1.3 Product Information

System Configuration

ITEM	DESCRIPTION	FCC/IC ID	CABLE
Product	MICRO TAG IT-717E/IT-710E/IT-720E ⁽¹⁾	ST2-IT717E 6012A-IT717E	
Housing	PLASTICS		
Power Supply	3V DC Battery		
Operation Freq.	904MHz ~ 926MHz		
Receiver	IT-717(RX)	Verification	

(1) EUT submitted for grant.

1.4 Test Methodology

Radiated tests were performed according to the procedures in ANSI C63.4-2014 at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated and conducted data are located at Hillsborough, New Jersey, USA. This site is accepted by FCC to perform measurements under Part 15 or 18 (Registration # 90601) and also designated by IC as “**site IC 3130**”. This site The NVLAP Lab code for accreditation of FCC EMC Test Method is: 200101-0.

1.6 Test Equipment

Manufacturer	Model	Serial No.	Description	Cal Due dd/mm/yy
Hewlett-Packard	HP8546A	3448A00290	EMI Receiver	15/10/15
EMCO	3104C	9307-4396	20-300MHz Biconical Antenna	15/01/16
EMCO	3146	9008-2860	200-1000MHz Log-Periodic Antenna	15/01/16
Electro-Meterics	ALR-25M/30	289	10KHz-30MHz Active Loop Antenna	28/05/15
Fischer Custom	LISN-2	900-4-0008	Line Impedance Stabilization Networks	18/03/16
Fischer Custom	LISN-2	900-4-0009	Line Impedance Stabilization Networks	24/03/16
EMCO	3115	4945	Double Ridge Guide Horn Antenna	22/01/16
Agilent	E4440A	US40420700	PSA Spectrum Analyzer	25/08/15

All Test Equipment Used are Calibrated Traceable to NIST Standards. Calibration interval: 2 year.

1.7 Statement for the Document Use

This report shall not be reproduced except in full, without the written approval of the laboratory.
And this report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. & Canada Government.

2. PRODUCT LABELING

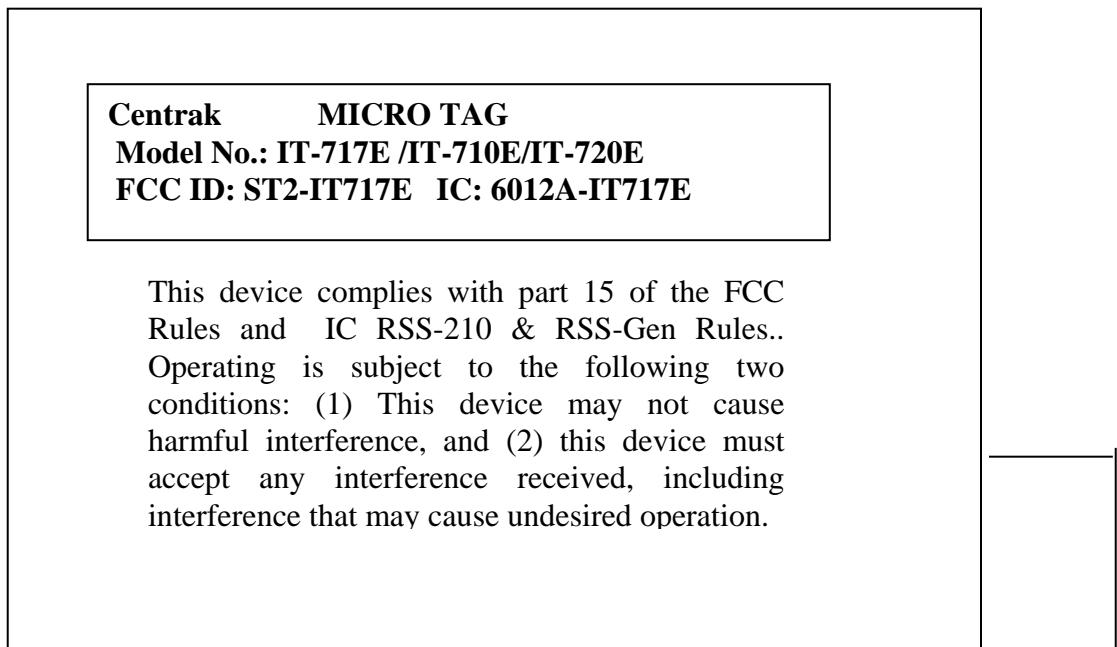


Figure 2.1 FCC/IC ID Label
(Only ID show on the EUT)



Figure 2.2 Location of the Label

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). Customized antenna on PCB was used.

Testing was performed as EUT was continuously operated at the following frequency channels: Low=904MHz, Middle= 915MHz, High=926MHz.

Fresh external battery was used for extended operating time. However, EUT was checked with the internal battery and it was confirmed that the readings obtained with the fresh external battery remain representative of the device as marketed.

3.2 Special Accessories

N/A

3.3 Configuration of Tested System

Figure 3.1 to Figure 3.3 illustrate this system, which is tested standing along.

EUT name: MICRO TAG

Model No. IT-717E/IT-710E/IT-720E
FCC ID: ST2-IT717E, IC:6012A-IT717E



EUT name: MICRO TAG

Model No. IT-717E/IT-710E/IT-720E
FCC ID: ST2-IT717E, IC:6012A-IT717E



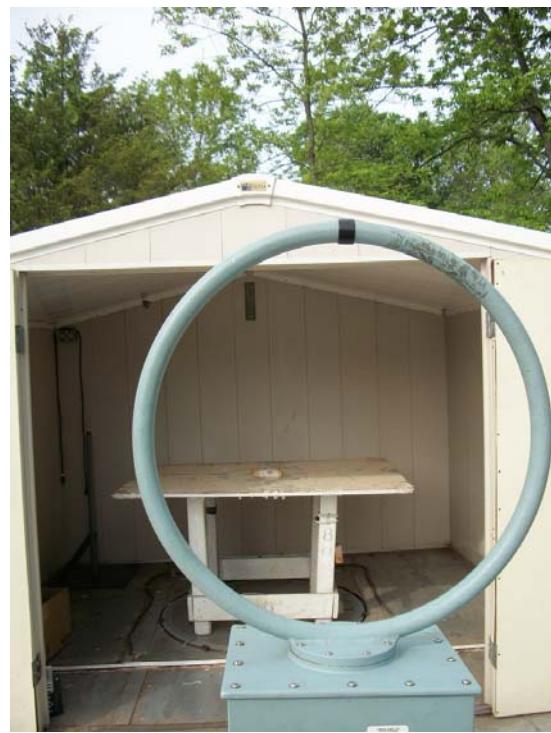


Figure 3.1 Radiated Test Setup

4. SYSTEM SCHEMATICS

See Attachment.

Figure 4.1 System Schematics

5. RADIATED EMISSION DATA

5.1 Field Strength Calculation

The corrected field strength is automatically calculated by EMI Receiver using following:

$$FS = RA + AF + CF + AG$$

where FS: Corrected Field Strength in dB μ V/m

RA: Amplitude of EMI Receiver before correction in dB μ V

AF: Antenna Factor in dB/m

CF: Cable Attenuation Factor in dB

AG: Built-in Preamplifier Gain in dB (Stored in receiver as part of the calibration data)

THE "DUTY CYCLE CORRECTION FACTOR" FOR SPURIOUS RADIATED EMISSIONS IS;
 $20 \log * (4 \text{ ms} / 100 \text{ ms}) = -28 \text{ dB}$, WHICH WAS USED TO CORRECT THE AVERAGE RADIATED EMISSION READINGS.

5.2 Test Methods and Conditions

The initial step in collecting radiated data is a EMI Receiver scan of the measurement range below 30MHz using peak detector and 9KHz IF bandwidth / 30KHz video bandwidth. For the range 30MHz - 1GHz, 100KHz IF bandwidth / 100KHz video bandwidth are used. Both bandwidths are 1MHz for above 1GHz measurement. The frequency range from 9KHz up to 10th harmonics were investigated.

5.3 Test Data

The following data lists the significant emission frequencies, polarity and position, peak reading of the EMI Receiver, the FCC limit, and the difference between the peak reading and the limit. Explanation of the correction and calculation are given in section 5.1.

Test Personnel:



Typed/Printed Name: Edward Lee

Date: May 8, 2015

Radiated Test Data (CH-904MHz/915MHz/926MHz)

Frequency (MHz)	Polarity (V,H) Position (X,Y,Z)	Antenna Height (m)	Azimuth (Degree)	Peak /QP Reading at 3m (2)	FCC/IC 3m Peak Limit (dBuV/m)	Difference To Peak Limit (dBuV/m)	Average Reading with Correction (dBuV/m)	FCC/IC 3m QP/Average Limit (1) (dBuV/m)	Difference To AVG Limit (dBuV/m)
904	V/X	1.1	180	79.4				94	-14.6
1808	V/X	1.1	350	70.0	74	-4	42	54	-12.0
2712	V/X	1.1	080	65.4	74	-8.6	37.4	54	-16.6
904	H/X	1.1	350	88.7				94	-5.3
1808	H/X	1.0	170	71.2	74	-2.8	43.2	54	-10.8
2712	H/X	1.0	260	64.7	74	-9.3	36.7	54	-17.3
915	V/X	1.1	180	78.3				94	-15.7
1830	V/X	1.1	330	68.4	74	-5.6	40.4	54	-13.6
2745	V/X	1.1	090	63.2	74	-10.8	35.2	54	-18.8
915	H/X	1.0	330	87.9				94	-6.1
1828	H/X	1.1	190	70.2	74	-3.8	42.2	54	-11.8
2745	H/X	1.1	090	62.9	74	-11.1	34.9	54	-19.1
926	V/X	1.1	180	78.0				94	-16.0
1852	V/X	1.1	330	68.0	74	-6	40	54	-14.0
2778	V/X	1.1	080	62.2	74	-11.8	34.2	54	-19.8
926	H/X	1.0	340	87.3				94	-6.7
1852	H/X	1.1	200	71.0	74	-3	43	54	-11.0
2778	H/X	1.1	100	65.1	74	-8.9	37.1	54	-16.9
904	V/Y	1.1	80	83.2				94	-10.8
1808	V/Y	1.1	180	72.1	74	-1.9	44.1	54	-9.9
2712	V/Y	1.1	050	61.6	74	-12.4	33.6	54	-20.4
904	H/Y	1.0	80	83.1				94	-10.9
1808	H/Y	1.1	045	70.1	74	-3.9	42.1	54	-11.9
2712	H/Y	1.1	235	63.6	74	-10.4	35.6	54	-18.4
915	V/Y	1.1	70	82.4				94	-11.6
1830	V/Y	1.1	180	71.0	74	-3	43	54	-11.0
2745	V/Y	1.1	040	60.2	74	-13.8	32.2	54	-21.8
915	H/Y	1.0	80	83.3				94	-10.7
1828	H/Y	1.1	045	69.6	74	-4.4	41.6	54	-12.4
2745	H/Y	1.1	235	63.0	74	-11	35	54	-19.0
926	V/Y	1.1	80	82.0				94	-12.0

1852	V/Y	1.1	180	71.8	74	-2.2	43.8	54	-10.2
2778	V/Y	1.1	045	62.7	74	-11.3	34.7	54	-19.3
926	H/Y	1.0	70	82.7				94	-11.3
1852	H/Y	1.1	045	67.8	74	-6.2	39.8	54	-14.2
2778	H/Y	1.1	235	61.5	74	-12.5	33.5	54	-20.5
904	V/Z	1.1	010	85.2				94	-8.8
1808	V/Z	1.1	100	71.2	74	-2.8	43.2	54	-10.8
2712	V/Z	1.1	170	61.9	74	-12.1	33.9	54	-20.1
904	H/Z	1.0	040	83.0				94	-11.0
1808	H/Z	1.1	350	69.1	74	-4.9	41.1	54	-12.9
2712	H/Z	1.1	120	65.3	74	-8.7	37.3	54	-16.7
915	V/Z	1.1	000	85.0				94	-9.0
1830	V/Z	1.1	090	70.1	74	-3.9	42.1	54	-11.9
2745	V/Z	1.1	180	60.6	74	-13.4	32.6	54	-21.4
915	H/Z	1.0	040	82.1				94	-11.9
1830	H/Z	1.1	330	67.9	74	-6.1	39.9	54	-14.1
2745	H/Z	1.1	135	63.4	74	-10.6	35.4	54	-18.6
926	V/Z	1.1	020	84.4				94	-9.6
1852	V/Z	1.1	100	71.4	74	-2.6	43.4	54	-10.6
2778	V/Z	1.1	190	61.6	74	-12.4	33.6	54	-20.4
926	H/Z	1.0	050	81.9				94	-12.1
1852	H/Z	1.1	330	66.3	74	-7.7	38.3	54	-15.7
2778	H/Z	1.1	135	62.0	74	-12	34	54	-20.0

(1) The limit for emissions within the 902-928MHz band is 50mV(94dB) per FCC Sec. 15.249 & IC RSS-210 Annex 2.9. The limit for its harmonics is 500uV (54dB). Other spurious emissions shall be lower than either its fundamental by 50dB or the limit defined in Sec. 15.209, whichever is higher.

(2) If the peak reading is less than the FCC/IC quasi-peak or average limit, it'll be not necessary to show the measured/ calculated quasi-peak or average reading.

(3) For above 1GHz range, peak reading shall meet the limit: average Limit+20dB.

Other Spurious outside of the band 902-928MHz

Frequency (MHz)	Polarity (V,H) Position (X,Y,Z)	Antenna Height (m)	Azimuth (Degree)	Peak Reading at 3m (2) (dBuV/m)	Peak Reading After Correction (dBuV/m)	FCC/IC 3m Limit (1) (dBuV/m)	Difference (dBuV/m)
334	H/Y	1.1	160	34.2		46.5	-12.3
558	H/Y	1.1	150	33.7		46.5	-12.8
580	H/Y	1.1	180	37.1		46.5	-9.4
812	H/Y	1.0	220	40.2		46.5	-6.3
334	V/Z	1.2	100	34.5		46.5	-12
404	V/Z	1.0	90	34.3		46.5	-12.2
486	V/Z	1.0	120	36.4		46.5	-10.1
862	V/Z	1.1	180	41.2		46.5	-5.3

Comparing to the limit defined in FCC Sec. 15.209/IC RSS-Gen, emissions below the limit by 20dB were not recorded.

