

RAE Systems, Inc

RF TEST REPORT

Report Type:

FCC Part 15.247 & ISED RSS-247 RF report

Model:

RMLORAB

REPORT NUMBER:

211000148SHA-001

ISSUE DATE:

November 10, 2021

DOCUMENT CONTROL NUMBER:

TTRF15.247-02_V1 © 2018 Intertek



Applicant: RAE Systems, Inc
1349 Moffett Park Drive Sunnyvale, CA 94089, USA

Manufacturer: RAE Systems, Inc
1349 Moffett Park Drive Sunnyvale, CA 94089, USA

Manufacturing site: RAE Systems (Shanghai) Inc
990 East Huiwang Road, Jiading District, Shanghai, China

FCC ID: SU3RMLORAB
IC: 20969-RMLORAB

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2019): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 2 (February 2017): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 Amendment 1 (March 2019): General Requirements for Compliance of Radio Apparatus

PREPARED BY:

Erick Liu

Project Engineer
Erick Liu

REVIEWED BY:

Wakeyou

Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY	5
MEASUREMENT RESULT SUMMARY	6
1 GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 TECHNICAL SPECIFICATION	7
1.3 DESCRIPTION OF TEST FACILITY	8
2 TEST SPECIFICATIONS	9
2.1 STANDARDS OR SPECIFICATION	9
2.2 MODE OF OPERATION DURING THE TEST	9
2.3 TEST SOFTWARE LIST	10
2.4 TEST PERIPHERALS LIST	10
2.5 TEST ENVIRONMENT CONDITION	10
2.6 INSTRUMENT LIST	11
2.7 MEASUREMENT UNCERTAINTY	12
3 MINIMUM 6DB BANDWIDTH	13
3.1 LIMIT	13
3.2 MEASUREMENT PROCEDURE	13
3.3 TEST CONFIGURATION	13
3.4 TEST RESULTS OF MINIMUM 6dB BANDWIDTH	13
4 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.	14
4.1 LIMIT	14
4.2 MEASUREMENT PROCEDURE	14
4.3 TEST CONFIGURATION	15
4.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	15
5 POWER SPECTRUM DENSITY	16
5.1 LIMIT	16
5.2 MEASUREMENT PROCEDURE	16
5.3 TEST CONFIGURATION	17
5.4 TEST RESULTS OF POWER SPECTRUM DENSITY	17
6 EMISSION OUTSIDE THE FREQUENCY BAND	18
6.1 LIMIT	18
6.2 MEASUREMENT PROCEDURE	18
6.3 TEST CONFIGURATION	19
6.4 THE RESULTS OF EMISSION OUTSIDE THE FREQUENCY BAND	19
7 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS	20
7.1 LIMIT	20
7.2 MEASUREMENT PROCEDURE	20
7.3 TEST CONFIGURATION	22
7.4 TEST RESULTS OF RADIATED EMISSIONS	24
8 POWER LINE CONDUCTED EMISSION	29
8.1 LIMIT	29

TEST REPORT

- 8.2 TEST CONFIGURATION 29
- 8.3 MEASUREMENT PROCEDURE 30
- 8.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION 31
- 9 OCCUPIED BANDWIDTH 33**
 - 9.1 LIMIT 33
 - 9.2 MEASUREMENT PROCEDURE 33
 - 9.3 TEST CONFIGURATION 33
 - 9.4 THE RESULTS OF OCCUPIED BANDWIDTH 33
- 10 ANTENNA REQUIREMENT 34**
- APPENDIX A: TEST RESULTS 35**
 - RF OUTPUT POWER 35
 - Test Result and Data* 35
 - POWER SPECTRAL DENSITY 36
 - Test Result and Data* 36
 - 6DB BANDWIDTH 37
 - Test Result and Data* 37
 - 99% BANDWIDTH 38
 - Test Result and Data* 38
 - TRANSMITTER SPURIOUS EMISSION 39
 - Test Result and Data* 39

Revision History

Report No.	Version	Description	Issued Date
211000148SHA-001	Rev. 01	Initial issue of report	November 10, 2021

Measurement result summary

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-247 Issue 2 Clause 5.2	Pass
Maximum conducted output power and e.i.r.p.	15.247(b)(3)	RSS-247 Issue 2 Clause 5.4	Pass
Power spectrum density	15.247(e)	RSS-247 Issue 2 Clause 5.2	Pass
Emission outside the frequency band	15.247(d)	RSS-247 Issue 2 Clause 5.5	Pass
Radiated Emissions in restricted frequency bands	15.247(d), 15.205&15.209	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.207(a)	RSS-Gen Issue 5 Clause 8.8	Pass
Occupied bandwidth	-	RSS-Gen Issue 5 Clause 6.6	Tested
Antenna requirement	15.203	-	Pass

Notes:

1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	RMLORAB
Type/Model:	RMLORAB
Description of EUT:	The EUT is a wireless module using the 902 ~ 928MHz frequency band and only one model. It has one FPC antenna and four dipole antennas, Radiation tests were performed using antenna1(FPC antenna) and antenna 2 (maximum gain 3.0dBi Dipole antenna).
Rating:	2.5 - 3.6V DC
Category of EUT:	Class B
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	/
Hardware Version:	/
Sample identification number:	0210924-30-001
Sample received date:	September 24, 2021
Date of test:	September 25, 2021 – November 10, 2021

1.2 Technical Specification

Frequency Range:	906MHz ~ 924MHz
Support Standards:	IEEE 802.15.4
Type of Modulation:	BPSK
Channel Number:	10
Channel Separation:	2MHz
Antenna Information:	Antenna 1: -0.32dBi, FPC antenna Antenna 2: 3.0dBi, dipole antenna Antenna 3: 3.0dBi, dipole antenna Antenna 4: 3.0dBi, dipole antenna Antenna 5: 1.8dBi, dipole antenna

1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0051
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2019)
 ANSI C63.10 (2013)
 RSS-247 Issue 2 (February 2017)
 RSS-Gen Issue 5 Amendment 1 (March 2019):
 KDB 558074 D01 (v05r02)

2.2 Mode of operation during the test

Three axes (X, Y, Z) were observed while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded. Compare with the test results that X axis is the worst case.

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)		906MHz ~ 924MHz	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	906	6	916
2	908	7	918
3	910	8	920
4	912	9	922
5	914	10	924

Data rate VS Power:

The test setting software is offered by the manufactory. The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases.

Test software and Power Setting parameter			
Test Software	SSCOM V5.13.1		
Working Mode	906MHz ~ 924MHz		
Test Channel	906MHz	916MHz	924MHz
Power setting	18	18	18

TEST REPORT

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

Radiated test mode: EUT transmitted signal with antenna;

Conducted test mode: EUT transmitted signal from RF port connected to SPA directly;

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	HP	-

2.5 Test environment condition:

Test items	Temperature	Humidity
Minimum 6dB Bandwidth	26°C	51% RH
Maximum conducted output power and e.i.r.p.		
Power spectrum density		
Emission outside the frequency band		
Occupied bandwidth		
Radiated Emissions in restricted frequency bands	24°C	53% RH
Power line conducted emission	23°C	51% RH

TEST REPORT

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCS 30	EC 2107	2022-07-14
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2022-12-07
<input type="checkbox"/>	A.M.N.	R&S	ENV 216	EC 3393	2022-07-03
<input type="checkbox"/>	A.M.N.	R&S	ENV4200	EC 3558	2022-06-09
<input checked="" type="checkbox"/>	Shielding room	Zhongyu	-	EC 2838	2022-01-07
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2022-09-11
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112D	EC 4206	2022-05-30
<input checked="" type="checkbox"/>	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC5262	2022-06-09
<input checked="" type="checkbox"/>	Horn antenna	R&S	HF 906	EC 3049	2022-11-17
<input type="checkbox"/>	Horn antenna	ETS	3117	EC 4792-1	2022-01-09
<input type="checkbox"/>	Horn antenna	R&S	STLP9149	EC5881	2022-06-18
<input checked="" type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2022-03-07
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2022-09-14
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2022-03-05
<input checked="" type="checkbox"/>	Power sensor	Agilent	U2021XA	EC 5338-1	2022-03-05
<input checked="" type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2022-03-05
<input checked="" type="checkbox"/>	Spectrum analyzer	R&S	CMW500	EC5944	2021-12-23
<input checked="" type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2022-03-05
<input type="checkbox"/>	Mobile Test System	Litepoint	lqxel	EC 5176	2022-01-09
<input type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2021-09-12

TEST REPORT

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	± 0.74dB
Power spectrum density	± 0.74dB
Radiated Emissions in restricted frequency bands below 1GHz	± 4.90dB
Radiated Emissions in restricted frequency bands above 1GHz	± 5.02dB
Emission outside the frequency band	± 2.89dB
Power line conducted emission	± 3.19dB
Occupied bandwidth	± 0.84 × 10 ⁻⁷
Occupied bandwidth	± 0.84 × 10 ⁻⁷

3 Minimum 6dB bandwidth

Test result: Pass

3.1 Limit


For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Measurement Procedure

The minimum 6dB bandwidth is measured using the Spectrum Analyzer according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 8.2) for compliance requirements.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3 Test Configuration

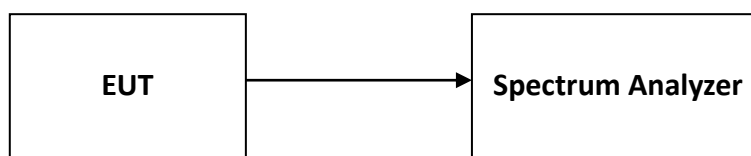

3.4 Test Results of Minimum 6dB bandwidth

Please refer to Appendix A

4 Maximum conducted output power and e.i.r.p.

Test result: Pass

4.1 Limit

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 W.
(The e.i.r.p. shall not exceed 4 W)


If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

4.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 9.1.1) for compliance requirements.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

4.3 Test Configuration

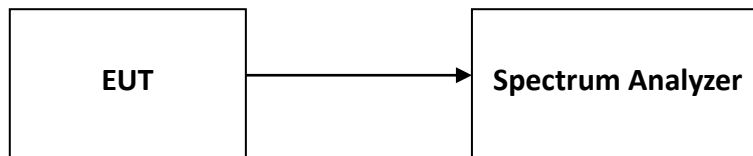

4.4 Test Results of Maximum conducted output power

Please refer to Appendix A

5 Power spectrum density

Test result: Pass

5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.


If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and $8 + (6 - \text{antenna gain} - \text{beam forming gain})$.

5.2 Measurement Procedure

The power output was tested according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance" (clause 10.2) for compliance requirements.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 Test Configuration

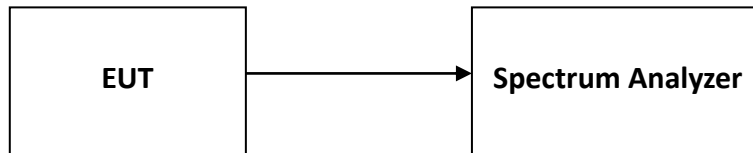

5.4 Test Results of Power spectrum density

Please refer to Appendix A

6 Emission outside the frequency band

Test result: Pass

6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance requirements.

Reference level measurement

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

6.3 Test Configuration

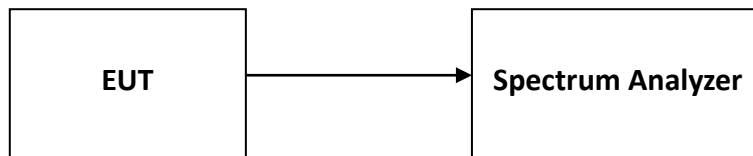

6.4 The results of Emission outside the frequency band

Please refer to Appendix A

7 Radiated Emissions in restricted frequency bands

Test result: Pass

7.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 3 x RBW (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported

7.3 Test Configuration


For Radiated emission below 30MHz:

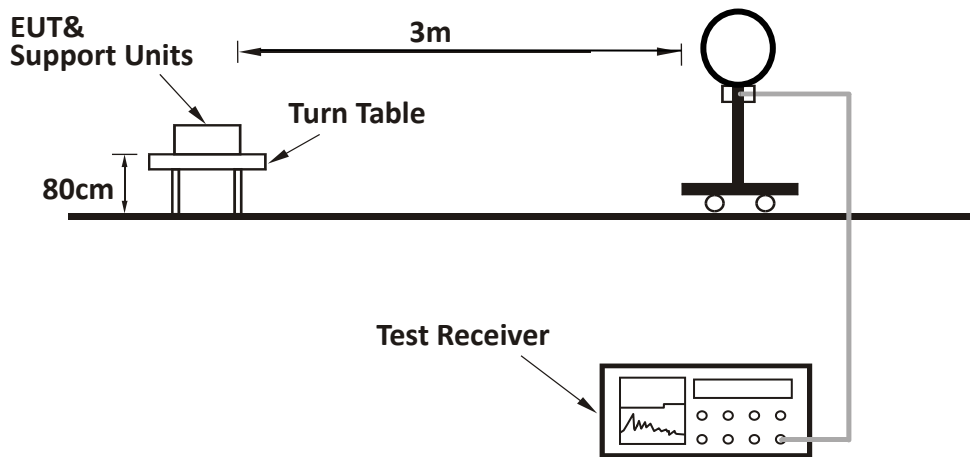

For Radiated emission 30MHz to 1GHz:

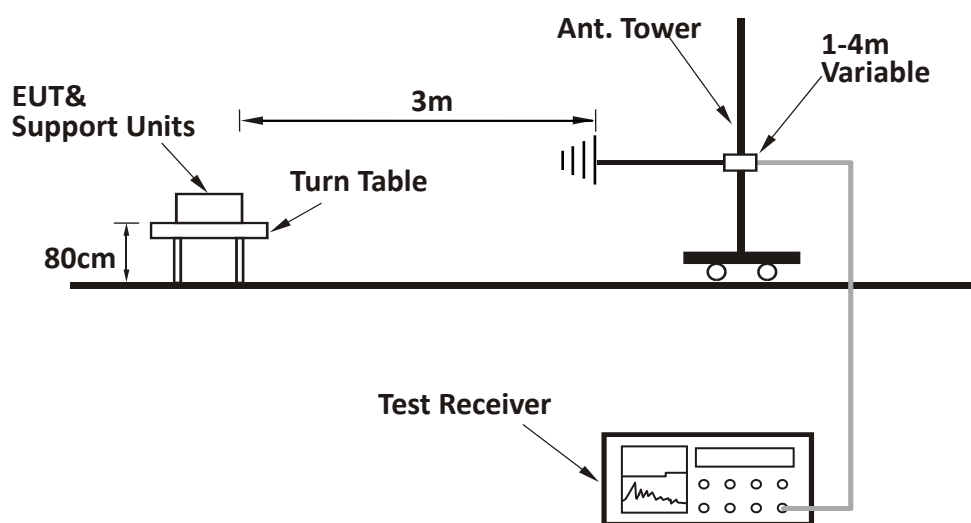

For Radiated emission above 1GHz:

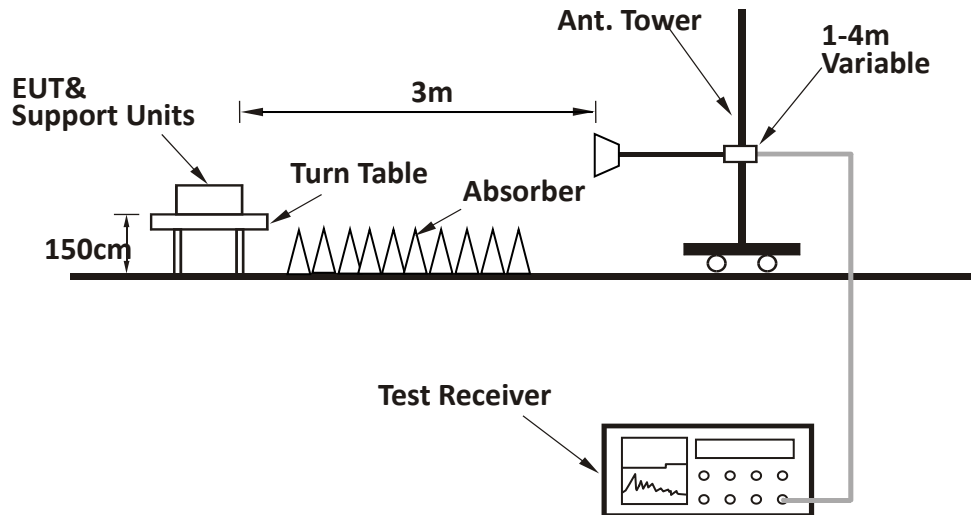

TEST REPORT

7.4 Test Results of Radiated Emissions

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Test data below 1GHz

FPC Antenna:

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	30.00	37.00	21.40	40.00	3.00	PK
	H	82.48	26.10	9.40	40.00	13.90	PK
	H	142.75	31.20	12.80	43.50	12.30	PK
	H	193.29	29.70	11.20	43.50	13.80	PK
	H	527.64	37.70	20.80	46.00	8.30	PK
	H	906.69	109.00	24.40	Fundamental	/	PK
	V	30.00	36.60	21.40	40.00	3.40	PK
	V	86.37	26.30	10.20	40.00	13.70	PK
	V	131.08	30.80	13.60	43.50	12.70	PK
	V	175.79	29.00	11.30	43.50	14.50	PK
	V	537.35	37.80	20.90	46.00	8.20	PK
V	906.69	98.60	24.40	Fundamental	/	PK	
M	H	30.00	36.80	21.40	40.00	3.20	PK
	H	86.37	25.90	10.20	40.00	14.10	PK
	H	142.75	31.20	12.80	43.50	12.30	PK
	H	302.14	31.70	15.80	46.00	14.30	PK
	H	529.58	37.70	20.80	46.00	8.30	PK
	H	916.41	108.00	24.50	Fundamental	/	PK
	V	30.00	37.50	21.40	40.00	2.50	PK
	V	84.43	26.80	9.80	40.00	13.20	PK
	V	117.47	31.10	13.70	43.50	12.40	PK

TEST REPORT

	V	193.29	29.30	11.20	43.50	14.20	PK
	V	533.47	38.30	20.90	46.00	7.70	PK
	V	916.41	98.90	24.50	Fundamental	/	PK
H	H	30.00	36.70	21.40	40.00	3.30	PK
	H	86.37	25.80	10.20	40.00	14.20	PK
	H	142.75	32.40	12.80	43.50	11.10	PK
	H	191.34	29.80	11.20	43.50	13.70	PK
	H	525.69	37.70	20.80	46.00	8.30	PK
	H	924.19	107.30	24.60	Fundamental	/	PK
	V	30.00	37.10	21.40	40.00	2.90	PK
	V	86.37	26.50	10.20	40.00	13.50	PK
	V	117.47	30.90	13.70	43.50	12.60	PK
	V	306.03	31.60	15.90	46.00	14.40	PK
	V	533.47	39.00	20.90	46.00	7.00	PK
	V	924.19	99.40	24.60	Fundamental	/	PK

Dipole Antenna:

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	30.00	37.60	21.40	40.00	2.40	PK
	H	86.37	26.30	10.20	40.00	13.70	PK
	H	136.91	32.50	13.20	43.50	11.00	PK
	H	191.34	31.70	11.20	43.50	11.80	PK
	H	556.79	38.10	21.30	46.00	7.90	PK
	H	906.69	115.90	24.40	Fundamental	/	PK
	V	30.00	36.90	21.40	40.00	3.10	PK
	V	76.65	26.40	8.70	40.00	13.60	PK
	V	121.36	30.90	13.80	43.50	12.60	PK
	V	187.45	30.70	11.20	43.50	12.80	PK
	V	550.96	38.50	21.20	46.00	7.50	PK

TEST REPORT

	V	906.69	106.70	24.40	Fundamental	/	PK
M	H	30.00	37.80	21.40	40.00	2.20	PK
	H	86.37	25.80	10.20	40.00	14.20	PK
	H	136.91	31.30	13.20	43.50	12.20	PK
	H	191.34	30.90	11.20	43.50	12.60	PK
	H	512.08	37.90	20.50	46.00	8.10	PK
	H	916.41	117.20	24.50	Fundamental	/	PK
	V	30.00	38.10	21.40	40.00	1.90	PK
	V	96.09	29.60	11.90	43.50	13.90	PK
	V	125.25	30.70	13.70	43.50	12.80	PK
	V	173.85	29.20	11.40	43.50	14.30	PK
	V	554.85	38.30	21.20	46.00	7.70	PK
	V	916.41	107.30	24.50	Fundamental	/	PK
H	H	30.00	36.20	21.40	40.00	3.80	PK
	H	86.37	26.30	10.20	40.00	13.70	PK
	H	140.80	30.60	12.90	43.50	12.90	PK
	H	288.54	33.70	15.40	46.00	12.30	PK
	H	510.14	38.00	20.50	46.00	8.00	PK
	H	924.19	117.30	24.60	Fundamental	/	PK
	V	30.00	37.60	21.40	40.00	2.40	PK
	V	86.37	26.30	10.20	40.00	13.70	PK
	V	105.81	30.60	13.00	43.50	12.90	PK
	V	185.51	28.90	11.20	43.50	14.60	PK
	V	552.91	37.70	21.20	46.00	8.30	PK
	V	924.19	107.30	24.60	Fundamental	/	PK

TEST REPORT

Test result above 1GHz:

The emission was conducted from 1GHz to 25GHz

FPC antenna:

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	1813.63	52.30	-7.40	74.00	21.70	PK
	H	3601.20	43.20	-0.90	74.00	30.80	PK
	H	5434.87	50.90	4.10	74.00	23.10	PK
	V	1813.63	50.00	-7.40	74.00	24.00	PK
	V	6096.19	47.70	6.70	74.00	26.30	PK
M	H	1833.67	51.00	-7.30	74.00	23.00	PK
	H	2751.50	51.40	-4.20	74.00	22.60	PK
	H	6246.49	44.90	6.60	74.00	29.10	PK
	V	1833.67	50.40	-7.30	74.00	23.60	PK
	V	5374.75	49.10	4.00	74.00	24.90	PK
H	H	1849.70	45.40	-7.20	74.00	28.60	PK
	H	4743.49	48.00	3.00	74.00	26.00	PK
	H	5434.87	50.90	4.10	74.00	23.10	PK
	V	1849.70	43.20	-7.20	74.00	30.80	PK
	V	4743.49	49.40	3.00	74.00	24.60	PK
	V	6096.19	47.70	6.70	74.00	26.30	PK

Dipole antenna:

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	1813.63	52.30	-7.40	74.00	21.70	PK
	H	3601.20	43.20	-0.90	74.00	30.80	PK
	H	5434.87	50.90	4.10	74.00	23.10	PK
	V	1813.63	50.00	-7.40	74.00	24.00	PK
	V	6096.19	47.70	6.70	74.00	26.30	PK
M	H	1833.67	51.00	-7.30	74.00	23.00	PK
	H	6246.49	44.90	6.60	74.00	29.10	PK
	V	1833.67	50.40	-7.30	74.00	23.60	PK
	V	5374.75	49.10	4.00	74.00	24.90	PK

TEST REPORT

H	H	1849.70	45.40	-7.20	74.00	28.60	PK
	H	4743.49	48.00	3.00	74.00	26.00	PK
	H	5434.87	50.90	4.10	74.00	23.10	PK
	V	1849.70	43.20	-7.20	74.00	30.80	PK
	V	4743.49	49.40	3.00	74.00	24.60	PK
	V	6096.19	47.70	6.70	74.00	26.30	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
 Limit = 40.00dBuV/m.
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;
 Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

8 Power line conducted emission


Test result: Pass

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

8.2 Test Configuration

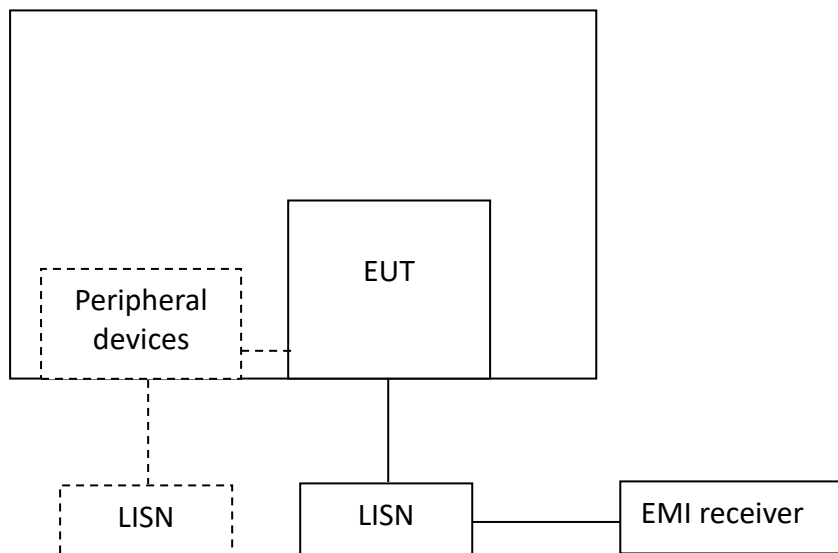

8.3 Measurement Procedure



Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

8.4 Test Results of Power line conducted emission

Test Curve:

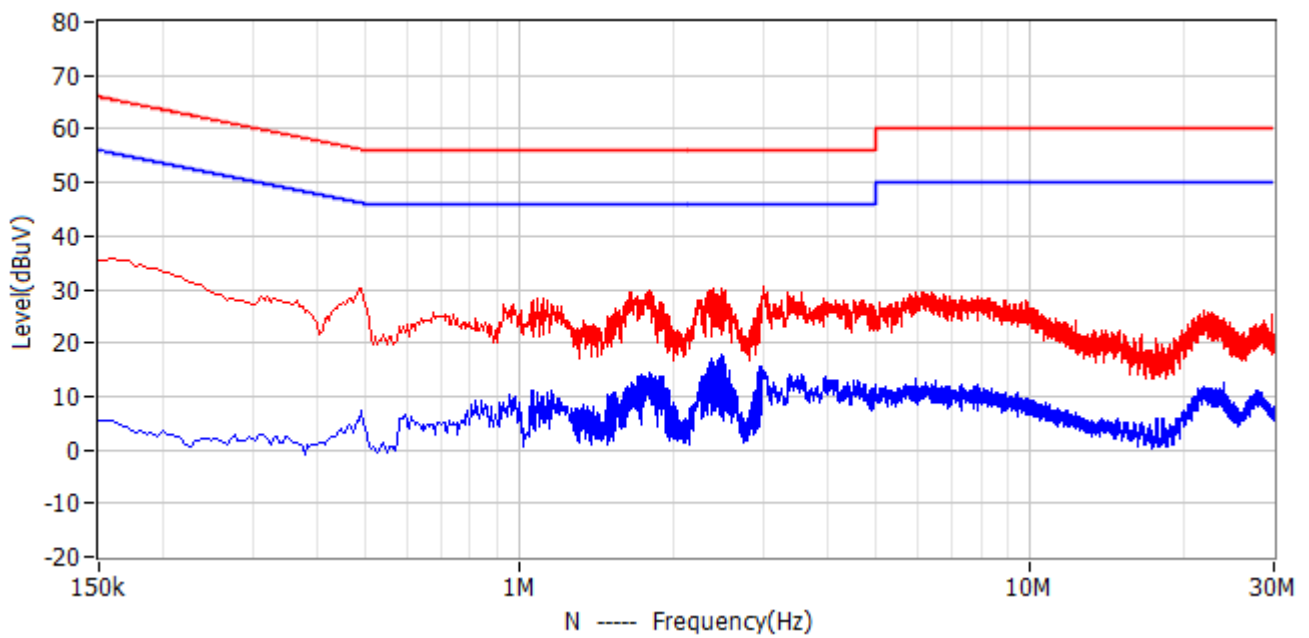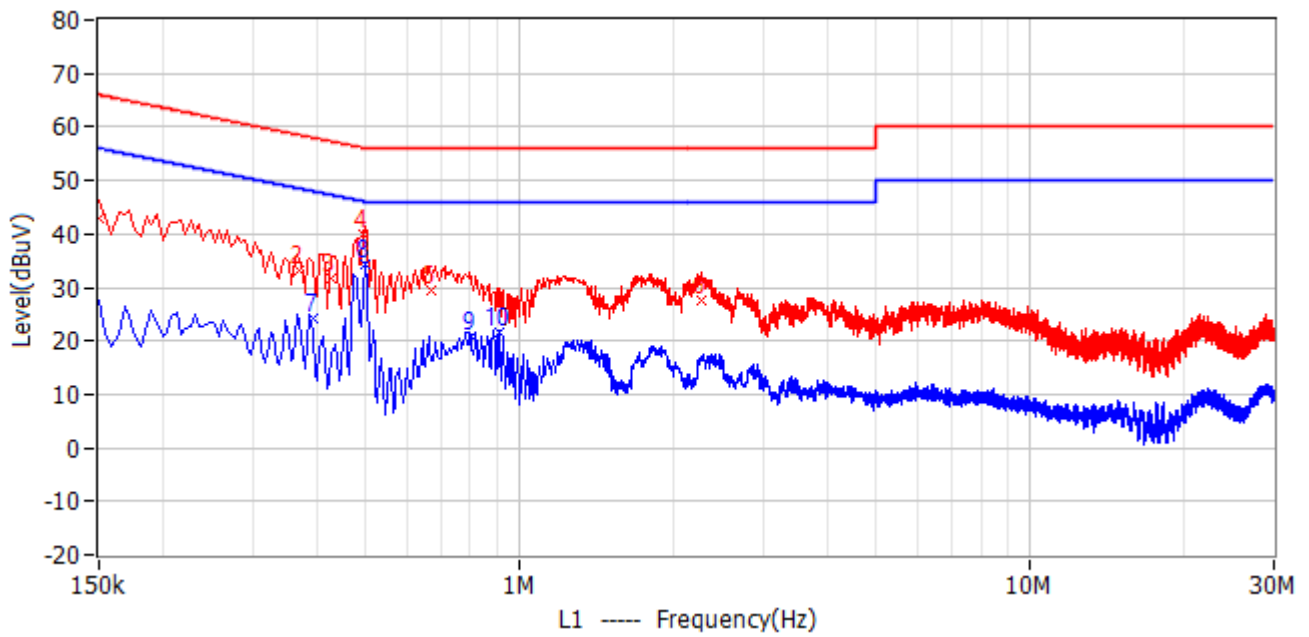

TEST REPORT

Test Data:

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1	150.000kHz	66.0	42.9	-23.1	32.5	10.4	QP	L1
2	370.500kHz	58.5	33.0	-25.5	22.7	10.3	QP	L1
3	429.000kHz	57.3	31.8	-25.4	21.5	10.3	QP	L1
4	492.000kHz	56.1	39.9	-16.2	29.6	10.3	QP	L1
5	672.000kHz	56.0	29.3	-26.7	18.8	10.5	QP	L1
6	2.270MHz	56.0	27.7	-28.3	17.2	10.5	QP	L1
7	393.000kHz	48.0	24.3	-23.7	14.0	10.3	CAV	L1
8	496.500kHz	46.1	34.3	-11.8	24.0	10.3	CAV	L1
9	807.000kHz	46.0	20.7	-25.3	10.1	10.6	CAV	L1
10	910.500kHz	46.0	21.5	-24.5	10.9	10.6	CAV	L1

- Remark: 1. Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
 2. Level = Original Receiver Reading + Factor
 3. Delta= Level - Limit
 4. If the PK Level is lower than AV limit, the AV test can be elided.

Example: Assuming LISN Factor = 10.00dB, Cable Loss = 2.00dB,
 Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.
 Then Factor = 10.00 + 2.00 = 12.00dB;
 Level = 10dBuV + 12.00dB = 22.00dBuV;
 Delta = 22.00dBuV - 66.00dBuV = -44.00dB.

9 Occupied Bandwidth

Test result: **Tested**

9.1 Limit

None


9.2 Measurement Procedure

The occupied bandwidth per RSS-Gen was measured using the Spectrum Analyzer.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

9.3 Test Configuration

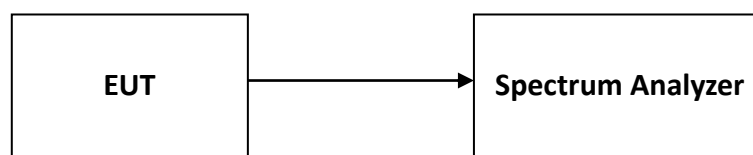

9.4 The results of Occupied Bandwidth

Please refer to Appendix A

10 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:


EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

Appendix A: Test results

RF Output Power


Test Result and Data

Maximum Output Power				
Test Frequency (MHz)	Power (dBm)	Antenna Gain (dBi)	e.i.r.p (dBm)	Result
906	16.13	3.0	19.13	Pass
916	16.08	3.0	19.08	Pass
924	16.14	3.0	19.14	Pass

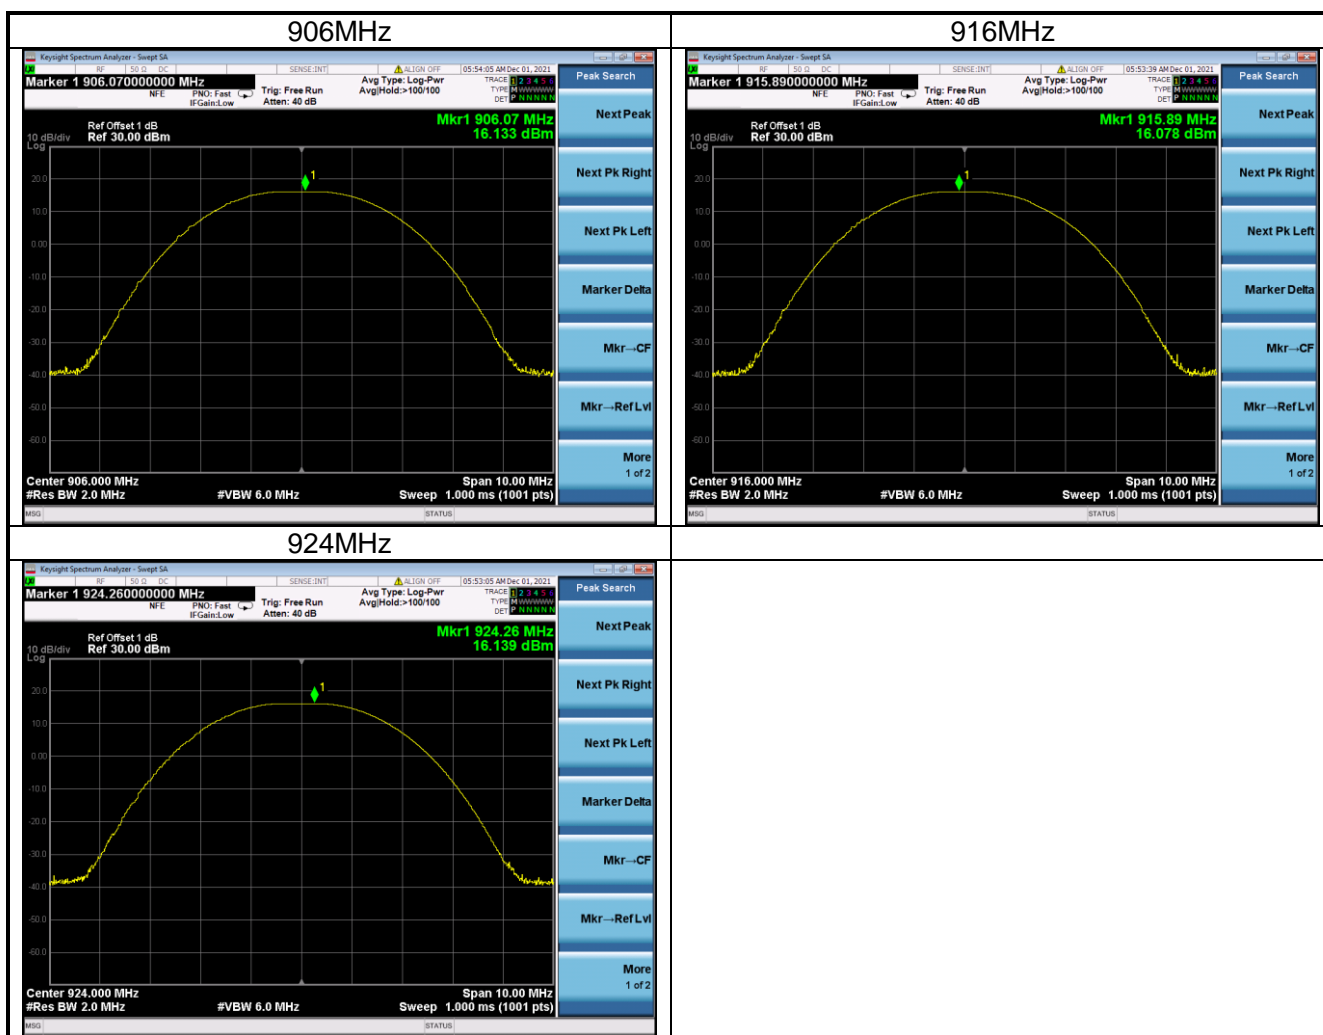

Power Spectral Density Test Result and Data


Peak Power Spectral Density		
Test Frequency (MHz)	PSD (dBm/3kHz)	Result
906	7.78	Pass
916	7.77	Pass
924	7.33	Pass

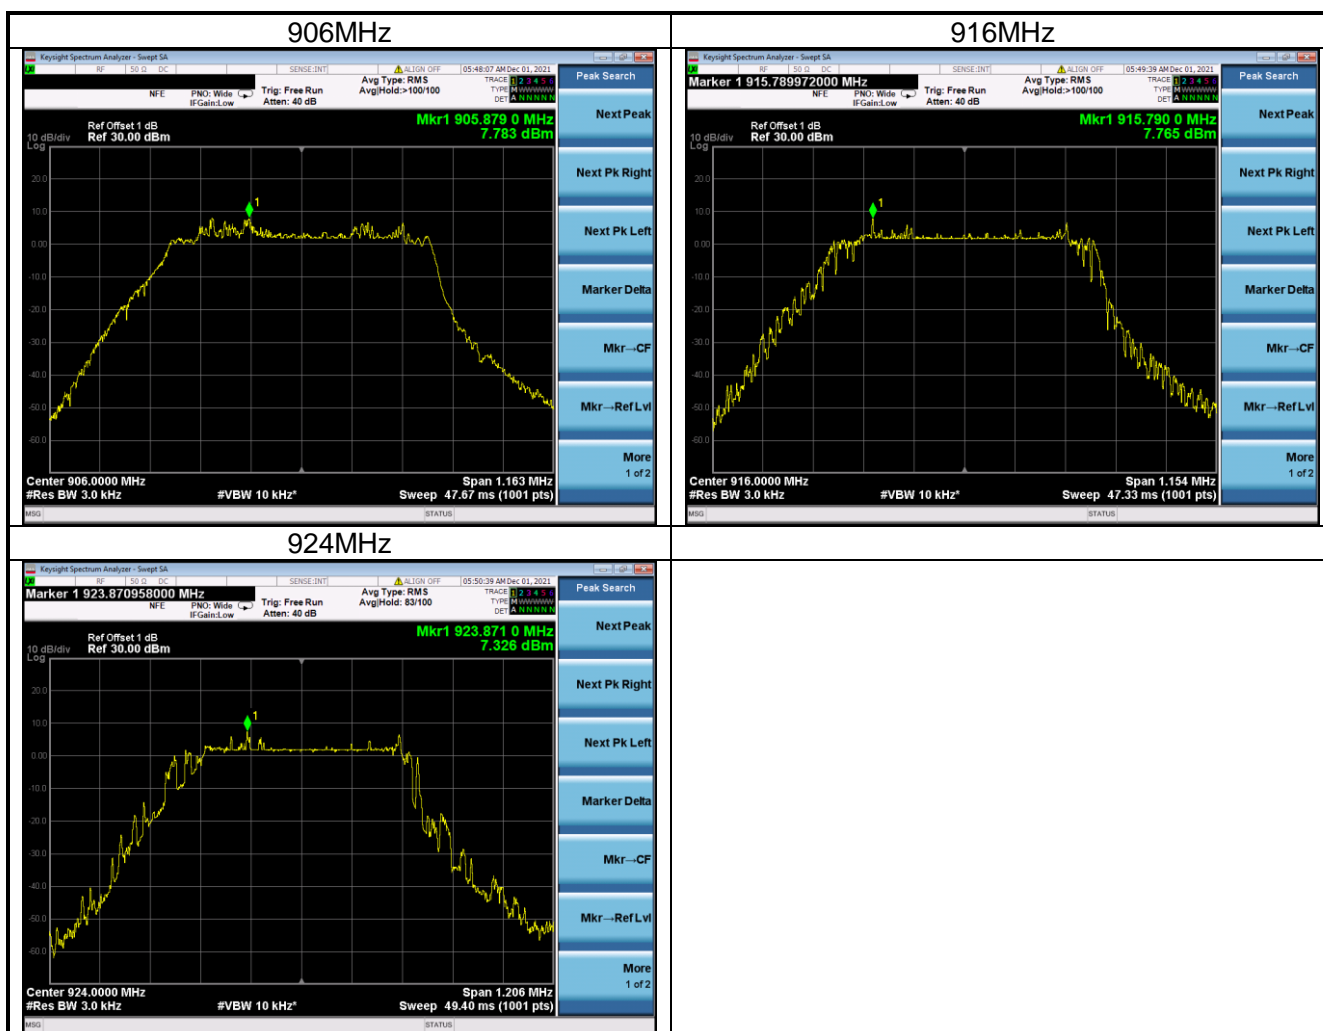

6dB BandWidth


Test Result and Data

Occupied 6dB Bandwidth			
Test Frequency (MHz)	Occupied Bandwidth (kHz)	Min Limit (kHz)	Result
906	775.2	500	Pass
916	750.9	500	Pass
924	804.2	500	Pass

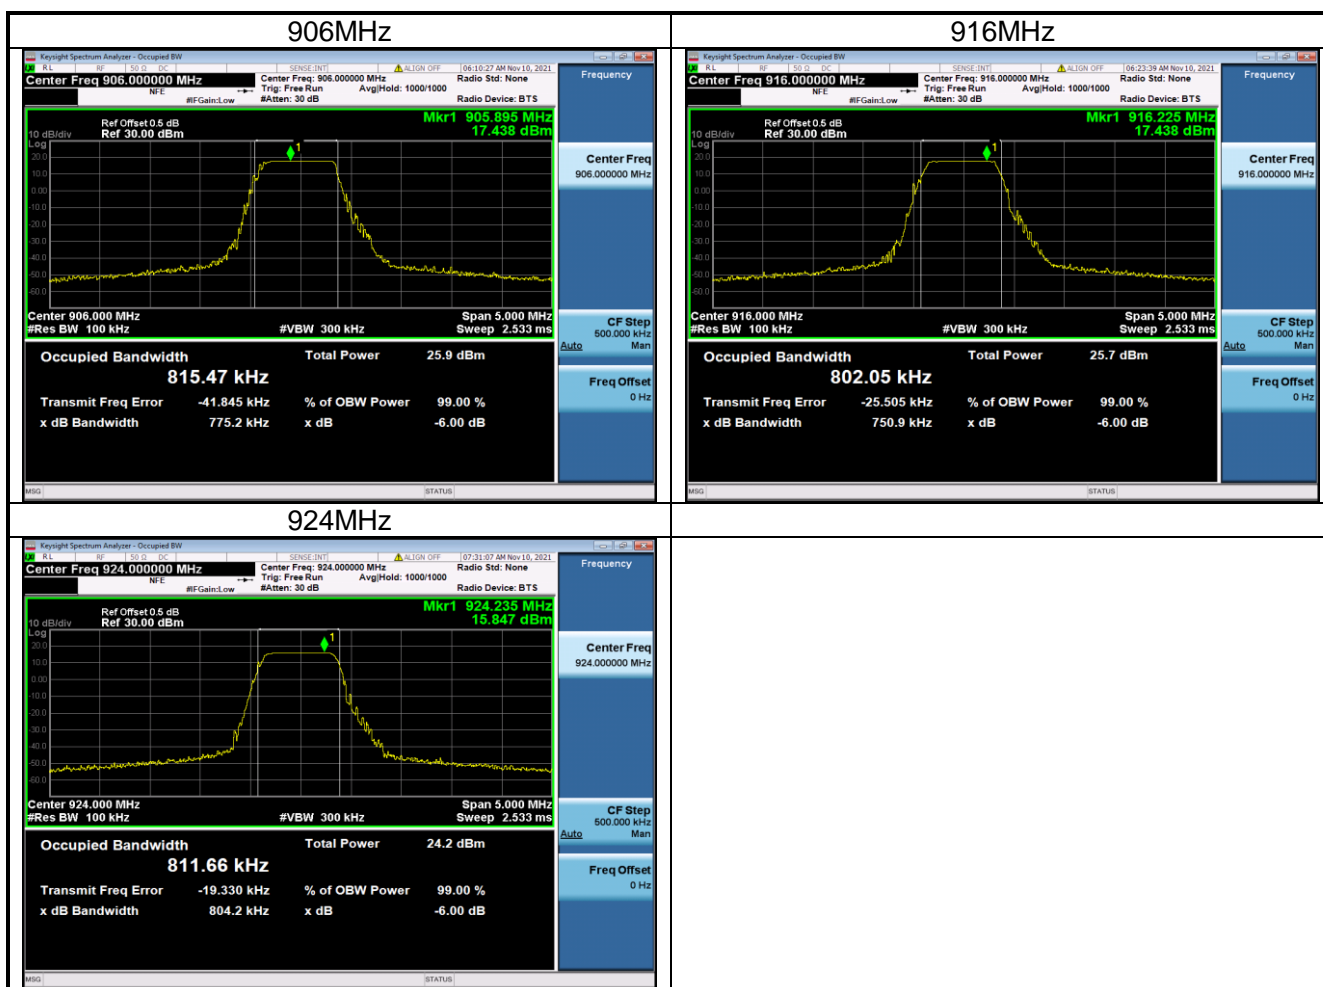

99% BandWidth Test Result and Data

99% Occupied Bandwidth		
Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	Result
906	0.6792	Pass
916	0.6758	Pass
924	0.6778	Pass

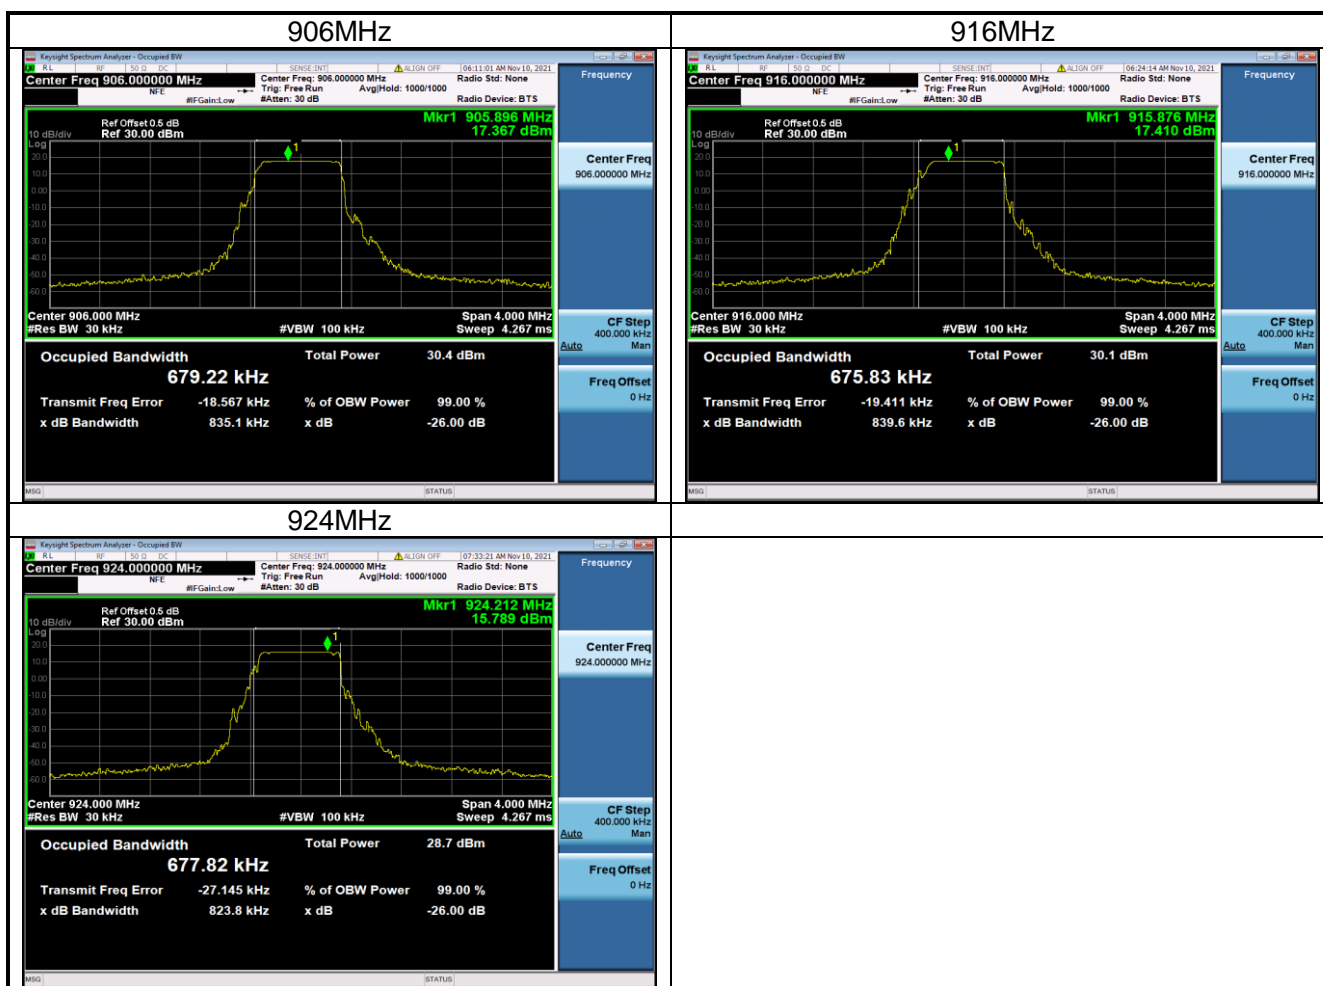



TEST REPORT

Transmitter Spurious Emission

Test Result and Data

Transmitter Spurious Emission			
Test Frequency (MHz)	Test Range	Power (dBm)	Result
906	Reference Level	14.80	Pass
906	1MHz~890MHz	-59.40	Pass
906	950MHz~10000MHz	-46.68	Pass
916	Reference Level	14.86	Pass
916	1MHz~890MHz	-60.31	Pass
916	950MHz~10000MHz	-45.54	Pass
924	Reference Level	14.94	Pass
924	1MHz~890MHz	-59.44	Pass
924	950MHz~10000MHz	-45.15	Pass

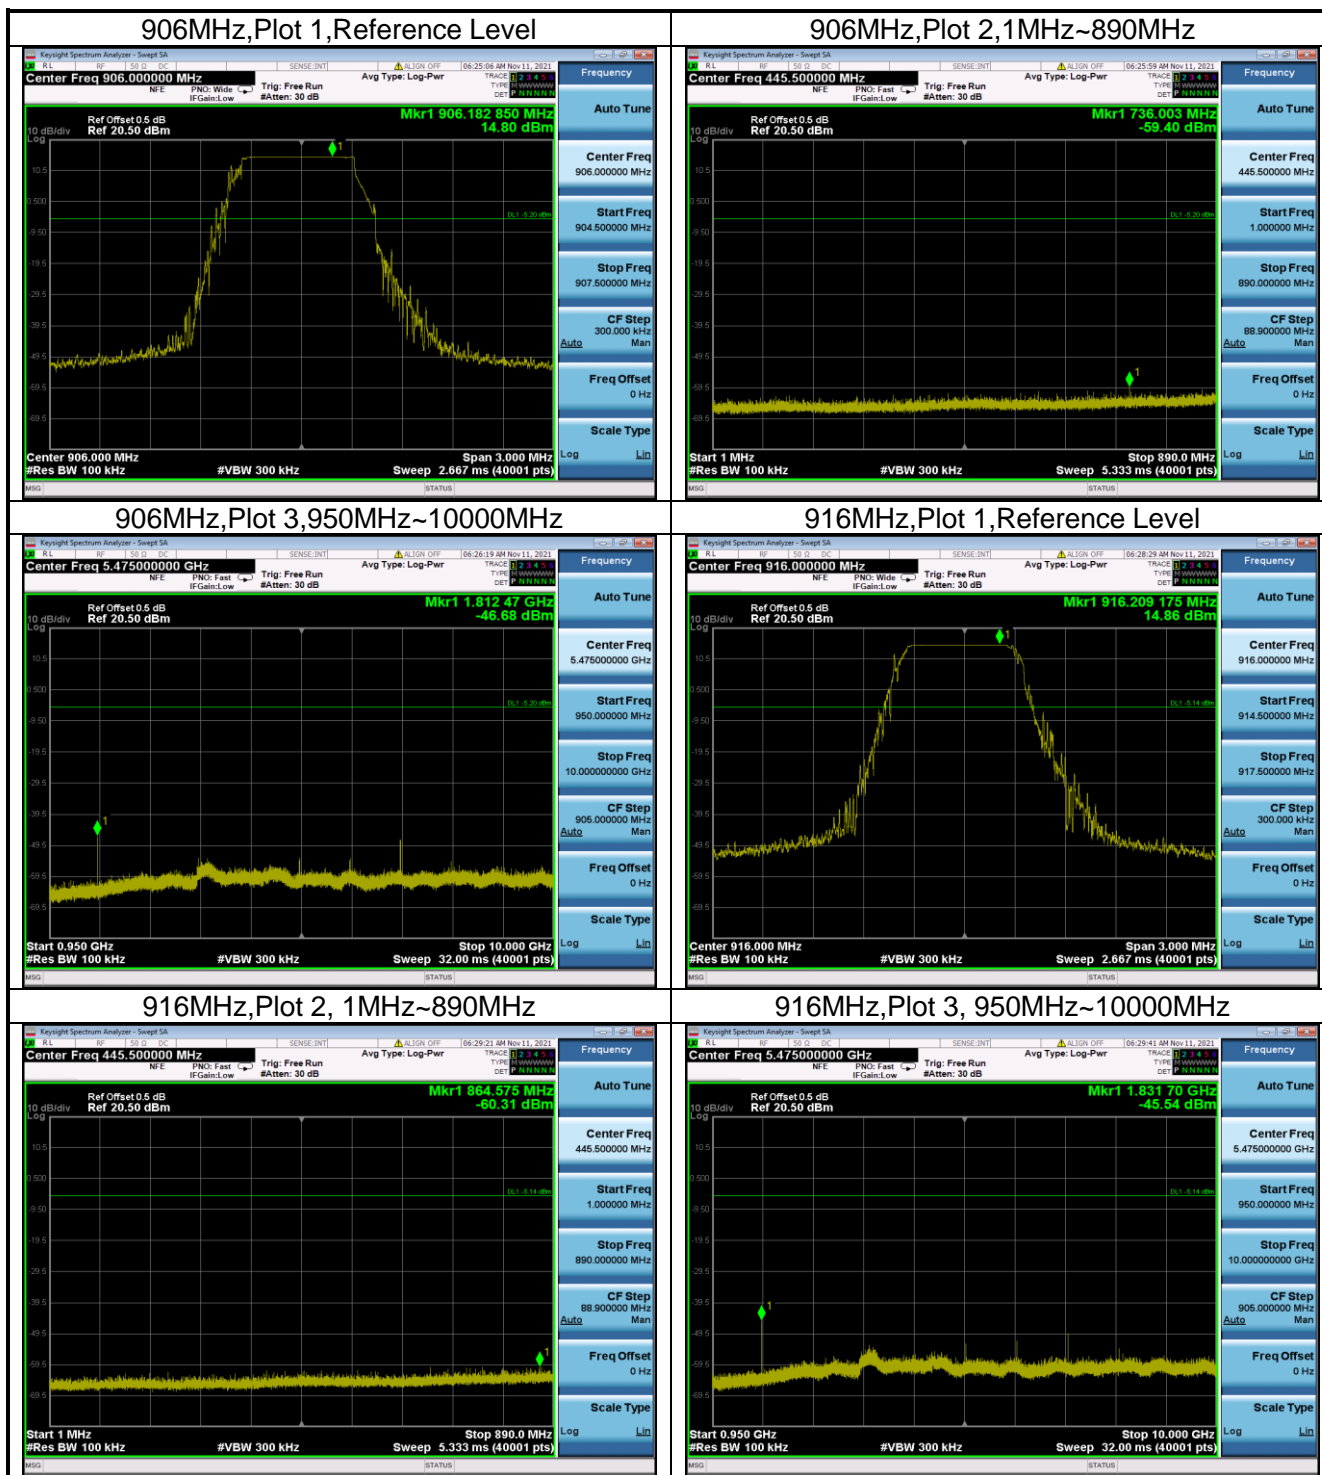

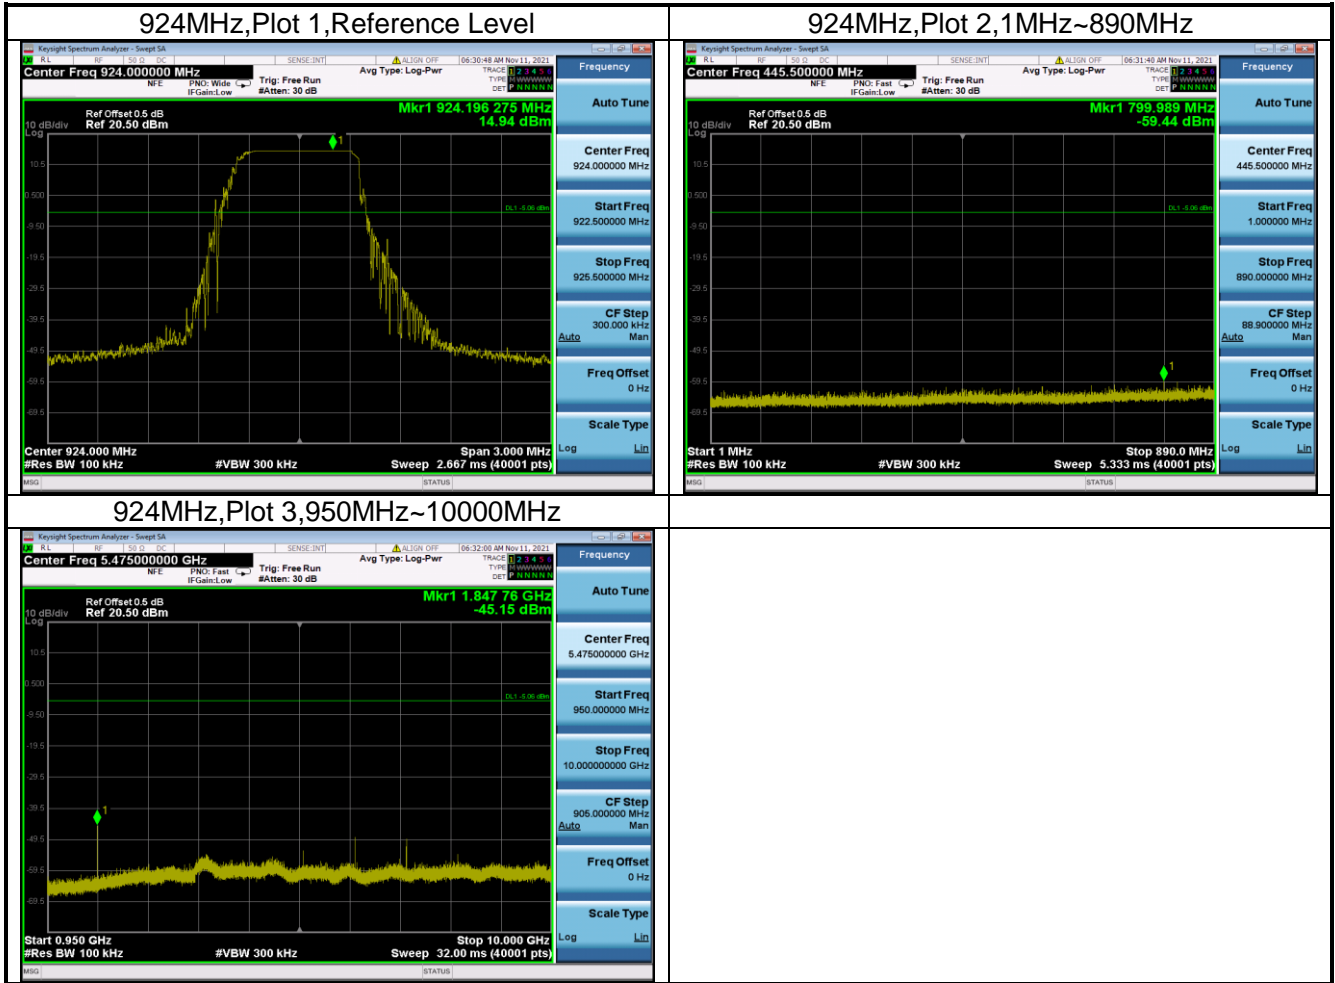

***** END *****