

RAE Systems Inc.

RF TEST REPORT

Report Type:

FCC Part 15.247 & ISED RSS-247 RF report

Model:

RMWIFIC

REPORT NUMBER

190400902SHA-001

ISSUE DATE

May 15, 2019

DOCUMENT CONTROL NUMBER:

TTRF15.247-03_V1 © 2018 Intertek



Applicant: RAE Systems Inc.
1349 Moffett Park Drive, Sunnyvale, CA, 94089, USA

Manufacturer: RAE Systems Inc.
1349 Moffett Park Drive, Sunnyvale, CA, 94089, USA

Factory: RAE Systems (Shanghai) Inc
990 East Huiwang Road, Jiading District, Shanghai, China

FCC ID: SU3RMWIFIC
IC: 20969-RMWIFIC

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2018): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 2 (February 2017): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 (April 2018): General Requirements for Compliance of Radio Apparatus

PREPARED BY:

REVIEWED BY:



Project Engineer
Nemo Li



Reviewer
Daniel Zhao

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY	5
MEASUREMENT RESULT SUMMARY	6
1 GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 TECHNICAL SPECIFICATION	7
1.3 ANTENNA INFORMATION.....	7
1.4 DESCRIPTION OF TEST FACILITY	8
2 TEST SPECIFICATIONS	9
2.1 STANDARDS OR SPECIFICATION	9
2.2 MODE OF OPERATION DURING THE TEST.....	9
2.3 TEST SOFTWARE LIST	10
2.4 TEST PERIPHERALS LIST	10
2.5 TEST ENVIRONMENT CONDITION:.....	10
2.6 INSTRUMENT LIST	11
2.7 MEASUREMENT UNCERTAINTY	13
3 MINIMUM 6DB BANDWIDTH	14
3.1 LIMIT	14
3.2 MEASUREMENT PROCEDURE	14
3.3 TEST CONFIGURATION	14
3.4 TEST RESULTS OF MINIMUM 6DB BANDWIDTH	14
4 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.	15
4.1 LIMIT	15
4.2 MEASUREMENT PROCEDURE	15
4.3 TEST CONFIGURATION	15
4.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	15
5 POWER SPECTRUM DENSITY	16
5.1 LIMIT	16
5.2 MEASUREMENT PROCEDURE	16
5.3 TEST CONFIGURATION	16
5.4 TEST RESULTS OF POWER SPECTRUM DENSITY	16
6 EMISSION OUTSIDE THE FREQUENCY BAND	17
6.1 LIMIT	17
6.2 MEASUREMENT PROCEDURE	17
6.3 TEST CONFIGURATION	18
6.4 THE RESULTS OF EMISSION OUTSIDE THE FREQUENCY BAND	18
7 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS	19
7.1 LIMIT	19
7.2 MEASUREMENT PROCEDURE	19
7.3 TEST CONFIGURATION	21
7.4 TEST RESULTS OF RADIATED EMISSIONS	23
8 POWER LINE CONDUCTED EMISSION	28
8.1 LIMIT	28
8.2 TEST CONFIGURATION	28
8.3 MEASUREMENT PROCEDURE	29

TEST REPORT

- 8.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION..... 30
- 9 OCCUPIED BANDWIDTH..... 32**
 - 9.1 LIMIT 32
 - 9.2 MEASUREMENT PROCEDURE 32
 - 9.3 TEST CONFIGURATION 32
 - 9.4 THE RESULTS OF OCCUPIED BANDWIDTH..... 32
- 10 ANTENNA REQUIREMENT 33**
- APPENDIX A: TEST RESULTS 34**

Revision History

Report No.	Version	Description	Issued Date
190400902SHA-001	Rev. 01	Initial issue of report	May 15, 2019

Measurement result summary

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-247 Issue 2 Clause 5.2	Pass
Maximum conducted output power and e.i.r.p.	15.247(b)(3)	RSS-247 Issue 2 Clause 5.4	Pass
Power spectrum density	15.247(e)	RSS-247 Issue 2 Clause 5.2	Pass
Emission outside the frequency band	15.247(d)	RSS-247 Issue 2 Clause 5.5	Pass
Radiated Emissions in restricted frequency bands	15.247(d), 15.205&15.209	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.207(a)	RSS-Gen Issue 5 Clause 8.8	Pass
Occupied bandwidth	-	RSS-Gen Issue 5 Clause 6.6	Tested
Antenna requirement	15.203	-	Pass

Notes: 1: NA =Not Applicable

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	RMWIFIC
Type/Model:	RMWIFIC
Description of EUT:	EUT is a product with WiFi function.
Rating:	DC 1.9V
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	/
Hardware Version:	/
Sample received date:	April 20, 2019
Date of test:	April 20, 2019 ~ May 15, 2019

1.2 Technical Specification

Frequency Range:	2400MHz ~ 2483.5MHz
Support Standards:	802.11b, 802.11g, 802.11n(HT20)
Type of Modulation:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g: OFDM (64-QAM, 16-QAM, QPSK, BPSK) 802.11n(HT20): OFDM (64-QAM, 16-QAM, QPSK, BPSK)
Channel Number:	11 Channels
Channel Separation:	5 MHz

1.3 Antenna information

No.	Model	Antenna type	Antenna Gain
1	-	PCB	2dBi
2	-	Pole	4.9dBi

Note: EUT has one antenna port, it can use one antenna at a time. EUT can use two types of antenna, one is PCB antenna, another is Pole antenna.

TEST REPORT**1.4 Description of Test Facility**

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN1175
	IC Registration Lab CAB identifier.: CN0051
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

TEST REPORT

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2018)
 ANSI C63.10 (2013)
 KDB 558074 (v05r02)
 RSS-247 Issue 2 (February 2017)
 RSS-Gen Issue 5 (April 2018)

2.2 Mode of operation during the test

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

Software name	Manufacturer	Version	Supplied by
SSCOM	-	-	Client

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)	Mode	Lowest (MHz)	Middle (MHz)	Highest (MHz)
2400-2483.5	802.11b	2412	2437	2462
	802.11g	2412	2437	2462
	802.11n(HT20)	2412	2437	2462

Data rate and Power setting:

The pre-scan for the conducted power with all data rates in each modulation and band was used, and the worst case was found and used in all test cases. After this pre-scan, we choose the following table of the data rate as the worst case.

Frequency Band (MHz)	Mode	Worst case data rate
2400-2483.5	802.11b	1Mbps
	802.11g	6Mbps
	802.11n(HT20)	MCS0

Power Setting parameter			
Mode	Channel		
	Lowest	Middle	Highest
802.11b	3	3	3
802.11g	3	3	3
802.11n(HT20)	3	3	3

TEST REPORT

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	DELL 5480	-

2.5 Test environment condition:

Test items	Temperature	Humidity
Minimum 6dB Bandwidth	24°C	58%RH
Maximum conducted output power and e.i.r.p.		
Power spectrum density		
Emission outside the frequency band		
Occupied bandwidth		
Radiated Emissions in restricted frequency bands	24°C	58%RH
Power line conducted emission	24°C	58%RH

2.6 Instrument list

Conducted Emission/Disturbance Power/Tri-loop Test/CDN method					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCS 30	EC 2107	2019-07-15
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2019-11-30
<input type="checkbox"/>	A.M.N.	R&S	ENV 216	EC 3393	2019-07-04
<input type="checkbox"/>	A.M.N.	R&S	ENV4200	EC 3558	2019-06-10
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2019-09-12
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112D	EC 4206	2019-06-10
<input checked="" type="checkbox"/>	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC5262	2019-06-10
<input checked="" type="checkbox"/>	Horn antenna	R&S	HF 906	EC 3049	2019-11-17
<input type="checkbox"/>	Horn antenna	ETS	3117	EC 4792-1	2020-01-09
<input checked="" type="checkbox"/>	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2020-07-09
<input checked="" type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2020-03-07
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2020-03-05
<input type="checkbox"/>	Power sensor	Agilent	U2021XA	EC 5338-1	2020-03-05
<input type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2020-03-05
<input type="checkbox"/>	Spectrum analyzer	R&S	CMW500	EC5944	2019-12-22
<input type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2020-03-05
<input type="checkbox"/>	Mobile Test System	Litepoint	lqxel	EC 5176	2020-01-08
<input type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2019-09-12
Tet Site					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2020-01-14
<input type="checkbox"/>	Shielded room	Zhongyu	-	EC 2839	2020-01-14
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2019-07-31
<input type="checkbox"/>	Fully-anechoic chamber	Albatross project	-	EC 3047	2019-07-31
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2020-02-28
<input type="checkbox"/>	Therom-	ZJ1-2A	S.M.I.F.	EC 2122	2020-03-11

TEST REPORT

	Hygrograph				
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 5198	2020-01-18
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3326	2020-03-28
<input type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2019-07-01

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	± 0.74dB
Radiated Emissions in restricted frequency bands below 1GHz	± 4.90dB
Radiated Emissions in restricted frequency bands above 1GHz	± 5.02dB
Emission outside the frequency band	± 2.89dB
Power line conducted emission	± 3.19dB

TEST REPORT

3 Minimum 6dB bandwidth

Test result: Pass


3.1 Limit

For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Measurement Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3 Test Configuration

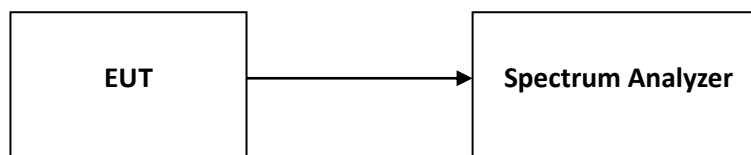

3.4 Test Results of Minimum 6dB bandwidth

Please refer to Appendix A

4 Maximum peak conducted output power and e.i.r.p.

Test result: Pass

4.1 Limit


For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 W. (The e.i.r.p. shall not exceed 4 W)

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

4.2 Measurement Procedure

The maximum peak conducted output power was measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth .

4.3 Test Configuration

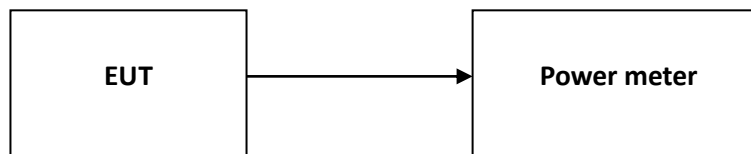

4.4 Test Results of Maximum peak conducted output power

Please refer to Appendix A

5 Power spectrum density

Test result: Pass

5.1 Limit


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and 8+ (6 –antenna gain-beam forming gain).

5.2 Measurement Procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

5.3 Test Configuration

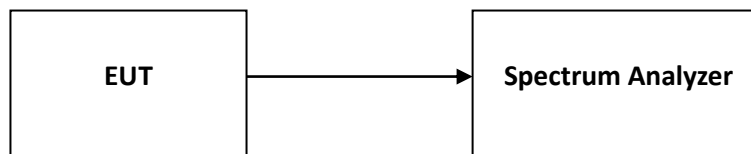

5.4 Test Results of Power spectrum density

Please refer to Appendix A

6 Emission outside the frequency band

Test result: Pass

6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Measurement Procedure

Reference level measurement

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

6.3 Test Configuration

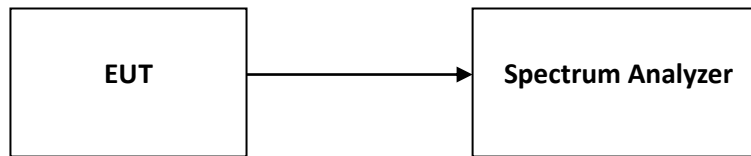

6.4 The results of Emission outside the frequency band

Please refer to Appendix A

7 Radiated Emissions in restricted frequency bands

Test result: Pass

7.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meters chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to peak or quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detector function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for peak or quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz at frequency above 1GHz for peak detection above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 3 x RBW (Duty cycle $\geq 98\%$) for average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

7.3 Test Configuration


For Radiated emission below 30MHz:

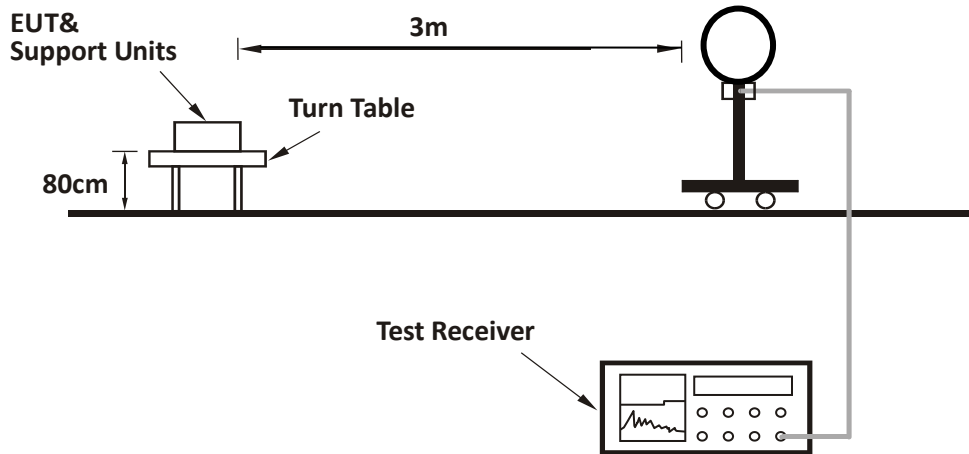

For Radiated emission 30MHz to 1GHz:

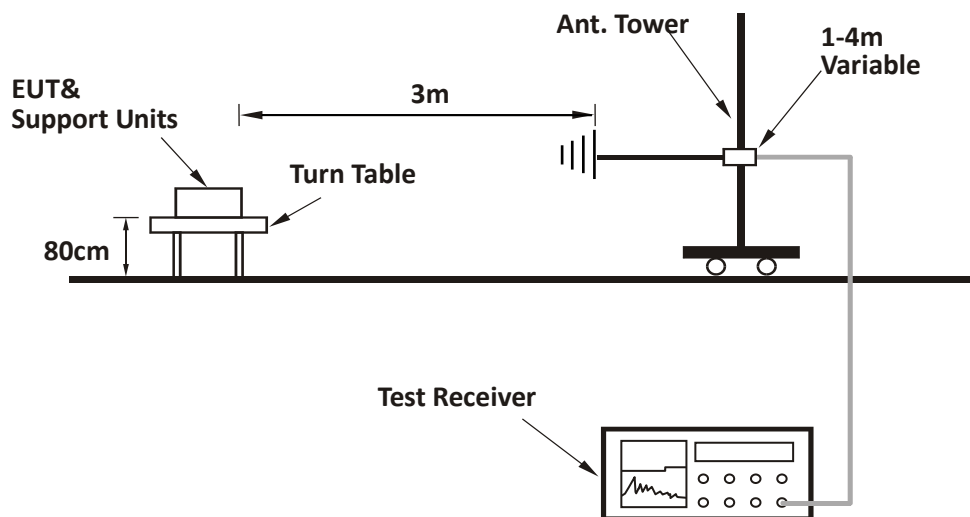

For Radiated emission above 1GHz:

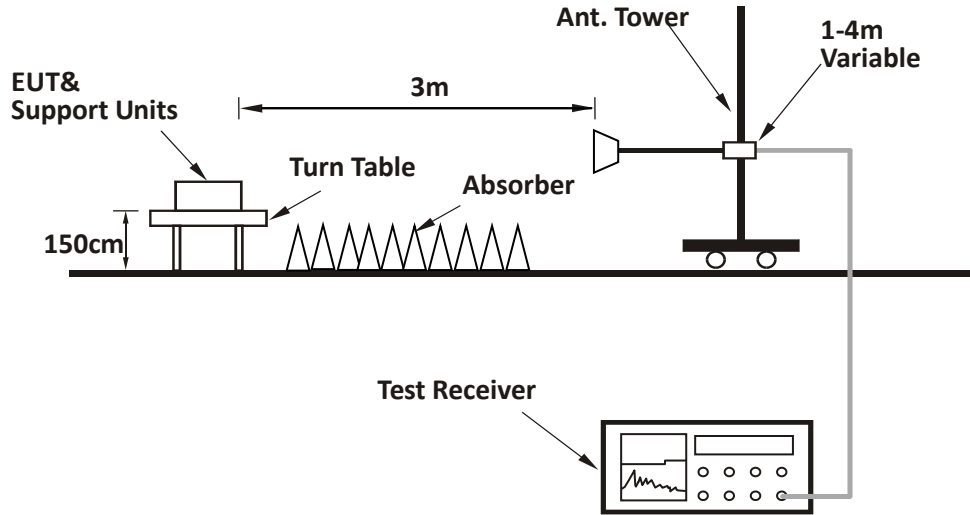

TEST REPORT

7.4 Test Results of Radiated Emissions

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Test data below 1GHz

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	30.00	21.40	18.60	40	18.60	PK
H	72.77	25.90	7.40	40	14.10	PK
H	115.53	25.30	13.00	43.5	18.20	PK
H	162.18	24.90	11.00	43.5	18.60	PK
H	243.83	35.60	13.30	46	10.40	PK
H	333.25	38.40	15.70	46	7.60	PK
H	383.79	28.90	17.10	46	17.10	PK
H	601.50	28.80	20.80	46	17.20	PK
H	861.98	30.10	23.20	46	15.90	PK
V	30.00	38.50	18.60	40	1.50	PK
V	55.27	31.60	7.60	40	8.40	PK
V	74.71	38.40	7.50	40	1.60	PK
V	86.37	34.90	9.10	40	5.10	PK
V	123.31	35.60	13.10	43.5	7.90	PK
V	191.34	31.90	10.80	43.5	11.60	PK
V	337.13	31.50	15.90	46	14.50	PK
V	409.06	27.00	17.70	46	19.00	PK
V	576.23	27.50	20.50	46	18.50	PK
V	906.69	30.40	23.50	46	15.60	PK

TEST REPORT

Test result above 1GHz with Pole antenna:

The emission was conducted from 1GHz to 25GHz

802.11b

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H/V	2412	103.00	34.10	Fundamental	/	PK
	H/V	2390	54.40	34.20	74.00	19.60	PK
	H/V	2390	40.94	34.20	54.00	13.06	AV
	H/V	6547	43.50	-3.60	74.00	20.50	PK
M	H/V	2437	102.50	34.20	Fundamental	/	PK
	H/V	6547	48.50	-3.60	74.00	25.50	PK
H	H/V	2462	101.00	34.40	Fundamental	/	PK
	H/V	2483.5	54.47	34.80	74.00	19.53	PK
	H/V	2483.5	52.50	34.80	54.00	1.50	AV
	H/V	6547	52.50	-3.60	74.00	21.50	PK

802.11g

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H/V	2412	102.50	34.10	Fundamental	/	PK
	H/V	2390	70.32	34.20	74.00	3.68	PK
	H/V	2390	52.32	34.20	54.00	1.68	AV
	H/V	6547	48.50	-3.60	74.00	25.50	PK
M	H/V	2437	102.50	34.20	Fundamental	/	PK
	H/V	6547	50.50	-3.60	74.00	23.50	PK
H	H/V	2462	102.50	34.40	Fundamental	/	PK
	H/V	2483.5	68.88	34.80	74.00	5.12	PK
	H/V	2483.5	51.02	34.80	54.00	2.98	AV
	H/V	6547	52.50	-3.60	74.00	21.50	PK

TEST REPORT

802.11n(HT20)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H/V	2412	104.00	34.10	Fundamental	/	PK
	H/V	2390	71.71	34.20	74.00	2.29	PK
	H/V	2390	50.23	34.20	54.00	3.77	AV
	H/V	6547	47.00	-3.60	74.00	27.00	PK
M	H/V	2437	103.00	34.20	Fundamental	/	PK
	H/V	6547	49.50	-3.60	74.00	24.50	PK
H	H/V	2462	102.00	34.40	Fundamental	/	PK
	H/V	2483.5	67.67	34.80	74.00	6.33	PK
	H/V	2483.5	48.01	34.80	54.00	5.99	AV
	H/V	6547	51.50	-3.60	74.00	22.50	PK

Test result above 1GHz with PCB antenna:

The emission was conducted from 1GHz to 25GHz

802.11b

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H/V	2412	99.00	34.10	Fundamental	/	PK
	H/V	2390	52.40	34.20	74.00	21.60	PK
	H/V	6547	43.20	-3.60	74.00	20.80	PK
M	H/V	2437	99.50	34.20	Fundamental	/	PK
	H/V	6547	48.50	-3.60	74.00	25.50	PK
H	H/V	2462	98.00	34.40	Fundamental	/	PK
	H/V	2483.5	52.50	34.80	74.00	21.50	PK
	H/V	6547	52.50	-3.60	74.00	21.50	PK

TEST REPORT

802.11g

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H/V	2412	99.50	34.10	Fundamental	/	PK
	H/V	2390	68.50	34.20	74.00	5.50	PK
	H/V	2390	51.60	34.20	54.00	2.40	AV
	H/V	6547	48.20	-3.60	74.00	25.80	PK
M	H/V	2437	99.50	34.20	Fundamental	/	PK
	H/V	6547	50.20	-3.60	74.00	23.80	PK
H	H/V	2462	99.50	34.40	Fundamental	/	PK
	H/V	2483.5	67.50	34.80	74.00	6.50	PK
	H/V	2483.5	51.00	34.80	54.00	3.00	AV
	H/V	6547	52.20	-3.60	74.00	21.80	PK

802.11n(HT20)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H/V	2412	101.00	34.10	Fundamental	/	PK
	H/V	2390	70.50	34.20	74.00	3.50	PK
	H/V	2390	49.50	34.20	54.00	4.50	AV
	H/V	6547	46.50	-3.60	74.00	27.50	PK
M	H/V	2437	100.50	34.20	Fundamental	/	PK
	H/V	6547	49.20	-3.60	74.00	24.80	PK
H	H/V	2462	99.50	34.40	Fundamental	/	PK
	H/V	2483.5	66.50	34.80	74.00	7.50	PK
	H/V	2483.5	47.50	34.80	54.00	6.50	AV
	H/V	6547	51.20	-3.60	74.00	22.80	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

TEST REPORT

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$;
Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;
Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.

8 Power line conducted emission


Test result: Pass

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

8.2 Test Configuration

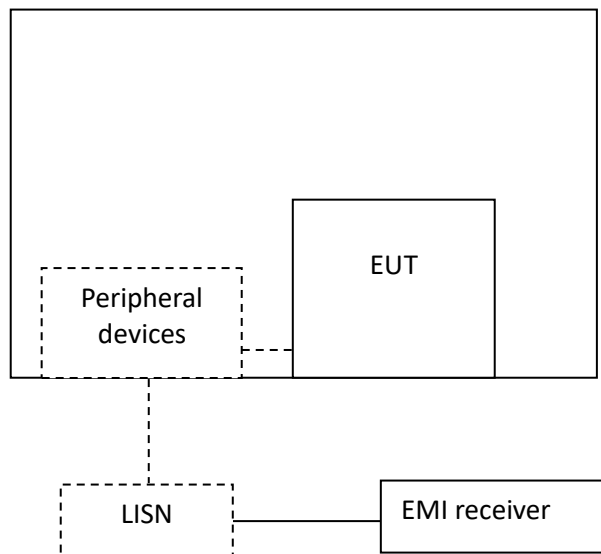

TEST REPORT**8.3 Measurement Procedure**


Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.


TEST REPORT

8.4 Test Results of Power line conducted emission

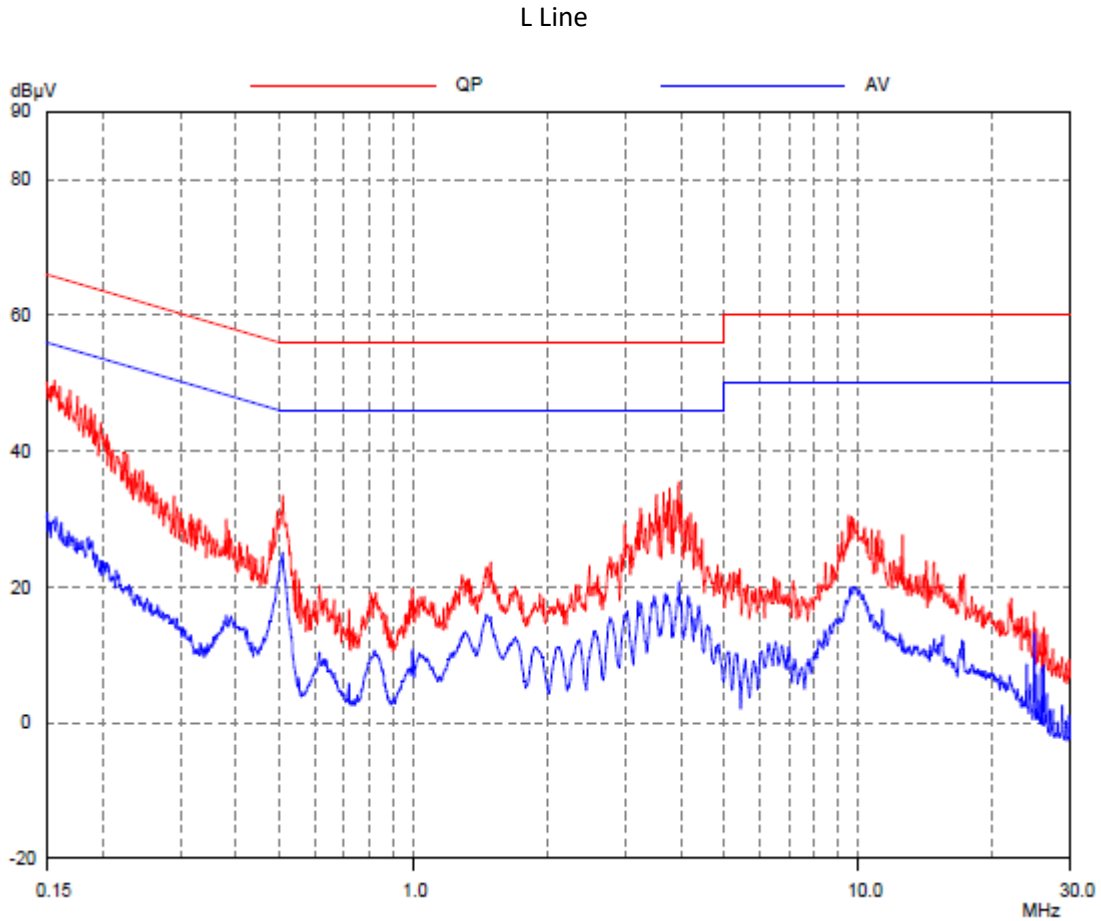

Frequency (MHz)	Quasi-peak			Average		
	level dB(µV)	Limit dB(µV)	Margin (dB)	level dB(µV)	limit dB(µV)	Margin (dB)
0.16	50.80	65.67	14.87	28.60	55.67	27.07
0.50	32.30	56.02	23.72	24.40	46.02	21.62
0.88	34.20	56.00	21.80	16.50	46.00	29.50
1.47	31.25	56.00	24.75	19.45	46.00	26.55
3.72	35.50	56.00	20.50	19.35	46.00	26.65
9.88	30.50	60.00	29.50	20.50	50.00	29.50

N Line

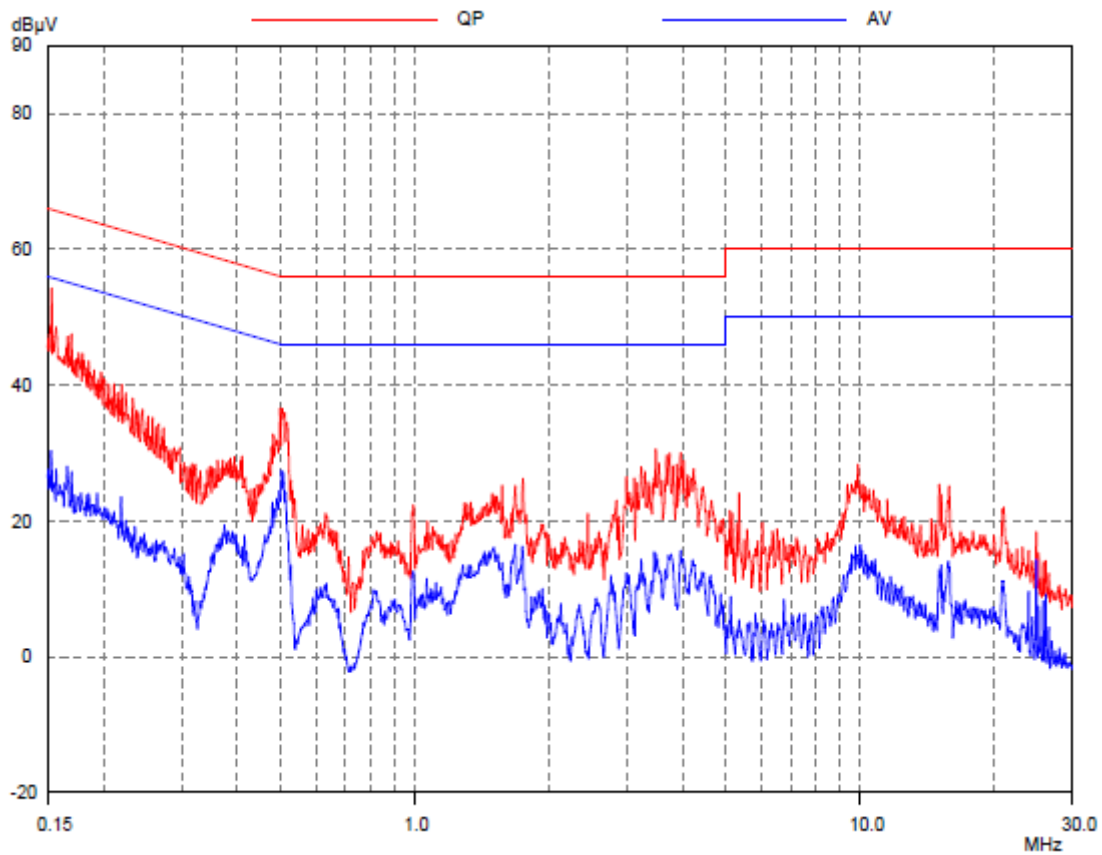

Frequency (MHz)	Quasi-peak			Average		
	level dB(µV)	Limit dB(µV)	Margin (dB)	level dB(µV)	limit dB(µV)	Margin (dB)
0.16	50.79	65.67	14.88	28.78	55.67	26.89
0.50	32.30	56.02	23.72	24.25	46.02	21.77
0.88	34.20	56.00	21.80	16.15	46.00	29.85
1.47	31.65	56.00	24.35	19.40	46.00	26.60
3.72	35.05	56.00	20.95	19.35	46.00	26.65
9.88	30.20	60.00	29.80	20.40	50.00	29.60

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Margin = Limit - Corrected Reading

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

9 Occupied Bandwidth

Test result: Tested

9.1 Limit

None


9.2 Measurement Procedure

The occupied bandwidth was measured using the Spectrum Analyzer.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

9.3 Test Configuration

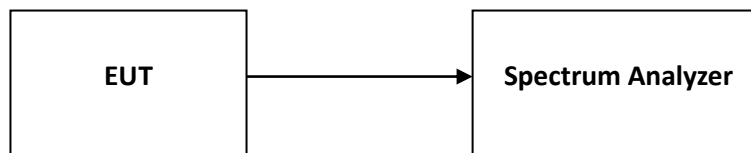

9.4 The results of Occupied Bandwidth

Please refer to Appendix A

10 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT has two types of antenna. The PCB antenna is permanently attached. The Pole antenna employs a unique antenna connector RP-SMA to the intentional radiator. So the EUT can comply with the provisions of this section.

Appendix A: Test results

Appendix A: Test results of 2.4G Band WiFi

***** END *****