

Nemko-CCL, Inc.
1940 West Alexander Street
Salt Lake City, UT 84119
801-972-6146

Test Report

Certification

Test Of: TCOO900

FCC ID: SU7TCO900

Test Specifications:

FCC PART 15, Subpart C

Test Report Serial No: 289874-2.3

Applicant:
Controlled Entry
dBa Community Controls
2500 South 3850 West, Suite A
Salt Lake City, UT 82120
U.S.A

Date of Test: August 25, 2015

Report Issue Date: April 28, 2016

Accredited Testing Laboratory By:



NVLAP Lab Code 100272-0

CERTIFICATION OF ENGINEERING REPORT

This report has been prepared by Nemko-CCL, Inc. to document compliance of the device described below with the requirements of Federal Communications Commission (FCC) Part 15, Subpart C. This report may be reproduced in full, partial reproduction may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

- Applicant: Controlled Entry
- Manufacturer: Allmatic S.r.l.
- Brand Name: Transmitter Solutions
- Model Number: TCOO900
- FCC ID: SU7TCO900

On this 28th day of April 2016, I, individually and for Nemko-CCL, Inc., certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge, and are made in good faith.

Although NVLAP has recognized that the Nemko-CCL, Inc. EMC testing facilities are in good standing, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Nemko-CCL, Inc.



Tested by: Norman P. Hansen
Test Technician



Reviewed by: Thomas C. Jackson
Certification Manager

Revision History		
Revision	Description	Date
1	Original Report Release	2 October 2015
2	Revised report to remove RCOO900 test data from report per TCB request.	18 April 2016
3	Relabeled upper and lower radiated band edge plots per TCB	28 April 2016

TABLE OF CONTENTS

	PAGE
<u>SECTION 1.0 CLIENT INFORMATION</u>	5
<u>SECTION 2.0 EQUIPMENT UNDER TEST (EUT)</u>	6
<u>SECTION 3.0 TEST SPECIFICATION, METHODS & PROCEDURES</u>	9
<u>SECTION 4.0 OPERATION OF EUT DURING TESTING</u>	15
<u>SECTION 5.0 SUMMARY OF TEST RESULTS</u>	16
<u>SECTION 6.0 MEASUREMENTS AND RESULTS</u>	17
<u>APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT</u>	31
<u>APPENDIX 2 PHOTOGRAPHS</u>	33

SECTION 1.0 CLIENT INFORMATION

1.1 Applicant:

Company Name: Controlled Entry
 dBa Community Controls
 2500 South 3850 West, Suite A
 Salt Lake City, UT 84120
 U.S.A

Contact Name: Brad Kofford
Title: President

1.2 Manufacturer:

Company Name: Allmatic S.r.l..
 Via dell' Artigiano
 1 32020 Lentiai
 Belluno, Italy

SECTION 2.0 EQUIPMENT UNDER TEST (EUT)**2.1 Identification of EUT:**

Brand Name: Transmitter Solutions
Model Number: TCOO900
Serial Number: None
Dimensions: 15.6 cm x 5.4 cm x 2.5 cm
Country of Manufacture: Italy

2.2 Description of EUT:

The TCOO900 is a device used in gate and door automation systems that are connected to safety edges. The TCOO900 connects to the safety edges and transmits status via a 902 – 928 MHz transceiver. The RCOO900 receives the information from the TCOO900 and controls the gate or door accordingly. The TCOO900 is powered by 2 AA batteries. The TCOO900 can be set to operate at 4 channels in the 902-928 MHz band. The TCOO900 uses a wire soldered to the PCB as an antenna.

Channel	Frequency (MHz)
1	912.9
2	914.9
3	916.9
4	918.9

This report covers the circuitry of the devices subject to FCC Part 15, Subpart C. The circuitry of the device subject to FCC Subpart B was found to be compliant and is covered in Nemko-CCL, Inc. report 289874-3.

2.3 EUT and Support Equipment:

The FCC ID numbers for all the EUT and support equipment used during the test are listed below:

Brand Name Model Number Serial No.	FCC ID Number	Description	Name of Interface Ports / Interface Cables
BN: Transmitter Solutions MN: TCOO900 (Note 1) SN: None	SU7TCO900	Entry system control device	See Section 2.4

Note: (1) EUT

2.4 Interface Ports on EUT:

Name of Ports	No. of Ports Fitted to EUT	Cable Descriptions/Length
Safety Edge	2	4 unshielded conductors/1.0 meters

2.5 Modification Incorporated/Special Accessories on EUT:

There were no modifications or special accessories required to comply with the specification.

SECTION 3.0 TEST SPECIFICATION, METHODS & PROCEDURES**3.1 Test Specification:**

Title: FCC PART 15, Subpart C (47 CFR 15)
15.203, 15.207, and 15.247

Limits and methods of measurement of radio interference characteristics of radio frequency devices.

Purpose of Test: The tests were performed to demonstrate initial compliance.

3.2 Methods & Procedures:**3.2.1 §15.203 Antenna Requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

3.2.2 §15.207 Conducted Limits

(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5*	66 to 56*	56 to 46*
0.5 – 5	56	46
5 - 30	60	50

*Decreases with the logarithm of the frequency.

3.2.3 §15.247 Operation within the bands 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 – 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

(2) Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

(b) The maximum peak output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725 – 5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

(iii) Fixed, point-to-point operation, as used in paragraphs (b)(4)(i) and (b)(4)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(1), (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna /antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of $10 \log$ (number of array elements or staves) plus the directional gain of the element or staff having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall

be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

(f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express

purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

(i) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Note: Spread spectrum systems are sharing these bands on a noninterference basis with systems supporting critical Government requirements that have been allocated the usage of these bands, secondary only to ISM equipment operated under the provisions of Part 18 of this Chapter. Many of these Government systems are airborne radiolocation systems that emit a high EIRP which can cause interference to other users. Also, investigations of the effect of spread spectrum interference to U. S. Government operations in the 902-928 MHz band may require a future decrease in the power limits allowed for spread spectrum operation.

3.3 Test Procedure

The testing was performed according to the procedures in ANSI C63.4: 2003 and 47 CFR Part 15. Testing was performed at the Nemko-CCL, Inc. Wanship open area test site #2, located at 29145 Old Lincoln Highway, Wanship, UT. This site has been registered with the FCC, and was renewed January 22, 2015 (90504). This registration is valid for three years.

Nemko-CCL, Inc. is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Lab Code: 100272-0, which is effective until September 30, 2016.

SECTION 4.0 OPERATION OF EUT DURING TESTING

4.1 Operating Environment:

Power Supply: TCOO900: 3 VDC from 2 AA batteries

4.2 Operating Modes:

The transmitter was tested while in a constant transmit mode at the upper and lower channels. New batteries were installed in the TCOO900 for testing.

4.3 EUT Exercise Software:

Allmatic test software was used to exercise the transmitter.

SECTION 5.0 SUMMARY OF TEST RESULTS**5.1 FCC Part 15, Subpart C**

The TCOO900 transceiver was subjected to each of the tests shown in the summary table below.

5.1.1 Summary of Tests:

Section	Environmental Phenomena	Frequency Range (MHz)	Result
15.203	Antenna Requirements	Structural requirement	Complied
15.207	Conducted Disturbance at Mains Ports	0.15 to 30	Not Applicable
15.247(a)	Bandwidth Requirement	902-928	Complied
15.247(b)	Peak Output Power	902-928	Complied
15.247(d)	Spurious Emissions	0.009 - 9280	Complied
15.247(e)	Peak Power Spectral Density	902-928	Complied
15.247(i)	RF Exposure	902-928	Complied (Note 1)
Note 1: Compliance with these requirements is shown in documents filed with the FCC at the time of Certification.			

5.2 Result

In the configuration tested, the transceivers complied with the requirements of the specification.

SECTION 6.0 MEASUREMENTS AND RESULTS**6.1 General Comments:**

This section contains the test results only. Details of the test methods used and a list of the test equipment used during the measurements can be found in Appendix 1 of this report.

6.2 Test Results:**6.2.1 §15.203 Antenna Requirements**

The EUT uses a wire soldered to the PCB as an antenna and is not user replaceable.

RESULT

The EUT complied with the specification.

6.2.2 §15.207 Conducted Disturbance at the AC Mains Ports

The TCOO900 is powered by 2 AA batteries and has no provision to connect to the AC mains or a device connected to the AC mains; therefore, this test is not required.


6.2.3 §15.247(a)(2) Emission Bandwidth

Frequency (MHz)	Emission 6 dB bandwidth (kHz)
912.9	608
918.9	608

RESULT

In the configuration tested, the 6 dB bandwidth was greater than 500 kHz; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).


Lowest Channel Bandwidth

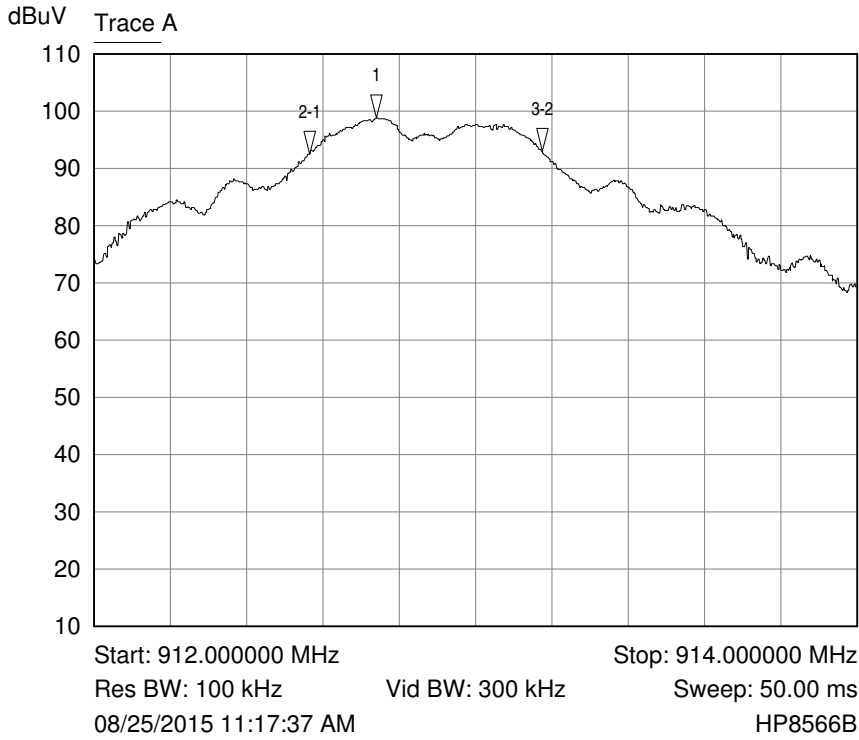

Mkr	X-Axis	Value	Notes
1 ▽	912.740000 MHz	98.8000 dBuV	
2-1 ▽	-174.000000 kHz	-6.3000 dB	
3-2 ▽	608.000000 kHz	0.5000 dB	

Trace A 15.247 6 dB BW TC00900

Upper Channel Bandwidth

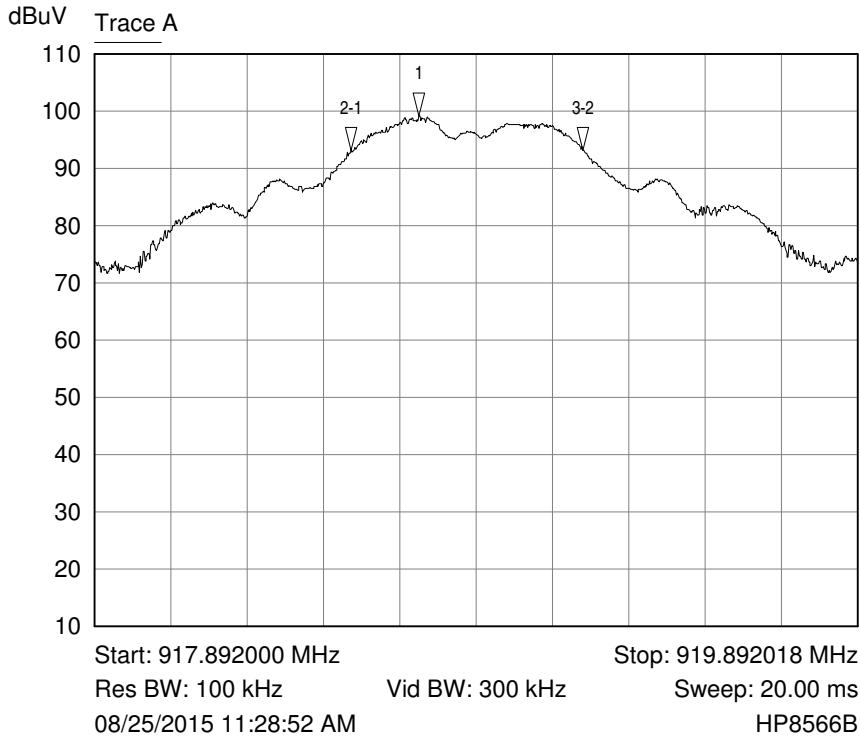

Mkr	X-Axis	Value	Notes
1 ▽	918.742008 MHz	99.2000 dBuV	
2-1 ▽	-178.001603 kHz	-6.0000 dB	
3-2 ▽	608.005472 kHz	-0.1000 dB	

Trace A 15.247 6 dB BW TC00900

6.2.4 §15.247(b)(3) Peak Output Power


The EUT uses a wire soldered to the PCB as an antenna and the gain is not known. The FCC allows a maximum conducted power of 30 dBm to a 6 dBi antenna which is an EIRP limit of 36 dBm. The radiated field strength measurements were converted to EIRP in dBm and compared to the limit of 36.0 dBm. The results are shown below.

Frequency (MHz)	Measured Field Strength at 3 meters (dB μ V/m)	EIRP (dBm)	EIRP Limit (dBm)
912.9	100.7	5.47	36.0
918.9	100.8	5.57	36.0

RESULT

In the configuration tested, the maximum EIRP was less than 36.0 dBm; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).


Lowest Channel Output Power Plot

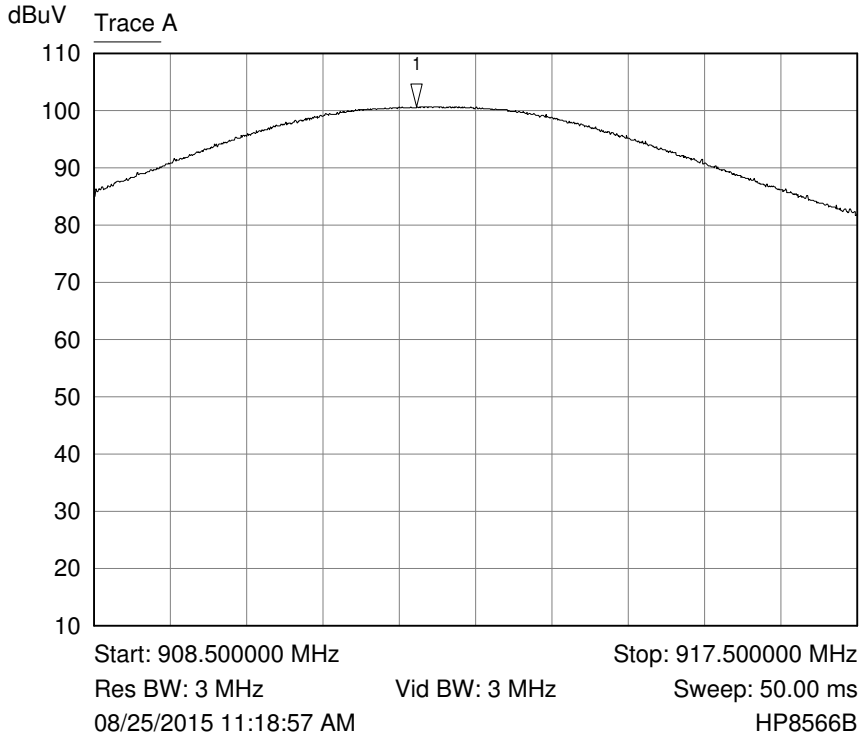

Mkr	X-Axis	Value	Notes
1 ▽	912.307000 MHz	100.7000 dBuV	

Trace A 15.247 Peak power TC00900

Highest Channel Output Power Plot

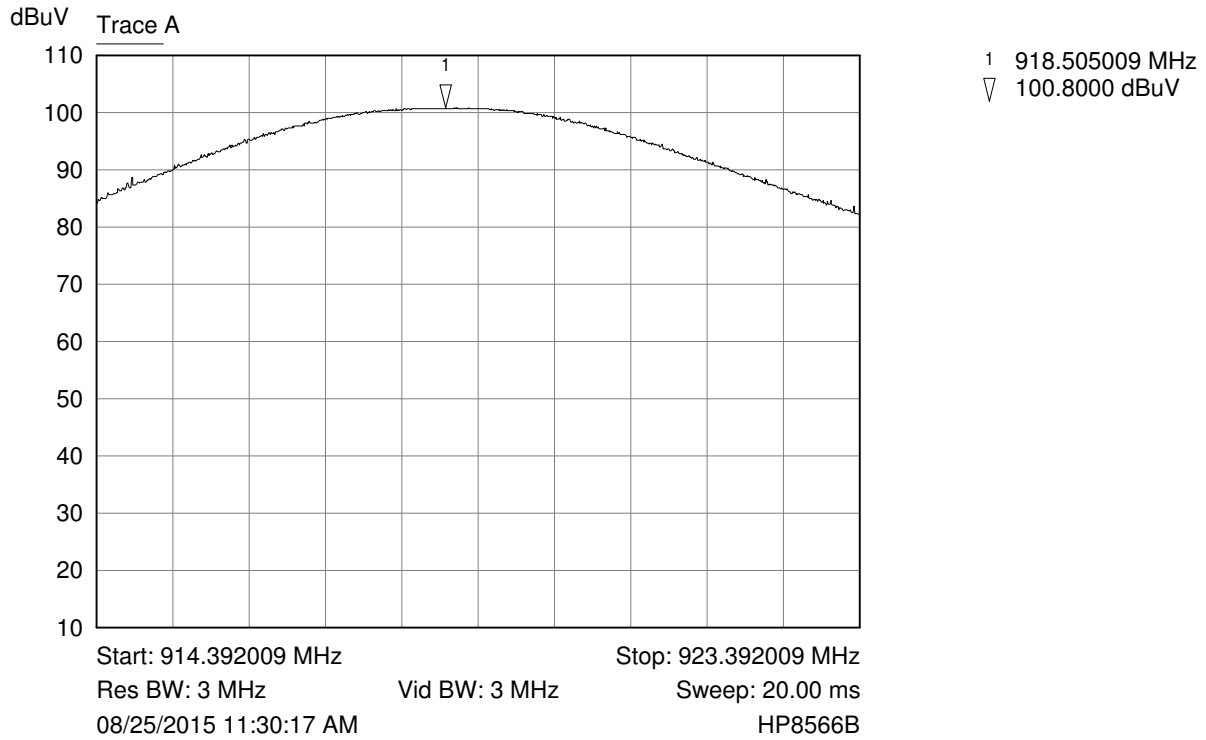

Trace A 15.247 Peak power TC00900

6.2.5 §15.247(d) Spurious Emissions

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental emission was investigated to measure any emissions. The following tables show measurements of the emissions found in testing. The tables show the worst-case emission measured from the EUT. The noise floor was a minimum of 6 dB below the limit. Emissions outside the restricted bands of §15.205 must be attenuated 20 dB below the fundamental emission when measured using a 100 kHz RBW. The emissions in the restricted bands must meet the limits specified in §15.209. Tabular data for each of the spurious emissions is shown below for each of the units. Plots of the band edges are also shown. Note that all emissions seen, were compared to the tighter limits of §15.209 and were found compliant.

RESULT

All emissions met the limits specified in §15.209; therefore, the EUT complies with the specification.

Transmitting at the Lowest Frequency

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dBµV)	Correction Factor (dB)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
1825.8	Peak	Vertical	29.5	30.0	59.5	74.0	-14.5*
1825.8	Average	Vertical	19.6	30.0	49.6	54.0	-4.4*
1825.8	Peak	Horizontal	23.9	30.0	53.9	74.0	-20.1*
1825.8	Average	Horizontal	12.8	30.3	43.1	54.0	-10.9*
2738.7	Peak	Vertical	11.9	33.8	45.7	74.0	-28.3
2738.7	Average	Vertical	4.5	33.8	38.3	54.0	-15.7
2738.7	Peak	Horizontal	10.4	33.8	44.2	74.0	-29.8
2738.7	Average	Horizontal	2.6	33.8	36.4	54.0	-17.6
3654.6	Peak	Vertical	6.5	36.8	43.3	74.0	-30.7
3654.6	Average	Vertical	-3.7	36.8	33.1	54.0	-20.9
3654.6	Peak	Horizontal	6.1	36.8	42.9	74.0	-31.1
3654.6	Average	Horizontal	-3.9	36.8	32.9	54.0	-21.1
4564.5	Peak	Vertical	18.1	38.4	56.5	74.0	-17.5
4564.5	Average	Vertical	7.9	38.4	46.3	54.0	-7.7
4564.5	Peak	Horizontal	17.0	38.4	55.4	74.0	-18.6
4564.5	Average	Horizontal	6.3	38.4	44.7	54.0	-9.3
5477.4	Peak	Vertical	22.4	40.5	62.9	74.0	-11.1*
5477.4	Average	Vertical	12.0	40.5	52.5	54.0	-1.5*
5477.4	Peak	Horizontal	20.8	40.5	61.3	74.0	-12.7*

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
5477.4	Average	Horizontal	10.4	40.5	50.9	54.0	-3.1*
6390.3	Peak	Vertical	23.7	41.4	65.1	74.0	-8.9*
6390.3	Average	Vertical	12.2	41.4	53.6	54.0	-0.4*
6390.3	Peak	Horizontal	22.4	41.4	63.8	74.0	-10.2*
6390.3	Average	Horizontal	12.0	41.4	53.4	54.0	-0.6*
7303.2	Peak	Vertical	19.2	43.6	62.8	74.0	-11.2
7303.2	Average	Vertical	7.1	43.6	50.7	54.0	-3.3
7303.2	Peak	Horizontal	14.4	43.6	58.0	74.0	-16.0
7303.2	Average	Horizontal	2.3	43.6	45.9	54.0	-8.1
8216.1	Peak	Vertical	10.7	45.1	55.8	74.0	-18.2
8216.1	Average	Vertical	-0.8	45.1	44.3	54.0	-9.7
8216.1	Peak	Horizontal	12.6	45.1	57.7	74.0	-16.3
8216.1	Average	Horizontal	1.1	45.1	46.2	54.0	-7.8
9129.0	Peak	Vertical	6.4	46.4	52.8	74.0	-21.2
9129.0	Average	Vertical	-5.9	46.4	40.5	54.0	-13.5
9129.0	Peak	Horizontal	5.2	46.4	51.6	74.0	-13.5
9129.0	Average	Horizontal	-6.7	46.4	39.7	54.0	-22.4

*These emissions are not in restricted bands and only have to be attenuated 20 dBc to 79.2 dB μ V/m peak; however, they meet the tighter limits of the restricted bands.

Transmitting at the Highest Frequency


Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1837.8	Peak	Vertical	30.0	30.4	60.4	74.0	-13.6*
1837.8	Average	Vertical	22.1	30.4	52.5	54.0	-1.5*
1837.8	Peak	Horizontal	23.7	30.4	54.1	74.0	-19.9*
1837.8	Average	Horizontal	17.6	30.4	48.0	54.0	-6.0*
2756.7	Peak	Vertical	12.3	33.9	46.2	74.0	-27.8
2756.7	Average	Vertical	4.8	33.9	38.7	54.0	-15.3
2756.7	Peak	Horizontal	11.7	33.9	45.6	74.0	-28.4
2756.7	Average	Horizontal	3.9	33.9	37.8	54.0	-16.2
3675.6	Peak	Vertical	8.3	36.9	45.2	74.0	-28.8
3675.6	Average	Vertical	-0.7	36.9	36.2	54.0	-17.8

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
3675.6	Peak	Horizontal	8.2	36.9	45.1	74.0	-28.9
3675.6	Average	Horizontal	-2.4	36.9	34.5	54.0	-19.5
4594.5	Peak	Vertical	18.2	38.4	56.6	74.0	-17.4
4594.5	Average	Vertical	7.8	38.4	46.2	54.0	-7.8
4594.5	Peak	Horizontal	17.1	38.4	55.5	74.0	-18.5
4594.5	Average	Horizontal	6.6	38.4	45.0	54.0	-9.0
5513.4	Peak	Vertical	22.3	40.5	62.8	74.0	-11.2*
5513.4	Average	Vertical	11.8	40.5	52.3	54.0	-1.7*
5513.4	Peak	Horizontal	21.9	40.5	62.4	74.0	-11.6*
5513.4	Average	Horizontal	12.8	40.5	53.3	54.0	-0.7*
6432.3	Peak	Vertical	20.9	41.5	62.4	74.0	-11.6*
6432.3	Average	Vertical	11.5	41.5	53.0	54.0	-1.0*
6432.3	Peak	Horizontal	22.1	41.5	63.6	74.0	-10.4*
6432.3	Average	Horizontal	11.0	41.5	52.5	54.0	-1.5*
7351.2	Peak	Vertical	19.9	43.8	63.7	74.0	-10.3
7351.2	Average	Vertical	7.6	43.8	51.4	54.0	-2.6
7351.2	Peak	Horizontal	11.0	43.8	54.8	74.0	-19.2
7351.2	Average	Horizontal	3.6	43.8	47.4	54.0	-6.6
8270.1	Peak	Vertical	10.3	45.2	55.5	74.0	-18.5
8270.1	Average	Vertical	-2.3	45.2	42.9	54.0	-11.1
8270.1	Peak	Horizontal	12.5	45.2	57.7	74.0	-16.3
8270.1	Average	Horizontal	-0.6	45.2	44.6	54.0	-9.4
9189.0	Peak	Vertical	5.7	46.4	52.1	74.0	-21.9
9189.0	Average	Vertical	-7.5	46.4	38.9	54.0	-15.1
9189.0	Peak	Horizontal	4.3	46.4	50.7	74.0	-15.1
9189.0	Average	Horizontal	-7.9	46.4	3.5	54.0	-23.3

*These emissions are not in restricted bands and only have to be attenuated 20 dBc to 79.2 dB μ V/m peak; however, they meet the tighter limits of the restricted bands.


No other emissions were seen.

Radiated Upper Band Edge Plot

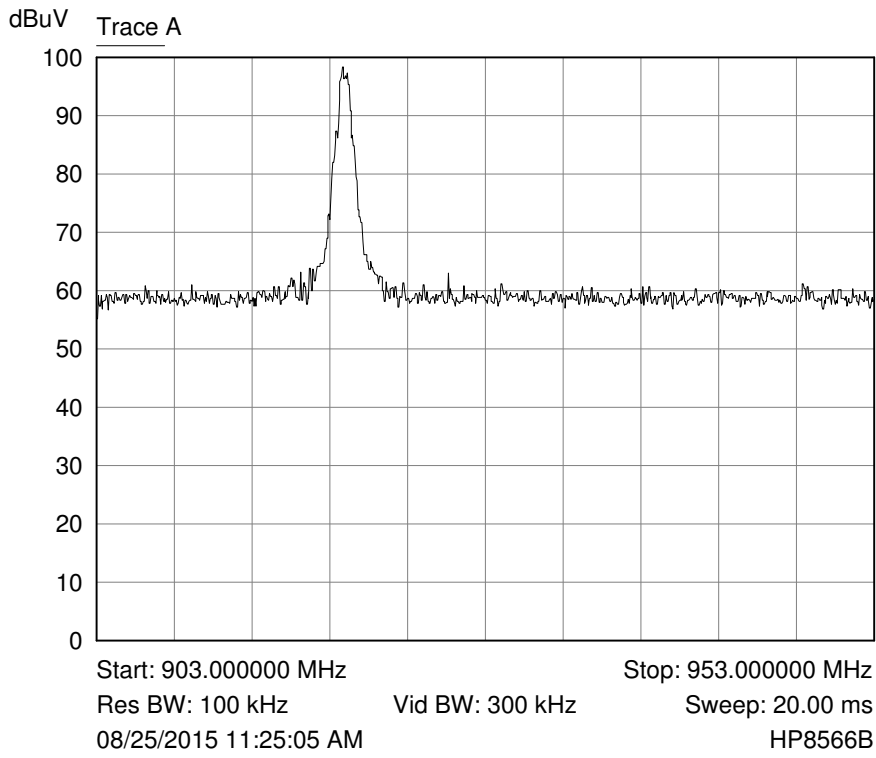

Trace A 15.247 BE TC00900

Radiated Lower Band Edge Plot

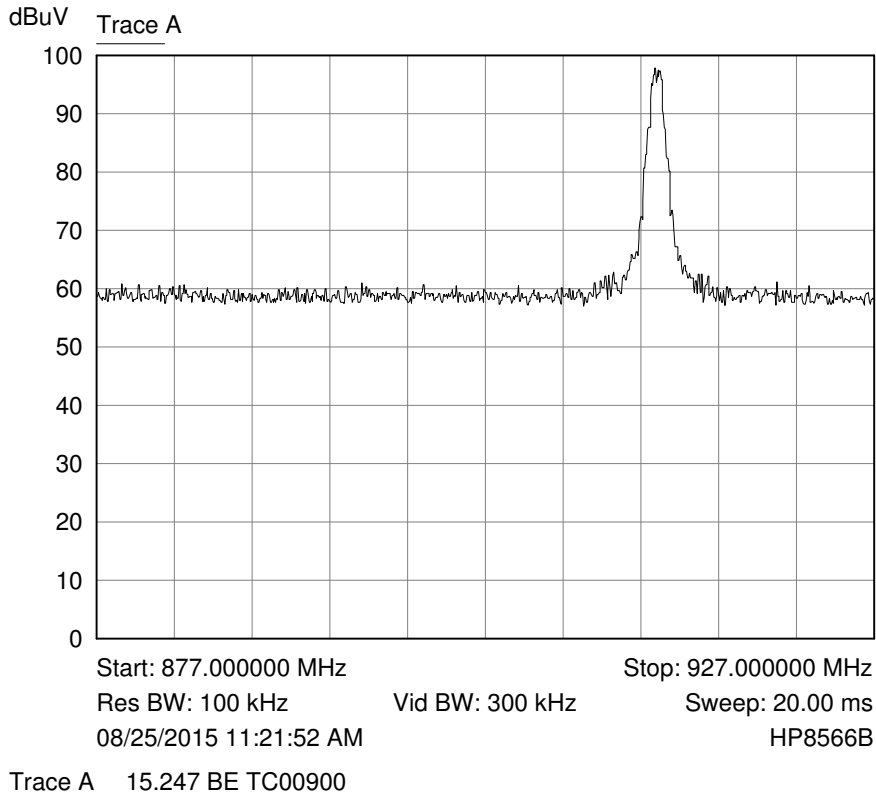

6.2.6 §15.247(e) Peak Power Spectral Density


The EUT uses a wire soldered to the PCB as an antenna and the gain is not known. The FCC allows a maximum conducted 3 kHz power spectral density of 8 dBm to a 6 dBi antenna which is an EIRP limit of 14 dBm. The radiated field strength measurements were converted to EIRP in dBm and compared to the limit of 14.0 dBm. The results are shown below.

Frequency (MHz)	Measured Field Strength at 3 meters (dB μ V/m)	3 kHz Power Spectral Density EIRP (dBm)	3 kHz Power Spectral Density EIRP Limit (dBm)
912.9	91.3	-3.9	14.0
918.9	91.6	-3.6	14.0


RESULT

The maximum peak power spectral density was -3.6 dBm, less than the limit of 14.0 dBm; therefore, the EUT complies with the specification.

Lowest Channel 3 kHz PSD Plot

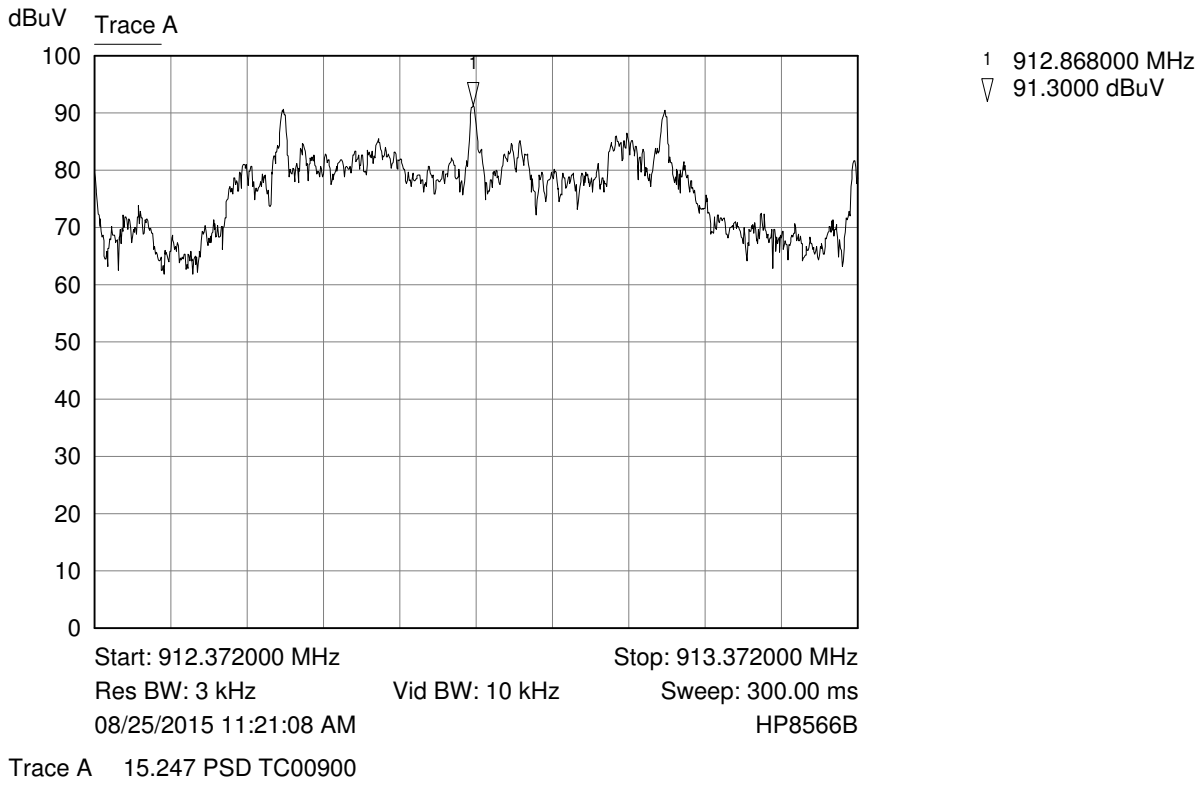

Highest Channel 3 kHz PSD Plot

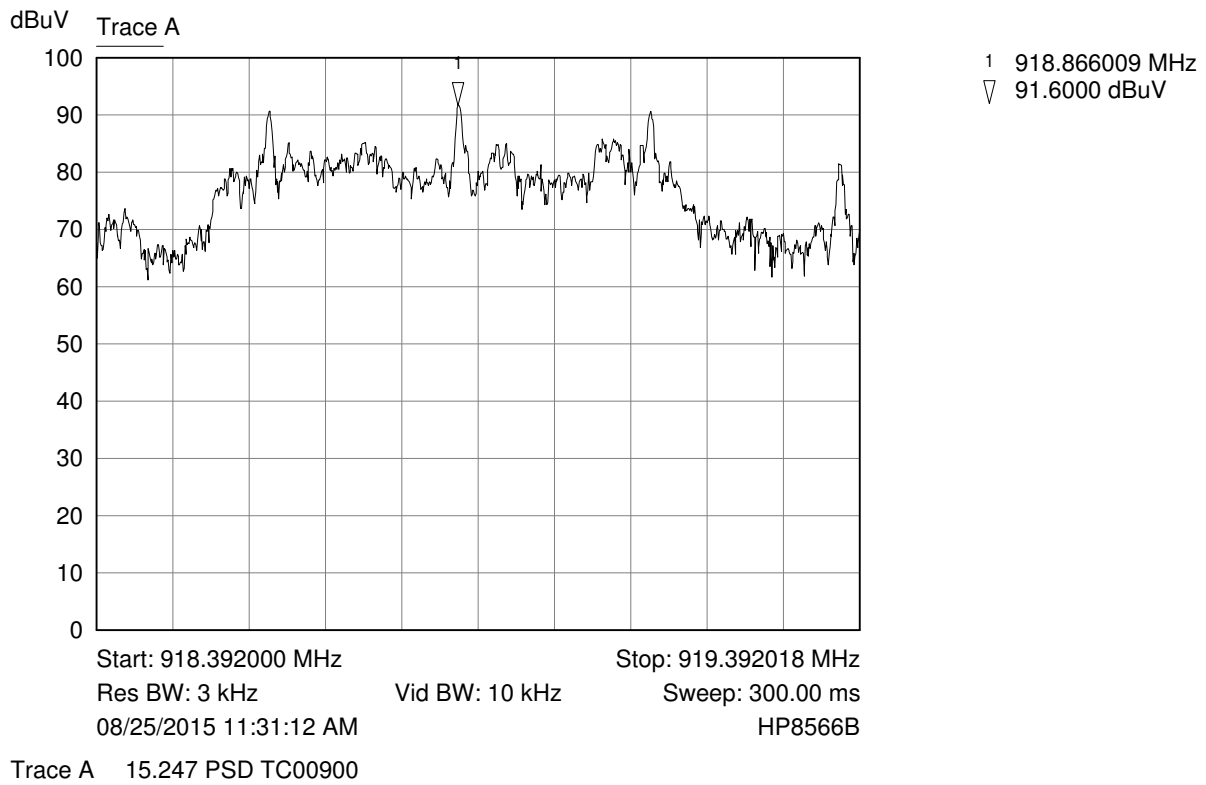

APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT

A1.1 Radiated Emissions

The radiated emissions from the intentional radiator were measured using a spectrum analyzer with a quasi-peak adapter for peak and quasi-peak readings.

A loop antenna was used to measure emissions below 30 MHz. Emission readings more than 20 dB below the limit at any frequency may not be listed in the reported data. For frequencies between 9 kHz and 30 MHz, or the lowest frequency generated or used in the device greater than 9 kHz, and less than 30 MHz, the spectrum analyzer resolution bandwidth was set to 9 kHz and the video bandwidth was set to 30 kHz. For average measurements, the spectrum analyzer average detector was used.

For frequencies above 30 MHz, an amplifier and preamplifier were used to increase the sensitivity of the measuring instrumentation. The quasi-peak adapter uses a bandwidth of 120 kHz, with the spectrum analyzer's resolution bandwidth set at 1 MHz, for readings in the 30 to 1000 MHz frequency ranges. For peak emissions above 1000 MHz the spectrum analyzer's resolution bandwidth was set to 1 MHz and the video bandwidth was set to 3 MHz. For average measurements above 1000 MHz the spectrum analyzer's resolution bandwidth was set to 1 MHz and the average detector of the analyzer was used.

A biconilog antenna was used to measure the frequency range of 30 to 1000 MHz and a Double Ridge Guide Horn antenna was used to measure the frequency range of 1 GHz to 18 GHz, and a Pyramidal Horn antenna was used to measure the frequency range of 18 GHz to 25 GHz, at a distance of 3 meters and/or 1 meter from the EUT. The readings obtained by the antenna are correlated to the levels obtained with a tuned dipole antenna by adding antenna factors.

The configuration of the EUT was varied to find the maximum radiated emission. The EUT was connected to the peripherals listed in Section 2.3 via the interconnecting cables listed in Section 2.4. A technician manually manipulated these interconnecting cables to obtain worst-case radiated disturbance. The EUT was rotated 360 degrees, and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission. Where there were multiple interface ports all of the same type, cables are either placed on all of the ports or cables added to these ports until the emissions do not increase by more than 2 dB.


Desktop EUT are measured on a non-conducting table 0.8 meters above the ground plane. The table is placed on a turntable, which is level with the ground plane. For equipment normally placed on floors, the equipment shall be placed directly on the turntable.

For radiated emission testing at 30 MHz or above that is performed at distances closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

Type of Equipment	Manufacturer	Model Number	Barcode Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer/Receiver	Rohde & Schwarz	ESU40	1229	04/07/2015	04/07/2016
Spectrum Analyzer	Hewlett Packard	8566B	644	03/23/2015	03/23/2016
Quasi-Peak Detector	Hewlett Packard	85650A	1130	03/16/2015	03/16/2016
Loop Antenna	EMCO	6502	176	03/17/2015	03/17/2017
Biconilog Antenna	EMCO	3142	713	10/22/2014	10/22/2016
Double Ridged Guide Antenna	EMCO	3115	735	03/17/2015	03/17/2017
High Frequency Amplifier	Miteq	AFS4-00102650-35-10P-4	1299	12/23/2014	12/23/2015
20' High Frequency Cable	Microcoax	UFB197C-1-3120-000000	1297	12/23/2014	12/23/2015
3 Meter Radiated Emissions Cable Wanship Site #2	Microcoax	UFB205A-0-4700-000000	1295	12/23/2014	12/23/2015
Pre/Power-Amplifier	Hewlett Packard	8447F	762	09/05/2014	09/05/2015
6 dB Attenuator	Hewlett Packard	8491A	1103	12/23/2014	12/23/2015


An independent calibration laboratory or Nemko-CCL, Inc. personnel calibrates all the equipment listed above at intervals defined in ANSI C63.4:2003 Section 4.4 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.

Radiated Emissions Test Setup

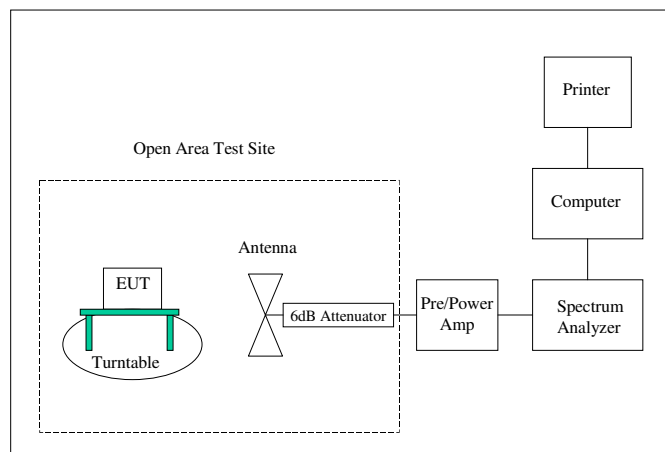


APPENDIX 2 PHOTOGRAPHS

Photograph 1 – Front View Radiated Test Setup – RCO0900

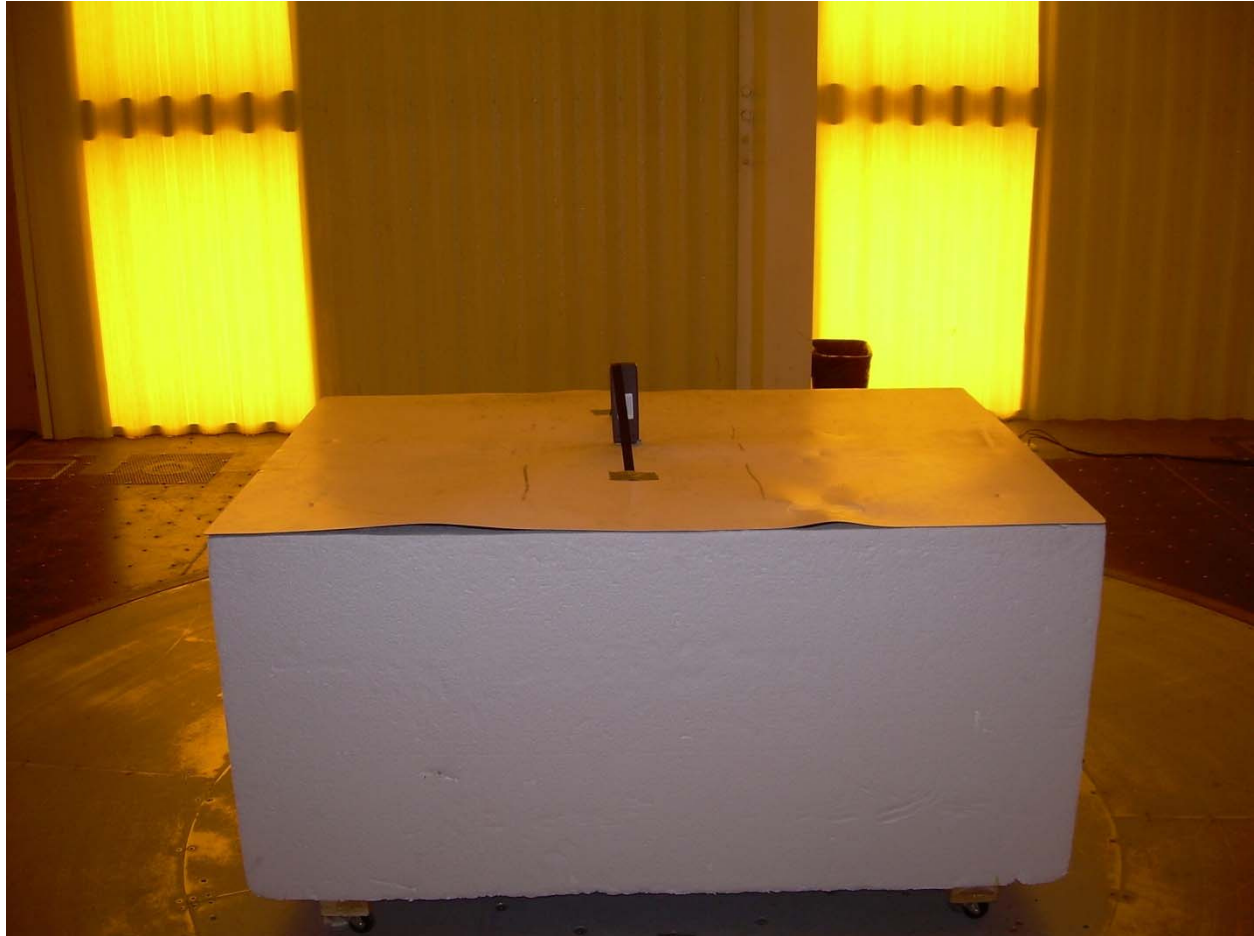

Photograph 2 – Front View Radiated Test Setup – RCO0900

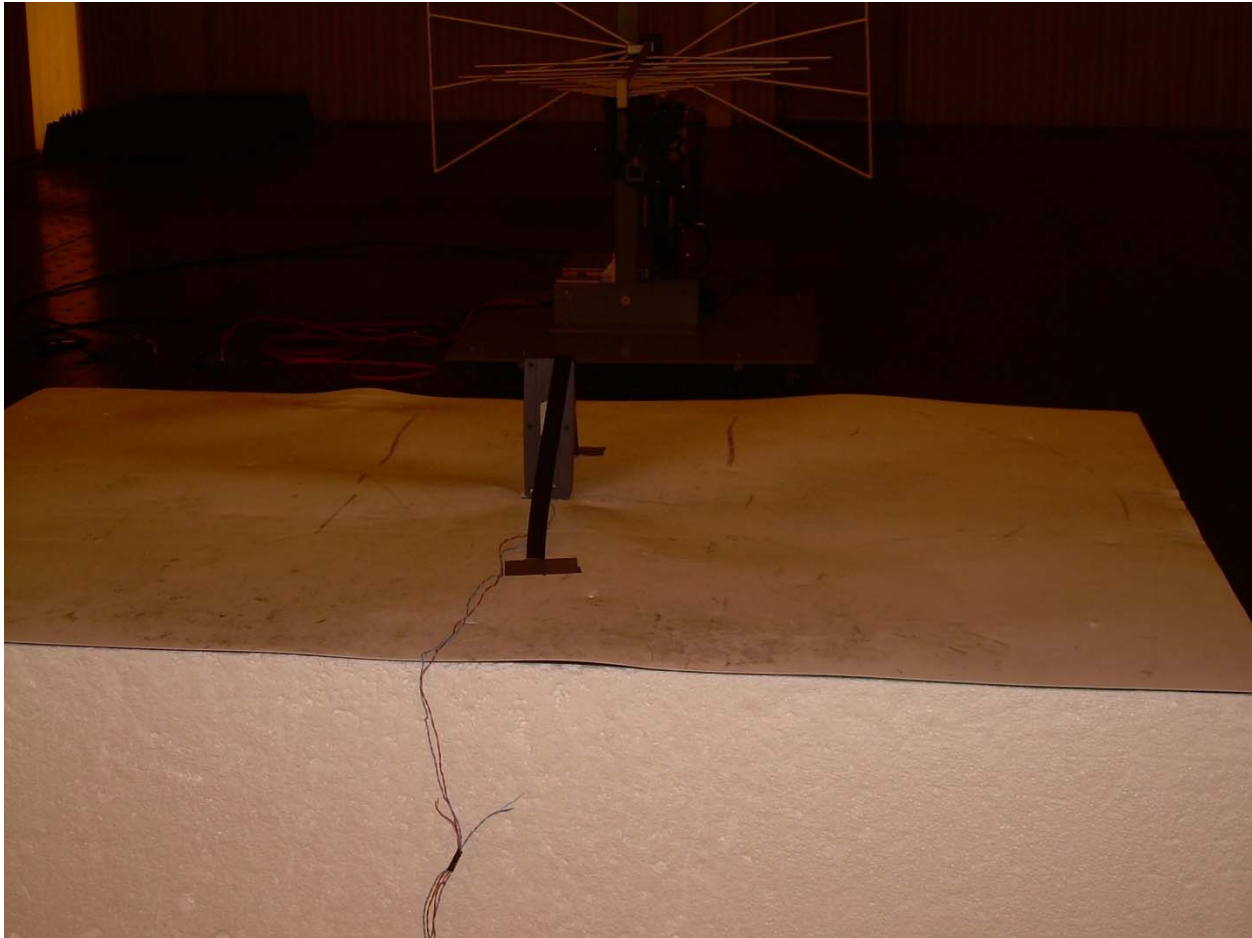


Photograph 3 – Front View of the TCOO900




Photograph 4 – Back View of the TCOO900



Photograph 5 – Internal View of the TCOO900

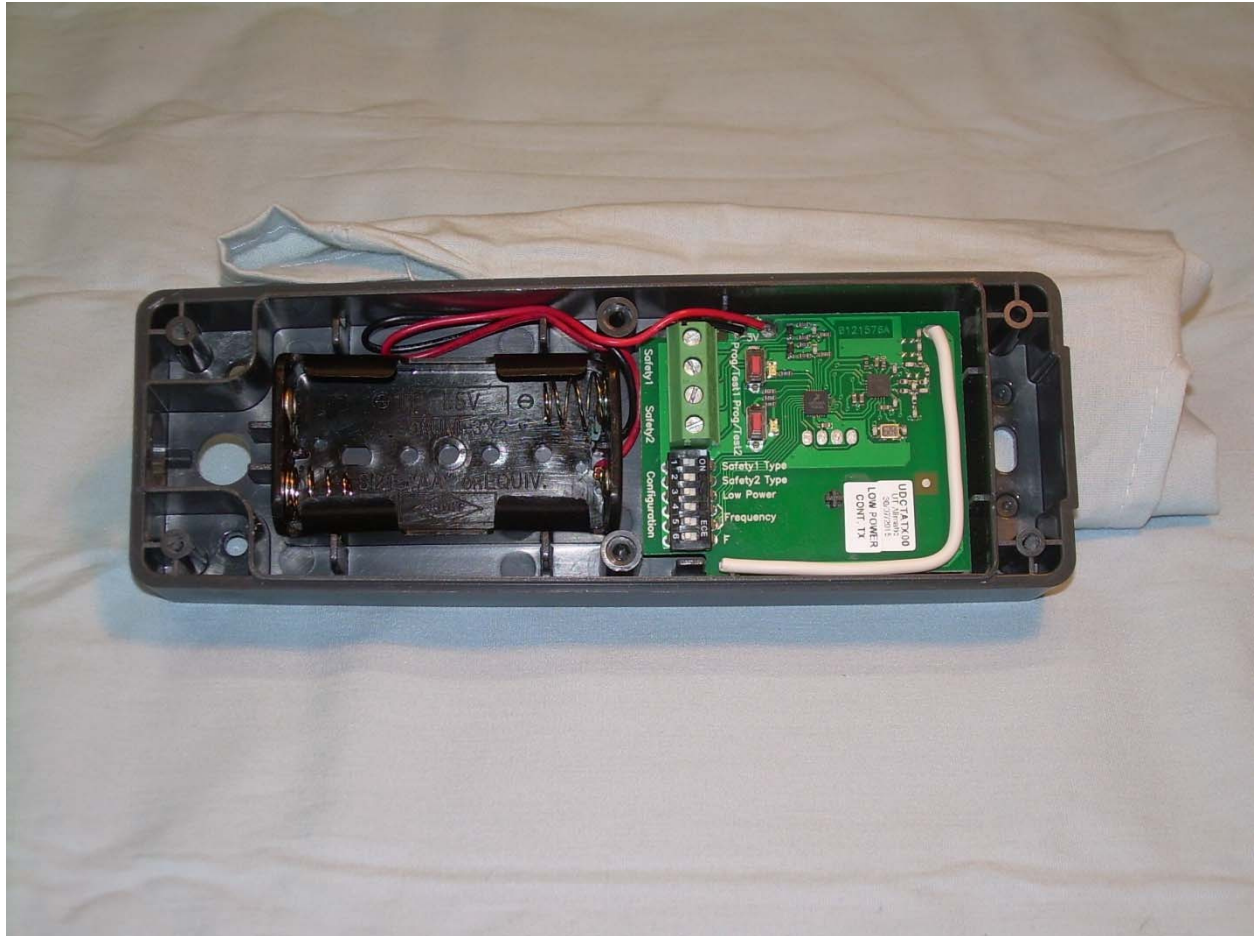

Photograph 6 – View of the Component Side of the TCOO900

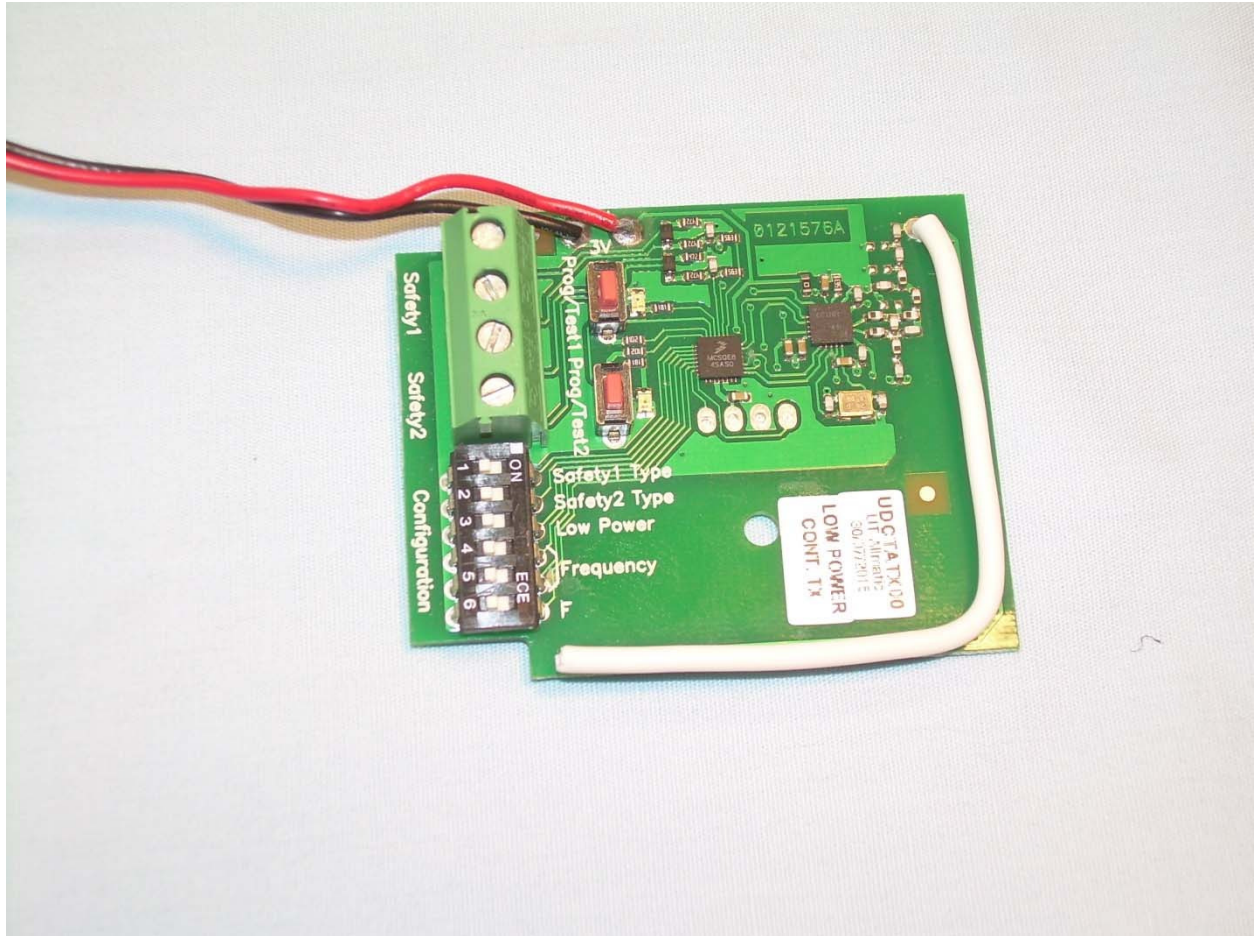

Photograph 7 – View of the Trace Side of the TCOO900

