

# DFS TEST REPORT

**Applicant:** Lenbrook Industries Limited.  
**Address of Applicant:** 633 Granite Court, Pickering, Ontario, L1W 3K1 Canada  
**Equipment Under Test (EUT)**  
Product Name: BLOUS STREAMING DAC AMPLIFIER  
Model No.: M33  
Trade mark: NAD  
**FCC ID:** SVC-M33  
**Applicable standards:** FCC CFR Title 47 Part 15 Subpart E Section 15.407  
**Date of sample receipt:** 30 Mar., 2020  
**Date of Test:** 31 Mar., to 10 Nov., 2020  
**Date of report issued:** 12 Nov., 202  
**Test Result:** PASS\*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

**2 Version**

Version No.	Date	Description
00	12 Nov., 202	Original

Tested by: Yoro Wu  
Test Engineer

Date: 12 Nov., 202

Reviewed by: Winner Zhang  
Project Engineer

Date: 12 Nov., 202

### 3 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 VERSION .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 TEST SUMMARY .....</b>	<b>4</b>
<b>5 GENERAL INFORMATION.....</b>	<b>5</b>
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND MODE, AND TEST SAMPLES PLANS .....	6
5.4 DESCRIPTION OF SUPPORT UNITS.....	6
5.5 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD .....	6
5.6 RELATED SUBMITTAL(S) / GRANT (S) .....	6
5.7 LABORATORY FACILITY .....	6
5.8 LABORATORY LOCATION .....	6
5.9 TEST INSTRUMENTS LIST.....	7
<b>6 DFS TECHNICAL REQUIREMENTS.....</b>	<b>8</b>
6.1 DFS PARAMETERS.....	8
6.2 DFS TECHNICAL REQUIREMENTS.....	10
6.3 DFS THRESHOLD LEVEL.....	10
6.4 TEST SETUP BLOCK .....	10
6.5 EUT CONFIGURATION FOR DFS TEST.....	11
<b>7 TEST RESULT .....</b>	<b>12</b>
7.1 VERIFICATION OF RADAR TYPE AND LEVEL.....	12
7.2 CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME.....	13
<b>8 TEST SETUP PHOTO .....</b>	<b>15</b>
<b>9 EUT CONSTRUCTIONAL DETAILS .....</b>	<b>15</b>

## 4 Test Summary

Test Items	Limit	Result
Channel Availability Check	> 60 seconds	N/A
UNII Detection Bandwidth	> 100% of the UNII 99% transmission power bandwidth	N/A
Statistical Performance Check	Radar type 1,2,3,4 $\geq$ 60% Aggregate Radar type 1~4 and 5 $\geq$ 80% Radar type 6 $\geq$ 70%	N/A
Channel Move Time	< 10 seconds	Pass
Channel Closing Transmission Time	< 20ms + aggregate of 60ms over remaining 10 second period	Pass
Non-Occupancy Period	> 30 minutes	N/A
<p><b>Remark:</b></p> <ol style="list-style-type: none"> <li>1. Pass: means meet the requirements.</li> <li>2. N/A: means not applicable.</li> <li>3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).</li> </ol>		
<b>Test Method:</b>	ANSI C63.10-2013 KDB 789033 D02 General UNII Test Procedures New Rules v02r01 KDB 905462 D02 and KDB 905462 D03	

## 5 General Information

### 5.1 Client Information

Applicant:	Lenbrook Industries Limited.
Address:	633 Granite Court, Pickering, Ontario, L1W 3K1 Canada
Manufacturer:	Lenbrook Industries Limited.
Address:	633 Granite Court, Pickering, Ontario, L1W 3K1 Canada
Factory:	Hansong (Nanjing) Technology Ltd.
Address:	8th Kangping Road, Jiangning Economy and Technology Development Zone, Nanjing, 211106, China

### 5.2 General Description of E.U.T.

Product Name:	BLOUS STREAMING DAC AMPLIFIER			
Model No.:	M33			
Operation Frequency:	Band 1: 5150MHz-5250MHz	Band 2: 5250MHz-5350MHz		
	Band 3: 5470MHz-5725MHz	Band 4: 5725MHz-5825MHz		
Channel numbers:	Band 1:	802.11a/802.11n20: 4	802.11n40: 2	802.11ac: 1
	Band 2:	802.11a/802.11n20: 4	802.11n40: 2	802.11ac: 1
	Band 3:	802.11a/802.11n20: 11	802.11n40: 5	802.11ac: 2
	Band 4:	802.11a/802.11n20: 5	802.11n40: 2	802.11ac: 1
Channel separation:	20MHz:	802.11a/802.11n-HT20/802.11ac-HT20		
	40MHz:	802.11n-HT40/802.11ac-HT40		
	80MHz:	802.11ac-HT80		
Antenna Type:	External Antenna			
Antenna gain:	2.0 dBi			
TPC Power:	Not support			
DFS Operation Type:	<input type="checkbox"/> Master Device <input type="checkbox"/> Slaver Device with Radar detection function <input checked="" type="checkbox"/> Slaver Device without Radar detection function			
Power supply:	AC 100V~240V, 50/60Hz			
Test Sample Condition:	The test samples were provided in good working order with no visible defects.			

### 5.3 Test environment and mode, and test samples plans

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Continuously transmitting mode	Keep the EUT in 100% duty cycle transmitting with modulation.
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	

### 5.4 Description of Support Units

Manufacturer	Description	Model	Serial Number
LENOVO	Laptop	SL510	2847A65
WAVLINK	WiFi Router	WL-WN575A2	WL1512260097

### 5.5 Additions to, deviations, or exclusions from the method

No
----

### 5.6 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.
--

### 5.7 Laboratory Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> <li>● <b>FCC - Designation No.: CN1211</b> JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.</li> <li>● <b>ISED – CAB identifier.: CN0021</b> The 3m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.</li> <li>● <b>A2LA - Registration No.: 4346.01</b> This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <a href="https://portal.a2la.org/scopepdf/4346-01.pdf">https://portal.a2la.org/scopepdf/4346-01.pdf</a></li> </ul>
--

### 5.8 Laboratory Location

<p>JianYan Testing Group Shenzhen Co., Ltd.          Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road,          Bao'an District, Shenzhen, Guangdong, China          Tel: +86-755-23118282, Fax: +86-755-23116366          Email: info@ccis-cb.com, Website: <a href="http://www.ccis-cb.com">http://www.ccis-cb.com</a></p>
--

**5.9 Test Instruments list**

Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Due date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Agilent	N9020A	MY50510123	11-18-2019	11-17-2020
Vector Signal Generator	Agilent	N5182A	MY49060014	11-18-2019	11-17-2020
RF Switch Unit	Ascentest	AT890-RFB	--	--	--
DFS Test Software	MWRFTST	MTS 8310	Version: 2.0.0.0		
N7607B Signal Studio	KEYSIGHT	--	Version: 2.0.0.1		

## 6 DFS Technical Requirements

### 6.1 DFS Parameters

Table D.1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table D.2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Table D.3: DFS Detection Thresholds	
Maximum Transmit Power	Value (See Notes 1,2, and 3)
EIRP $\geq$ 200 mW	-64 dBm
EIRP < 200 mW and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 mW that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.  
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.  
 Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.



Table D.4: DFS requirement values	
Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds (See Note 1)
Channel Closing Transmission Time	200 ms + an aggregate of 60ms over remaining 10 second period (See Notes 1 and 2)
U-NII Detection Bandwidth	Minimum 100% of the UNII 99% transmission power bandwidth (See Note 3)

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step, the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Table D.5: Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A Test B	Roundup $\left\{ \begin{matrix} \frac{1}{360} \\ \frac{19 \cdot 10^6}{PRI_{\mu sec}} \end{matrix} \right.$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

Table D.6: Long Pulse Radar Test Waveform							
Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

**Long Pulse Radar Test Signal Waveform 12 second transmission**

The diagram illustrates a 12-second transmission waveform. It starts at 'Start' and ends at '12 Sec'. The waveform consists of a series of bursts: Burst 1, Burst 2, Burst 3, Burst 4, and Burst N. The time between the start of one burst and the start of the next is labeled as 'Burst Interval'. The bursts are represented by vertical bars of varying heights and widths, indicating the pulse structure within each burst.

Table D.7: Frequency Hopping Radar Test Waveform							
Radar Type	Pulse Width (μsec)	PRF (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials

6	1	3 33	0	0.333	300	70%	30
---	---	---------	---	-------	-----	-----	----



### 6.2 DFS Technical Requirements


Requirement	DFS Operational mode		
	<input type="checkbox"/> Master	<input checked="" type="checkbox"/> Slave without Radar Detection	<input type="checkbox"/> Slave with Radar Detection
Channel Availability Check	√	Not Required	Not Required
UNII Detection Bandwidth	√	Not Required	√
Statistical Performance Check	√	Not Required	√
Channel Move Time	√	√	√
Channel Closing Transmission Time	√	√	√
Non-Occupancy Period	√	√	√

### 6.3 DFS Threshold Level

DFS Threshold Level	
5250MHz ~ 5350MHz	-62 dBm @ antenna connector
5470MHz ~ 5725MHz	-62 dBm @ antenna connector
Note: The worst case level was selected to perform the test.	

### 6.4 Test Setup Block

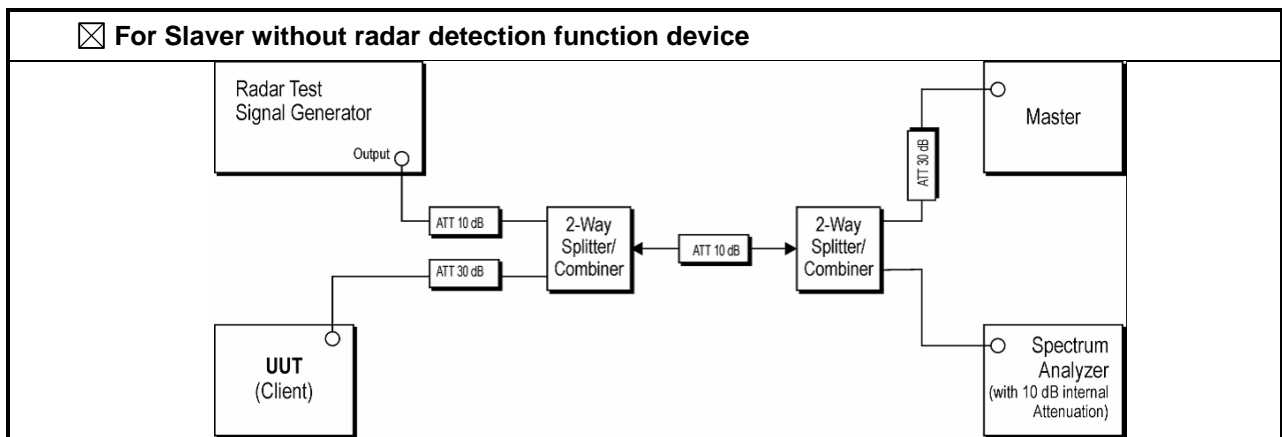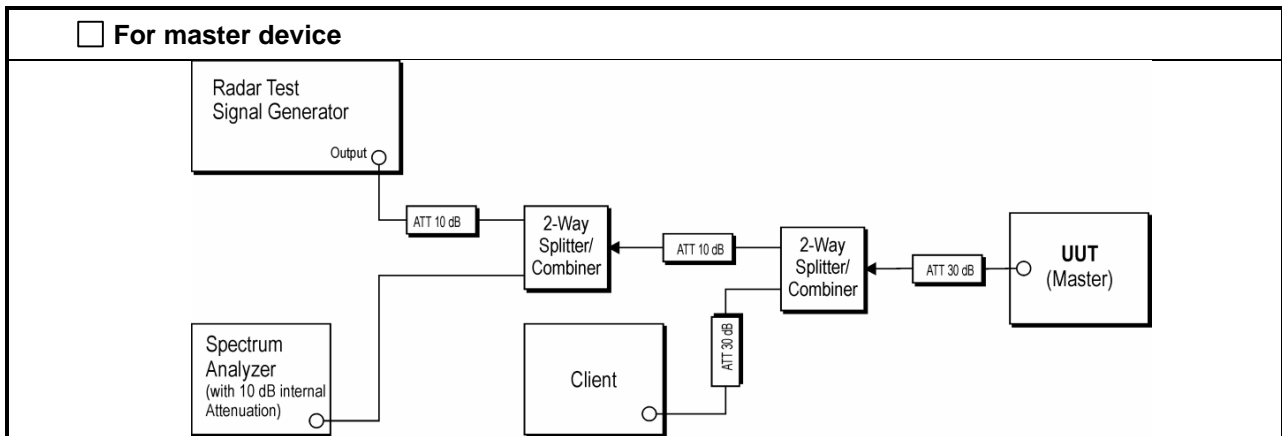

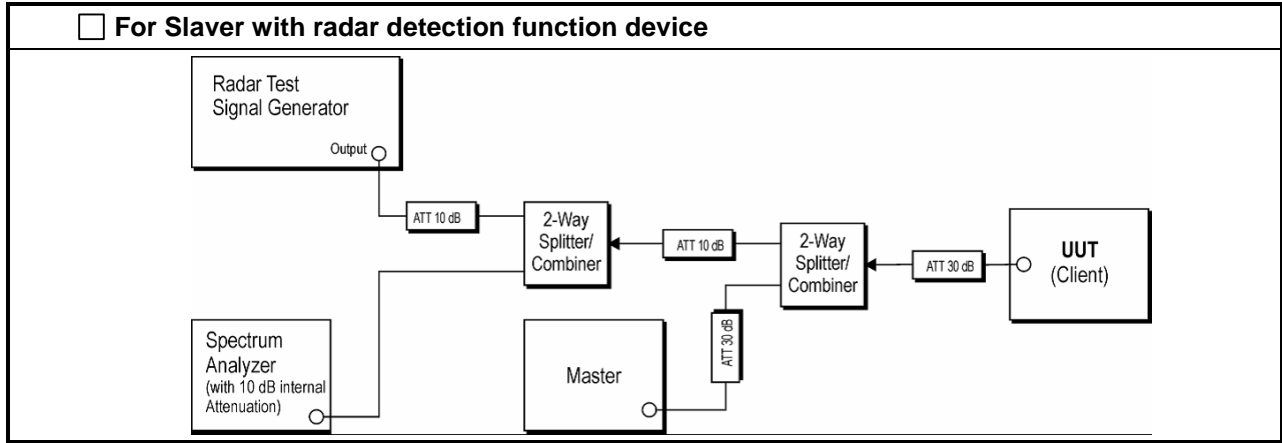


### 6.5 EUT Configuration for DFS Test

Test Items	Channel Frequency
Channel Move Time	5290MHz, 5530MHz
Channel Closing Transmission Time	5290MHz, 5530MHz

## 7 Test Result


### 7.1 Verification of Radar Type and Level

80MHz/5290MHz

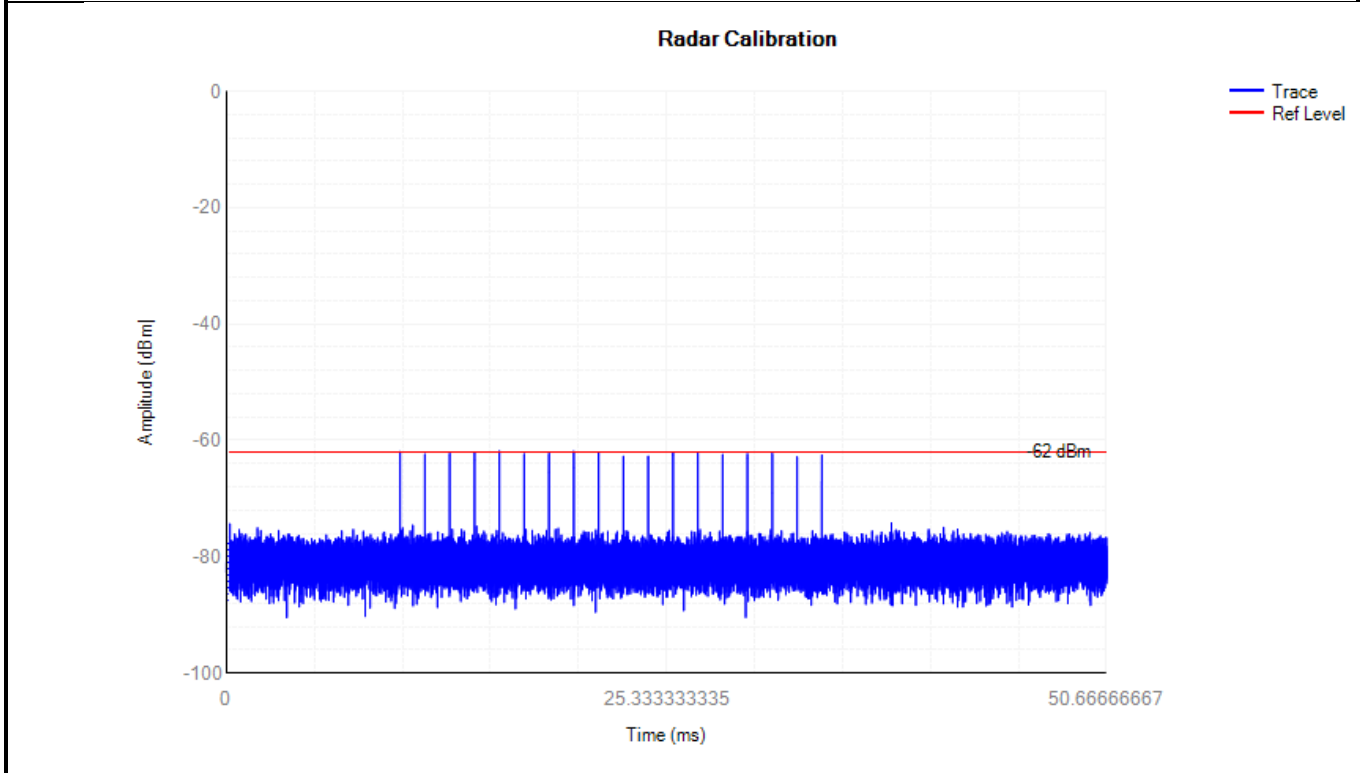


Radar Type 0

80MHz/5530MHz

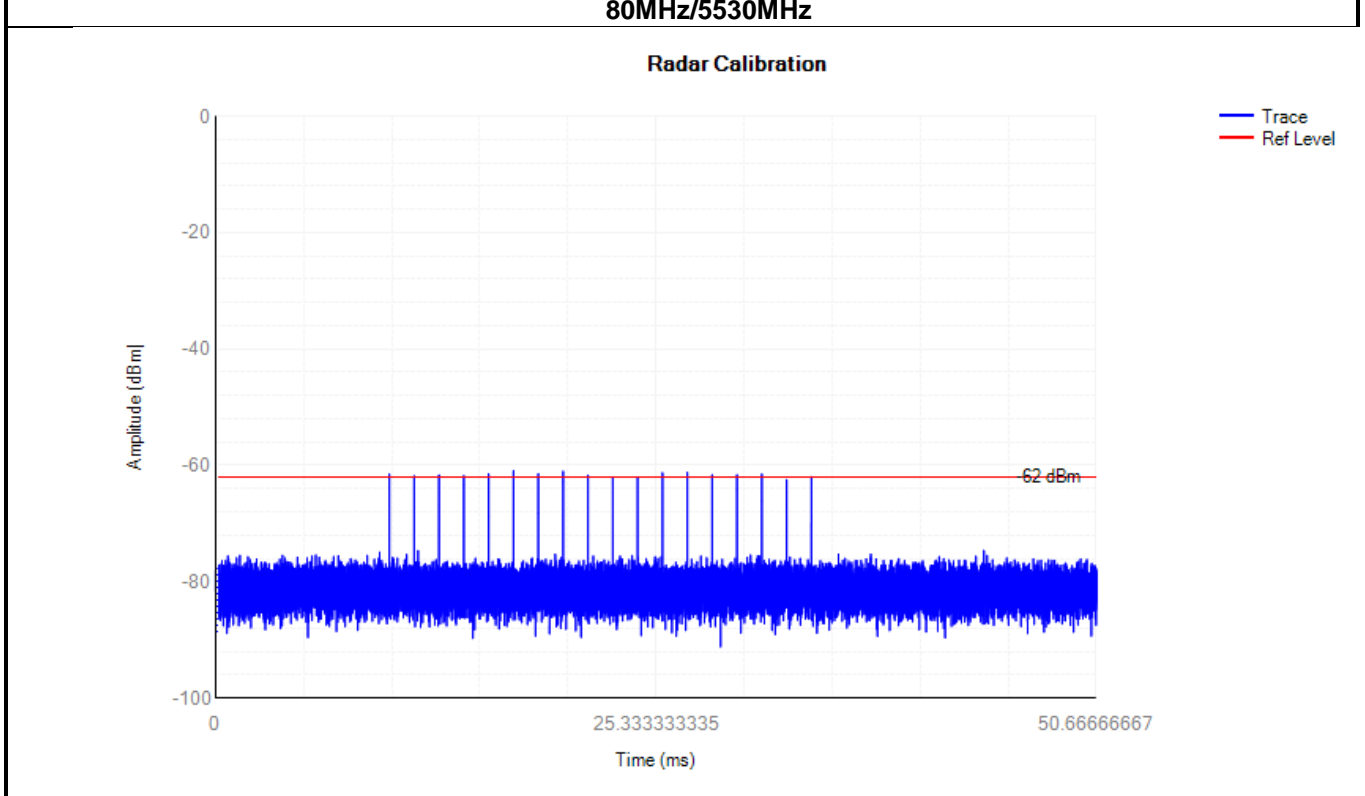


Radar Type 0

## 7.2 Channel Move Time and Channel Closing Transmission Time

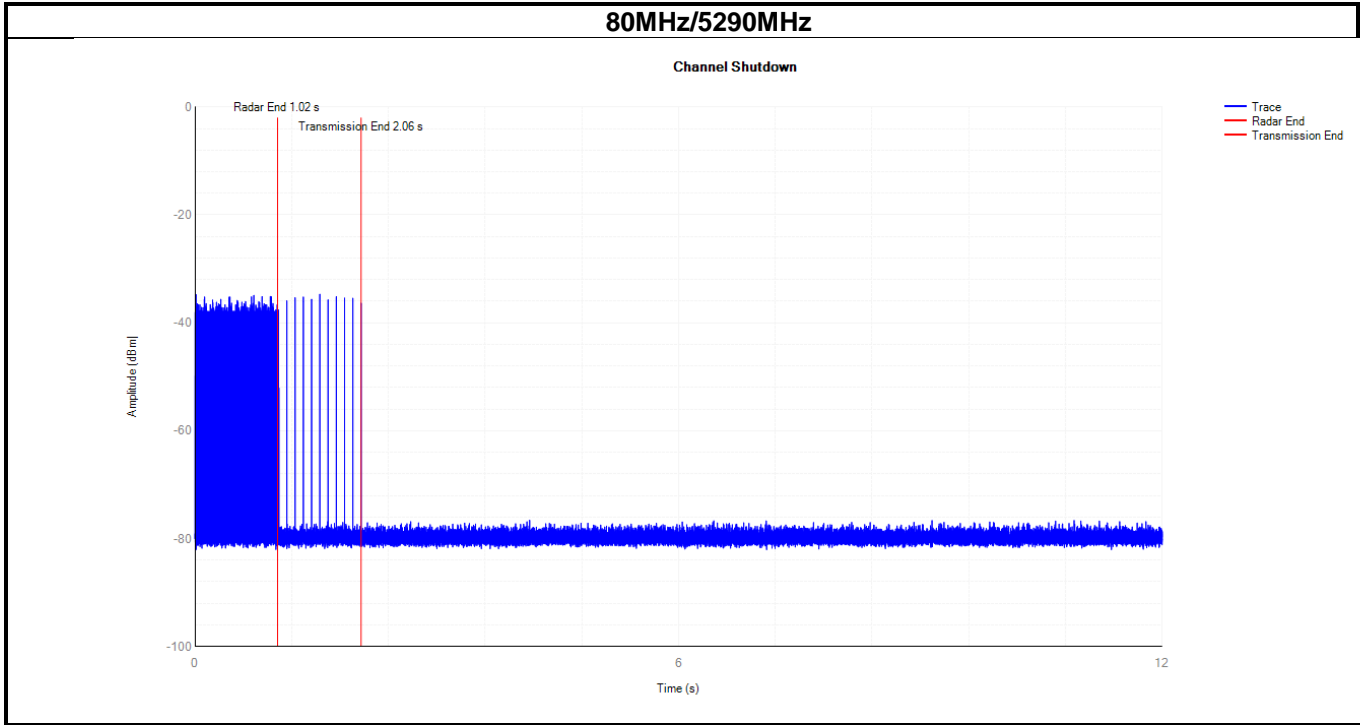

Test Items	Value	Limit
Channel Closing Transmission Time	6.9 ms	260 ms
Channel Move Time	1.04 s	10 s

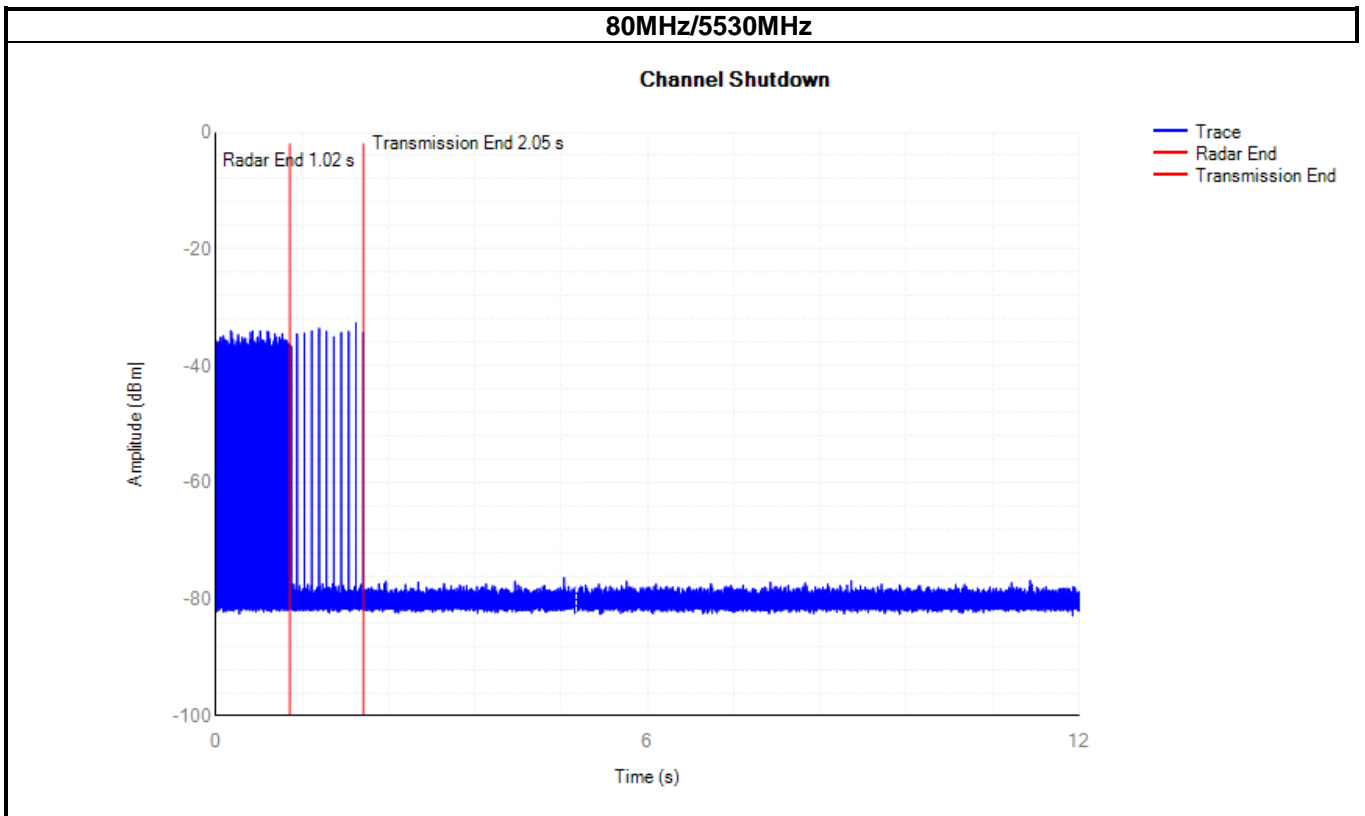

Test Items	Value	Limit
Channel Closing Transmission Time	8.1ms	260 ms

Channel Move Time	1.023 s	10 s
-------------------	---------	------

**Test Result: Pass**