

FCC Test Report

FCC ID : SWX-AFT
Equipment : AMPLIFI Teleport
Model No. : AFi-T
Brand Name : ULABS
Applicant : Ubiquiti Networks, Inc.
Address : 685 Third Avenue, 27th Floor New York, New York 10017 USA
Standard : 47 CFR FCC Part 15.249
Received Date : Jun. 19, 2017
Tested Date : Jul. 12 ~ Aug. 15, 2017

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	10
1.6	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS.....	12
3.1	Conducted Emissions.....	12
3.2	Radiated Emission	15
3.3	20dB and Occupied Bandwidth	26
4	TEST LABORATORY INFORMATION	27

Release Record

Report No.	Version	Description	Issued Date
FR761901AE	Rev. 01	Initial issue	Oct. 27, 2017

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.499MHz 23.00 (Margin -23.01dB) - AV	Pass
15.249(a)	Field Strength of Fundamental	Meet the requirement of limit	Pass
15.249(a)(d)	Field Strength of Harmonics and Emissions Radiated outside of the Specified Frequency Bands	Meet the requirement of limit	Pass
15.215(c)	20dB bandwidth	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	V4.0 LE	2402-2480	0-39 [40]	1 Mbps
Note 1: Bluetooth LE (Low energy) uses GFSK modulation.				

1.1.2 Antenna Details

Ant. No.	Type	Gain (dBi)	Connector	Remark
1	internal	2	N/A	---

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	100 ~ 240 Vac
-------------------	---------------

1.1.4 Accessories

N/A


1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6430	DoC	RJ45, 10m non-shielded.

1.3 Test Setup Chart

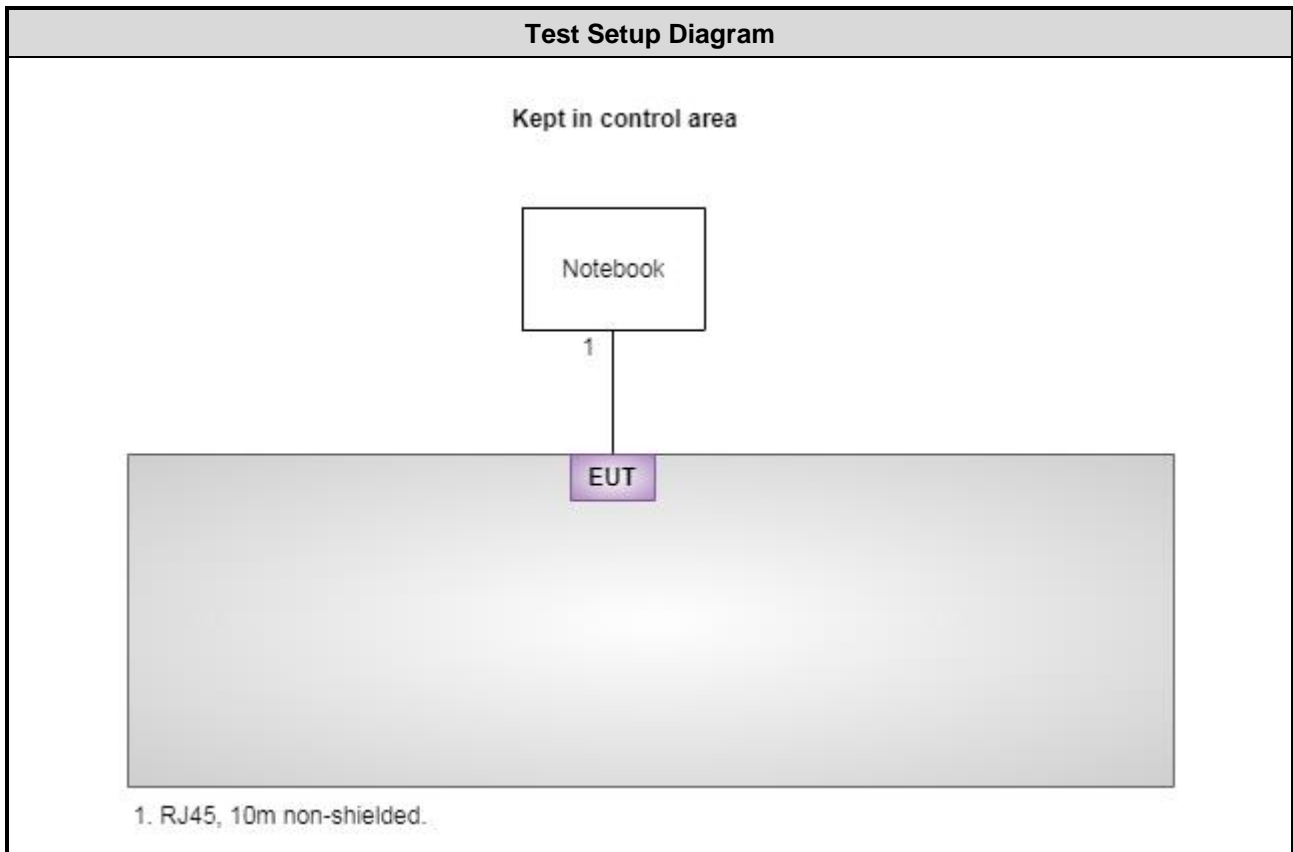

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Aug. 15, 2017				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Dec. 21, 2016	Dec. 20, 2017
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 08, 2016	Nov. 07, 2017
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Dec. 20, 2016	Dec. 19, 2017
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Aug. 11, 2017				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Nov. 25, 2016	Nov. 24, 2017
Receiver	R&S	ESR3	101658	Nov. 24, 2016	Nov. 23, 2017
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 25, 2017	Jul. 24, 2018
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 21, 2016	Dec. 20, 2017
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 09, 2016	Dec. 08, 2017
Preamplifier	EMC	EMC02325	980225	Jul. 28, 2017	Jul. 27, 2018
Preamplifier	Agilent	83017A	MY39501308	Oct. 06, 2016	Oct. 05, 2017
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 09, 2016	Dec. 08, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 09, 2016	Dec. 08, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 09, 2016	Dec. 08, 2017
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	16052	Dec. 09, 2016	Dec. 08, 2017
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 09, 2016	Dec. 08, 2017
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 09, 2016	Dec. 08, 2017
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Jul. 12, 2017				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Nov. 25, 2016	Nov. 24, 2017
Receiver	R&S	ESR3	101658	Nov. 24, 2016	Nov. 23, 2017
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 04, 2016	Aug. 03, 2017
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 21, 2016	Dec. 20, 2017
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 09, 2016	Dec. 08, 2017
Preamplifier	EMC	EMC02325	980225	Aug. 05, 2016	Aug. 04, 2017
Preamplifier	Agilent	83017A	MY39501308	Oct. 06, 2016	Oct. 05, 2017
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 09, 2016	Dec. 08, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 09, 2016	Dec. 08, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 09, 2016	Dec. 08, 2017
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	16052	Dec. 09, 2016	Dec. 08, 2017
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 09, 2016	Dec. 08, 2017
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 09, 2016	Dec. 08, 2017
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Jul. 12, 2017				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Mar. 15, 2017	Mar. 14, 2018
Power Meter	Anritsu	ML2495A	1241002	Oct. 06, 2016	Oct. 05, 2017
Power Sensor	Anritsu	MA2411B	1207366	Oct. 06, 2016	Oct. 05, 2017
DC POWER SOURCE	GW INSTRUK	GPC-6030D	EM892433	Oct. 20, 2016	Oct. 19, 2017
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.249

ANSI C63.10-2013

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.134 Hz
AC conducted emission	± 2.90 dB
Radiated emission ≤ 1 GHz	± 3.66 dB
Radiated emission > 1 GHz	± 5.63 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	24°C / 57%	Alex Tsai
Radiated Emissions	03CH01-WS	24°C / 62%	Vincent Yeh
RF Conducted	TH01-WS	24°C / 62%	Vincent Yeh

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	BT LE	2440	1 Mbps	---
Field Strength of Fundamental	BT LE	2402, 2440, 2480	1Mbps	---
Radiated Emissions ≤ 1GHz	BT LE	2440	1 Mbps	---
Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1 Mbps	---
20dB bandwidth	BT LE	2402, 2440, 2480	1 Mbps	---
NOTE:				
1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.				

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.


3.1.3 Test Setup




Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

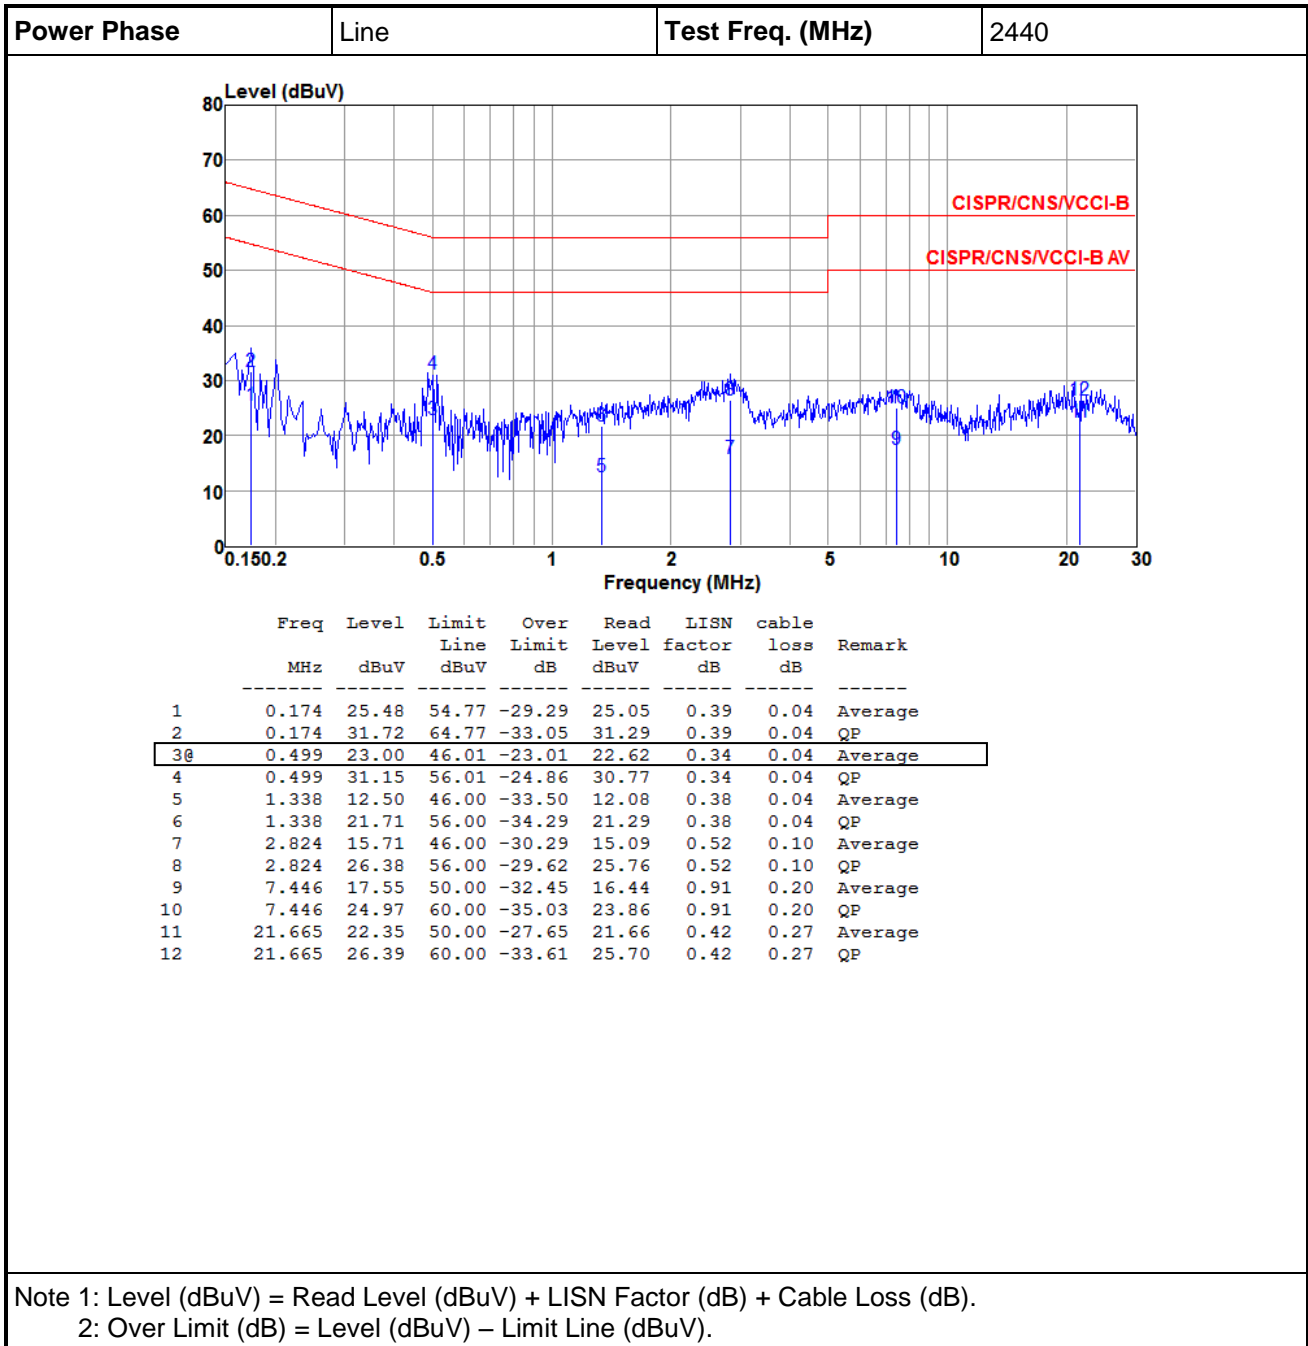

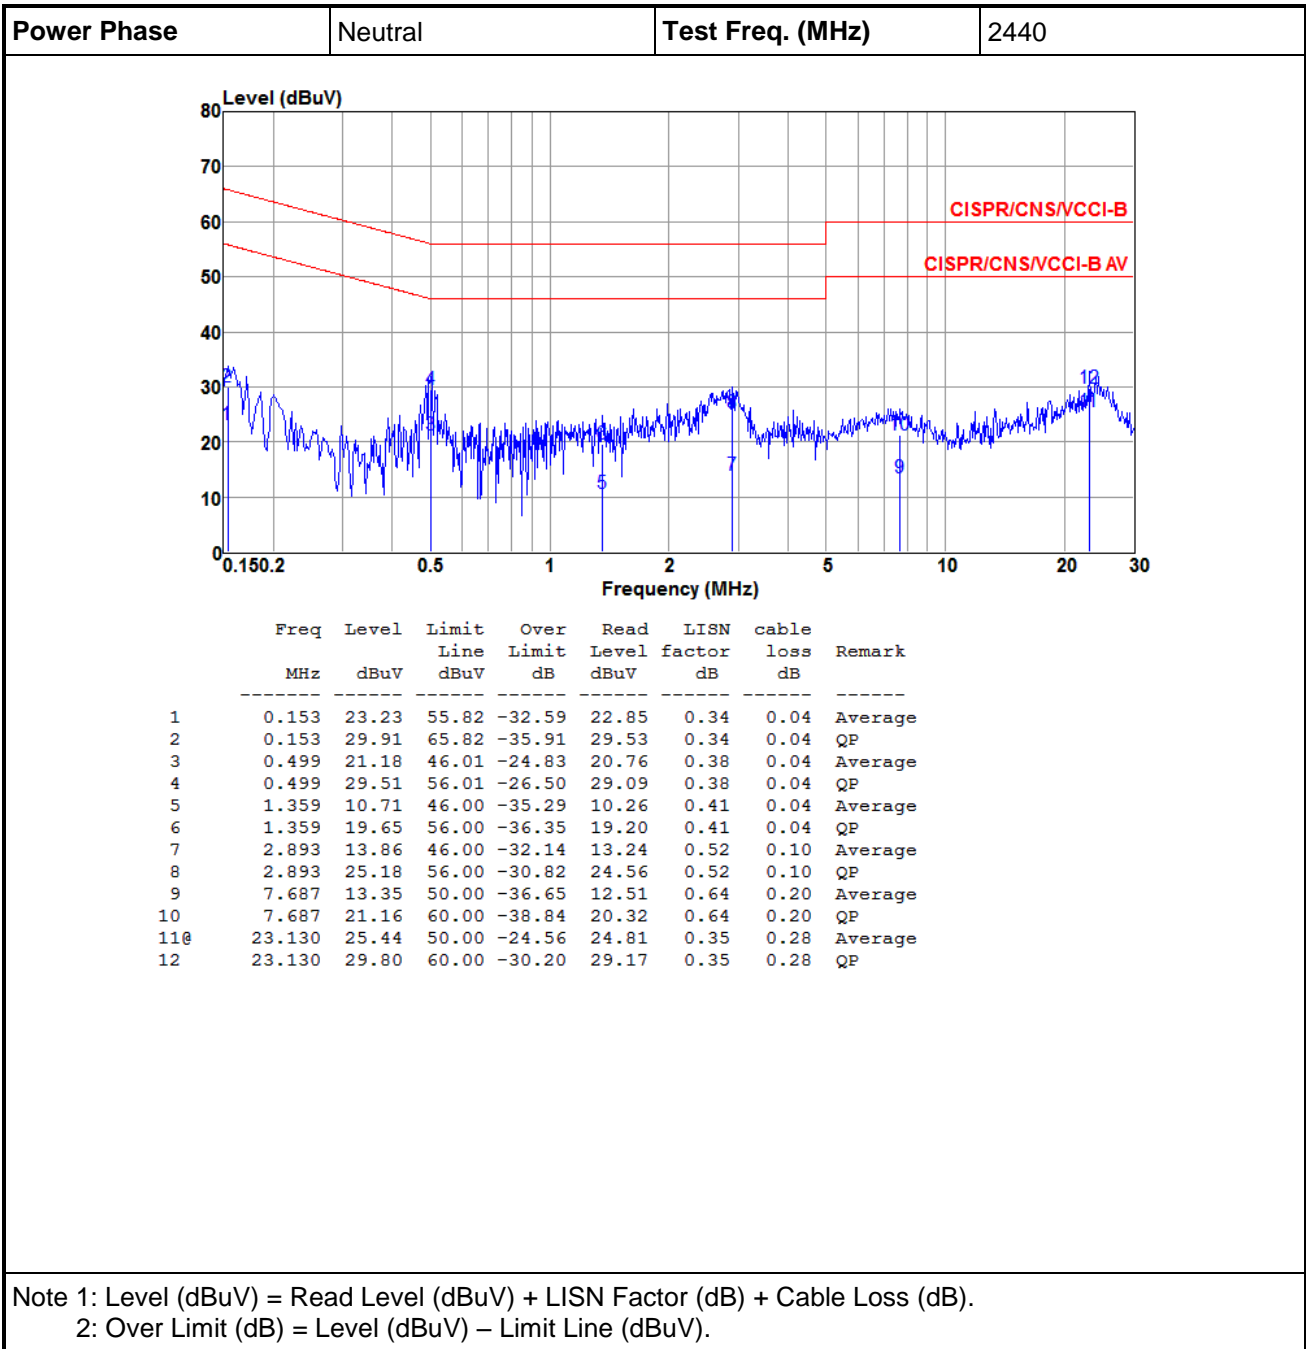

3.2 Radiated Emission

This section includes field strength of fundamental, field strength of harmonics and emissions radiated outside of the operating frequency bands.

3.2.1 Limit of field strength of fundamental and field strength of harmonics

Fundamental Frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
2400–2483.5 MHz	50	500

3.2.2 Limit of Unwanted Emissions

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in below table, whichever is the lesser attenuation.

Radiated emission limits			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.3 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. Radiated emission below 1GHz
120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission
2. Radiated emission above 1GHz / Peak value except fundamental
RBW=1MHz, VBW=3MHz and Peak detector
3. Radiated emission above 1GHz / Average value except fundamental
RBW=1MHz, VBW=3kHz and Peak detector
4. Radiated emission Peak value for fundamental
RBW=3MHz, VBW=10MHz and Peak detector
5. Radiated emission Average value for fundamental
RBW=3MHz, VBW=3kHz and Peak detector

3.2.4 Test Setup

Radiated Emissions below 1 GHz

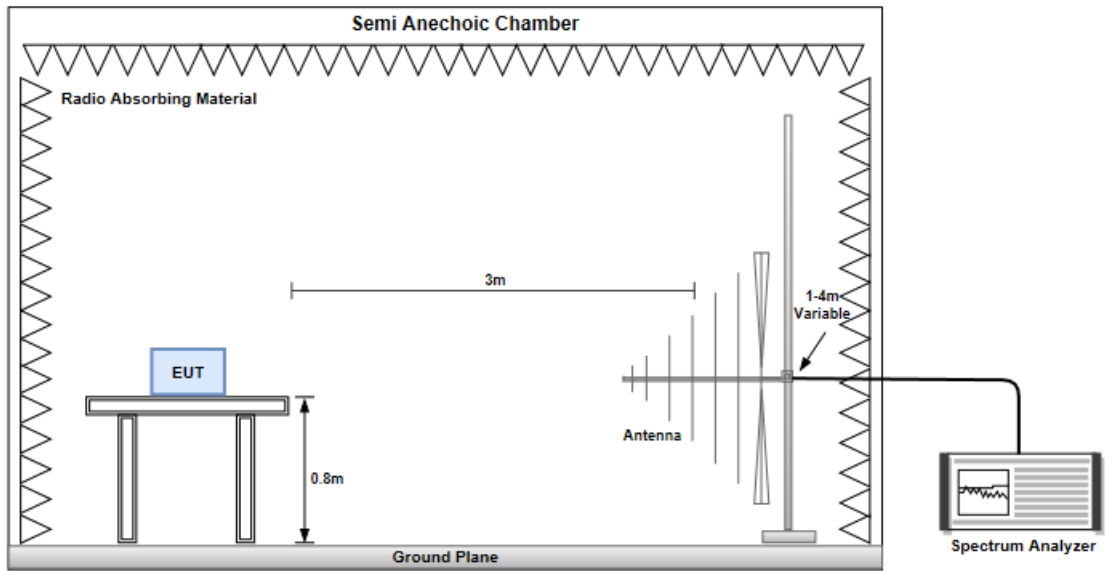


Radiated Emissions above 1 GHz

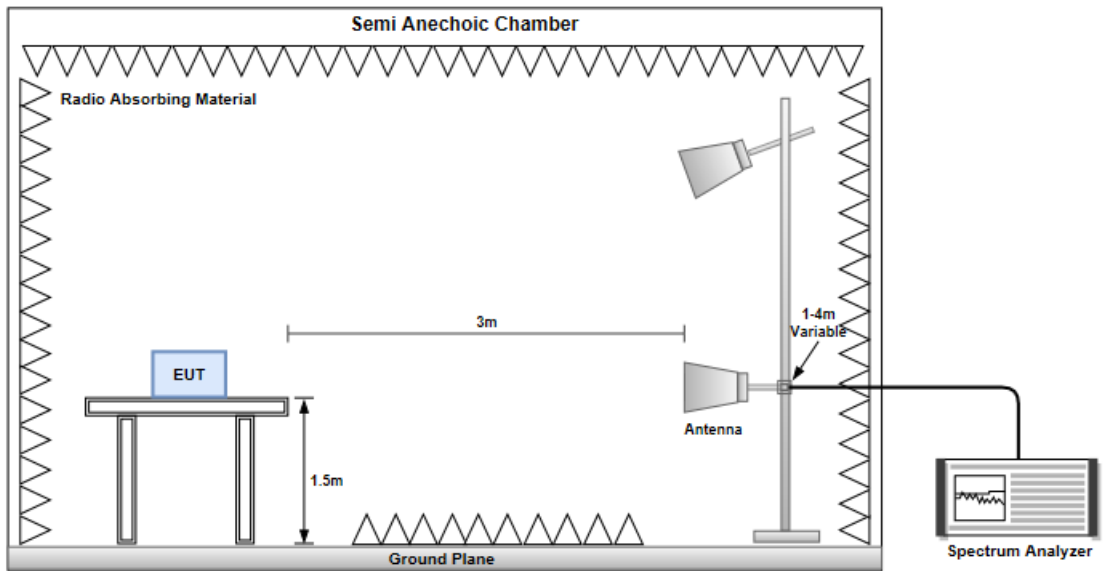

3.2.5 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	GFSK	Test Freq. (MHz)	2440
Polarization	Horizontal		

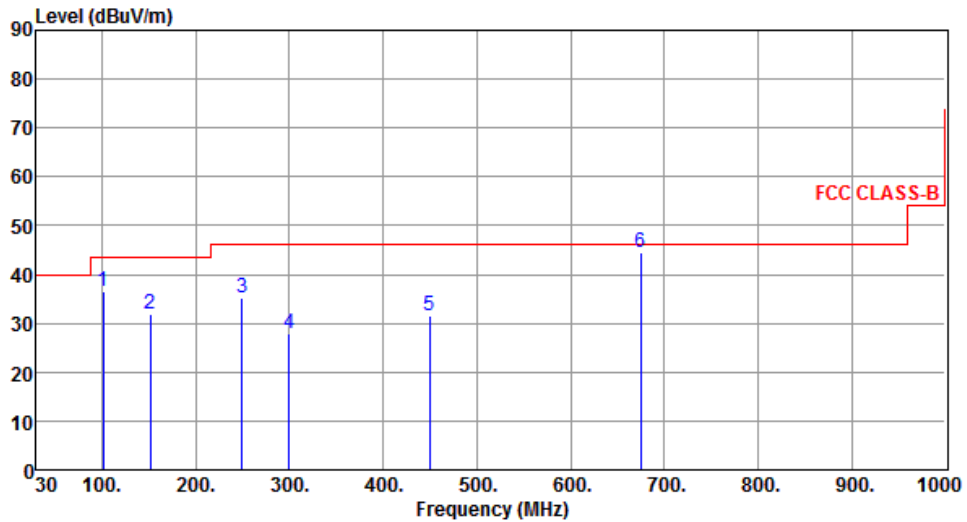

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	101.78	36.57	43.50	-6.93	49.26	-12.69	Peak	---	---
2	151.25	31.77	43.50	-11.73	40.10	-8.33	Peak	---	---
3	249.22	35.35	46.00	-10.65	44.73	-9.38	Peak	---	---
4	299.66	27.79	46.00	-18.21	35.47	-7.68	Peak	---	---
5	450.01	31.64	46.00	-14.36	35.42	-3.78	Peak	---	---
6	675.05	44.44	46.00	-1.56	44.21	0.23	QP	118	115


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2440
Polarization	Vertical		

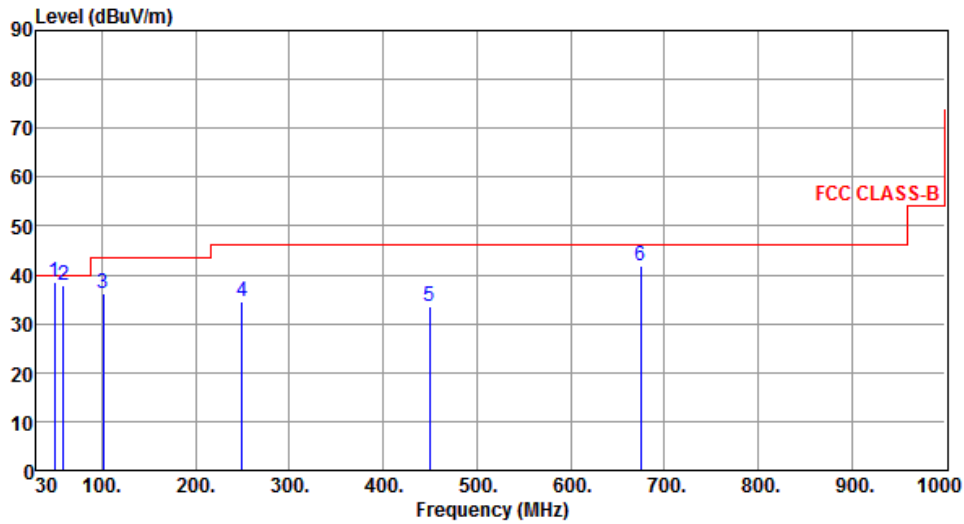

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	49.40	38.51	40.00	-1.49	46.24	-7.73	QP	100	340
2	58.71	37.80	40.00	-2.20	46.21	-8.41	QP	100	78
3	101.78	36.32	43.50	-7.18	49.01	-12.69	Peak	---	---
4	249.22	34.47	46.00	-11.53	43.85	-9.38	Peak	---	---
5	450.01	33.58	46.00	-12.42	37.36	-3.78	Peak	---	---
6	675.05	41.80	46.00	-4.20	41.57	0.23	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz)

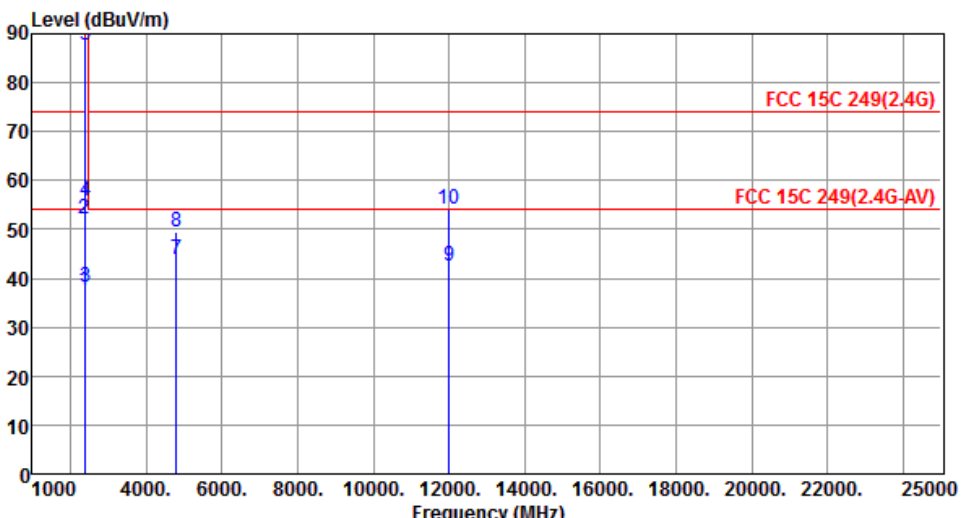Modulation	GFSK	Test Freq. (MHz)	2402						
Polarization	Horizontal								
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (1000 to 25000). Two horizontal red lines represent FCC limits: FCC 15C 249(2.4G) at 74 dBuV/m and FCC 15C 249(2.4G-AV) at 54 dBuV/m. Test results are shown as blue vertical lines with markers: 1 (2390 MHz, 37.53 dBuV/m), 2 (2390 MHz, 52.00 dBuV/m), 3 (2400 MHz, 38.22 dBuV/m), 4 (2400 MHz, 55.64 dBuV/m), 5 (2402 MHz, 87.72 dBuV/m), 6 (2402 MHz, 88.90 dBuV/m), 7 (4804 MHz, 43.87 dBuV/m), 8 (4804 MHz, 49.33 dBuV/m), 9 (12010 MHz, 42.51 dBuV/m), and 10 (12010 MHz, 54.26 dBuV/m).</p>									
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	
1	2390.00	37.53	54.00	-16.47	40.71	-3.18	Average	204	81
2	2390.00	52.00	74.00	-22.00	55.18	-3.18	Peak	204	81
3	2400.00	38.22	54.00	-15.78	41.36	-3.14	Average	204	81
4	2400.00	55.64	74.00	-18.36	58.78	-3.14	Peak	204	81
5	2402.00	87.72	94.00	-6.28	90.85	-3.13	Average	204	81
6	2402.00	88.90	114.00	-25.10	92.03	-3.13	Peak	204	81
7	4804.00	43.87	54.00	-10.13	40.13	3.74	Average	220	47
8	4804.00	49.33	74.00	-24.67	45.59	3.74	Peak	220	47
9	12010.00	42.51	54.00	-11.49	28.96	13.55	Average	100	61
10	12010.00	54.26	74.00	-19.74	40.71	13.55	Peak	100	61

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

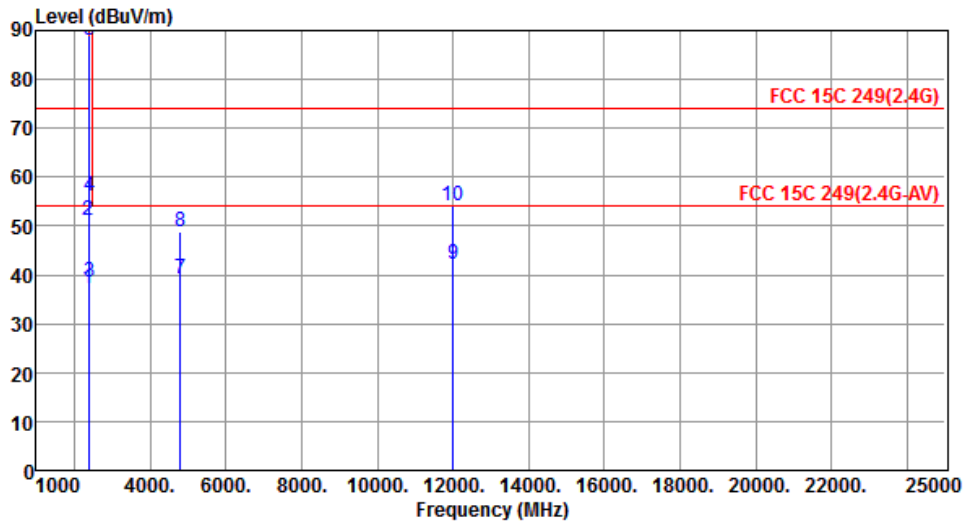


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.25	54.00	-16.75	40.43	-3.18	Average	100	113
2	2390.00	51.28	74.00	-22.72	54.46	-3.18	Peak	100	113
3	2400.00	38.46	54.00	-15.54	41.60	-3.14	Average	100	113
4	2400.00	56.24	74.00	-17.76	59.38	-3.14	Peak	100	113
5	2402.00	87.95	94.00	-6.05	91.08	-3.13	Average	100	113
6	2402.00	89.03	114.00	-24.97	92.16	-3.13	Peak	100	113
7	4804.00	39.22	54.00	-14.78	35.48	3.74	Average	171	299
8	4804.00	48.86	74.00	-25.14	45.12	3.74	Peak	171	299
9	12010.00	42.31	54.00	-11.69	28.76	13.55	Average	100	81
10	12010.00	54.08	74.00	-19.92	40.53	13.55	Peak	100	81

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2440
Polarization	Horizontal		

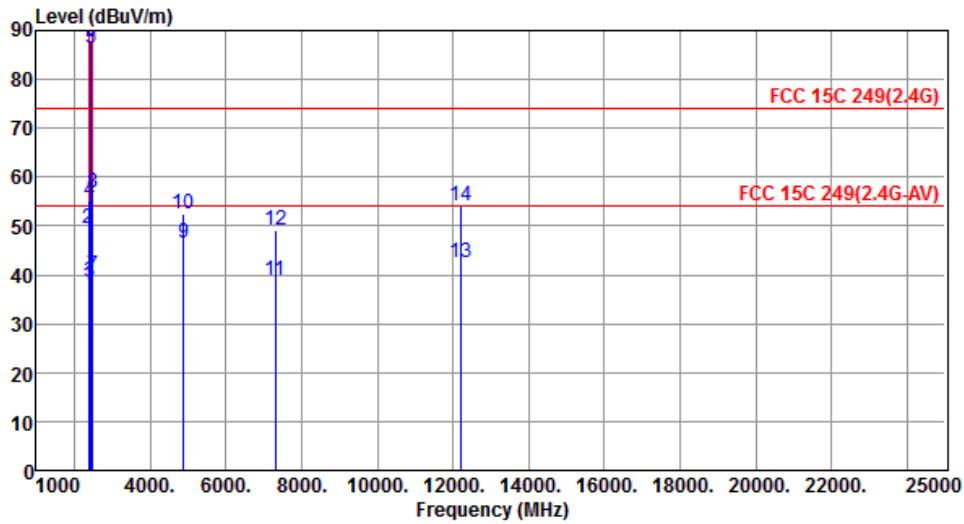


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.86	54.00	-16.14	41.04	-3.18	Average	208	100
2	2390.00	49.44	74.00	-24.56	52.62	-3.18	Peak	208	100
3	2400.00	38.44	54.00	-15.56	41.58	-3.14	Average	208	100
4	2400.00	55.26	74.00	-18.74	58.40	-3.14	Peak	208	100
5	2440.00	86.50	94.00	-7.50	89.48	-2.98	Average	208	100
6	2440.00	87.63	114.00	-26.37	90.61	-2.98	Peak	208	100
7	2483.50	39.84	54.00	-14.16	42.64	-2.80	Average	208	100
8	2483.50	56.71	74.00	-17.29	59.51	-2.80	Peak	208	100
9	4880.00	46.59	54.00	-7.41	42.63	3.96	Average	217	47
10	4880.00	52.46	74.00	-21.54	48.50	3.96	Peak	217	47
11	7320.00	39.01	54.00	-14.99	30.60	8.41	Average	100	356
12	7320.00	49.21	74.00	-24.79	40.80	8.41	Peak	100	356
13	12200.00	42.62	54.00	-11.38	28.94	13.68	Average	100	57
14	12200.00	54.12	74.00	-19.88	40.44	13.68	Peak	100	57

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2440
Polarization	Vertical		

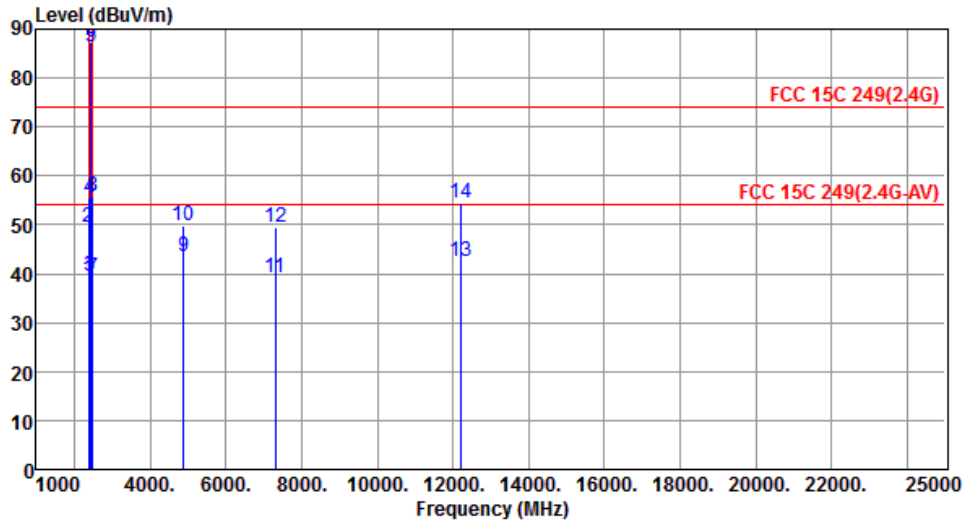


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.76	54.00	-15.24	41.94	-3.18	Average	100	47
2	2390.00	49.60	74.00	-24.40	52.78	-3.18	Peak	100	47
3	2400.00	39.43	54.00	-14.57	42.57	-3.14	Average	100	47
4	2400.00	55.38	74.00	-18.62	58.52	-3.14	Peak	100	47
5	2440.00	86.28	94.00	-7.72	89.26	-2.98	Average	100	47
6	2440.00	87.30	114.00	-26.70	90.28	-2.98	Peak	100	47
7	2483.50	39.32	54.00	-14.68	42.12	-2.80	Average	100	47
8	2483.50	55.96	74.00	-18.04	58.76	-2.80	Peak	100	47
9	4880.00	43.38	54.00	-10.62	39.42	3.96	Average	228	248
10	4880.00	49.94	74.00	-24.06	45.98	3.96	Peak	228	248
11	7320.00	39.15	54.00	-14.85	30.74	8.41	Average	100	17
12	7320.00	49.35	74.00	-24.65	40.94	8.41	Peak	100	17
13	12200.00	42.58	54.00	-11.42	28.90	13.68	Average	100	86
14	12200.00	54.33	74.00	-19.67	40.65	13.68	Peak	100	86

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal		

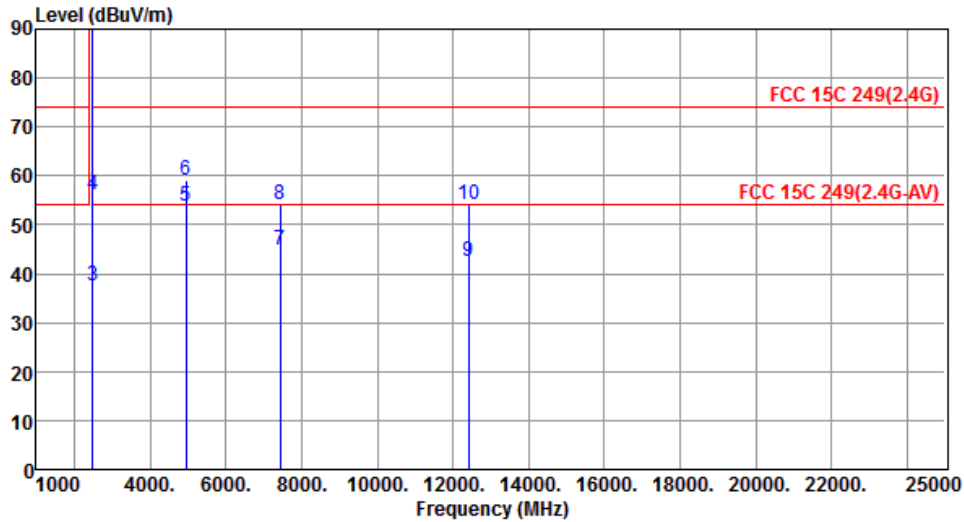


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2480.00	91.43	94.00	-2.57	94.24	-2.81	Average	227	83
2	2480.00	92.49	114.00	-21.51	95.30	-2.81	Peak	227	83
3	2483.50	37.59	54.00	-16.41	40.39	-2.80	Average	227	83
4	2483.50	56.11	74.00	-17.89	58.91	-2.80	Peak	227	83
5	4960.00	53.82	54.00	-0.18	49.61	4.21	Average	164	98
6	4960.00	58.99	74.00	-15.01	54.78	4.21	Peak	164	98
7	7440.00	44.85	54.00	-9.15	36.32	8.53	Average	162	14
8	7440.00	54.28	74.00	-19.72	45.75	8.53	Peak	162	14
9	12400.00	42.46	54.00	-11.54	28.63	13.83	Average	100	108
10	12400.00	53.99	74.00	-20.01	40.16	13.83	Peak	100	108

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

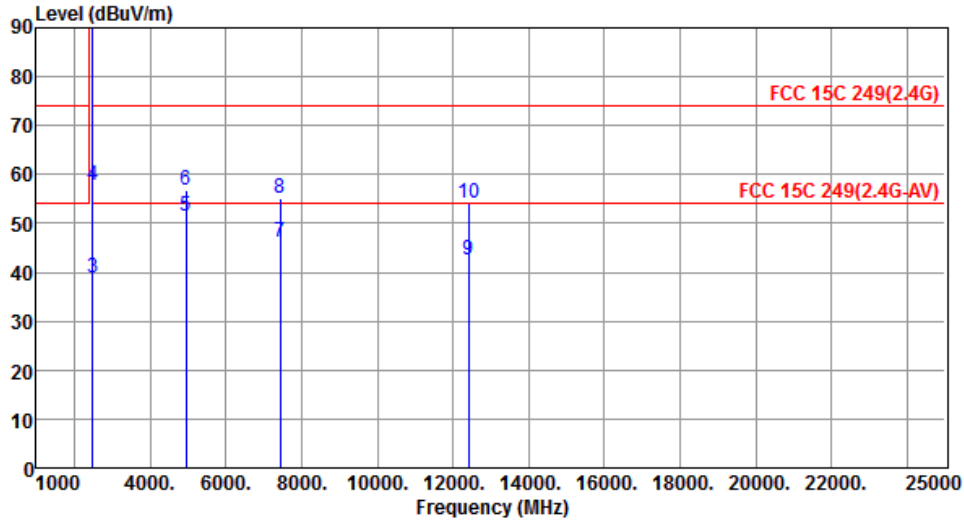

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2480.00	90.54	94.00	-3.46	93.35	-2.81	Average	100	114
2	2480.00	91.59	114.00	-22.41	94.40	-2.81	Peak	100	114
3	2483.50	38.72	54.00	-15.28	41.52	-2.80	Average	100	114
4	2483.50	57.83	74.00	-16.17	60.63	-2.80	Peak	100	114
5	4960.00	51.56	54.00	-2.44	47.35	4.21	Average	202	1
6	4960.00	56.78	74.00	-17.22	52.57	4.21	Peak	202	1
7	7440.00	46.06	54.00	-7.94	37.53	8.53	Average	241	6
8	7440.00	55.24	74.00	-18.76	46.71	8.53	Peak	241	6
9	12400.00	42.66	54.00	-11.34	28.83	13.83	Average	100	248
10	12400.00	54.10	74.00	-19.90	40.27	13.83	Peak	100	248

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.3 20dB and Occupied Bandwidth

3.3.1 Test Procedures


1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak(20 dB bandwidth) / Sample(Occupied bandwidth), Trace mode = max hold
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.
5. Use the occupied measurement function of spectrum analyzer to measure 99% occupied bandwidth

3.3.2 Test Setup



3.3.3 20dB and Occupied Bandwidth

Freq. (MHz)	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
2402	1.24	1.07
2440	1.24	1.08
2480	1.24	1.07

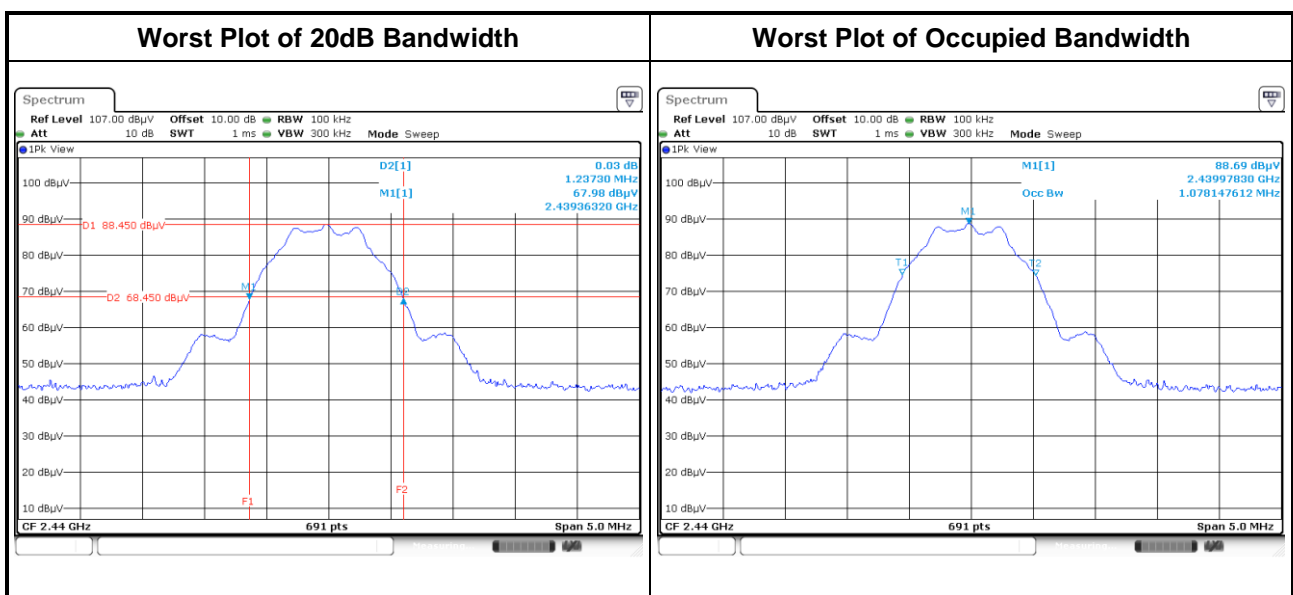

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==